

# **FCC Test Report**

Report No.: AGC00806210504FE03

FCC ID	: 2AS7V-G91
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: Wireless TWS earphones
BRAND NAME	: glory star
MODEL NAME	<ul> <li>G91, Vieta Pro Mute, Vieta Pro Note, G91A, G69A, G62,</li> <li>GT96, GT15, GT16, GT09 GT10, G69B G70, G71, RVJ7000, AW6000</li> </ul>
APPLICANT	: Shenzhen Glory Star Technology Industrial Co., Ltd
DATE OF ISSUE	: May 27, 2021
STANDARD(S)	: FCC Part 15.247
REPORT VERSION	: V1.0
	Compliance





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pestua/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d we after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



# **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	© /	May 27, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festive/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGE" the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



# TABLE OF CONTENTS

	1. VERIFICATION OF CONFORMITY	5
	2. GENERAL INFORMATION	6
	2.1. PRODUCT DESCRIPTION	6
	2.2. TABLE OF CARRIER FREQUENCYS	
	2.3. RECEIVER INPUT BANDWIDTH	
	2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
	2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
	2.6. RELATED SUBMITTAL(S) / GRANT (S)	
	2.7. TEST METHODOLOGY	
	2.8. SPECIAL ACCESSORIES	
	2.9. EQUIPMENT MODIFICATIONS	
	2.10. ANTENNA REQUIREMENT	8
	3. MEASUREMENT UNCERTAINTY	9
	4. DESCRIPTION OF TEST MODES	
	5. SYSTEM TEST CONFIGURATION	11
	5.1. CONFIGURATION OF EUT SYSTEM	11
	5.2. EQUIPMENT USED IN TESTED SYSTEM	11
	5.3. SUMMARY OF TEST RESULTS	11
	6. TEST FACILITY	12
	7. PEAK OUTPUT POWER	
	7.1. MEASUREMENT PROCEDURE	
	7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	7.3. LIMITS AND MEASUREMENT RESULT	14
	8. 20DB BANDWIDTH	
	8.1. MEASUREMENT PROCEDURE	
	8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	8.3. LIMITS AND MEASUREMENT RESULTS	
	9. CONDUCTED SPURIOUS EMISSION	
Sta pre	9.1. MEASUREMENT PROCEDURE	The test results



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. RADIATED EMISSION	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SETUP	
10.3. LIMITS AND MEASUREMENT RESULT	
10.4. TEST RESULT	
11. NUMBER OF HOPPING FREQUENCY	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
11.3. MEASUREMENT EQUIPMENT USED	
11.4. LIMITS AND MEASUREMENT RESULT	
12. TIME OF OCCUPANCY (DWELL TIME)	
12.1. MEASUREMENT PROCEDURE	51
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	51
12.3. MEASUREMENT EQUIPMENT USED	51
12.4. LIMITS AND MEASUREMENT RESULT	
13. FREQUENCY SEPARATION	
13.1. MEASUREMENT PROCEDURE	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.3. MEASUREMENT EQUIPMENT USED	
13.4. LIMITS AND MEASUREMENT RESULT	55
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
	59

#### **1. VERIFICATION OF CONFORMITY**

Applicant	Shenzhen Glory Star Technology Industrial Co., Ltd
Address	Room 2102, Block 1 st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China
Manufacturer	Shenzhen Glory Star Technology Industrial Co., Ltd
Address	Room 2102, Block 1 st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China
Factory	Shenzhen Glory Star Technology Industrial Co., Ltd
Address	Room 2102, Block 1 st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China
Product Designation	Wireless TWS earphones
Brand Name	glory star
Test Model	G91
Series Model	Vieta Pro Mute, Vieta Pro Note, G91A, G69A, G62, GT96, GT15, GT16, GT09 GT10, G69B G70, G71, RVJ7000, AW6000
Declaration of Difference	All the same except for the model name.
Date of test	May 19, 2021 to May 27, 2021
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By

Then Hunny

Thea Huang Project Engineer

May 27, 2021

Max Zhank

Reviewed By

Max Zhang Reviewer

May 27, 2021

Approved By


Forrest Lei

Authorized Officer

May 27, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand resting in section of a stamp is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





# 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless TWS earphones". It is designed by way of utilizing the GFSK and  $\pi$ /4-DQPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480 GHz
RF Output Power	3.239dBm (Max)
Bluetooth Version	V5.1
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps
Number of channels	79
Hardware Version	V2
Software Version	V1.0
Antenna Designation	Ceramic Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter
Note: 1.The EUT doesn't su	pport 8DPSK and BLE.

2. The EUT comprises left and right channel headsets, both are the same, the left headset had been tested and recorded in this report as the worst case.

#### **2.2. TABLE OF CARRIER FREQUENCYS**

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	C1 C	2403 MHz
30 2.0		
	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
	77	2479 MHz
	78	2480 MHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written and the stamped by the stamp of the report is not permitted without the written and the stamp of the report is not permitted without the written and the stamp of the report is not permitted without the written and the stamp of the report is not permitted without the written and the stamp of the report is not permitted without the written and the stamp of the st Inspection dicated he test results anthorization of AC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d ne test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode: 40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55, 36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63, 42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14, 51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49, 20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37, 65, 32, 70, 52, 27, 59, 22, 62, 39

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.



The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

### 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AS7V-G91** filing to comply with the FCC PART 15.247 requirements.

### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

# **3. MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	$U_{c} = \pm 2 \%$	
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$	



#### **4. DESCRIPTION OF TEST MODES**

NO.	TEST MODE DESCRIPTION		
1	Low channel GFSK		
2	Middle channel GFSK		
3	High channel GFSK		
4	Low channel π/4-DQPSK		
5	Middle channel π/4-DQPSK		
6	High channel π/4-DQPSK		
7	Hopping mode GFSK		
8	Hopping mode π/4-DQPSK		

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

<b>和口设置</b> 配置数据发送成功!		
B □ COM6(USB-SERIAL CH340) - reply data: 04 0E 0	04 01 01 FC 00	
p特室 115200 return code: 0x0		
National State Sta		
	04 01 01 FC 00	
og验位 None		
ĒL位 1	04 01 01 50 00	
商控NoFlow ▼ return code: 0x0	04 01 01 PC 00	
TO THE MARK CONTACT OF THE OTHER		
关闭 EEEEWith发达成功! reply data: 04 0E (	04 01 01 FC 00	
antima and a 0-0		
BR/EDR BLE Peturn code: 0x0 配置数据发送成功!		
MODE TX reply data: 04 0E 0	04 01 01 FC 00	
Channel 78 return code: 0x0		
配置数据发送成功!		
reply data: 04 0E 0	04 01 01 FC 00	
Packet_Type 1-DH5  vector return code: 0x0		
Hopping ON The		
Parts_Types Pn9 reply data: 04 0E 0	04 01 01 FC 00	
Tetali code. 0x0		
配置数据发送成功!		
Send configuration reply data: 04 0E 0	04 01 01 FC 00	
return code: 0x0		
配置数据发送成功!		
reply data: 04 0E 0 return code: 0x0	04 01 01 FC 00	
return code: 0x0 配置数据发送成功!		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestholinspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



# **5. SYSTEM TEST CONFIGURATION**

**5.1. CONFIGURATION OF EUT SYSTEM** 

Radiated Emission Configure:

EUT

Conducted Emission Configure:

	D	
EUT		AE

#### 5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless TWS earphones	G91	2AS7V-G91	EUT
2	Control Box	USB TO TTL	N/A	AE

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China			
Designation Number	CN1259			
FCC Test Firm Registration Number	975832			
A2LA Cert. No.	5054.02			
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA			

#### TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15,2021	May 14,2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



# 7. PEAK OUTPUT POWER

#### 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW  $\geq$ RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.


Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

# PEAK POWER TEST SETUP







**RF** Cable

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the stand of the stand in the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
-0	2402	1.184	≪21	Pass	
GFSK	2441	1.985	\$21	Pass	
	2480	2.479	\$21	Pass	
6	2402	1.856	\$21 🖉	Pass	
π /4-DQPSK	2441	2.756	\$21	Pass	
	2480	3.239	\$21	Pass	

#### **Test Graphs of Conducted Output Power**

Agilent Spectrum Analyzer - Swept SA				
Center Freq 2.4020000	CORREC SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	10:32:26 AM May 24, 2021 TRACE 1 2 3 4 5 6	Frequency
Contor 1109 2:40200000	PNO: Fast +++ Trig: Free Run	Avg Hold: 100/100	TYPE MWWWWWWW DET P N N N N N	
	IFGain:Low #Atten: 40 dB	Mikud	2 404 902 CU	Auto Tune
		IVIKE	2.401 802 GHz 1.184 dBm	
10 dB/div Ref 20.00 dBm			1.104 abiii	
				Center Fred
10.0				2.402000000 GHz
	l  1			
0.00				04
				Start Free 2.399500000 GH
-10.0				2.399500000 GH2
B S ALL AND A S A S A S A S A S A S A S A S A S A				
-20.0				Stop Free
and the second s			and the second sec	2.404500000 GHz
-30.0				
-40.0				CF Step
-40.0				500.000 kH: Auto Mar
-50.0				
-60.0				Freq Offse
				U H.
-70.0				
Center 2.402000 GHz			Span 5.000 MHz	
#Res BW 1.5 MHz	#VBW 5.0 MHz	Sweep 1.	066 ms (1000 pts)	
MSG		STATUS		
Tost	_Graph_BR_ANT1_24	102 1Mbps P	eak Power	
1631				

#### Report No.: AGC00806210504FE03 Page 15 of 75

Stop Freq 2.482500000 GHz

> CF Step 500.000 kHz

Freq Offset 0 Hz


Mar

Auto

Span 5.000 MHz Sweep 1.066 ms (1000 pts)

**E**STATUS



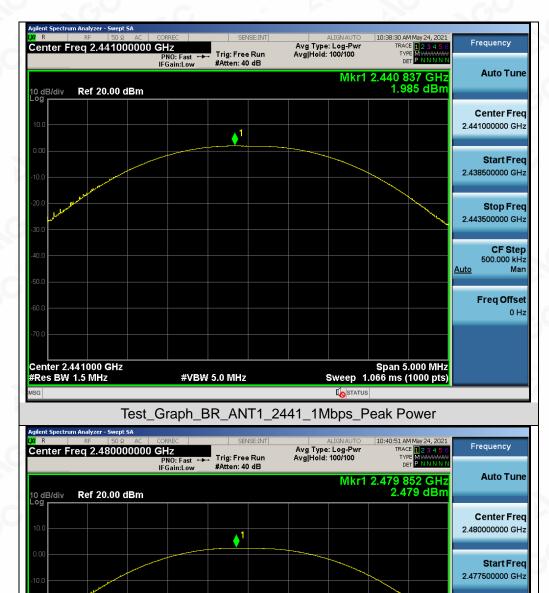

Test\_Graph\_BR\_ANT1\_2480\_1Mbps\_Peak Power


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approvation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


#VBW 5.0 MHz

Center 2.480000 GHz #Res BW 1.5 MHz


#### Report No.: AGC00806210504FE03 Page 16 of 75



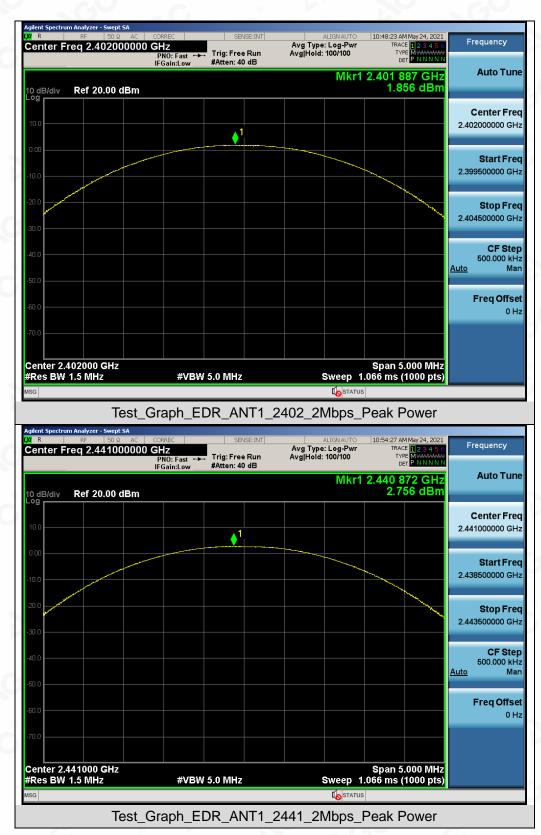





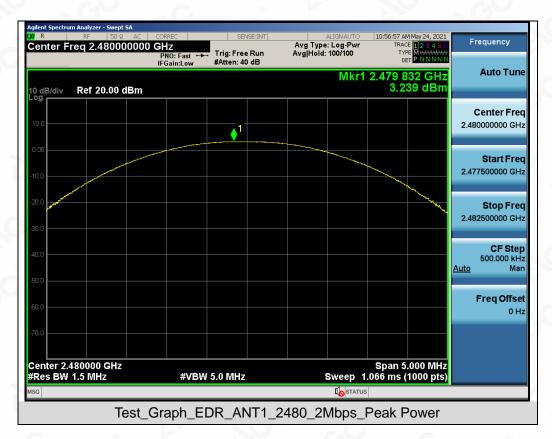

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com




### 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

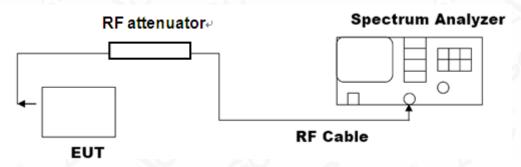


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand of the report is not permitted without the written authorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day and a test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
- 0	2402	0.850	0.945	N/A	Pass
GFSK	2441	0.851	0.946	N/A	Pass
	2480	0.852	0.946	N/A	Pass
0	2402	1.169	1.275	N/A	Pass
π /4-DQPSK	2441	1.170	1.276	N/A	Pass
	2480	1.172	1.275	N/A	Pass

#### Test Graphs of Occupied Bandwidth and -20 Bandwidth

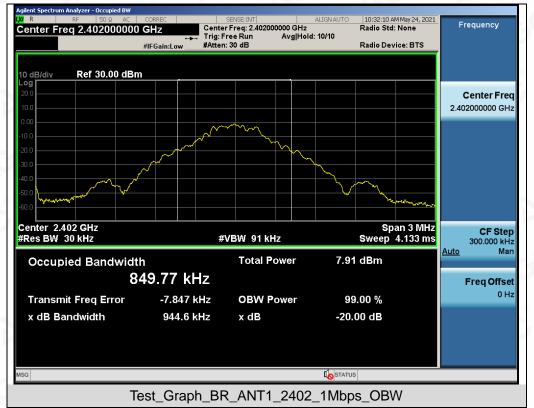


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in spectral definition of the stand in the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC00806210504FE03 Page 20 of 75



#### Test\_Graph\_BR\_ANT1\_2441\_1Mbps\_OBW

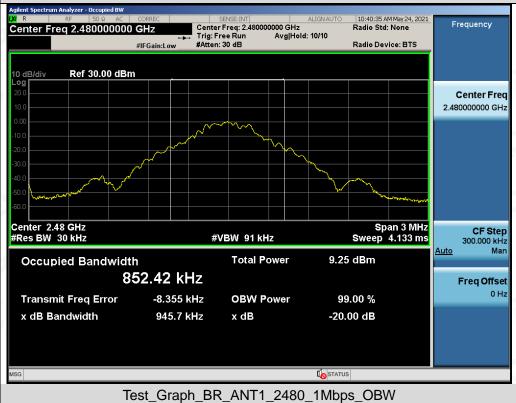


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the been sta



#### Report No.: AGC00806210504FE03 Page 21 of 75



#### Test\_Graph\_EDR\_ANT1\_2402\_2Mbps\_OBW

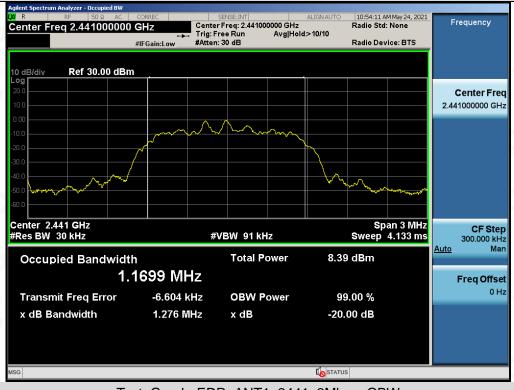


#### Test\_Graph\_EDR\_ANT1\_2441\_2Mbps\_OBW

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the been sta



Report No.: AGC00806210504FE03 Page 22 of 75

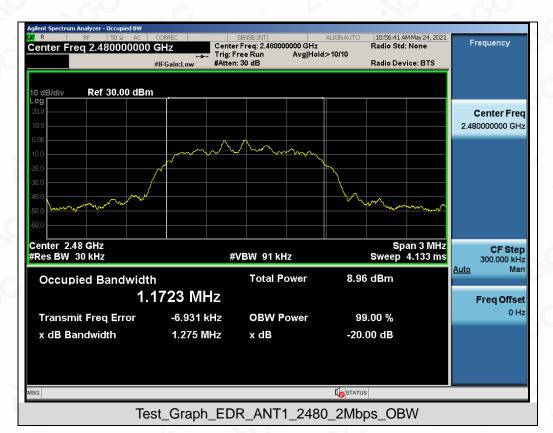

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphrorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



# 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
   RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Applieghte Limite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS			






#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands


#### Report No.: AGC00806210504FE03 Page 25 of 75




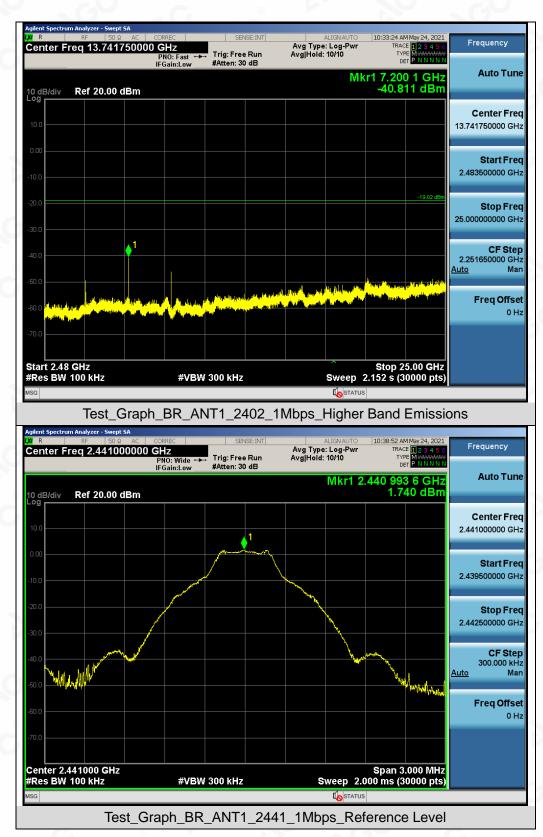

#### Report No.: AGC00806210504FE03 Page 26 of 75



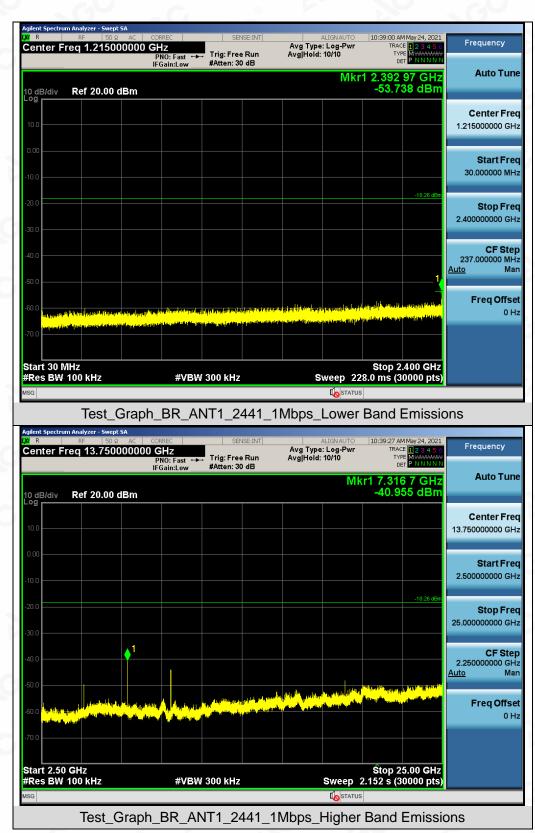









#### Report No.: AGC00806210504FE03 Page 28 of 75



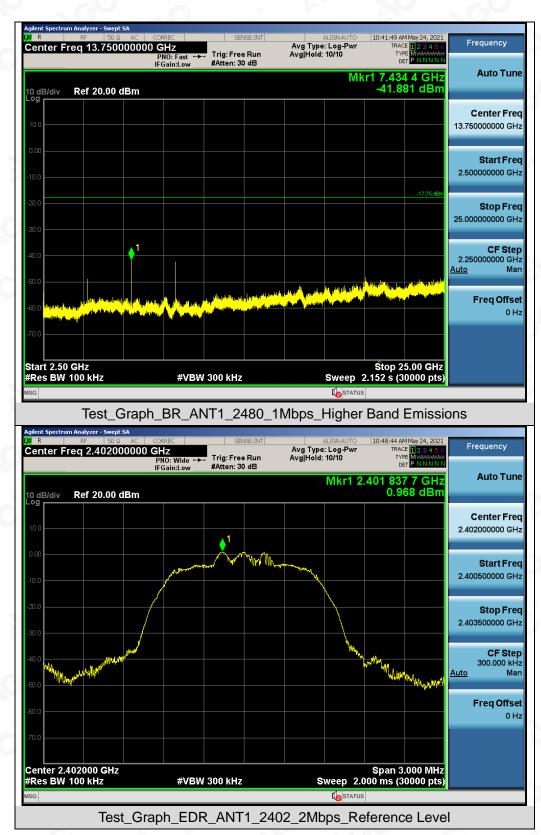


#### Report No.: AGC00806210504FE03 Page 29 of 75



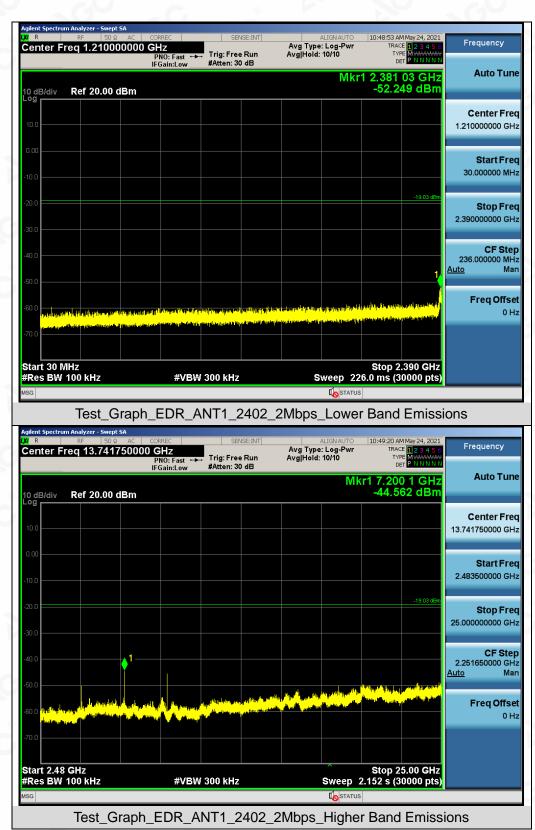


#### Report No.: AGC00806210504FE03 Page 30 of 75



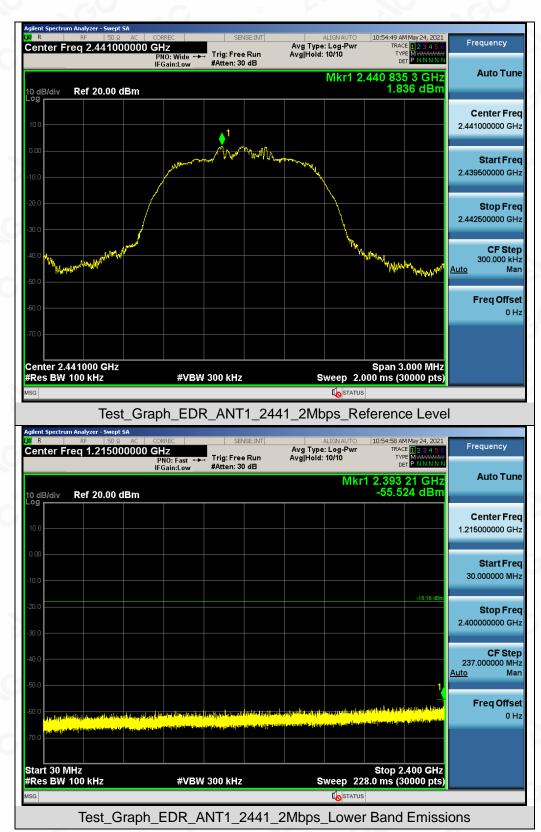


#### Report No.: AGC00806210504FE03 Page 31 of 75



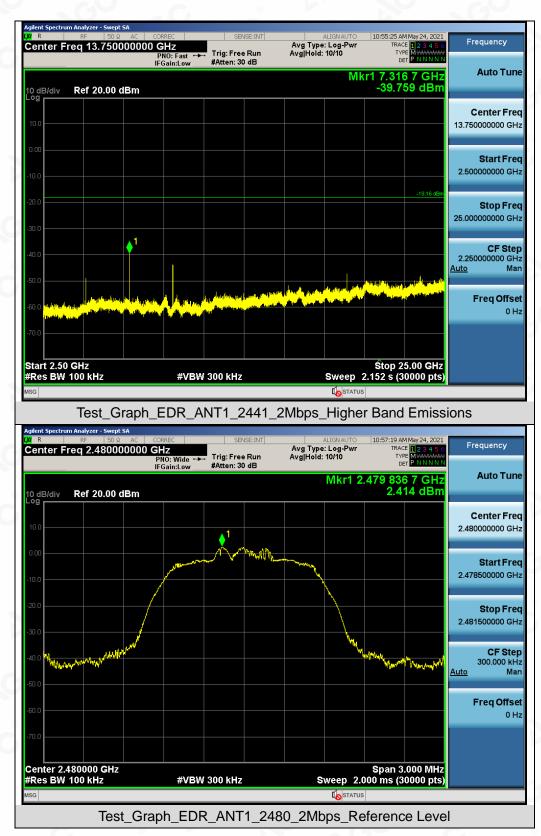


#### Report No.: AGC00806210504FE03 Page 32 of 75



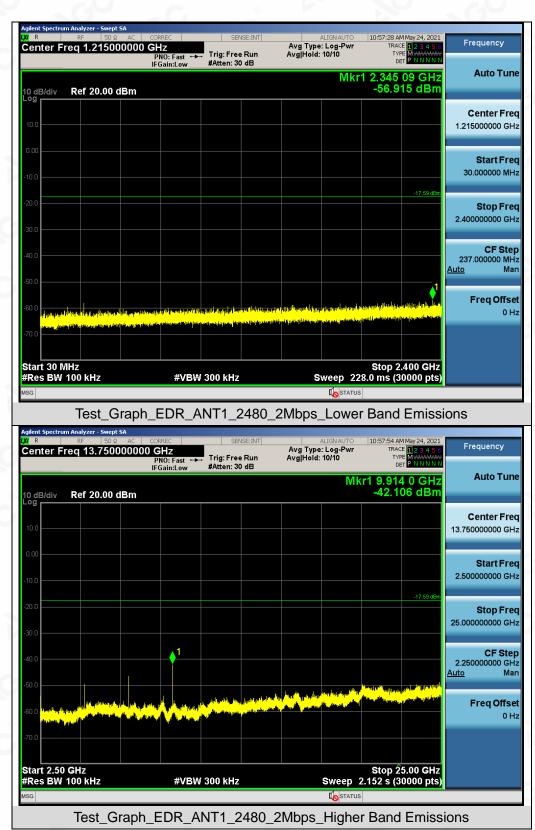



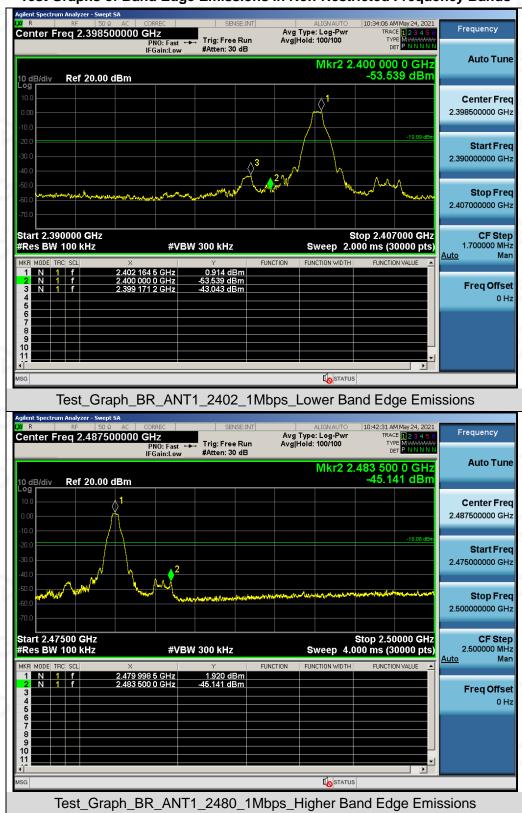

#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the strend in the stamp of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.


#### Report No.: AGC00806210504FE03 Page 34 of 75





#### Report No.: AGC00806210504FE03 Page 35 of 75



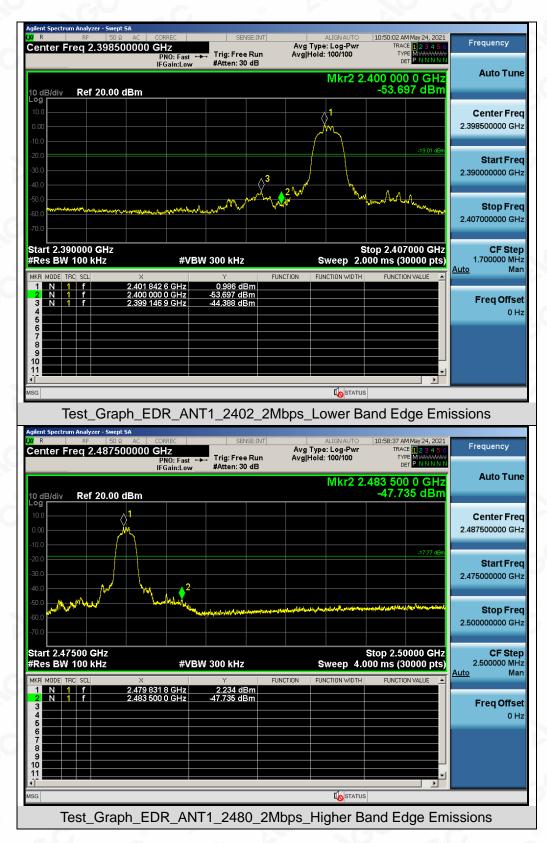

#### Report No.: AGC00806210504FE03 Page 36 of 75







## **10. RADIATED EMISSION**

## **10.1. MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com




## 10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

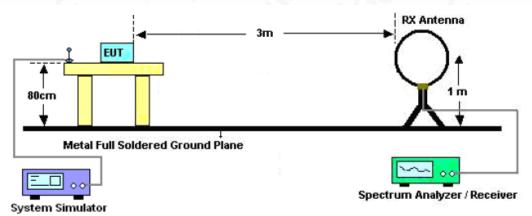

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

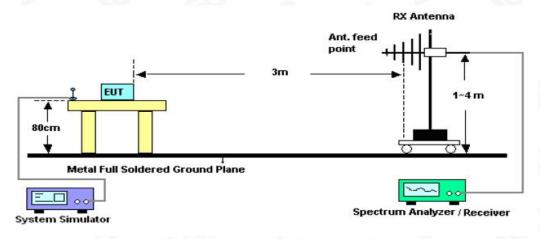

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

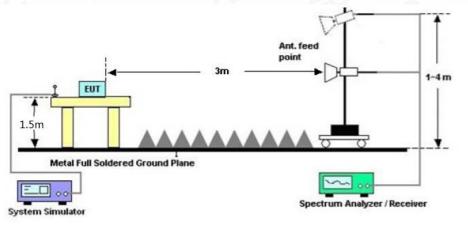

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

## **10.3. LIMITS AND MEASUREMENT RESULT**

#### 15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

### **10.4. TEST RESULT**

### Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the report is not permitted without the written authorization of AGE in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day authorize for the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

#### Radiated emission from 30MHz to 1000MHz

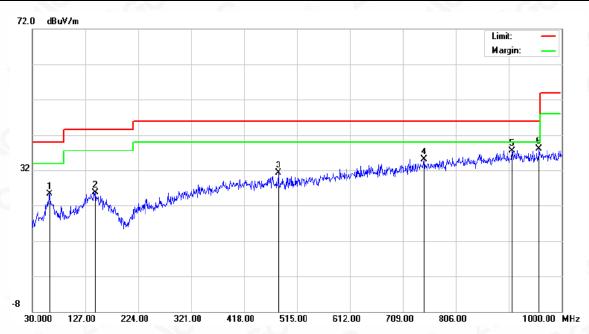

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		61.0400	5.63	19.58	25.21	40.00	-14.79	peak
2		145.4299	5.02	20.68	25.70	43.50	-17.80	peak
3		480.0800	6.29	24.99	31.28	46.00	-14.72	peak
4		746.8300	5.98	29.21	35.19	46.00	-10.81	peak
5		908.8200	5.67	31.78	37.45	46.00	-8.55	peak
6	*	958.2900	6.00	32.20	38.20	46.00	-7.80	peak

## **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Wireless TWS ear	phones	Model Name	G91	
Temperature	25°C	Relative Humidity		nidity 55.4	%
Pressure	960hPa	2 C	Test Voltage	Norr	mal Voltage
Test Mode	de Mode 6 Antenna		Vert	ical	
72.0 dBuV/m				Limit: Marg	
					GC
30.000 127.00 No. Mk.	Reading Freq. Level	Factor	mont	mit Over	1000.00 MHz
	MHz dBuV			uV/m dB	Detector
	0.0700 4.62		24.47 40.		peak
	2.5200 4.89		25.86 43.		peak
	2.4600 7.57		33.20 46.		peak
	5.8300 5.58		34.79 46.		peak
	.2000 6.51		37.75 46.		peak
6 983	6.15 6.15	32.42	38.57 54.	.00 -15.43	peak

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been pre-tested. The mode 6 is the worst case and recorded in the report.

Dedicated Fest Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesh Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuerce g/Inspection he test results Bf he test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### Report No.: AGC00806210504FE03 Page 43 of 75

## Radiated emission above 1GHz

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency ©	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	– Value Type
4804.000	44.42	0.08	44.5	74	-29.5	peak
4804.000	37.29	0.08	37.37	54	-16.63	AVG
7206.000	40.63	2.21	42.84	74 💿	-31.16	peak
7206.000	32.37	2.21	34.58	54	-19.42	AVG
	20			0		
			8			
emark:		- C	- 6	8		
actor - Antor	na Eastar + Cabl	along Dro	omplifior			

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	) (alua Tana
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4804.000	43.56	0.08	43.64	74	-30.36	peak
4804.000	36.32	0.08	36.4	54	-17.6	AVG
7206.000	40.37	2.21	42.58	74	-31.42	peak
7206.000	31.18	2.21	33.39	54	-20.61	AVG
			0			
®		0	G	8		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC00806210504FE03 Page 44 of 75

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

	Factor	Emission Level	Limits	Margin	
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
45.82 💿	0.14	45.96	74	-28.04	peak
38.41	0.14	38.55	54	-15.45	AVG
41.59	2.36	43.95	74	-30.05	peak
34.36	2.36	36.72	54	-17.28	AVG
	6		~G <sup>G</sup>	- C	8
0	G	©.			
	45.82 38.41 41.59 34.36	45.82       0.14         38.41       0.14         41.59       2.36         34.36       2.36	45.820.1445.9638.410.1438.5541.592.3643.95	45.82       0.14       45.96       74         38.41       0.14       38.55       54         41.59       2.36       43.95       74         34.36       2.36       36.72       54	45.82       0.14       45.96       74       -28.04         38.41       0.14       38.55       54       -15.45         41.59       2.36       43.95       74       -30.05         34.36       2.36       36.72       54       -17.28

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.87	0.14	46.01	74	-27.99	peak
4882.000	37.23	0.14	37.37	54	-16.63	AVG
7323.000	40.35	2.36	42.71	74	-31.29	peak
7323.000	33.61	2.36	35.97	54	-18.03	AVG
		G	C S			~69
			$G \sim G$	0		

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### Report No.: AGC00806210504FE03 Page 45 of 75

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4960.000	46.67	0.22	46.89	74	-27.11 💿	peak
4960.000	38.25	0.22	38.47	54	-15.53	AVG
7440.000	41.51	2.64	44.15	74	-29.85	peak
7440.000	32.43	2.64	35.07	54	-18.93	AVG
C.	©				®	
		8		<u> </u>	- 6	8
emark:		6	8			0
actor = Anter	na Factor + Cable	e Loss – Pre-a	amplifier.			

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.69	0.22	46.91	74	-27.09	peak
4960.000	38.42	0.22	38.64	54	-15.36	AVG
7440.000	40.26	2.64 💿	42.9	74	-31.1	peak
7440.000	31.21	2.64	33.85	54	-20.15	AVG
6			<u> </u>	0		
				C		

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

# RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The  $\pi$  /4-DQPSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC00806210504FE03 Page 46 of 75


EUT	Wireless TWS earphones	Model Name	G91		
Temperature	25°C	Relative Humidity	55.4%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 4	Antenna	Horizontal		

#### Test result for band edge emission at restricted bands

#### Test Graph for Peak Measurement



Test Graph for Average Measurement

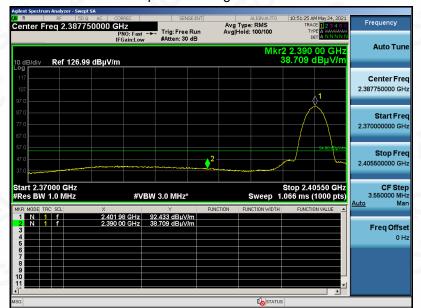

## **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated feature/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC00806210504FE03 Page 47 of 75

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the topologicated restron/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC00806210504FE03 Page 48 of 75

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

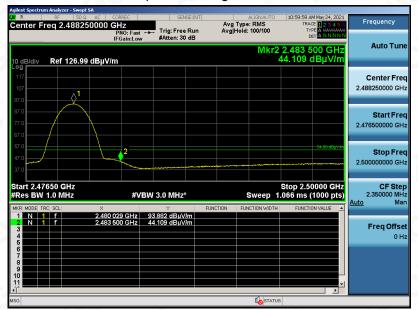

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the topologicated restron/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC00806210504FE03 Page 49 of 75

EUT	Wireless TWS earphones	Model Name	G91
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

Test Graph for Peak Measurement

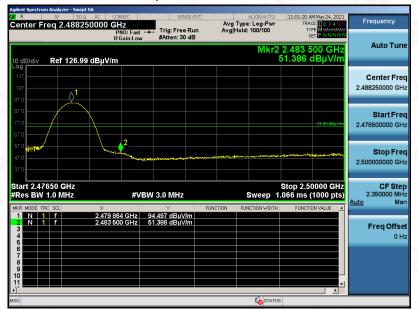


Test Graph for Average Measurement

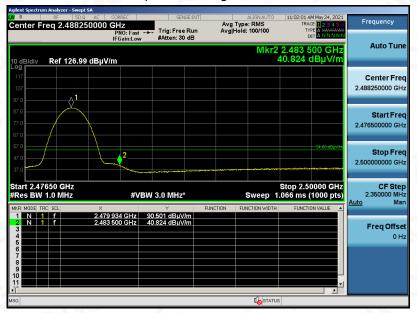

#### **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. The  $\pi$  /4-DQPSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stead of the stand in the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





## **11. NUMBER OF HOPPING FREQUENCY**

## **11.1. MEASUREMENT PROCEDURE**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.

2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

3. VBW  $\geq$  RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.

4. Allow the trace to stabilize.

### **11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)**

Same as described in section 8.2


### **11.3. MEASUREMENT EQUIPMENT USED**

The same as described in section 6

## **11.4. LIMITS AND MEASUREMENT RESULT**

Test Data of Number of Hopping Frequency					
Test Mode Number of Hopping Frequency Limits Pass or Fai					
GFSK Hopping	79	>=15	Pass		

#### **Test Graphs of Number of Hopping Frequency**

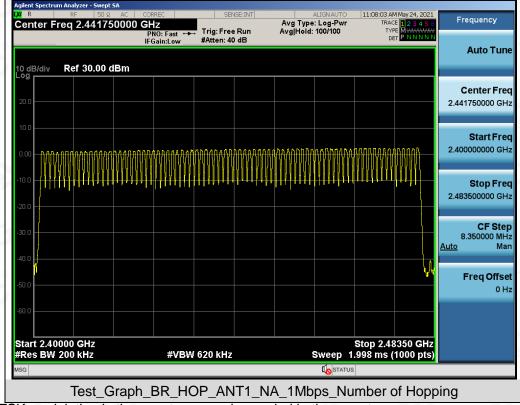

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## 12. TIME OF OCCUPANCY (DWELL TIME)

## **12.1. MEASUREMENT PROCEDURE**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Zero span, centered on a hopping channel.

2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.

3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.

4. Detector function: Peak. Trace: Max hold.

5. Use the marker-delta function to determine the transmit time per hop.

6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

## 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

## 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


## **12.4. LIMITS AND MEASUREMENT RESULT**

	Test Data of Dwell Time						
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)	Pass or Fail		
2402	2.886	26*4	300.144	400	Pass		
2441	2.886	27*4	311.688	400	Pass		
2480	2.886	26*4	300.144	400	Pass		

Note: The GFSK modulation is the worst case and recorded in the report.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuer of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



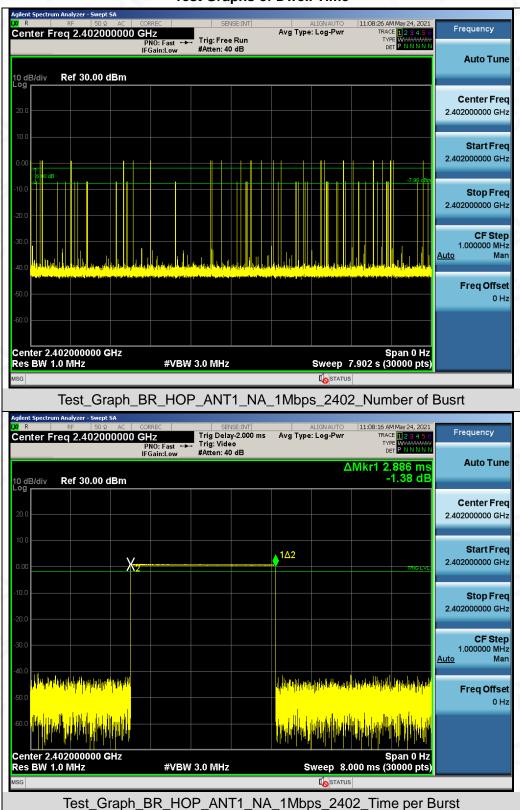


**Test Graphs of Dwell Time** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






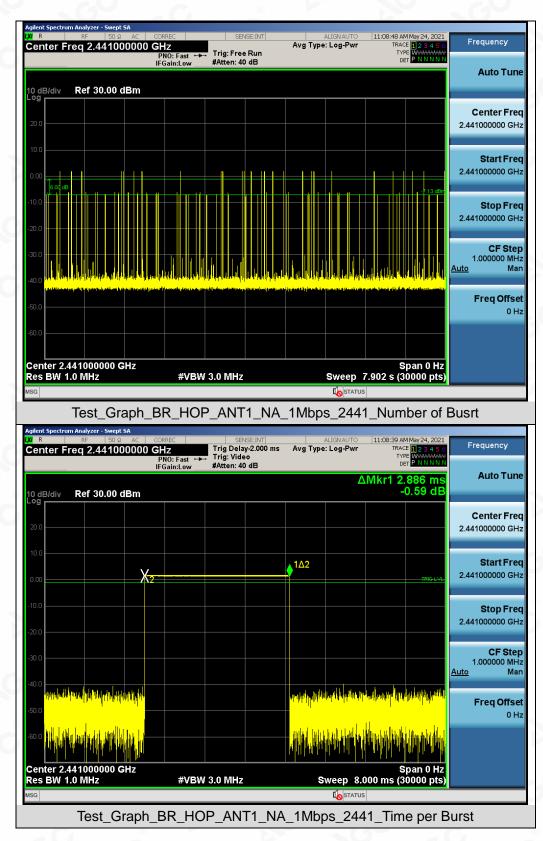

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter exchorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





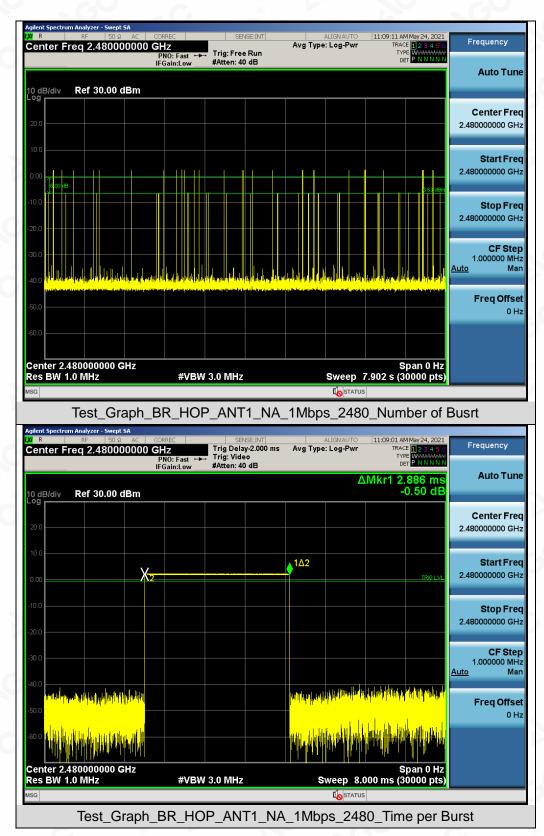

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approver, and AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **13. FREQUENCY SEPARATION**

## **13.1. MEASUREMENT PROCEDURE**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Wide enough to capture the peaks of two adjacent channels.

2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

3. Video (or average) bandwidth (VBW)  $\geq$  RBW.

4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

### 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 6.2

#### **13.3. MEASUREMENT EQUIPMENT USED**

The same as described in section 6.3

#### **13.4. LIMITS AND MEASUREMENT RESULT**

Test Data of Frequency Separation			
Test Mode	Channel Separation (MHz)	Limits	Pass or Fail
GFSK Hopping	1.001	>= 2/3 -20dB BW	Pass

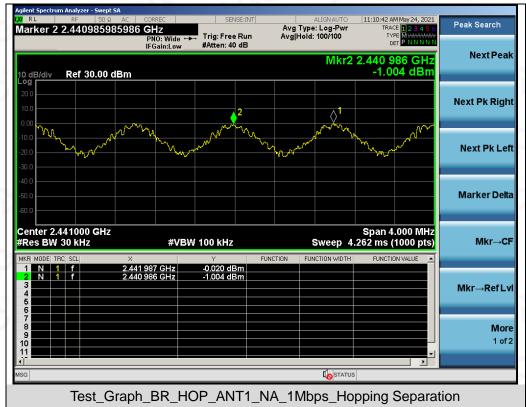

### Test Graphs of Number of Hopping Frequency

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approved to AGC within 15day after the issues of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.