



FCC RADIO TEST REPORT

FCC ID : UZ7MC9401
Equipment : Mobile Computer
Brand Name : ZEBRA
Model Name : MC9401
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 10, 2023 and testing was performed from Jul. 10, 2023 to Jul. 31, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example.....	12
3 Test Result.....	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	17
3.6 AC Conducted Emission Measurement.....	21
3.7 Antenna Requirements.....	23
4 List of Measuring Equipment	24
5 Measurement Uncertainty	26
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR362117B	01	Initial issue of report	Aug. 23, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	7.84 dB under the limit at 2488.04 MHz
3.6	15.207	AC Conducted Emission	Pass	13.06 dB under the limit at 0.18 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Clio Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Computer
Brand Name	ZEBRA
Model Name	MC9401
FCC ID	UZ7MC9401
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	EV
SW Version	13-05-28.00-TG-U00-PRD-NEM-04
FW Version	FUSION_QA_6_1.0.0.001_T
MFD	08JUN23
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
Adapter USB Wall Charger	Brand Name	Zebra	Model Number	PWR-WUA5V12W0US
Battery Standard Battery (7000mAh)	Brand Name	Zebra	Model Number	BT-000370
Earphone USB-C Audio Headset	Brand Name	Zebra	Model Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Model Number	CBL-TC2X-USBC-01
Holster	Brand Name	Zebra	Model Number	SG-MC9X-SHLSTG-01
USB Cable (CUP)	Brand Name	Zebra	Model Number	CBL-MC93-USBCHG-01

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<Ant. 6> Bluetooth – LE (1Mbps): 5.50 dBm / 0.0035 W Bluetooth – LE (2Mbps): 5.50 dBm / 0.0035 W <Ant. 7> Bluetooth – LE (1Mbps): 5.70 dBm / 0.0037 W Bluetooth – LE (2Mbps): 5.70 dBm / 0.0037 W
99% Occupied Bandwidth	<Ant. 6> 1.017 MHz for 1Mbps 2.002 MHz for 2Mbps <Ant. 7> 1.015 MHz for 1Mbps 1.998 MHz for 2Mbps
Antenna Type / Gain	<Ant. 6> : Coupling Antenna with gain 2.76 dBi <Ant. 7> : Coupling Antenna with gain 2.59 dBi
Type of Modulation	Bluetooth LE: GFSK

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	<Ant. 6>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	<Ant. 7>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	Bluetooth – LE / GFSK
	<Ant. 6>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	<Ant. 7>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Battery Standard Battery (7000mAh) + USB Cable (Type C to Type A) with USB Cable (CUP) (Charging from Adapter USB Wall Charger)
Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

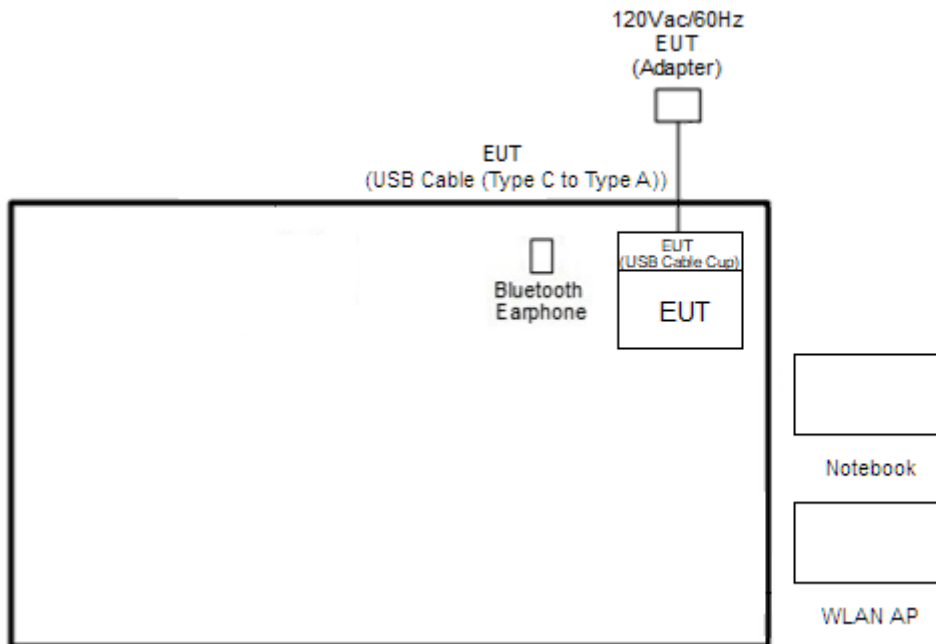

<Bluetooth – LE Tx Mode>

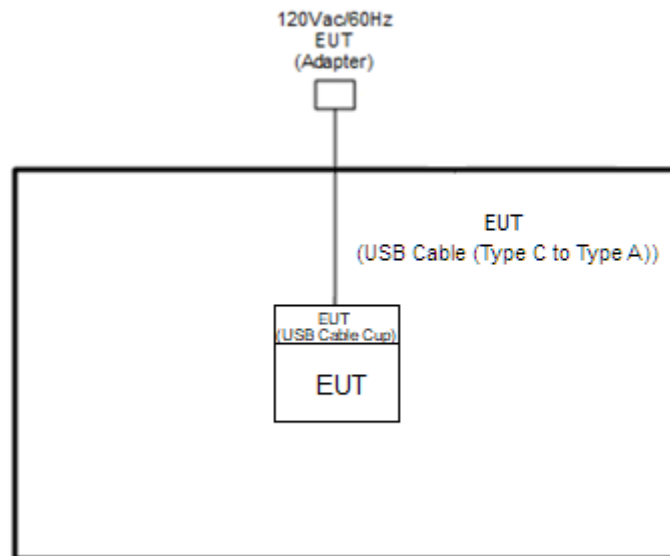

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.00211.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

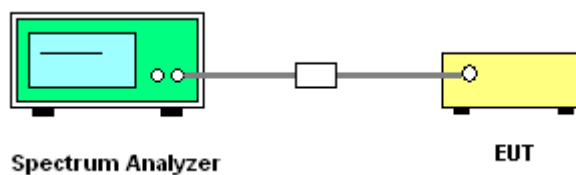

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

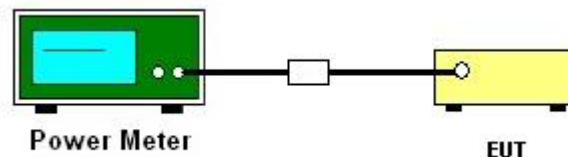

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

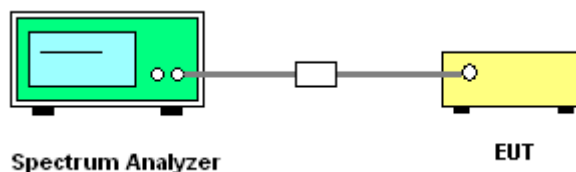

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

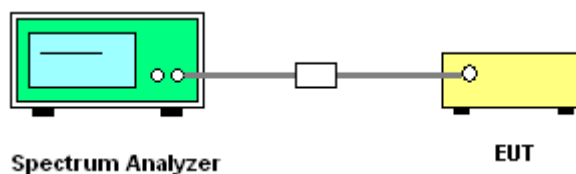

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

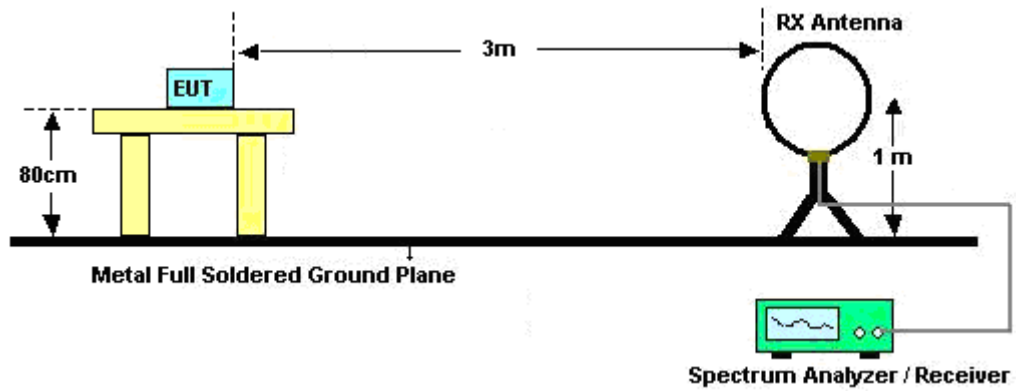


For radiated test from 30MHz to 1GHz

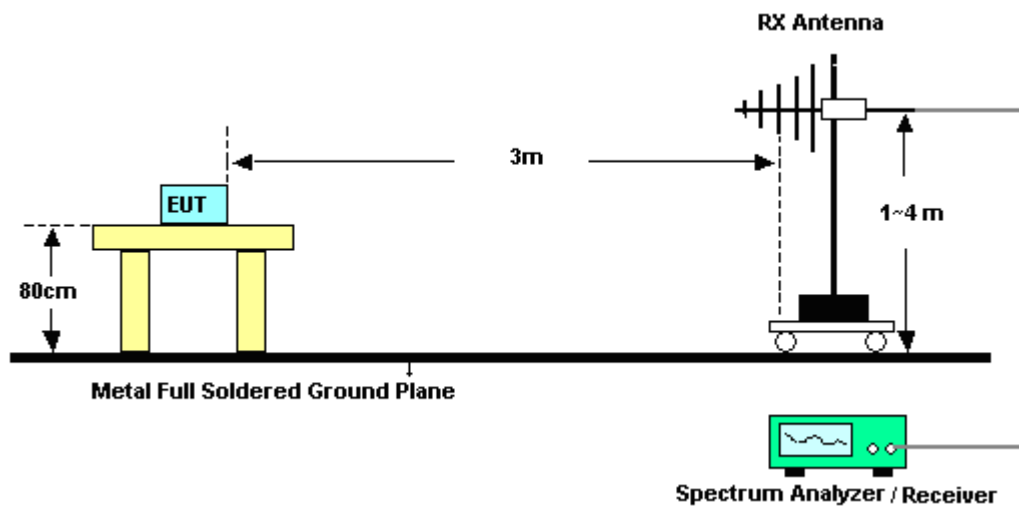

For radiated test from 1GHz to 18GHz

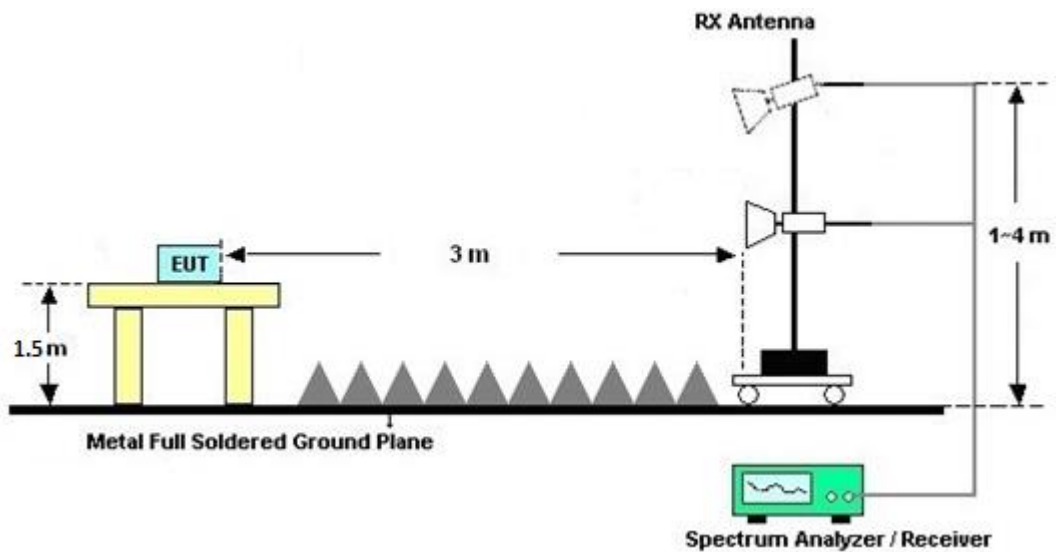

For radiated test above 18GHz

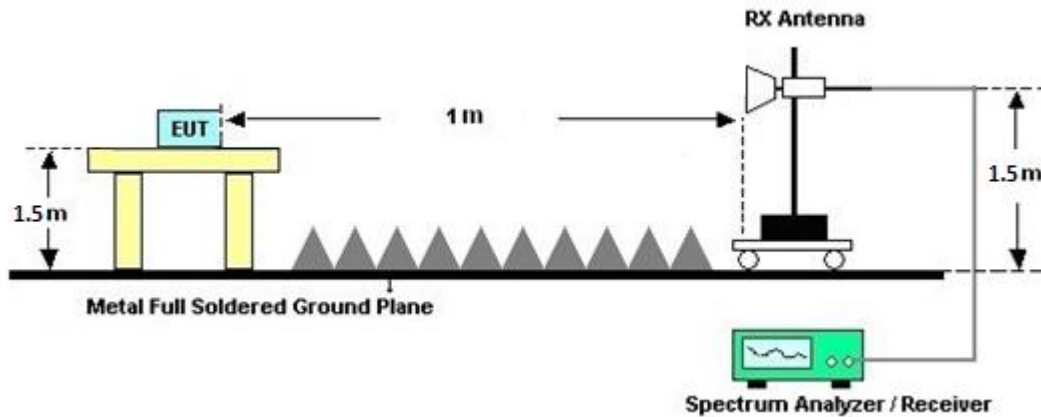

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

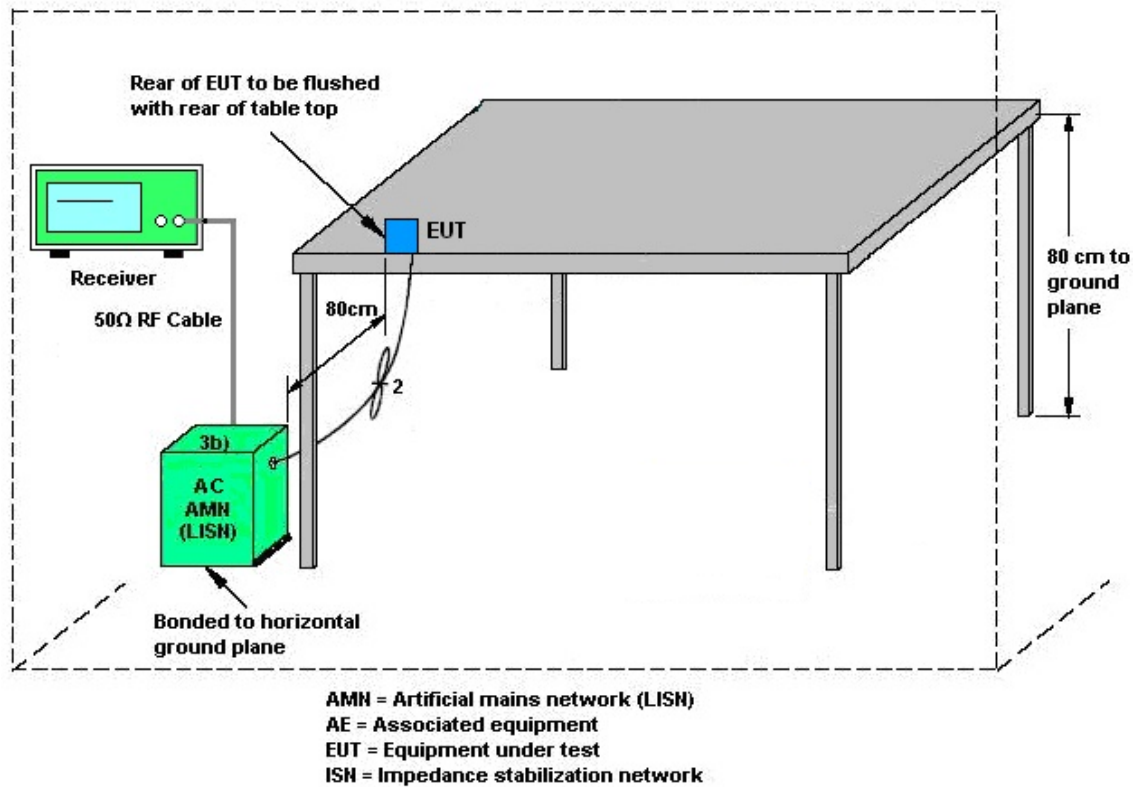

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1GHz~18GHz	Mar. 23, 2023	Jul. 10, 2023~ Jul. 31, 2023	Mar. 22, 2024	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2022	Jul. 10, 2023~ Jul. 31, 2023	Nov. 23, 2023	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz~1GHz	Oct. 08, 2022	Jul. 10, 2023~ Jul. 31, 2023	Oct. 07, 2023	Radiation (03CH16-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Jul. 10, 2023~ Jul. 31, 2023	Sep. 19, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Jul. 10, 2023~ Jul. 31, 2023	Jun. 26, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 26, 2022	Jul. 10, 2023~ Jul. 31, 2023	Dec. 25, 2023	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 09, 2022	Jul. 10, 2023~ Jul. 31, 2023	Dec. 08, 2023	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 03, 2023	Jul. 10, 2023~ Jul. 31, 2023	Jul. 02, 2024	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Dec. 15, 2022	Jul. 10, 2023~ Jul. 31, 2023	Dec. 14, 2023	Radiation (03CH16-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Sep. 11, 2022	Jul. 10, 2023~ Jul. 31, 2023	Sep. 10, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	805935/4	N/A	Aug. 09, 2022	Jul. 10, 2023~ Jul. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	802434/4	N/A	Aug. 09, 2022	Jul. 10, 2023~ Jul. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5757	N/A	Aug. 09, 2022	Jul. 10, 2023~ Jul. 31, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jul. 10, 2023~ Jul. 31, 2023	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jul. 10, 2023~ Jul. 31, 2023	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 10, 2023~ Jul. 31, 2023	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 10, 2023~ Jul. 31, 2023	N/A	Radiation (03CH16-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Jul. 13, 2023~ Jul. 22, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 08, 2022	Jul. 13, 2023~ Jul. 22, 2023	Aug. 07, 2023	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 08, 2022	Jul. 13, 2023~ Jul. 22, 2023	Aug. 07, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GH	Aug. 03, 2022	Jul. 13, 2023~ Jul. 22, 2023	Aug. 02, 2023	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 18, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Jul. 18, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Jul. 18, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Jul. 18, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jul. 18, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Aug. 01, 2022	Jul. 18, 2023	Jul. 31, 2023	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Jul. 18, 2023	Dec. 28, 2023	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2023/7/13~2023/7/22	Relative Humidity:	51~54	%

<Ant. 6>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.017	0.674	0.50	Pass
BLE	1Mbps	1	19	2440	1.015	0.676	0.50	Pass
BLE	1Mbps	1	39	2480	1.011	0.674	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	3.30	30.00	2.76	6.06	36.00	Pass
BLE	1Mbps	1	19	2440	5.50	30.00	2.76	8.26	36.00	Pass
BLE	1Mbps	1	39	2480	4.00	30.00	2.76	6.76	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.90	-11.51	2.76	8.00	Pass
BLE	1Mbps	1	19	2440	4.70	-9.66	2.76	8.00	Pass
BLE	1Mbps	1	39	2480	3.25	-11.08	2.76	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.002	1.160	0.50	Pass
BLE	2Mbps	1	19	2440	1.994	1.164	0.50	Pass
BLE	2Mbps	1	39	2480	1.966	1.160	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	3.30	30.00	2.76	6.06	36.00	Pass
BLE	2Mbps	1	19	2440	5.50	30.00	2.76	8.26	36.00	Pass
BLE	2Mbps	1	39	2480	4.00	30.00	2.76	6.76	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.87	-14.50	2.76	8.00	Pass
BLE	2Mbps	1	19	2440	4.68	-12.65	2.76	8.00	Pass
BLE	2Mbps	1	39	2480	3.26	-14.03	2.76	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<Ant. 7>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.015	0.674	0.50	Pass
BLE	1Mbps	1	19	2440	1.015	0.676	0.50	Pass
BLE	1Mbps	1	39	2480	1.015	0.672	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.70	30.00	2.59	8.29	36.00	Pass
BLE	1Mbps	1	19	2440	5.10	30.00	2.59	7.69	36.00	Pass
BLE	1Mbps	1	39	2480	4.90	30.00	2.59	7.49	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.17	-9.20	2.59	8.00	Pass
BLE	1Mbps	1	19	2440	4.19	-10.15	2.59	8.00	Pass
BLE	1Mbps	1	39	2480	4.15	-10.21	2.59	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.998	1.156	0.50	Pass
BLE	2Mbps	1	19	2440	1.994	1.164	0.50	Pass
BLE	2Mbps	1	39	2480	1.994	1.168	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.70	30.00	2.59	8.29	36.00	Pass
BLE	2Mbps	1	19	2440	5.10	30.00	2.59	7.69	36.00	Pass
BLE	2Mbps	1	39	2480	4.90	30.00	2.59	7.49	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.18	-12.19	2.59	8.00	Pass
BLE	2Mbps	1	19	2440	4.20	-13.09	2.59	8.00	Pass
BLE	2Mbps	1	39	2480	4.17	-13.13	2.59	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Antenna 6


6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

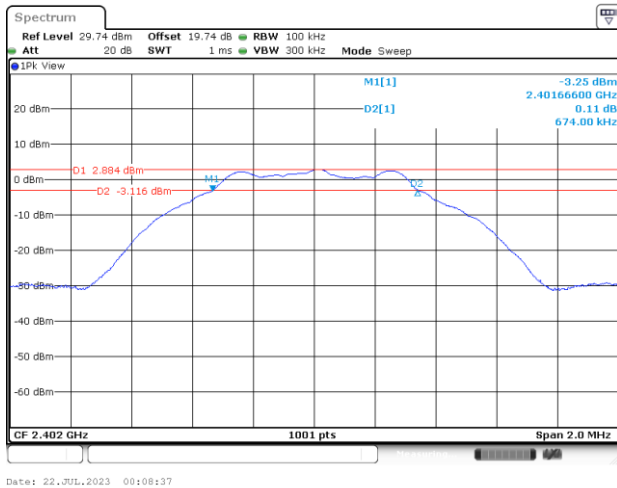

6 dB Bandwidth Plot on Channel 19

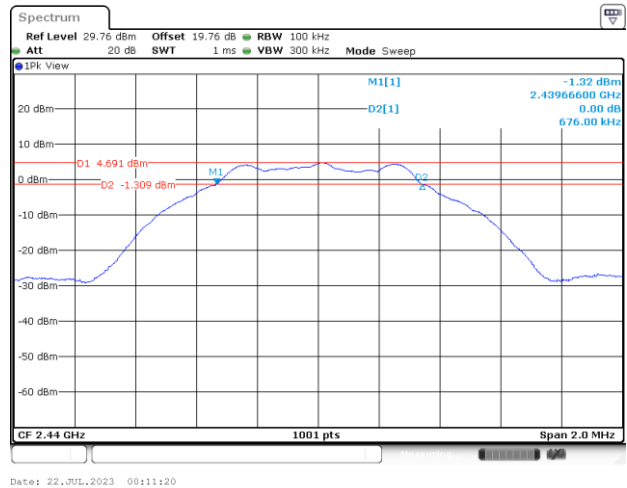


6 dB Bandwidth Plot on Channel 39

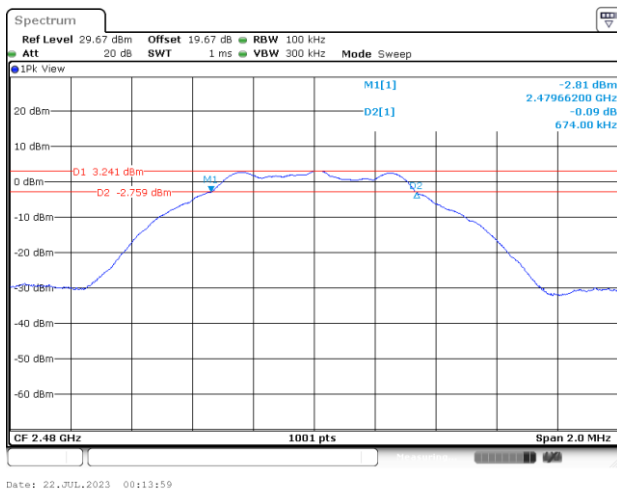




<2Mbps>


6 dB Bandwidth Plot on Channel 00

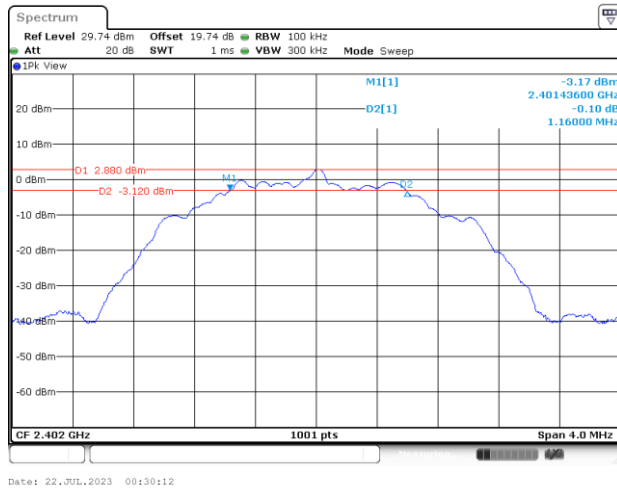

6 dB Bandwidth Plot on Channel 19



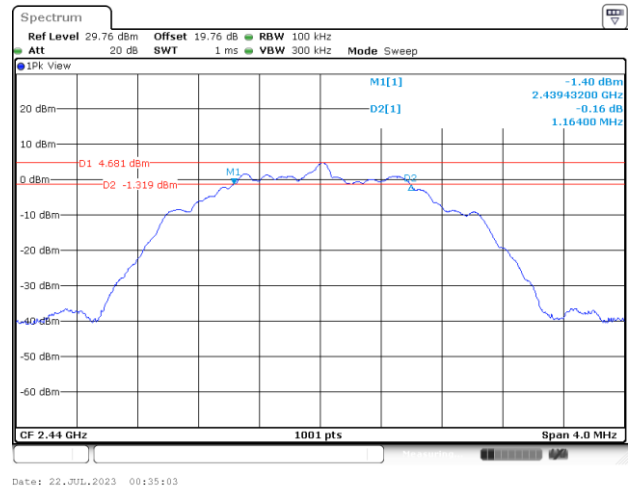


6 dB Bandwidth Plot on Channel 39

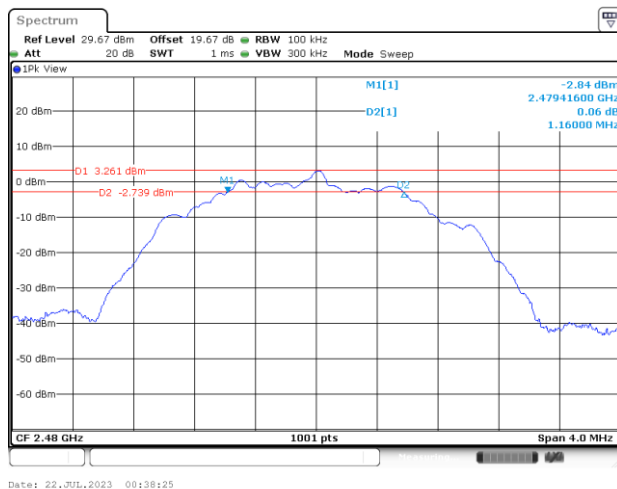

**99% Occupied Bandwidth**

<1Mbps>

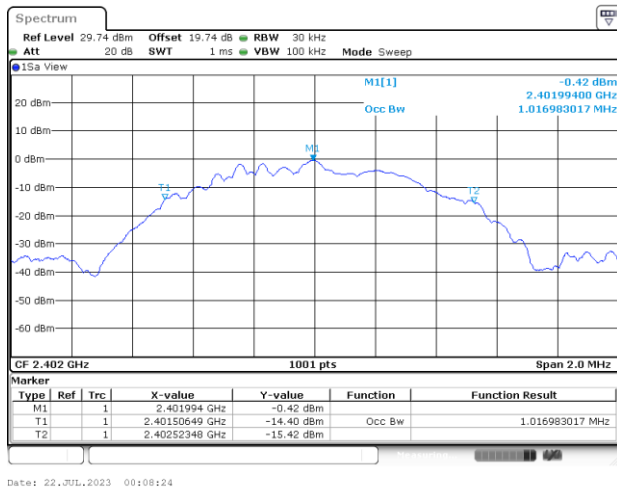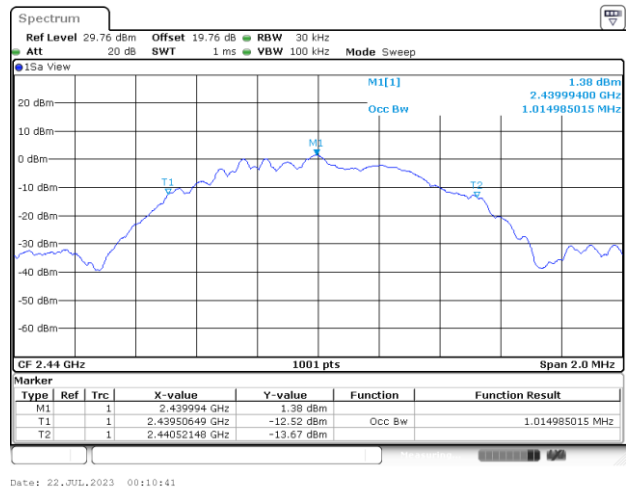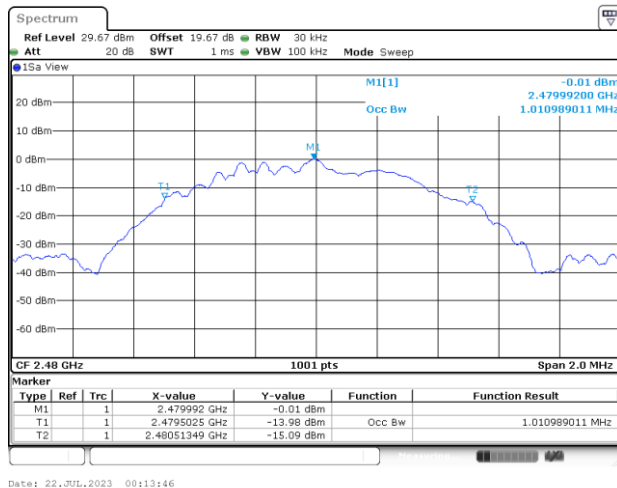
99% Occupied Bandwidth Plot on Channel 00**99% Occupied Plot Bandwidth on Channel 19****99% Occupied Bandwidth Plot on Channel 39**

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

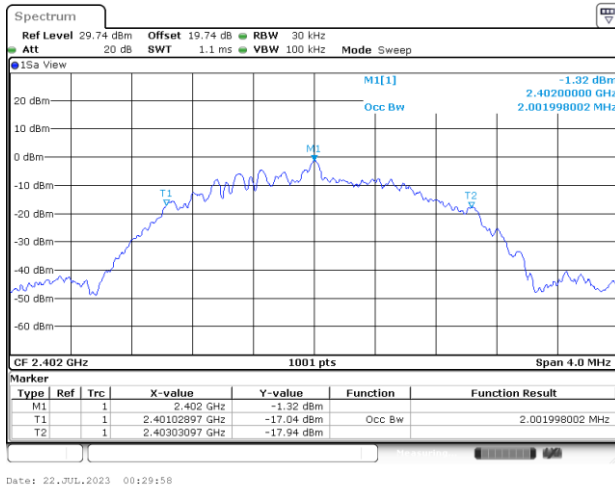

99% Occupied Plot Bandwidth on Channel 19



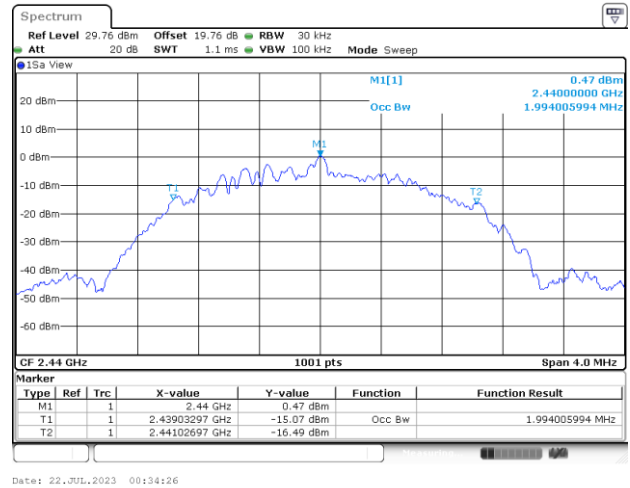


99% Occupied Bandwidth Plot on Channel 39

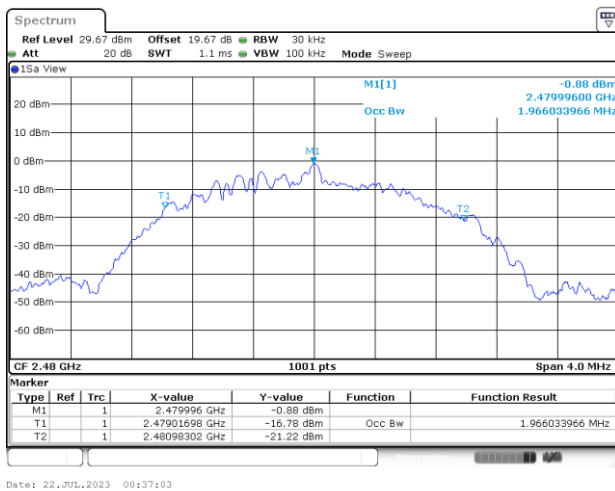

**Power Spectral Density (dBm/3kHz)**


<1Mbps>

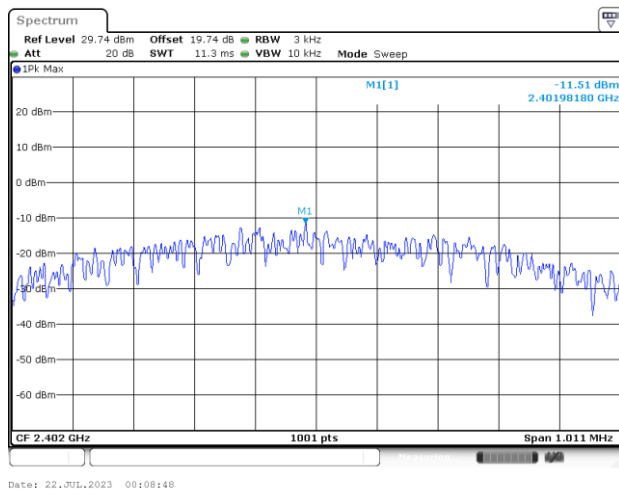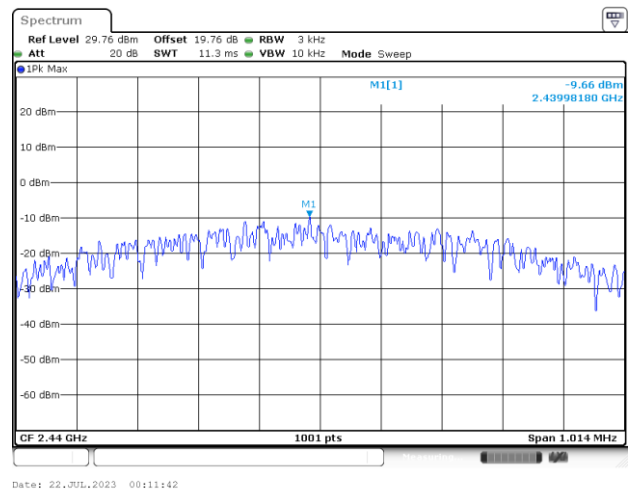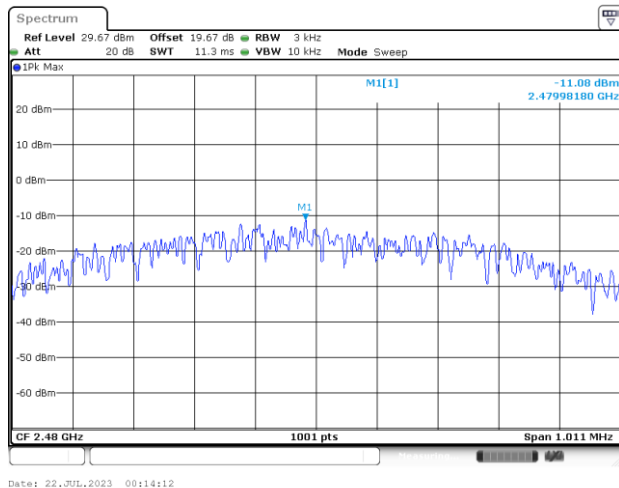Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

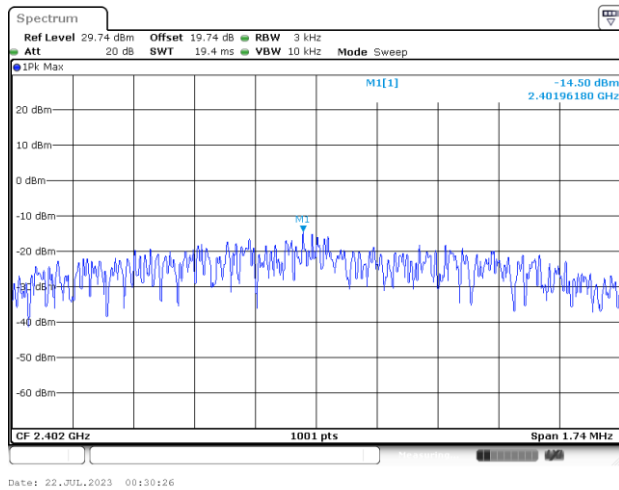


Power Density (dBm/3kHz) Plot Channel 19

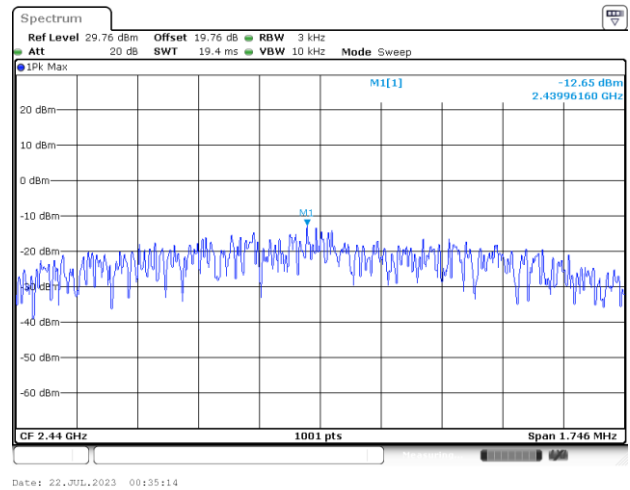

Power Density (dBm/3kHz) Plot Channel 39

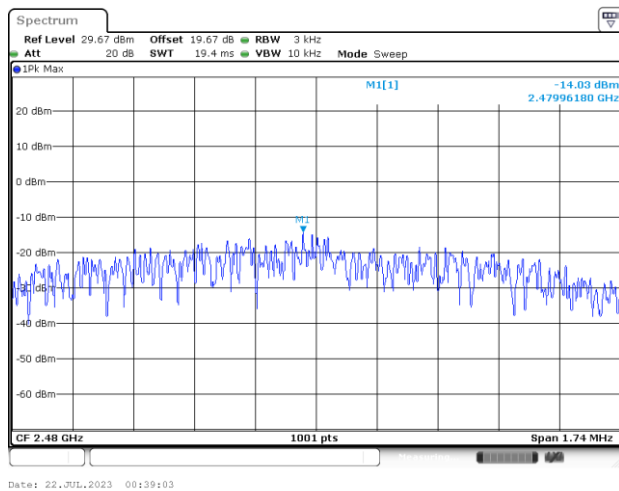


Band Edge and Spurious Emission

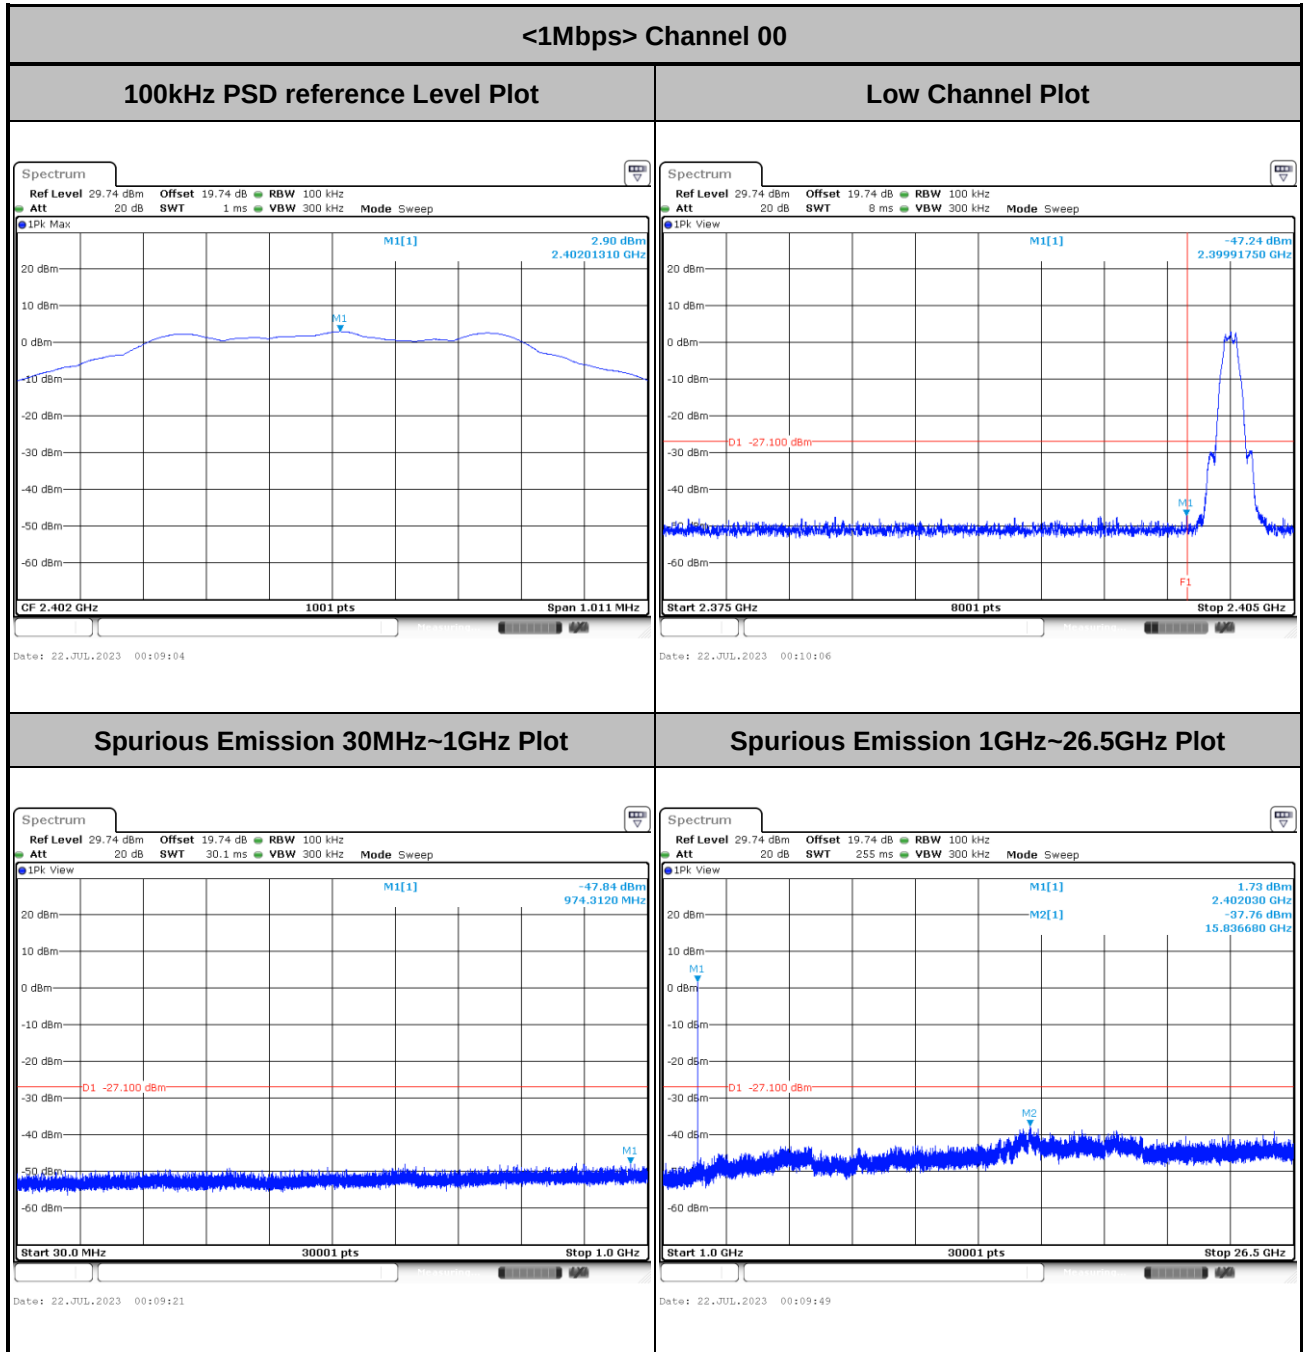




<1Mbps> Channel 19

100kHz PSD reference Level Plot

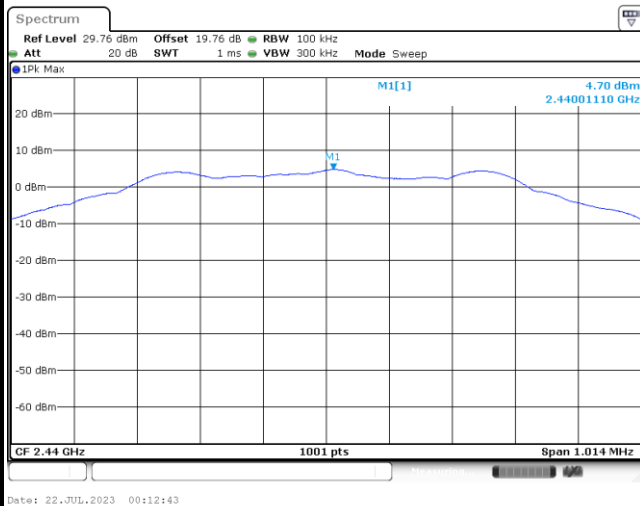


Middle Channel Plot

Spurious Emission 30MHz~1GHz Plot

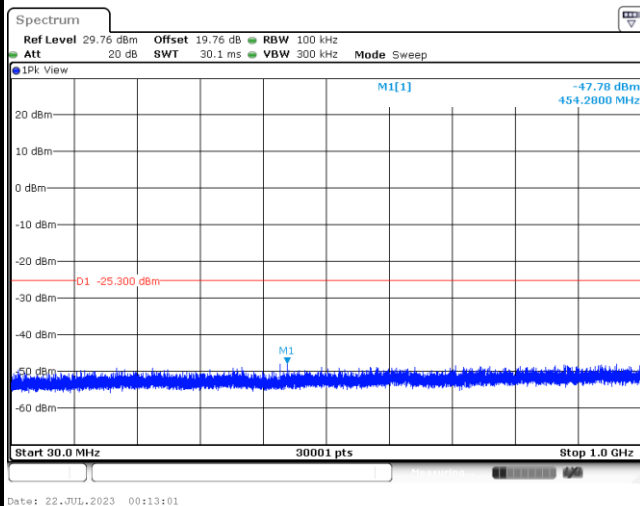


Spurious Emission 1GHz~26.5GHz Plot

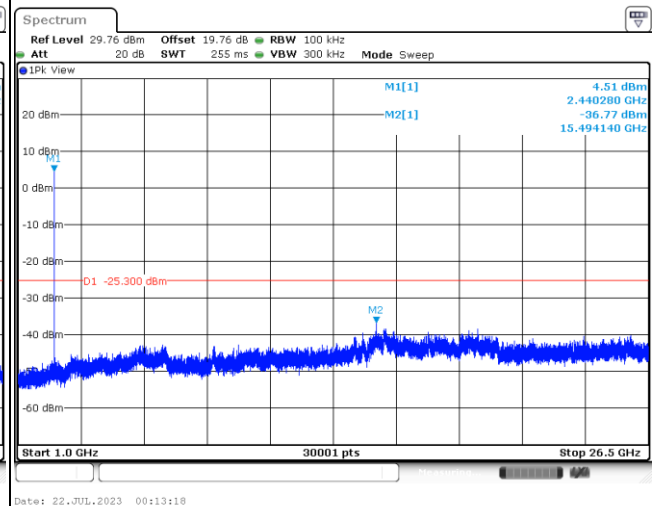




<1Mbps> Channel 39


100kHz PSD reference Level Plot

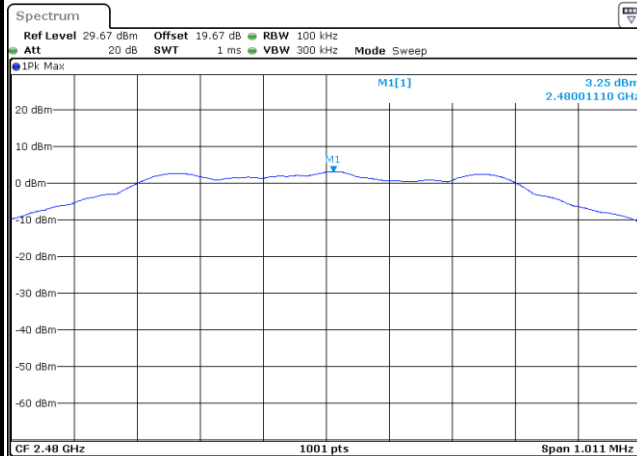


High Channel Plot

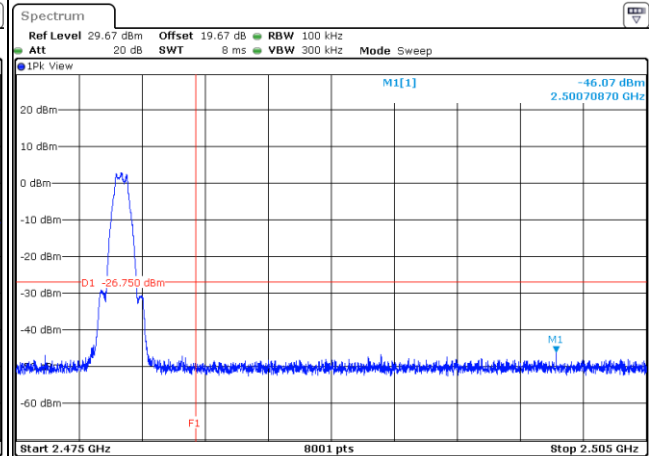

Spurious Emission 30MHz~1GHz Plot

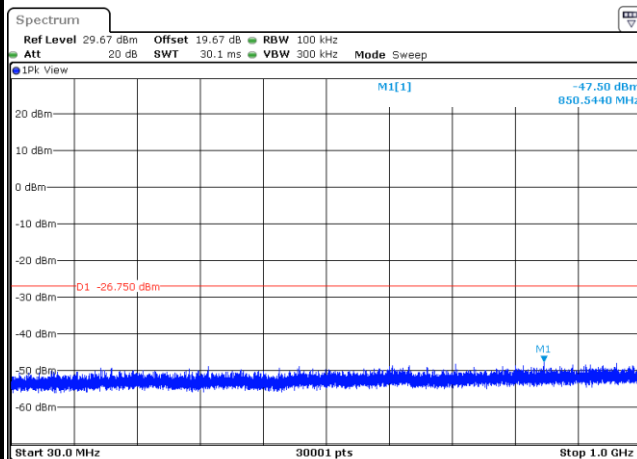


Spurious Emission 1GHz~26.5GHz Plot

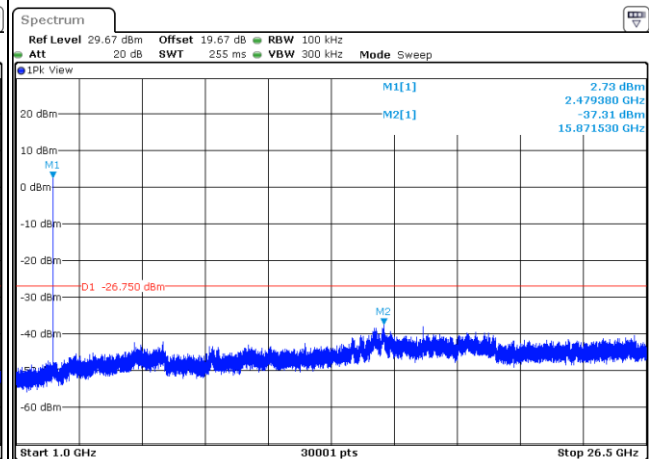




<2Mbps> Channel 00


100kHz PSD reference Level Plot

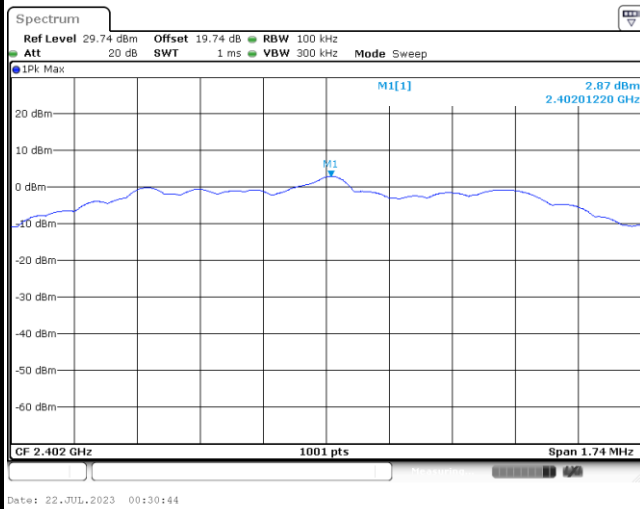


Low Channel Plot

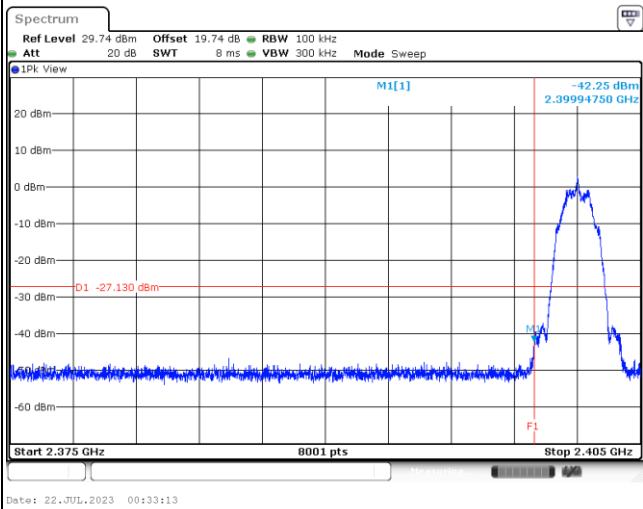

Spurious Emission 30MHz~1GHz Plot

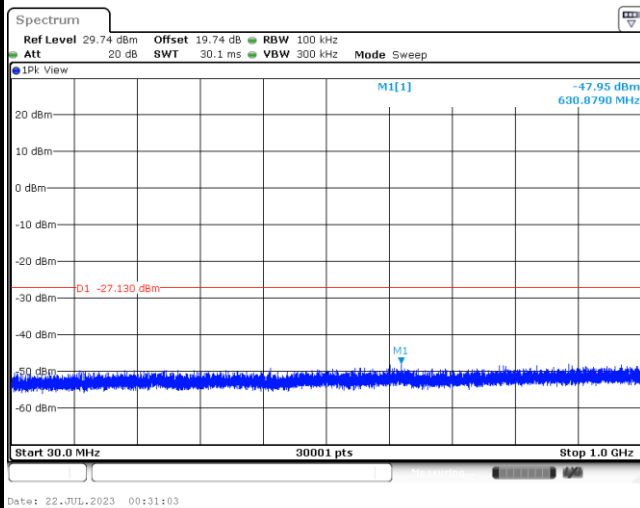


Spurious Emission 1GHz~26.5GHz Plot

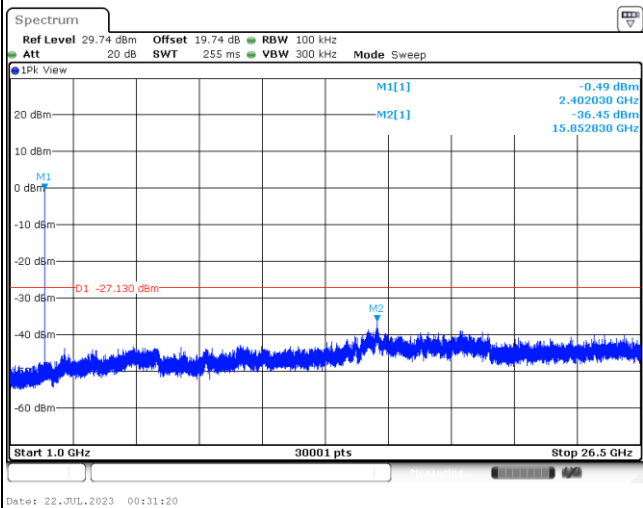




<2Mbps> Channel 19

100kHz PSD reference Level Plot

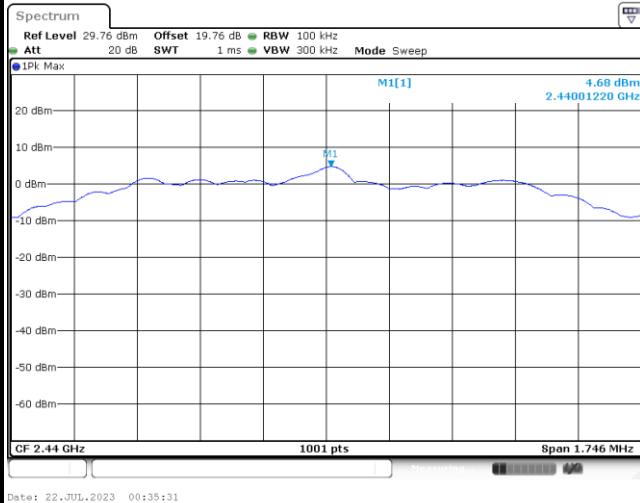


Middle Channel Plot

Spurious Emission 30MHz~1GHz Plot

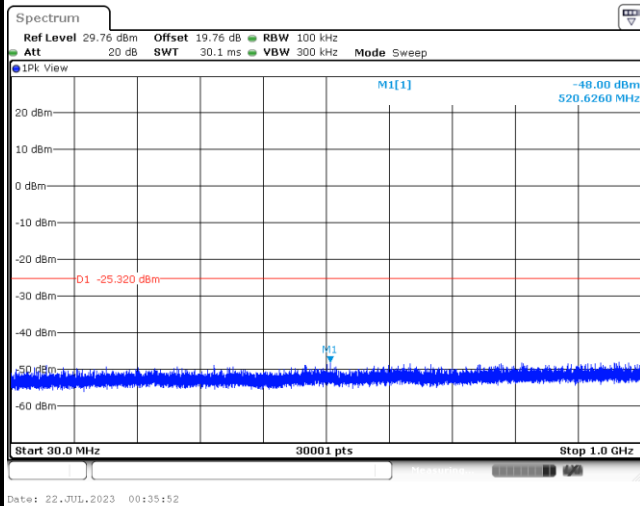


Spurious Emission 1GHz~26.5GHz Plot

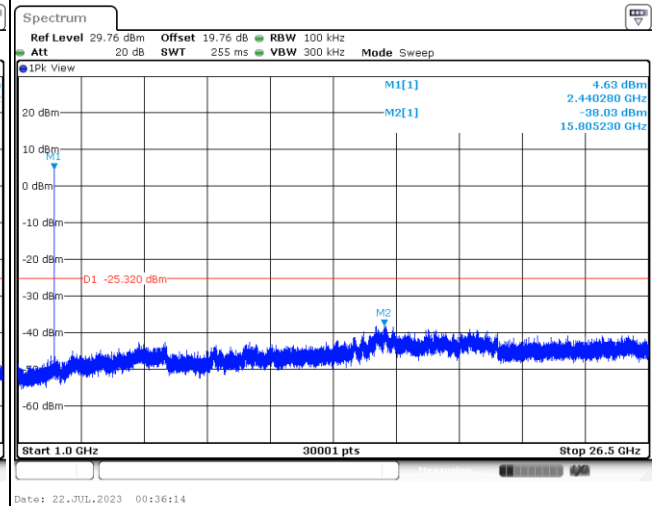




<2Mbps> Channel 39

100kHz PSD reference Level Plot

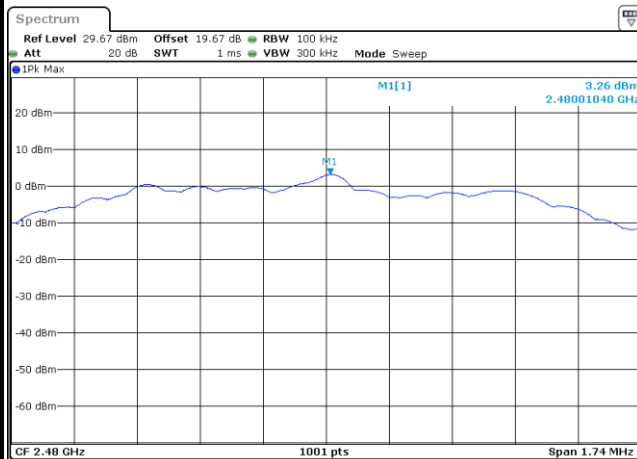


Date: 22.JUL.2023 00:39:18

High Channel Plot

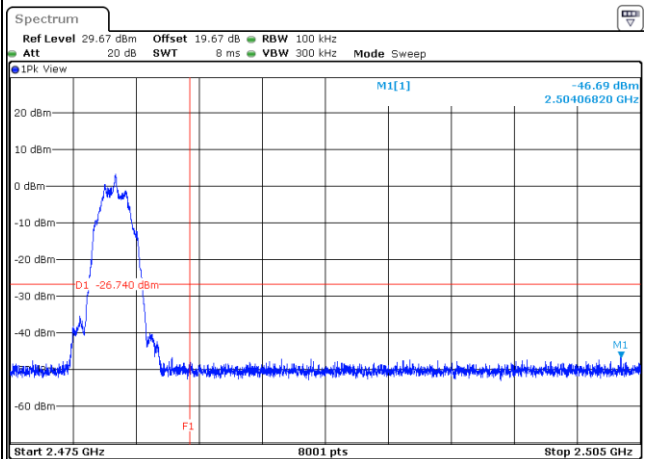


Date: 22.JUL.2023 00:41:02

Spurious Emission 30MHz~1GHz Plot

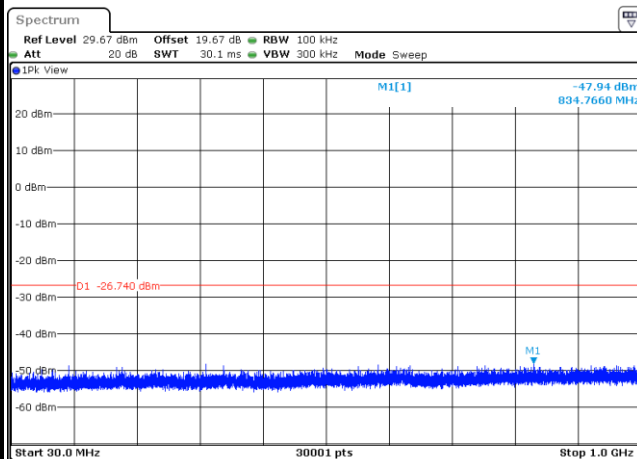

Date: 22.JUL.2023 00:39:39

Spurious Emission 1GHz~26.5GHz Plot

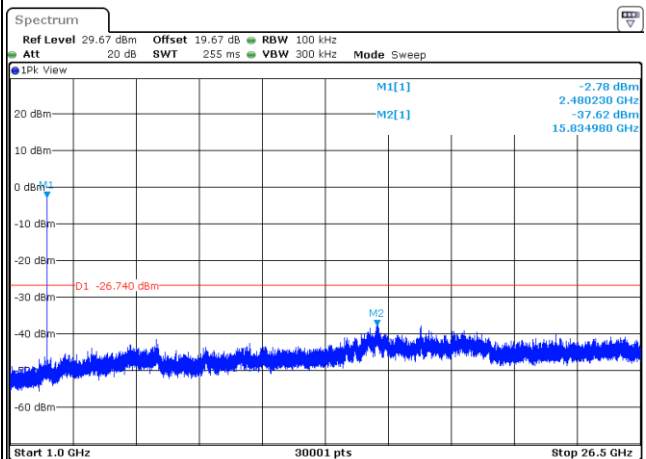


Date: 22.JUL.2023 00:39:56



<1Mbps>

6 dB Bandwidth Plot on Channel 19

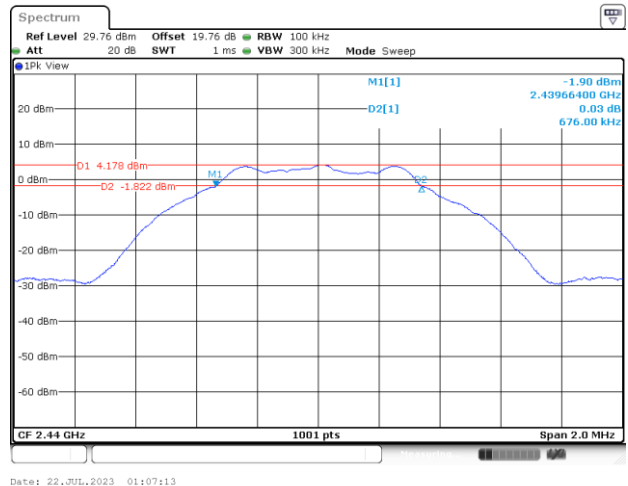

Spectrum

Ref Level 29.67 dBm Offset 19.67 dB RBW 100 kHz
 Att SWT 1 ms VBW 300 kHz Mode Sweep

1PK View

M1[1] -1.85 dBm
 D2[1] 2.47966400 GHz
 0.00 dBm
 672.90 kHz

O1 4.152 dBm
 D2 -1.848 dBm

M1
 M2


CF 2.48 GHz 1001 pts Span 2.0 MHz

Date: 22, JUL, 2023 01:08:58




<2Mbps>


6 dB Bandwidth Plot on Channel 00

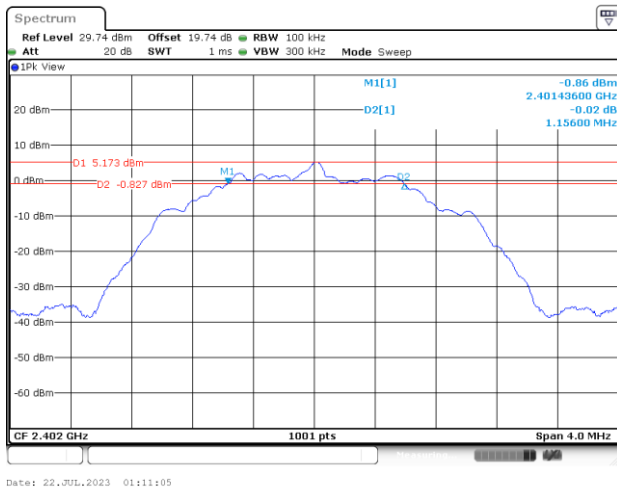

6 dB Bandwidth Plot on Channel 19



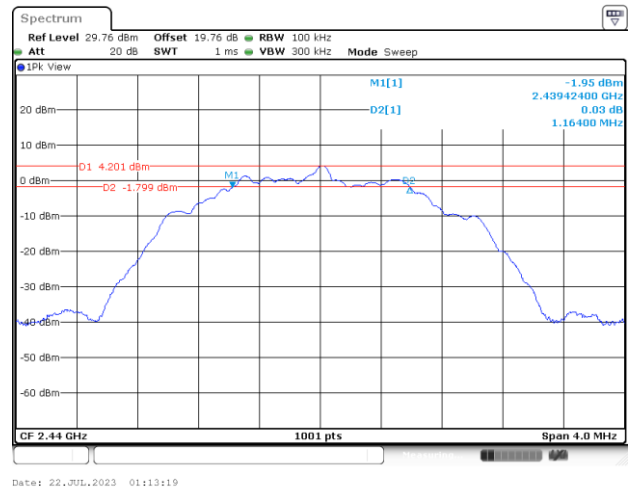


6 dB Bandwidth Plot on Channel 39

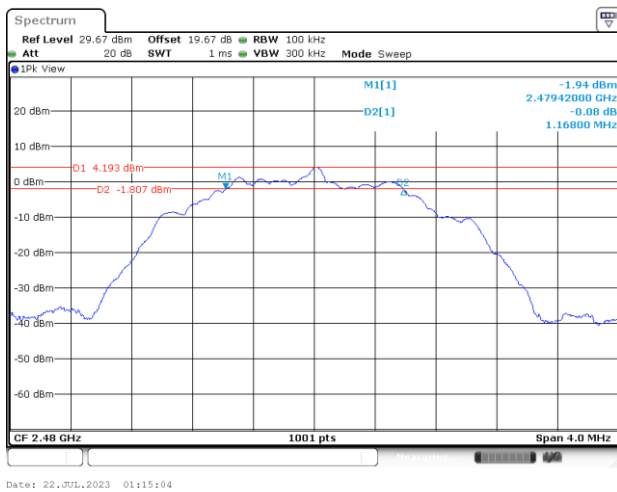

**99% Occupied Bandwidth**

<1Mbps>

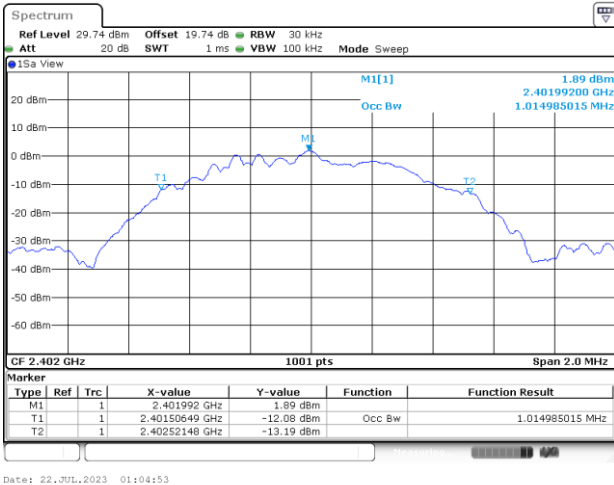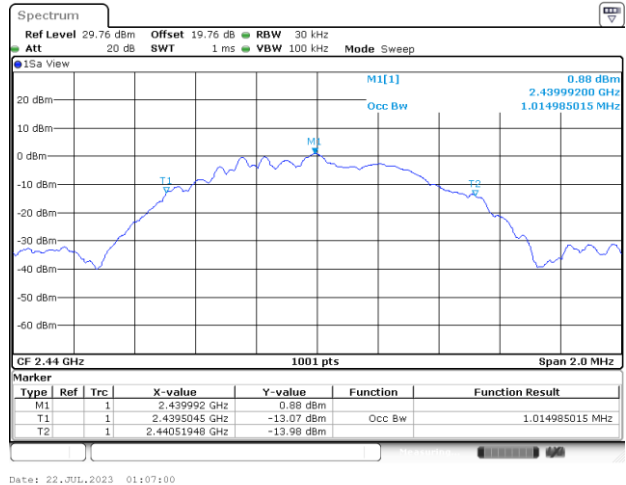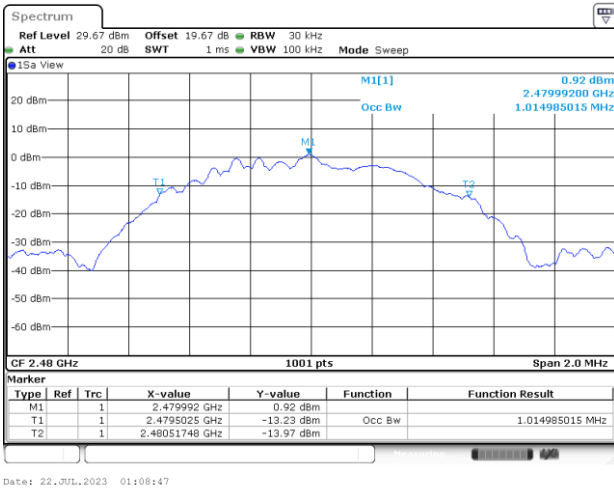
99% Occupied Bandwidth Plot on Channel 00**99% Occupied Plot Bandwidth on Channel 19****99% Occupied Bandwidth Plot on Channel 39**

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

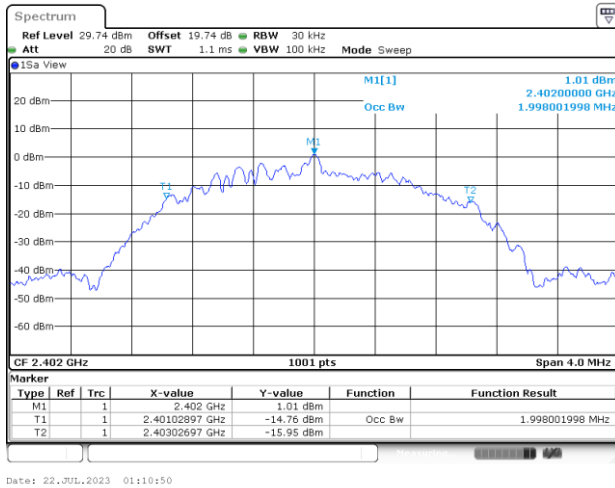

99% Occupied Plot Bandwidth on Channel 19



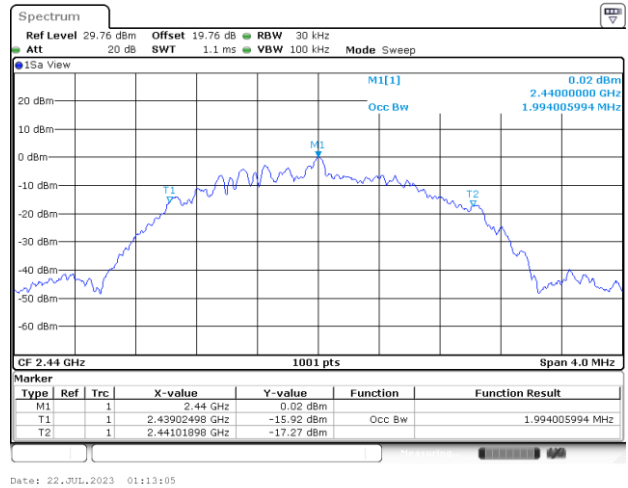


99% Occupied Bandwidth Plot on Channel 39

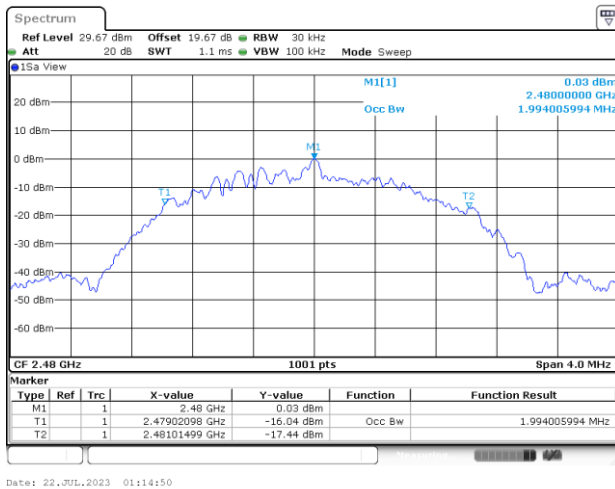

**Power Spectral Density (dBm/3kHz)**


<1Mbps>

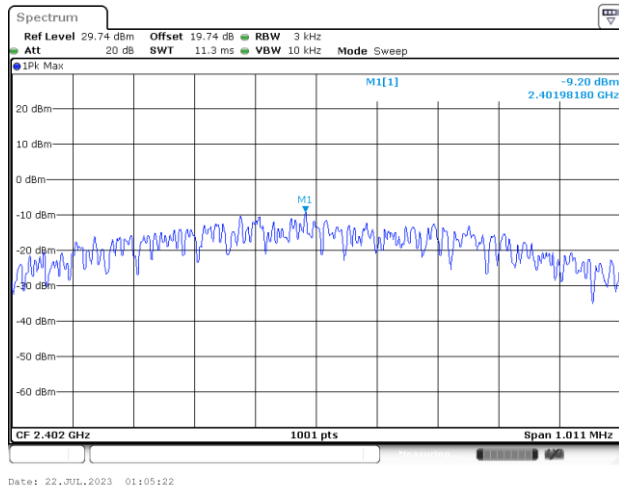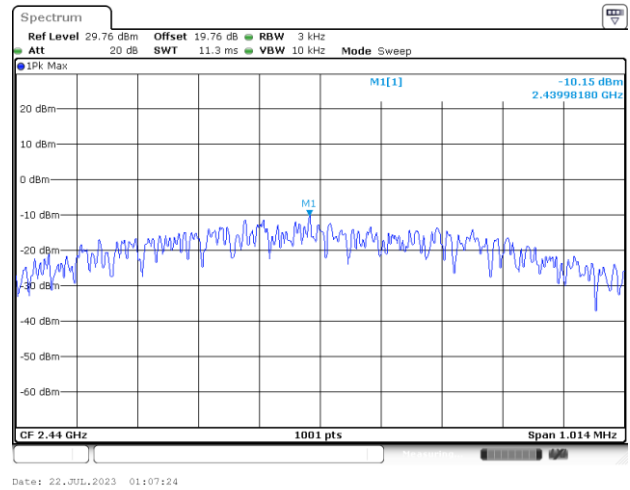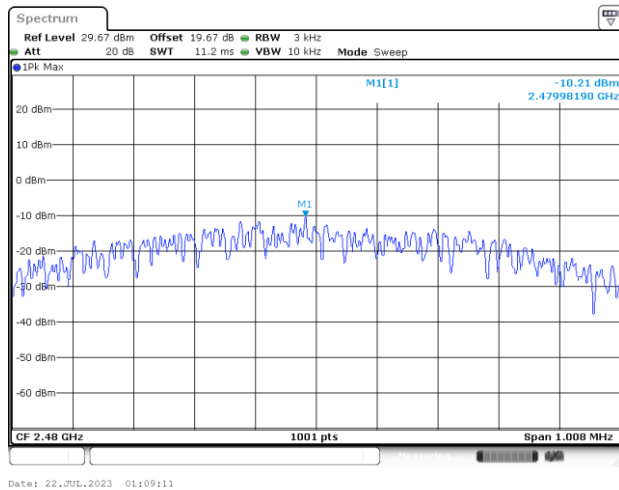Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

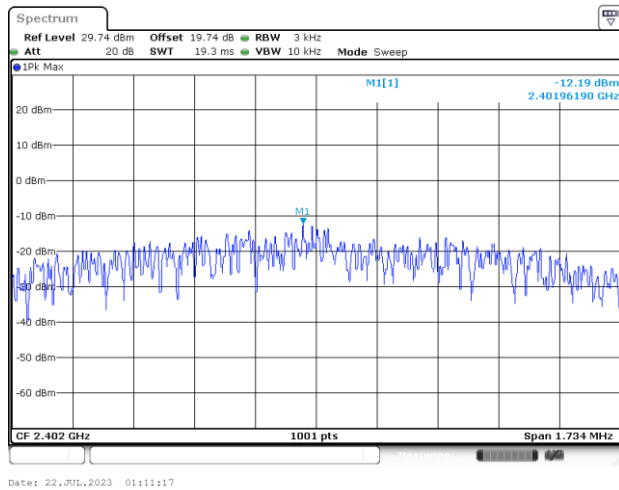

Power Density (dBm/3kHz) Plot Channel 19

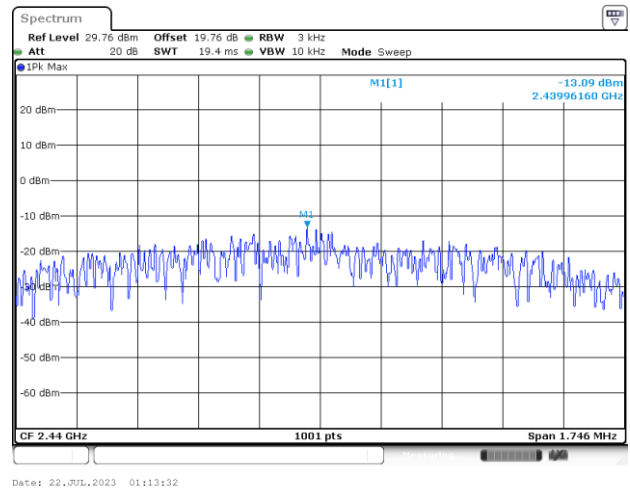

Power Density (dBm/3kHz) Plot Channel 39

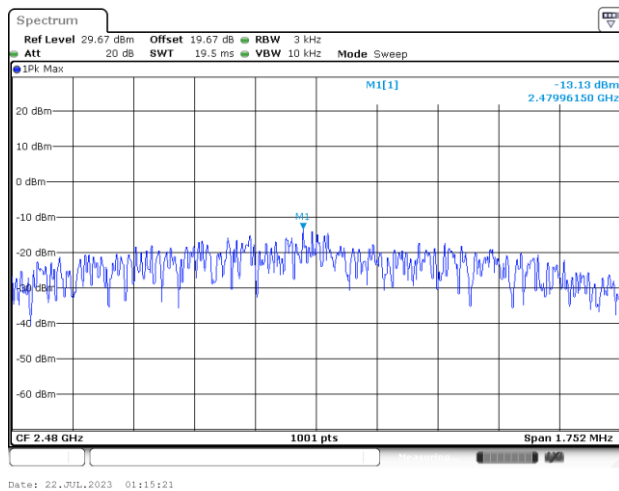




Band Edge and Spurious Emission


<1Mbps> Channel 00

100kHz PSD reference Level Plot

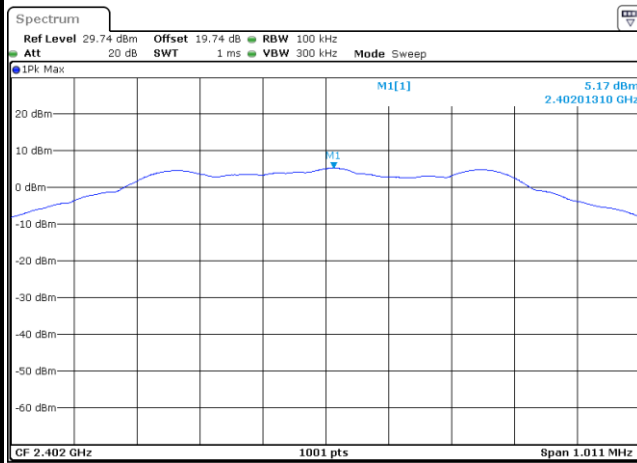


Date: 22.JUL.2023 01:05:40

Low Channel Plot

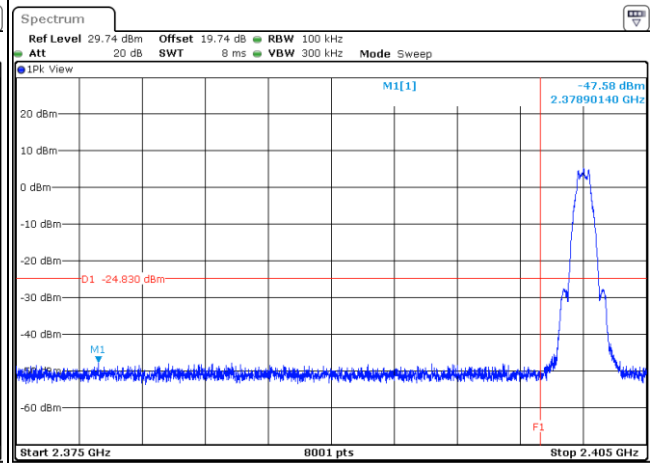


Date: 22.JUL.2023 01:06:31

Spurious Emission 30MHz~1GHz Plot

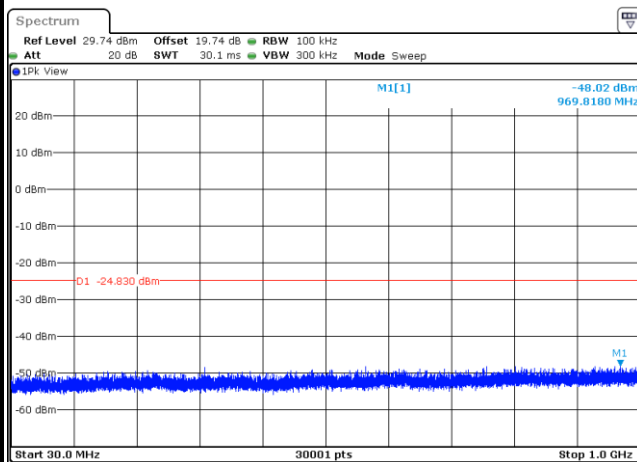

Date: 22.JUL.2023 01:05:56

Spurious Emission 1GHz~26.5GHz Plot

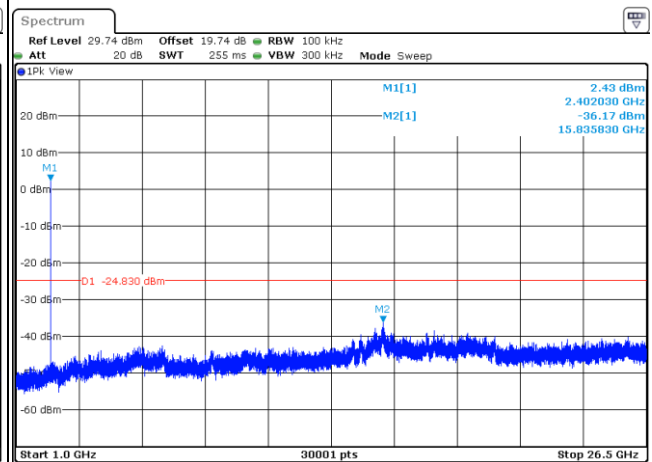


Date: 22.JUL.2023 01:06:12




<1Mbps> Channel 19

100kHz PSD reference Level Plot

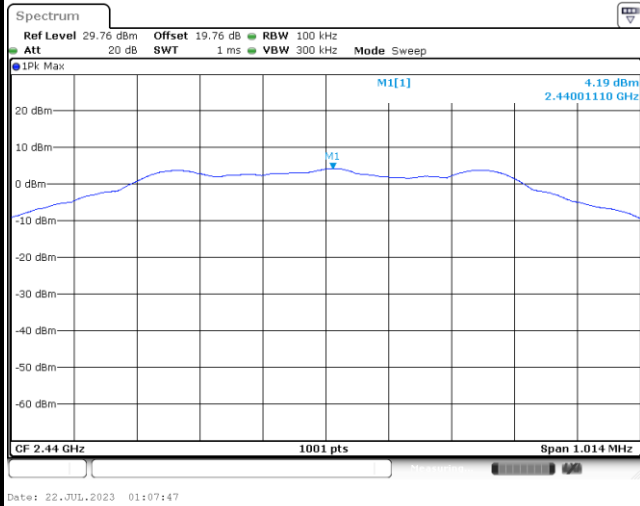


Middle Channel Plot

Spurious Emission 30MHz~1GHz Plot

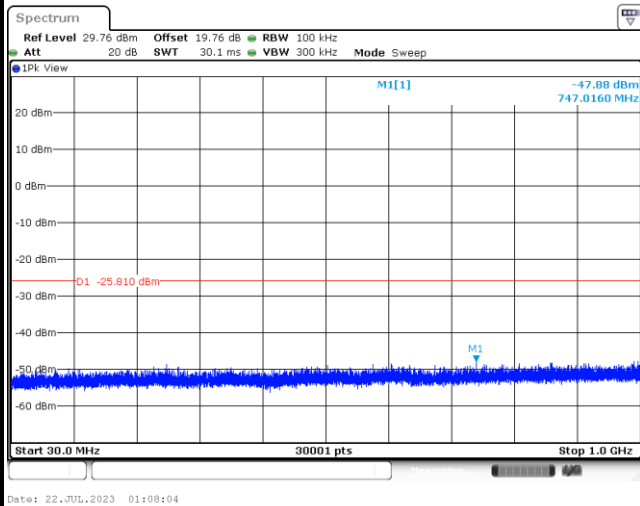


Spurious Emission 1GHz~26.5GHz Plot

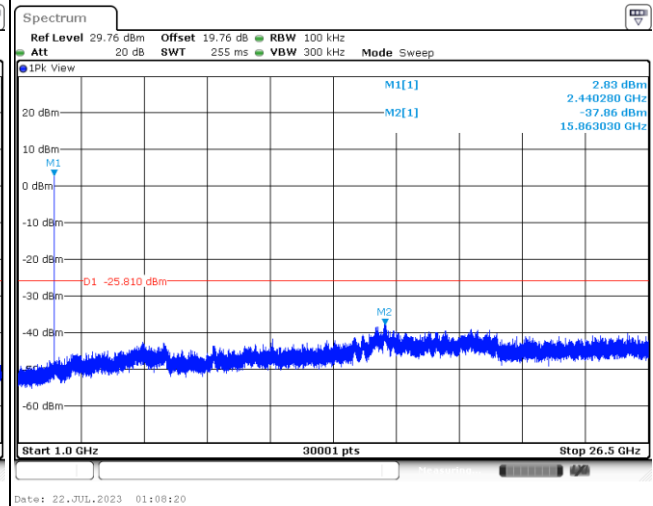




<1Mbps> Channel 39


100kHz PSD reference Level Plot

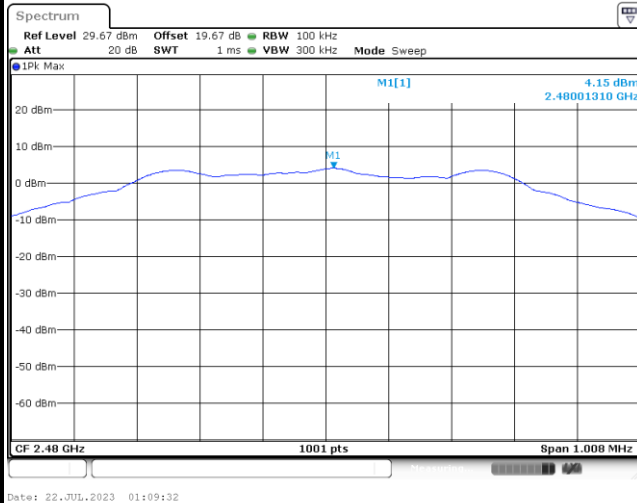


High Channel Plot

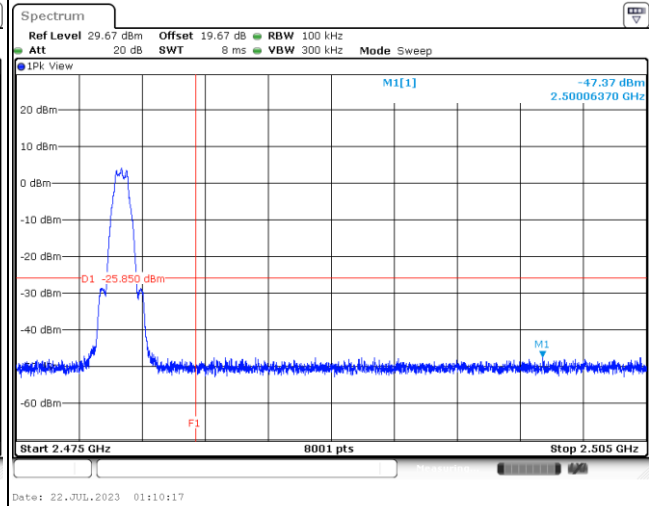

Spurious Emission 30MHz~1GHz Plot

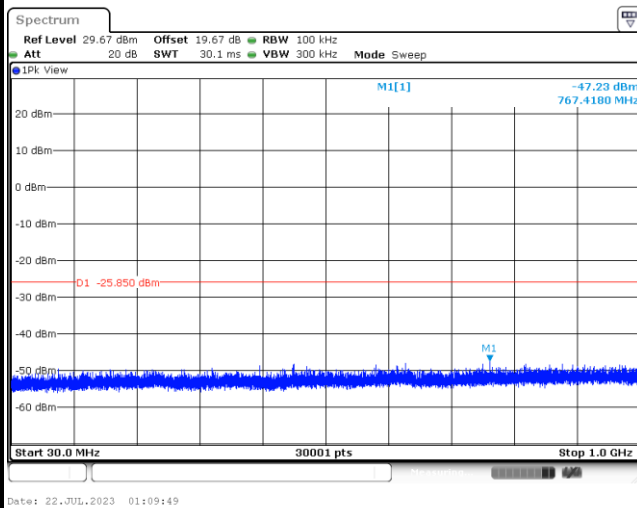


Spurious Emission 1GHz~26.5GHz Plot

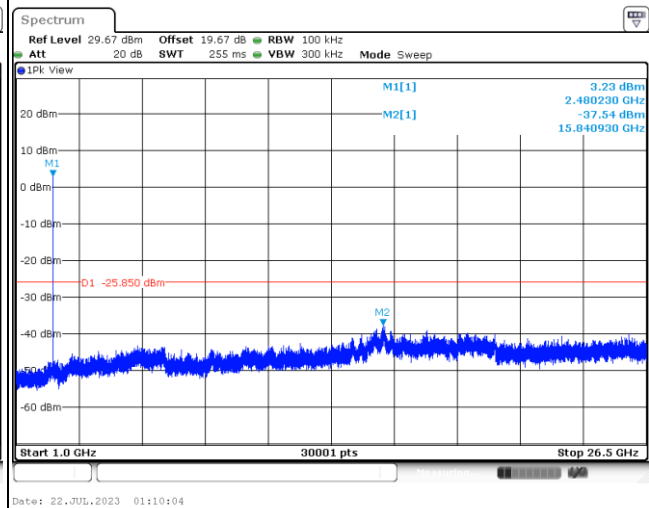




<2Mbps> Channel 00


100kHz PSD reference Level Plot

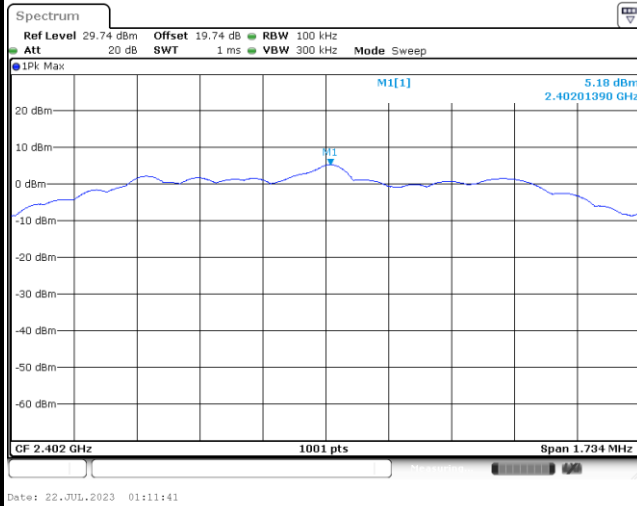


Low Channel Plot

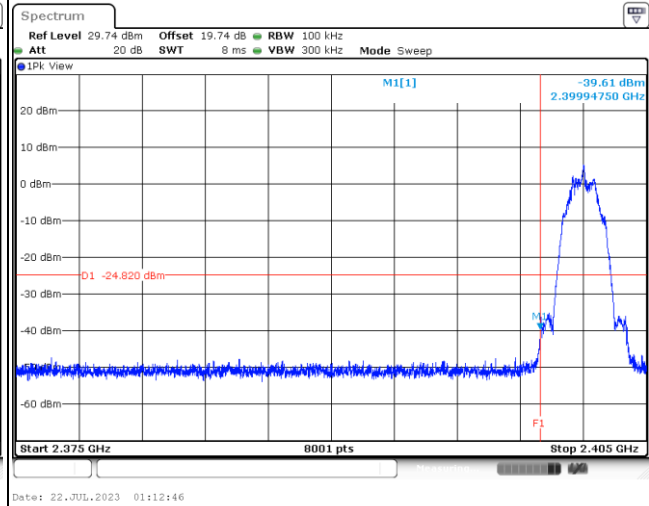

Spurious Emission 30MHz~1GHz Plot

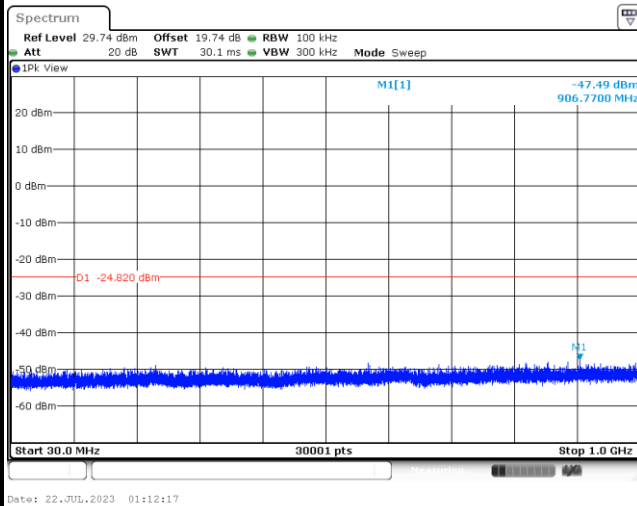


Spurious Emission 1GHz~26.5GHz Plot

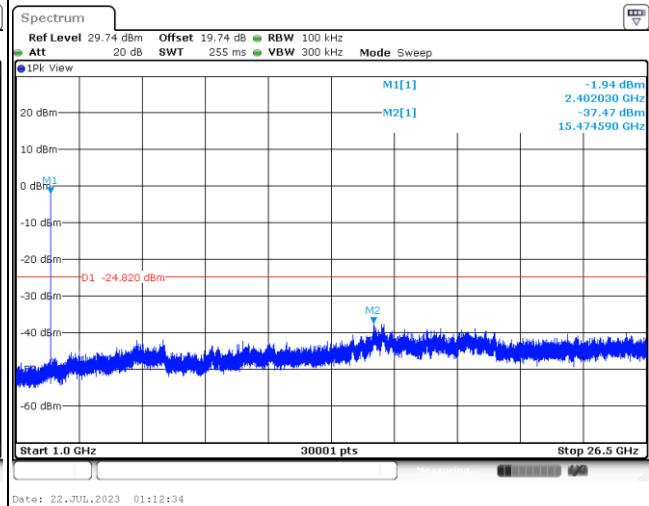




<2Mbps> Channel 19

100kHz PSD reference Level Plot

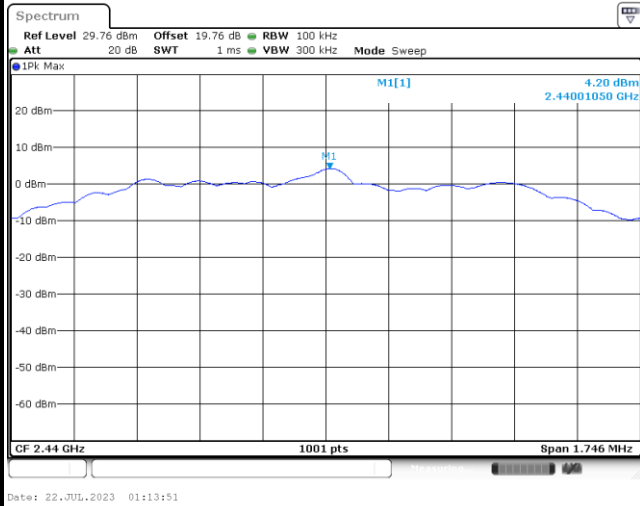






Middle Channel Plot

Spurious Emission 30MHz~1GHz Plot

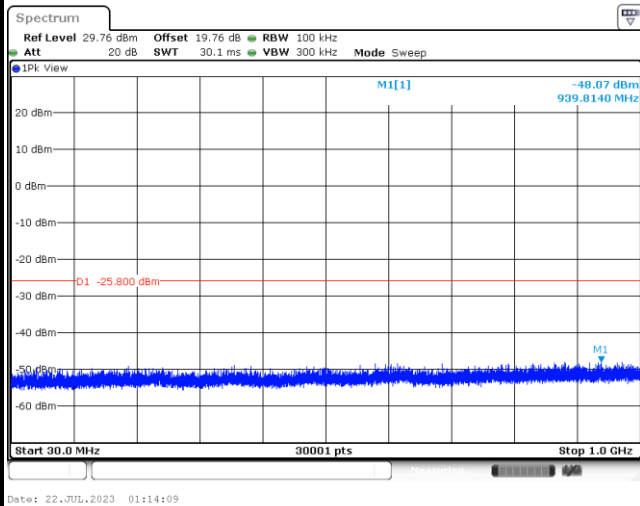

Spurious Emission 1GHz~26.5GHz Plot

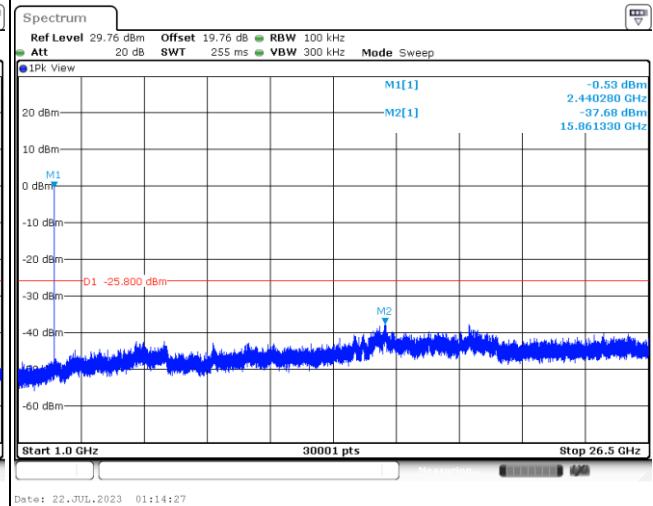
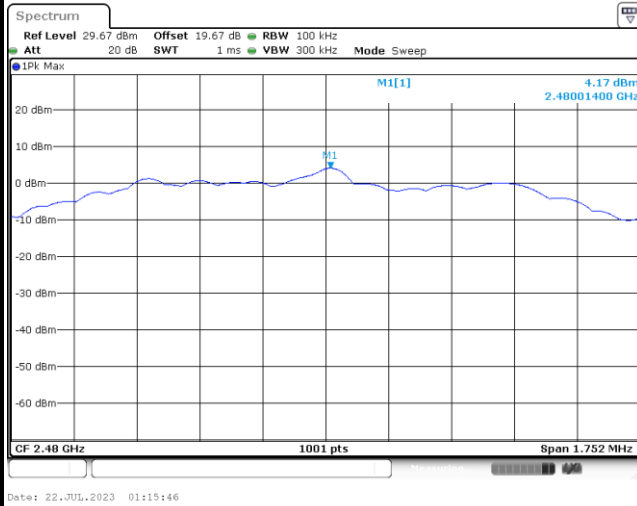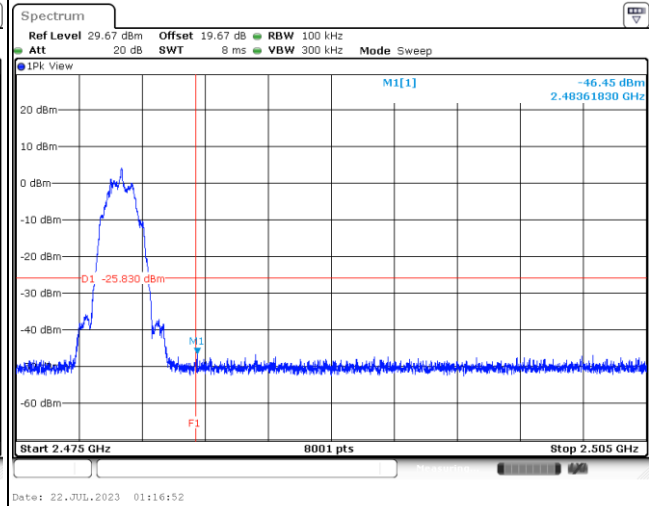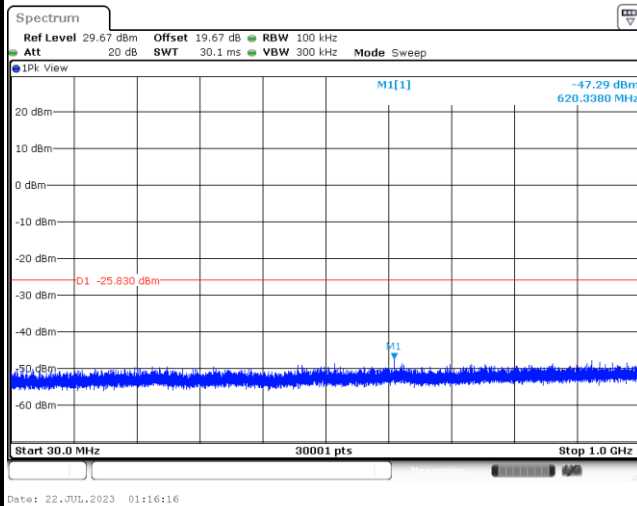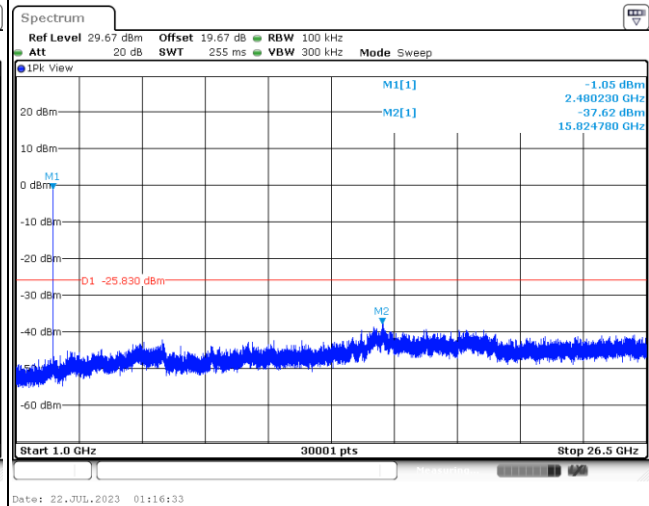
<2Mbps> Channel 39
100kHz PSD reference Level Plot

High Channel Plot

Spurious Emission 30MHz~1GHz Plot

Spurious Emission 1GHz~26.5GHz Plot




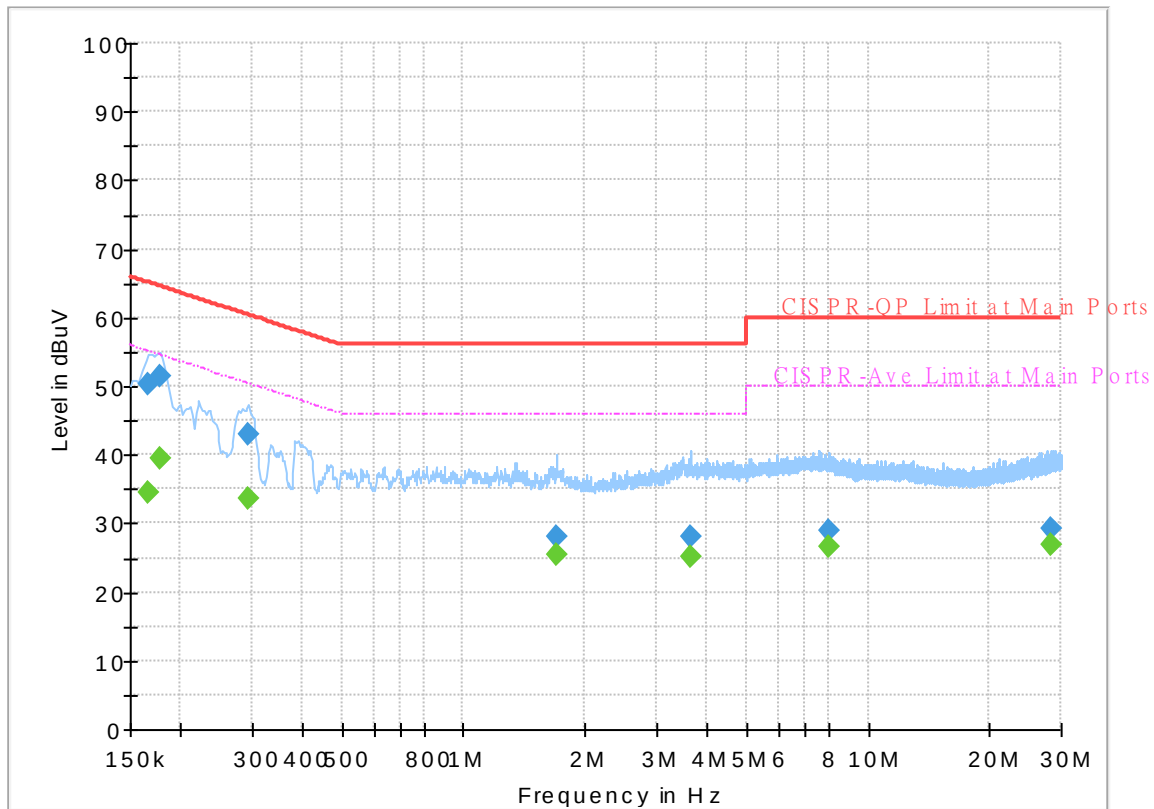
Appendix B. AC Conducted Emission Test Results

Test Engineer :	LI YAN-XUN	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 362117
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum




Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.165750	---	34.55	55.17	20.62	L1	OFF	19.8
0.165750	50.26	---	65.17	14.91	L1	OFF	19.8
0.177000	---	39.42	54.63	15.21	L1	OFF	19.8
0.177000	51.57	---	64.63	13.06	L1	OFF	19.8
0.294000	---	33.59	50.41	16.82	L1	OFF	19.9
0.294000	43.08	---	60.41	17.33	L1	OFF	19.9
1.700250	---	25.33	46.00	20.67	L1	OFF	19.9
1.700250	28.14	---	56.00	27.86	L1	OFF	19.9
3.628500	---	25.28	46.00	20.72	L1	OFF	20.0
3.628500	28.19	---	56.00	27.81	L1	OFF	20.0
7.973250	---	26.47	50.00	23.53	L1	OFF	20.1
7.973250	29.07	---	60.00	30.93	L1	OFF	20.1
28.407750	---	26.98	50.00	23.02	L1	OFF	20.6
28.407750	29.34	---	60.00	30.66	L1	OFF	20.6

EUT Information

Report NO : 362117
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

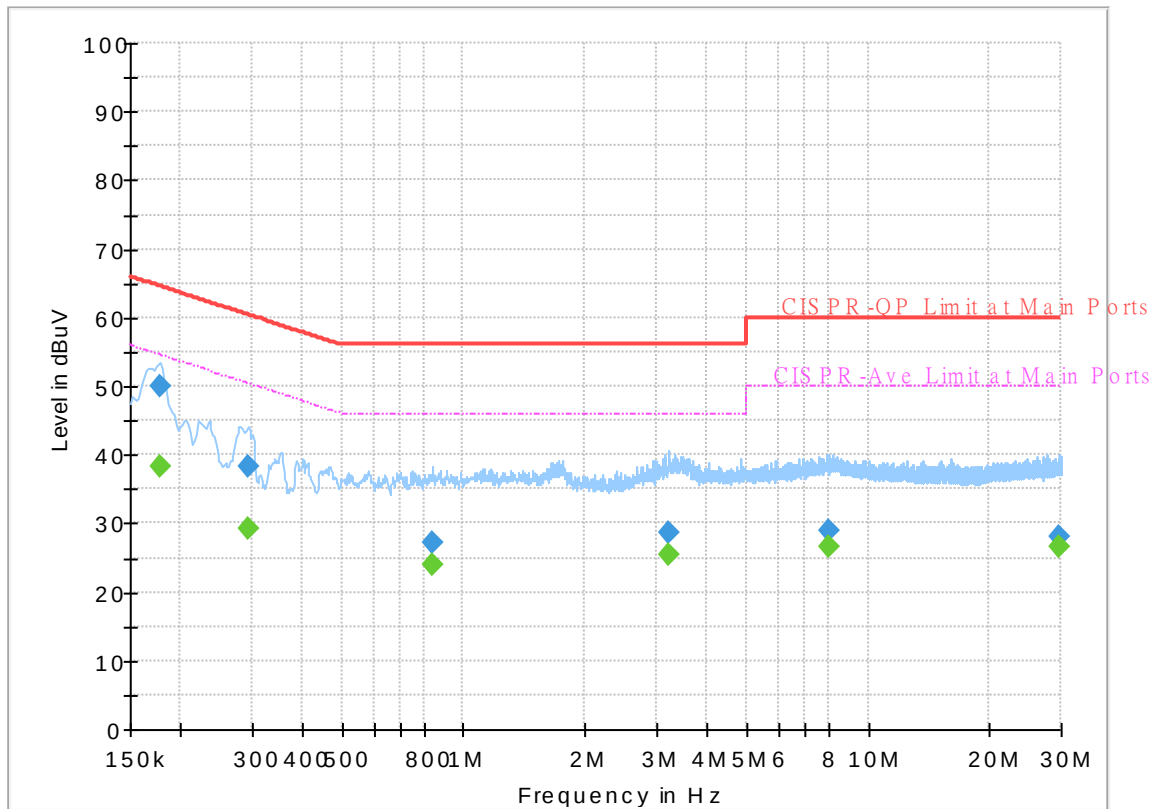

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.177000	---	38.24	54.63	16.39	N	OFF	19.8
0.177000	49.86	---	64.63	14.77	N	OFF	19.8
0.294000	---	29.10	50.41	21.31	N	OFF	19.9
0.294000	38.22	---	60.41	22.19	N	OFF	19.9
0.836250	---	24.02	46.00	21.98	N	OFF	19.9
0.836250	27.25	---	56.00	28.75	N	OFF	19.9
3.219000	---	25.34	46.00	20.66	N	OFF	19.9
3.219000	28.57	---	56.00	27.43	N	OFF	19.9
7.971000	---	26.56	50.00	23.44	N	OFF	20.1
7.971000	29.08	---	60.00	30.92	N	OFF	20.1
29.773500	---	26.52	50.00	23.48	N	OFF	20.8
29.773500	28.16	---	60.00	31.84	N	OFF	20.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Jack Tasi, Gary Guo and Steven Wu	Temperature :	20~25°C
		Relative Humidity :	50~65%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE ANT 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2366.07	54.16	-19.84	74	40.12	27.2	17.31	30.47	100	298	P	H
		2385.39	44.14	-9.86	54	29.91	27.35	17.35	30.47	100	298	A	H
	*	2402	100.96	-	-	86.64	27.4	17.38	30.46	100	298	P	H
	*	2402	100.31	-	-	85.99	27.4	17.38	30.46	100	298	A	H
													H
													H
		2389.8	53.85	-20.15	74	39.56	27.4	17.36	30.47	253	274	P	V
		2377.095	44.09	-9.91	54	29.96	27.27	17.33	30.47	253	274	A	V
	*	2402	100.47	-	-	86.15	27.4	17.38	30.46	253	274	P	V
	*	2402	99.82	-	-	85.5	27.4	17.38	30.46	253	274	A	V
													V
													V
BLE CH 19 2440MHz		2378.74	54.01	-19.99	74	39.85	27.29	17.34	30.47	104	294	P	H
		2384.34	44.2	-9.8	54	29.98	27.34	17.35	30.47	104	294	A	H
	*	2440	107.33	-	-	92.74	27.6	17.44	30.45	104	294	P	H
	*	2440	106.83	-	-	92.24	27.6	17.44	30.45	104	294	A	H
		2494.4	54.37	-19.63	74	39.48	27.8	17.52	30.43	104	294	P	H
		2492.79	45.01	-8.99	54	30.12	27.8	17.52	30.43	104	294	A	H
		2333.52	53.92	-20.08	74	40.02	27.14	17.24	30.48	307	257	P	V
		2388.54	44.28	-9.72	54	30	27.39	17.36	30.47	307	257	A	V
	*	2440	107.72	-	-	93.13	27.6	17.44	30.45	307	257	P	V
	*	2440	106.73	-	-	92.14	27.6	17.44	30.45	307	257	A	V
		2485.51	54.78	-19.22	74	39.94	27.76	17.51	30.43	307	257	P	V
		2494.68	45.05	-8.95	54	30.16	27.8	17.52	30.43	307	257	A	V



BLE ANT 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	99.64	-	-	84.88	27.7	17.5	30.44	108	297	P	H
	*	2480	98.92	-	-	84.16	27.7	17.5	30.44	108	297	A	H
		2495.2	55.31	-18.69	74	40.42	27.8	17.52	30.43	108	297	P	H
		2492.44	45.41	-8.59	54	30.52	27.8	17.52	30.43	108	297	A	H
													H
													H
	*	2480	99.28	-	-	84.52	27.7	17.5	30.44	299	269	P	V
	*	2480	98.16	-	-	83.4	27.7	17.5	30.44	299	269	A	V
		2490.92	55.02	-18.98	74	40.13	27.8	17.52	30.43	299	269	P	V
		2495.2	45.15	-8.85	54	30.26	27.8	17.52	30.43	299	269	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE ANT 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	38.66	-35.34	74	61.76	32.32	11.23	66.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	38.65	-35.35	74	61.75	32.32	11.23	66.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

BLE ANT 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	38.92	-35.08	74	61.18	32.88	11.37	66.51	-	-	P	H
		7440	43.02	-30.98	74	59.52	36.44	13.44	66.38	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4960	38.97	-35.03	74	61.23	32.88	11.37	66.51	-	-	P	V
		7440	42.44	-31.56	74	58.94	36.44	13.44	66.38	-	-	P	V
													V
													V
													V
													V
													V
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE ANT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
6		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2376.99	54.42	-19.58	74	40.29	27.27	17.33	30.47	100	299	P	H
		2389.695	45.05	-8.95	54	30.76	27.4	17.36	30.47	100	299	A	H
	*	2402	103.91	-	-	89.59	27.4	17.38	30.46	100	299	P	H
	*	2402	102.25	-	-	87.93	27.4	17.38	30.46	100	299	A	H
													H
													H
		2376.36	54.07	-19.93	74	39.95	27.26	17.33	30.47	253	263	P	V
		2378.355	44.94	-9.06	54	30.8	27.28	17.33	30.47	253	263	A	V
	*	2402	102.82	-	-	88.5	27.4	17.38	30.46	253	263	P	V
	*	2402	101.24	-	-	86.92	27.4	17.38	30.46	253	263	A	V
													V
													V
BLE CH 19 2440MHz		2378.88	53.6	-20.4	74	39.44	27.29	17.34	30.47	104	300	P	H
		2372.16	44.9	-9.1	54	30.83	27.22	17.32	30.47	104	300	A	H
	*	2440	104.24	-	-	89.65	27.6	17.44	30.45	104	300	P	H
	*	2440	102.79	-	-	88.2	27.6	17.44	30.45	104	300	A	H
		2494.05	54.75	-19.25	74	39.86	27.8	17.52	30.43	104	300	P	H
		2491.53	45.91	-8.09	54	31.02	27.8	17.52	30.43	104	300	A	H
		2381.96	53.75	-20.25	74	39.56	27.32	17.34	30.47	309	268	P	V
		2387.28	44.68	-9.32	54	30.43	27.37	17.35	30.47	309	268	A	V
	*	2440	103.83	-	-	89.24	27.6	17.44	30.45	309	268	P	V
	*	2440	102.24	-	-	87.65	27.6	17.44	30.45	309	268	A	V
		2499.86	54.66	-19.34	74	39.76	27.8	17.53	30.43	309	268	P	V
		2483.55	45.59	-8.41	54	30.78	27.74	17.51	30.44	309	268	A	V



BLE ANT 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	99.78	-	-	85.02	27.7	17.5	30.44	107	299	P	H
	*	2480	97.93	-	-	83.17	27.7	17.5	30.44	107	299	A	H
		2499.48	54.28	-19.72	74	39.38	27.8	17.53	30.43	107	299	P	H
		2488.08	45.83	-8.17	54	30.97	27.78	17.51	30.43	107	299	A	H
													H
													H
	*	2480	99.86	-	-	85.1	27.7	17.5	30.44	265	268	P	V
	*	2480	98.15	-	-	83.39	27.7	17.5	30.44	265	268	A	V
		2499.16	54.68	-19.32	74	39.78	27.8	17.53	30.43	265	268	P	V
		2487.4	45.95	-8.05	54	31.1	27.77	17.51	30.43	265	268	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE ANT 6	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.7	-34.3	74	62.8	32.32	11.23	66.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	39.27	-34.73	74	62.37	32.32	11.23	66.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

[illegible]

Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
ANT					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
6		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		25048	38.38	-35.62	74	55.12	39.14	-2.58	53.3	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	

Emission below 1GHz

2.4GHz BLE (LF)

[illegible]



<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE ANT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2322.285	53.65	-20.35	74	39.74	27.18	17.22	30.49	100	301	P	H
		2381.505	44.26	-9.74	54	30.07	27.32	17.34	30.47	100	301	A	H
	*	2402	104.06	-	-	89.74	27.4	17.38	30.46	100	301	P	H
	*	2402	103.57	-	-	89.25	27.4	17.38	30.46	100	301	A	H
													H
													H
		2365.755	54.58	-19.42	74	40.54	27.2	17.31	30.47	252	271	P	V
		2387.7	44.47	-9.53	54	30.21	27.38	17.35	30.47	252	271	A	V
	*	2402	102.73	-	-	88.41	27.4	17.38	30.46	252	271	P	V
	*	2402	102.03	-	-	87.71	27.4	17.38	30.46	252	271	A	V
													V
													V
BLE CH 19 2440MHz		2346.82	53.41	-20.59	74	39.42	27.2	17.27	30.48	105	302	P	H
		2367.12	44.53	-9.47	54	30.49	27.2	17.31	30.47	105	302	A	H
	*	2440	104.64	-	-	90.05	27.6	17.44	30.45	105	302	P	H
	*	2440	104.12	-	-	89.53	27.6	17.44	30.45	105	302	A	H
		2498.32	55.34	-18.66	74	40.44	27.8	17.53	30.43	105	302	P	H
		2485.23	45.08	-8.92	54	30.25	27.75	17.51	30.43	105	302	A	H
		2384.06	53.53	-20.47	74	39.31	27.34	17.35	30.47	277	269	P	V
		2386.44	44.21	-9.79	54	29.97	27.36	17.35	30.47	277	269	A	V
	*	2440	104.24	-	-	89.65	27.6	17.44	30.45	277	269	P	V
	*	2440	103.73	-	-	89.14	27.6	17.44	30.45	277	269	A	V
		2496.5	54.56	-19.44	74	39.67	27.8	17.52	30.43	277	269	P	V
		2491.53	45.16	-8.84	54	30.27	27.8	17.52	30.43	277	269	A	V



BLE ANT 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	99.63	-	-	84.87	27.7	17.5	30.44	110	302	P	H
	*	2480	98.96	-	-	84.2	27.7	17.5	30.44	110	302	A	H
		2494.32	54.67	-19.33	74	39.78	27.8	17.52	30.43	110	302	P	H
		2490.16	45.15	-8.85	54	30.26	27.8	17.52	30.43	110	302	A	H
													H
													H
	*	2480	99.38	-	-	84.62	27.7	17.5	30.44	265	274	P	V
	*	2480	98.64	-	-	83.88	27.7	17.5	30.44	265	274	A	V
		2492.56	54.64	-19.36	74	39.75	27.8	17.52	30.43	265	274	P	V
		2498.32	45.05	-8.95	54	30.15	27.8	17.53	30.43	265	274	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE ANT 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.33	-34.67	74	62.43	32.32	11.23	66.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	40.31	-33.69	74	63.41	32.32	11.23	66.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

[illegible]



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE ANT	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2360.925	54.45	-19.55	74	40.42	27.2	17.3	30.47	100	301	P	H
		2367.645	44.76	-9.24	54	30.72	27.2	17.31	30.47	100	301	A	H
	*	2402	104.05	-	-	89.73	27.4	17.38	30.46	100	301	P	H
	*	2402	102.08	-	-	87.76	27.4	17.38	30.46	100	301	A	H
													H
													H
		2314.515	54.69	-19.31	74	40.78	27.2	17.2	30.49	315	272	P	V
		2383.29	45.13	-8.87	54	30.93	27.33	17.34	30.47	315	272	A	V
	*	2402	102.47	-	-	88.15	27.4	17.38	30.46	315	272	P	V
	*	2402	100.7	-	-	86.38	27.4	17.38	30.46	315	272	A	V
													V
													V
BLE CH 19 2440MHz		2311.68	53.73	-20.27	74	39.83	27.2	17.19	30.49	100	298	P	H
		2372.16	44.99	-9.01	54	30.92	27.22	17.32	30.47	100	298	A	H
	*	2440	104.58	-	-	89.99	27.6	17.44	30.45	100	298	P	H
	*	2440	102.95	-	-	88.36	27.6	17.44	30.45	100	298	A	H
		2492.37	54.7	-19.3	74	39.81	27.8	17.52	30.43	100	298	P	H
		2484.6	45.68	-8.32	54	30.85	27.75	17.51	30.43	100	298	A	H
		2320.78	53.65	-20.35	74	39.74	27.19	17.21	30.49	308	264	P	V
		2332.4	44.93	-9.07	54	31.05	27.12	17.24	30.48	308	264	A	V
	*	2440	104.16	-	-	89.57	27.6	17.44	30.45	308	264	P	V
	*	2440	102.71	-	-	88.12	27.6	17.44	30.45	308	264	A	V
		2488.1	54.26	-19.74	74	39.4	27.78	17.51	30.43	308	264	P	V
		2489.64	45.86	-8.14	54	30.98	27.8	17.51	30.43	308	264	A	V



BLE ANT 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	100.42	-	-	85.66	27.7	17.5	30.44	111	299	P	H
	*	2480	98.59	-	-	83.83	27.7	17.5	30.44	111	299	A	H
		2490.64	54.77	-19.23	74	39.88	27.8	17.52	30.43	111	299	P	H
		2488.04	46.16	-7.84	54	31.3	27.78	17.51	30.43	111	299	A	H
													H
													H
	*	2480	99.33	-	-	84.57	27.7	17.5	30.44	298	273	P	V
	*	2480	97.54	-	-	82.78	27.7	17.5	30.44	298	273	A	V
		2487.6	54.57	-19.43	74	39.71	27.78	17.51	30.43	298	273	P	V
		2499.32	45.91	-8.09	54	31.01	27.8	17.53	30.43	298	273	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE ANT 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.86	-34.14	74	62.96	32.32	11.23	66.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	39.93	-34.07	74	63.03	32.32	11.23	66.65	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE ANT 7	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	40.21	-33.79	74	62.84	32.66	11.29	66.58	-	-	P	H
		7320	43.67	-30.33	74	59.71	36.86	13.43	66.33	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	39.64	-34.36	74	62.27	32.66	11.29	66.58	-	-	P	V
		7320	43.73	-30.27	74	59.77	36.86	13.43	66.33	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
ANT					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
7		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		24952	38.85	-35.15	74	55.64	39.12	-2.59	53.32	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	

Emission below 1GHz

2.4GHz BLE (LF)

[illegible]



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
ANT					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
6		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jack Tasi, Gary Guo and Steven Wu	Temperature :	20~25°C
		Relative Humidity :	50~65%

Note symbol

-L	Low channel location
-R	High channel location



<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
6	Vertical	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto
Avg		







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
6	Horizontal	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_9C_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto

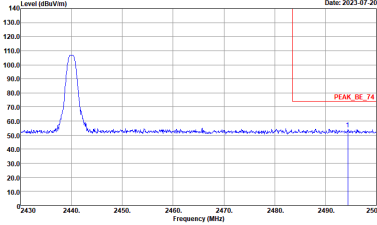
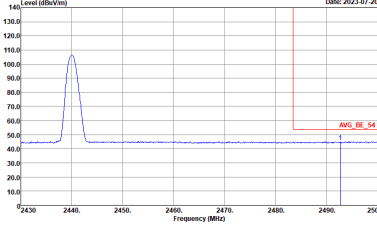


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
6	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Left blank

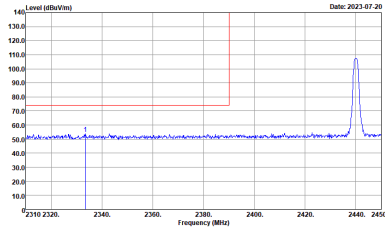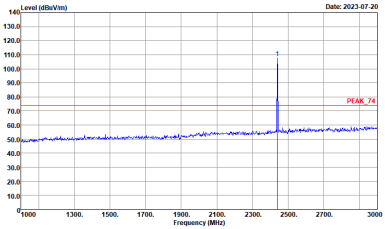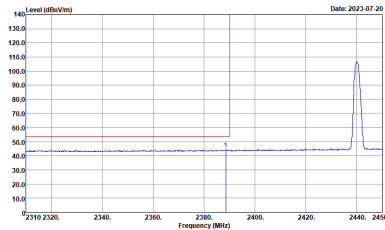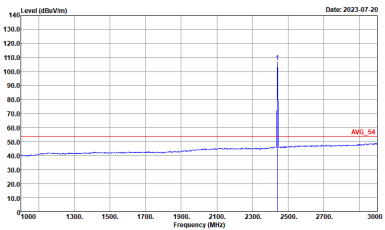

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
6	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto	 Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto

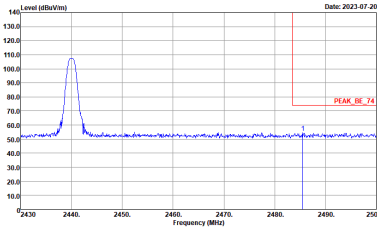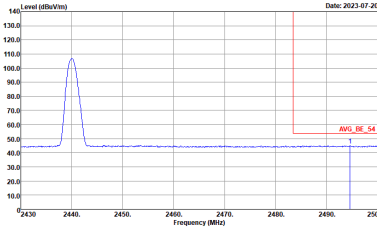

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
6	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
6	Horizontal	Fundamental
Peak	Horizontal Peak Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'PEAK_BE_74'. Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Fundamental Peak Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'PEAK_74'. Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Horizontal Avg. Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'AVG_BE_54'. Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Fundamental Avg. Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'AVG_54'. Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
6	Vertical	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:2.700KHz SWT:Auto



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

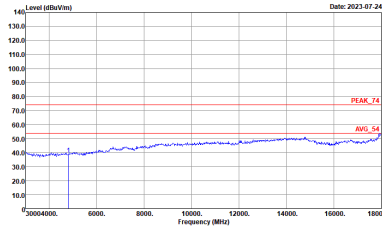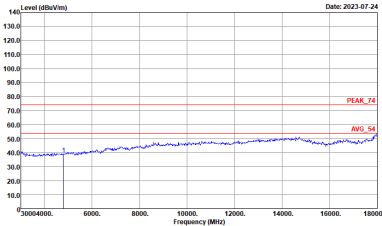BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL ..	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL ..



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBm/Vm) vs Frequency (MHz) for Horizontal orientation. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the average level (AVG_54) at approximately 55 dBm/Vm. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 HORIZONTAL ..	Level (dBm/Vm) vs Frequency (MHz) for Vertical orientation. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the average level (AVG_54) at approximately 55 dBm/Vm. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 HORIZONTAL ..
	Level (dBm/Vm) vs Frequency (MHz) for Horizontal orientation. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the average level (AVG_54) at approximately 55 dBm/Vm. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 VERTICAL ..	Level (dBm/Vm) vs Frequency (MHz) for Vertical orientation. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the average level (AVG_54) at approximately 55 dBm/Vm. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 VERTICAL ..



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
6	Horizontal	Vertical
Peak Avg.	140 Level (dBm/Hz) Date: 2023-07-24 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL ..	140 Level (dBm/Hz) Date: 2023-07-24 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL ..



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
6	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBm/Vm) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the AVG_54 level at approximately 55 dBm/Vm. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 HORIZONTAL	Level (dBm/Vm) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the AVG_54 level at approximately 55 dBm/Vm. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 HORIZONTAL
	Level (dBm/Vm) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the AVG_54 level at approximately 55 dBm/Vm. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 VERTICAL	Level (dBm/Vm) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the AVG_54 level at approximately 55 dBm/Vm. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
6	Horizontal	Vertical
Peak	140 Level (dBm/Hz) Date: 2023-07-24 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL ..	140 Level (dBm/Hz) Date: 2023-07-24 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL ..



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
6	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBm/Vm) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the noise floor at approximately 55 dBm/Vm. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 HORIZONTAL	Level (dBm/Vm) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the noise floor at approximately 55 dBm/Vm. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 HORIZONTAL
	Level (dBm/Vm) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the noise floor at approximately 55 dBm/Vm. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 VERTICAL	Level (dBm/Vm) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBm/Vm. A red line indicates the noise floor at approximately 55 dBm/Vm. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Vm. Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_230323 VERTICAL



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.0000kHz VBW:3000.0000kHz SWT:Auto
Avg.	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.0000kHz VBW:5.1000kHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.0000kHz VBW:5.1000kHz SWT:Auto





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
6	Vertical	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto
Avg		



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
6	Horizontal	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_9E_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto

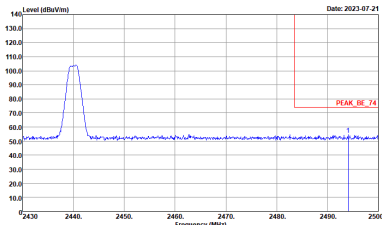
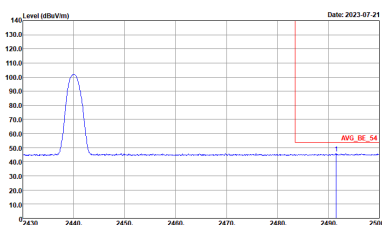


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
6	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
6	Vertical	Fundamental
Peak	Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto	Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto



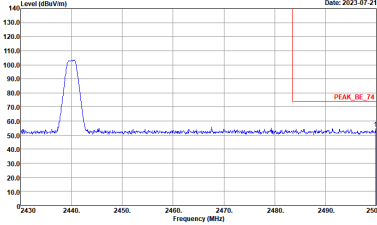
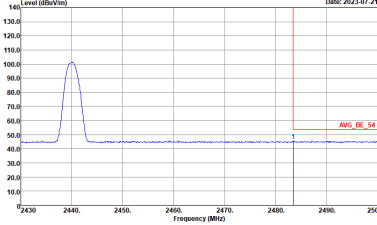


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
6	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
6	Horizontal	Fundamental
Peak	Horizontal Peak Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'PEAK_BE_74'. Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Fundamental Peak Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'PEAK_74'. Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Horizontal Avg. Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'AVG_BE_54'. Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto	Fundamental Avg. Spectrum Plot showing Level (dBm/Hz) vs Frequency (MHz). The plot shows a peak at 2480 MHz. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/Hz. The peak is labeled 'AVG_54'. Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 HORIZONTAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto

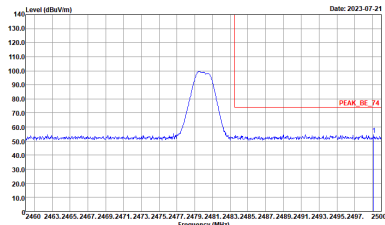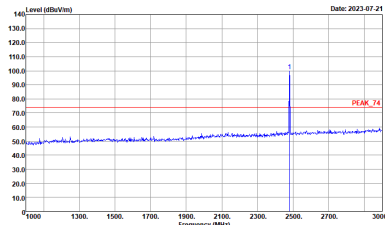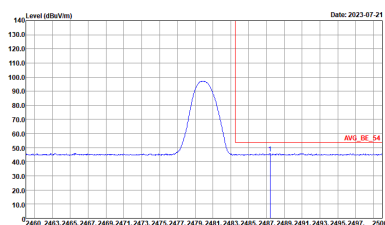
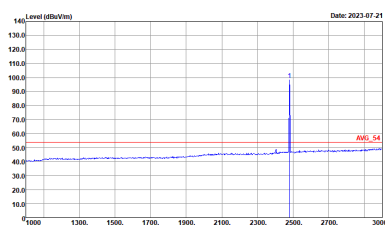


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
6	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto	 Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_230323 VERTICAL RBW:1000.000KHz VBW:5.100KHz SWT:Auto



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

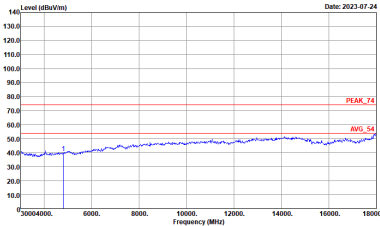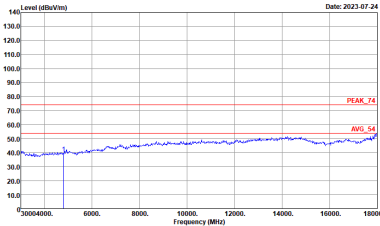BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
6	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 HORIZONTAL ..	 Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_230323 VERTICAL ..