



Coverage.
Performance.
Smart.

Profile Series N02FVAAF

Airgain Embedded Antenna Engineering Data Sheet

3611 Valley Centre Drive, Suite 150
San Diego, CA 92130 USA
Tel: +1 760 579 0200
Fax: +1 760 579 0892
Information: info@airgain.com
Sales: sales@airgain.com
Support: support@airgain.com

Revision History

Revision	Date	Note
4179C-02-00-001-1 Rev 1.0	June 30, 2023	Preliminary Datasheet 1.0

Contents

1. Airgain N02FVAAF Embedded Antenna	4
2. Features.....	4
3. Specifications and Interface.....	5
4. Radiation Patterns.....	5
5. Dimensions	7
6. ROHS.....	7
7. Feature and Options Information.....	7
7.1 Part Number Conventions	8
7.2 Part Number Example	8
8. Cable Data Sheet	9

Figures

Figure 1: Model N02FVAAF Embedded Antenna	4
Figure 2: Model N02FVAAF Measurement axes	5
Figure 3: Airgain N02FVAAF radiation patterns at 5.15 GHz & 5.5 GHz & 5.85 GHz	6
Figure 4: N02FVAAF Antenna dimensions.....	7
Figure 5: N02FVAAF with connector or stripped cable	8

1. Airgain N02FVAAF Embedded Antenna

The Model N02FVAAF Embedded Antenna provides a high efficiency, 5GHz band embedded antenna solution for Wi-Fi and ISM band applications, such as WLAN products. As embedded antenna solutions become the focus of next generation wireless product design, the Model N02FVAAF provides the flexibility of an embedded antenna with top performance. N02FVAAF has a (patent pending) perfectly balanced design, which makes the antenna decoupled from the feeding cable, making its behaviors independent of the details of the cable routing and improving noise rejection.

2. Features

The Model N02FVAAF Embedded Antenna is defined by the following features:

- IEEE 802.11 a/n/ac standards
- Case mount
- Single 5GHz Band operation
- Truly balanced operation
- High efficiency
- Quick integration



Figure 1: Model N02FVAAF Embedded Antenna

3. Specifications and Interface

Standard	IEEE 802.11 a/n/ac
Frequency range	5.15 to 5.85 GHz
Peak gain	5.2 dBi @ 5.5 GHz;
VSWR	< 1.5:1
Feed impedance	50 ohms
Power handling	30 dBm
Interface	50 ohms, 1.13 mm diameter, micro coax cable (available with optional U.FL-compatible cable connector and/or cable-mounted EMI ferrites)
Antenna dimensions	18.3 x 8.0 x 0.5 (mm)
Weight	TBD
Temperature range	Operating: -40° C to +75° C (-40° F to +167° F) Storage: -40° C to +85° C (-40° F to +185° F)
Humidity range	0% to 95% non-condensing

4. Radiation Patterns

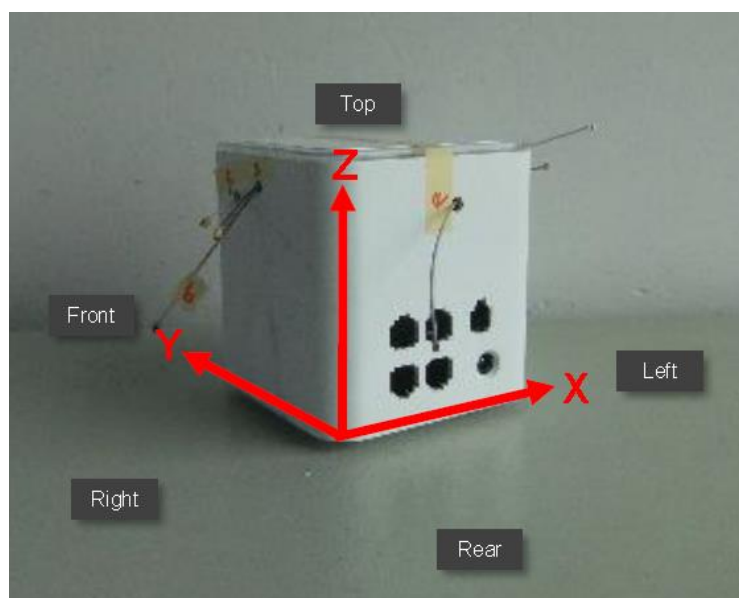


Figure 2: Model N02FVAAF Measurement axes

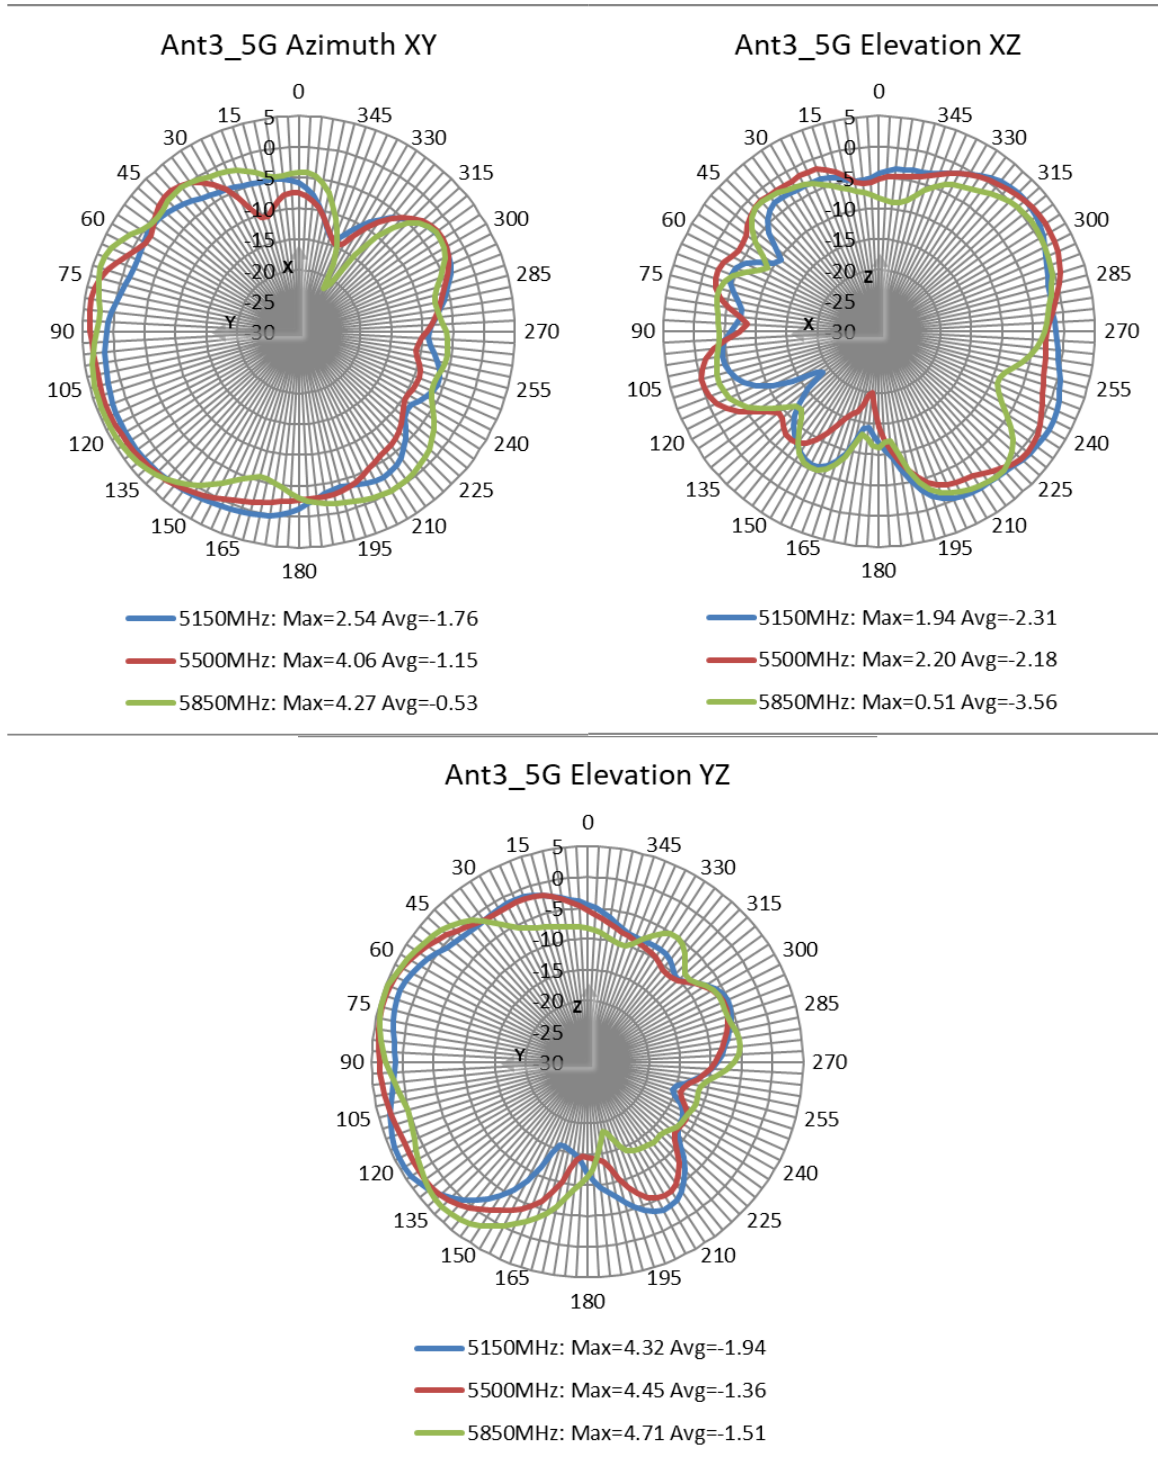


Figure 3: Airgain N02FVAAF radiation patterns at 5.15 GHz & 5.5 GHz & 5.85 GHz

5. Dimensions

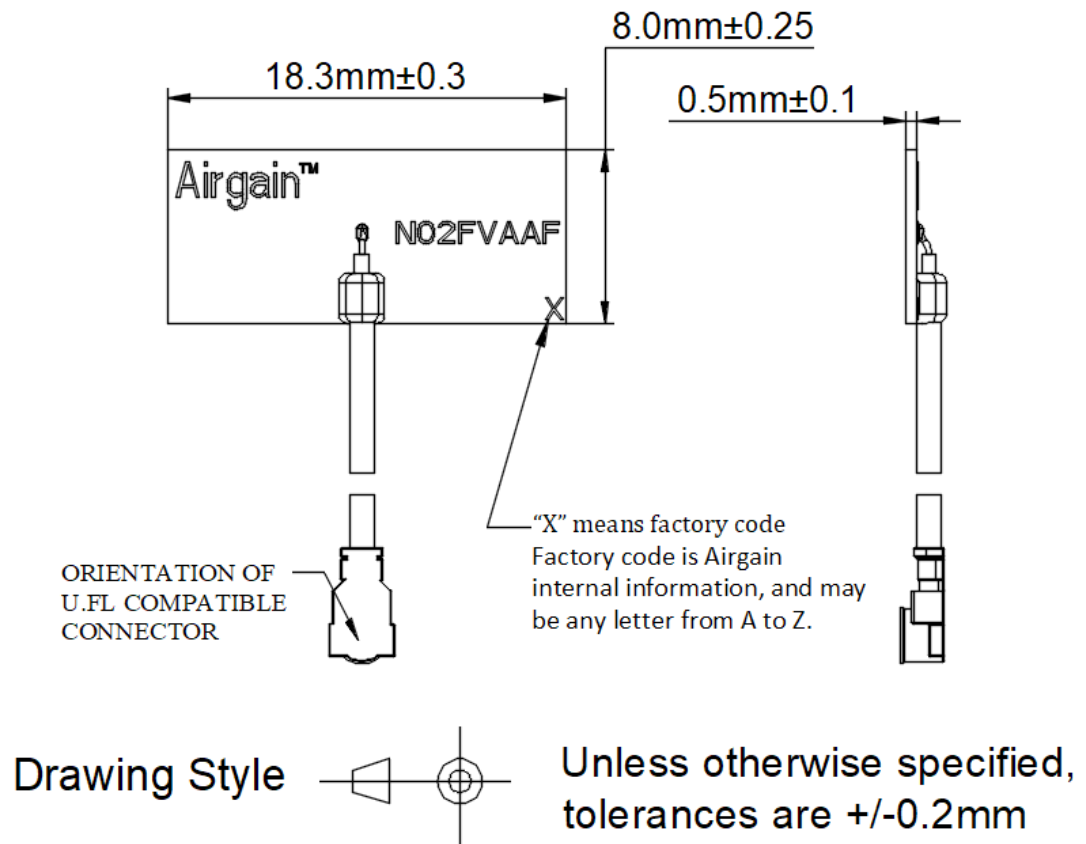


Figure 4: N02FVAAF Antenna dimensions

6. ROHS

Airgain N02FVAAF embedded antennas are RoHS compliant.

7. Feature and Options Information

Airgain N02FVAAF antennas are equipped with an RF cable I/O interface. Optional cable termination such as U.FL-compatible micro coax connectors and cable mounted EMI ferrite cores are available. To aid mounting the N02FVAAF, pre-applied, double-sided adhesive tape is available on the N02FVAAF -T Series.

7.1 Part Number Conventions

Airgain uses a three-staged standard number system for our part numbers, which serially define the antenna type, tape type, cable type/length, and connector type/interface, as described below:

Antenna #	Tape type -XX (if required)	Packaging type -xx	Cable Assembly Type -xxxxxx		
			Cable color -X	Cable length XXX	Connector type XX (if required)
N02FVAAF	Blank = No tape T = Tape on bottom of element T10 = 1mm thick PE Tape affixed to bottom surface of antenna	PK1= singulated (PK1 is mandatory)	G = Grey (Standard) R = Red (Non Standard) Y = Yellow (Non Standard) K = Orange(Non Standard) E = Green (Non Standard)	Cable length in millimeters (mm) Commonly used Lengths*: 65, 100, 130, 150, 190, 230, 250, 300,400, etc.	Blank = Stripped Cable U = U.FL connector C = U.FL connector plus Ferrite Core, core size: 3.5mm * 9.0mm * 1.5mm CS = stripped cable plus Ferrite Core, core size: 3.5mm * 9.0mm * 1.5mm

* Standard cable lengths listed in RF Cable Datasheet

7.2 Part Number Example

N02FVAAF-T-PK1-G100U – N02FVAAF antenna with 1.6-mm double-sided adhesive tape, 100-mm cable, and U.FL-compatible connector.

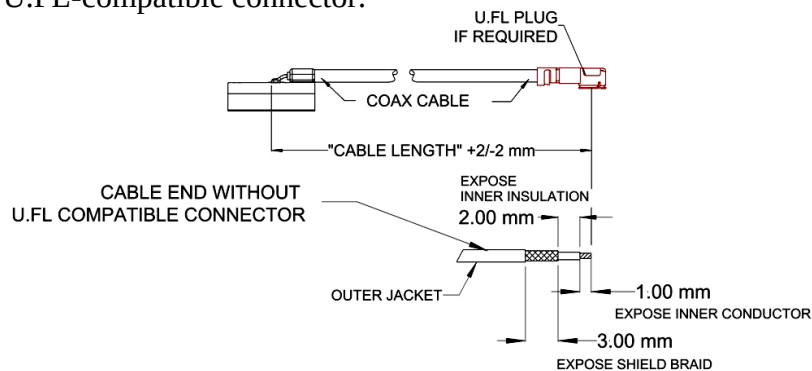


Figure 5:N02FVAAF with connector or stripped cable

8. Cable Data Sheet

Item	Specification	
Cable type	OD1.13	
Impedance	50 ± 3 ohms	
Inner conductor	Material	Tin-coated copper
	Conductor numbers	7
	Conductor size	0.08 mm
	Outer diameter	0.24 ± 0.02 mm
Dielectric layer	Material	FEP
	Color	Clear
	Average thickness	0.22 mm
	Diameter	0.7 ± 0.03 mm
Braid (shielding)	Material	Tin-coated copper
	Conductor size :total / O.D. of every wire(mm)	16*4/0.05 mm
	Coverage	90%± 5%
	Diameter	0.92 ± 0.05 mm
Outer cover	Material	FEP
	Color	Black / white / grey
	Average thickness	0.10 mm
	Diameter	1.13 ± 0.05 mm
VSWR testing	< 1.3@0~6GHz	
Attenuation (dB/1meter)	1GHz	≤2.2
	2GHz	≤3.1
	3GHz	≤3.8
	4GHz	≤4.4
	5GHz	≤4.9
	6GHz	≤5.4
Operating temperature	-55℃~+150℃	

