

Applicant: DMR Technologies

Product: Agricultural unmarmed drone

Model No.: Field Ranger X50, Field Ranger

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Total S

Terry Tang

Manager

Dated: February 20, 2025


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2501162-02E Page 2 of 39

Date: 2025-02-20



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Page 3 of 39

Report No.: TW2501162-02E

Date: 2025-02-20



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	11
5.1	Test Method and Test Procedure.	11
5.2	Configuration of the EUT	12
5.3	EUT Operation Condition.	12
5.4	Radiated Emission Limit.	12
7.0	6dB Bandwidth Measurement	18
8.0	Maximum Output Power	22
9.0	Power Spectral Density Measurement.	24
10.0	Out of Band Measurement.	28
11.0	Antenna Requirement.	37
12.0	FCC ID Label.	38
13.0	Photo of Test Setup and EUT View	39

Date: 2025-02-20



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: DMR Technologies

Address: 2050 15th St., Detroit, MI 48216

1.3 Description of EUT

Product: Agricultural unmarmed drone

Manufacturer: DMR Technologies

Address: 2050 15th St., Detroit, MI 48216

Trademark: N/A

Model Number: Field Ranger X50 Additional Model Number: Field Ranger

Hardware Version: 2.0

Software Version: V6.7.2.0

Serial No.: 2025X50A0001

Battery: DC76.5V, 30000mAh Li-ion battery

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

Frequency range IEEE 802.11b: 2412-2462MHz;

Channel Spacing 5MHz for IEEE 802.11b

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

Frequency Selection By software

Channel Number IEEE 802.11b: 11 Channels;

Antenna: FPC Antenna used. The gain of the antennas is 4.76dBi maximum. (Get from the

antenna specification provided the applicant)

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2501162-02E Page 5 of 39

Date: 2025-02-20



1.5 Test Duration

2025-01-21 to 2025-02-20

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 39

Report No.: TW2501162-02E

Date: 2025-02-20



2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11		
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11		
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11		
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17		
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11		
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17		
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17		
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11		
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17		
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25		
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11		
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11		
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11		
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11		
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	1	2024-07-12	2025-07-11		
RF Cable	Zhengdi	7m	1	2024-07-12	2025-07-11		
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11		
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11		
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11		
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11		
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11		

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2025-02-20



Page 7 of 39

3. DESCRIPTION OF TEST MODES

IEEE 802.11b mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

Note: 1. IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing.

2. EUT ONLY supports IEEE 802.11b mode

3. During the test, the duty cycle was set up to >98%

Page 8 of 39

Report No.: TW2501162-02E

Date: 2025-02-20



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph15.207	Conducted Emission Test	N/A	N/A
	Spectrum bandwidth of a	Pass	Complies
FCC Part 15 Subpart C	Orthogonal Frequency		
Paragraph 15.247(a)(2) Limit	Division Multiplex System		
r aragraph 13.247(a)(2) Limit	Limit: 6dB		
	bandwidth>500kHz		
ECC Part 15 Paragraph	Maximum peak output	Pass	
FCC Part 15, Paragraph 15.247(b)	power		Complies
13.247(0)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	Pass	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	Power Spectral Density	Pass	Complies
15.247(e)	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	Pass	Complies
15.247(d)	Restricted Band		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	Table 15.209		

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Date: 2025-02-20



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

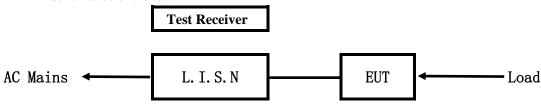


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

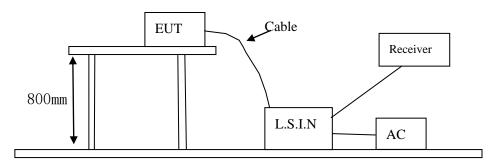

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID	
Agricultural	DMR Technologies	Field Ranger X50, Field Ranger	2BM3J-X50	
unmarmed drone	DIVIK Technologies	Field Kaliger A30, Field Kaliger	2DM3J-A30	

B. Internal Device

Dev	ice	Manufacturer	Model	FCC ID/DOC
N/A				

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2501162-02E Page 10 of 39

Date: 2025-02-20



Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (d	lB μ V)		
(MHz)	Q asi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46 0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results N/A

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: EUT not directly or in-directly connected to the AC power source. so this test item not applicable.

Report No.: TW2501162-02E Page 11 of 39

Date: 2025-02-20




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup


For radiated emissions from 9kHz to 30MHz

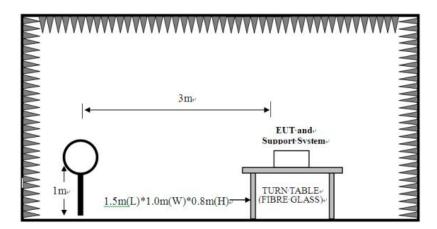


Date: 2025-02-20



For radiated emissions from 30MHz to1GHz

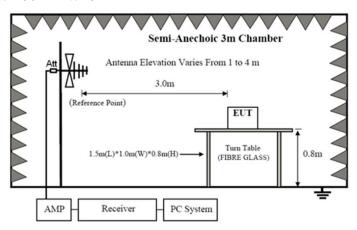

For radiated emissions above 1GHz

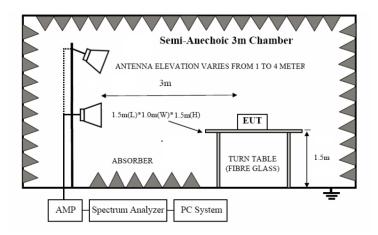

6.2 Configuration of The EUT Same as section 5.3 of this report

6.3 EUT Operating Condition Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2501162-02E Page 13 of 39

Date: 2025-02-20



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)				
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)				
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)				
1.705-30	3	69.5				
30-88	3	40.0				
88-216	3	43.5				
16-960	3	46.0				
Above 960	3	54.0				

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Note: Only the worst case was recorded in the test report.

Report No.: TW2501162-02E Page 14 of 39

Date: 2025-02-20




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

Keep Transmitting EUT set Condition:

Results: Pass

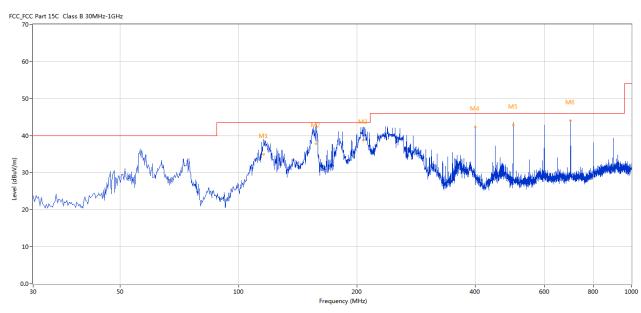

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1*	115.824	34.95	-7.62	43.5	8.55	QP	116.00	150	Horizontal	Pass
2*	157.523	37.85	-10.42	43.5	5.65	QP	0.00	150	Horizontal	Pass
3*	207.466	38.72	-8.00	43.5	4.78	QP	80.00	150	Horizontal	Pass
4*	399.963	42.31	-2.94	46.0	3.69	QP	185.00	150	Horizontal	Pass
5*	499.848	42.85	-2.33	46.0	3.15	QP	78.00	150	Horizontal	Pass
6*	699.860	44.05	0.83	46.0	1.95	QP	94.00	150	Horizontal	Pass

Page 15 of 39

Report No.: TW2501162-02E

Date: 2025-02-20




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

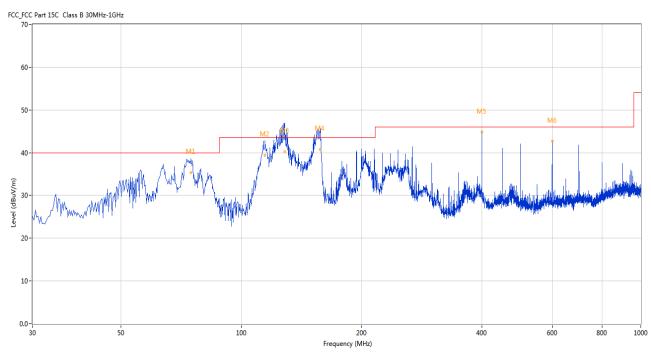

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1*	74.851	35.38	-9.43	40.0	4.62	QP	360.00	150	Vertical	Pass
2*	114.611	39.39	-7.34	43.5	4.11	QP	341.00	150	Vertical	Pass
3*	128.430	40.25	-9.15	43.5	3.25	QP	242.00	150	Vertical	Pass
4*	157.281	40.77	-10.41	43.5	2.73	QP	15.00	150	Vertical	Pass
5*	399.963	44.78	-2.94	46.0	1.22	QP	95.00	150	Vertical	Pass
6*	599.975	42.77	0.09	46.0	3.23	QP	65.00	150	Vertical	Pass

Report No.: TW2501162-02E Page 16 of 39

Date: 2025-02-20



Operation Mode: Transmitting under CH01 for 802.11b mode

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4824.00	63.6(PK) / 47.9 (AV)	Н	74(Peak)/ 54(AV)
4824.00	60.7 (PK) / 45.1 (AV)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472	-	H V	74(P ak)/ 54 AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Operation Mode: Transmitting under CH06 for 802.11b mode

Frequency (MHz)	Level@3m (dB \(\mu \)V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4874.00	60.4(PK)/ 44.9 (AV)	Н	74(Peak)/ 54(AV)
4874.00	56.1 (PK)/ 40.7 (AV)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	4(Peak) 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Report No.: TW2501162-02E Page 17 of 39

Date: 2025-02-20



Operation Mode: Transmitting under CH11 for 802.11b mode

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4924	62.7(PK) / 46.4 (AV)	Н	74(Peak)/ 54(AV)
4924	58.0 (PK) / 42.6 (AV)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24620		H/V	74(Peak)/ 54(AV)

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.

5. Note: the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result

Page 18 of 39


Report No.: TW2501162-02E

Date: 2025-02-20



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth $(VBW) \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Date: 2025-02-20




Page 19 of 39

6dB Occupied Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
		2412		9.067	0.5	Pass
NVNT	b	2437	Ant1	8.569	0.5	Pass
		2462		9.041	0.5	Pass

Date: 2025-02-20



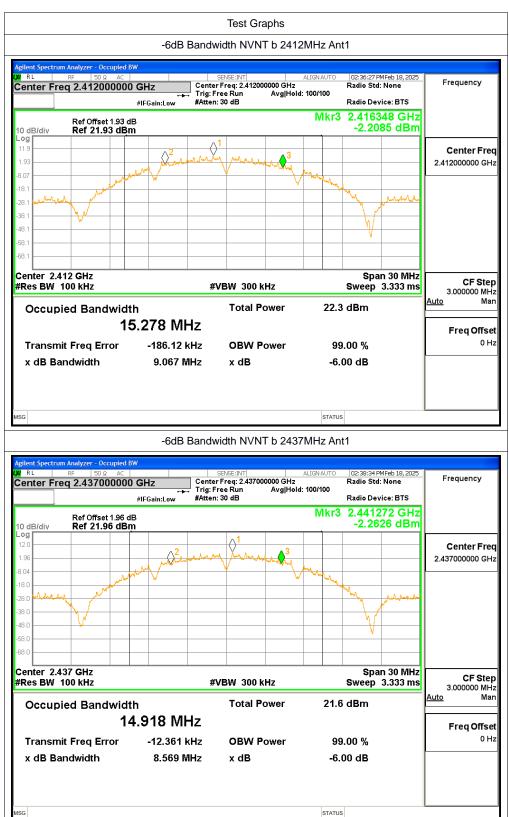

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2501162-02E Page 21 of 39

Date: 2025-02-20



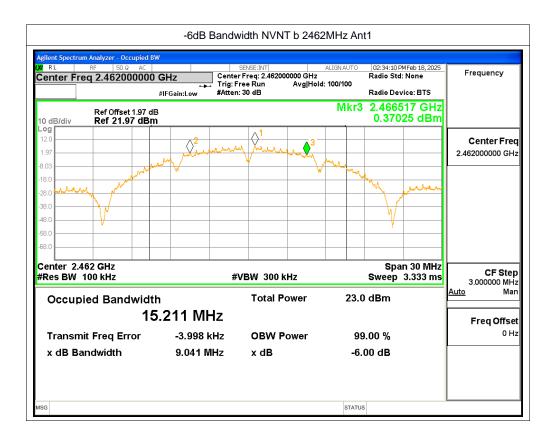


Date: 2025-02-20



Page 22 of 39

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Peak power was measured

Date: 2025-02-20



Page 23 of 39

8.4Test Results

Condition	Mode	Frequency	Antenna	Conducted Power	Duty Factor	Total Power	Limit	Verdict
		(MHz)		(dBm)	(dB)	(dBm)	(dBm)	
		2412		17.46	0	17.46	30	Pass
NVNT	b	2437	Ant1	15.57	0	15.57	30	Pass
		2462		16.54	0	16.54	30	Pass

Note: 1. The worst-cases were recorded

2. The result basic equation calculation as follow:

Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No.: TW2501162-02E Page 24 of 39

Date: 2025-02-20



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 3 kHz.
- 3. Set the VBW \geq 10 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Date: 2025-02-20




Page 25 of 39

9.4Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
		2412		-5.93	0	-5.93	8	Pass
NVNT	b	2437	Ant1	-7.39	0	-7.39	8	Pass
		2462		-6.13	0	-6.13	8	Pass

Date: 2025-02-20



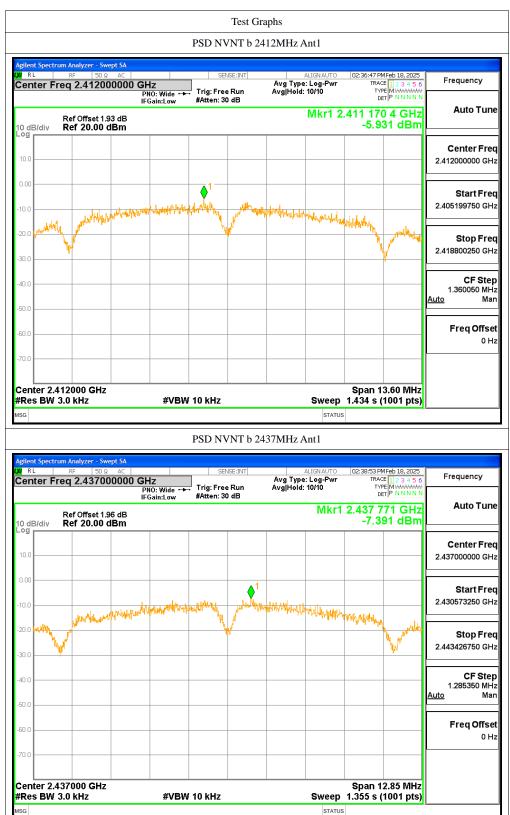

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly consend a SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 27 of 39

Report No.: TW2501162-02E

Date: 2025-02-20



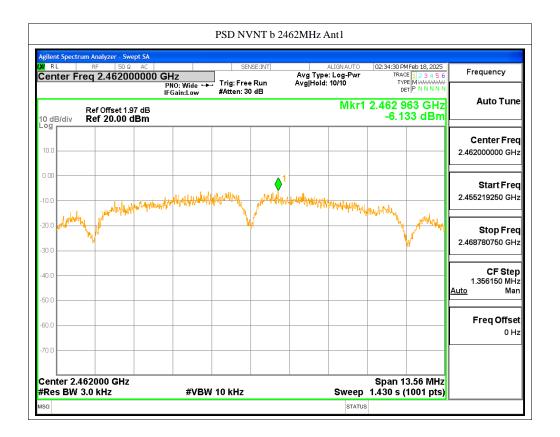


Report No.: TW2501162-02E Page 28 of 39

Date: 2025-02-20



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW≥1/T and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Date: 2025-02-20



Page 29 of 39

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	h	2412	A m t 1	-30.43	-20	Pass
INVINI	υ	2462	Ant1	-51.02	-20	Pass

Date: 2025-02-20





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2025-02-20





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into an will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2025-02-20




Page 32 of 39

Conducted RF Spurious Emission

Condition	Mode Frequency (MH		Antenna	Max Value (dBc)	Limit (dBc)	Verdict
		2412		-41.87	-20	Pass
NVNT	b	2437	Ant1	-40.75	-20	Pass
		2462		-42.64	-20	Pass

Date: 2025-02-20



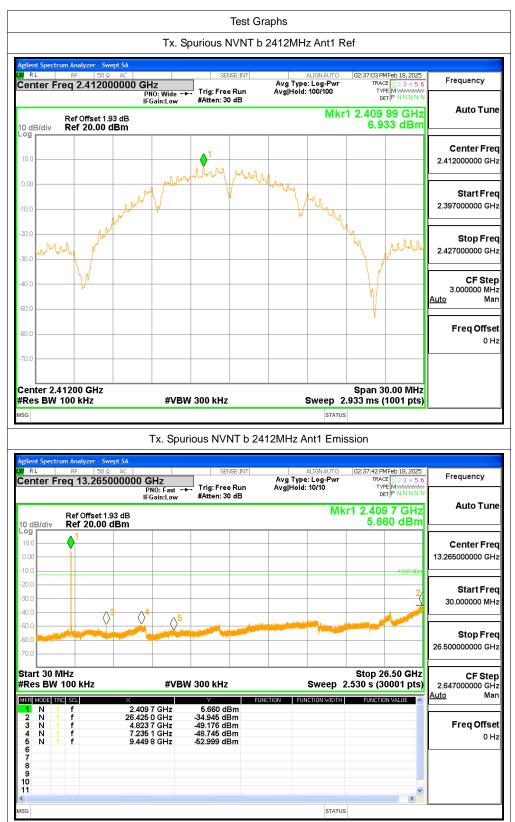

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Date: 2025-02-20





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into an will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

STATUS

Date: 2025-02-20





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into an will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2501162-02E Page 36 of 39

Date: 2025-02-20



10.5 Restricted band Measurement

EUT	Agricultural unmarmed drone			Mo	del	Field Ranger X50		
Mode	Kee	ping Transmitting		Test Voltage		DC76.5V		
Temperature		24 deg. C,		Humidity		56% RH		
Test Result:		Pass		Dete	ctor	PK		
		802.11b mode, Low C	hannel,	Horizonta	1			
2390	PK (dBµV/m)	44.25	T	imit		$74(dB\mu V/m)$		
	AV (dBμV/m)			411111t		$54(dB\mu V/m)$		
		802.11b mod	e, Vertic	cal				
2390	PK (dBμV/m)	42.74	T	::t	$74(dB\mu V/m)$			
	AV (dBμV/m)			imit		54(dBμV/m)		

10.5 Restricted band Measurement

EUT	Agricult	Agricultural unmarmed drone			del	Field Ranger X50	
Mode	Keej	ping Transmitting		Test Voltage		DC76.5V	
Temperature		24 deg. C,		Humidity		56% RH	
Test Result:		Pass			ctor	PK	
	802.11b mode, High Channel				al		
2483.5	PK (dBμV/m)	49.32	т	,		$74(dB\mu V/m)$	
	AV (dBμV/m)		L	Limit		$54(dB\mu V/m)$	
	802.11b mode, High Channel, Vertical						
2483.5	PK (dBμV/m)	47.14	т	,	74(dBμV/m)		
	AV (dBμV/m)		L	imit		$54(dB\mu V/m)$	

Date: 2025-02-20



Page 37 of 39

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

FPC antenna used. The gain of the antennas is 4.76dBi maximum. (Get from the antenna specification provided the applicant)

Date: 2025-02-20



Page 38 of 39

12.0 FCC ID Label


FCC ID: 2BM3J-X50

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

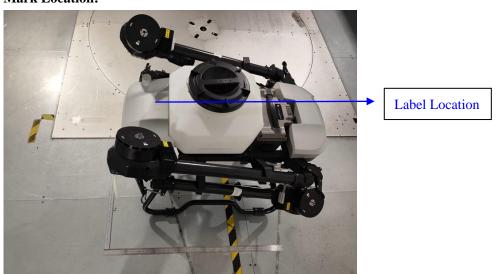

Date: 2025-02-20




13.0 **Photo of testing**

Conducted Emission Test Setup:

N/A

Radiated Emission Test Setup:

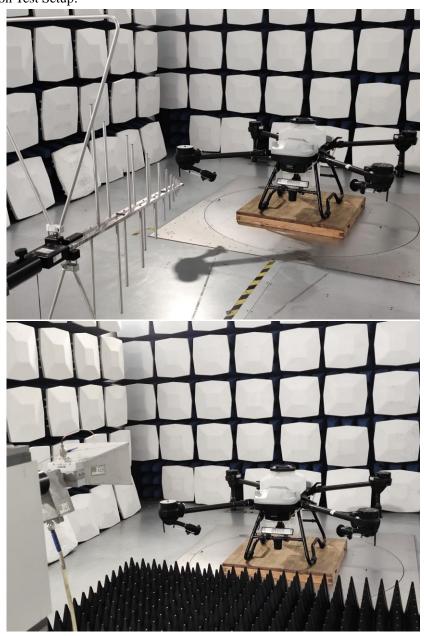

Photographs - EUT

Please refer test report TW2501162-01E

-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to