



CERTIFICATION TEST REPORT

Report Number. : 12132753-E1V2

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7- 04685Z

EUT Description : GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC

Test Standard(s) : FCC CFR47 PART 22H, 24E, and 27

Date Of Issue:
MAY 18, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	05/15/18	Initial Issue	--
V2	05/18/18	Updated Section 7.1.1 & 7.1.2	Kiya Kedida

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. MAXIMUM ANTENNA GAIN	14
5.4. WORST-CASE CONFIGURATION AND MODE	15
5.5. DESCRIPTION OF TEST SETUP	16
6. TEST AND MEASUREMENT EQUIPMENT	18
7. RF OUTPUT POWER VERIFICATION	19
7.1. GSM	20
7.1.1. GSM GSM850	21
7.1.2. GSM 1900MHz	21
7.2. WCDMA	22
7.2.1. WCDMA BAND5	25
7.2.2. WCDMA BAND2	26
7.2.3. WCDMA BAND4	27
7.3. LTE Band 4	28
7.4. LTE Band 5	31
7.5. LTE Band 7	33
7.6. LTE Band 13	35
7.7. LTE 17	36
7.8. LTE 41	37
8. CONDUCTED TEST RESULTS	39
8.1. OCCUPIED BANDWIDTH	39
8.1.1. GSM	42

8.1.2.	WCDMA	43
8.1.3.	LTE BAND 4.....	44
8.1.4.	LTE BAND 5.....	47
8.1.5.	LTE BAND 7.....	49
8.1.6.	LTE BAND 13.....	51
8.1.7.	LTE BAND 17.....	52
8.1.8.	LTE BAND 41.....	53
8.2.	BAND EDGE AND EMISSION MASK	55
8.2.1.	GSM 850MHz.....	57
8.2.2.	GSM 1900MHz.....	58
8.2.3.	WCDMA BAND 5	59
8.2.4.	WCDMA BAND 2	60
8.2.5.	WCDMA BAND 4	61
8.2.6.	LTE BAND 4 BANDEDGE	62
8.2.7.	LTE BAND 5 BANDEDGE	70
8.2.8.	LTE BAND 7 ADJACENT CHANNEL POWER.....	76
8.2.9.	LTE BAND 13 BANDEDGE	82
8.2.10.	LTE BAND 17 BANDEDGE	85
8.2.11.	LTE BAND 41 ADJACENT CHANNEL POWER	88
8.3.	OUT OF BAND EMISSIONS	94
8.3.1.	GSM850	95
8.3.2.	GSM1900	97
8.3.3.	WCDMA BAND5	99
8.3.4.	WCDMA BAND2	101
8.3.5.	WCDMA BAND4	103
8.3.6.	LTE BAND 4.....	105
8.3.7.	LTE BAND 5.....	111
8.3.8.	LTE BAND 7.....	115
8.3.9.	LTE BAND 13.....	119
8.3.10.	LTE BAND 17	121
8.3.11.	LTE BAND 41	123
8.4.	FREQUENCY STABILITY	127
8.4.1.	GSM 850	128
8.4.2.	GSM 1900	128
8.4.3.	WCDMA BAND 2	129

8.4.4.	WCDMA BAND 4	129
8.4.5.	WCDMA BAND 5	130
8.4.6.	LTE BAND 4.....	131
8.4.7.	LTE BAND 5.....	131
8.4.8.	LTE BAND 7.....	132
8.4.9.	LTE BAND 13.....	132
8.4.10.	LTE BAND 13	133
8.4.11.	LTE BAND 41	133
8.5.	PEAK TO AVERAGE RATIO	134
8.5.1.	GSM.....	135
8.5.2.	WCDMA	136
8.5.3.	LTE BAND 4.....	137
8.5.4.	LTE BAND 5.....	139
8.5.5.	LTE BAND 7.....	141
8.5.6.	LTE BAND 13.....	143
8.5.7.	LTE BAND 17.....	144
8.5.8.	LTE BAND 41.....	145
9.	RADIATED TEST RESULTS	147
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION	147
9.1.1.	GSM.....	148
9.1.2.	WCDMA	149
9.1.3.	LTE BAND 4.....	150
9.1.4.	LTE BAND 5.....	152
9.1.5.	LTE BAND 7.....	154
9.1.6.	LTE BAND 13.....	156
9.1.7.	LTE BAND 17.....	157
9.1.8.	LTE BAND 41.....	158
10.	SETUP PHOTOS.....	160

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SONY MOBILE COMMUNICATIONS, INC. 4-12-3 HIGASHI-SHINAGAWA, SHINAGAWA -KU, TOKYO, 140-0002, JAPAN
FCC ID	PY7- 04685Z
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC
Serial Number	CB512FP0ZL, CB512FP0DT, CB512FP18V, CB512FP1AR, CB512FP159
Date Tested	APRIL 13, 2018 to APRIL 26, 2018
Applicable Standards	FCC CFR47 PART 22H, 24E, and 27F/H/L/M
Test Results	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For
UL Verification Services Inc. By:



Dan Corona
Operations Leader
UL Verification Services Inc.

Reviewed By:



Kiya Kedida
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, FCC KDB 971168 D01 v03r01.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)
☐ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)
☒ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)
	☐ Chamber G (ISED:22541-4)
	☐ Chamber H (ISED:22541-5)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \\ &\text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

5.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17

KDB 971168 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

Where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	GPRS	32.80	-6.50	24.15	260.0	38.5	-14.3
	EGPRS	27.00	-6.50	18.35	68.4	38.5	-20.1

Part 24 1900MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	GPRS	28.40	-3.20	25.20	331.1	33.0	-7.8
	EGPRS	25.50	-3.20	22.30	169.8	33.0	-10.7

WCDMA MODE

Part 22 Band 5

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	REL 99	24.50	-6.50	15.85	38.5	38.5	-22.6
	HSDPA	23.50	-6.50	14.85	30.5	38.5	-23.6

Part 24 Band 2

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	REL 99	22.40	-3.20	19.20	83.2	33.0	-13.8
	HSDPA	21.40	-3.20	18.20	66.1	33.0	-14.8

Part 27 Band 4

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1710-1755	REL 99	24.30	-3.50	20.80	120.2	30.0	-9.2
	HSDPA	23.30	-3.50	19.80	95.5	30.0	-10.2

LTE BAND 4

Part 27						
EIRP Limit (dBm)		30.00				
Antenna Gain (dBi)		-3.50				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1710-1755	QPSK	23.8	20.3	107.2	-9.7
		16QAM	23.0	19.5	89.1	-10.5
		64QAM	22.1	18.6	72.8	-11.4
3.0		QPSK	23.5	20.0	100.5	-10.0
		16QAM	23.4	19.9	98.4	-10.1
		64QAM	22.3	18.8	75.2	-11.2
5.0		QPSK	23.6	20.1	101.2	-10.0
		16QAM	23.3	19.8	95.9	-10.2
		64QAM	22.4	18.9	77.8	-11.1
10.0		QPSK	23.5	20.0	99.8	-10.0
		16QAM	23.4	19.9	97.7	-10.1
		64QAM	22.2	18.7	74.6	-11.3
15.0		QPSK	23.6	20.1	101.2	-10.0
		16QAM	23.5	20.0	99.3	-10.0
		64QAM	22.4	18.9	77.3	-11.1
20.0		QPSK	23.5	20.0	98.9	-10.1
		16QAM	23.4	19.9	97.5	-10.1
		64QAM	22.7	19.2	82.8	-10.8

LTE BAND 5

Part 22						
ERP Limit (dBm)		38.45				
Antenna Gain (dBi)		-6.50				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	824-849	QPSK	24.5	15.82	38.2	-22.6
		16QAM	23.4	14.74	29.8	-23.7
		64QAM	22.1	13.47	22.2	-25.0
3.0		QPSK	24.6	15.92	39.1	-22.5
		16QAM	23.5	14.85	30.5	-23.6
		64QAM	22.3	13.63	23.1	-24.8
5.0		QPSK	24.6	15.95	39.4	-22.5
		16QAM	23.6	14.94	31.2	-23.5
		64QAM	22.3	13.64	23.1	-24.8
10.0		QPSK	24.5	15.85	38.5	-22.6
		16QAM	23.5	14.83	30.4	-23.6
		64QAM	22.3	13.61	23.0	-24.8

LTE BAND 7

Part 27						
EIRP Limit (dBm)			33.00			
Antenna Gain (dBi)			-4.50			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2500-2570	QPSK	22.8	18.3	67.1	-14.7
		16QAM	22.6	18.1	65.2	-14.9
		64QAM	22.2	17.7	59.2	-15.3
10.0		QPSK	22.8	18.3	67.0	-14.7
		16QAM	22.6	18.1	64.3	-14.9
		64QAM	22.4	17.9	61.0	-15.2
15.0		QPSK	22.9	18.4	68.7	-14.6
		16QAM	22.8	18.3	67.8	-14.7
		64QAM	22.6	18.1	64.9	-14.9
20.0		QPSK	22.7	18.2	66.5	-14.8
		16QAM	22.6	18.1	65.2	-14.9
		64QAM	22.5	18.0	63.5	-15.0

LTE BAND 13

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-6.10				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
5.0	777-787	QPSK	24.9	16.60	45.7	-18.2
		16QAM	23.5	15.26	33.6	-19.5
		64QAM	22.2	13.92	24.7	-20.9
10.0		QPSK	24.8	16.55	45.2	-18.2
		16QAM	23.4	15.15	32.7	-19.6
		64QAM	22.5	14.25	26.6	-20.5

LTE BAND 17

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-6.90				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
5.0	704-716	QPSK	24.6	15.53	35.7	-19.2
		16QAM	23.3	14.20	26.3	-20.6
		64QAM	22.3	13.20	20.9	-21.6
10.0		QPSK	24.6	15.52	35.6	-19.3
		16QAM	23.5	14.40	27.5	-20.4
		64QAM	22.2	13.12	20.5	-21.7

LTE BAND 41

Part 27						
EIRP Limit (dBm)		33.00				
Antenna Gain (dBi)		-4.40				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2496-2690	QPSK	22.6	18.2	65.9	-14.8
		16QAM	22.5	18.1	64.4	-14.9
		64QAM	22.5	18.1	63.8	-15.0
10.0		QPSK	22.7	18.3	67.3	-14.7
		16QAM	22.3	17.9	62.1	-15.1
		64QAM	22.2	17.8	60.0	-15.2
15.0		QPSK	22.7	18.3	68.1	-14.7
		16QAM	22.3	17.9	62.1	-15.1
		64QAM	22.0	17.6	58.1	-15.4
20.0		QPSK	22.8	18.4	69.5	-14.6
		16QAM	22.5	18.1	64.0	-14.9
		64QAM	22.4	18.0	63.1	-15.0

5.3. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	-6.5
GSM1900, 1850-1910MHz	-3.2
WCDMA Band 2, 1850-1910 MHz	-3.2
WCDMA Band 4, 1710-1755 MHz	-3.5
WCDMA Band 5, 824-849 MHz	-6.5
LTE BAND 4, 1710 - 1755 MHz	-3.5
LTE BAND 5, 824 - 849 MHz	-6.5
LTE BAND 7, 2500 - 2570 MHz	-4.5
LTE BAND 13, 777 - 787 MHz	-6.1
LTE BAND 17, 704 - 716 MHz	-6.9
LTE BAND 41, 2496 - 2690 MHz	-4.4

5.4. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of:
Band 4, Band 5, Band 7, Band 13, Band 17, and Band 41.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. It was found that QPSK, and 16QAM results were worst case. All testing was performed using QPSK, and 16QAM modulations to represent the worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that X-Axis with AC/DC Adapter and headset was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X-Axis with AC/DC Adapter and headset orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC adapter	SONY	UCH12	VB17W46601037
Audio & Charging Cable	SONY	1312-8675.1B	YYWWSSPCXXXXXC
DC Power Supply	Ametek	XT 15-4	T463
Earphone	SONY	MH410c	N/A


I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	USB/Headphone Jack	1	USB Type-C/Audio	Un-shielded	.2m	Audio & Charging Cable
4	RF In/out	1	Communication Test Set	Un-shielded	2m	No

CONDUCTED SETUP

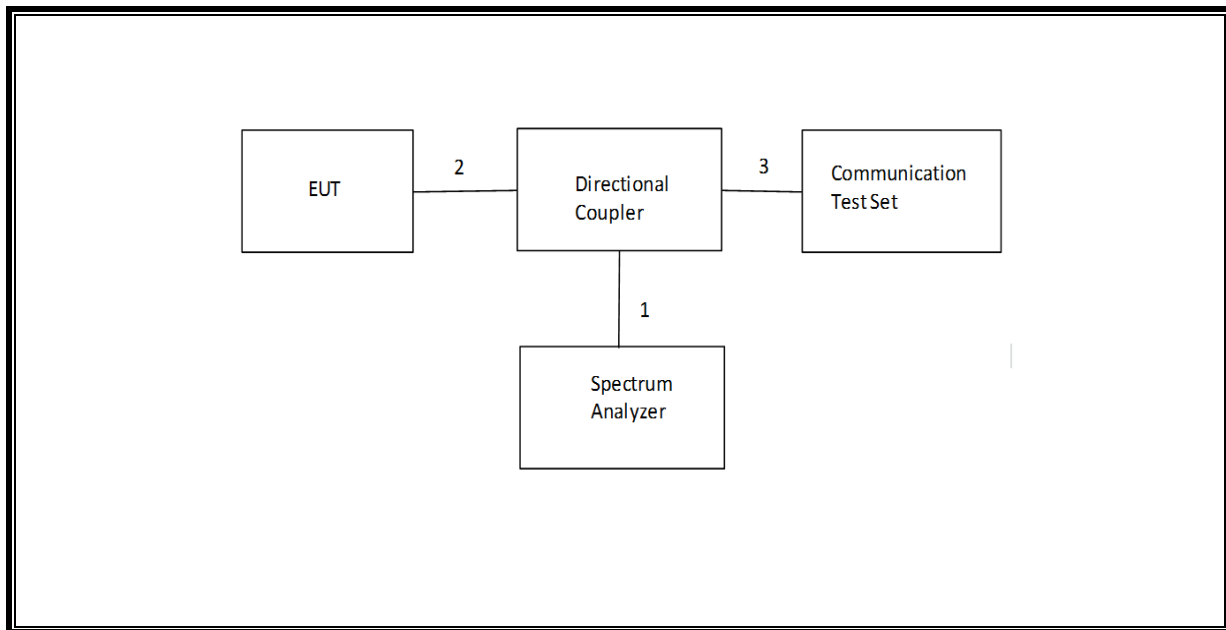

RADIATED SETUP

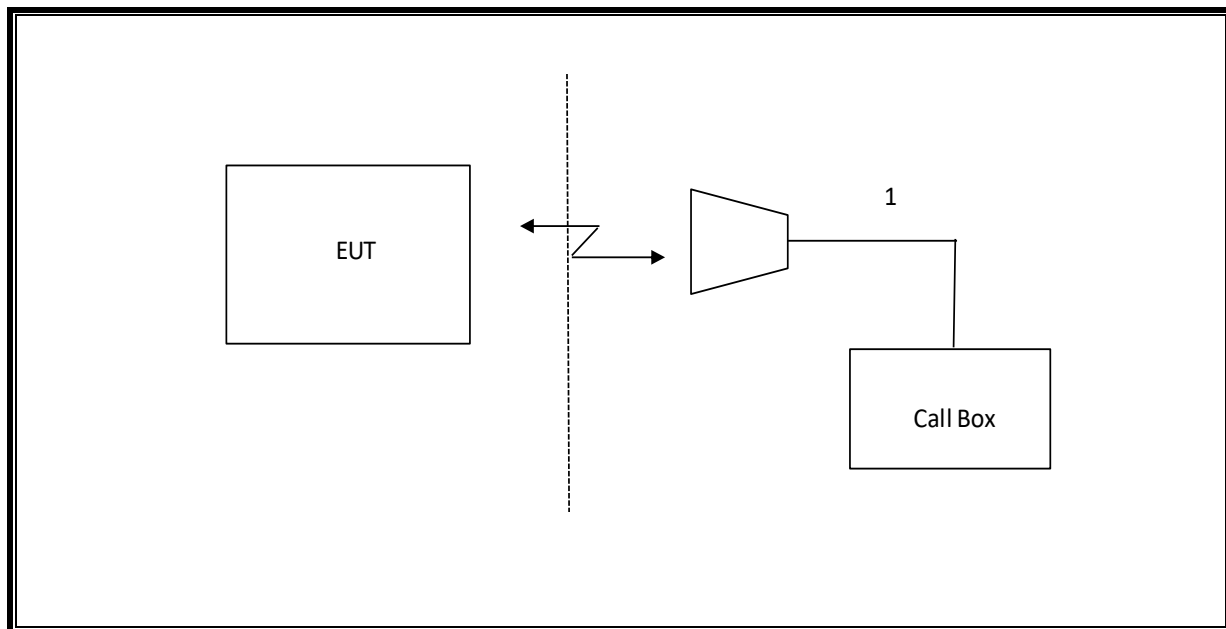

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/18	07/05/17
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	02/21/19	02/21/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	07/19/18	07/19/17
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T120	06/26/18	06/26/17
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T931	09/22/18	09/22/17
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	06/18/18	06/18/17
Wideband Communication Test Set, Call Box	R&S	CMW500	T954	02/21/19	02/21/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T1871	02/19/19	02/19/18
Chamber, Environmental	Thermotron	SE-600-10-10	T80	02/22/19	02/22/18
Spectrum Analyzer	Agilent (Keysight) Technologies	E4446A	T146	07/18/18	07/18/17
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1210	07/17/18	07/17/17
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR	CNR

UL AUTOMATION SOFTWARE			
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017

NOTES:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

7. RF OUTPUT POWER VERIFICATION

The below tables contain the highest of all configurations average conducted output powers as follows:

7.1. GSM

Using CMW500 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0> 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 4 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press Signal On to turn on the signal and change settings

RESULT

7.1.1. GSM GSM850

ID:	43576	Date:	4/19/18
------------	-------	--------------	---------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slot	4 slots
850.0	128	824.2	32.80	30.80	28.70	27.80
	190	836.6	32.80	30.80	28.60	27.80
	251	848.8	32.80	30.80	28.80	27.70

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slot	4 slots
850.0	128	824.2	27.00	25.80	23.70	22.50
	190	836.6	27.00	25.80	23.70	22.40
	251	848.8	27.00	25.70	23.60	22.40

7.1.2. GSM 1900MHz

ID:	43576	Date:	4/19/18
------------	-------	--------------	---------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slots	4 slots
1900.0	512	1850.2	28.00	26.00	23.90	22.90
	661	1880.0	28.40	26.30	24.30	23.10
	810	1909.8	28.20	26.20	24.10	22.90

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)			
			1 slot	2 slots	3 slots	4 slots
1900.0	512	1850.2	25.10	24.30	22.10	21.10
	661	1880.0	25.50	24.70	22.50	21.40
	810	1909.8	25.40	24.60	22.50	21.30

7.2. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA REL 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D _{ACK}	8			
	D _{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	A _{hs} = β_{hs}/β_c	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C, 11.1.3 of 3GPP TS34.121-1v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

HSPA+ REL 7

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

RESULT

7.2.1. WCDMA BAND5

ID:	44379	Date:	4/18/18				
Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average Power (dBm)	
W-CDMA Band 5 (850MHz)	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.50	
			4183	836.6	N/A	24.40	
			4233	846.6	N/A	24.40	
	HSDPA	Subtest 1	4132	826.4	0	23.00	
			4183	836.6	0	22.90	
			4233	846.6	0	22.90	
		Subtest 2	4132	826.4	0	22.60	
			4183	836.6	0	22.50	
			4233	846.6	0	22.40	
		Subtest 3	4132	826.4	0.5	23.00	
			4183	836.6	0.5	23.00	
			4233	846.6	0.5	22.90	
		Subtest 4	4132	826.4	0.5	23.00	
			4183	836.6	0.5	22.90	
			4233	846.6	0.5	22.90	
		HSPA (HSDPA & HSUPA)	Subtest 1	4132	826.4	0	23.50
				4183	836.6	0	23.40
				4233	846.6	0	23.30
	Subtest 2		4132	826.4	2	21.50	
			4183	836.6	2	21.40	
			4233	846.6	2	21.40	
	Subtest 3		4132	826.4	1	22.50	
			4183	836.6	1	22.40	
			4233	846.6	1	22.40	
	Subtest 4		4132	826.4	2	21.50	
			4183	836.6	2	21.40	
			4233	846.6	2	21.30	
	Subtest 5		4132	826.4	0	23.50	
			4183	836.6	0	23.50	
			4233	846.6	0	23.40	

7.2.2. WCDMA BAND2

ID:	43576	Date:	4/18/18
------------	-------	--------------	---------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 2 (1900MHz)	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.10
			9400	1880.0	N/A	22.30
			9538	1907.6	N/A	22.40
	HSDPA	Subtest 1	9262	1852.4	0	21.00
			9400	1880.0	0	21.30
			9538	1907.6	0	21.30
		Subtest 2	9262	1852.4	0	21.00
			9400	1880.0	0	20.70
			9538	1907.6	0	20.80
		Subtest 3	9262	1852.4	0.5	19.70
			9400	1880.0	0.5	19.90
			9538	1907.6	0.5	19.80
		Subtest 4	9262	1852.4	0.5	19.70
			9400	1880.0	0.5	20.00
			9538	1907.6	0.5	20.30
	HSPA (HSDPA & HSUPA)	Subtest 1	9262	1852.4	0	21.10
			9400	1880.0	0	21.40
			9538	1907.6	0	21.40
		Subtest 2	9262	1852.4	2	19.10
			9400	1880.0	2	19.40
			9538	1907.6	2	19.40
		Subtest 3	9262	1852.4	1	20.10
			9400	1880.0	1	20.40
			9538	1907.6	1	20.40
		Subtest 4	9262	1852.4	2	19.10
			9400	1880.0	2	19.40
			9538	1907.6	2	19.40
		Subtest 5	9262	1852.4	0	21.10
			9400	1880.0	0	21.40
			9538	1907.6	0	21.40

7.2.3. WCDMA BAND4

ID:	44379	Date:	4/18/18
------------	-------	--------------	---------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 4 (1700MHz)	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	24.20
			1413	1732.6	N/A	24.30
			1513	1752.6	N/A	24.30
	HSDPA	Subtest 1	1312	1712.4	0	23.20
			1413	1732.6	0	23.20
			1513	1752.6	0	23.30
		Subtest 2	1312	1712.4	0	23.20
			1413	1732.6	0	23.30
			1513	1752.6	0	23.30
		Subtest 3	1312	1712.4	0.5	23.20
			1413	1732.6	0.5	23.30
			1513	1752.6	0.5	23.30
		Subtest 4	1312	1712.4	0.5	23.20
			1413	1732.6	0.5	23.30
			1513	1752.6	0.5	23.20
	HSPA (HSDPA & HSUPA)	Subtest 1	1312	1712.4	0	23.20
			1413	1732.6	0	23.30
			1513	1752.6	0	23.30
		Subtest 2	1312	1712.4	2	21.20
			1413	1732.6	2	21.30
			1513	1752.6	2	21.30
		Subtest 3	1312	1712.4	1	22.20
			1413	1732.6	1	22.30
			1513	1752.6	1	22.30
		Subtest 4	1312	1712.4	2	21.20
			1413	1732.6	2	21.30
			1513	1752.6	2	21.20
		Subtest 5	1312	1712.4	0	23.20
			1413	1732.6	0	23.30
			1513	1752.6	0	23.30

7.3. LTE Band 4

ID:	39315	Date:	4/19/18
-----	-------	-------	---------

OUTPUT POWER FOR LTE BAND 4 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				19957	20175	20393
				1710.7 MHz	1732.5 MHz	1754.3 MHz
1.4	QPSK	1	0	23.36	22.96	23.23
		1	2	23.38	23.06	23.27
		1	5	23.26	22.95	23.18
		3	0	23.30	23.01	23.18
		3	1	23.37	23.06	23.25
		3	2	23.36	23.07	23.26
		6	0	23.00	23.00	23.00
	16QAM	1	0	22.94	23.00	22.87
		1	2	22.96	23.00	22.94
		1	5	22.91	23.00	22.88
		3	0	22.98	22.88	22.86
		3	1	22.95	22.93	22.93
		3	2	22.97	22.94	22.93
		6	0	22.00	21.58	21.93
	64QAM	1	0	22.05	21.56	21.98
		1	2	22.12	21.68	22.10
		1	5	22.08	21.53	21.97
		3	0	21.88	21.59	21.94
		3	1	21.96	21.69	22.03
		3	2	21.96	21.69	22.03
		6	0	21.00	20.80	20.62

OUTPUT POWER FOR LTE BAND 4 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				19965	20175	20385
				1711.5 MHz	1732.5 MHz	1753.5 MHz
3.0	QPSK	1	0	23.43	23.15	23.27
		1	7	23.52	23.21	23.30
		1	14	23.41	23.14	23.22
		8	0	23.42	23.16	23.27
		8	4	23.45	23.20	23.31
		8	7	23.44	23.19	23.29
		15	0	23.41	23.18	23.29
	16QAM	1	0	23.38	22.66	22.91
		1	7	23.43	22.73	22.95
		1	14	23.34	22.62	22.84
		8	0	22.09	21.86	21.90
		8	4	22.14	21.88	21.95
		8	7	22.12	21.87	21.95
		15	0	22.07	21.81	21.86
	64QAM	1	0	22.23	21.75	22.03
		1	7	22.26	21.86	22.11
		1	14	22.17	21.76	21.99
		8	0	21.00	20.71	20.78
		8	4	21.04	20.76	20.85
		8	7	21.02	20.74	20.83
		15	0	21.08	20.74	20.77

OUTPUT POWER FOR LTE BAND 4 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				19975	20175	20375
				1712.5 MHz	1732.5 MHz	1752.5 MHz
5.0	QPSK	1	0	23.51	23.20	23.45
		1	12	23.44	23.14	23.35
		1	24	23.55	23.17	23.36
		12	0	23.46	23.22	23.35
		12	6	23.48	23.22	23.32
		12	11	23.46	23.22	23.30
	16QAM	25	0	23.46	23.25	23.34
		1	0	23.18	23.32	23.10
		1	12	23.08	23.25	23.01
		1	24	23.20	23.27	23.04
		12	0	22.12	21.93	22.02
		12	6	22.22	21.94	22.03
	64QAM	12	11	22.20	21.92	22.00
		25	0	22.11	21.87	21.96
		1	0	22.37	21.65	22.04
		1	12	22.33	21.61	21.98
		1	24	22.41	21.61	21.99
		12	0	21.04	20.77	20.89
		12	6	21.15	20.77	20.89
		12	11	21.13	20.75	20.86
		25	0	21.17	20.73	20.84

OUTPUT POWER FOR LTE BAND 4 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20000	20175	20350
				1715.0 MHz	1732.5 MHz	1750.0 MHz
10.0	QPSK	1	0	23.44	23.24	23.22
		1	24	23.49	23.12	23.09
		1	49	23.49	23.14	23.18
		25	0	23.45	23.25	23.24
		25	12	23.47	23.22	23.25
		25	24	23.48	23.21	23.21
		50	0	23.47	23.23	23.22
	16QAM	1	0	23.36	22.78	22.89
		1	24	23.31	22.66	22.76
		1	49	23.40	22.65	22.82
		25	0	22.13	21.89	21.95
		25	12	22.11	21.88	21.95
		25	24	22.19	21.79	21.91
		50	0	22.10	21.83	21.88
	64QAM	1	0	22.10	22.07	21.93
		1	24	22.11	21.97	21.82
		1	49	22.23	21.96	21.87
		25	0	21.18	20.84	20.88
		25	12	21.17	20.84	20.85
		25	24	21.23	20.78	20.78
		50	0	21.14	20.78	20.73

OUTPUT POWER FOR LTE BAND 4 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20025	20175	20325
				1717.5 MHz	1732.5 MHz	1747.5 MHz
15.0	QPSK	1	0	23.55	23.23	23.31
		1	37	23.44	23.15	23.23
		1	74	23.53	23.16	23.30
		36	0	23.55	23.28	23.21
		36	16	23.50	23.20	23.25
		36	35	23.52	23.20	23.21
		75	0	23.38	23.22	23.25
	16QAM	1	0	23.47	22.75	23.29
		1	37	23.37	22.66	23.17
		1	74	23.45	22.69	23.28
		36	0	22.21	21.89	21.78
		36	16	22.26	21.81	21.84
		36	35	22.19	21.80	21.80
		75	0	22.24	21.84	21.86
	64QAM	1	0	22.20	22.08	22.35
		1	37	22.11	22.00	22.29
		1	74	22.21	21.98	22.38
		36	0	21.19	20.83	20.71
		36	16	21.25	20.81	20.79
		36	35	21.21	20.76	20.73
		75	0	21.22	20.78	20.81

OUTPUT POWER FOR LTE BAND 4 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20050	20175	20300
				1720.0 MHz	1732.5 MHz	1745.0 MHz
20.0	QPSK	1	0	23.44	23.27	23.28
		1	49	23.45	23.14	23.17
		1	99	23.45	23.15	23.26
		50	0	23.43	23.33	23.30
		50	24	23.41	23.25	23.21
		50	49	23.42	23.26	23.27
		100	0	23.40	23.26	23.20
	16QAM	1	0	23.34	23.35	23.29
		1	49	23.39	23.27	23.14
		1	99	23.30	23.26	23.24
		50	0	22.10	21.99	21.86
		50	24	22.13	21.87	21.80
		50	49	22.19	21.83	21.84
		100	0	22.11	21.89	21.81
	64QAM	1	0	22.59	22.11	22.03
		1	49	22.60	21.99	21.92
		1	99	22.68	21.98	22.00
		50	0	21.08	20.93	20.81
		50	24	21.12	20.87	20.75
		50	49	21.19	20.82	20.80
		100	0	21.06	20.83	20.75

7.4. LTE Band 5

ID:	39315	Date:	4/19/18
-----	-------	-------	---------

OUTPUT POWER FOR LTE BAND 5 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20407	20525	20643
				824.7 MHz	836.5 MHz	848.3 MHz
1.4	QPSK	1	0	24.40	24.46	24.27
		1	2	24.44	24.47	24.23
		1	5	24.39	24.40	24.09
		3	0	24.44	24.36	24.18
		3	1	24.20	24.44	24.24
		3	2	24.24	24.43	24.26
	16QAM	6	0	23.38	23.45	23.27
		1	0	23.33	23.07	22.78
		1	2	23.39	23.14	22.83
		1	5	23.32	23.08	22.76
		3	0	23.18	23.06	22.96
		3	1	23.26	23.11	23.04
		3	2	23.24	23.11	23.04
		6	0	21.95	22.13	22.01
	64QAM	1	0	22.02	21.94	22.02
		1	2	22.07	22.04	22.12
		1	5	22.03	21.89	21.97
		3	0	21.82	21.96	21.96
		3	1	21.88	22.05	22.03
		3	2	21.88	22.04	22.02
		6	0	20.95	21.15	20.69

OUTPUT POWER FOR LTE BAND 5 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20415	20525	20635
				825.5 MHz	836.5 MHz	847.5 MHz
3.0	QPSK	1	0	24.51	24.48	24.42
		1	7	24.57	24.50	24.33
		1	14	24.34	24.43	24.00
		8	0	23.49	23.51	23.31
		8	4	23.52	23.56	23.37
		8	7	23.51	23.50	23.38
		15	0	23.49	23.52	23.37
	16QAM	1	0	23.46	23.00	23.09
		1	7	23.50	23.04	22.95
		1	14	23.30	22.88	22.83
		8	0	22.14	22.18	21.93
		8	4	22.16	22.18	21.98
		8	7	22.15	22.18	21.98
	64QAM	15	0	22.14	22.12	21.88
		1	0	22.03	22.26	22.09
		1	7	22.12	22.28	22.02
		1	14	21.90	22.16	21.88
		8	0	20.98	20.99	20.75
		8	4	21.02	21.03	20.77
		8	7	21.00	21.01	20.77
		15	0	21.00	20.94	20.83

OUTPUT POWER FOR LTE BAND 5 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20425	20525	20625
				826.5 MHz	836.5 MHz	846.5 MHz
5.0	QPSK	1	0	24.60	24.56	24.48
		1	12	24.41	24.50	24.28
		1	24	24.40	24.50	24.17
		12	0	23.53	23.57	23.49
		12	6	23.51	23.57	23.40
		12	11	23.35	23.53	23.39
		25	0	23.52	23.57	23.39
	16QAM	1	0	23.28	23.27	23.59
		1	12	23.06	23.17	23.38
		1	24	23.07	23.13	23.35
		12	0	22.18	22.16	22.18
		12	6	22.17	22.18	22.07
		12	11	22.05	22.15	22.07
		25	0	22.12	22.07	22.01
	64QAM	1	0	22.29	21.91	22.20
		1	12	22.10	21.83	22.01
		1	24	22.07	21.81	21.96
		12	0	20.95	21.02	21.03
		12	6	20.95	21.03	20.91
		12	11	20.81	21.00	20.89
		25	0	20.94	20.96	20.84

OUTPUT POWER FOR LTE BAND 5 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20450	20525	20600
				829.0 MHz	836.5 MHz	844.0 MHz
10.0	QPSK	1	0	24.50	24.50	24.44
		1	24	24.37	24.45	24.40
		1	49	24.37	24.48	24.23
		25	0	23.55	23.60	23.49
		25	12	23.48	23.58	23.43
		25	24	23.50	23.50	23.34
		50	0	23.44	23.57	23.42
	16QAM	1	0	23.14	23.48	22.97
		1	24	23.01	23.40	22.97
		1	49	23.01	23.41	22.70
		25	0	22.15	22.22	22.04
		25	12	22.13	22.18	22.02
		25	24	22.17	22.09	21.96
		50	0	22.06	22.11	21.97
	64QAM	1	0	22.06	22.21	22.08
		1	24	22.01	22.22	22.09
		1	49	22.05	22.26	21.86
		25	0	21.02	21.07	21.00
		25	12	21.02	21.06	20.96
		25	24	21.05	20.97	20.91
		50	0	20.98	20.99	20.90

7.5. LTE Band 7

ID:	39315	Date:	4/20/18
-----	-------	-------	---------

OUTPUT POWER FOR LTE BAND 7 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20775	21100	21425
				2502.5 MHz	2535.0 MHz	2567.5 MHz
5.0	QPSK	1	0	22.77	22.54	22.70
		1	12	22.73	22.58	22.66
		1	24	22.71	22.52	22.61
		12	0	22.74	22.63	22.62
		12	6	22.74	22.64	22.65
		12	11	22.72	22.64	22.62
		25	0	22.73	22.65	22.61
	16QAM	1	0	22.45	22.64	22.37
		1	12	22.39	22.64	22.33
		1	24	22.38	22.64	22.32
		12	0	22.38	22.38	22.29
		12	6	22.38	22.37	22.28
		12	11	22.37	22.35	22.25
		25	0	22.29	22.28	22.21
	64QAM	1	0	22.13	22.11	22.03
		1	12	22.10	22.22	21.99
		1	24	22.12	22.17	22.02
		12	0	20.97	20.89	21.14
		12	6	20.98	20.91	21.15
		12	11	20.97	20.87	21.14
		25	0	20.93	20.90	21.07

OUTPUT POWER FOR LTE BAND 7 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20800	21100	21400
				2505.0 MHz	2535.0 MHz	2565.0 MHz
10.0	QPSK	1	0	22.76	22.66	22.54
		1	24	22.64	22.62	22.58
		1	49	22.59	22.59	22.55
		25	0	22.75	22.71	22.61
		25	12	22.74	22.66	22.58
		25	24	22.67	22.60	22.62
		50	0	22.72	22.63	22.54
	16QAM	1	0	22.41	22.58	22.12
		1	24	22.28	22.55	22.09
		1	49	22.16	22.49	22.06
		25	0	22.43	22.31	22.20
		25	12	22.42	22.28	22.16
		25	24	22.37	22.22	22.22
		50	0	22.35	22.21	22.13
	64QAM	1	0	22.11	21.92	22.27
		1	24	22.03	22.02	22.35
		1	49	22.01	22.03	22.31
		25	0	21.01	21.05	21.08
		25	12	20.99	21.03	21.07
		25	24	20.97	21.01	21.16
		50	0	20.91	21.00	21.03

OUTPUT POWER FOR LTE BAND 7 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20825	21100	21375
				2507.5 MHz	2535.0 MHz	2562.5 MHz
15.0	QPSK	1	0	22.87	22.69	22.56
		1	37	22.66	22.60	22.48
		1	74	22.63	22.52	22.46
		36	0	22.76	22.73	22.49
		36	16	22.70	22.65	22.56
		36	35	22.63	22.57	22.51
		75	0	22.66	22.66	22.56
	16QAM	1	0	22.81	22.61	22.10
		1	37	22.68	22.55	22.02
		1	74	22.44	22.46	22.03
		36	0	22.35	22.40	22.14
		36	16	22.27	22.31	22.18
		36	35	22.23	22.22	22.10
		75	0	22.28	22.29	22.19
	64QAM	1	0	22.10	22.18	22.51
		1	37	21.98	22.20	22.53
		1	74	21.91	22.18	22.62
		36	0	21.00	21.00	20.94
		36	16	21.01	21.00	21.05
		36	35	20.93	20.94	20.98
		75	0	20.94	20.98	21.06

OUTPUT POWER FOR LTE BAND 7 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20850	21100	21350
				2510.0 MHz	2535.0 MHz	2560.0 MHz
20.0	QPSK	1	0	22.70	22.73	22.72
		1	49	22.47	22.55	22.48
		1	99	22.36	22.46	22.49
		50	0	22.67	22.70	22.57
		50	24	22.61	22.69	22.54
		50	49	22.55	22.60	22.55
		100	0	22.56	22.64	22.49
	16QAM	1	0	22.62	22.63	22.63
		1	49	22.60	22.63	22.46
		1	99	22.49	22.64	22.46
		50	0	22.31	22.35	22.15
		50	24	22.29	22.29	22.10
		50	49	22.18	22.19	22.11
		100	0	22.19	22.31	22.07
	64QAM	1	0	22.00	22.48	22.39
		1	49	21.85	22.53	22.23
		1	99	21.82	22.51	22.32
		50	0	20.78	21.03	21.01
		50	24	20.71	21.03	20.96
		50	49	20.63	21.01	21.08
		100	0	20.70	20.97	20.94

7.6. LTE Band 13

ID:	39315	Date:	4/19/18
-----	-------	-------	---------

OUTPUT POWER FOR LTE BAND 13 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23207	23230	23255
				779.5 MHz	782.0 MHz	784.5 MHz
5.0	QPSK	1	0	24.7	24.72	24.6
		1	12	24.7	24.75	24.7
		1	24	24.8	24.85	24.8
		12	0	23.7	23.73	23.7
		12	6	23.7	23.83	23.7
		12	11	23.8	23.81	23.8
		25	0	23.9	23.85	23.8
	16QAM	1	0	23.4	23.41	23.4
		1	12	23.4	23.41	23.4
		1	24	23.5	23.51	23.5
		12	0	22.4	22.41	22.4
		12	6	22.5	22.52	22.5
		12	11	22.5	22.49	22.5
		25	0	22.5	22.46	22.4
	64QAM	1	0	22.0	22.07	22.0
		1	12	22.0	22.09	22.0
		1	24	22.1	22.17	22.0
		12	0	21.3	21.30	21.2
		12	6	21.3	21.36	21.3
		12	11	21.3	21.35	21.3
		25	0	21.3	21.30	21.3

OUTPUT POWER FOR LTE BAND 13 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23230	23230	23230
				782.0 MHz	782.0 MHz	782.0 MHz
10.0	QPSK	1	0		24.51	
		1	24		24.67	
		1	49		24.83	
		25	0		23.31	
		25	12		23.51	
		25	24		23.42	
		50	0		23.36	
	16QAM	1	0		23.08	
		1	24		23.30	
		1	49		23.41	
		25	0		22.39	
		25	12		22.59	
		25	24		22.53	
		50	0		22.39	
	64QAM	1	0		22.11	
		1	24		22.35	
		1	49		22.46	
		25	0		21.24	
		25	12		21.43	
		25	24		21.39	
		50	0		21.25	

7.7. LTE 17

ID:	39315	Date:	4/19/18
-----	-------	-------	---------

OUTPUT POWER FOR LTE BAND 17 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23755	23790	23825
				706.5 MHz	710.0 MHz	713.5 MHz
5.0	QPSK	1	0	24.4	24.49	24.4
		1	12	24.5	24.49	24.5
		1	24	24.5	24.58	24.5
		12	0	23.5	23.52	23.5
		12	6	23.5	23.50	23.5
		12	11	23.5	23.44	23.5
		25	0	23.5	23.48	23.5
	16QAM	1	0	23.2	23.12	23.1
		1	12	23.1	23.14	23.1
		1	24	23.2	23.25	23.2
		12	0	22.2	22.16	22.2
		12	6	22.1	22.16	22.1
		12	11	22.2	22.12	22.1
		25	0	22.0	22.09	22.1
	64QAM	1	0	22.1	22.08	22.1
		1	12	22.0	22.14	22.1
		1	24	22.0	22.25	22.2
		12	0	21.1	21.06	21.1
		12	6	21.1	21.03	21.0
		12	11	21.0	20.99	21.0
		25	0	21.0	20.96	21.0

OUTPUT POWER FOR LTE BAND 17 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23780	23790	23800
				709.0 MHz	710.0 MHz	711.0 MHz
10.0	QPSK	1	0	24.3	24.38	24.4
		1	24	24.4	24.42	24.4
		1	49	24.5	24.57	24.6
		25	0	23.5	23.51	23.5
		25	12	23.5	23.48	23.5
		25	24	23.5	23.44	23.4
		50	0	23.4	23.47	23.4
	16QAM	1	0	23.3	23.28	23.3
		1	24	23.3	23.35	23.3
		1	49	23.4	23.45	23.4
		25	0	22.1	22.13	22.2
		25	12	22.1	22.11	22.1
		25	24	22.0	22.02	22.0
		50	0	22.1	22.09	22.1
	64QAM	1	0	21.9	21.92	21.9
		1	24	22.0	22.04	22.0
		1	49	22.0	22.17	22.0
		25	0	21.0	21.05	21.1
		25	12	21.0	21.03	21.0
		25	24	21.0	21.00	21.0
		50	0	21.0	20.96	21.0

7.8. LTE 41

ID:	39315	Date:	4/21/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (FCC) (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39675	40620	41565
				2498.5 MHz	2593.0 MHz	2687.5 MHz
5.0	QPSK	1	0	22.51	22.59	22.56
		1	12	22.48	22.53	22.52
		1	24	22.46	22.52	22.46
		12	0	22.57	22.52	22.52
		12	6	22.56	22.51	22.52
		12	11	22.54	22.53	22.51
		25	0	22.53	22.58	22.51
	16QAM	1	0	22.18	22.49	22.11
		1	12	22.16	22.08	22.05
		1	24	22.16	22.04	21.99
		12	0	22.19	22.15	22.22
		12	6	22.20	22.14	22.22
		12	11	22.16	22.13	22.22
		25	0	22.14	22.21	22.17
	64QAM	1	0	21.44	22.45	22.08
		1	12	21.42	22.45	22.05
		1	24	21.42	22.45	22.00
		12	0	20.74	21.21	20.87
		12	6	20.74	21.21	20.90
		12	11	20.74	21.19	20.89
		25	0	20.77	21.08	20.87

OUTPUT POWER FOR LTE BAND 41 (FCC) (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39700	40620	41540
				2501.0 MHz	2593.0 MHz	2685.0 MHz
10.0	QPSK	1	0	22.49	22.62	22.68
		1	24	22.51	22.51	22.59
		1	49	22.47	22.45	22.56
		25	0	22.61	22.60	22.62
		25	12	22.60	22.62	22.68
		25	24	22.51	22.55	22.61
		50	0	22.59	22.57	22.54
	16QAM	1	0	22.06	22.17	22.33
		1	24	22.06	22.07	22.26
		1	49	21.98	22.03	22.24
		25	0	22.18	22.20	22.18
		25	12	22.16	22.20	22.24
		25	24	22.10	22.12	22.21
		50	0	22.19	22.17	22.17
	64QAM	1	0	21.94	22.18	21.51
		1	24	21.95	22.12	21.50
		1	49	21.94	22.10	21.47
		25	0	20.76	21.05	20.93
		25	12	20.76	21.08	21.01
		25	24	20.70	21.04	20.97
		50	0	20.74	21.10	20.89

OUTPUT POWER FOR LTE BAND 41 (FCC) (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39725	40620	41515
				2503.5 MHz	2593.0 MHz	2682.5 MHz
15.0	QPSK	1	0	22.56	22.64	22.73
		1	37	22.51	22.50	22.62
		1	74	22.42	22.51	22.49
		36	0	22.60	22.63	22.63
		36	16	22.55	22.58	22.68
		36	35	22.48	22.51	22.60
		75	0	22.53	22.56	22.55
	16QAM	1	0	22.13	22.25	22.33
		1	37	22.04	22.08	22.21
		1	74	21.98	22.11	22.07
		36	0	22.17	22.23	22.24
		36	16	22.13	22.18	22.26
		36	35	22.05	22.10	22.19
		75	0	22.14	22.19	22.17
	64QAM	1	0	21.96	22.04	21.58
		1	37	21.93	21.90	21.48
		1	74	21.90	21.93	21.42
		36	0	20.84	21.13	21.01
		36	16	20.82	21.09	21.06
		36	35	20.77	21.03	20.98
		75	0	20.75	21.12	20.92

OUTPUT POWER FOR LTE BAND 41 (FCC) (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39750	40620	41490
				2506.0 MHz	2593.0 MHz	2680.0 MHz
20.0	QPSK	1	0	22.66	22.79	22.82
		1	49	22.56	22.53	22.64
		1	99	22.49	22.57	22.48
		50	0	22.68	22.71	22.68
		50	24	22.61	22.62	22.58
		50	49	22.50	22.53	22.58
		100	0	22.57	22.63	22.59
	16QAM	1	0	22.09	22.33	22.46
		1	49	21.95	22.08	22.29
		1	99	21.86	22.10	22.13
		50	0	22.26	22.27	22.29
		50	24	22.19	22.20	22.19
		50	49	22.13	22.10	22.19
		100	0	22.17	22.19	22.16
	64QAM	1	0	21.68	22.24	22.40
		1	49	21.63	22.08	22.31
		1	99	21.62	22.12	22.19
		50	0	20.86	21.23	21.01
		50	24	20.82	21.18	20.91
		50	49	20.75	21.14	20.95
		100	0	20.78	21.17	20.92

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.

GSM

Band	Modulation	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
850MHz	GPRS	190	836.6	244.818	327.596
	EGPRS			246.940	305.410
1900MHz	GPRS	661	1880.0	244.605	309.623
	EGPRS			243.554	308.173

WCDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND 5	REL 99	4408	836.6	4.112	4.681
	HSDPA			4.098	4.647
BAND 2	REL 99	9800	1880.0	4.103	4.667
	HSDPA			4.137	4.708
BAND 4	REL 99	1638	1732.6	4.118	4.679
	HSDPA			4.132	4.655

LTE BAND 4

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 4	1.4 MHz, QPSK	6/0	1732.5	1.087	1.222
	1.4 MHz, 16QAM			1.093	1.239
	3 MHz, QPSK	15/0		2.684	2.966
	3 MHz, 16QAM			2.686	2.950
	5 MHz, QPSK	25/0		4.484	4.911
	5 MHz, 16QAM			4.492	4.959
	10 MHz, QPSK	50/0		8.957	9.836
	10 MHz, 16QAM			8.966	9.737
	15 MHz, QPSK	75/0		13.421	14.409
	15 MHz, 16QAM			13.417	14.381
	20 MHz, QPSK	100/0		17.887	19.147
	20 MHz, 16QAM			17.816	19.087
	20 MHz, 64QAM			17.909	19.264

LTE BAND 5

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 5	1.4 MHz, QPSK	6/0	836.5	1.087	1.229
	1.4 MHz, 16QAM			1.085	1.233
	3 MHz, QPSK	15/0		2.675	2.949
	3 MHz, 16QAM			2.685	2.959
	5 MHz, QPSK	25/0		4.498	4.920
	5 MHz, 16QAM			4.501	4.928
	10 MHz, QPSK	50/0		8.936	9.655
	10 MHz, 16QAM			8.922	9.615
	10 MHz, 64QAM			8.930	9.670

LTE BAND 7

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 7	5 MHz, QPSK	25/0	2535.0	4.912	4.922
	5 MHz, 16QAM			4.504	4.936
	10 MHz, QPSK	50/0		8.943	9.791
	10 MHz, 16QAM			8.908	9.761
	15 MHz, QPSK	75/0		13.421	14.501
	15 MHz, 16QAM			13.450	14.449
	20 MHz, QPSK	100/0		17.864	19.346
	20 MHz, 16QAM			17.875	19.317
	20 MHz, 64QAM			17.847	19.369

LTE BAND 13

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 13	5 MHz, QPSK	25/0	782.0	4.493	4.958
	5 MHz, 16QAM			4.501	4.955
	10 MHz, QPSK	50/0		8.944	9.845
	10 MHz, 16QAM			8.974	9.680
	10 MHz, 64QAM			8.938	9.728


LTE BAND 17

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 17	5 MHz, QPSK	25/0	710.0	4.489	4.883
	5 MHz, 16QAM			4.509	4.925
	10 MHz, QPSK	50/0		8.965	9.779
	10 MHz, 16QAM			8.965	9.712
	10 MHz, 64QAM			8.945	9.792


LTE BAND 41

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 41	5 MHz, QPSK	25/0	2593.0	4.504	5.075
	5 MHz, 16QAM			4.483	4.906
	10 MHz, QPSK	50/0		8.962	9.648
	10 MHz, 16QAM			8.946	9.690
	15 MHz, QPSK	75/0		13.392	14.368
	15 MHz, 16QAM			13.389	14.334
	20 MHz, QPSK	100/0		17.832	19.112
	20 MHz, 16QAM			17.815	19.164
	20 MHz, 64QAM			17.886	19.052


8.1.1. GSM

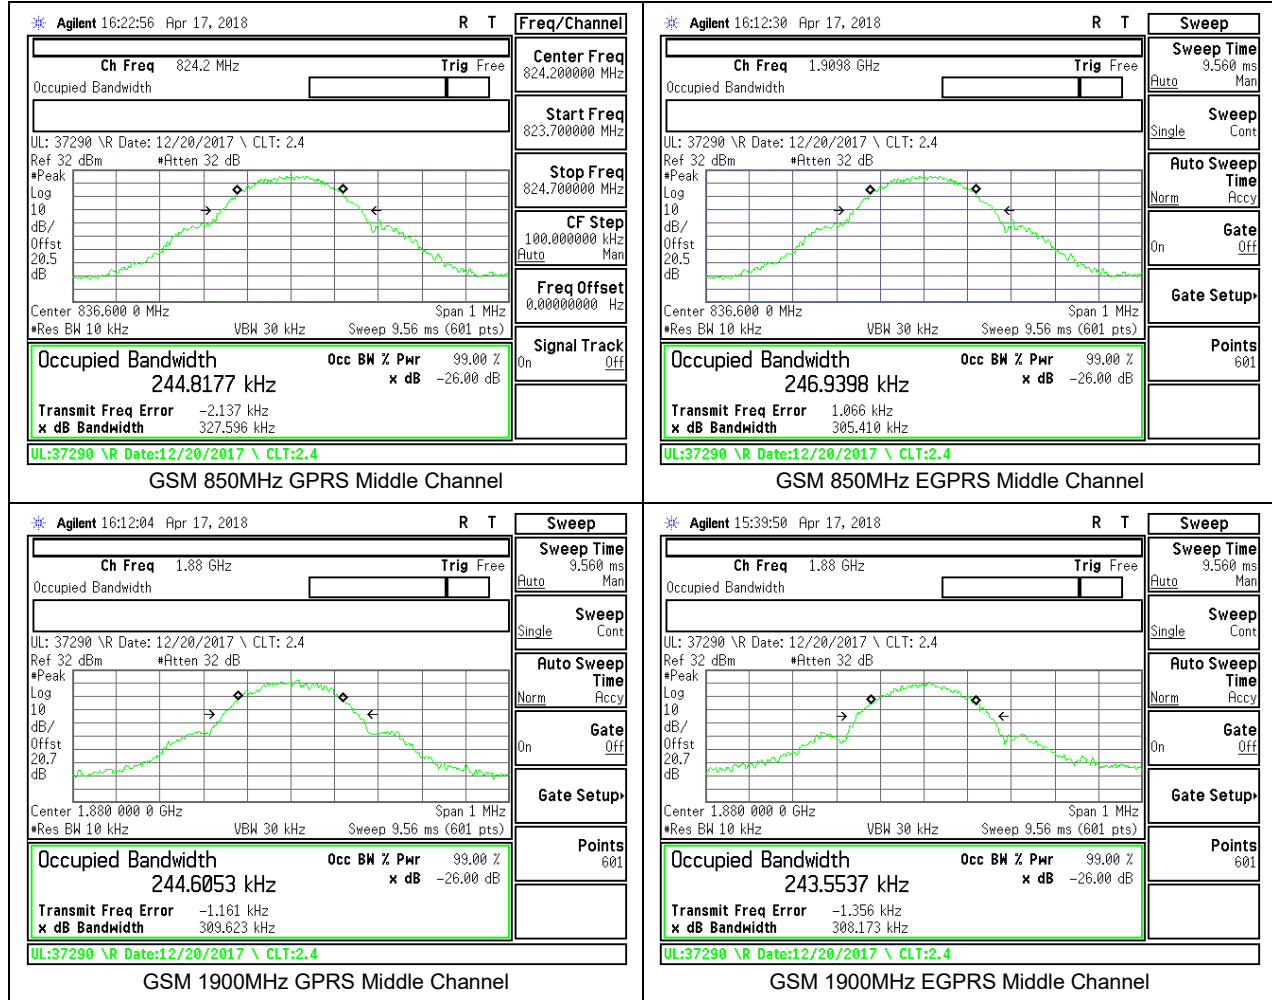



8.1.2. WCDMA

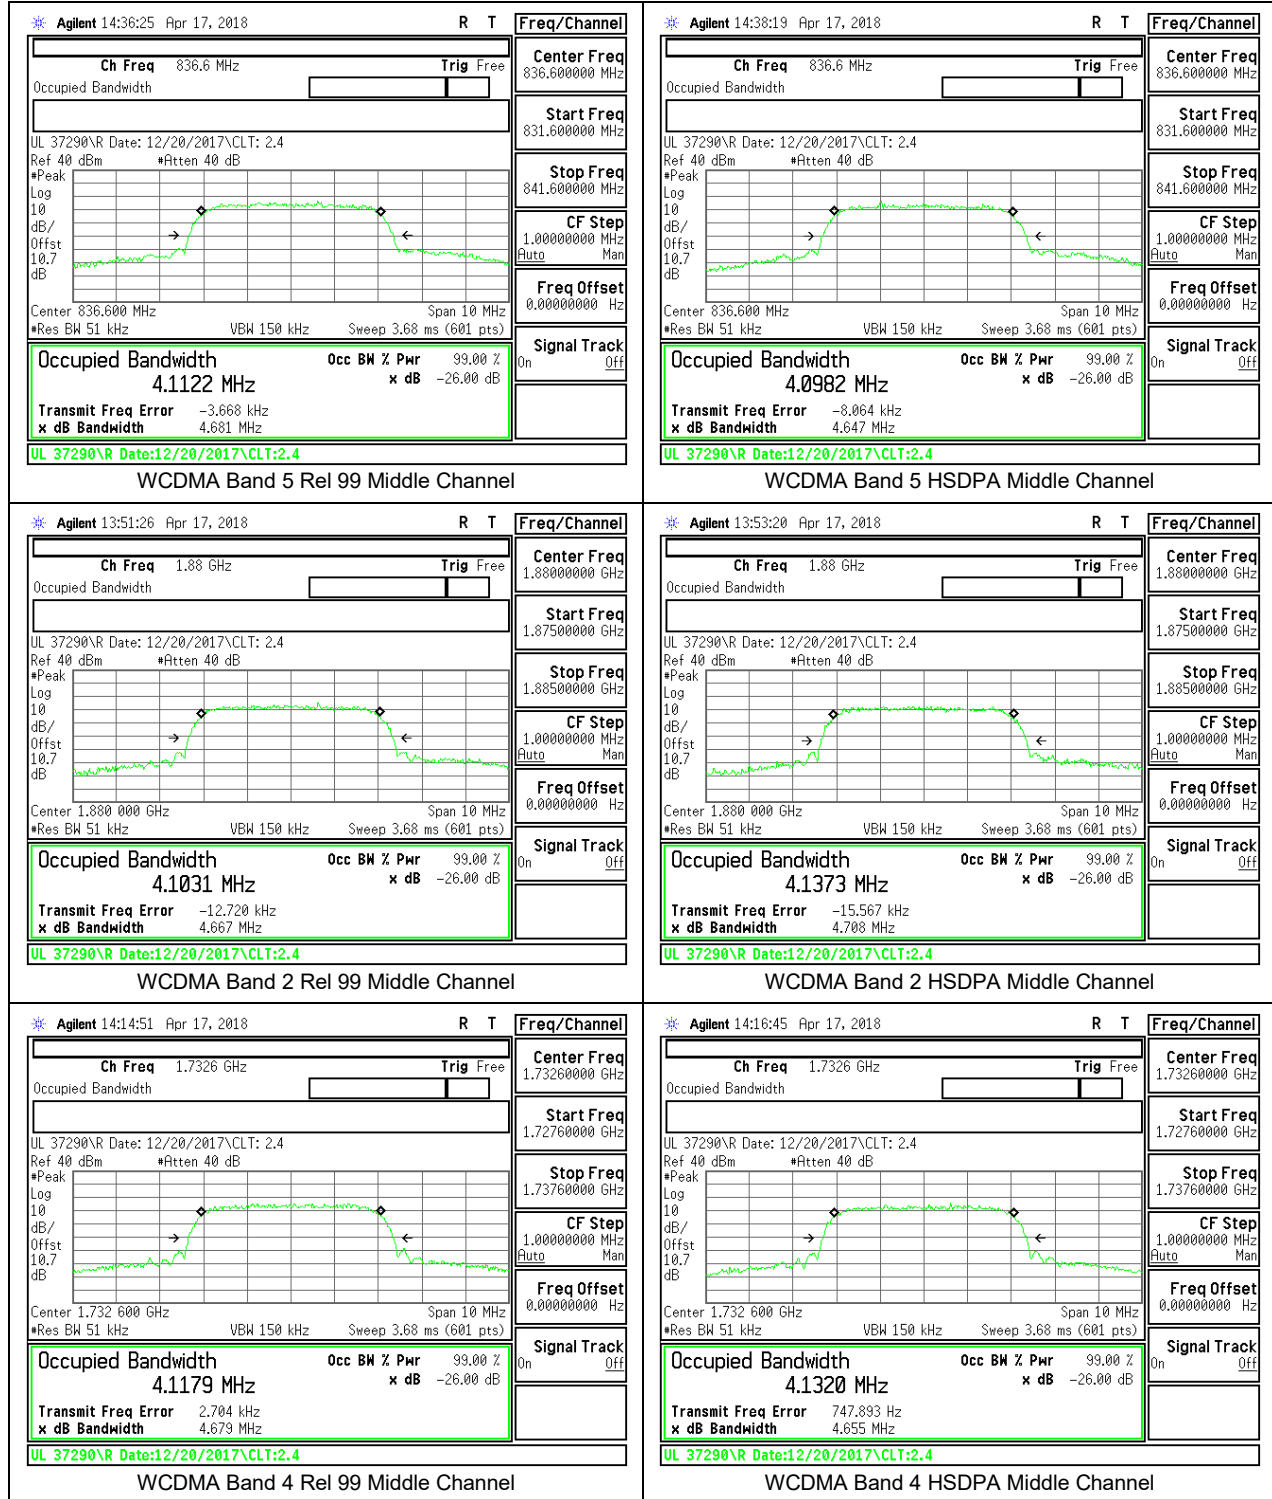

8.1.3. LTE BAND 4

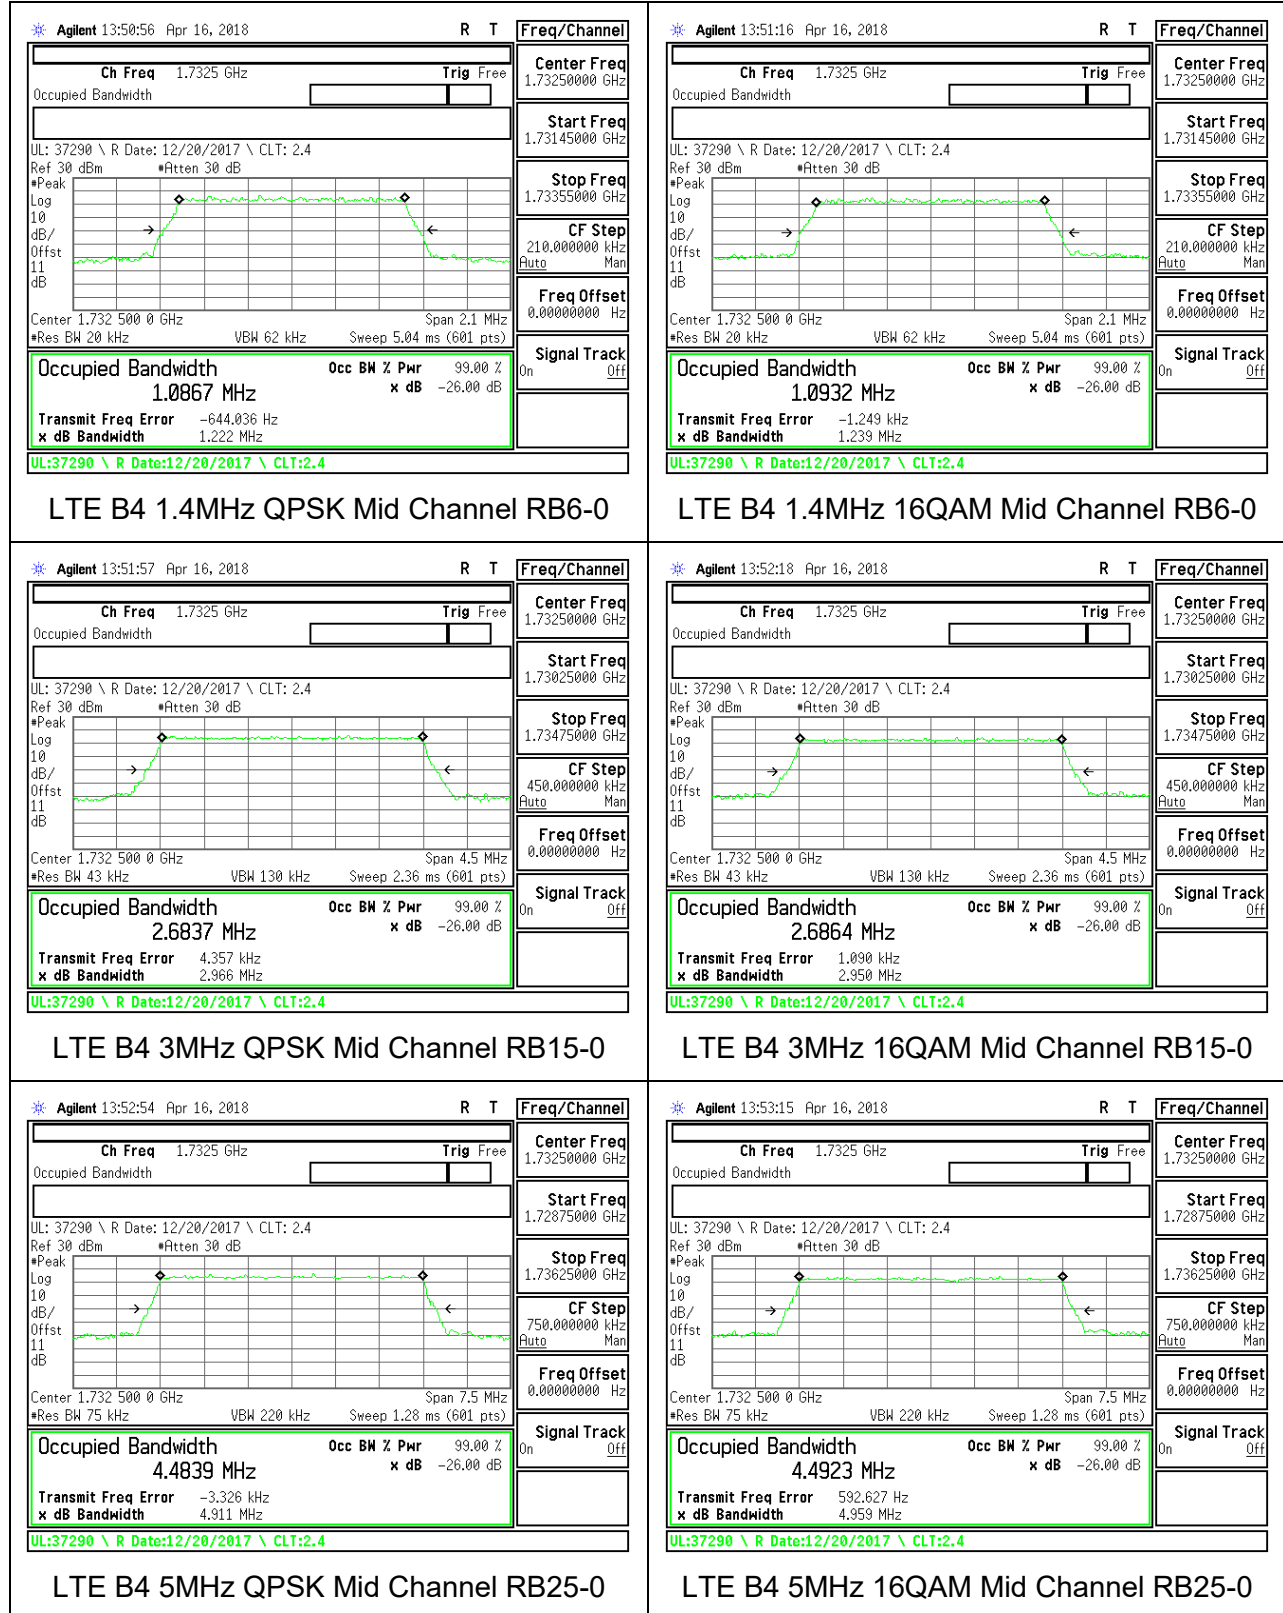


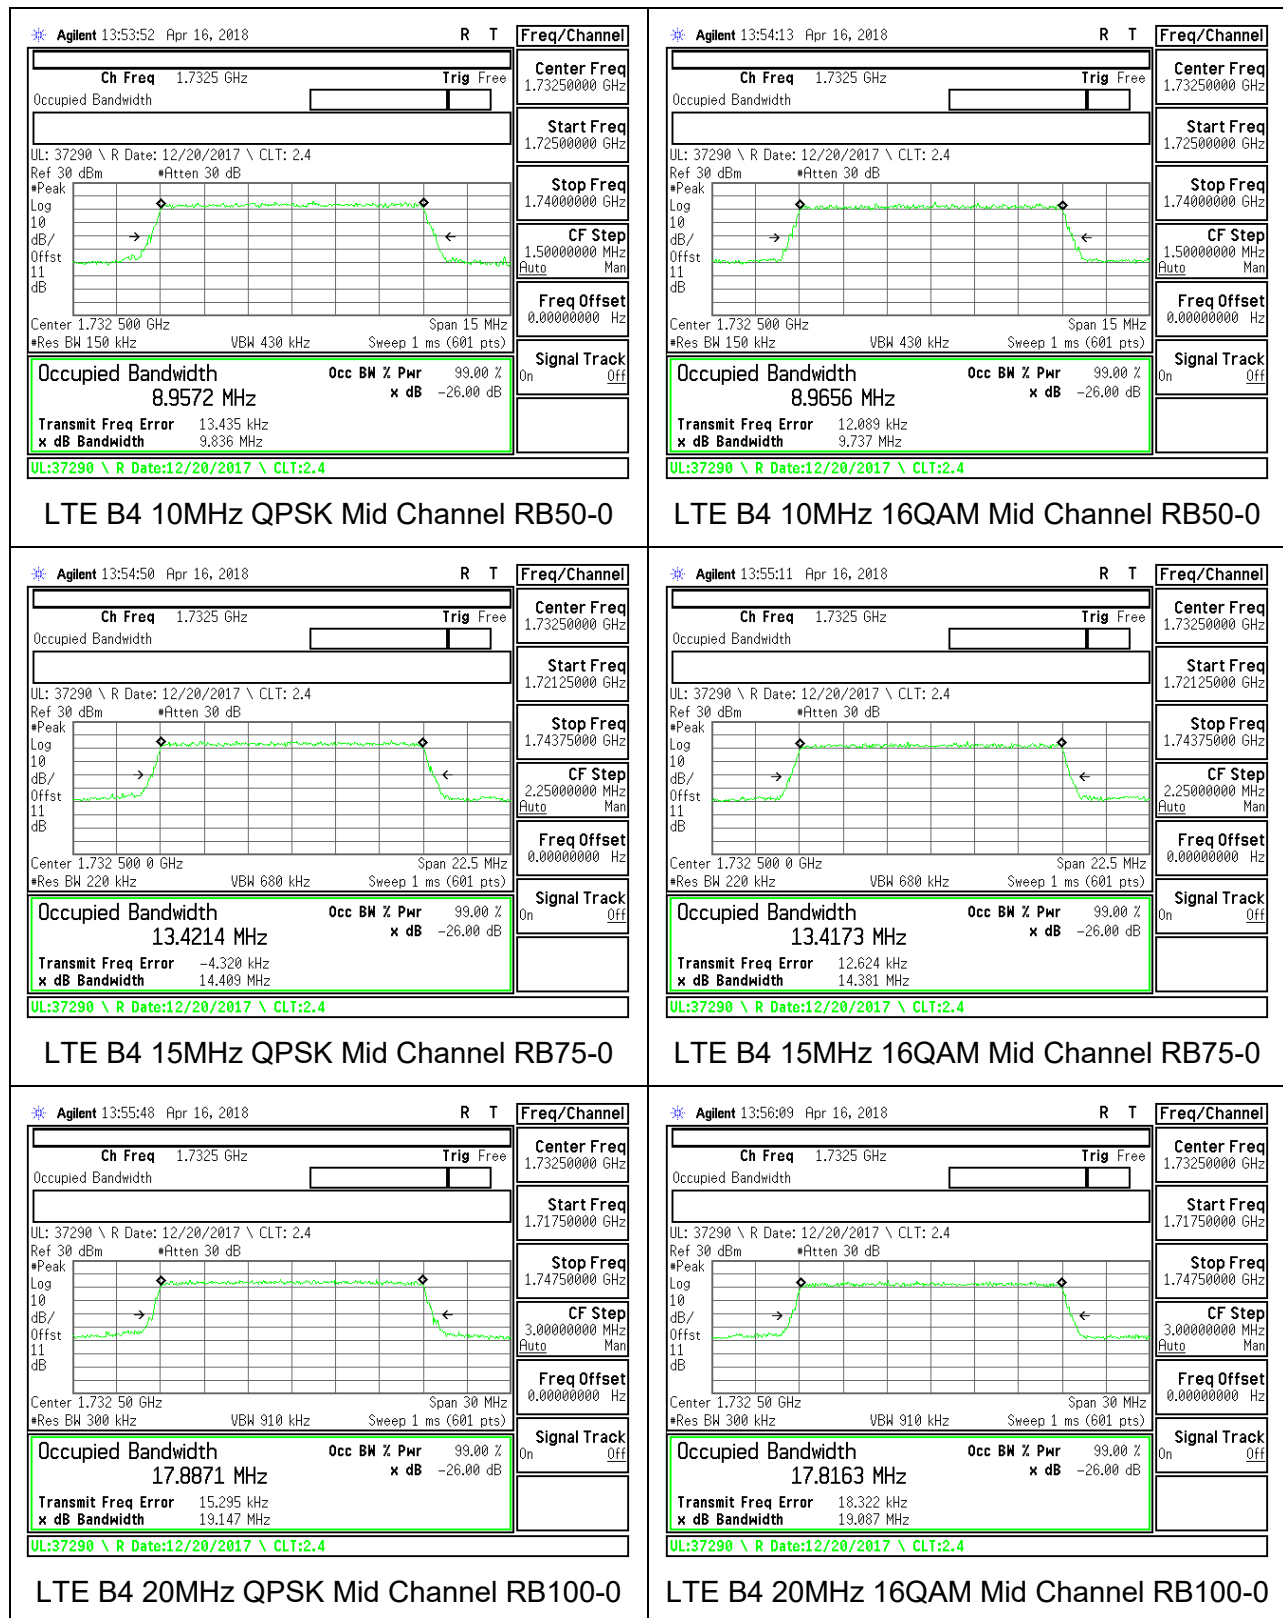


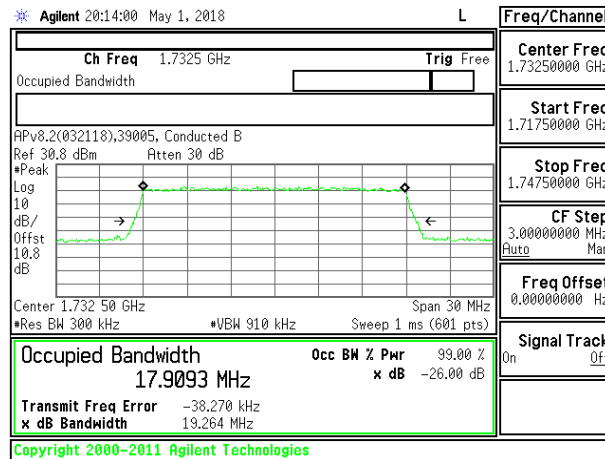


LTE B4 20MHz 64QAM Mid Channel RB100-0


8.1.4. LTE BAND 5

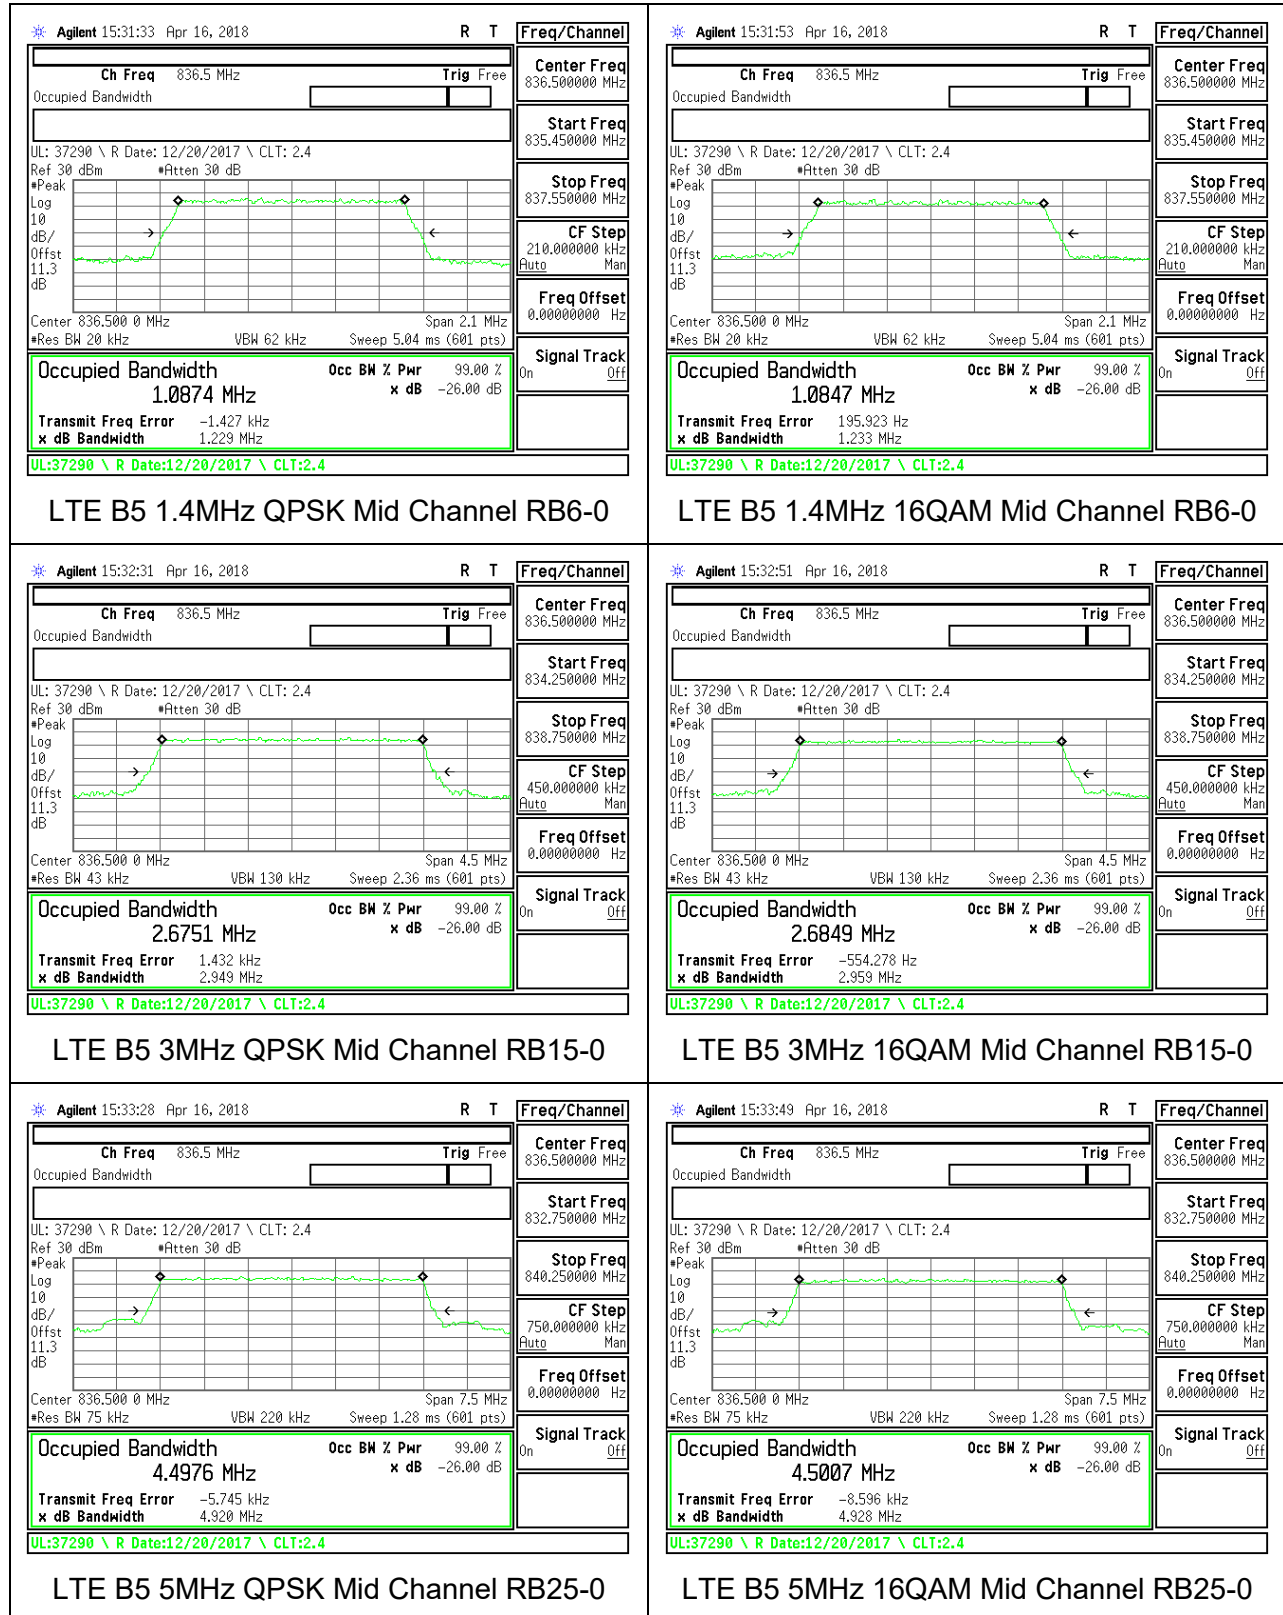

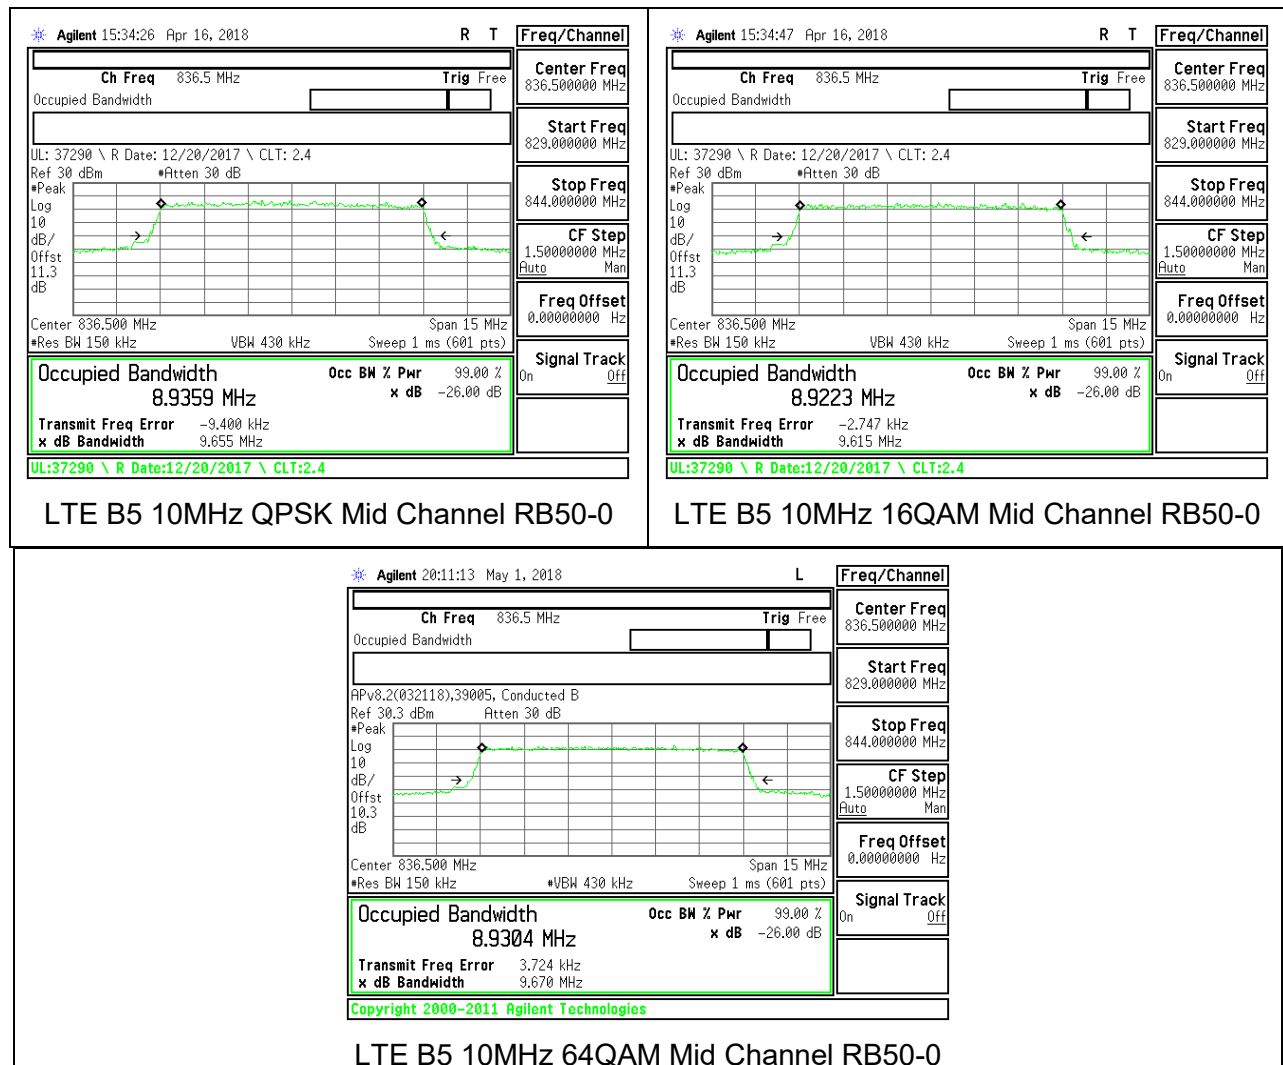


8.1.5. LTE BAND 7

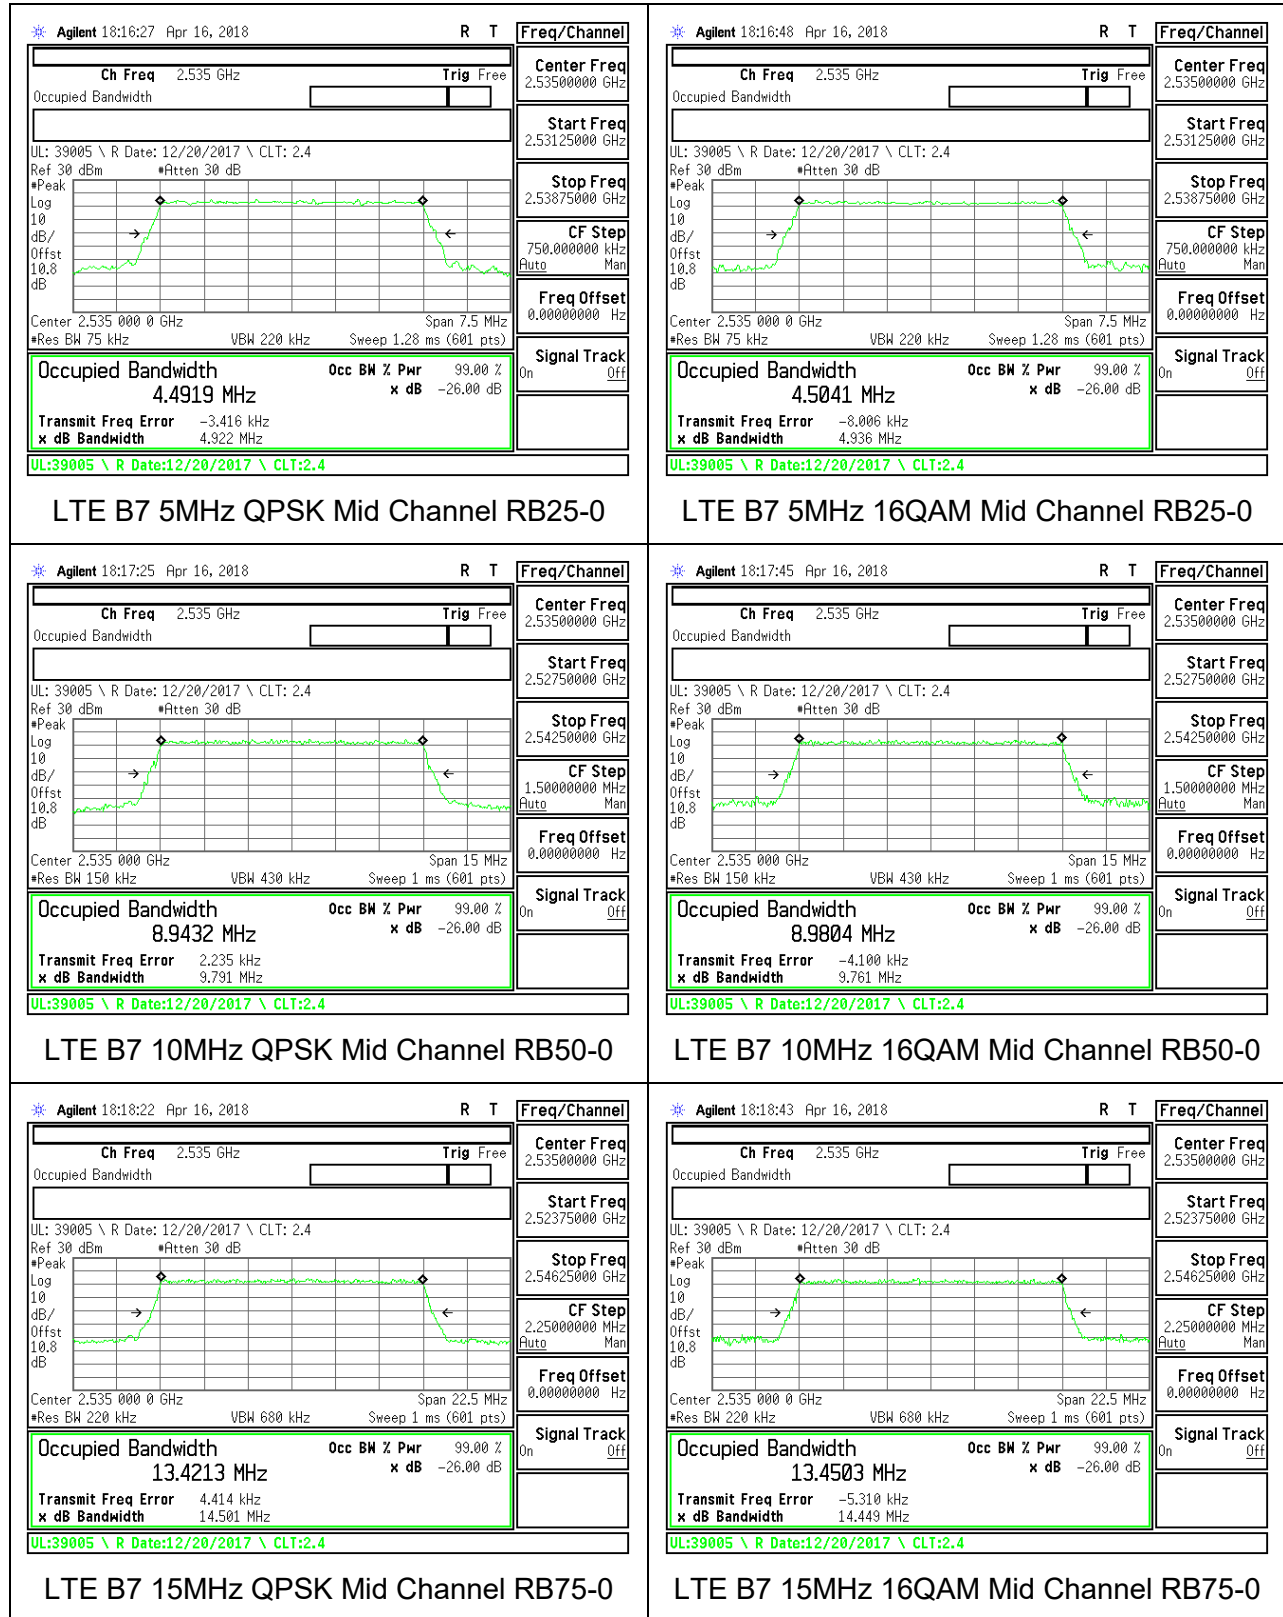


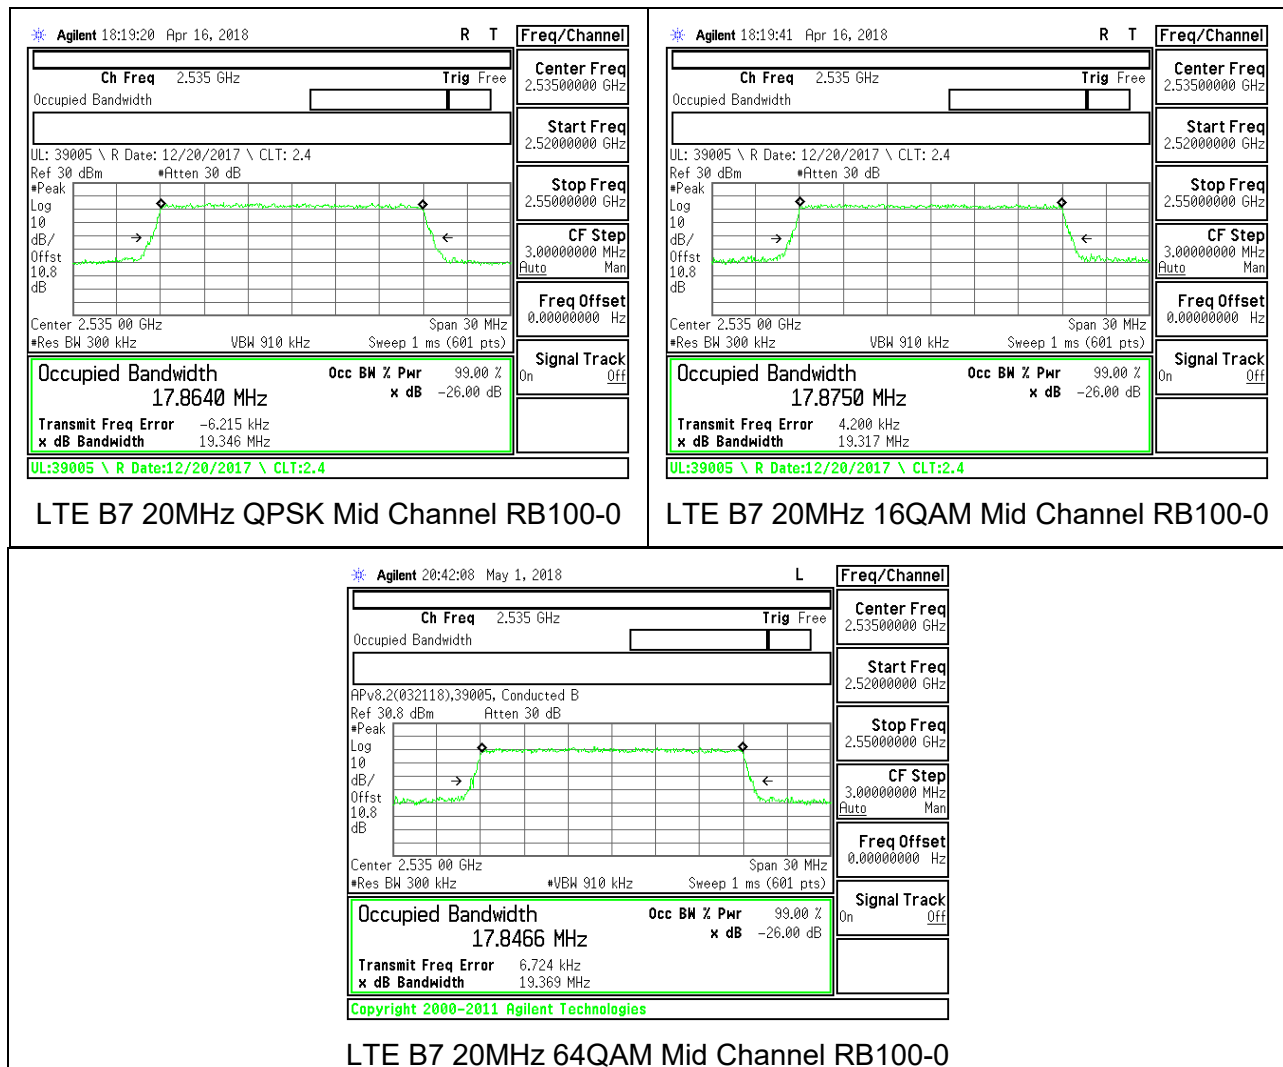


8.1.6. LTE BAND 13

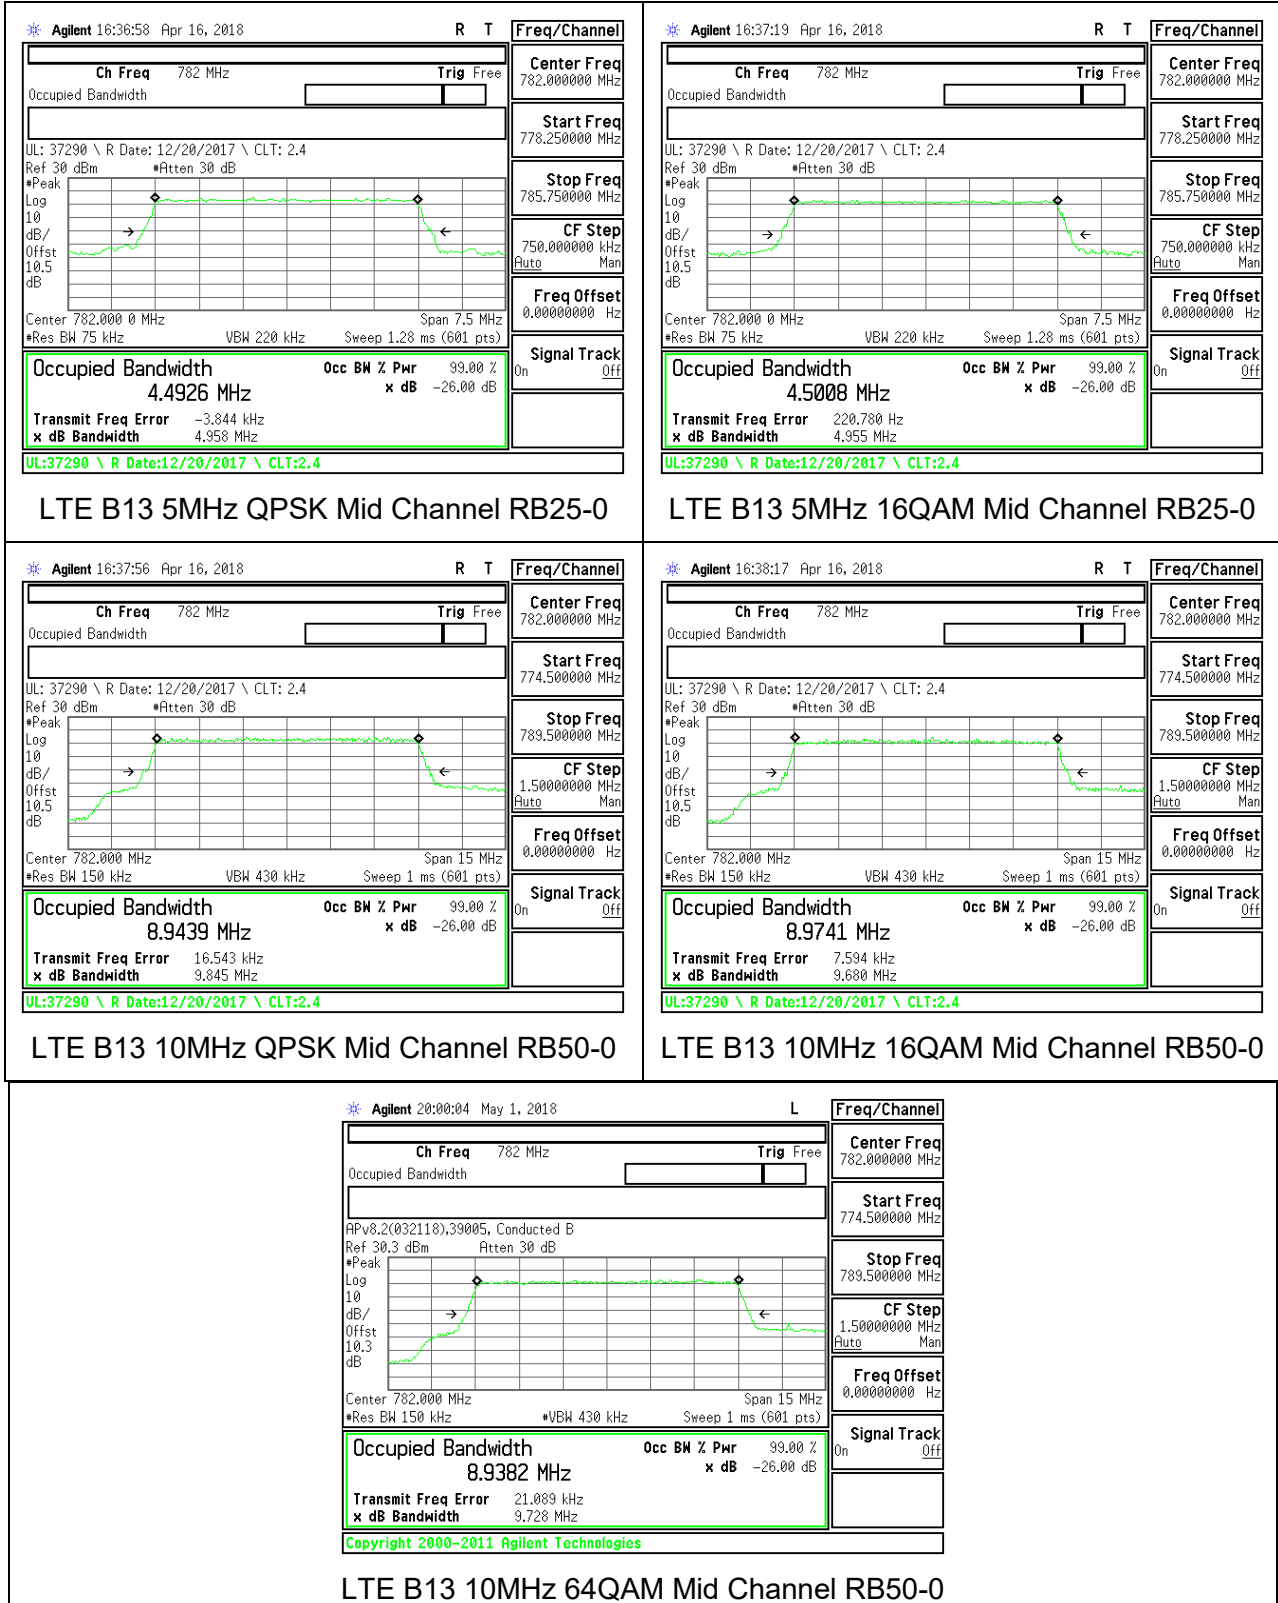


8.1.7. LTE BAND 17

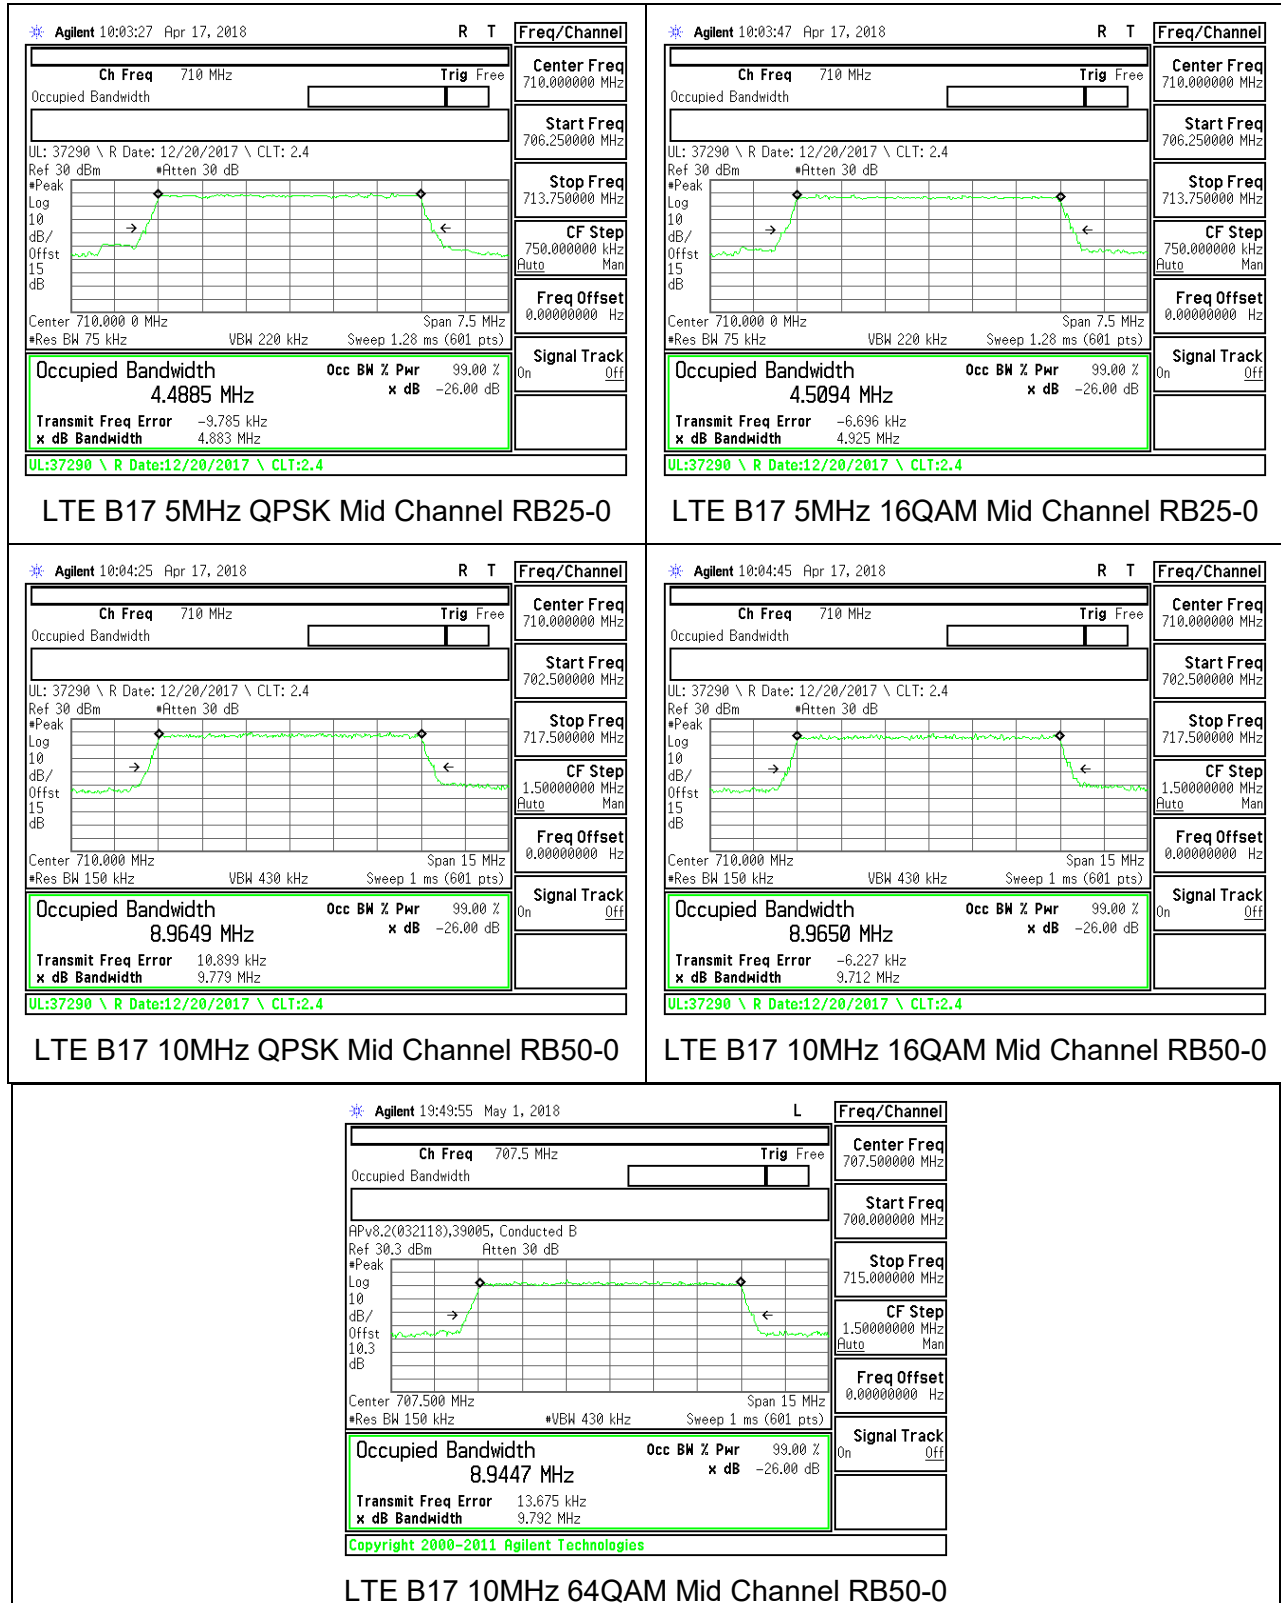

8.1.8. LTE BAND 41

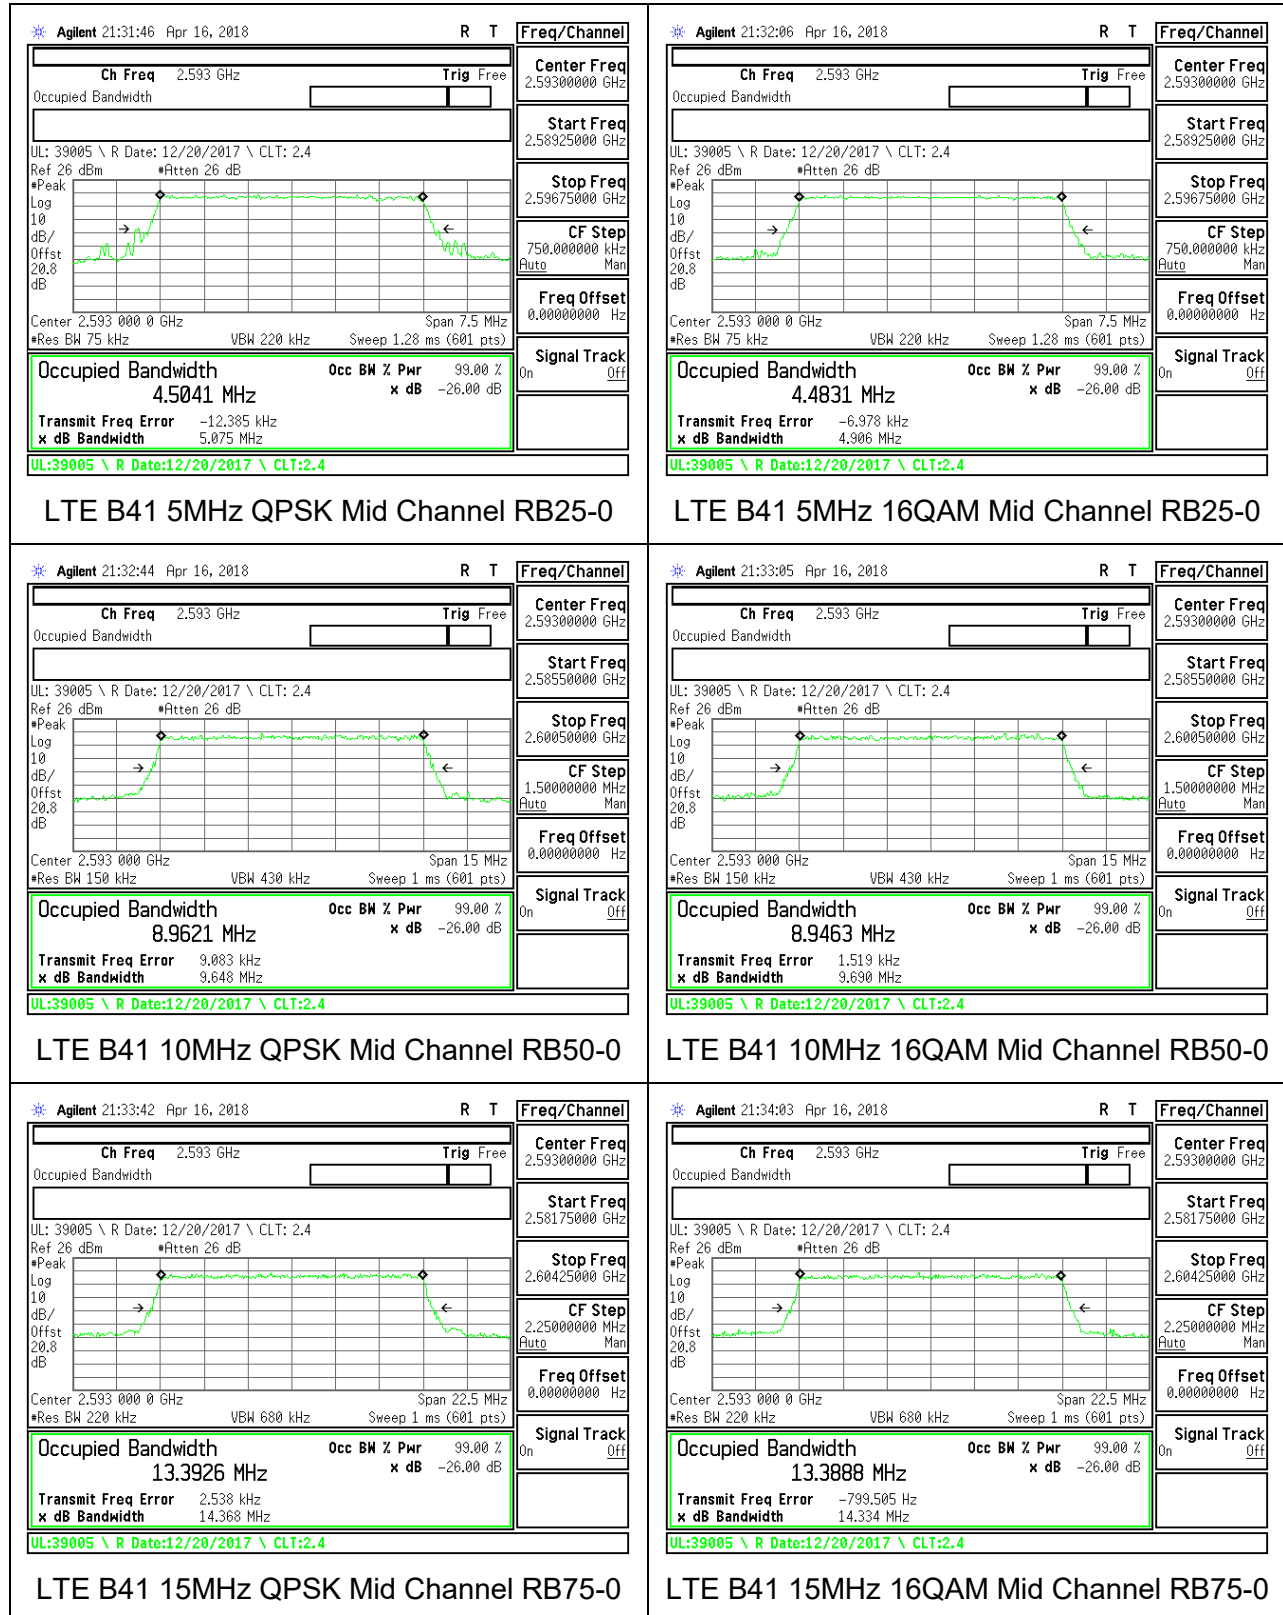

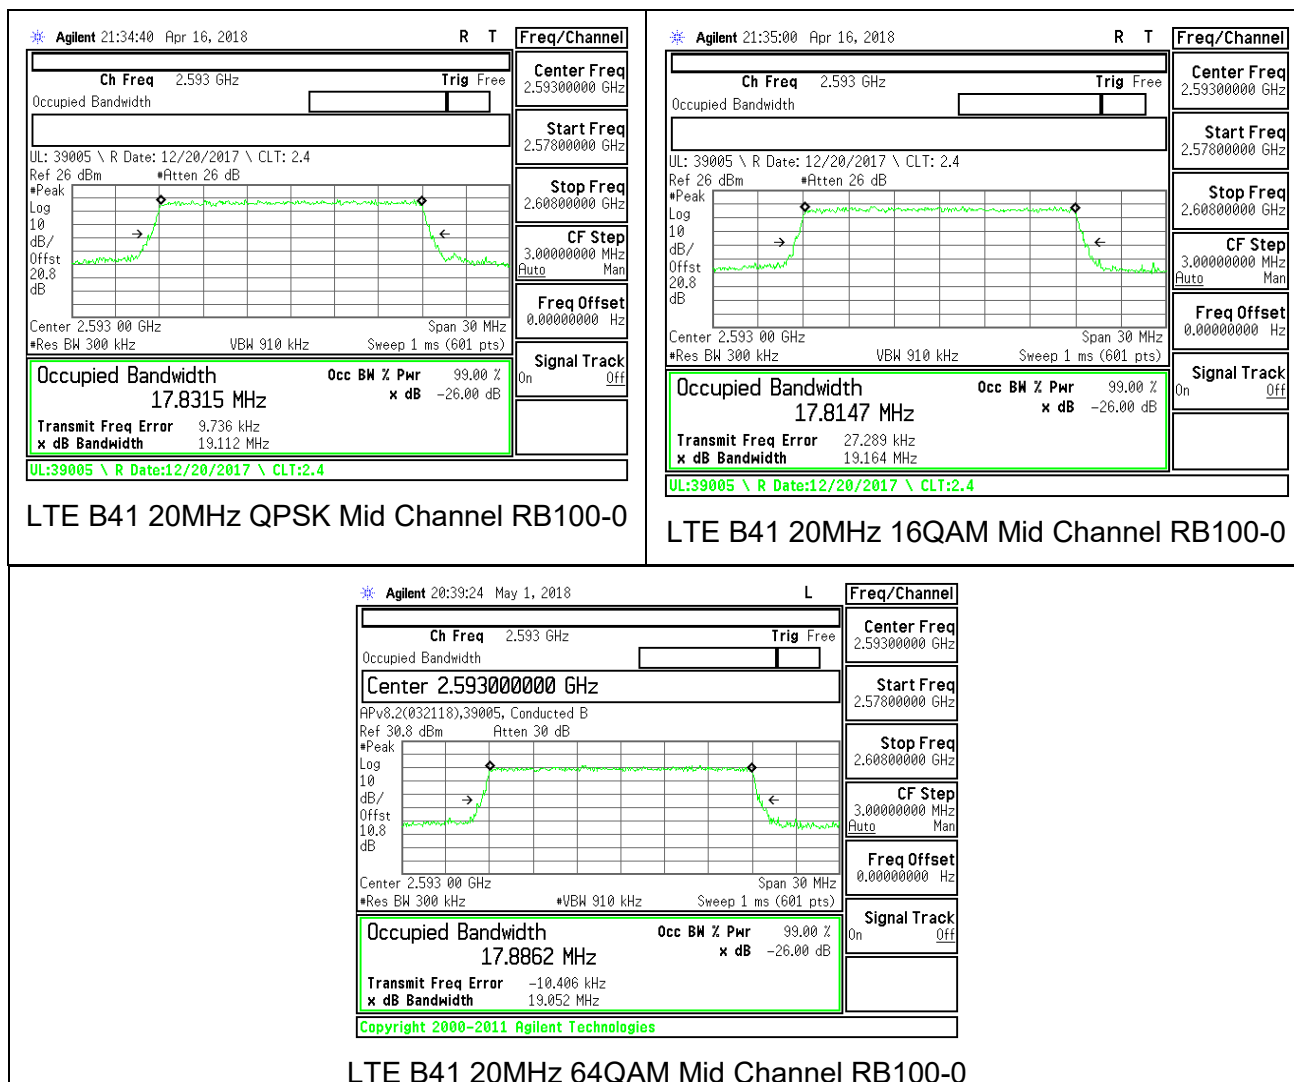

8.2. BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53

LIMITS

FCC: §22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (Band 13)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

FCC: §27.53 (Band 12, 17)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC: §27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:


- Set the spectrum analyzer span to include the block edge frequency.
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED


- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41

RESULTS


8.2.1. GSM 850MHz

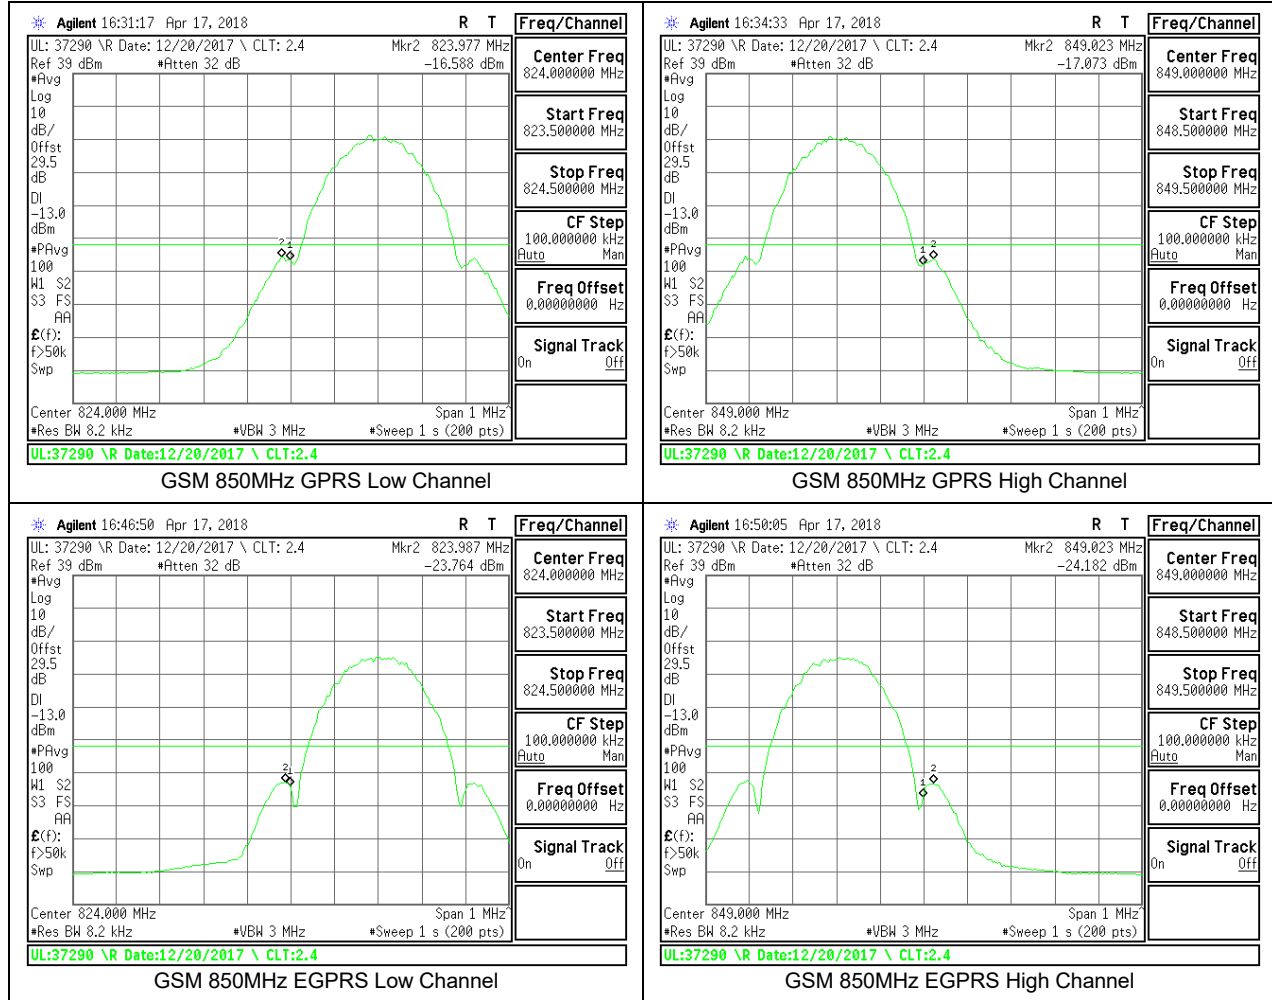


8.2.2. GSM 1900MHz

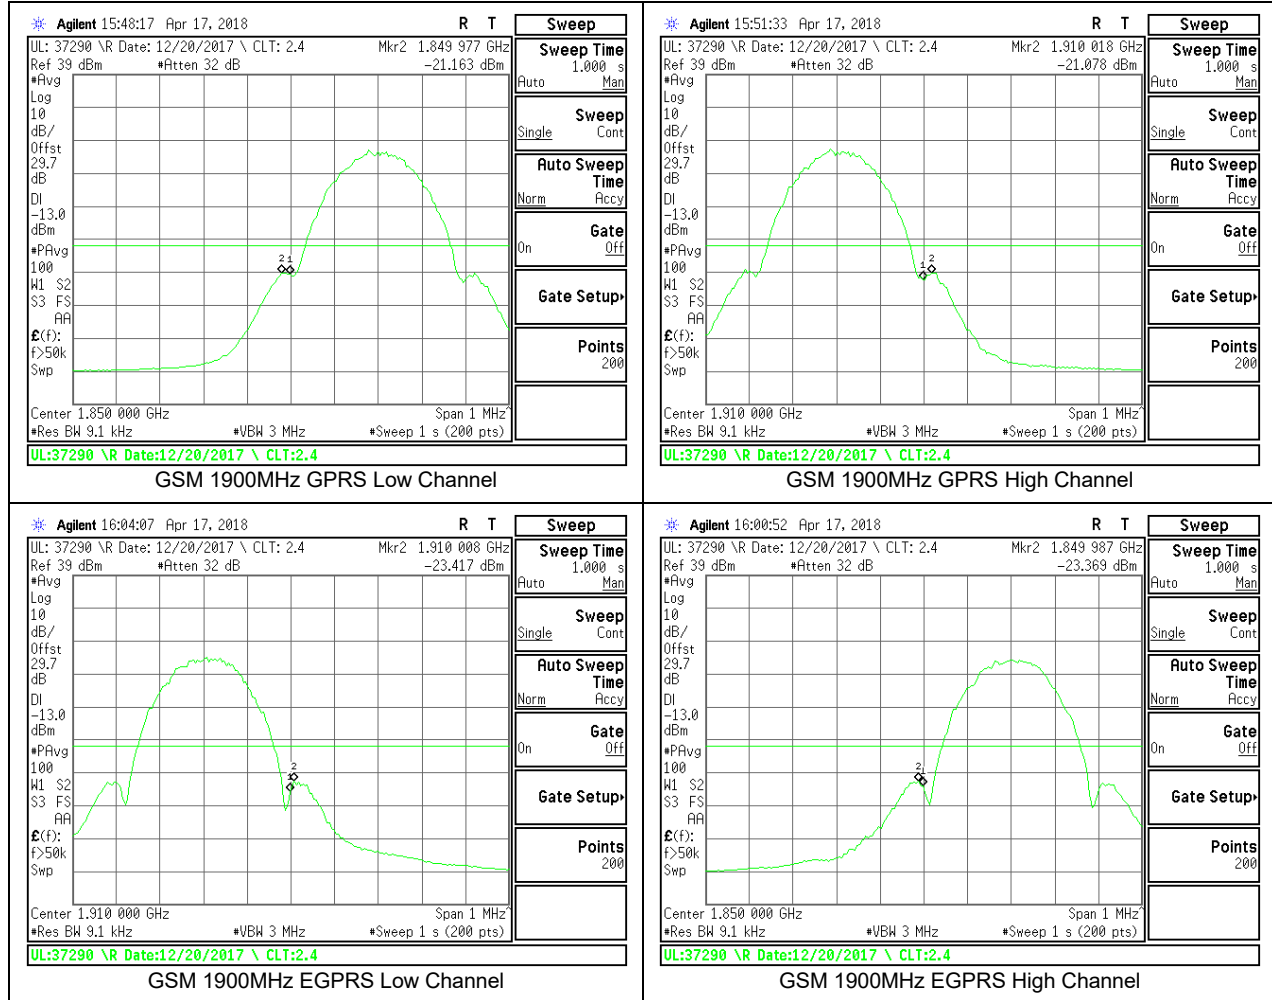


8.2.3. WCDMA BAND 5

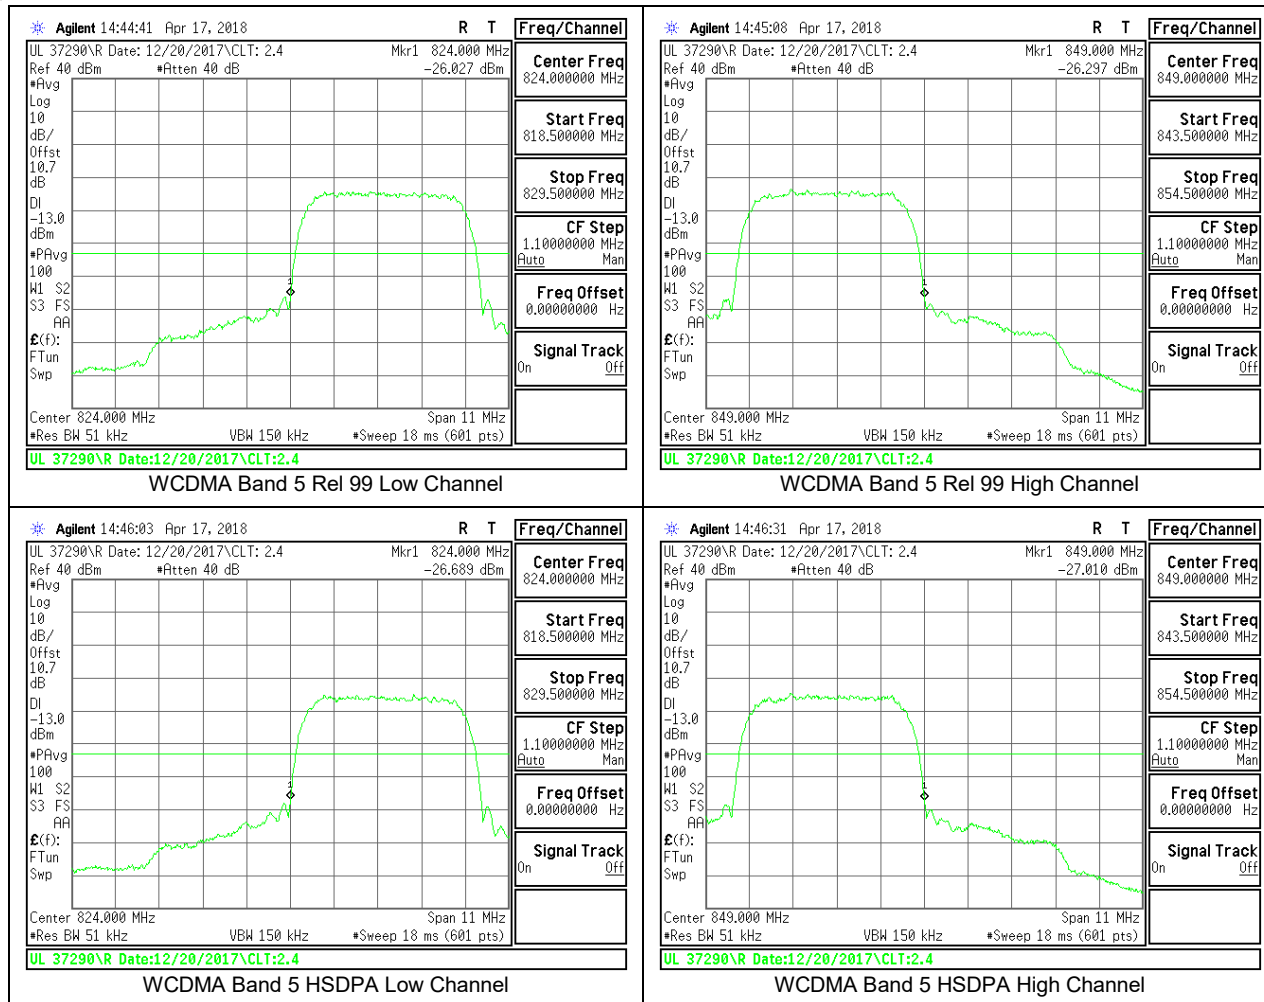


8.2.4. WCDMA BAND 2

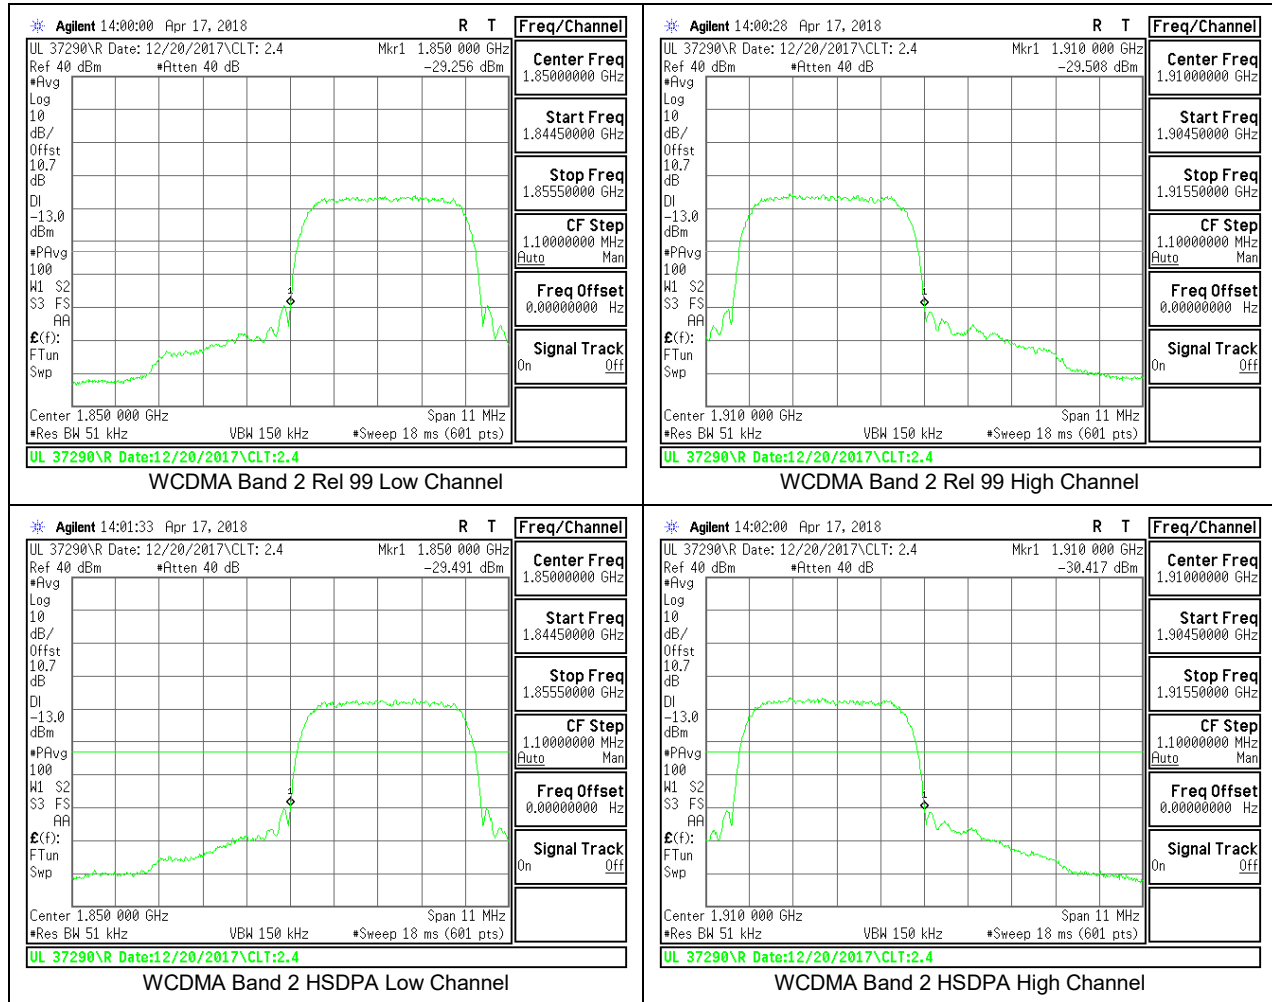


8.2.5. WCDMA BAND 4

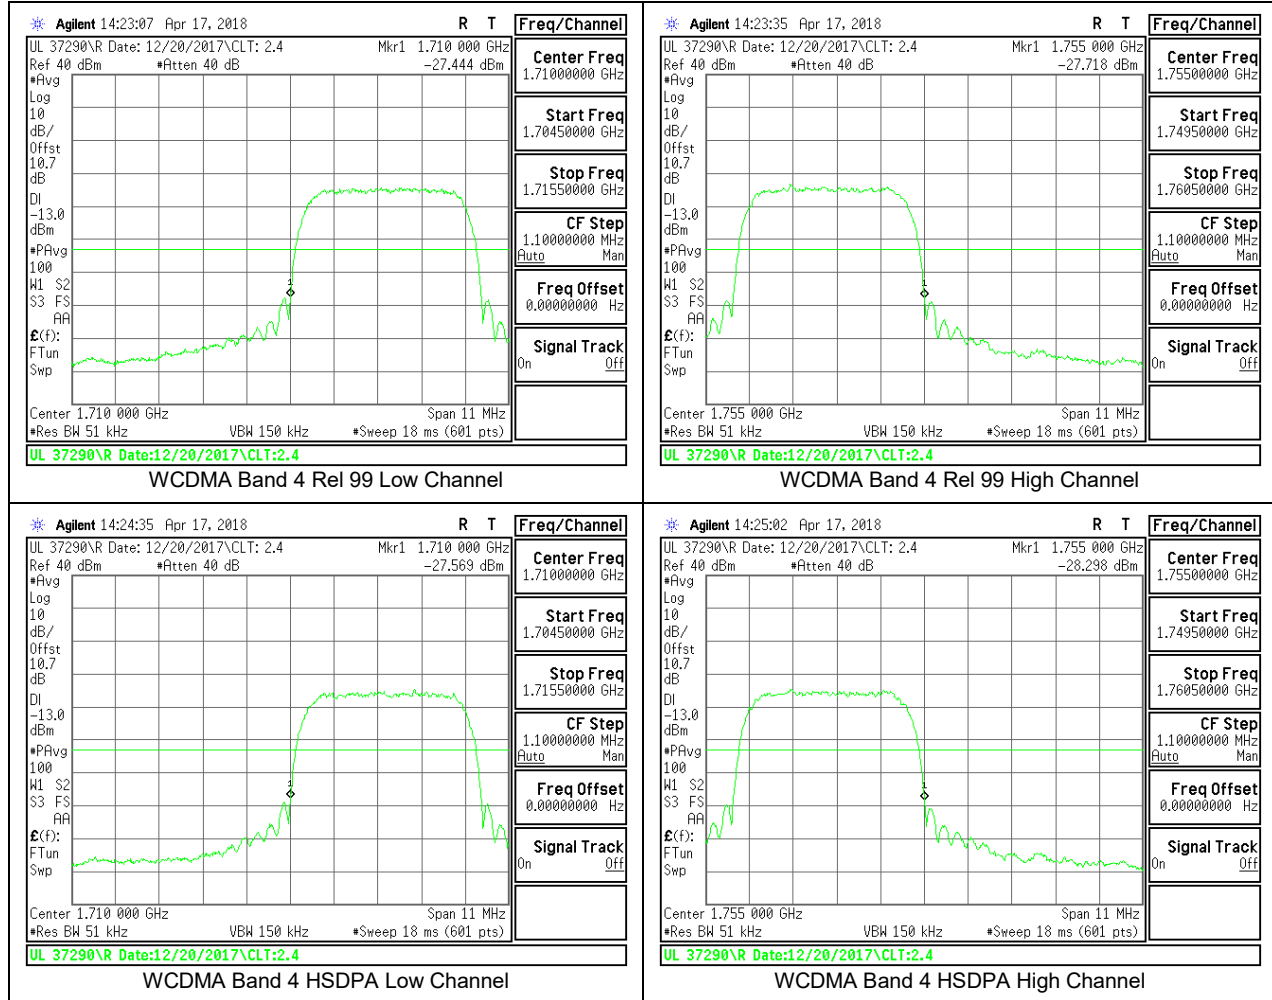


8.2.6. LTE BAND 4 BANDEDGE

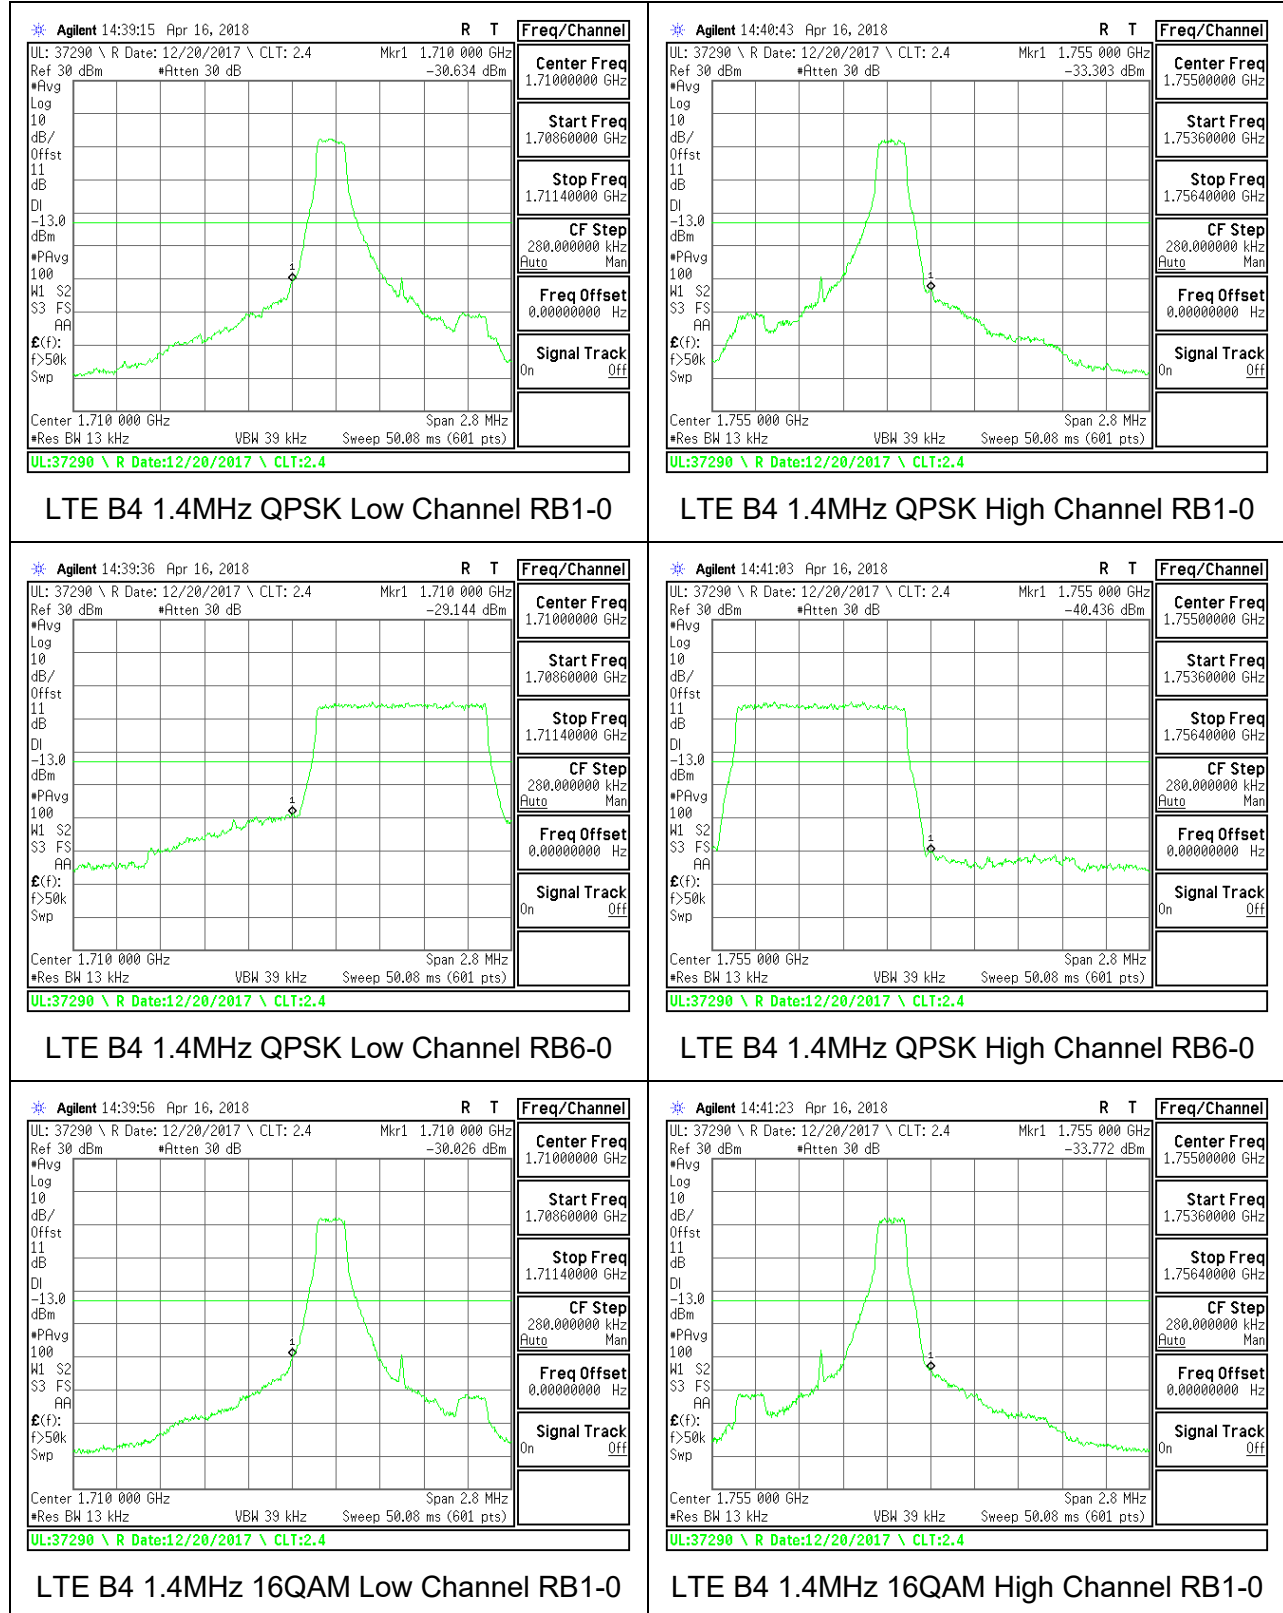


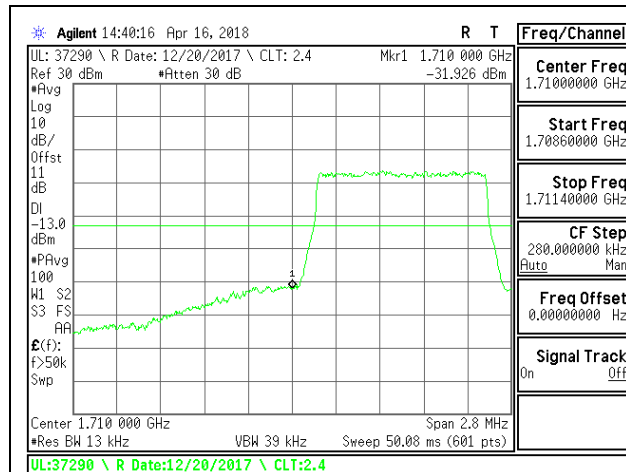


LTE B4 1.4MHz 16QAM Low Channel RB6-0

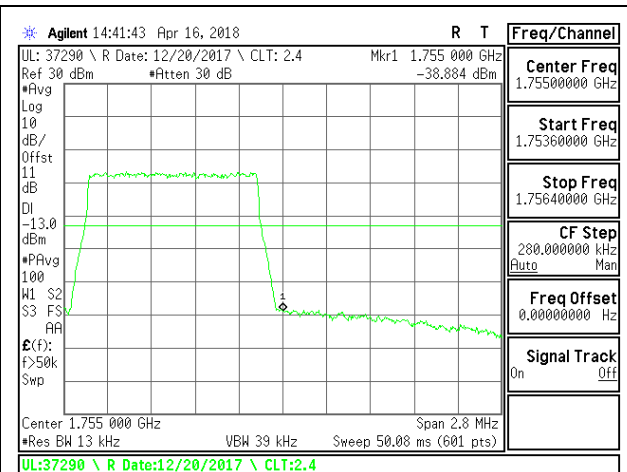


LTE B4 1.4MHz 16QAM High Channel RB6-0

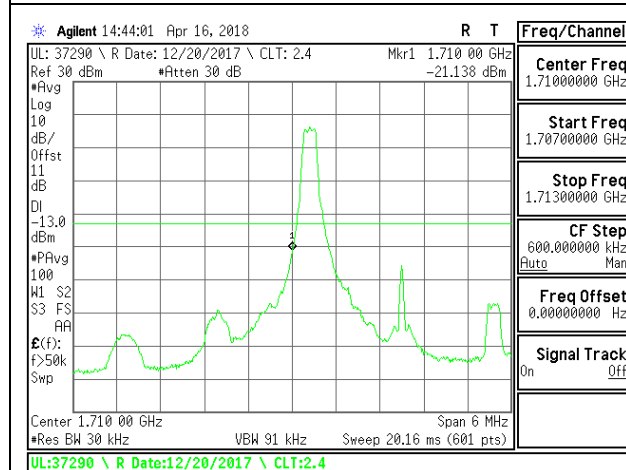


LTE B4 3MHz QPSK Low Channel RB1-0

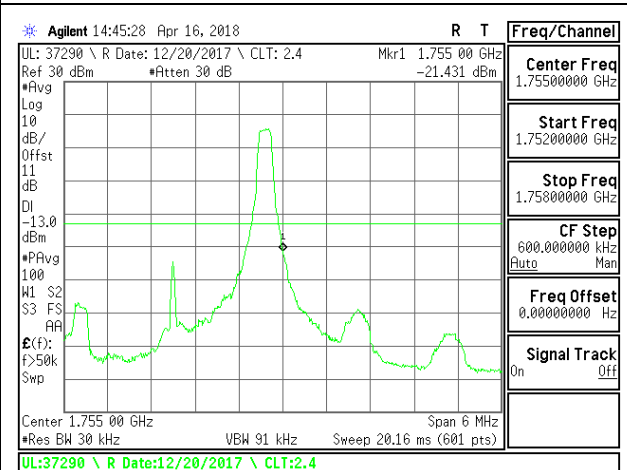


LTE B4 3MHz QPSK High Channel RB1-0

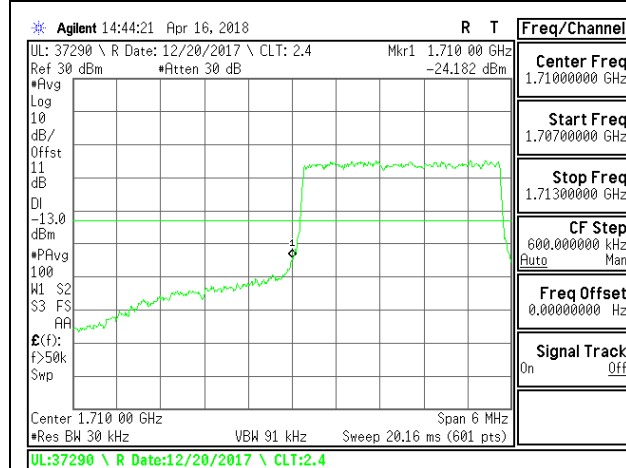


LTE B4 3MHz QPSK Low Channel RB15-0

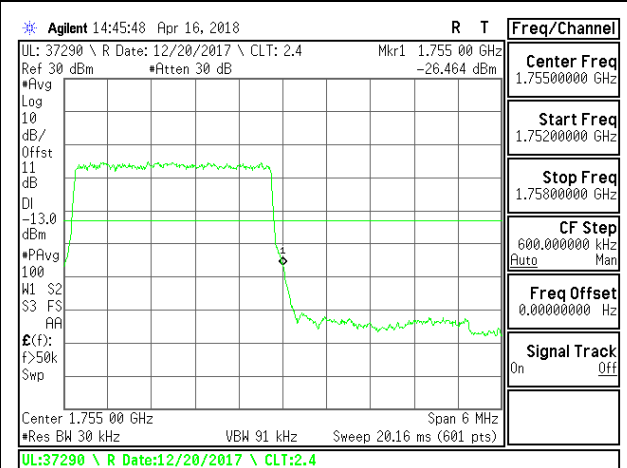


LTE B4 3MHz QPSK High Channel RB15-0

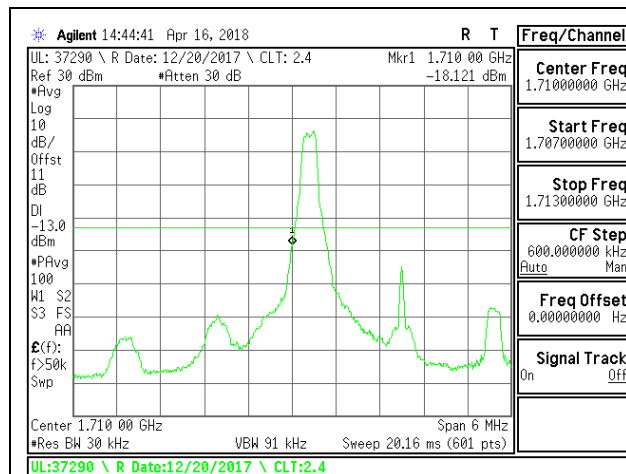


LTE B4 3MHz 16QAM Low Channel RB1-0

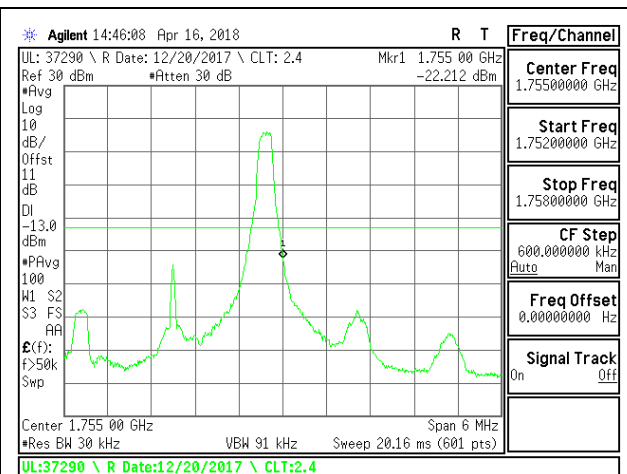


LTE B4 3MHz 16QAM High Channel RB1-0

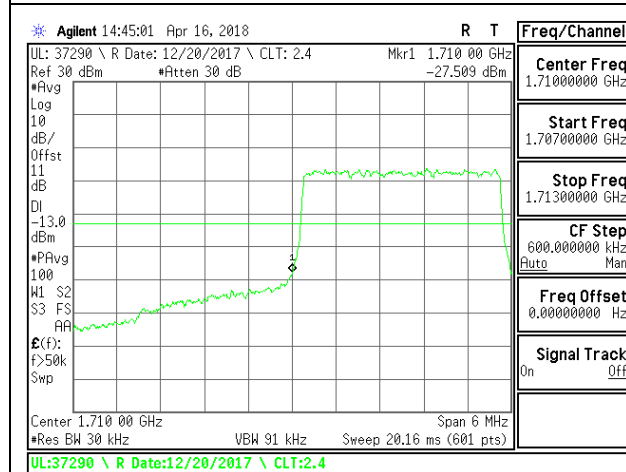


LTE B4 3MHz 16QAM Low Channel RB15-0

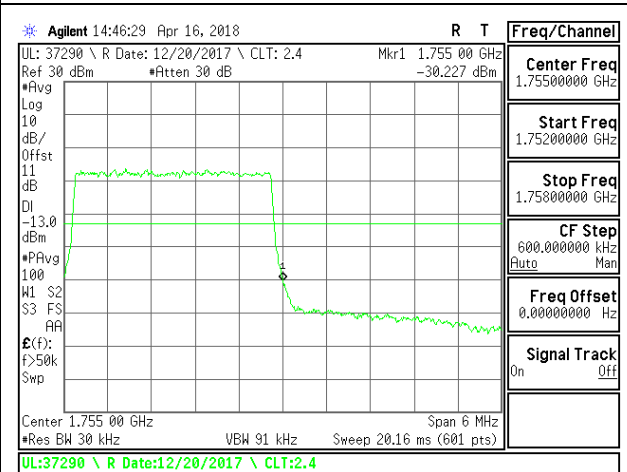


LTE B4 3MHz 16QAM High Channel RB15-0

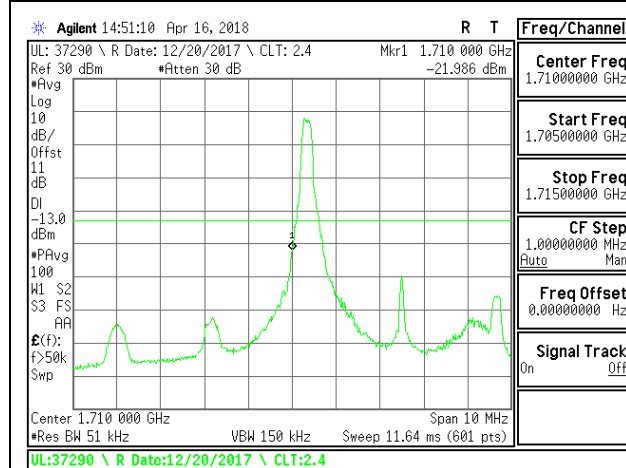


LTE B4 5MHz QPSK Low Channel RB1-0

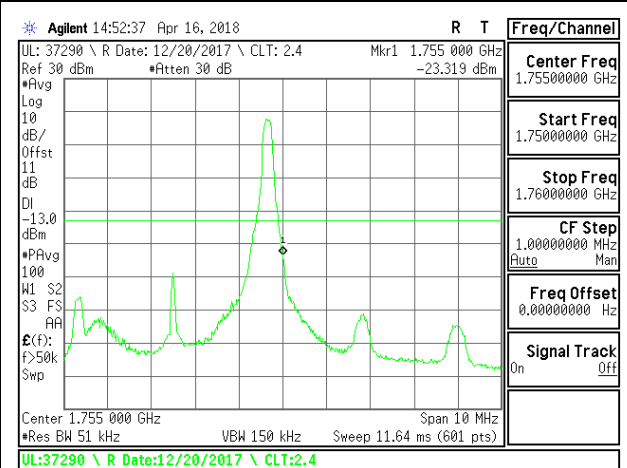


LTE B4 5MHz QPSK High Channel RB1-0

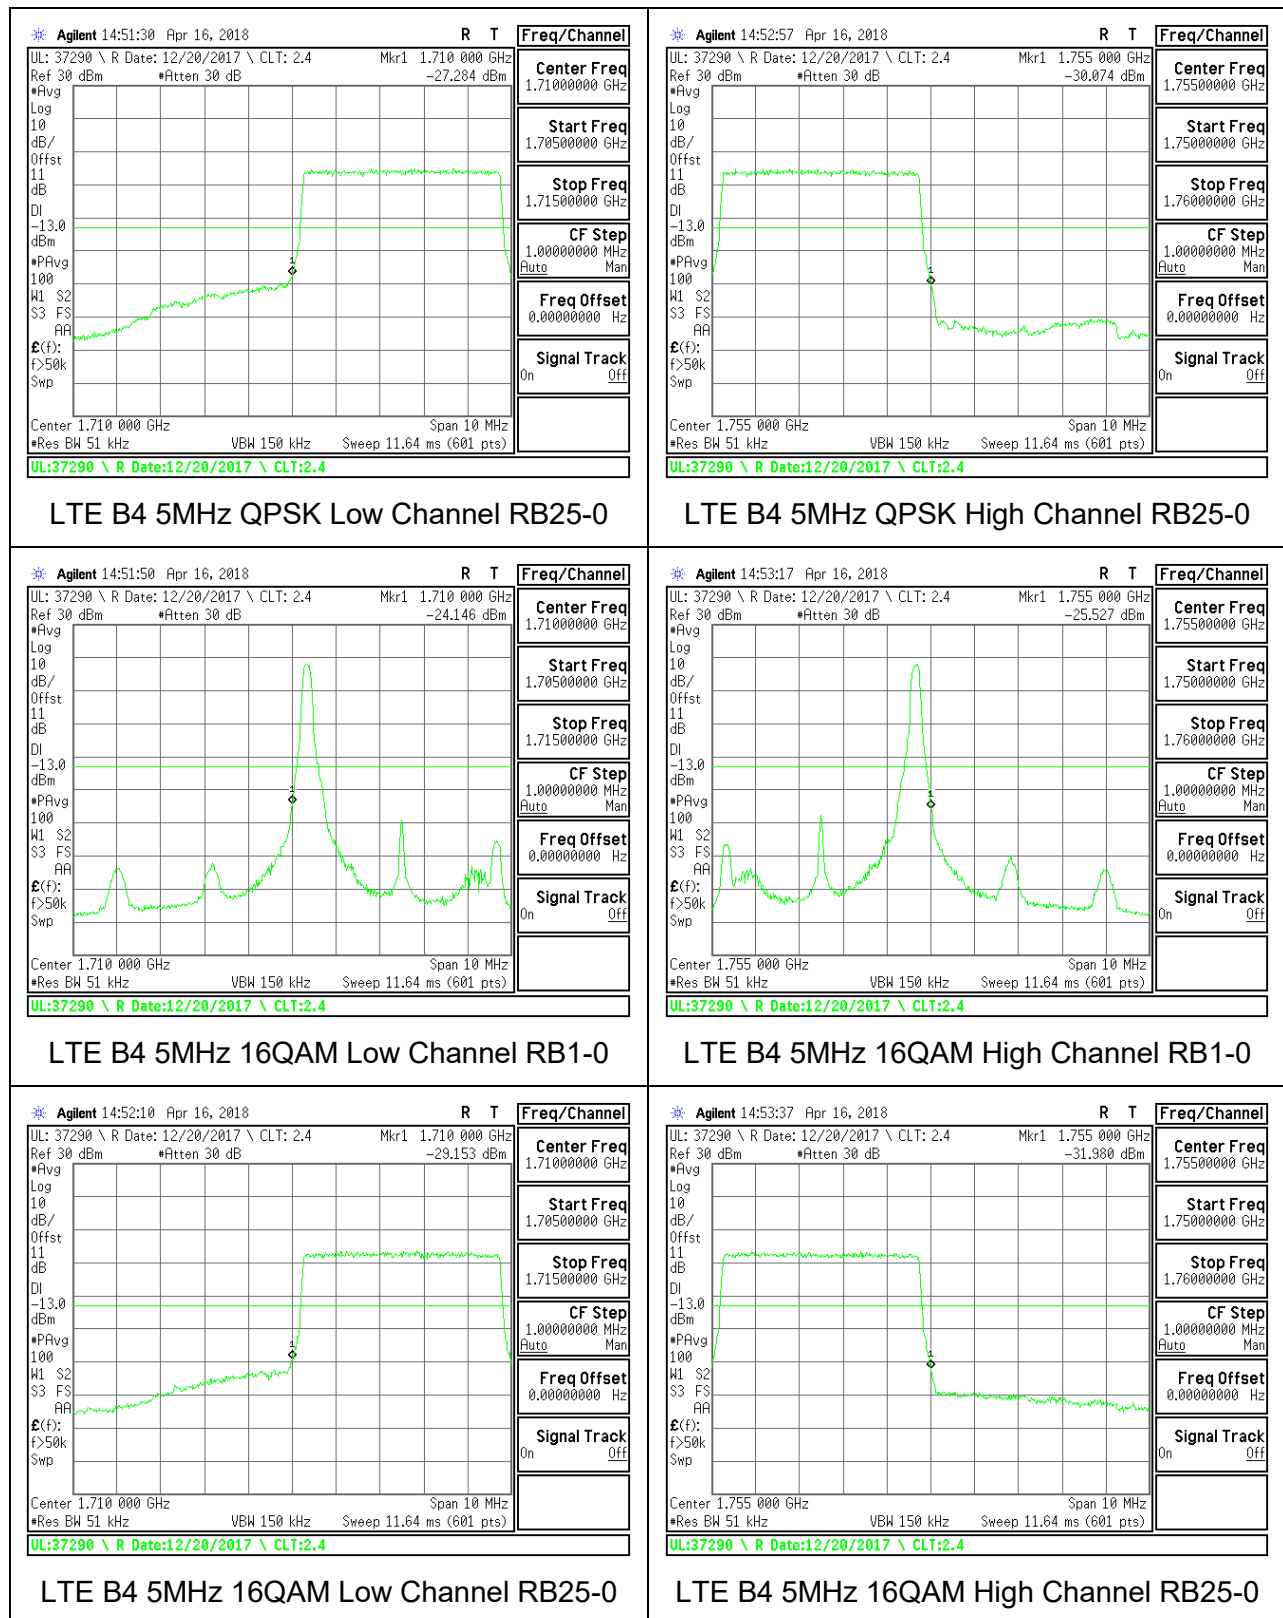


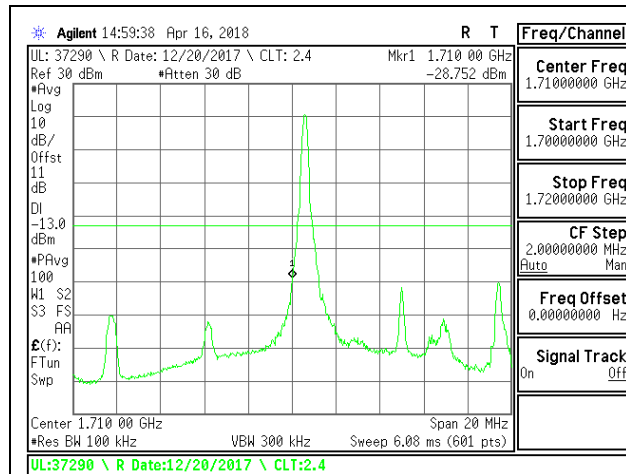


LTE B4 10MHz QPSK Low Channel RB1-0

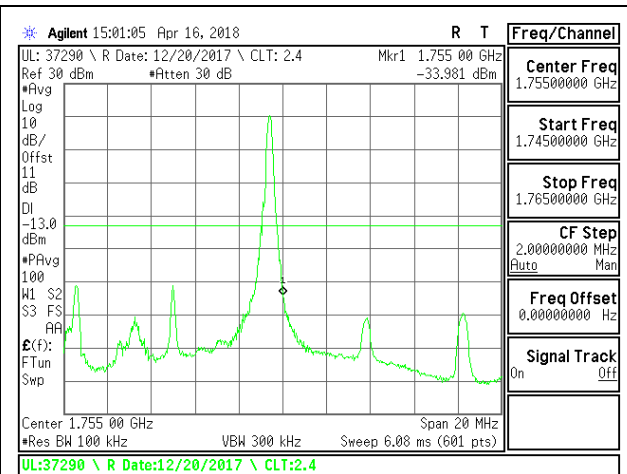


LTE B4 10MHz QPSK High Channel RB1-0

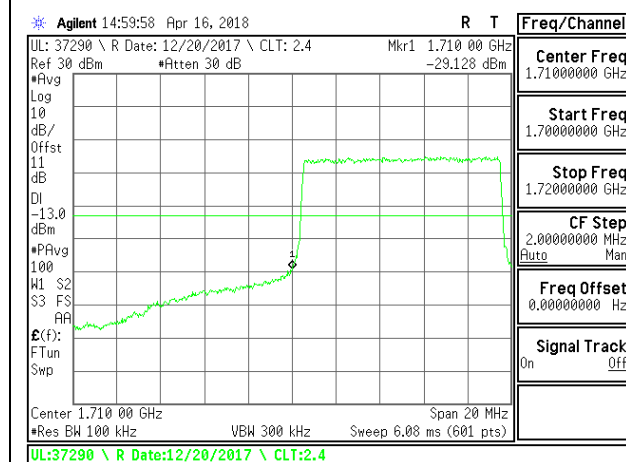


LTE B4 10MHz QPSK Low Channel RB50-0

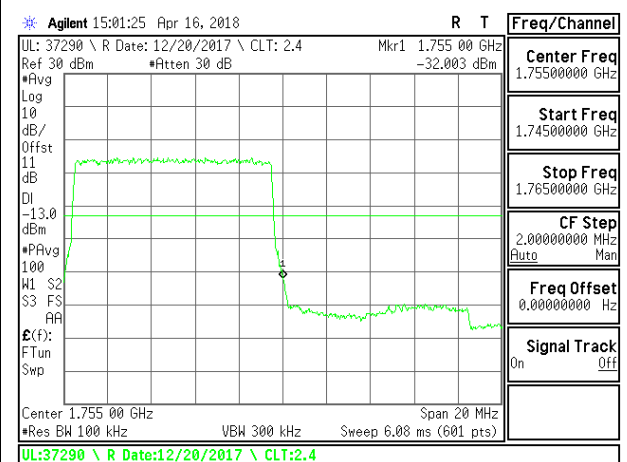


LTE B4 10MHz QPSK High Channel RB50-0

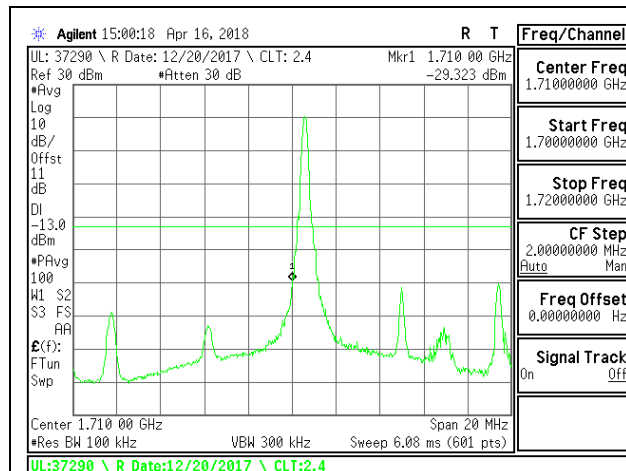


LTE B4 10MHz 16QAM Low Channel RB1-0

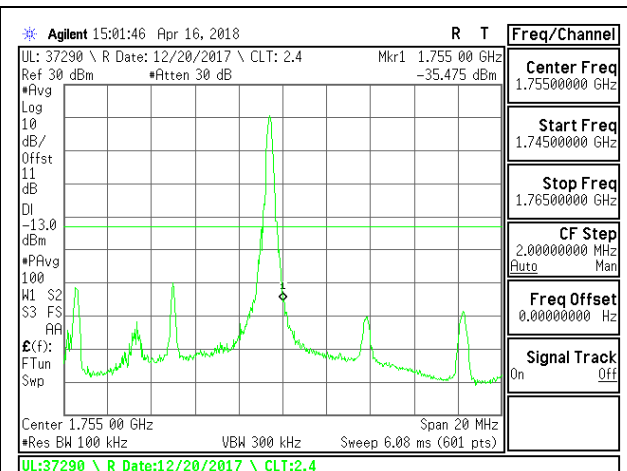


LTE B4 10MHz 16QAM High Channel RB1-0

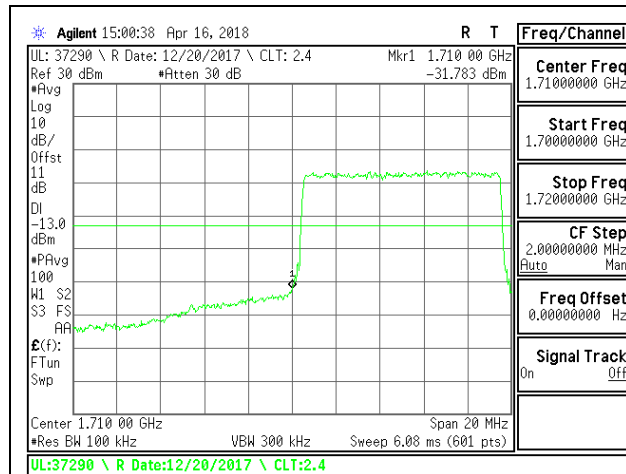


LTE B4 10MHz 16QAM Low Channel RB50-0

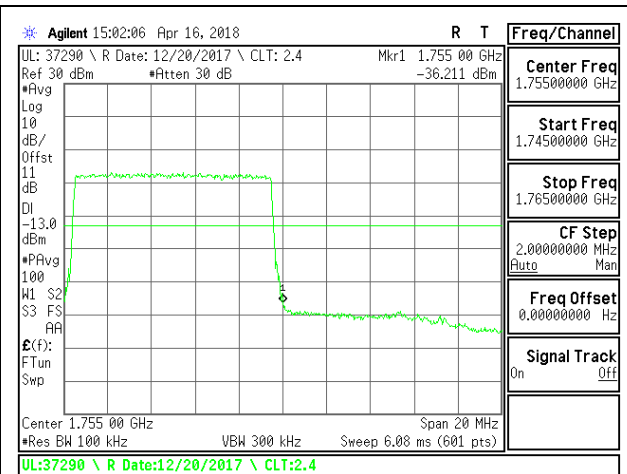


LTE B4 10MHz 16QAM High Channel RB50-0

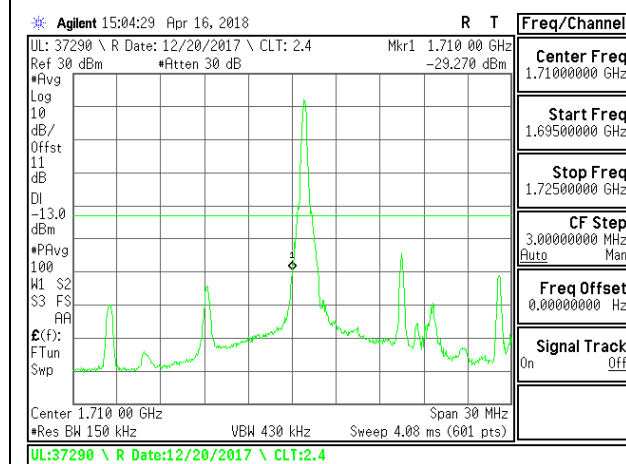


LTE B4 15MHz QPSK Low Channel RB1-0

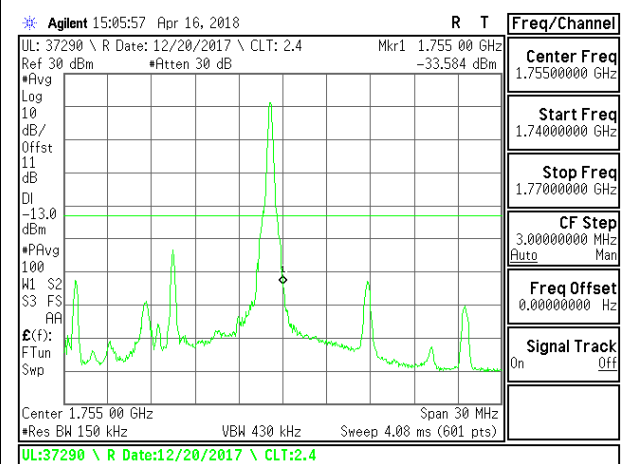


LTE B4 15MHz QPSK High Channel RB1-0

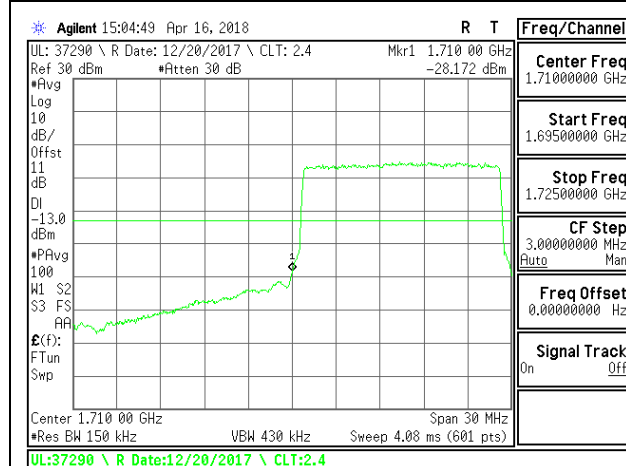


LTE B4 15MHz QPSK Low Channel RB75-0

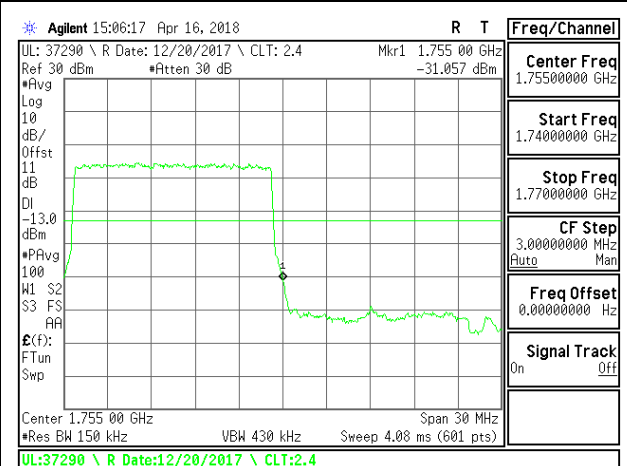


LTE B4 15MHz QPSK High Channel RB75-0

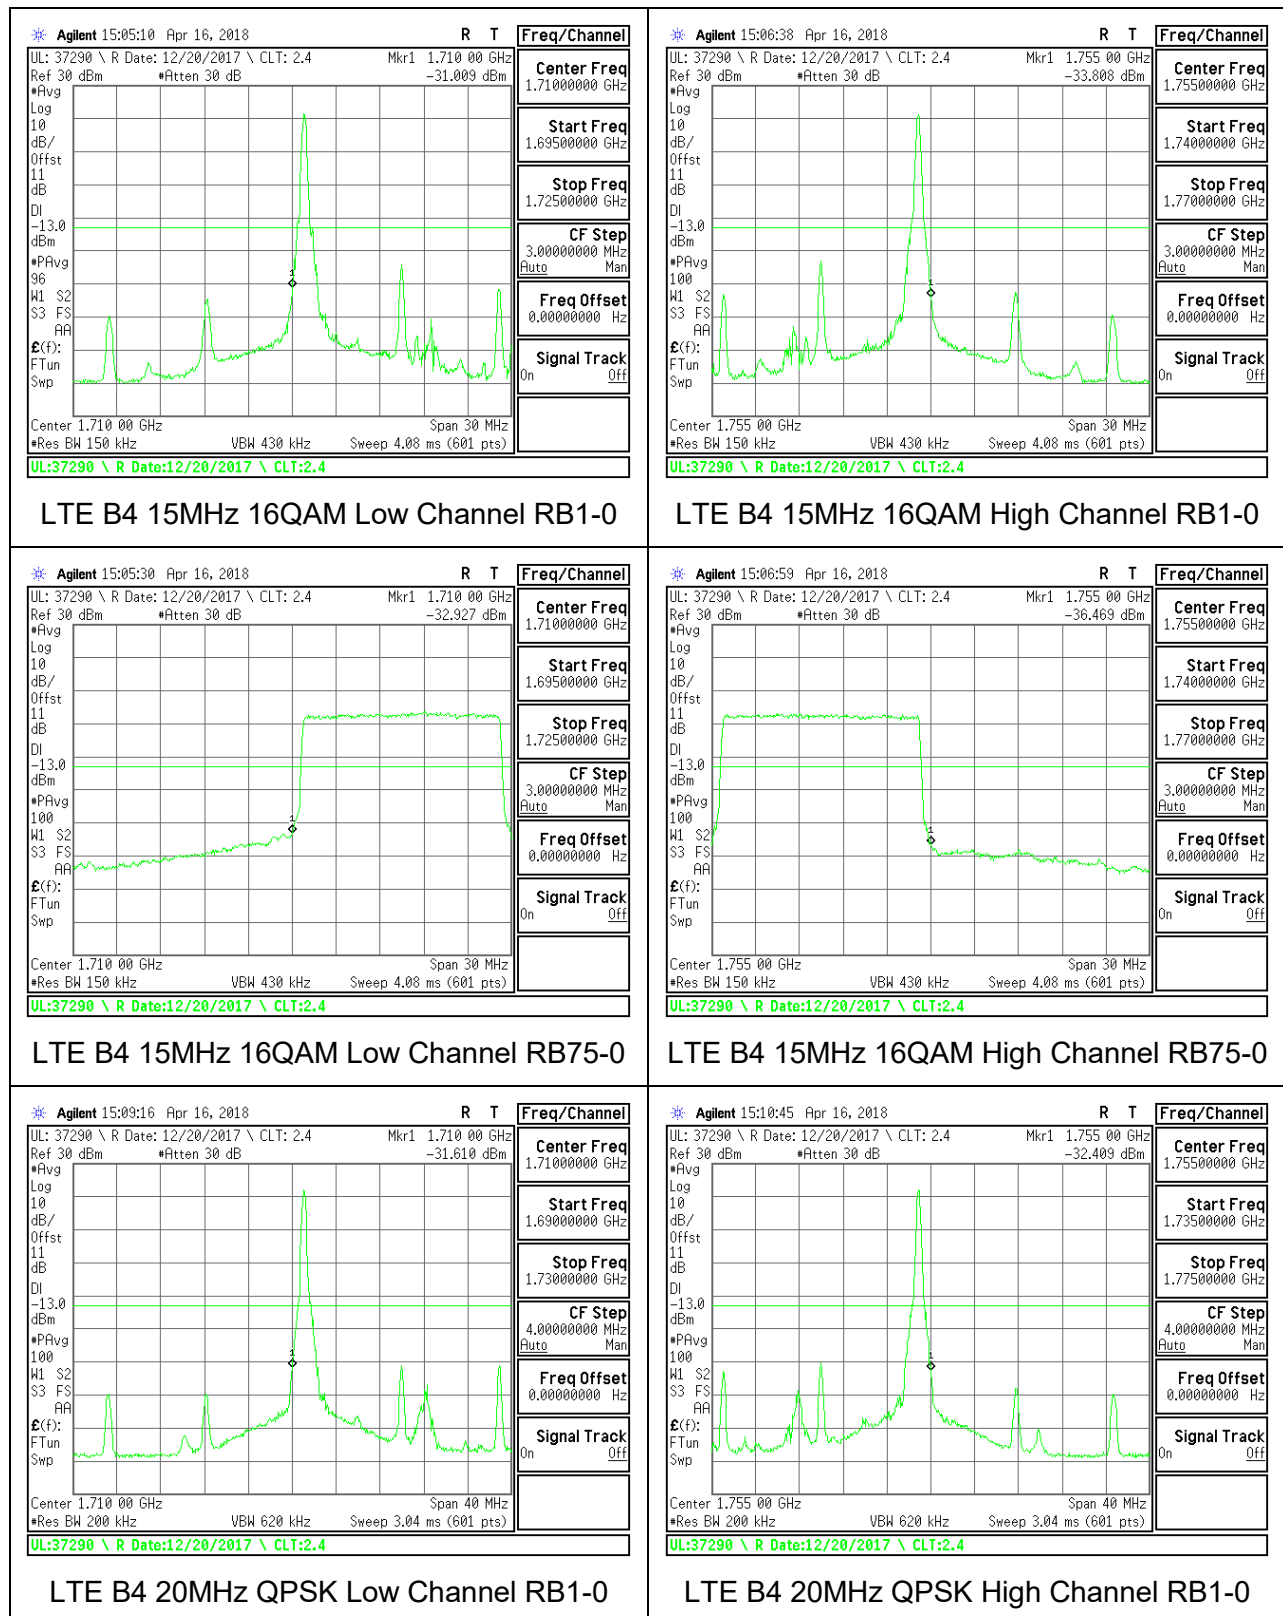


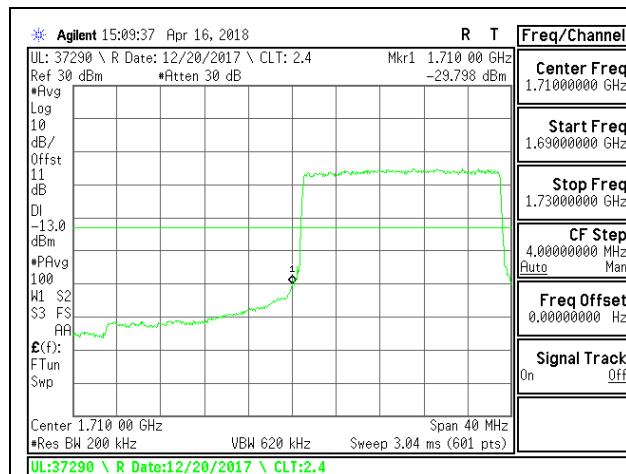


LTE B4 20MHz QPSK Low Channel RB100-0

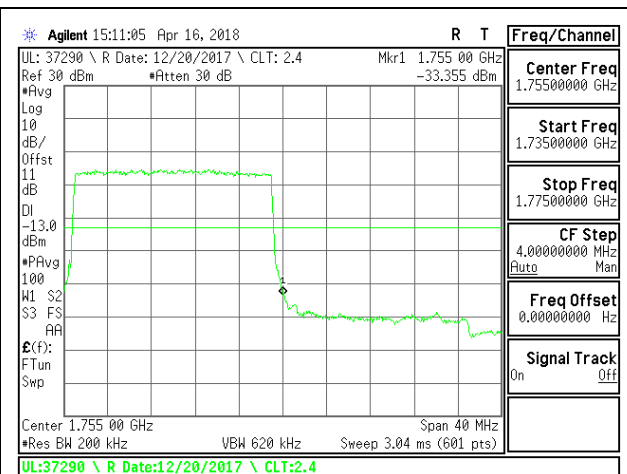


LTE B4 20MHz QPSK High Channel RB100-0

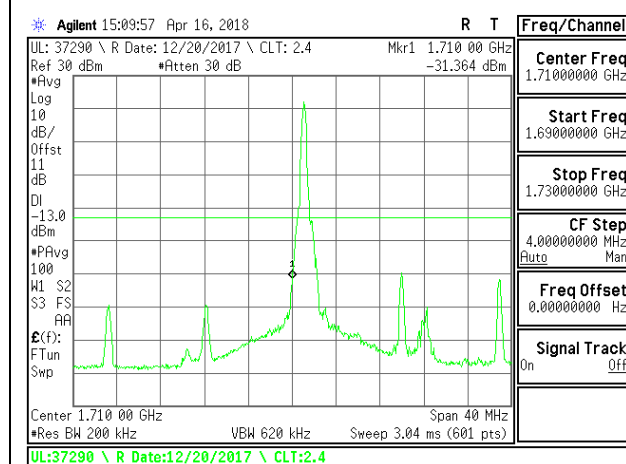


LTE B4 20MHz 16QAM Low Channel RB1-0

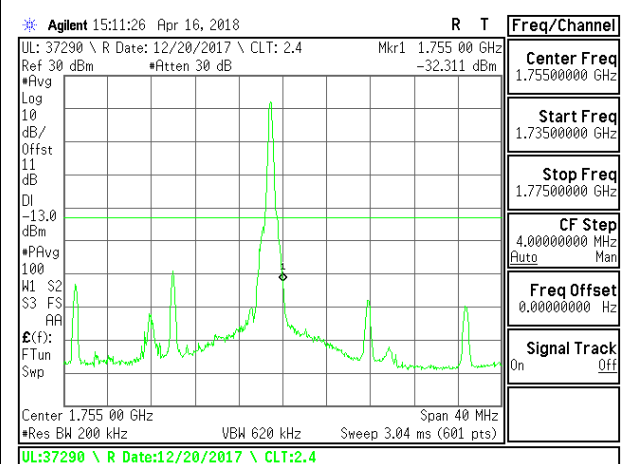

LTE B4 20MHz 16QAM High Channel RB1-0

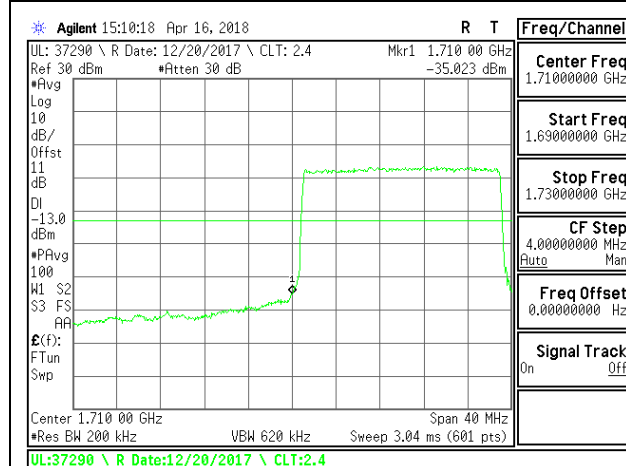



LTE B4 20MHz 16QAM Low Channel RB100-0

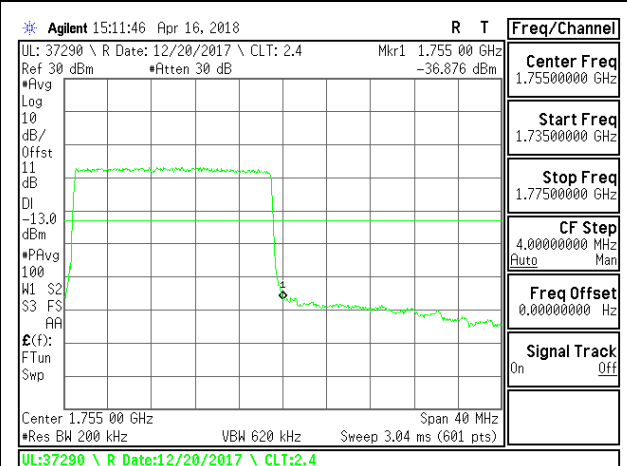


LTE B4 20MHz 16QAM High Channel RB100-0


8.2.7. LTE BAND 5 BANDEDGE

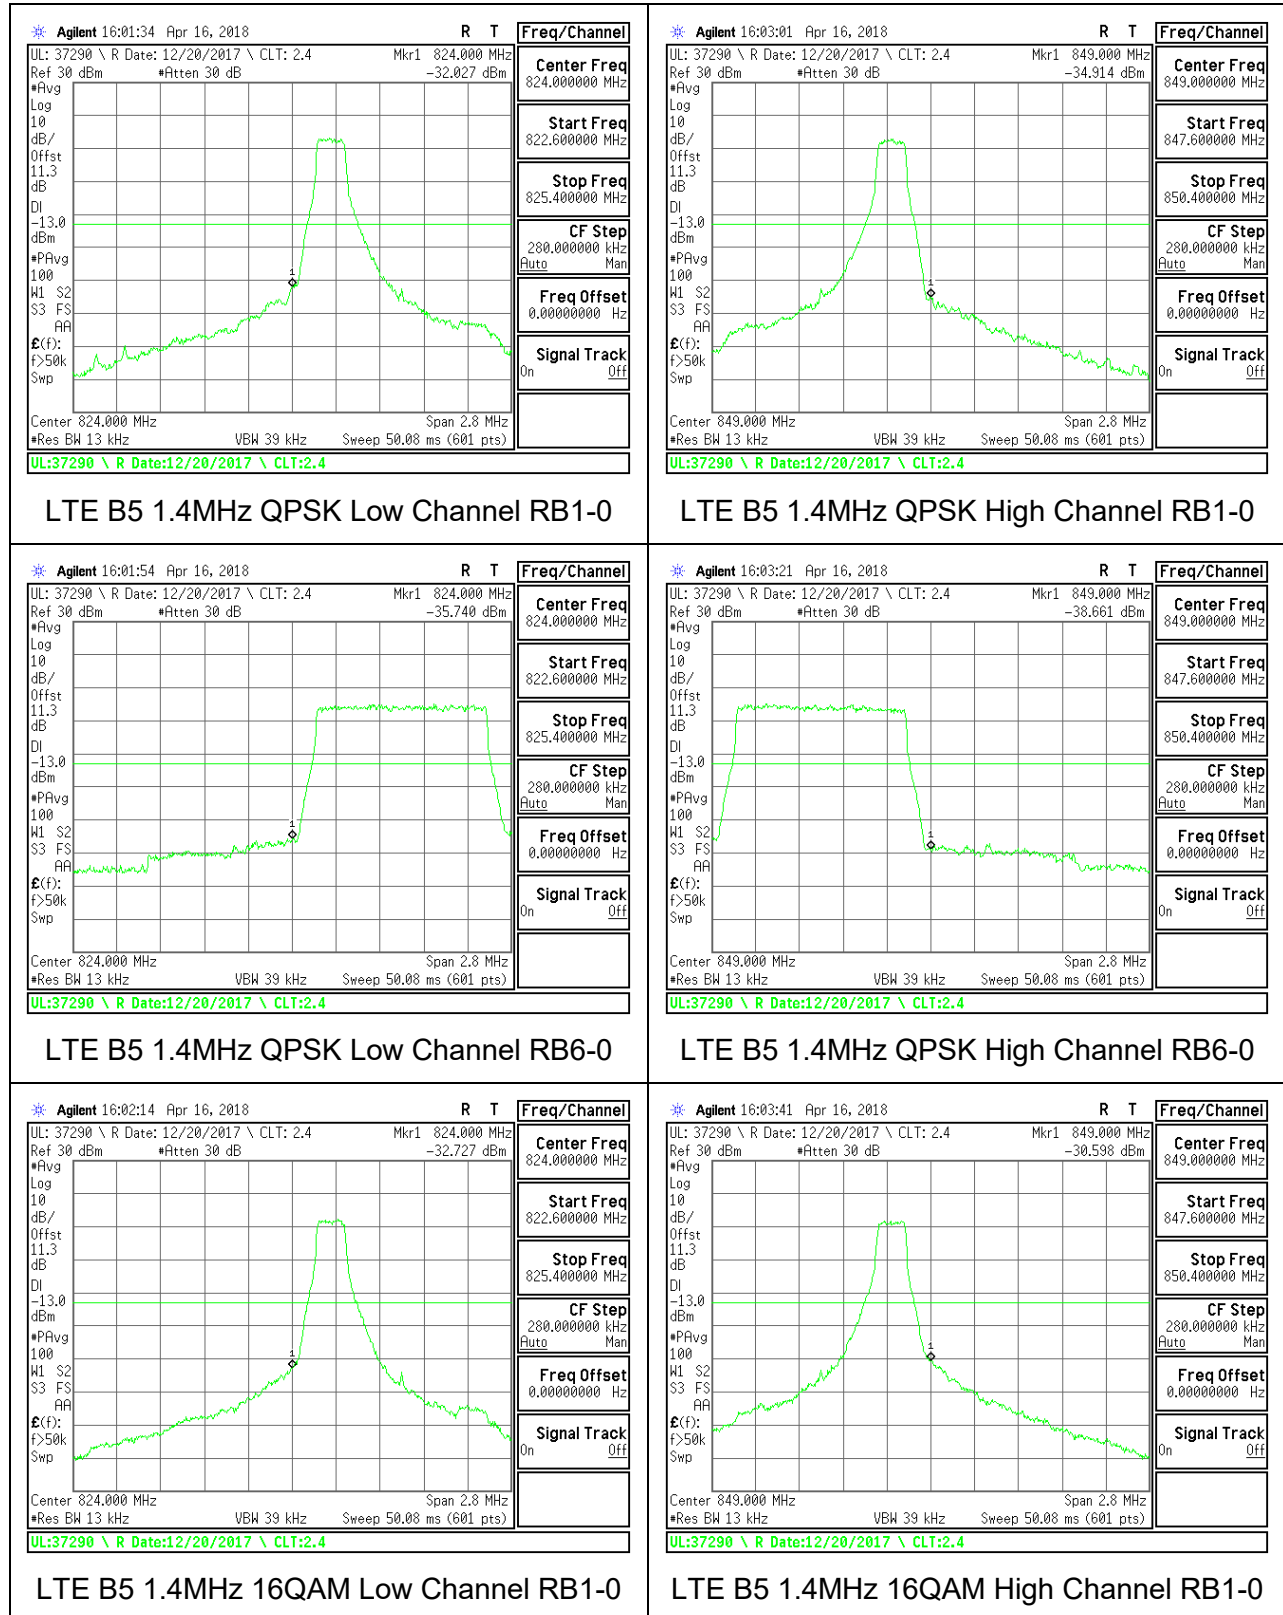

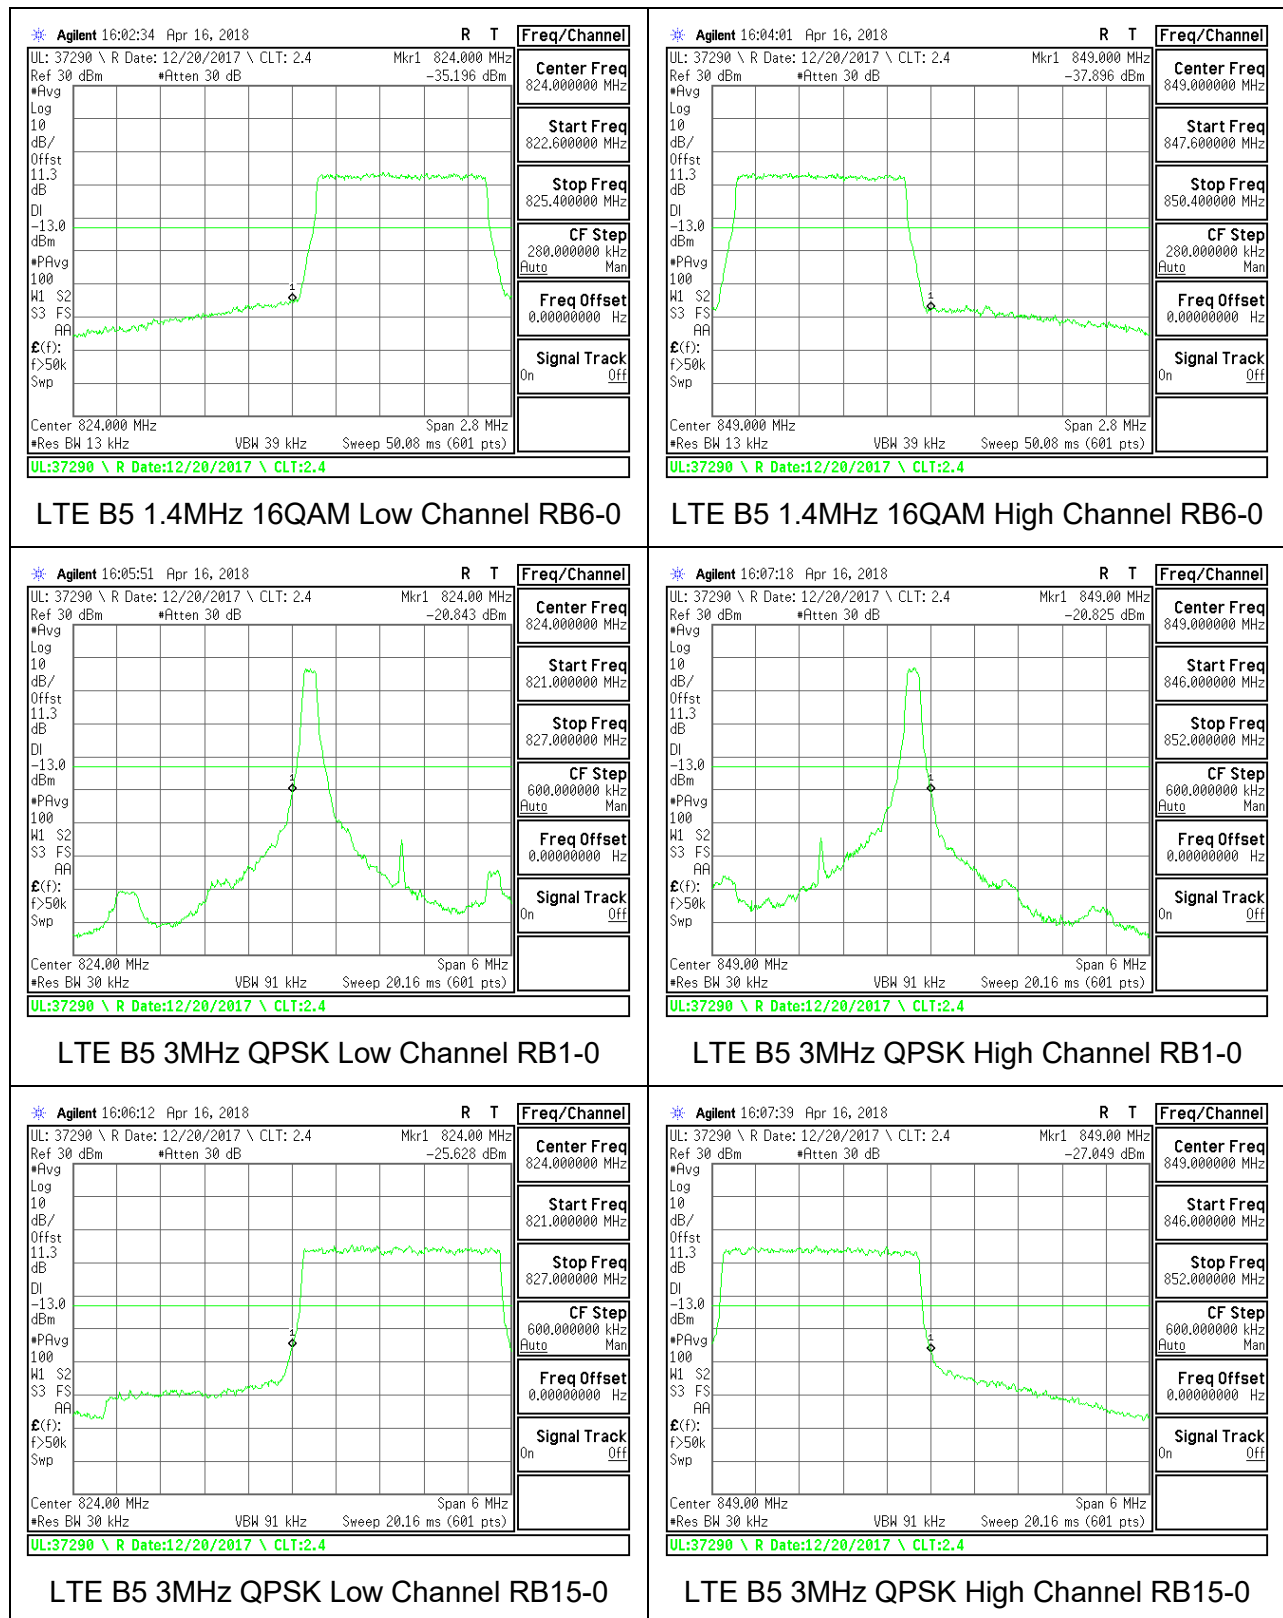


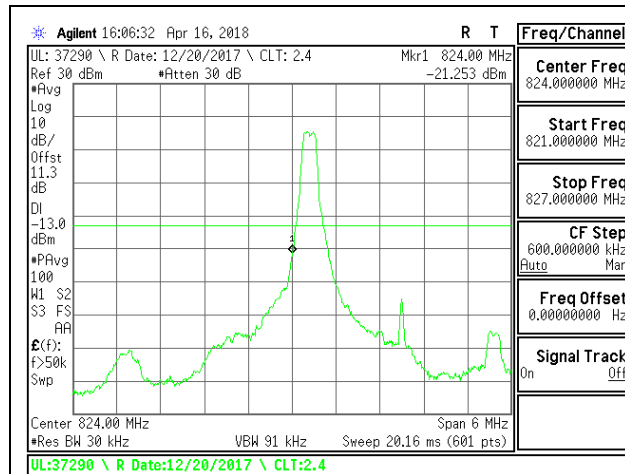


LTE B5 3MHz 16QAM Low Channel RB1-0

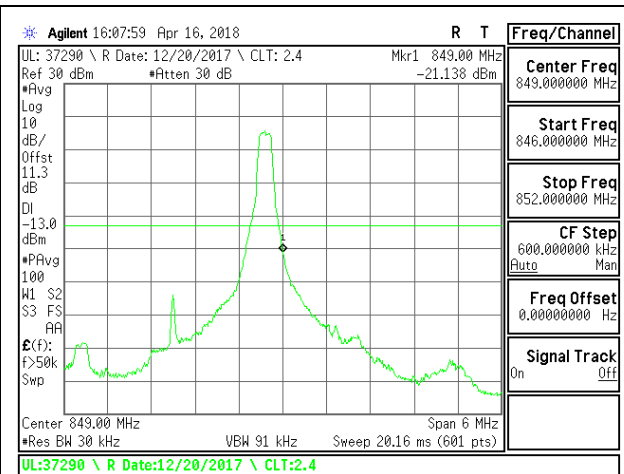


LTE B5 3MHz 16QAM High Channel RB1-0

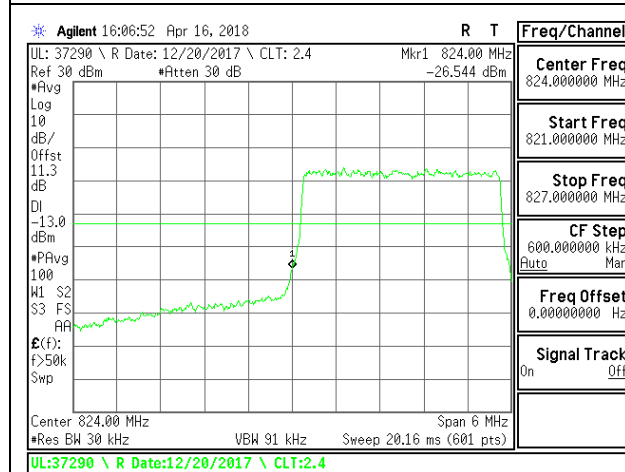


LTE B5 3MHz 16QAM Low Channel RB15-0

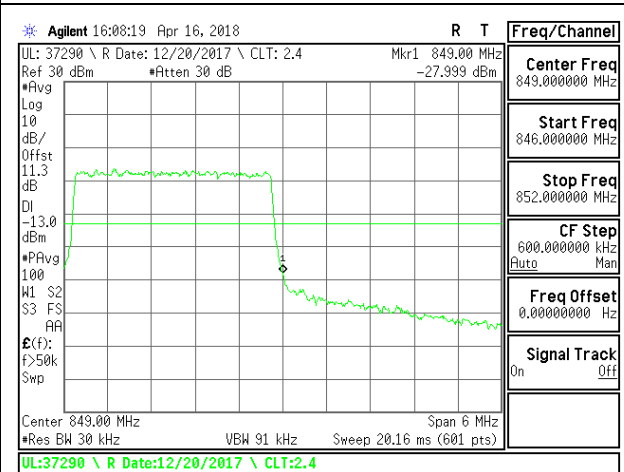


LTE B5 3MHz 16QAM High Channel RB15-0

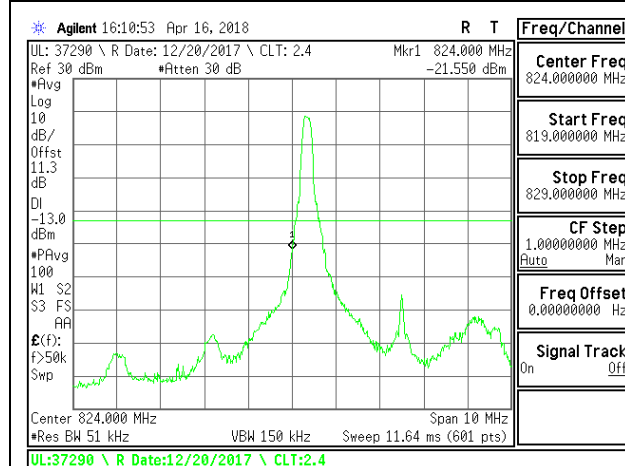


LTE B5 5MHz QPSK Low Channel RB1-0

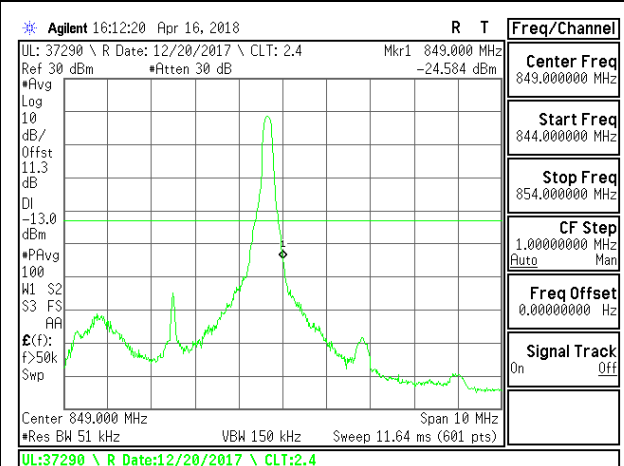


LTE B5 5MHz QPSK High Channel RB1-0

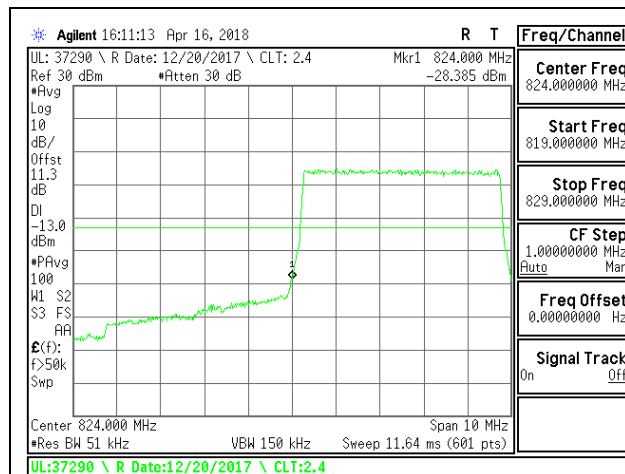


LTE B5 5MHz QPSK Low Channel RB25-0

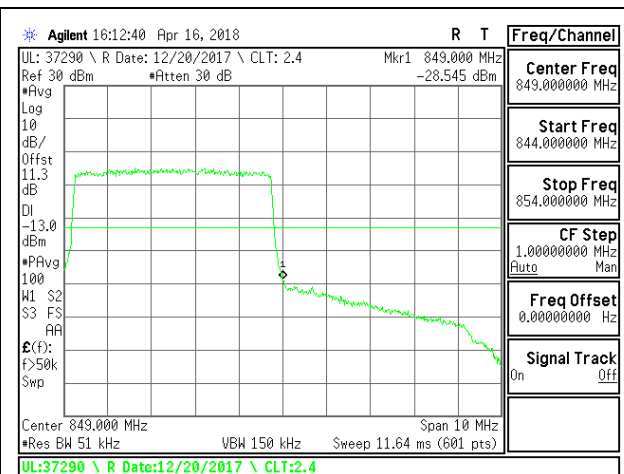


LTE B5 5MHz QPSK High Channel RB25-0

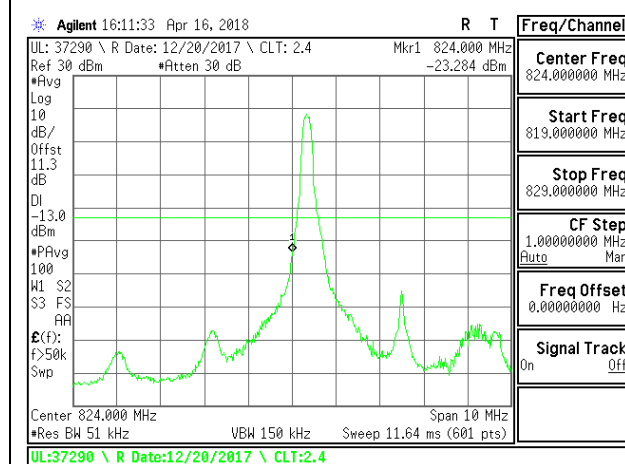


LTE B5 5MHz 16QAM Low Channel RB1-0

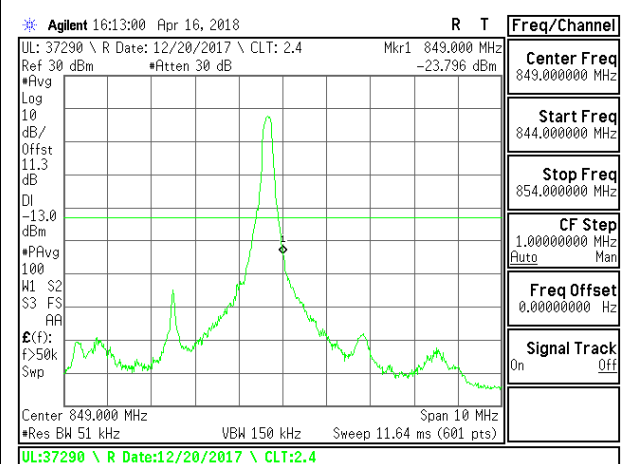


LTE B5 5MHz 16QAM High Channel RB1-0

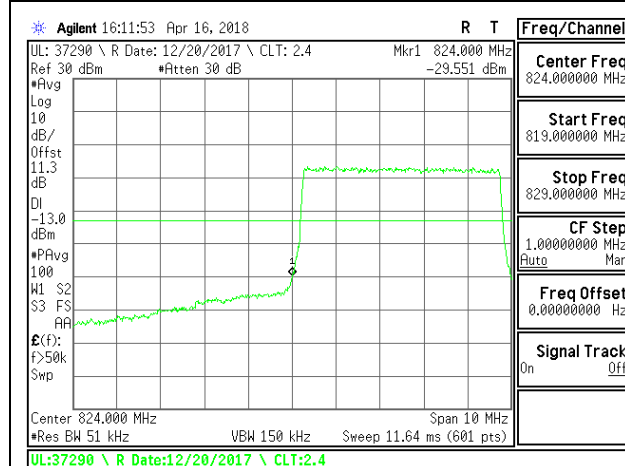


LTE B5 5MHz 16QAM Low Channel RB25-0

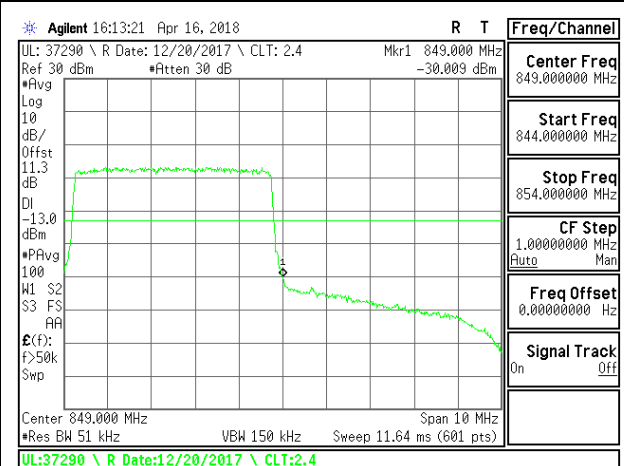



LTE B5 5MHz 16QAM High Channel RB25-0

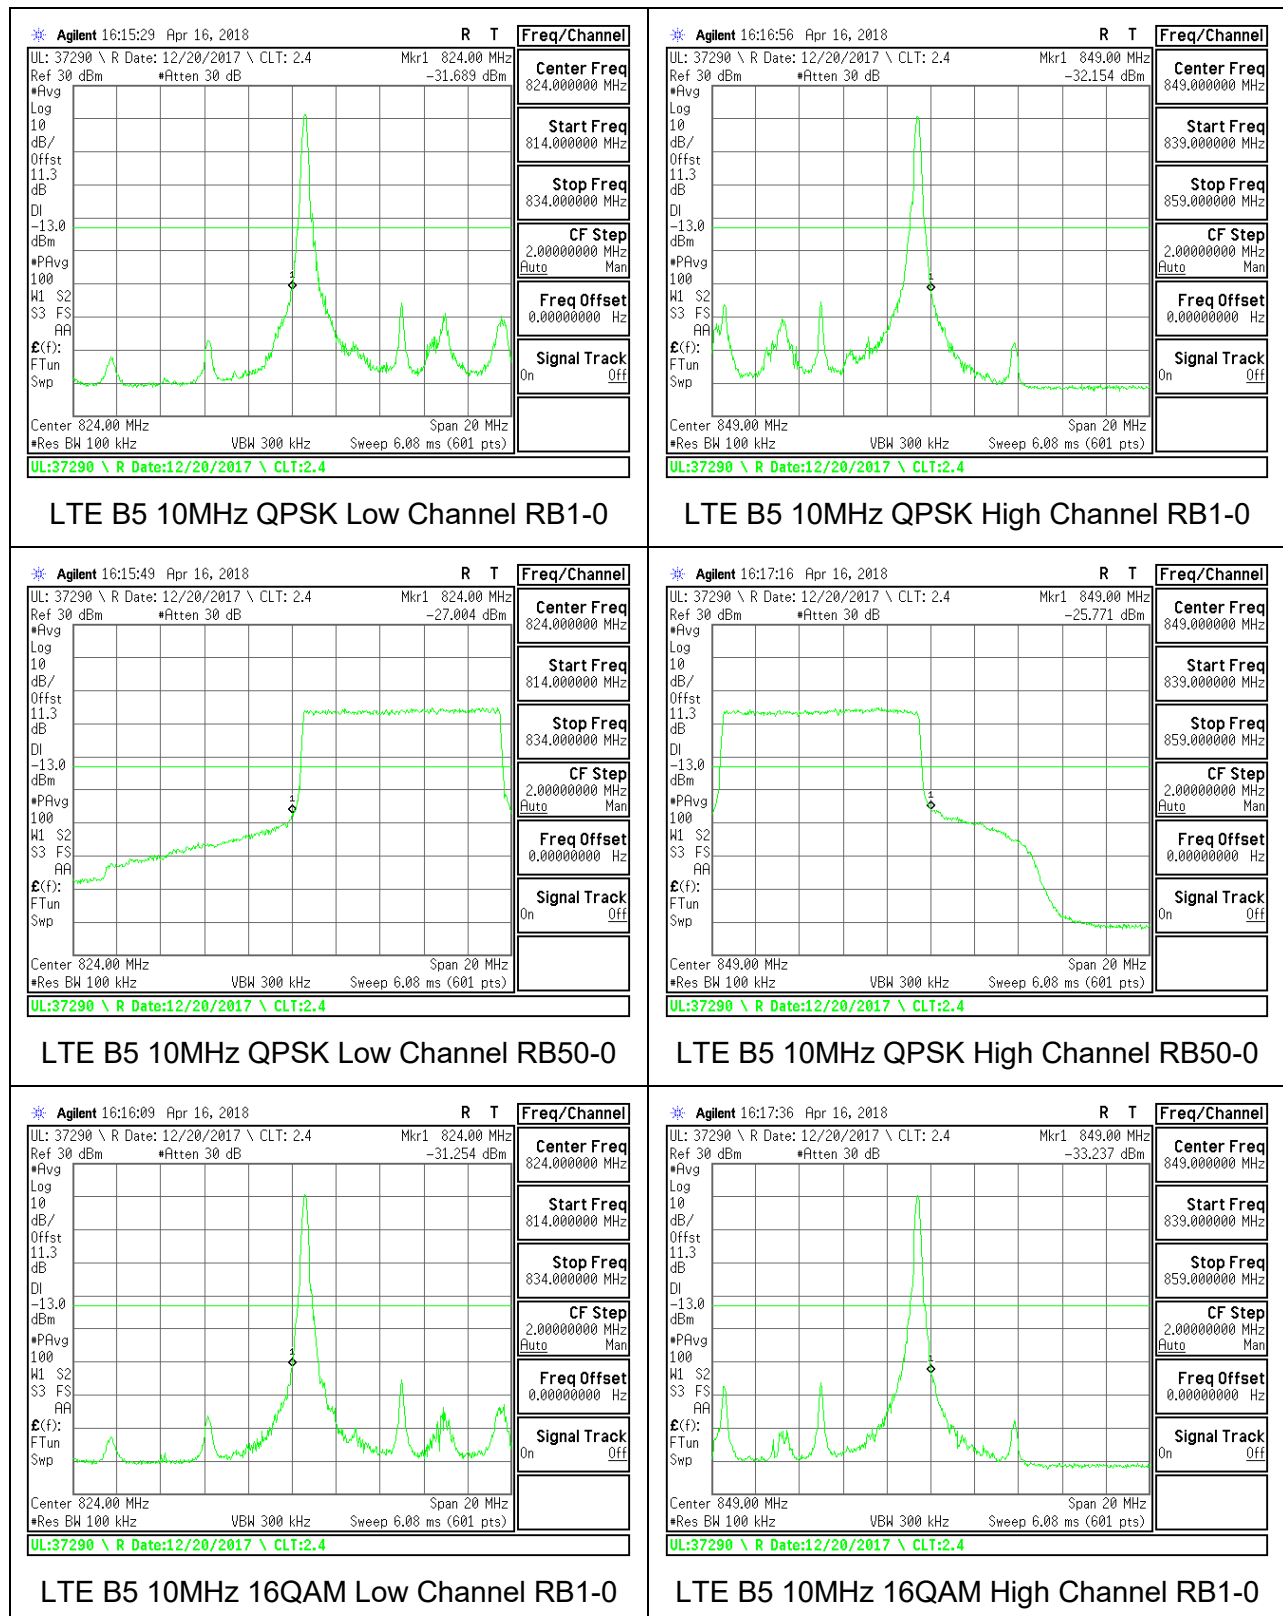


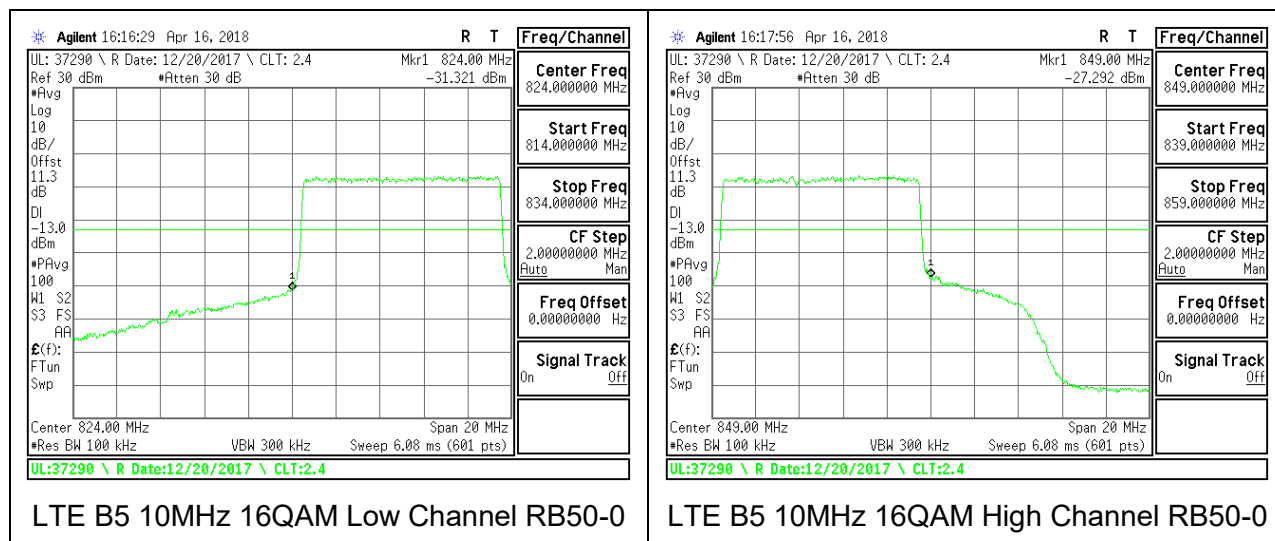



8.2.8. LTE BAND 7 ADJACENT CHANNEL POWER

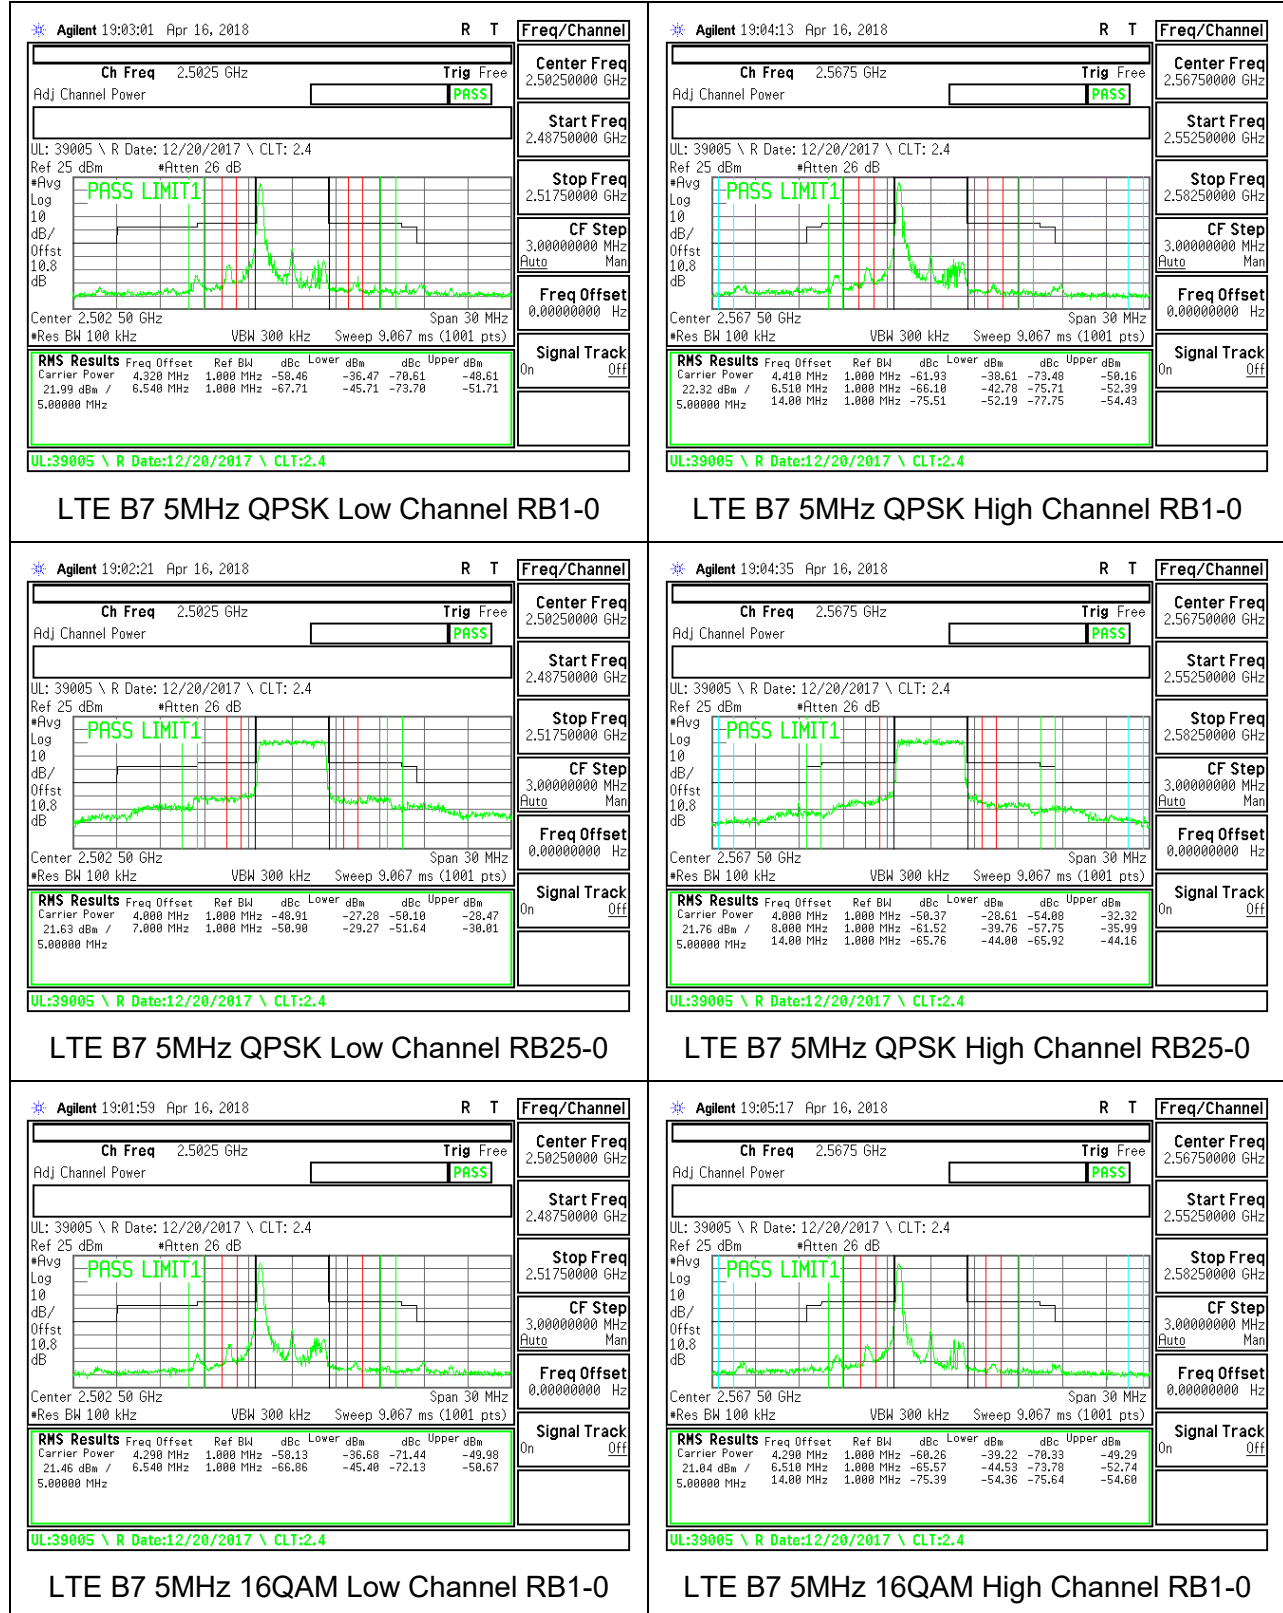


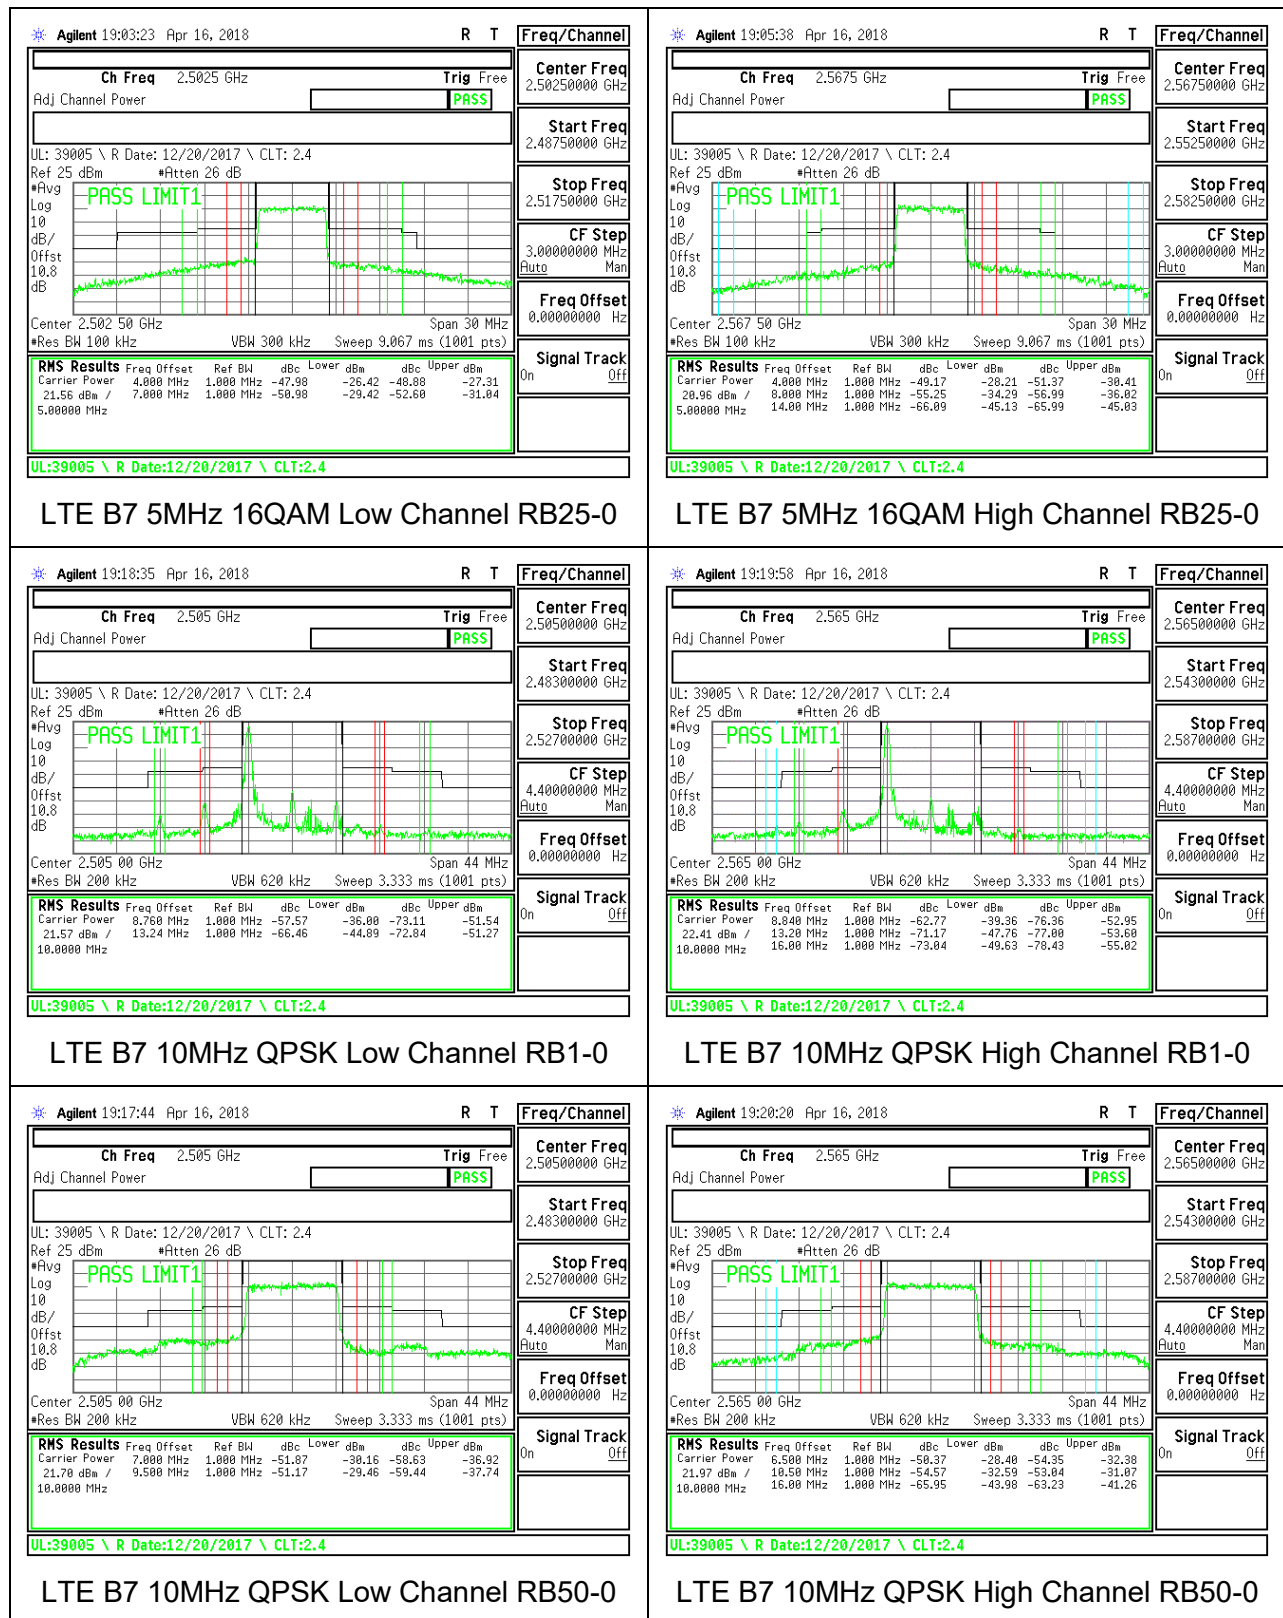

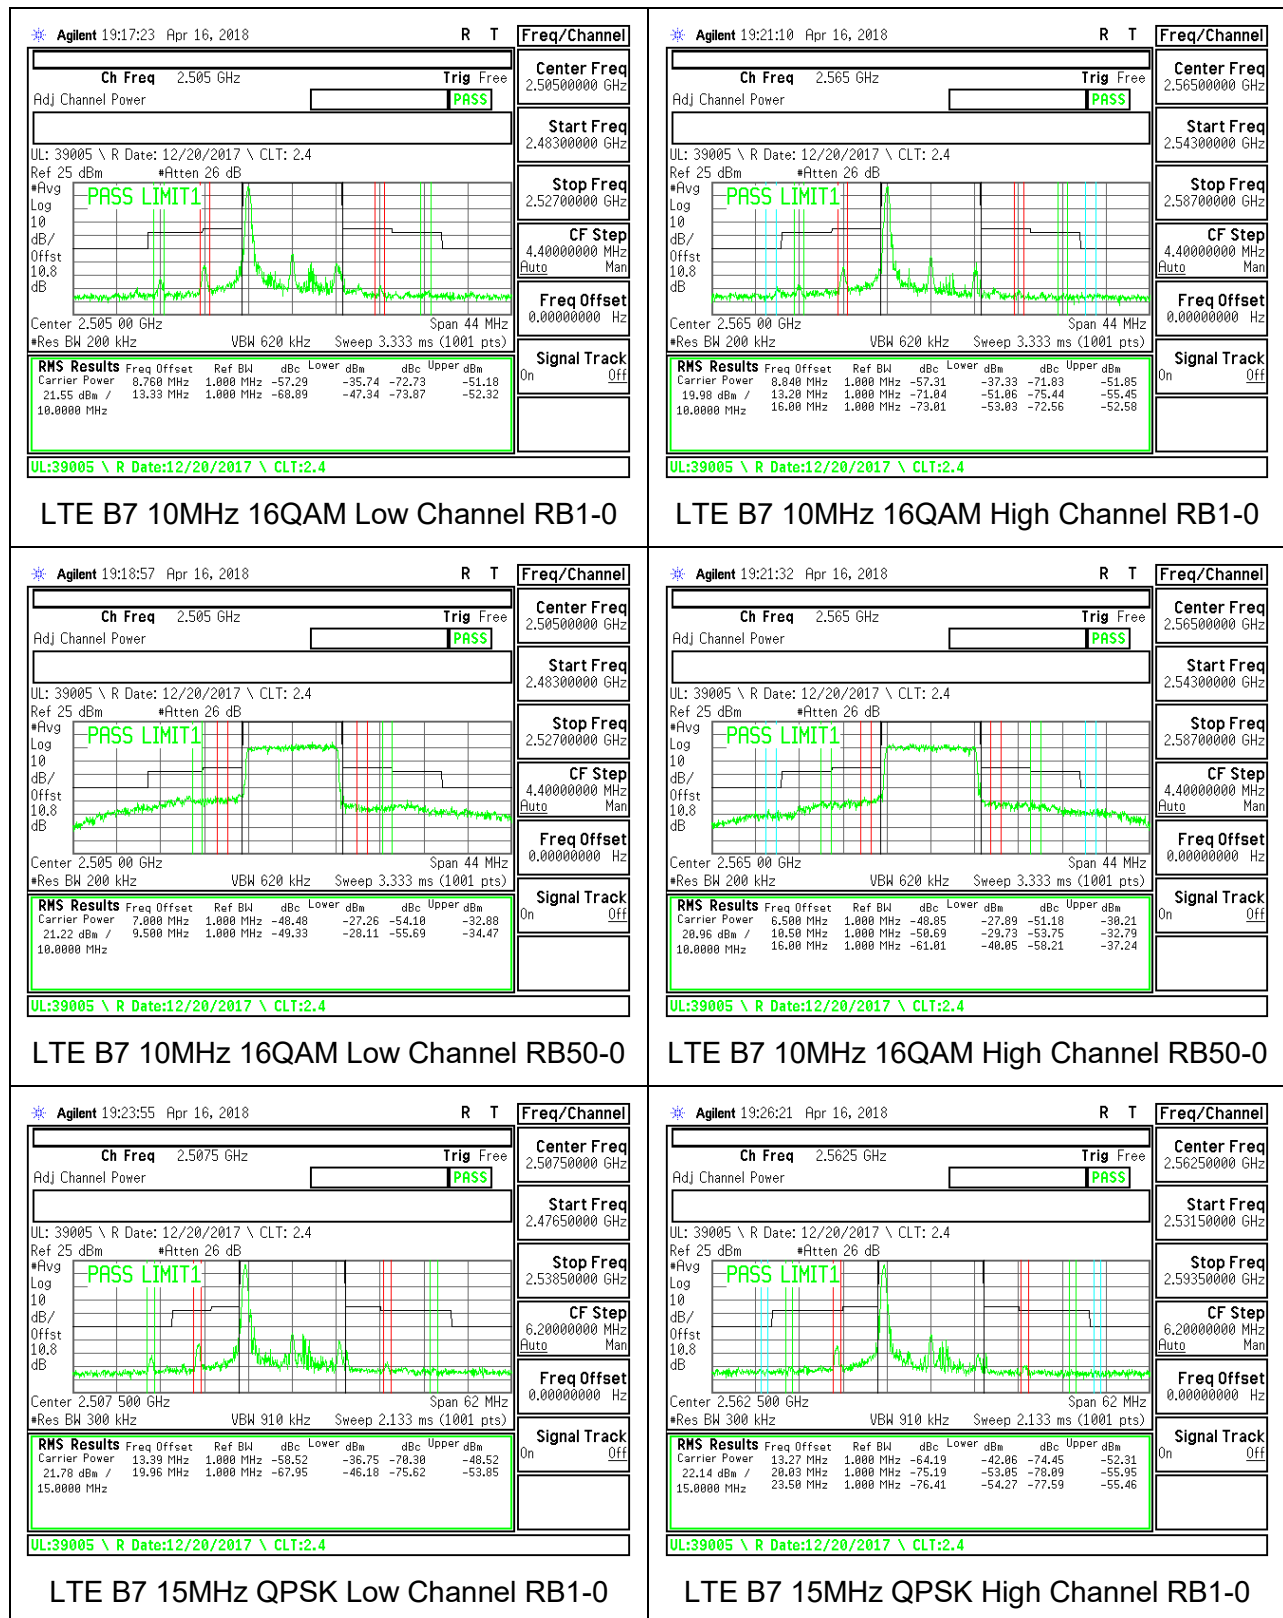


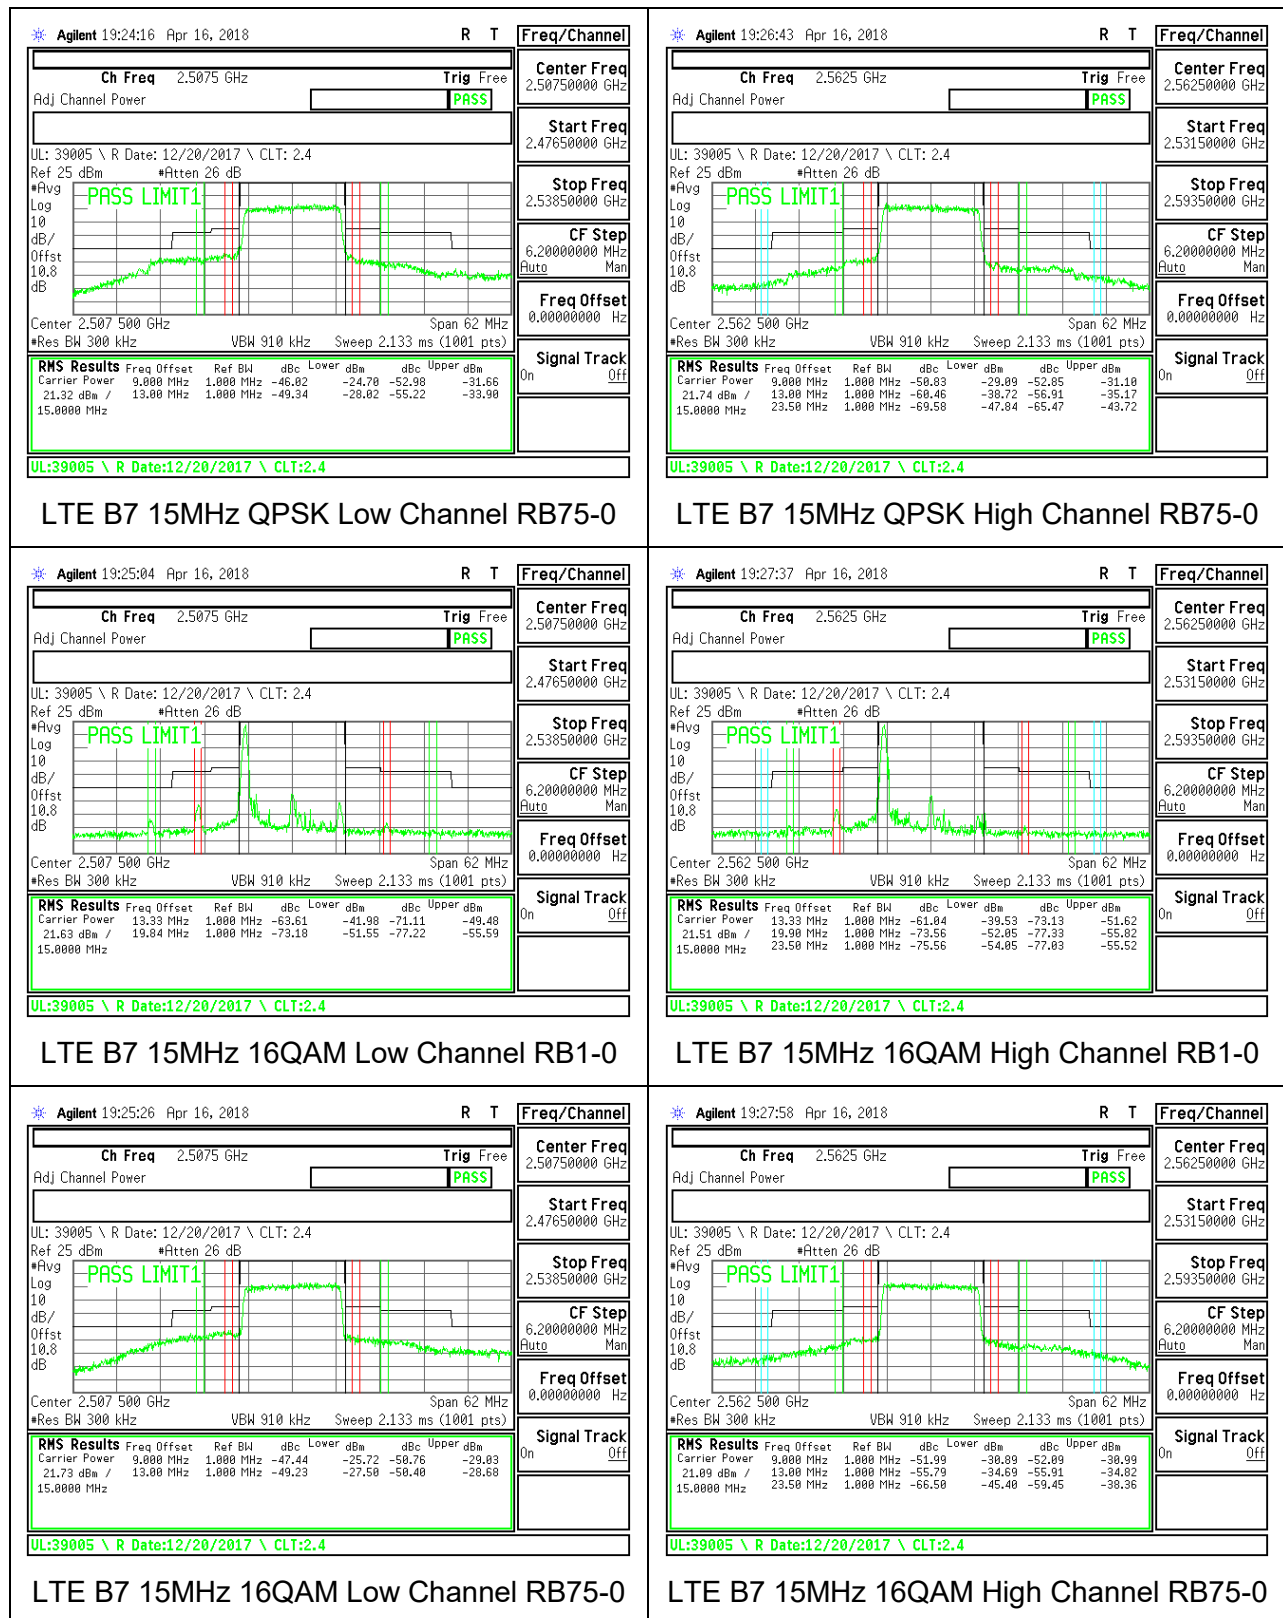


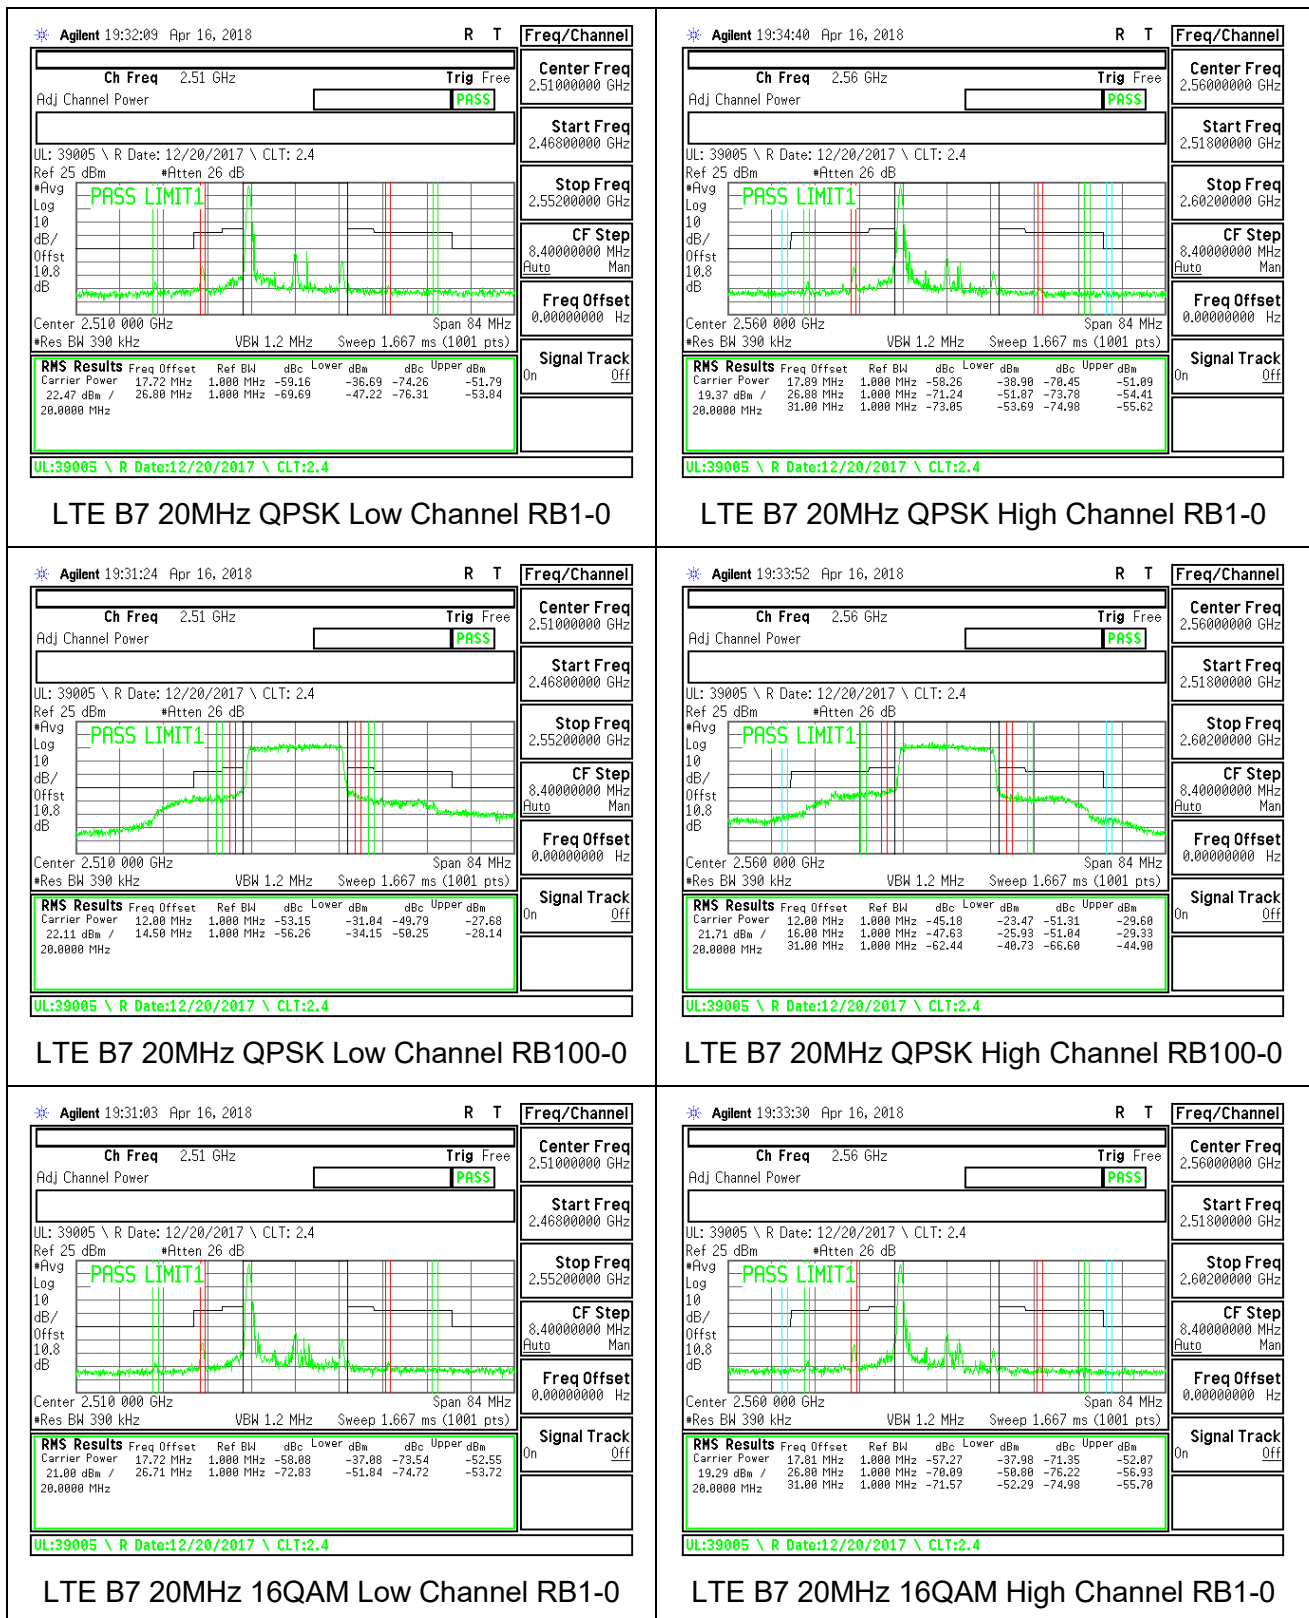


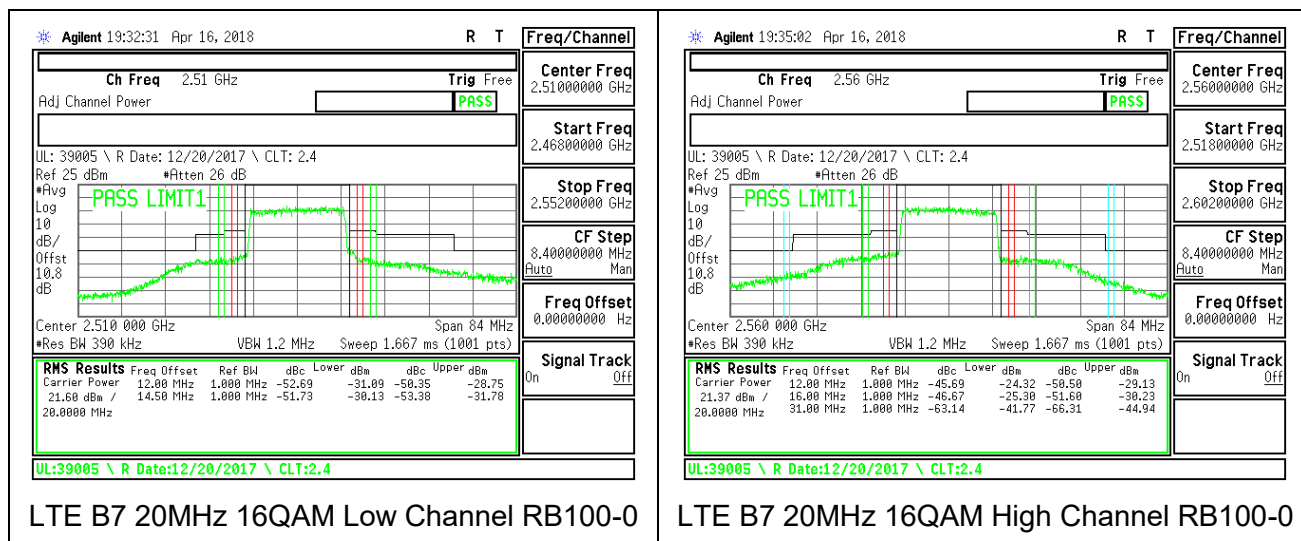


8.2.9. LTE BAND 13 BANDEDGE

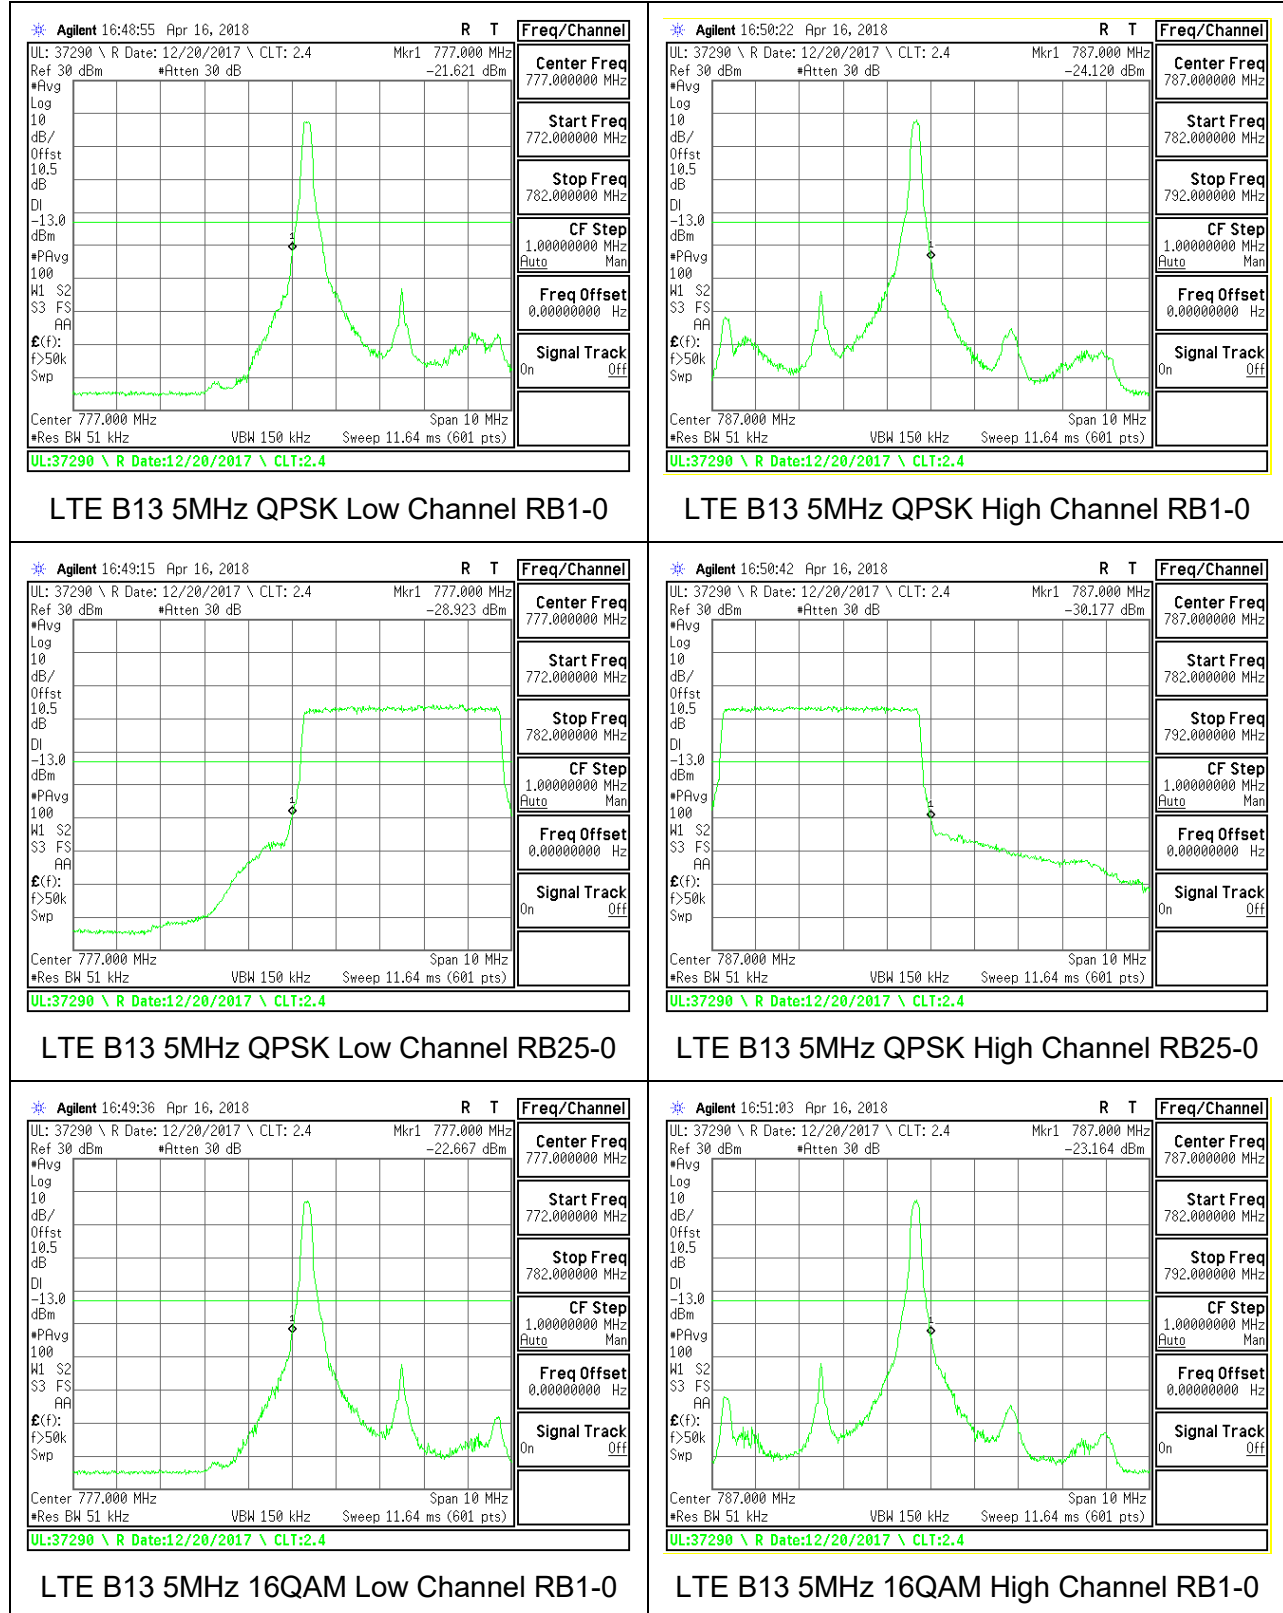


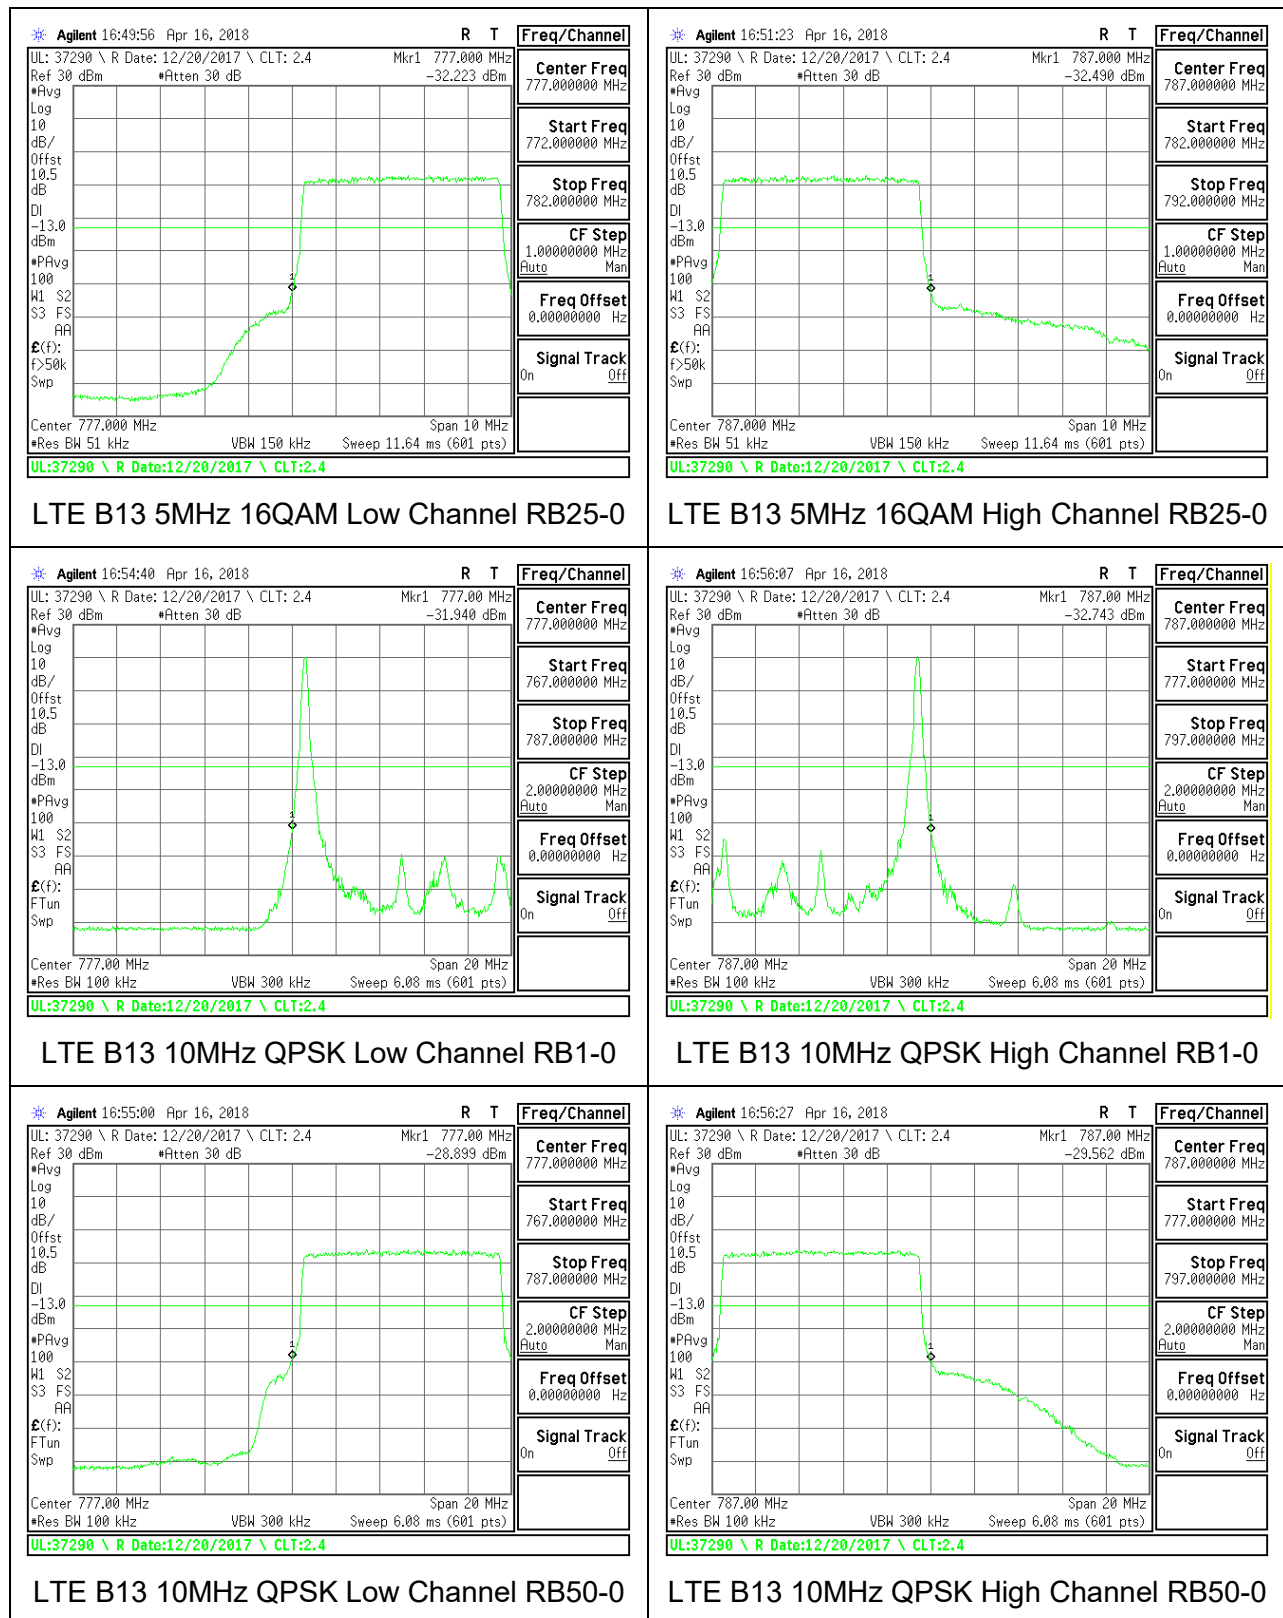


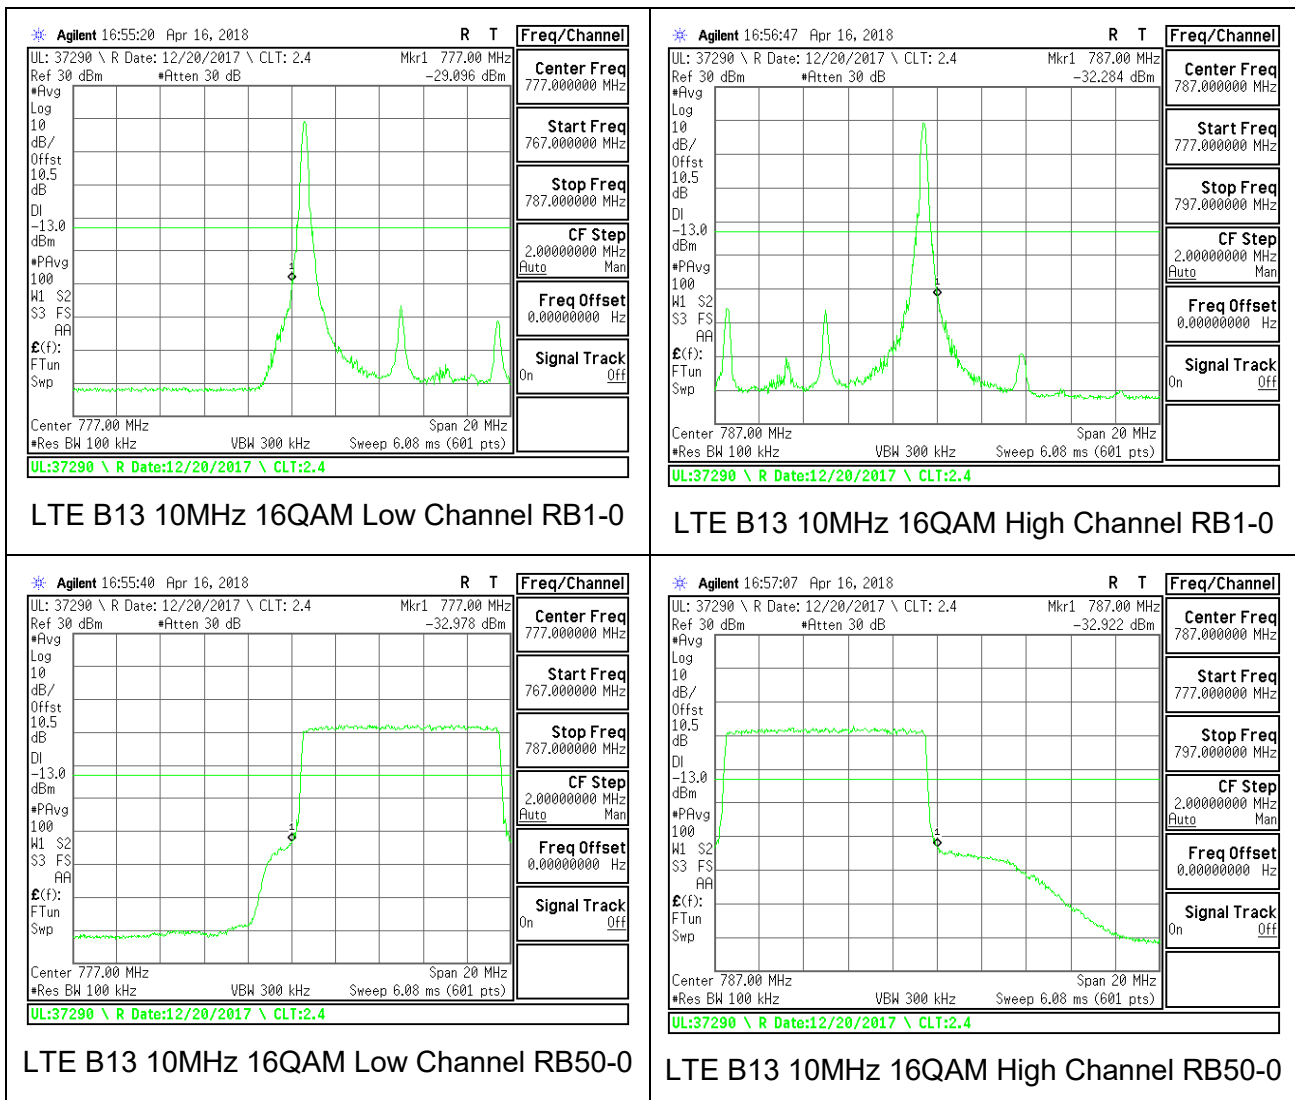


8.2.10. LTE BAND 17 BANDEDGE

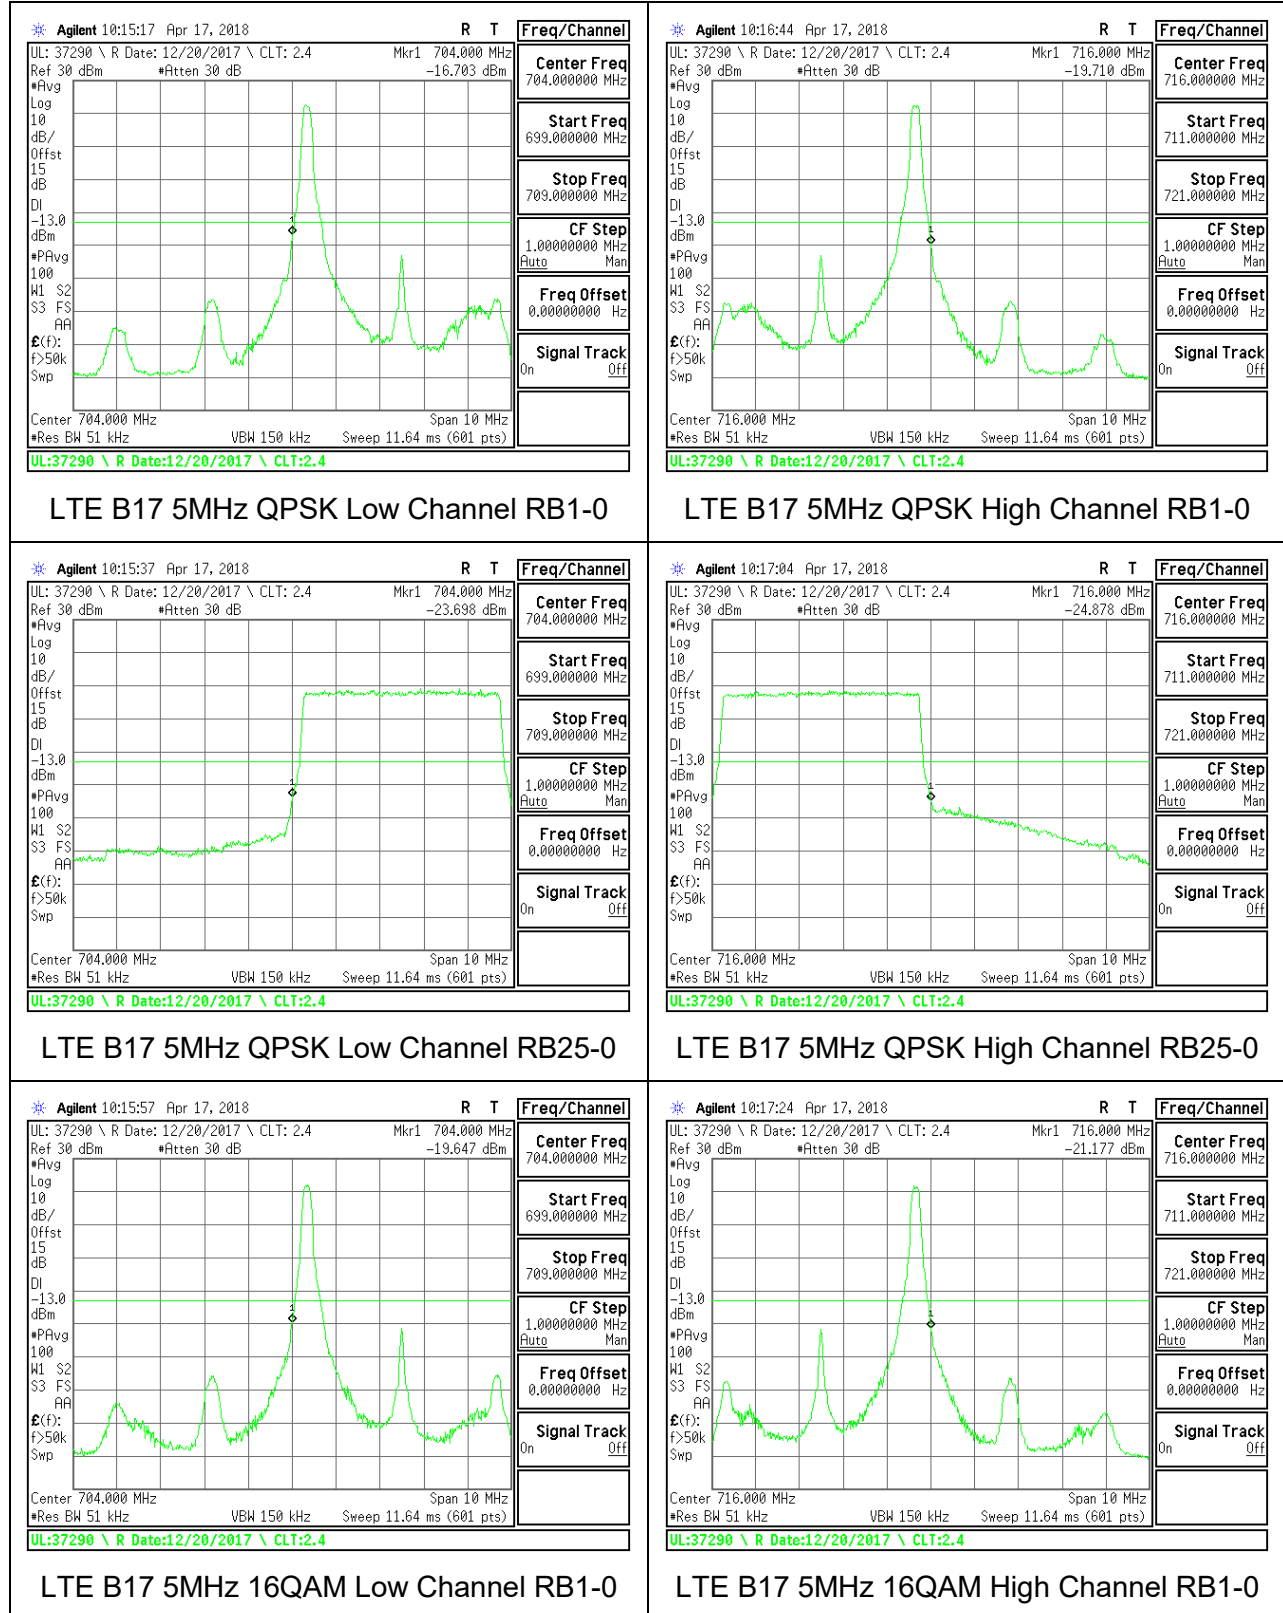


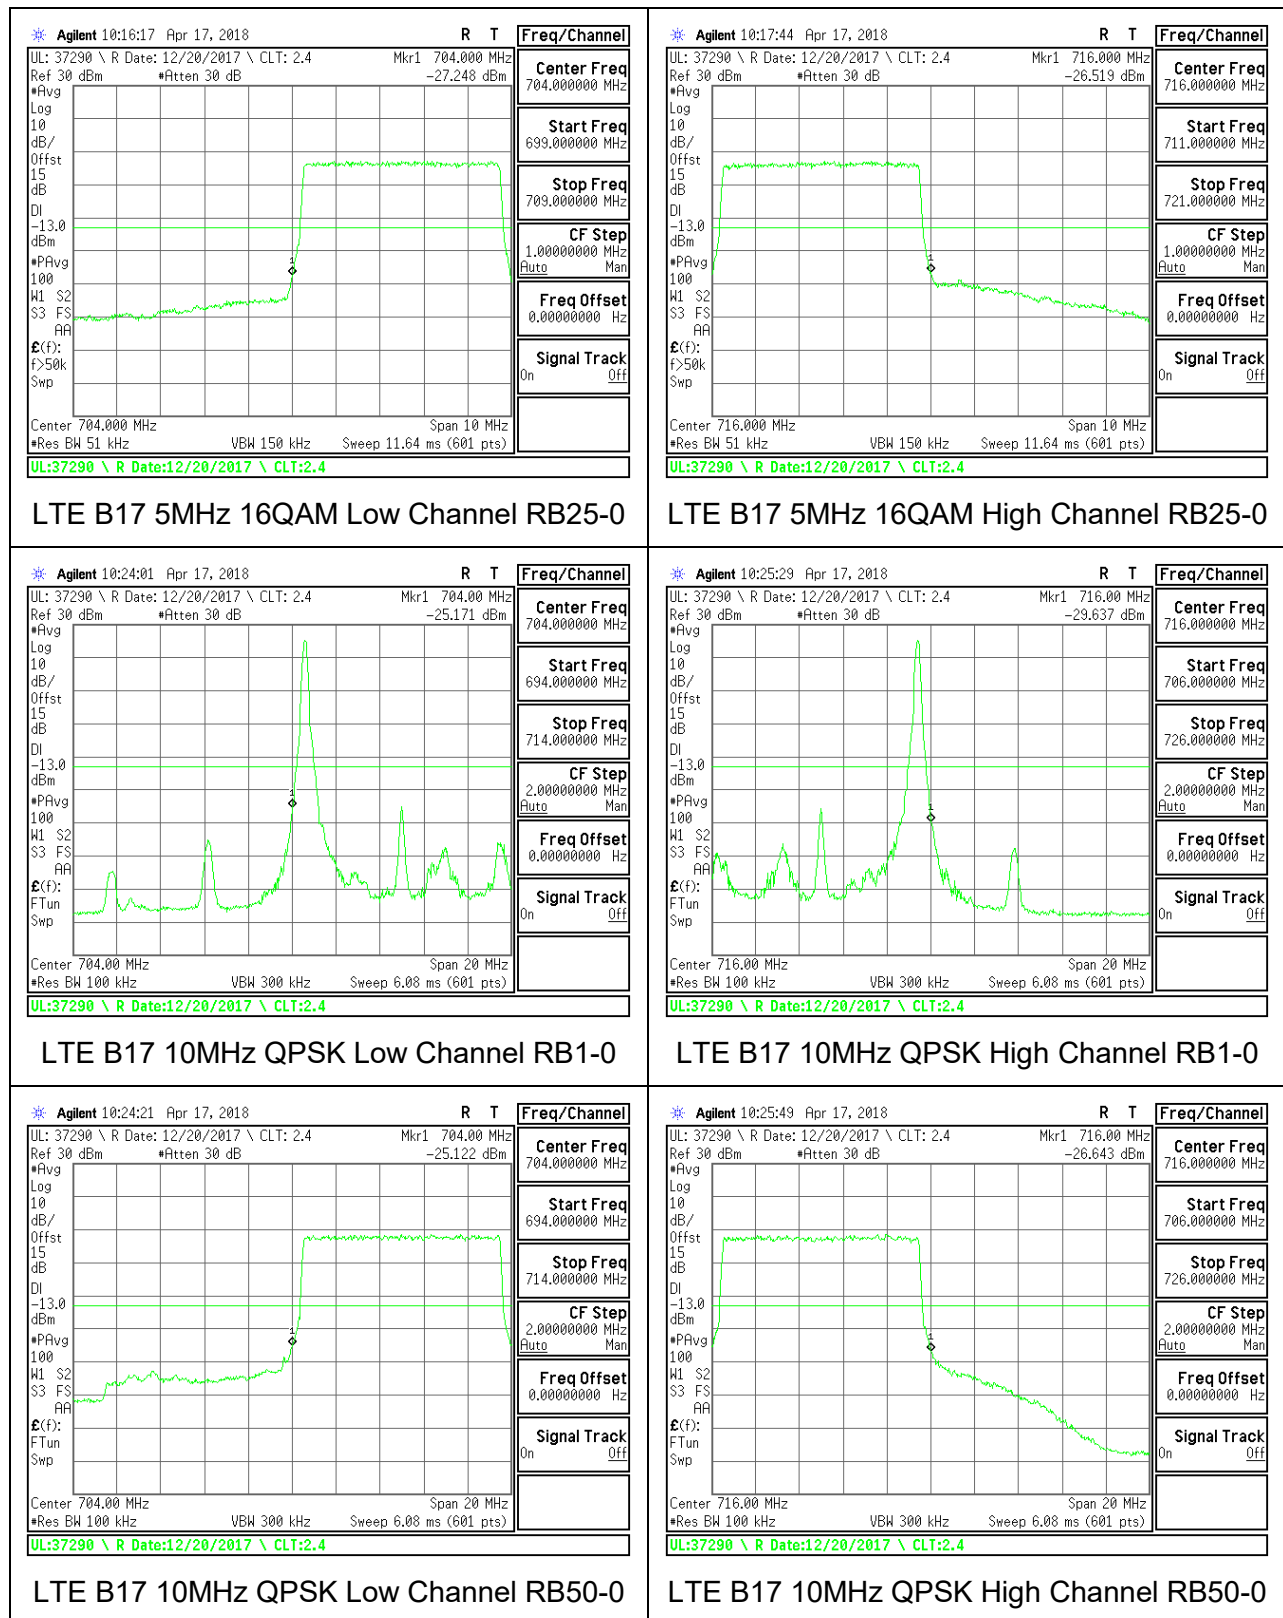


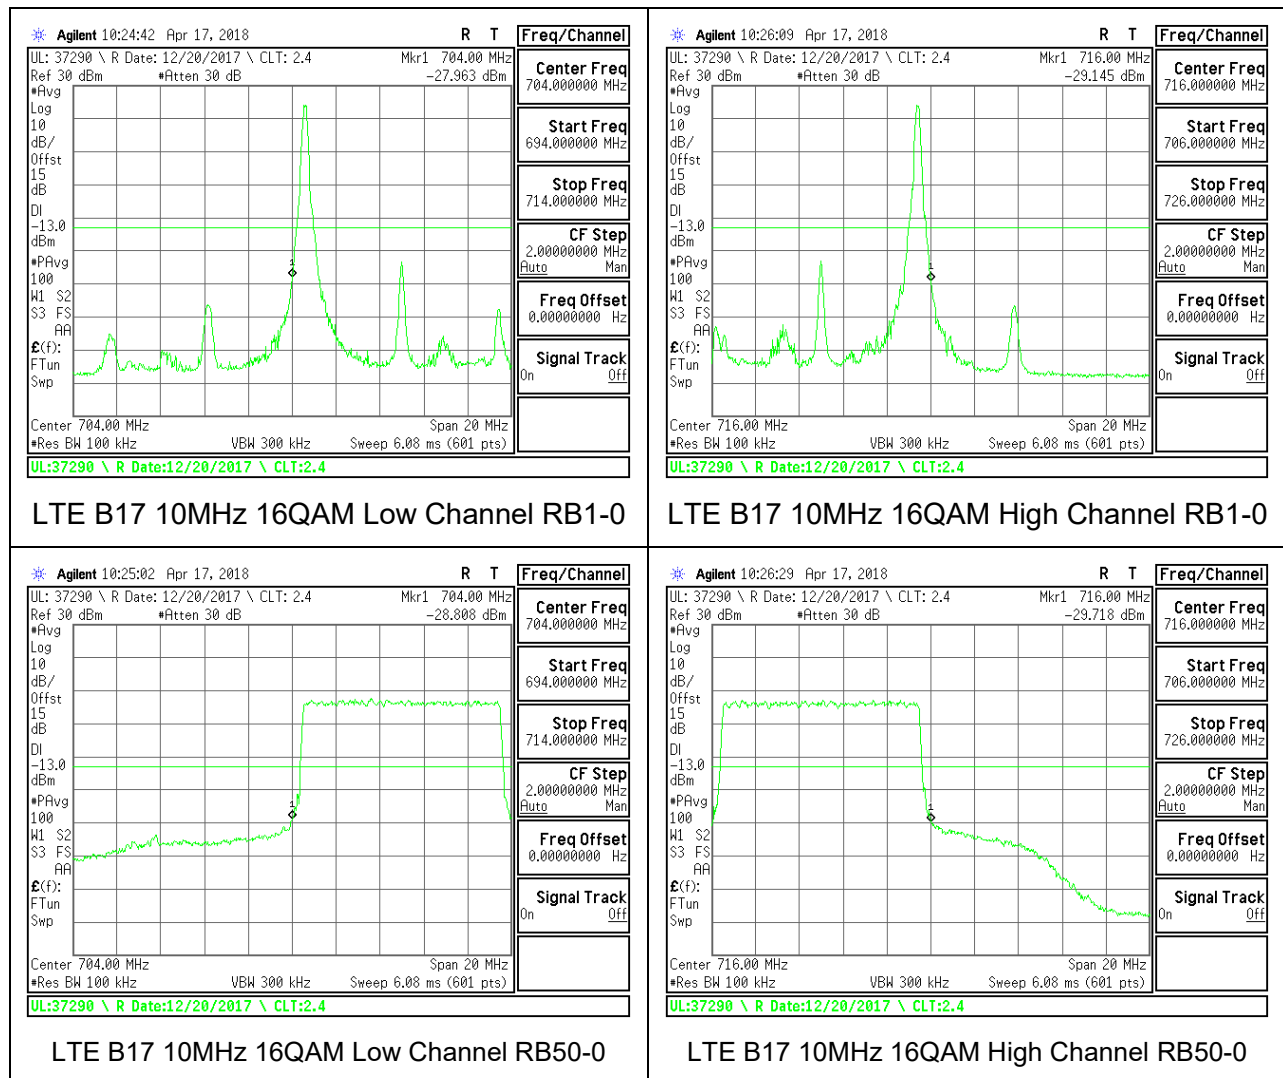


8.2.11. LTE BAND 41 ADJACENT CHANNEL POWER

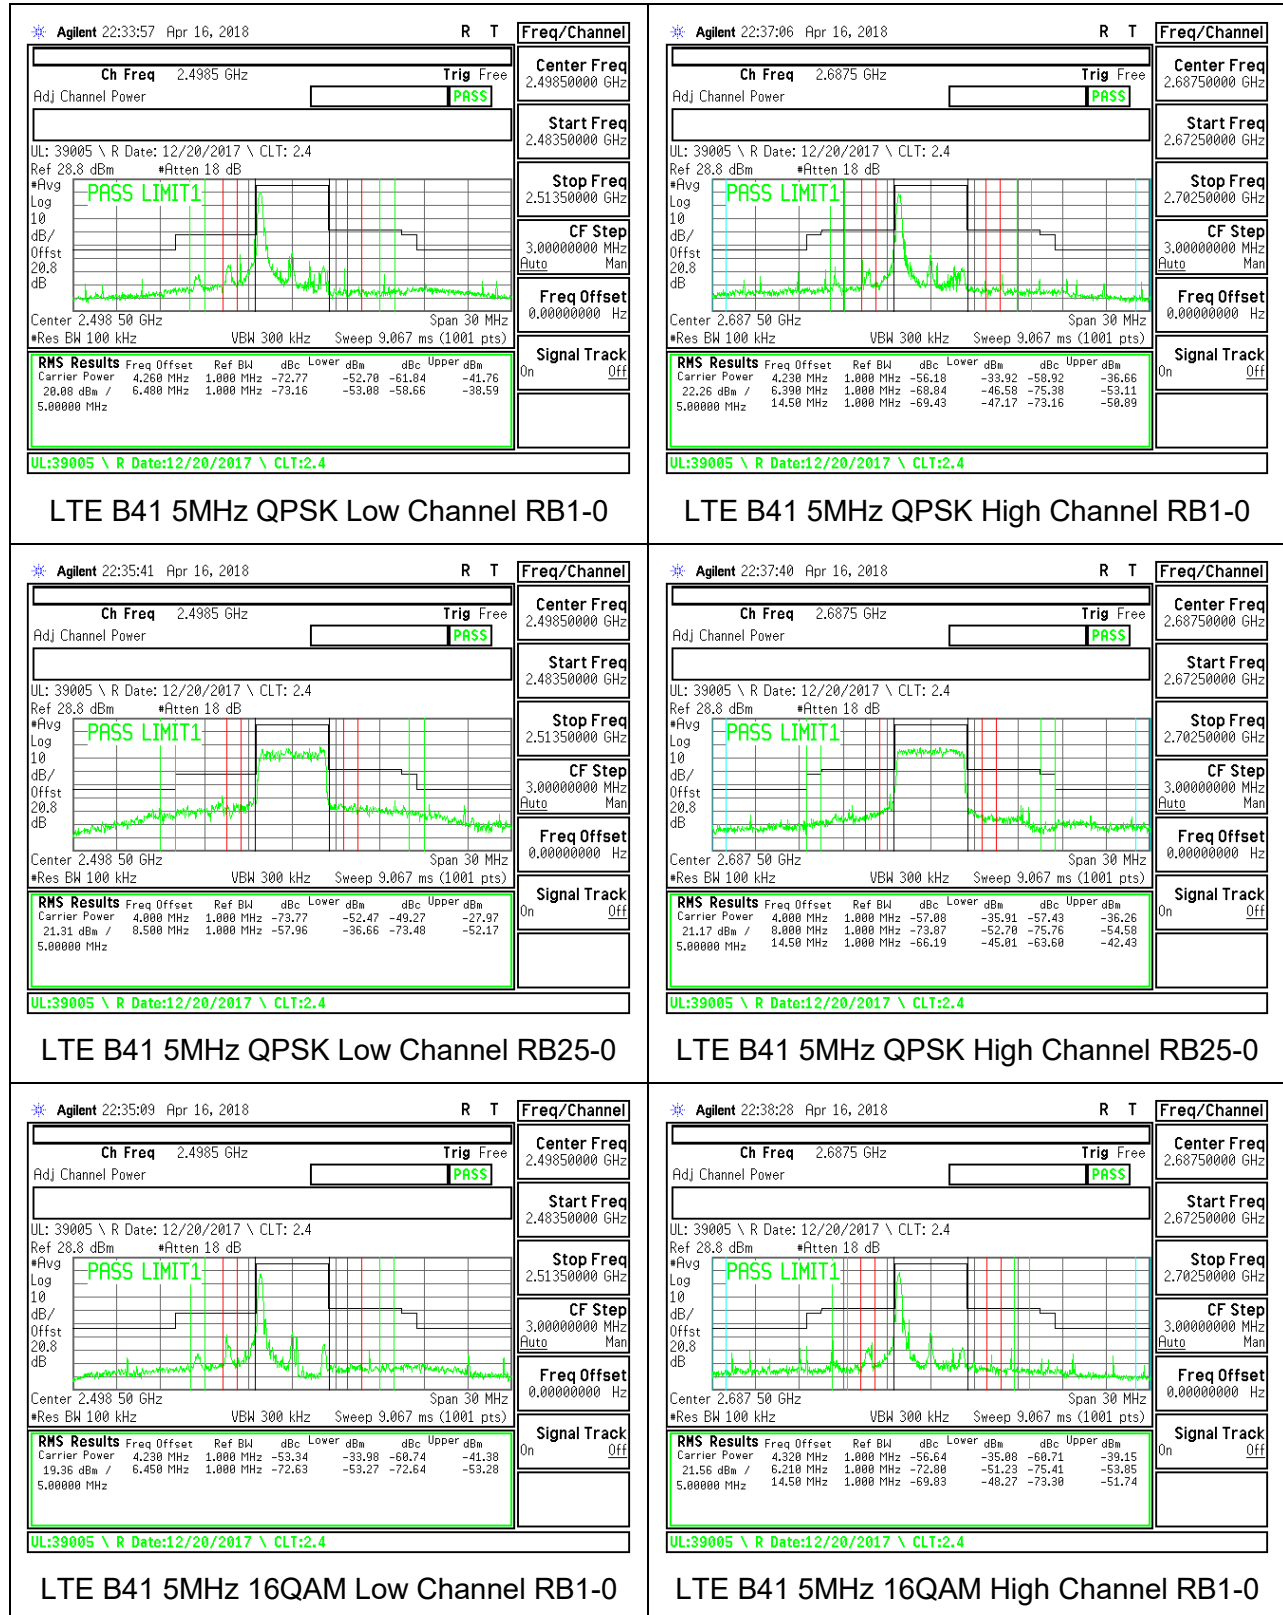

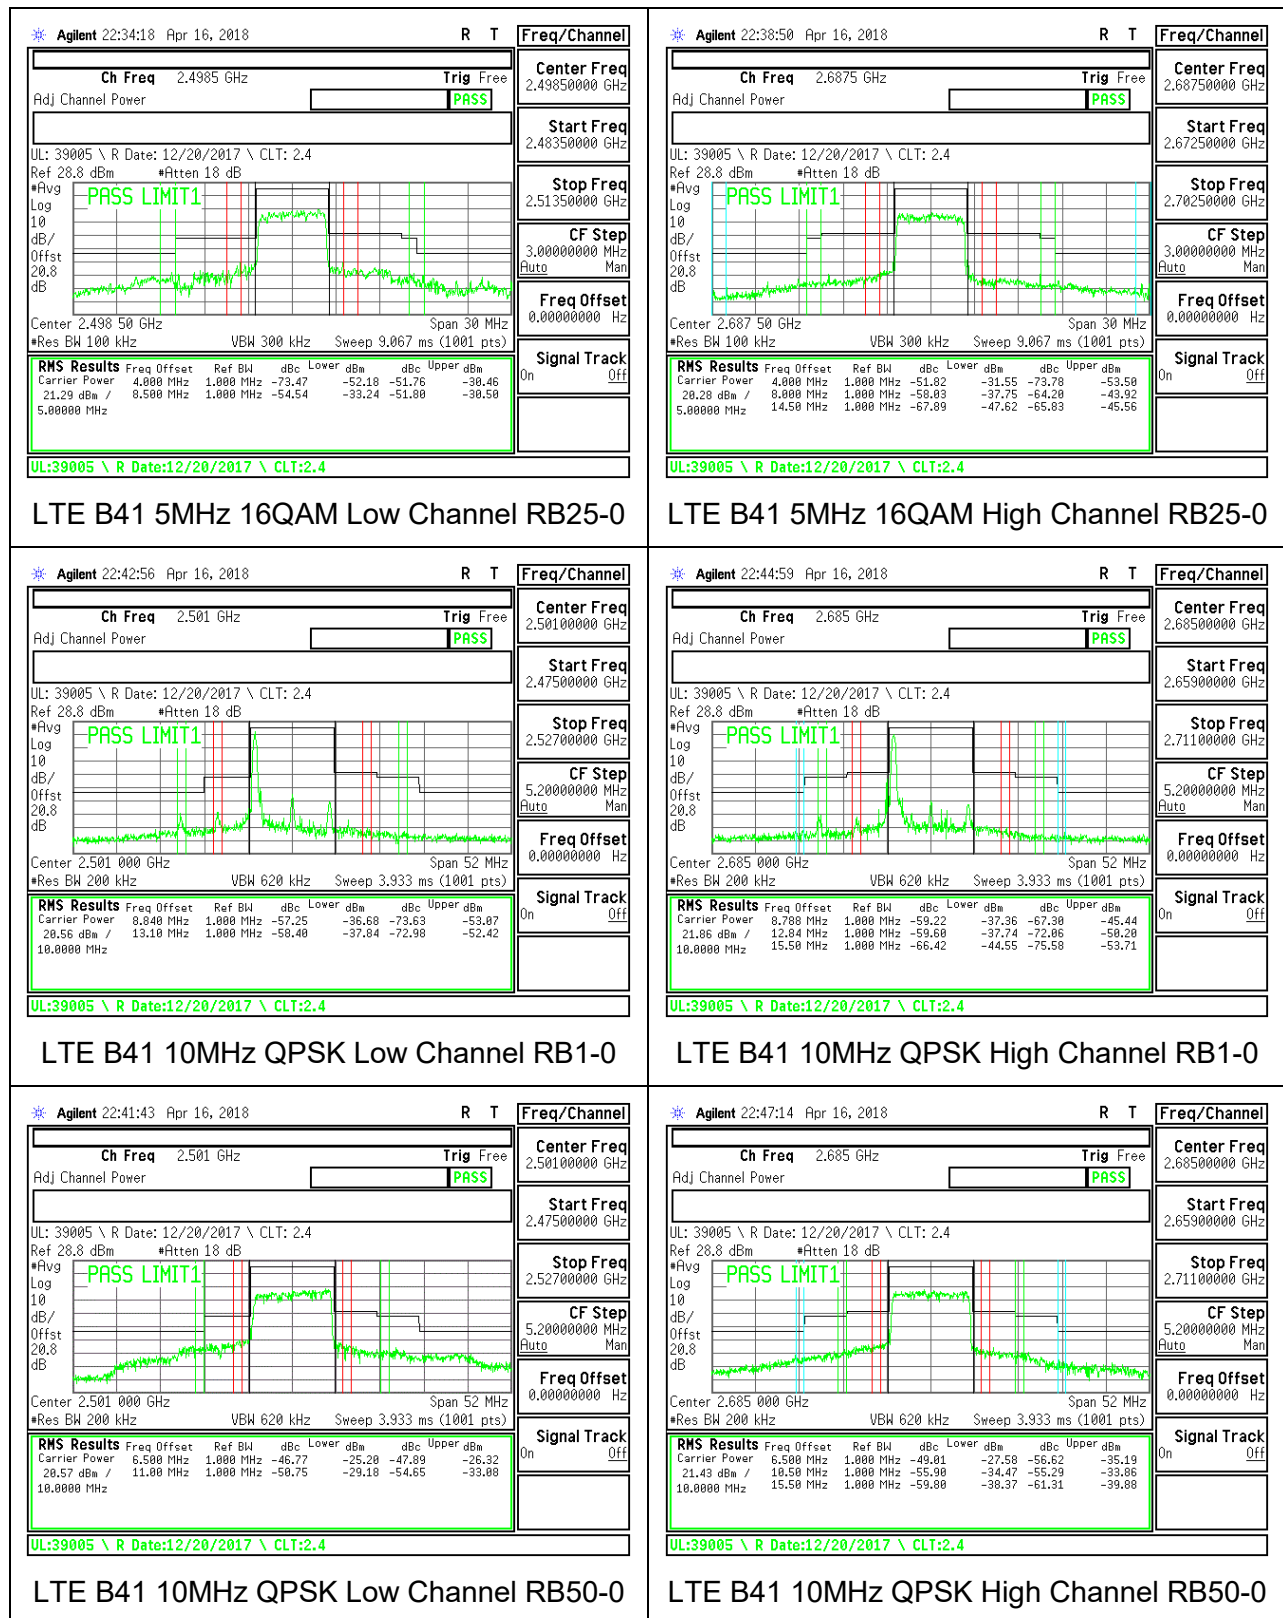


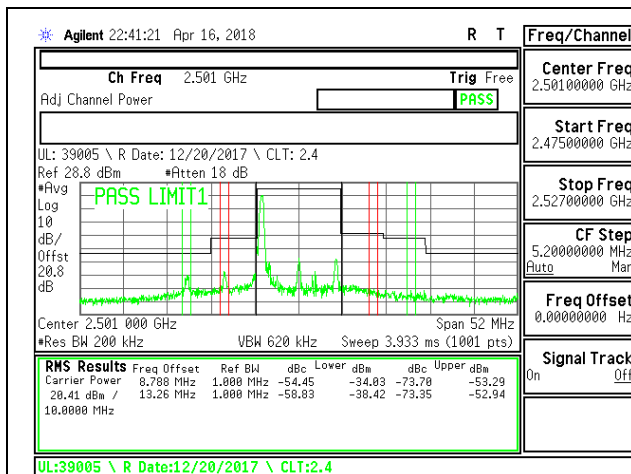


LTE B41 10MHz 16QAM Low Channel RB1-0

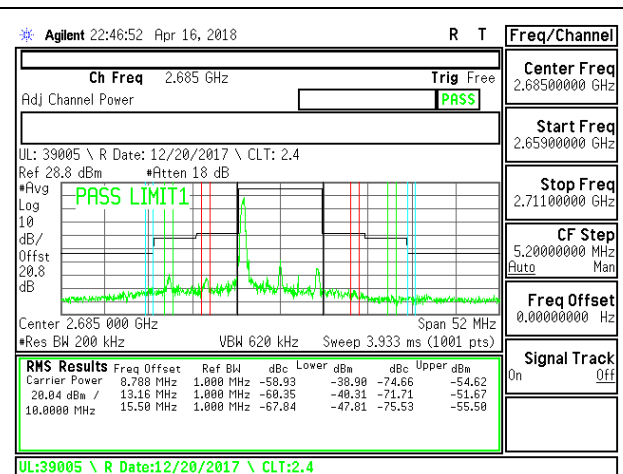


LTE B41 10MHz 16QAM High Channel RB1-0

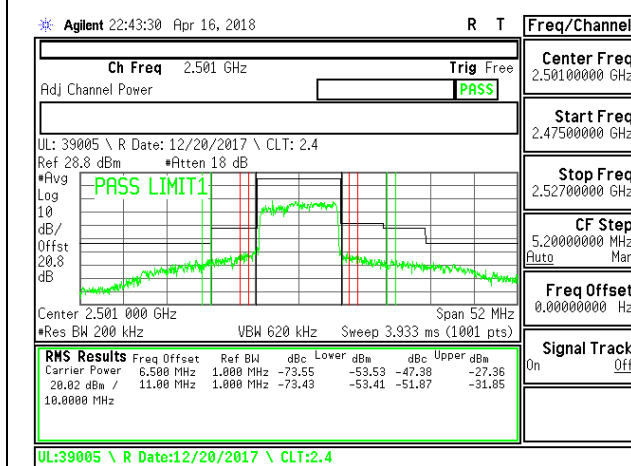


LTE B41 10MHz 16QAM Low Channel RB50-0

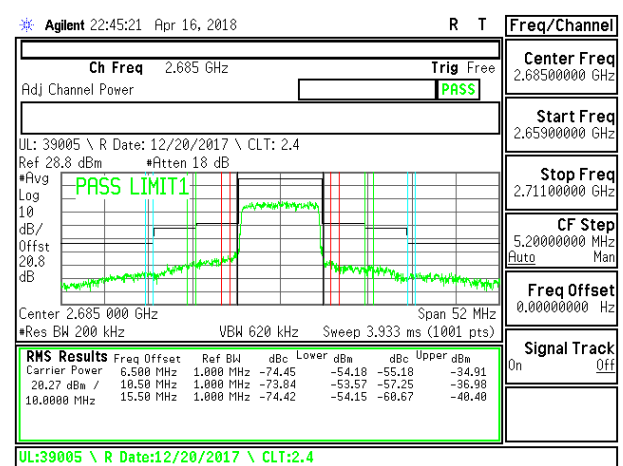


LTE B41 10MHz 16QAM High Channel RB50-0

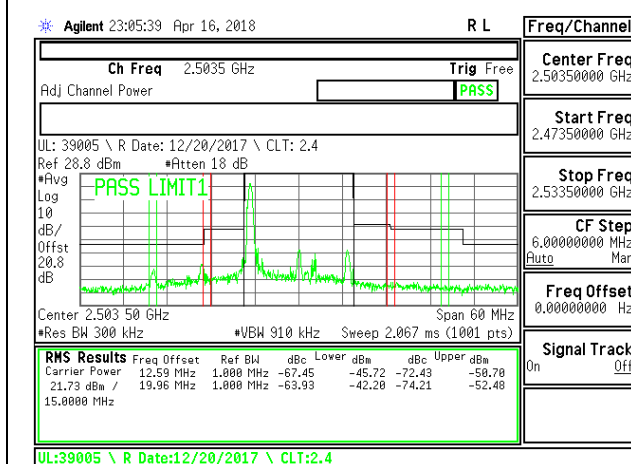


LTE B41 15MHz QPSK Low Channel RB1-0

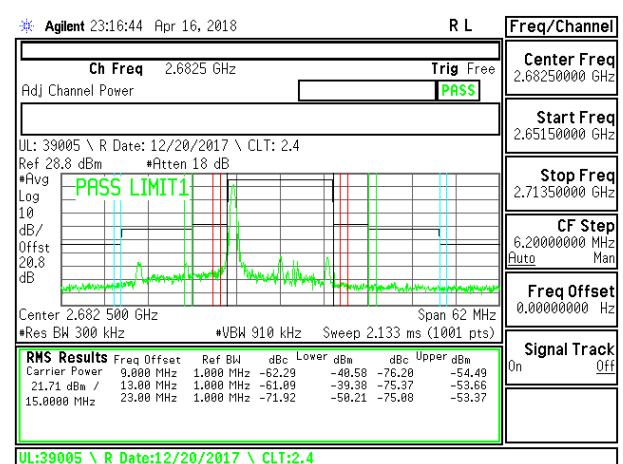


LTE B41 15MHz QPSK High Channel RB1-0

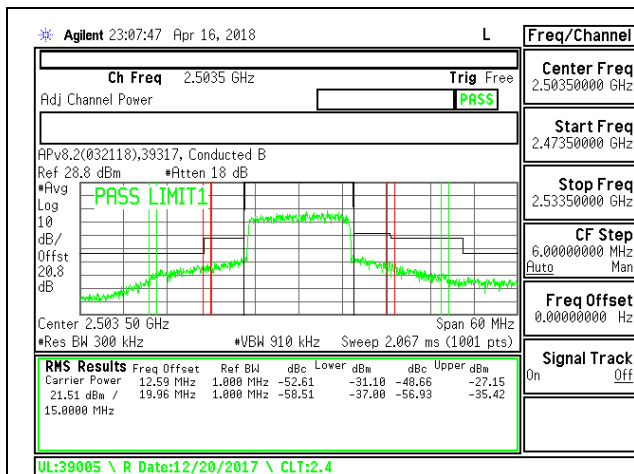


LTE B41 15MHz QPSK Low Channel RB75-0

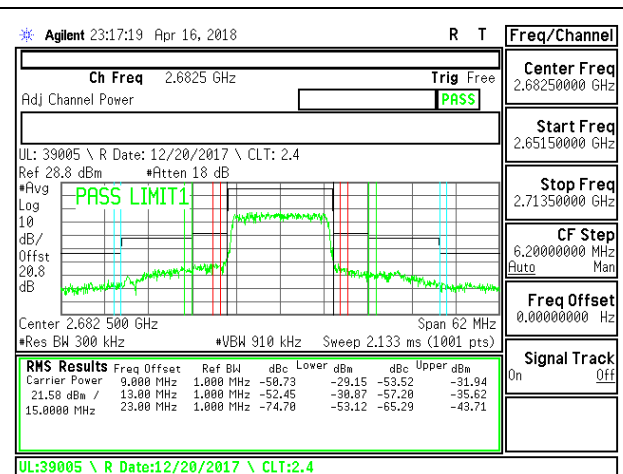


LTE B41 15MHz QPSK High Channel RB75-0

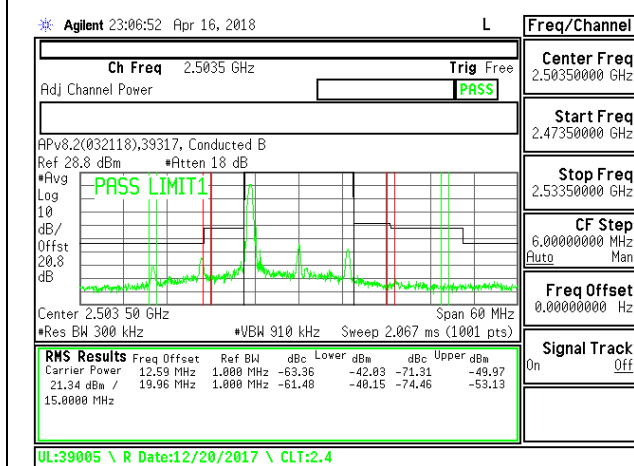


LTE B41 15MHz 16QAM Low Channel RB1-0

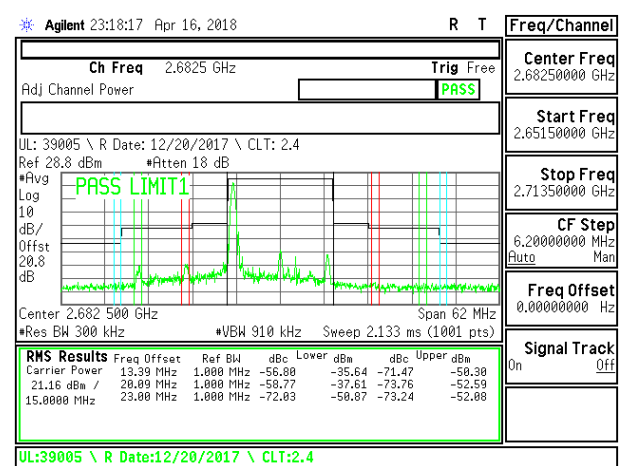


LTE B41 15MHz 16QAM High Channel RB1-0

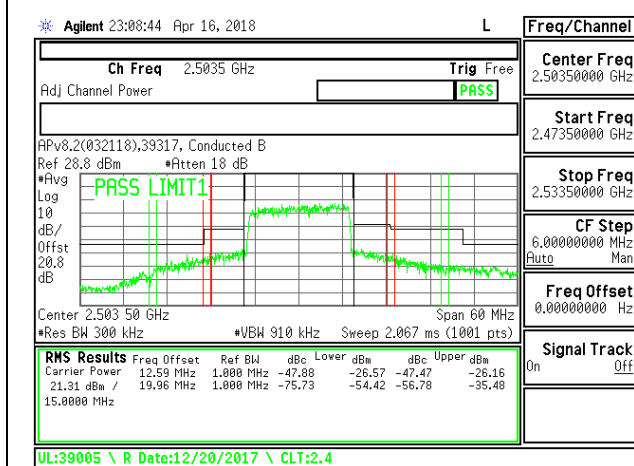


LTE B41 15MHz 16QAM Low Channel RB75-0

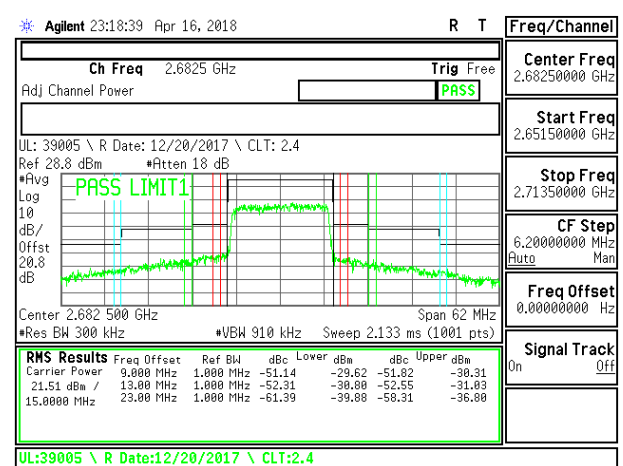


LTE B41 15MHz 16QAM High Channel RB75-0

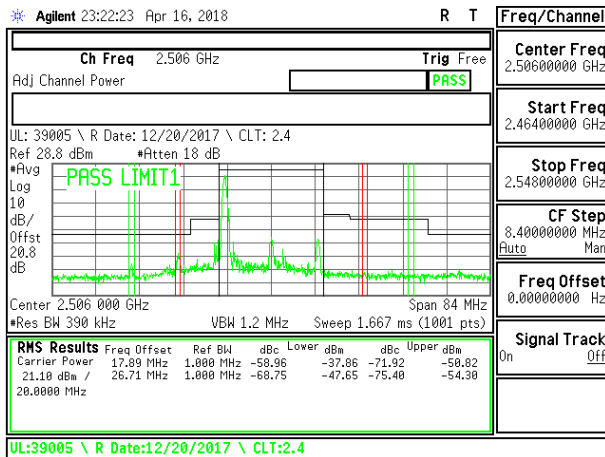


LTE B41 20MHz QPSK Low Channel RB1-0

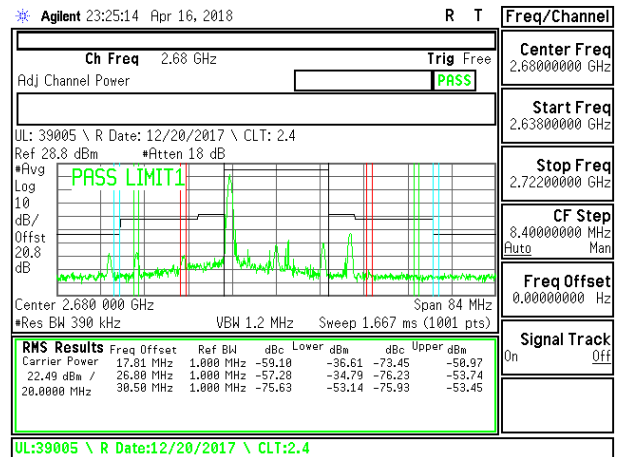


LTE B41 20MHz QPSK High Channel RB1-0

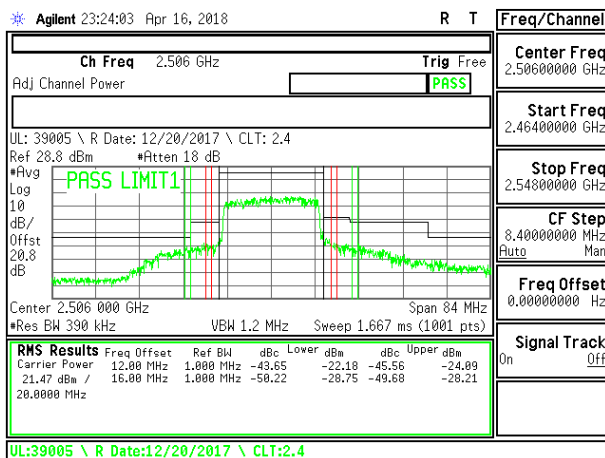


LTE B41 20MHz QPSK Low Channel RB100-0

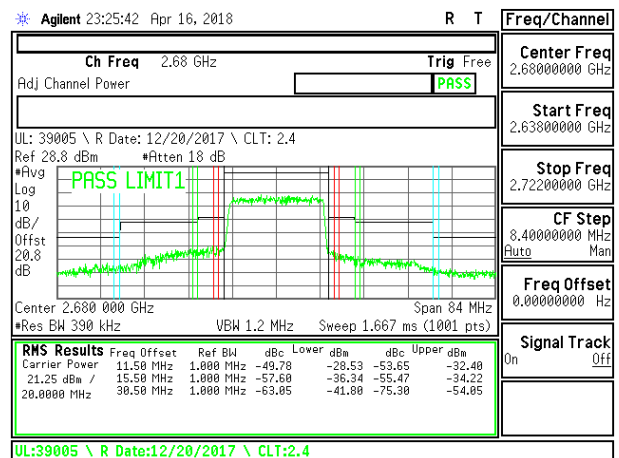


LTE B41 20MHz QPSK High Channel RB100-0

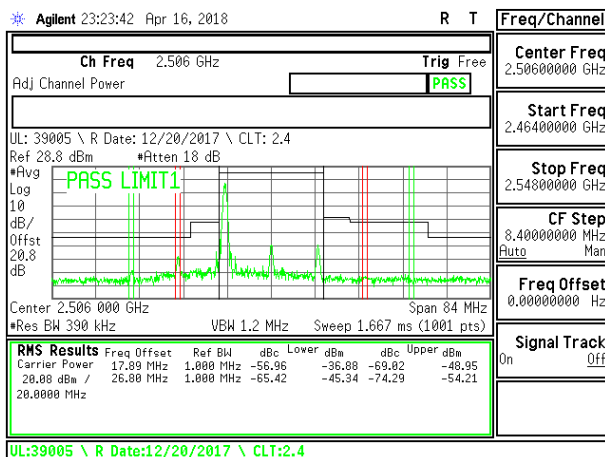


LTE B41 20MHz 16QAM Low Channel RB1-0

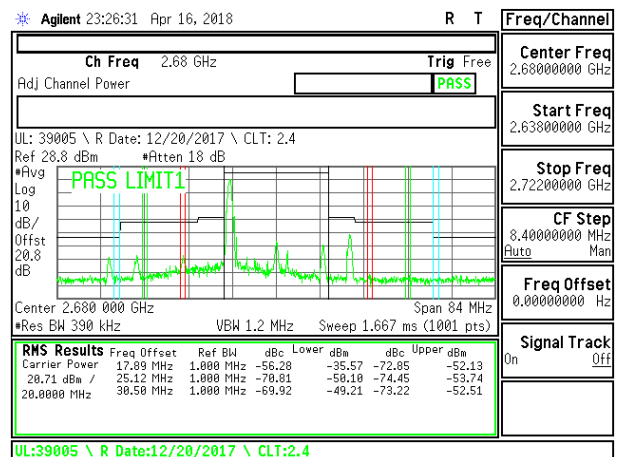

LTE B41 20MHz 16QAM High Channel RB1-0

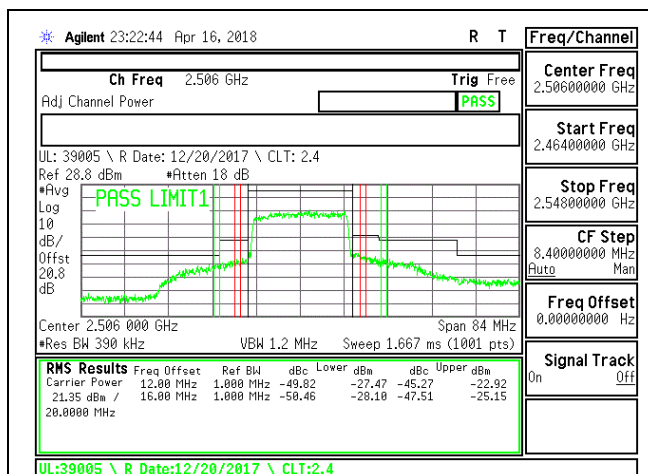

LTE B41 20MHz 16QAM Low Channel RB100-0

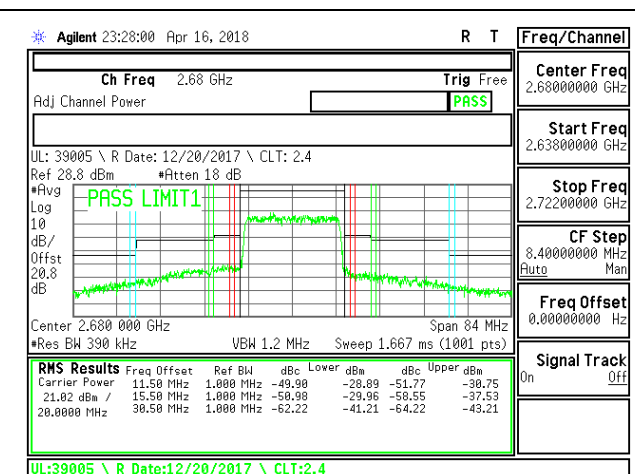

LTE B41 20MHz 16QAM High Channel RB100-0

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53

LIMITS

FCC: §22.917, §24.238, §27.53 (c), (g), (h),

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

FCC: §27.53 (m) (Band 7, 41)

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz. (NOTE: Worst case set RBW/VBW to 1MHz/3MHz)



MODES TESTED

- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41



RESULTS

8.3.1. GSM850

GPRS

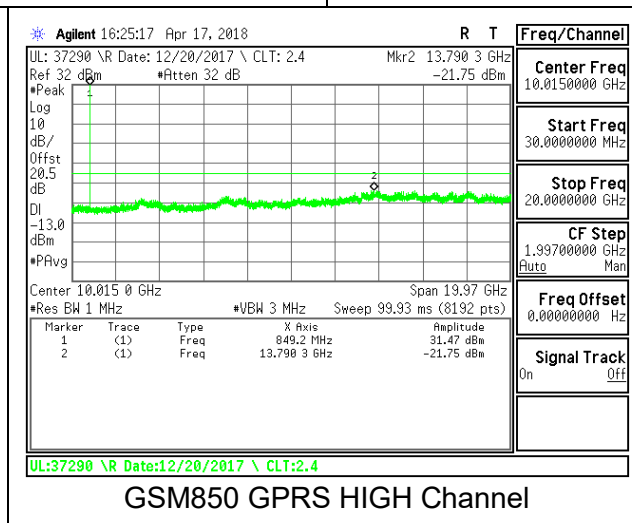
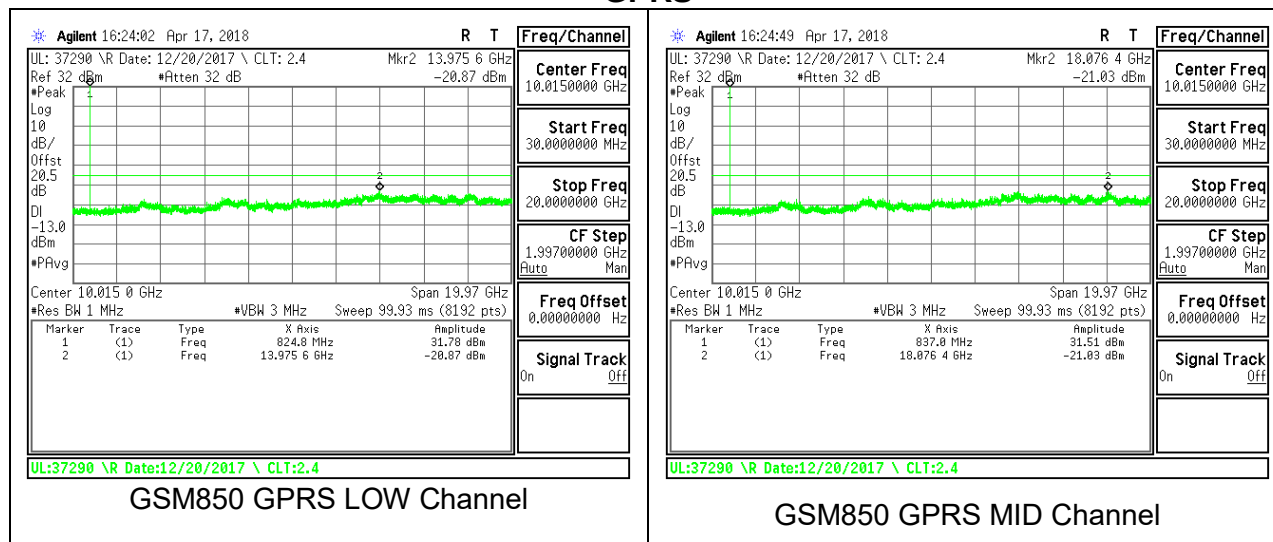


EGPRS

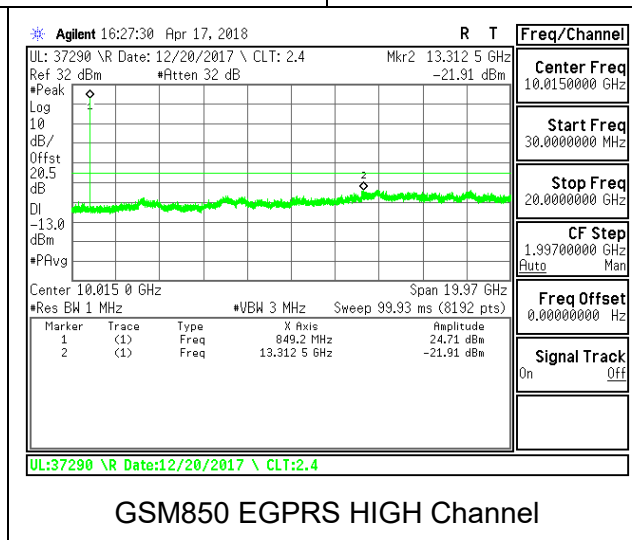
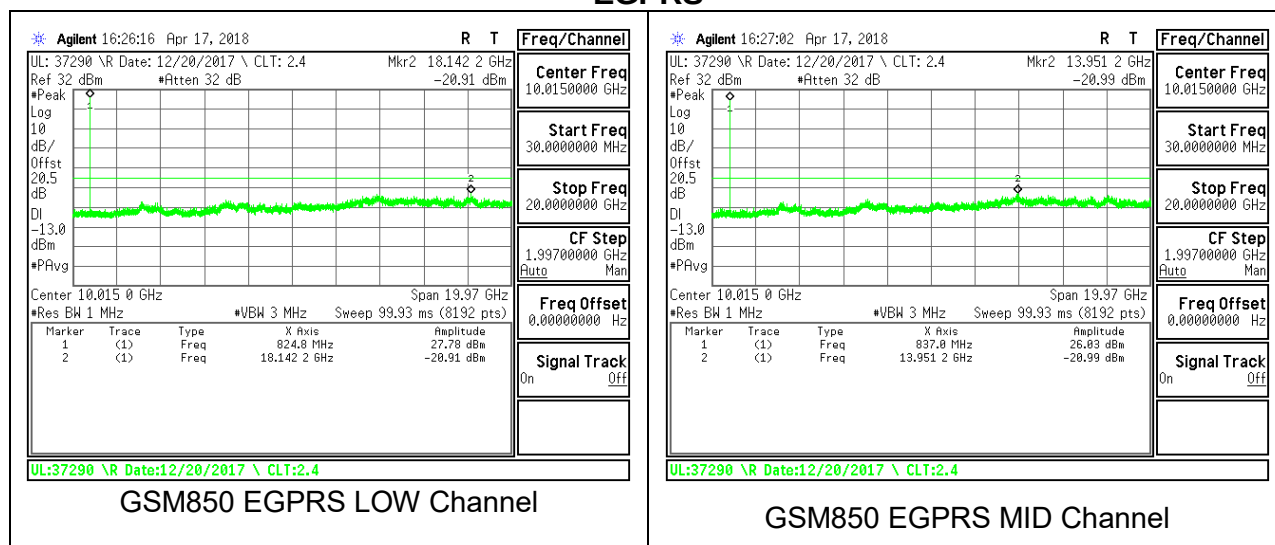


8.3.2. GSM1900

GPRS

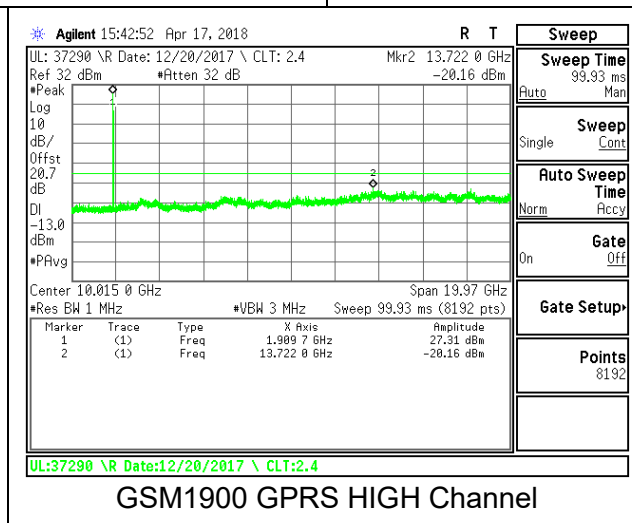
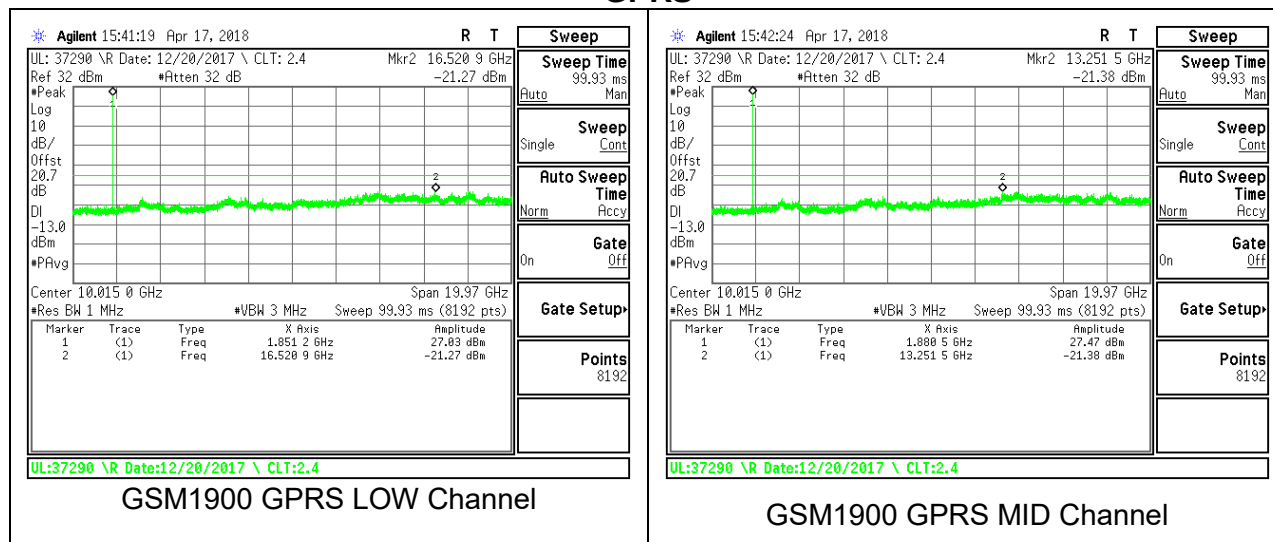


EGPRS

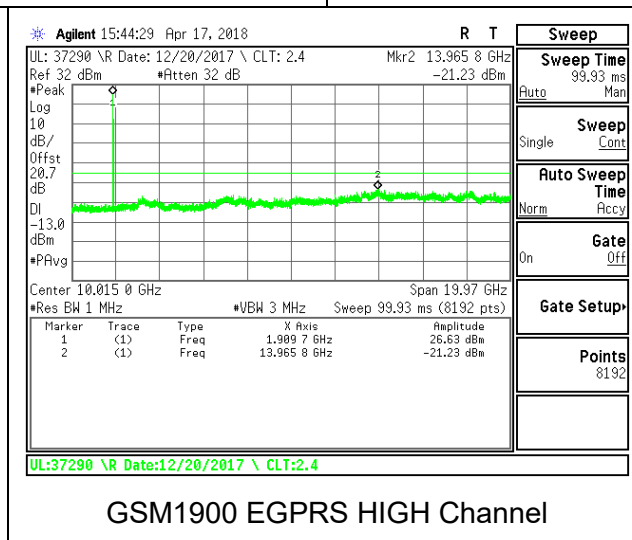
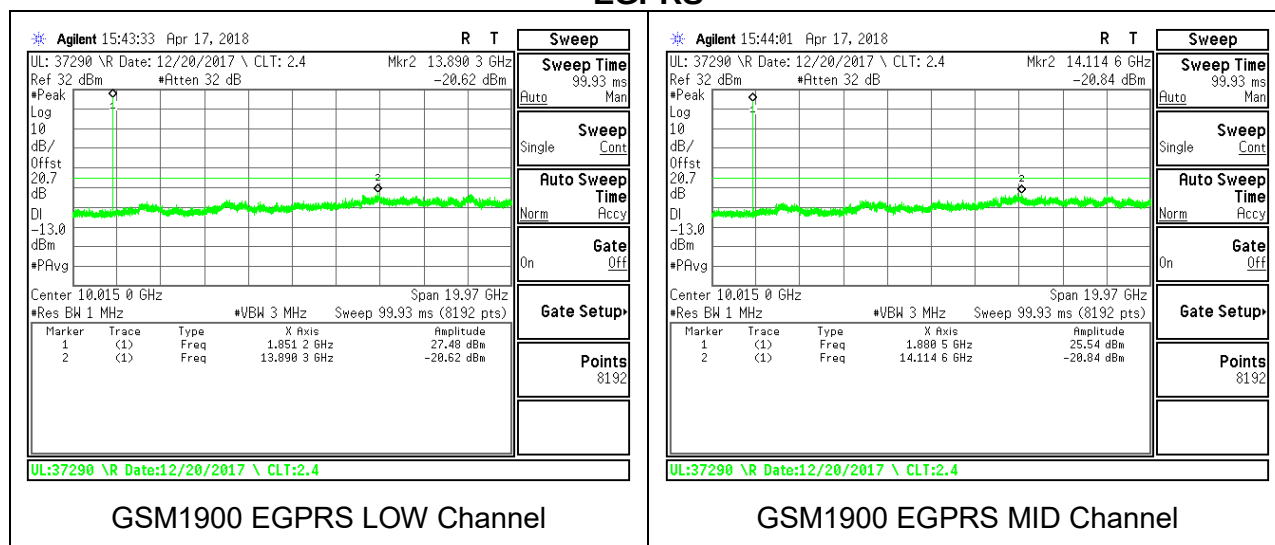


8.3.3. WCDMA BAND5

Rel99

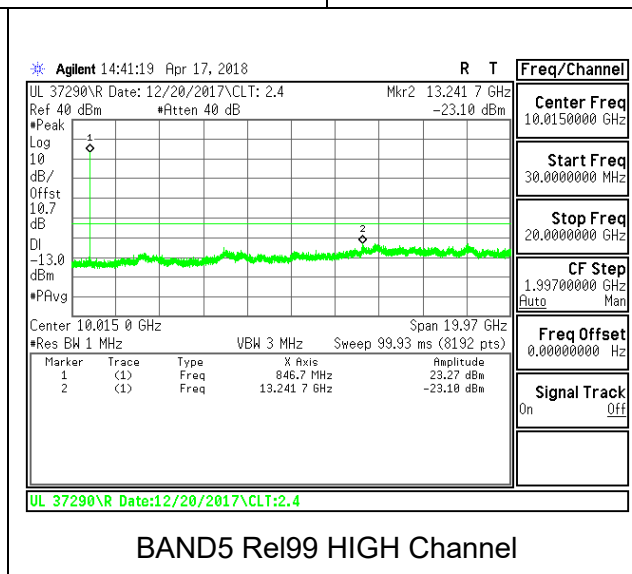
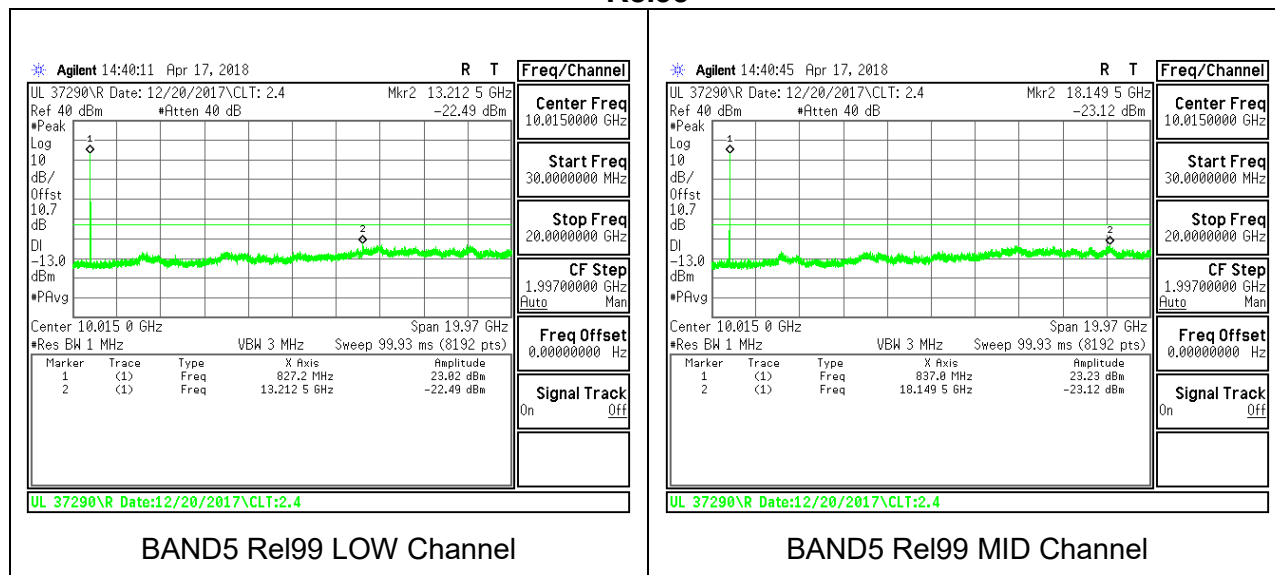


HSDPA

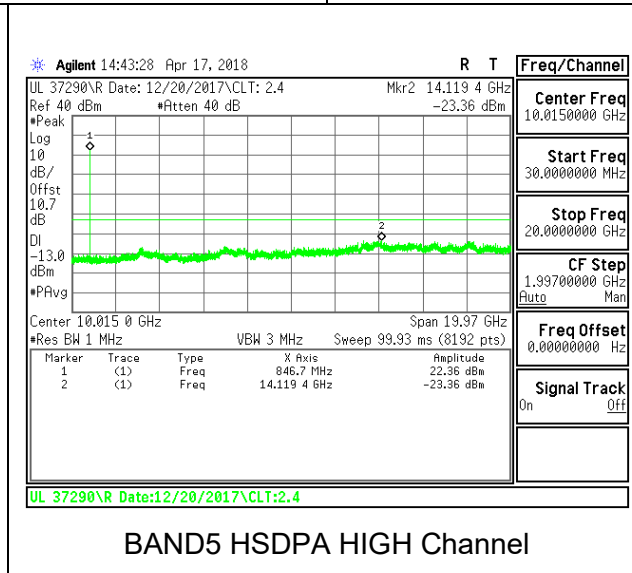
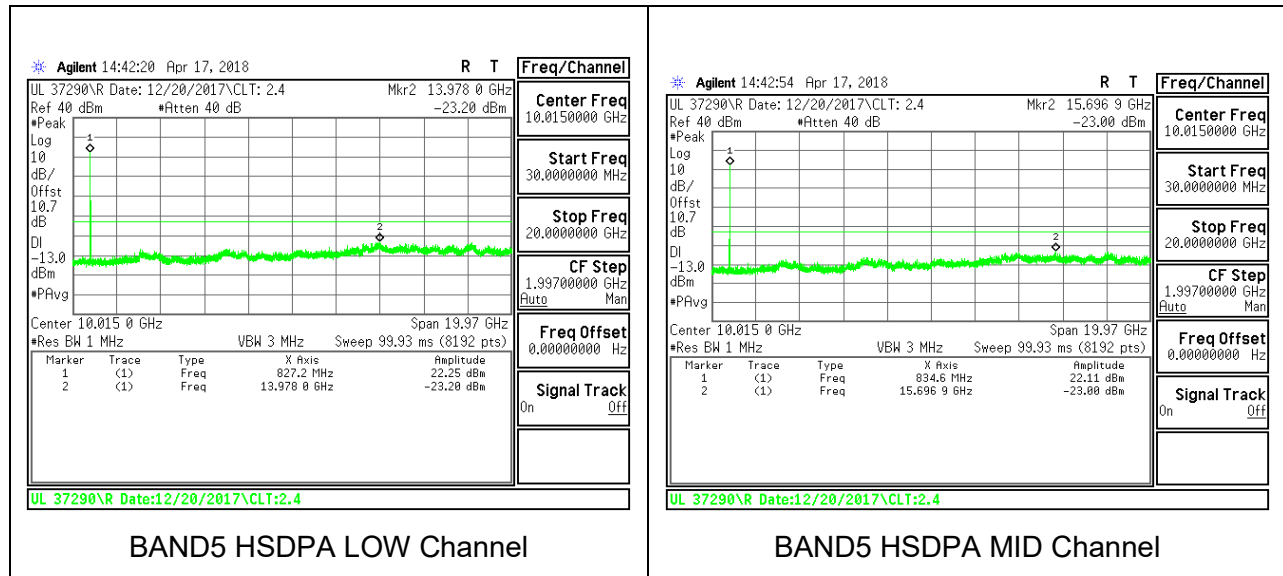


8.3.4. WCDMA BAND2

Rel99

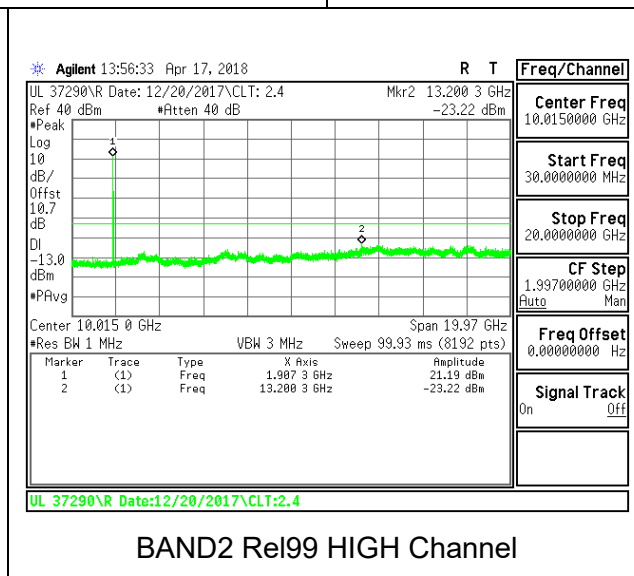
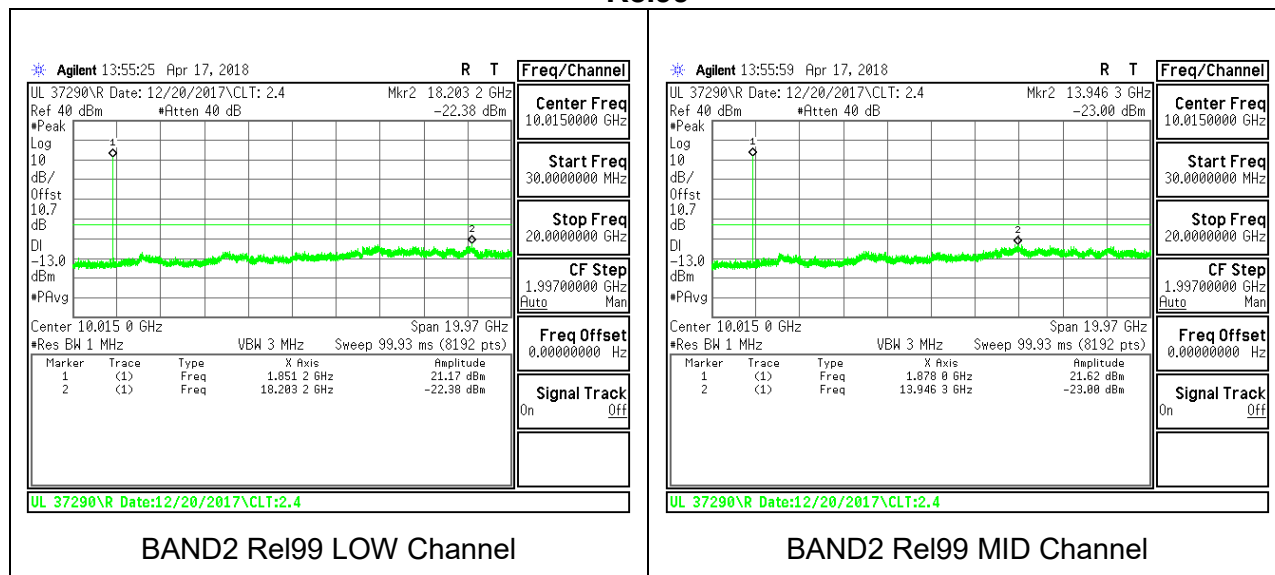


HSDPA

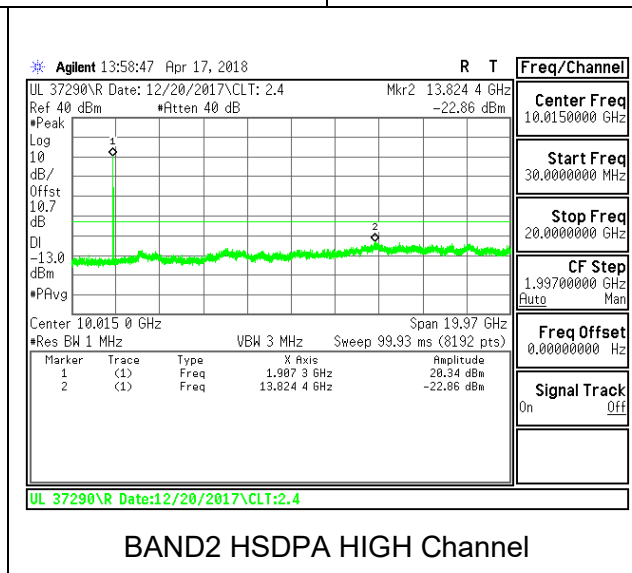
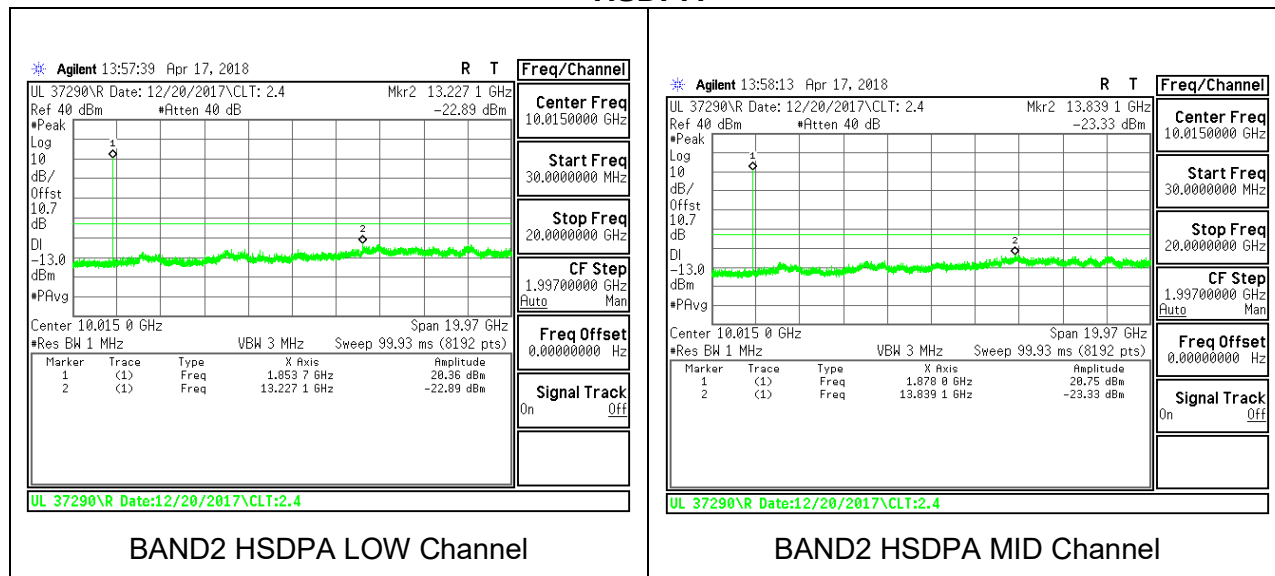


8.3.5. WCDMA BAND4

Rel99

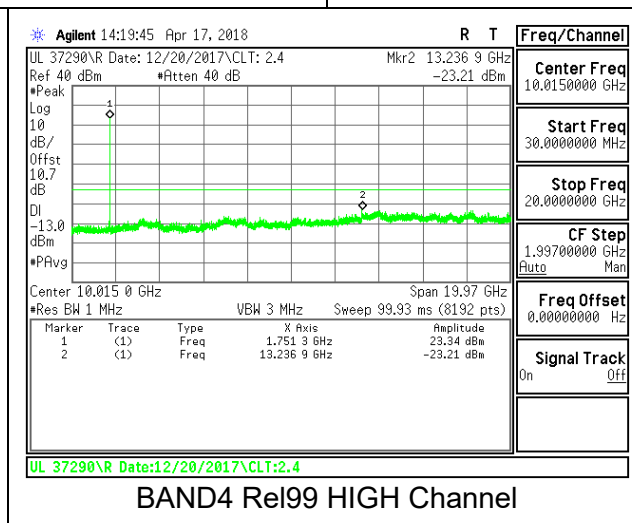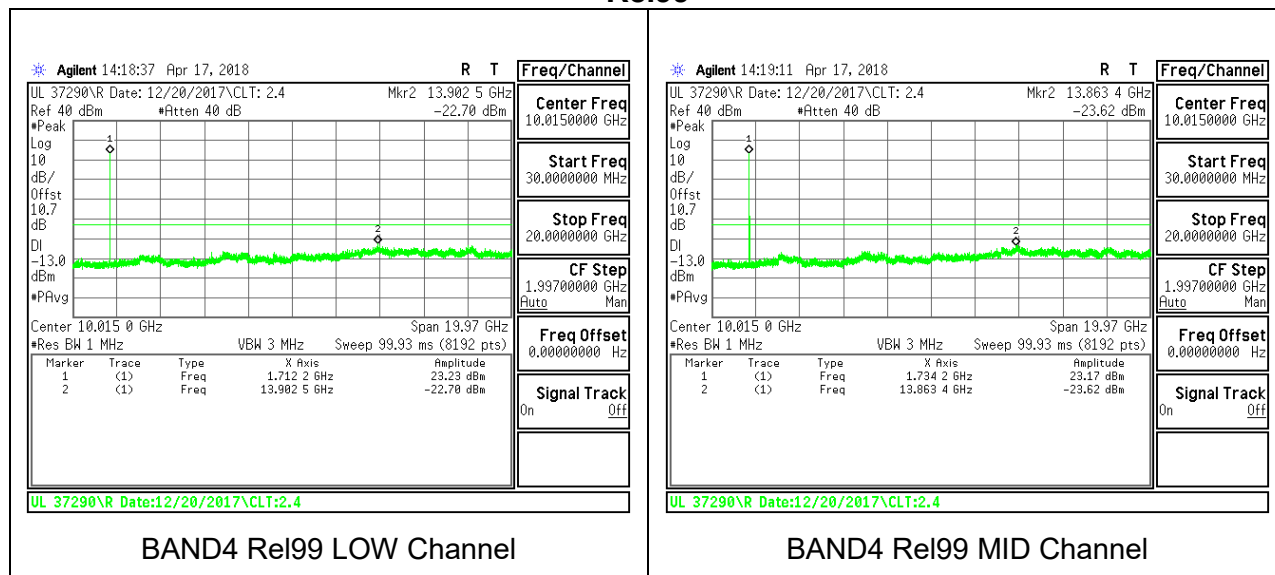

HSDPA

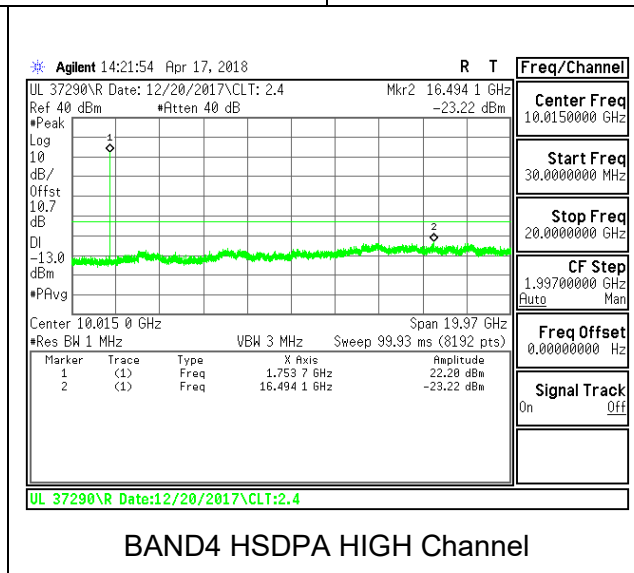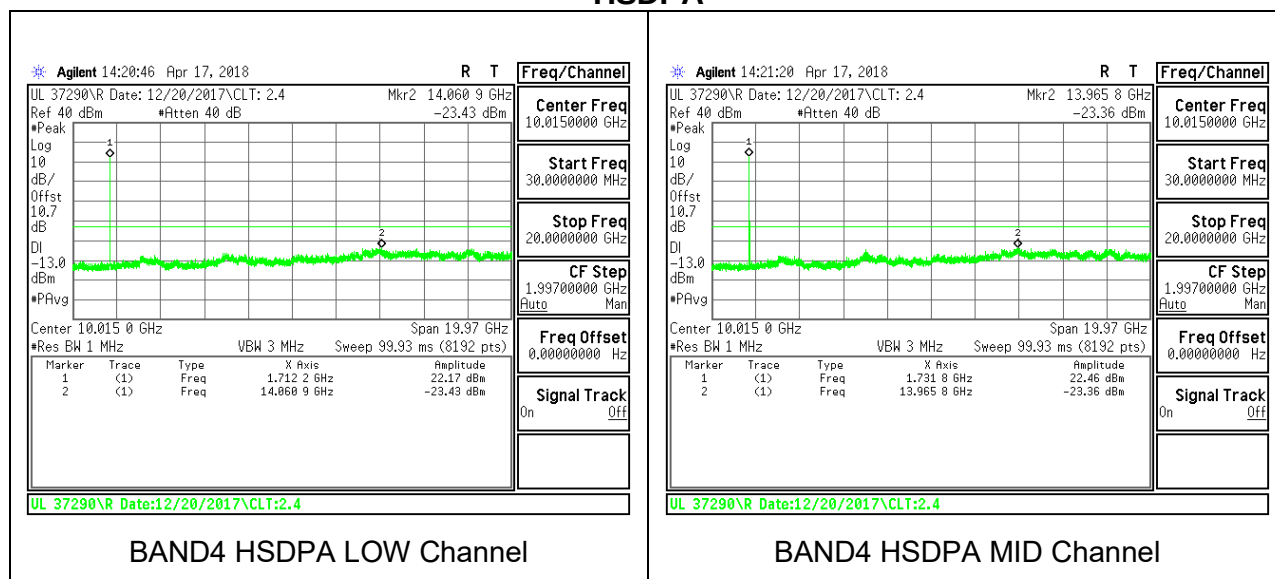

8.3.6. LTE BAND 4

