



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B2	Temp./Humi.	:21.5/58
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		



Report No.: ER/2019/C0048 Page: 122 of 361

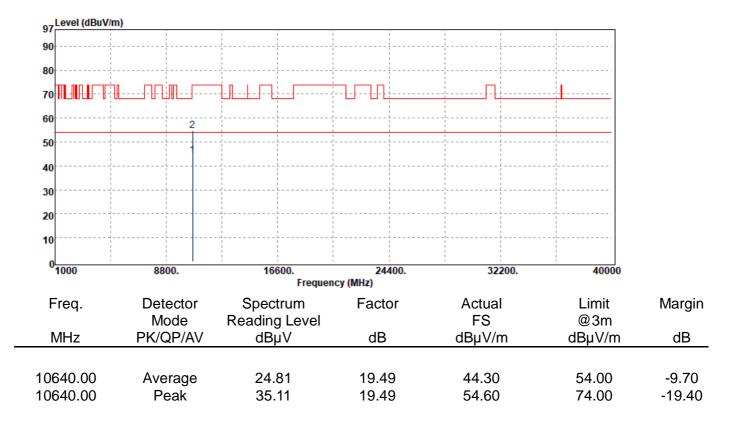


Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B2	Temp./Humi.	:21.5/58
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

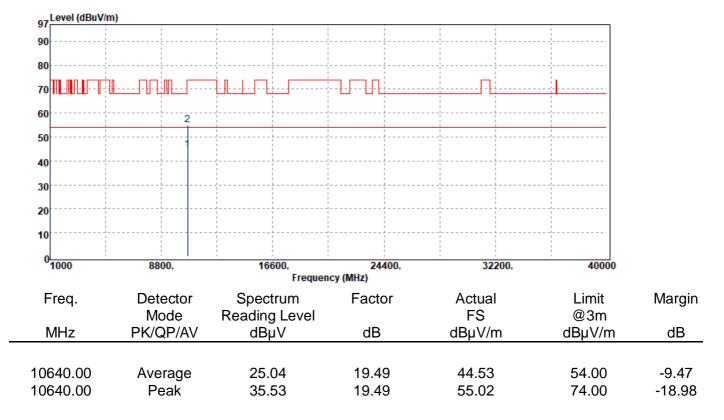




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B3	Temp./Humi.	:21.5/58
Test Channel	:5500 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

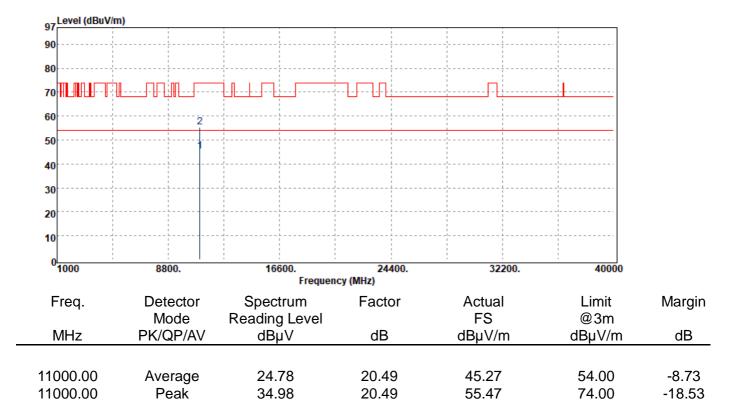




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B3	Temp./Humi.	:21.5/58
Test Channel	:5500 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

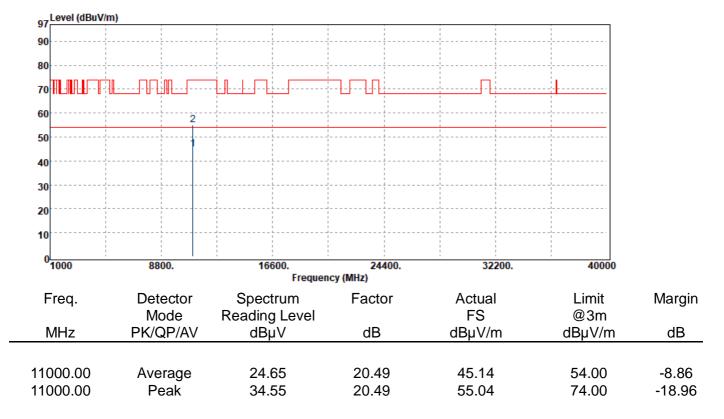




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B3	Temp./Humi.	:21.5/58
Test Channel	:5580 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

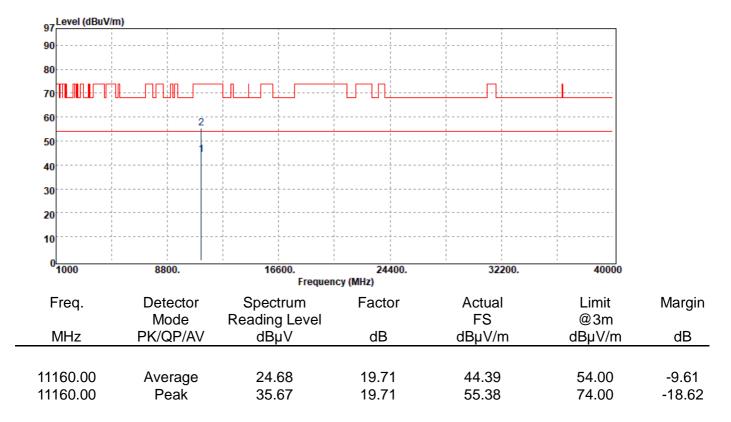




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B3	Temp./Humi.	:21.5/58
Test Channel	:5580 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

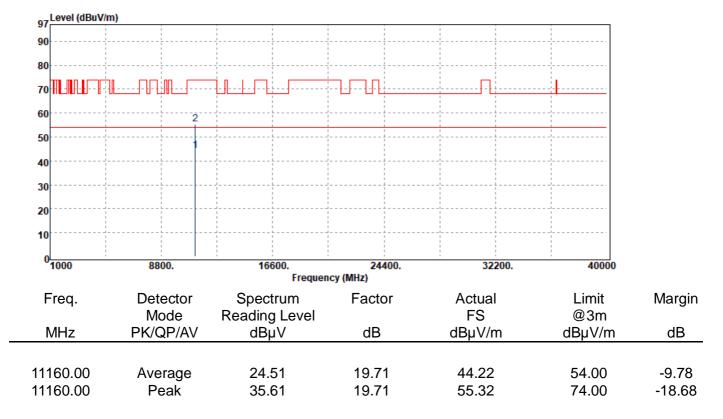




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B3	Temp./Humi.	:21.5/58
Test Channel	:5700 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

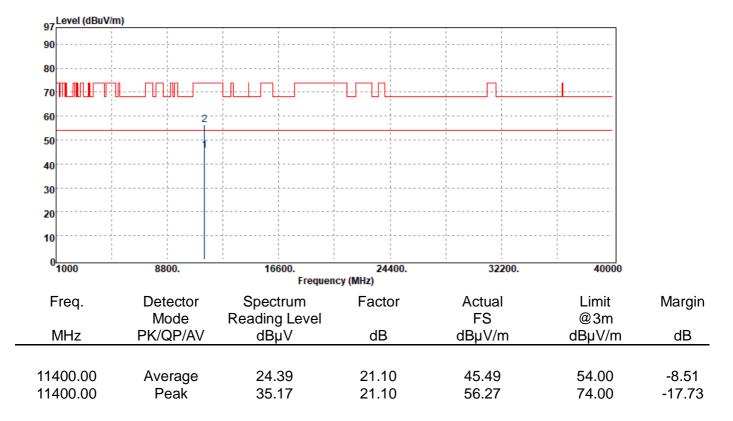




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B3	Temp./Humi.	:21.5/58
Test Channel	:5700 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

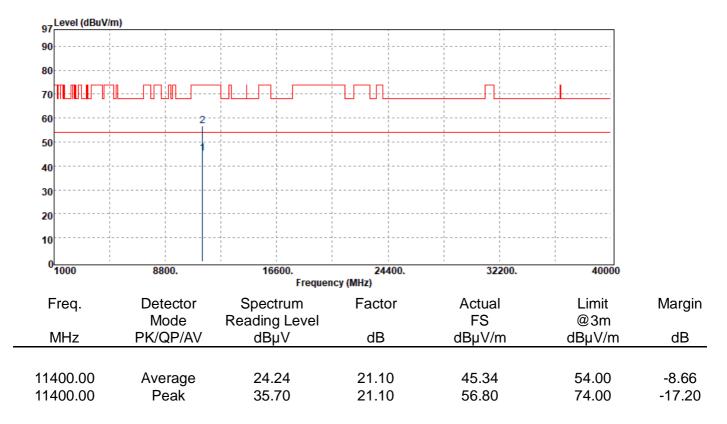




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B4	Temp./Humi.	:21.5/58
Test Channel	:5745 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

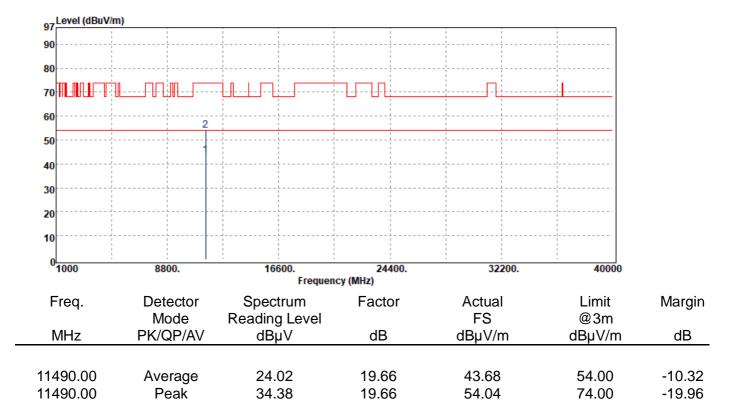




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B4	Temp./Humi.	:21.5/58
Test Channel	:5745 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

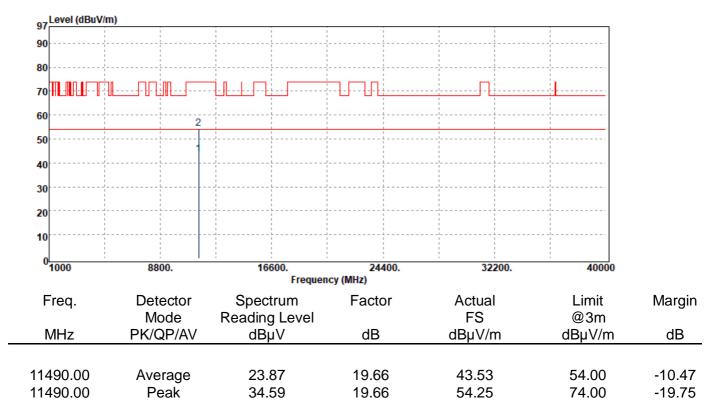



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B4	Temp./Humi.	:21.5/58
Test Channel	:5785 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

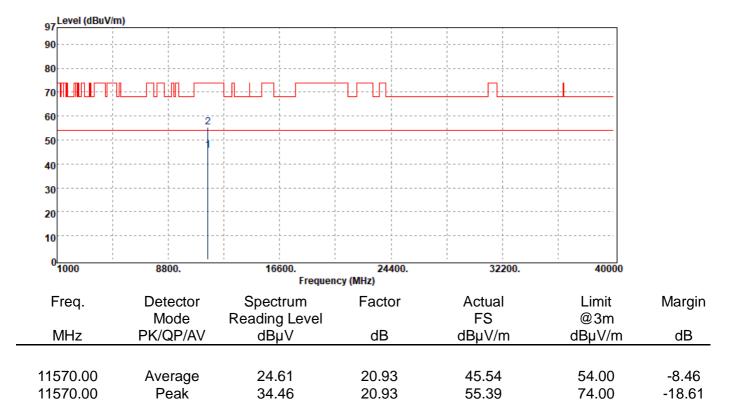

Report No.: ER/2019/C0048 Page: 132 of 361

40000

Margin

dB

-8.74

-18.55

Limit

@3m

dBµV/m

54.00

74.00



0 1000

Freq.

MHz

11570.00

11570.00

8800.

Detector


Mode

PK/QP/AV

Average

Peak

Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B4	Temp./Humi.	:21.5/58
Test Channel	:5785 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		
97 Level (dBuV/m)			



16600.

Spectrum

Reading Level

dBµV

24.33

34.52

Frequency (MHz)

24400.

Factor

dB

20.93

20.93

32200.

Actual

FS


dBµV/m

45.26

55.45




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B4	Temp./Humi.	:21.5/58
Test Channel	:5825 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

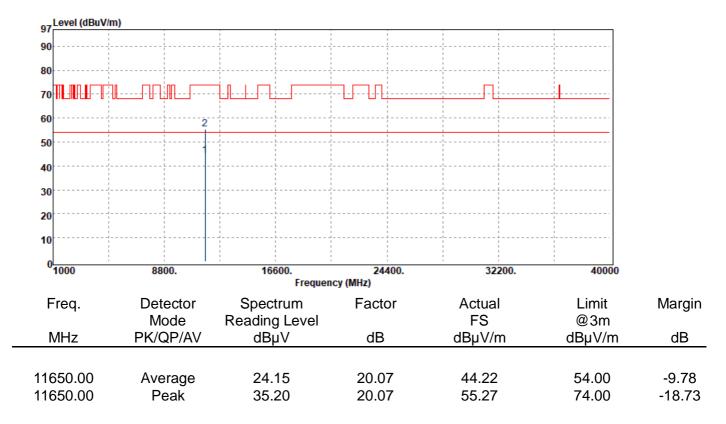




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11a B4	Temp./Humi.	:21.5/58
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

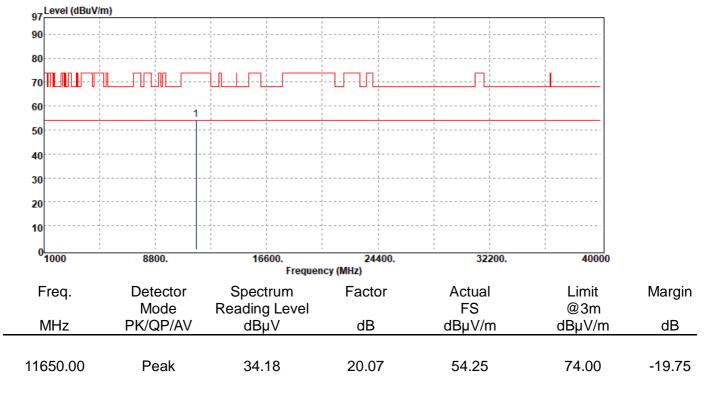




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B1	Temp./Humi.	:21.5/58
Test Channel	:5180 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

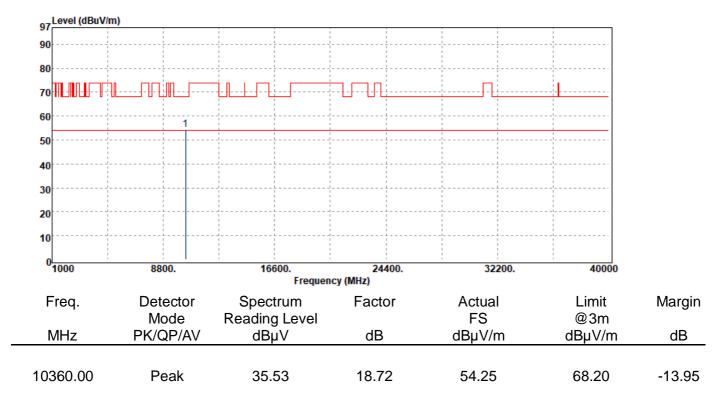




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B1	Temp./Humi.	:21.5/58
Test Channel	:5180 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

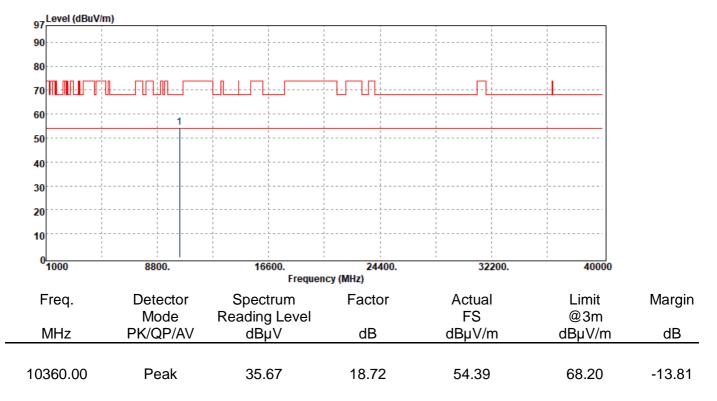




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B1	Temp./Humi.	:21.5/58
Test Channel	:5220 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

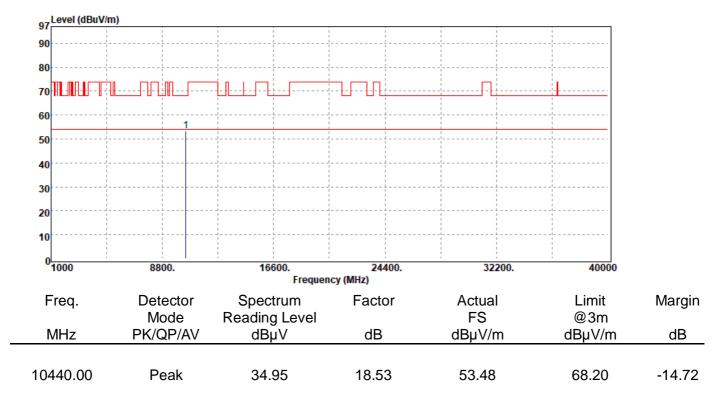




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B1	Temp./Humi.	:21.5/58
Test Channel	:5220 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

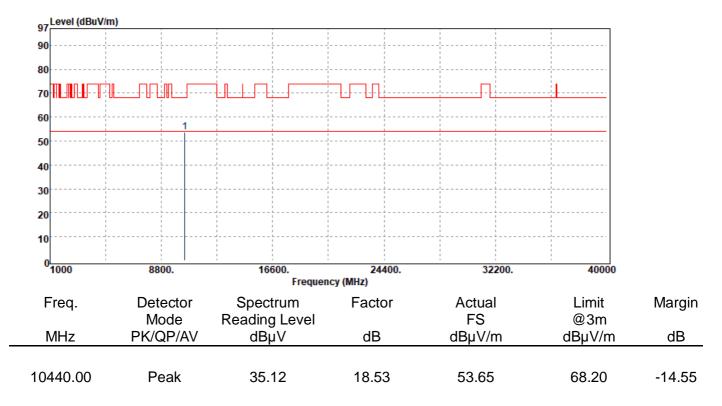




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B1	Temp./Humi.	:21.5/58
Test Channel	:5240 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

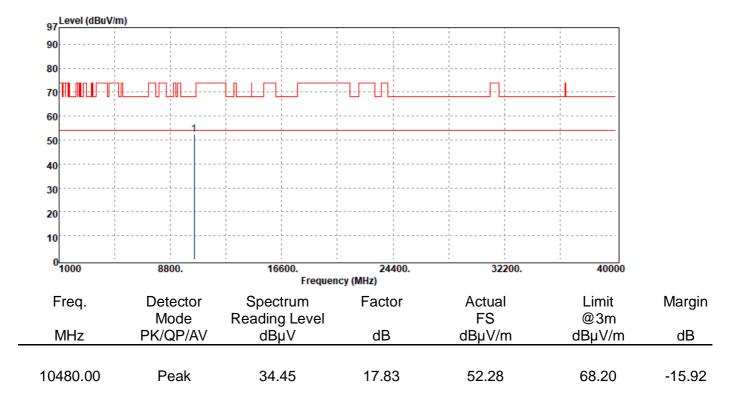




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B1	Temp./Humi.	:21.5/58
Test Channel	:5240 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

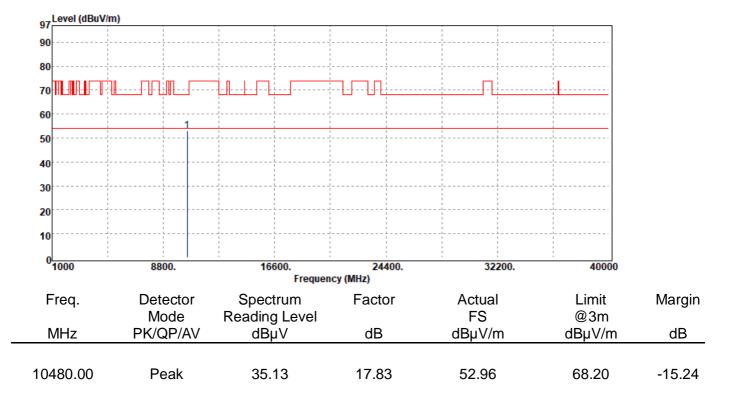




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B2	Temp./Humi.	:21.5/58
Test Channel	:5260 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

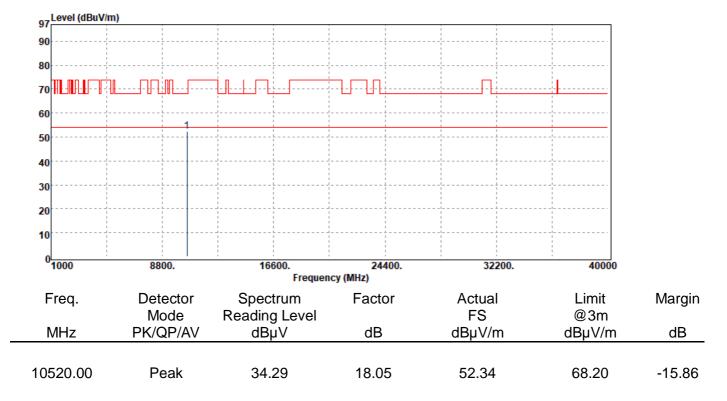




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B2	Temp./Humi.	:21.5/58
Test Channel	:5260 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

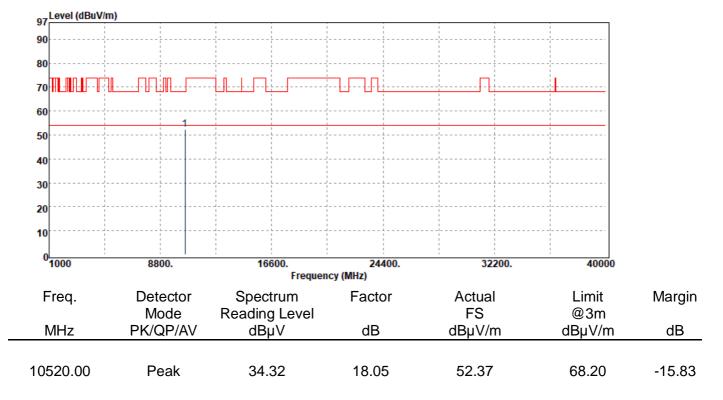




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B2	Temp./Humi.	:21.5/58
Test Channel	:5300 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

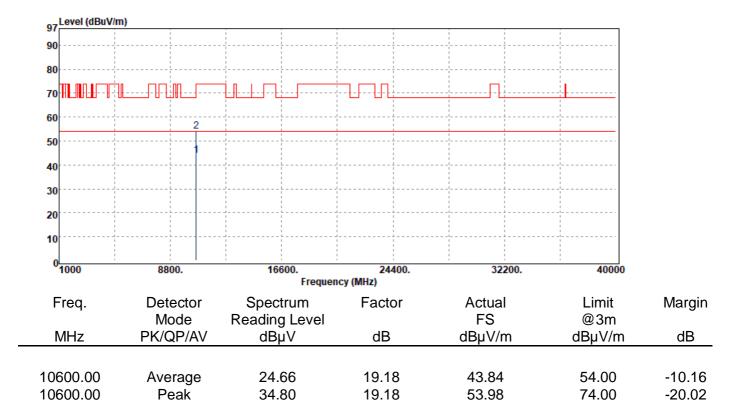



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B2	Temp./Humi.	:21.5/58
Test Channel	:5300 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

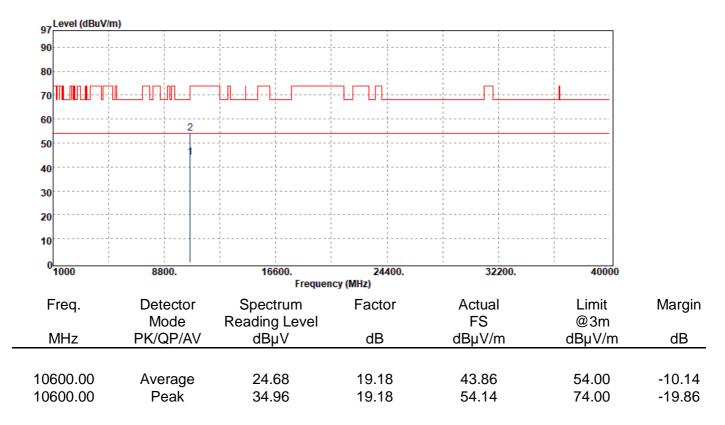




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B2	Temp./Humi.	:21.5/58
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/n	n)					
90						
80			· · · · · · · · · · · · · · · · · · ·			
70	┠╴╴╴╴╛╴╽╴┟╴║╢┞╴╴╴┥╴╴╴╴					
60	2					
50						
40			 			
30		- J	 			
20	 		 		1 1 1 1	
10						
0 <mark></mark>	8800.	16600.	24400.	32200.	40000	
_		Frequence				
Freq.	Detector	Spectrum	Factor	Actual FS	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	dBµV/m	@3m dBµV/m	dB
0640.00	Average	24.62	19.49	44.11	54.00	-9.89
10640.00	Peak	34.54	19.49	54.03	74.00	-19.97




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B2	Temp./Humi.	:21.5/58
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

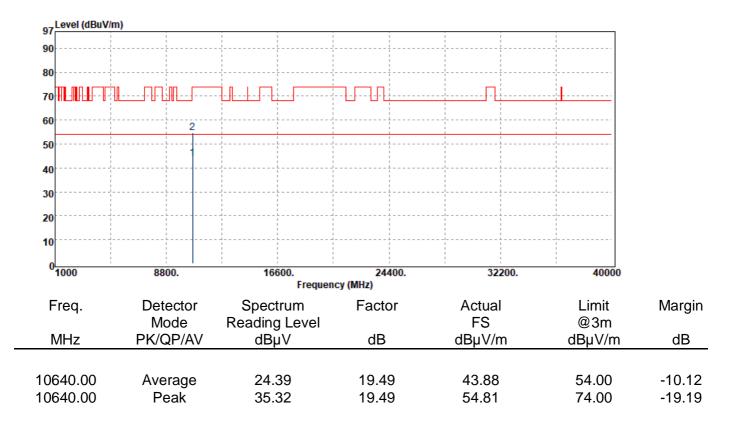




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B3	Temp./Humi.	:21.5/58
Test Channel	:5500 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

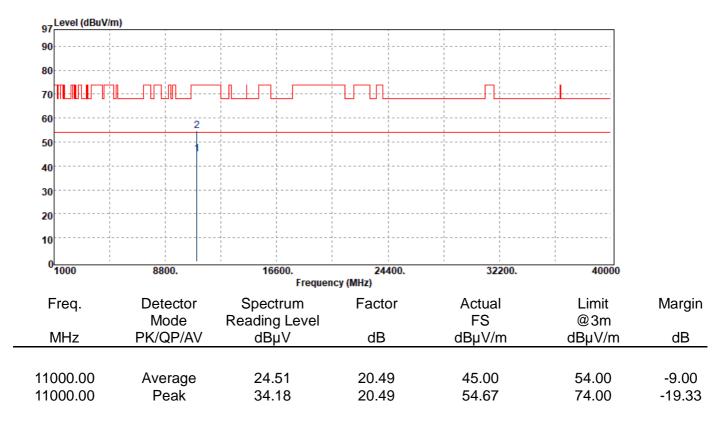




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B3	Temp./Humi.	:21.5/58
Test Channel	:5500 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

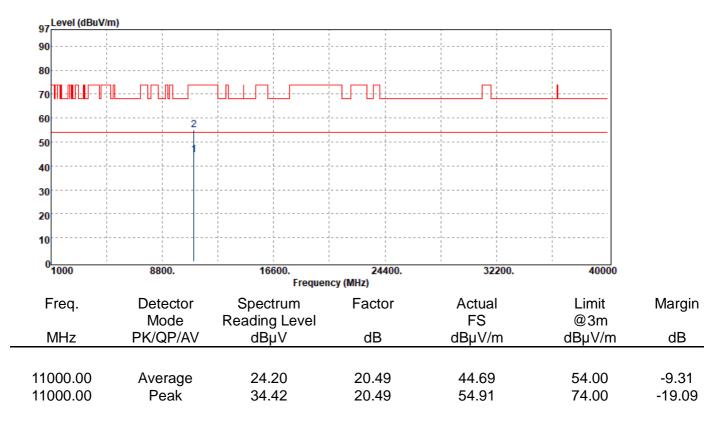




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B3	Temp./Humi.	:21.5/58
Test Channel	:5580 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

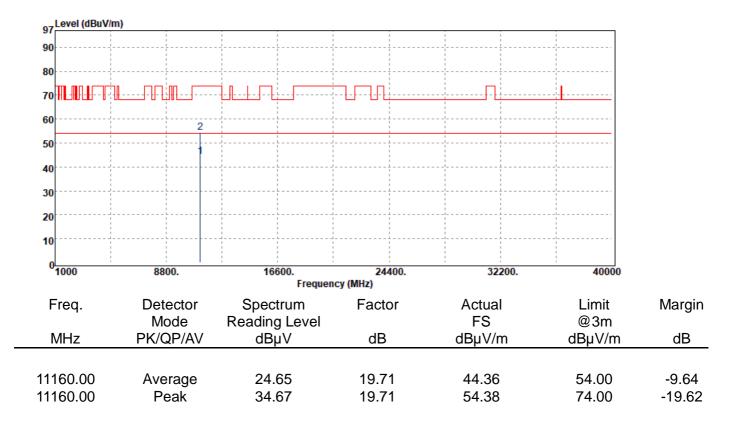




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B3	Temp./Humi.	:21.5/58
Test Channel	:5580 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

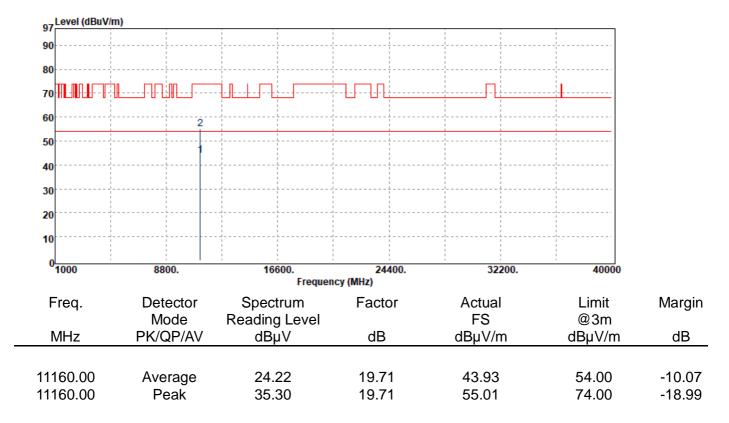



Report Number	:ER/2019/C0048	Test Date	
Operation Mode	:802.11n20 B3	Temp./Humi.	;
Test Channel	:5700 MHz	Antenna Pol.	
Test Mode	:Tx CH High	Engineer	
EUT Pol	:E2 Plane		


Test Date	:2020-01-02
Temp./Humi.	:21.5/58
Antenna Pol.	:VERTICAL
Engineer	:Kane

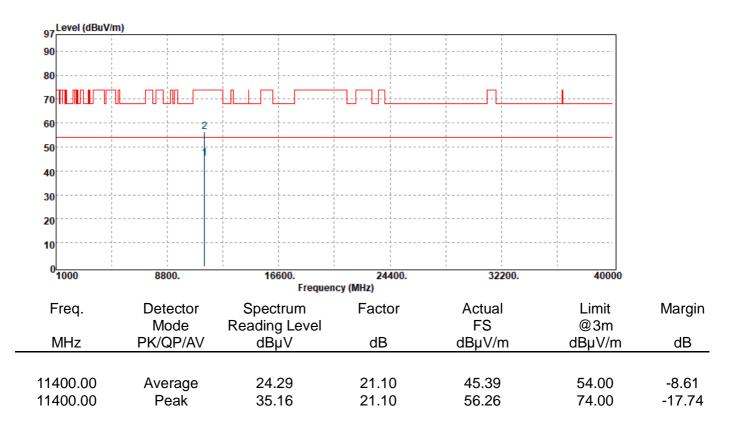

Report No.: ER/2019/C0048 Page: 152 of 361



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B3	Temp./Humi.	:21.5/58
Test Channel	:5700 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

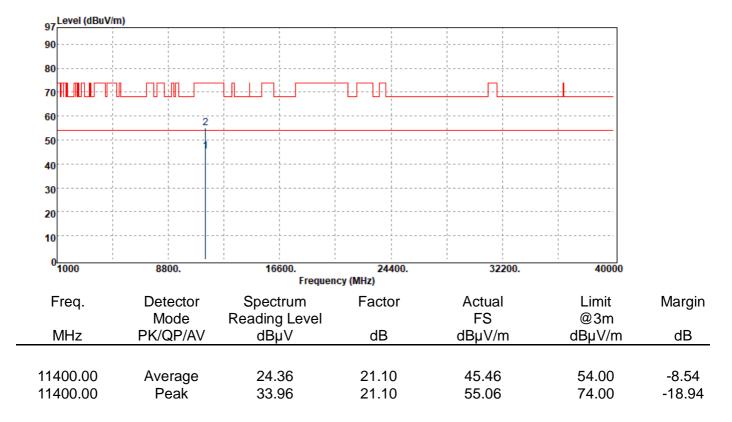




R	eport Number	:ER/2019/C0048	Test Date	:2020-01-02
С	peration Mode	:802.11n20 B4	Temp./Humi.	:21.5/58
T	est Channel	:5745 MHz	Antenna Pol.	:VERTICAL
T	est Mode	:Tx CH Low	Engineer	:Kane
Е	UT Pol	:E2 Plane		






Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B4	Temp./Humi.	:21.5/58
Test Channel	:5745 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

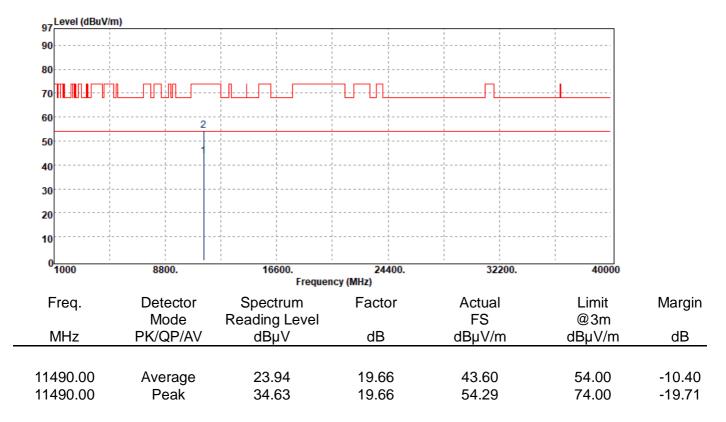




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B4	Temp./Humi.	:21.5/58
Test Channel	:5785 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

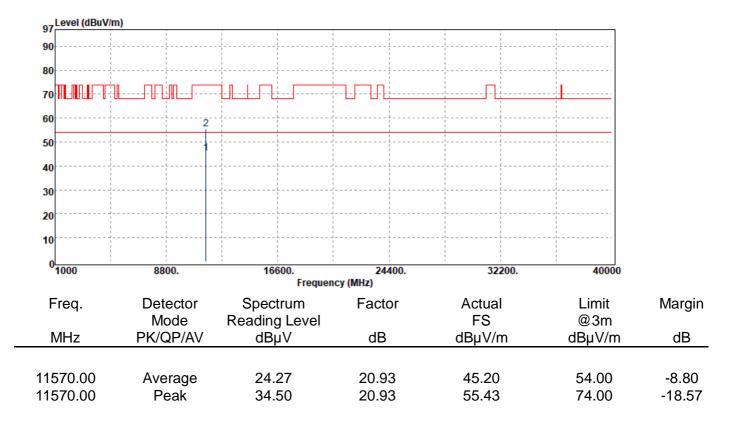




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B4	Temp./Humi.	:21.5/58
Test Channel	:5785 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

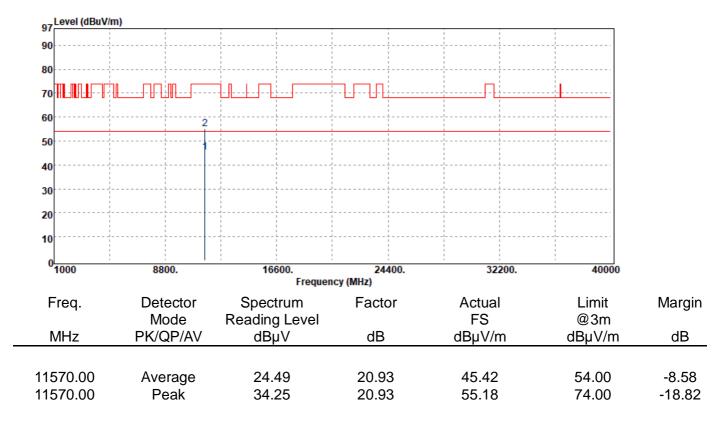



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11n20 B4	Temp./Humi
Test Channel	:5825 MHz	Antenna Po
Test Mode	:Tx CH High	Engineer
EUT Pol	:E2 Plane	


:2020-01-02 :21.5/58 ni. ol. :VERTICAL :Kane

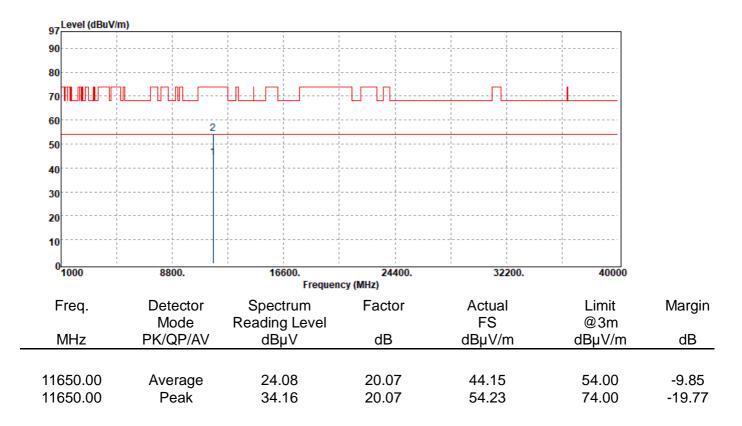

Report No.: ER/2019/C0048 Page: 158 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n20 B4	Temp./Humi.	:21.5/58
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

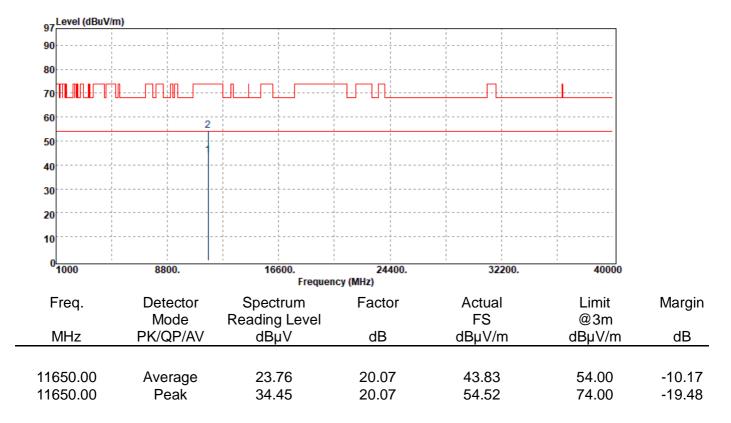




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B1	Temp./Humi.	:21.5/58
Test Channel	:5190 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

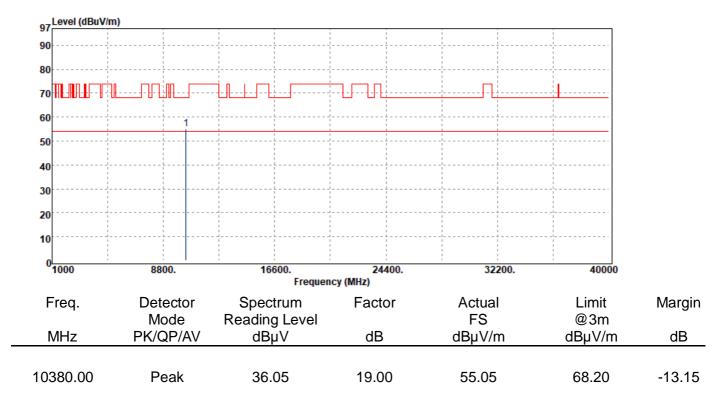




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B1	Temp./Humi.	:21.5/58
Test Channel	:5190 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

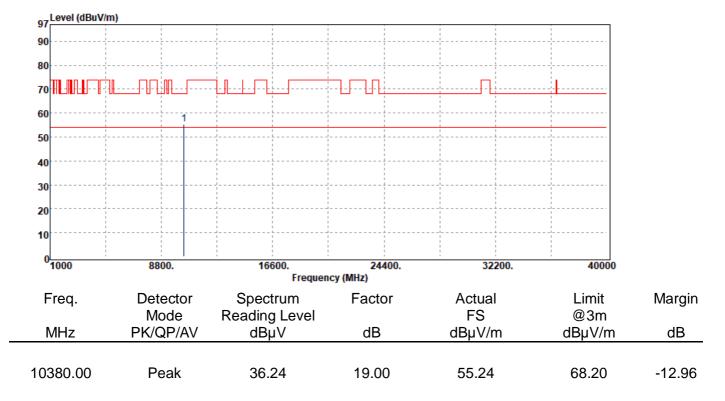




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B1	Temp./Humi.	:21.5/58
Test Channel	:5230 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

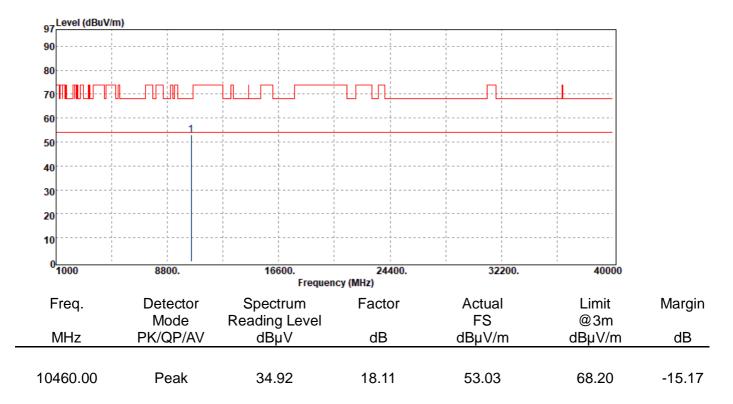

Report No.: ER/2019/C0048 Page: 162 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B1	Temp./Humi.	:21.5/58
Test Channel	:5230 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

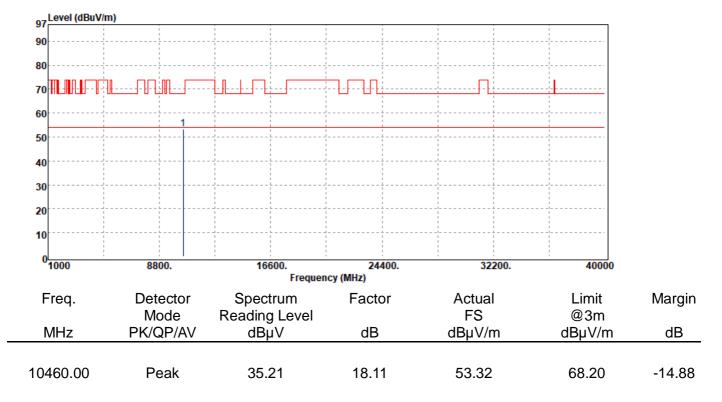




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B2	Temp./Humi.	:21.5/58
Test Channel	:5270 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

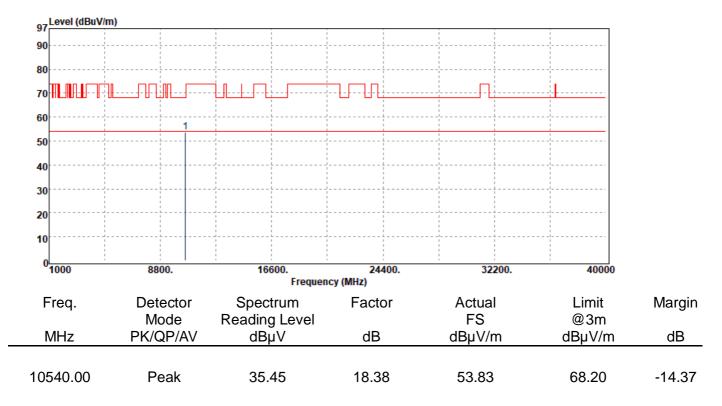




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B2	Temp./Humi.	:21.5/58
Test Channel	:5270 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

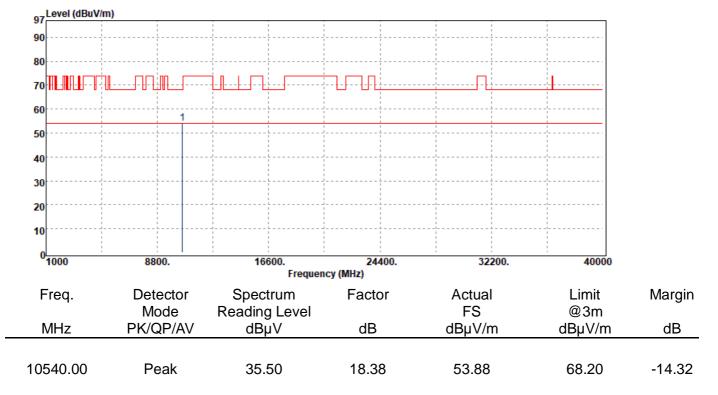



Report Number	:ER/2019/C0048	Test Dat
Operation Mode	:802.11n40 B2	Temp./⊢
Test Channel	:5310 MHz	Antenna
Test Mode	:Tx CH High	Enginee
EUT Pol	:E2 Plane	

Test Date	:2020-01-02
Temp./Humi.	:21.5/58
Antenna Pol.	:VERTICAL
Engineer	:Kane

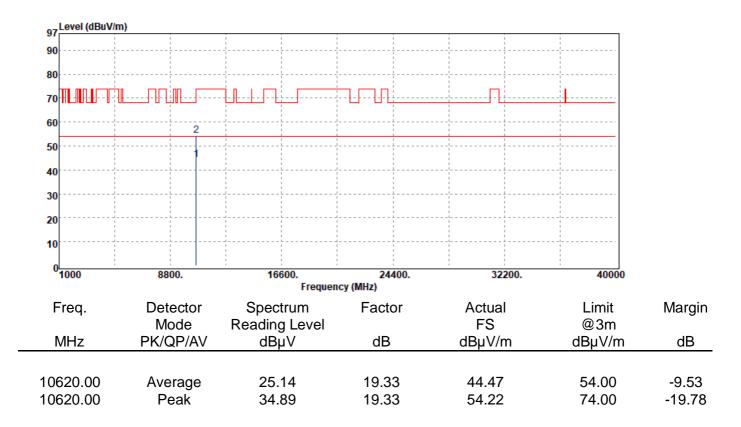




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B2	Temp./Humi.	:21.5/58
Test Channel	:5310 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

0620.00 0620.00	Average Peak	25.03 35.14	19.33 19.33	44.36 54.47	54.00 74.00	-9.6 -19.
		05.00	40.00		54.00	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dE
	Mode	Reading Level		FS	@3m	. Har
Freq.	Detector	Spectrum	Factor	Actual	Limit	Mar
⁰ 1000	8800.	16600. Frequen	24400. cy (MHz)	32200.	40000	
0						
10				1 		
20						
30		J J 				
40						
	1					
50	2					
60						
70	<u> </u>					
80						
90						




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B3	Temp./Humi.	:21.5/58
Test Channel	:5510 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

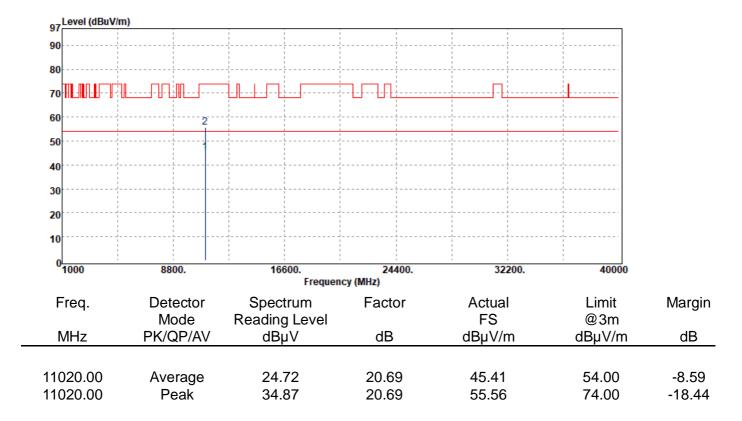




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B3	Temp./Humi.	:21.5/58
Test Channel	:5510 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

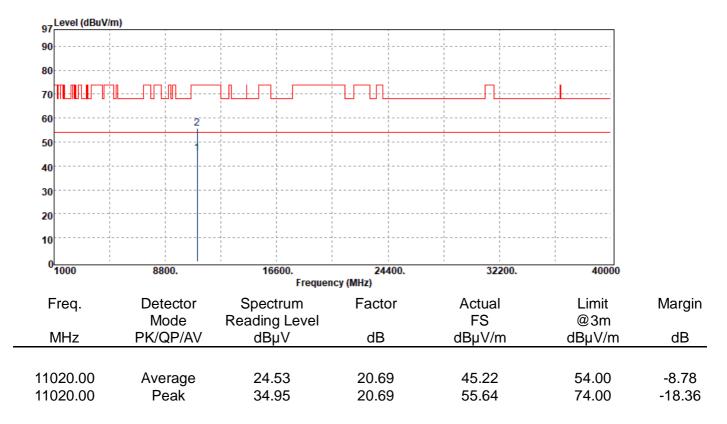




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B3	Temp./Humi.	:21.5/58
Test Channel	:5550 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

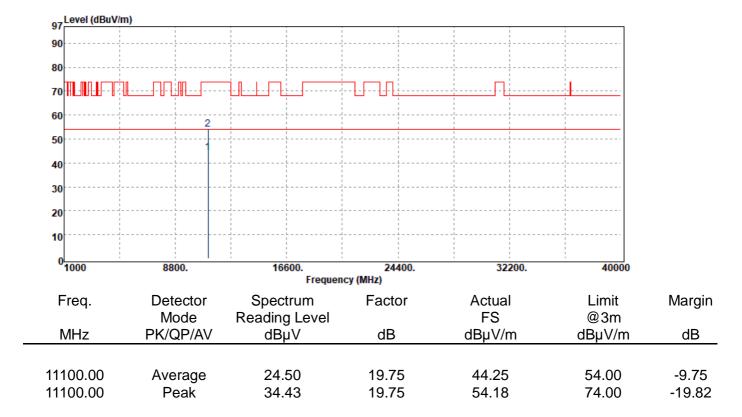




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B3	Temp./Humi.	:21.5/58
Test Channel	:5550 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

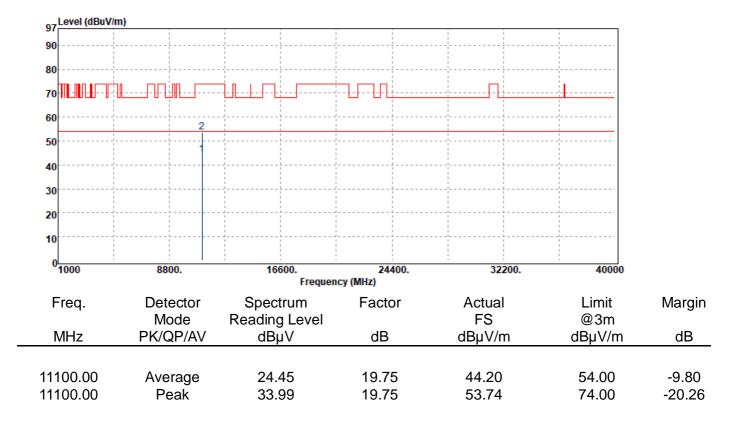




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B3	Temp./Humi.	:21.5/58
Test Channel	:5670 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

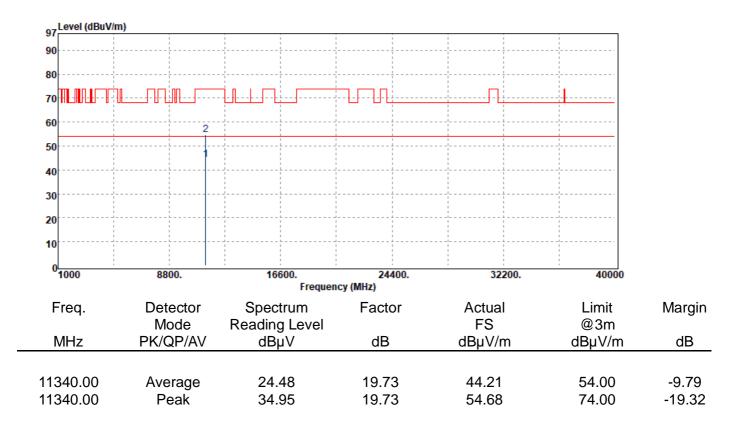

Report No.: ER/2019/C0048 Page: 172 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B3	Temp./Humi.	:21.5/58
Test Channel	:5670 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

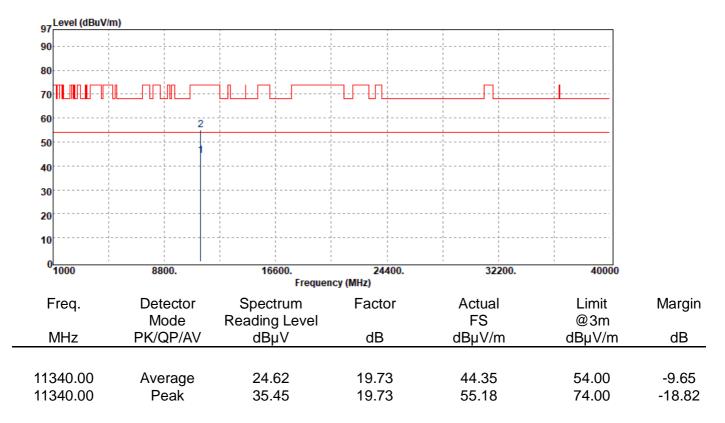




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B4	Temp./Humi.	:21.5/58
Test Channel	:5755 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

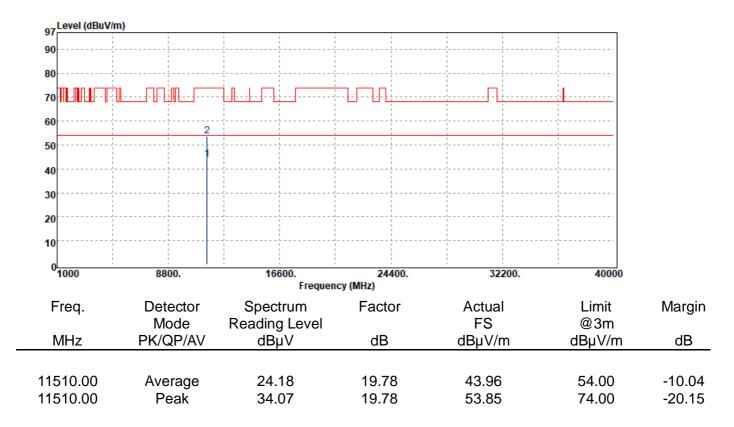

Report No.: ER/2019/C0048 Page: 174 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B4	Temp./Humi.	:21.5/58
Test Channel	:5755 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

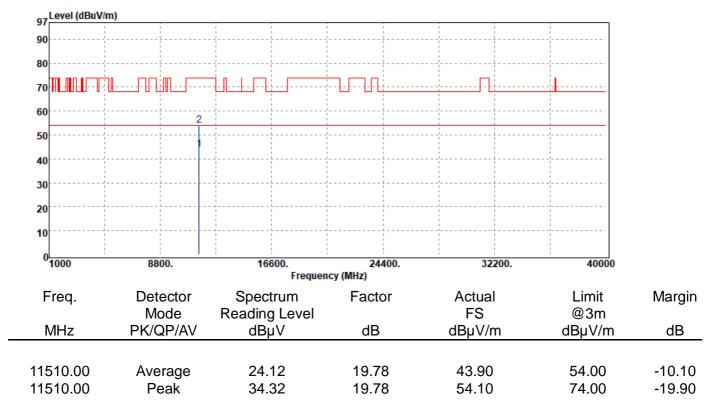




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B4	Temp./Humi.	:21.5/58
Test Channel	:5795 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

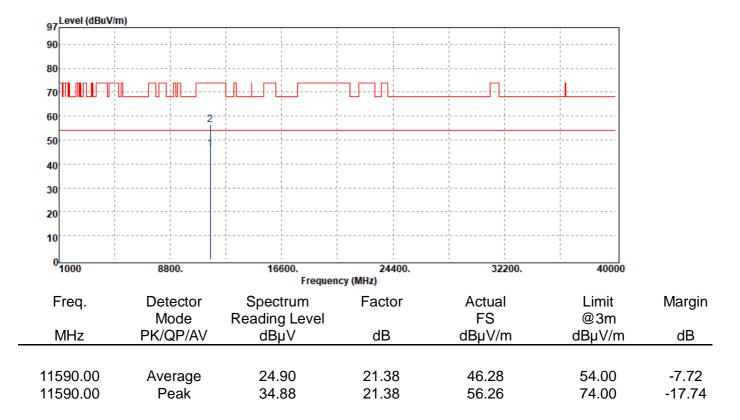

Report No.: ER/2019/C0048 Page: 176 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11n40 B4	Temp./Humi.	:21.5/58
Test Channel	:5795 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

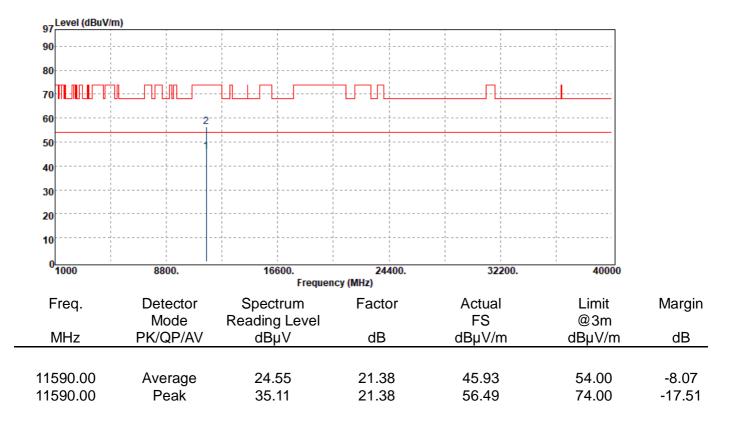

Report No.: ER/2019/C0048 Page: 177 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11ac80 B1	Temp./Humi.	:21.5/58
Test Channel	:5210 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

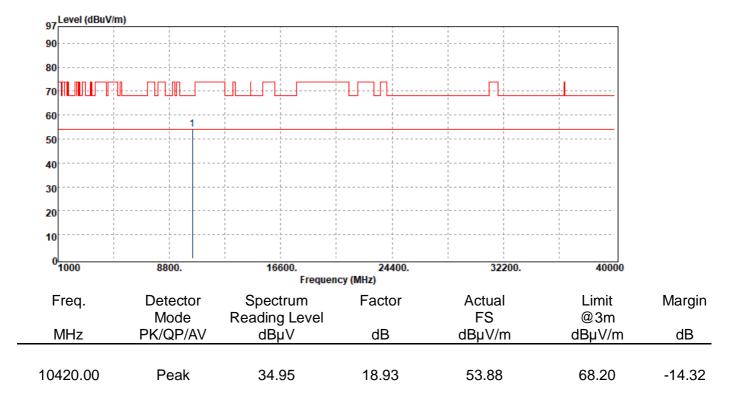

Report No.: ER/2019/C0048 Page: 178 of 361



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11ac80 B1	Temp./Humi.	:21.5/58
Test Channel	:5210 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

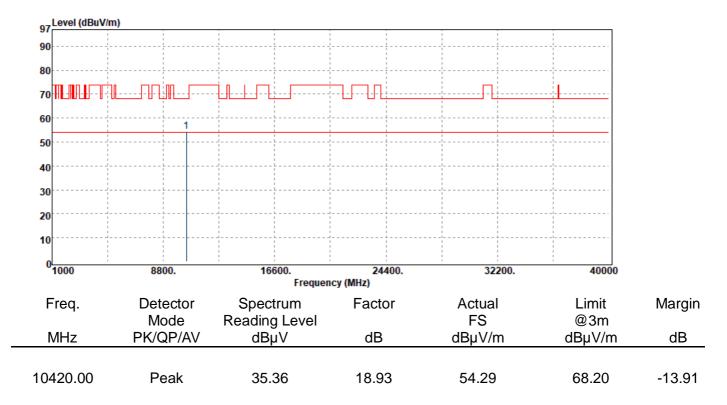



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11ac80 B2	Temp./Humi.	:21.5/58
Test Channel	:5290 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/m)					
90						
80						
70	L					
60			·			
50						
40	L					
30						
20						
10						
0 <mark>1000</mark>	8800.	16600. Frequenc	24400. cy (MHz)	32200.	40000	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margir
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
	-	•		•	•	
10580.00	Peak	34.76	18.85	53.61	68.20	-14.59

:2020-01-02

:HORIZONTAL

:21.5/58

:Kane




Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80 B2	Temp./Humi.
Test Channel	:5290 MHz	Antenna Pol.
Test Mode	:Tx CH High	Engineer
EUT Pol	:E2 Plane	

97	1)					
90						
80						
70						
60						
50						
40						
30						
20						
10						
0	8800.	16600.	2440	0 32	200. 40000	.
1000	8000.		icy (MHz)	JZ	4000	,
Freq.	Detector	Spectrum	Factor			Margir
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/n	@3m n dBµV/m	n dB
		~- r -		pi 1/1		
0580.00	Peak	35.25	18.85	54.10	68.20	-14.10



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80 B3	Temp./Hu
Test Channel	:5530 MHz	Antenna
Test Mode	:Tx CH Low	Engineer
EUT Pol	:E2 Plane	


Test Date	:2020-01-02
Temp./Humi.	:21.5/58
Antenna Pol.	:VERTICAL
Engineer	:Kane

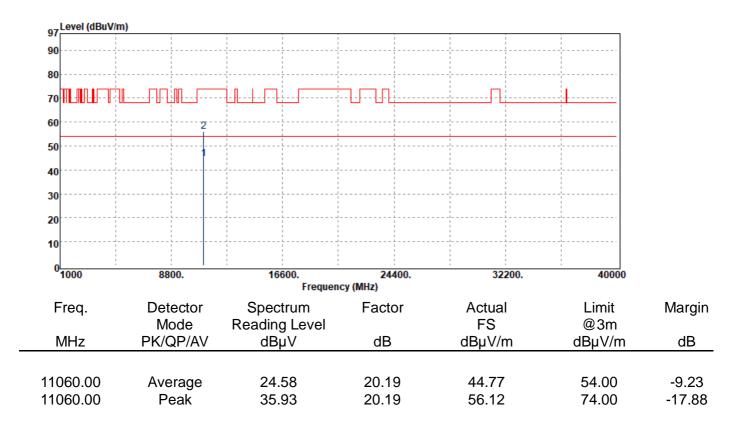

Report No.: ER/2019/C0048 Page: 182 of 361




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11ac80 B3	Temp./Humi.	:21.5/58
Test Channel	:5530 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

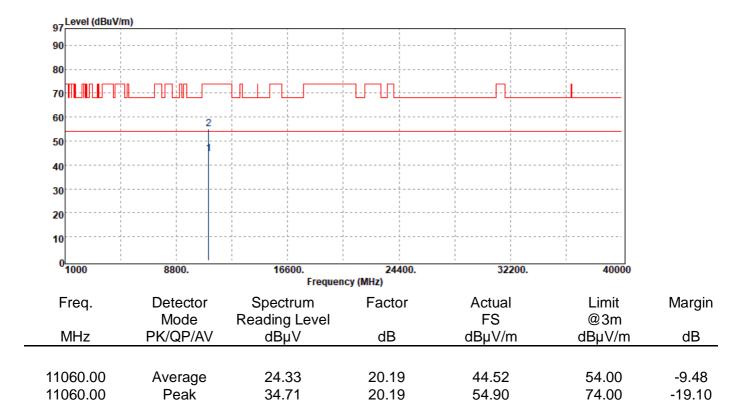



Report Number	:ER/2019/C0048	
Operation Mode	:802.11ac80 B3	
Test Channel	:5610 MHz	
Test Mode	:Tx CH High	
EUT Pol	:E2 Plane	

Test Date	:2020-01-02
Temp./Humi.	:21.5/58
Antenna Pol.	:VERTICAL
Engineer	:Kane

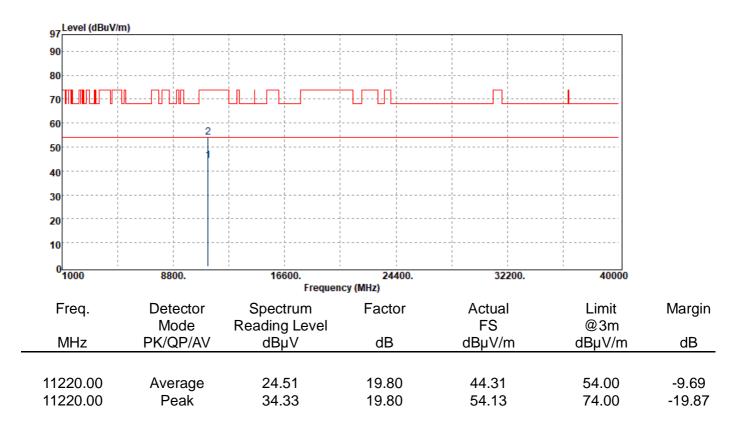


Report No.: ER/2019/C0048 Page: 184 of 361



Report Number	:ER/2019/C0048	-
Operation Mode	:802.11ac80 B3	-
Test Channel	:5610 MHz	/
Test Mode	:Tx CH High	I
EUT Pol	:E2 Plane	

Test Date	:2020-01-02
Temp./Humi.	:21.5/58
Antenna Pol.	:HORIZONTAL
Engineer	:Kane

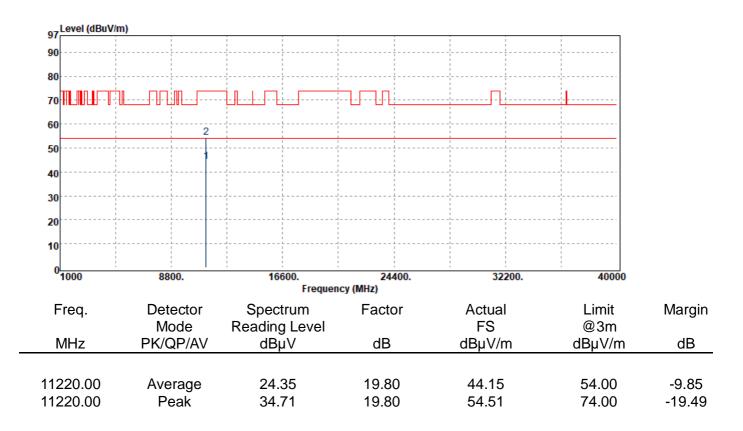




Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11ac80 B4	Temp./Humi.	:21.5/58
Test Channel	:5775 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/m	n)					
90						
80			· · · · · · · · · · · · · · · · · · ·			
70 - H L - H - L - L - L - L - L	<u></u>		<u>.</u>			
60	2					
50		· · · · · · · · · · · · · · · · · · ·				
40						
30						
20						
10						
⁰ 1000	8800.	16600. Freque	2440(ncy (MHz)	0. 32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margi
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1550.00	Average	24.11	20.48	44.59	54.00	-9.41
1550.00	Peak	35.06	20.48	55.54	74.00	-18.4

Report No.: ER/2019/C0048 Page: 186 of 361



Report Number	:ER/2019/C0048	Test Date	:2020-01-02
Operation Mode	:802.11ac80 B4	Temp./Humi.	:21.5/58
Test Channel	:5775 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

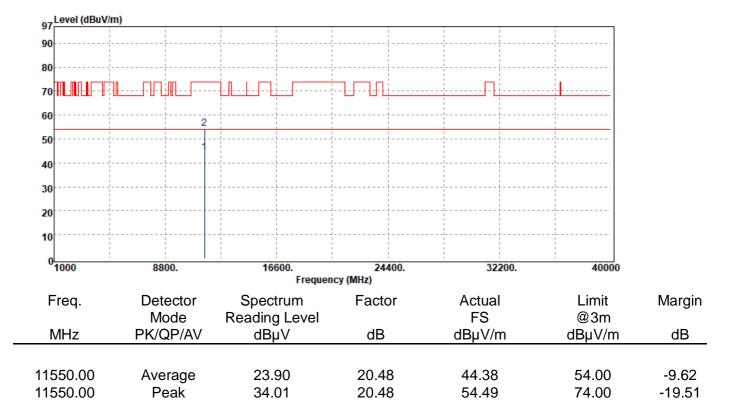




Internal Antenna


Report Number	:ER/2019/C0048
Operation Mode	:802.11a B1
Test Channel	:5180 MHz
Test Mode	:Tx CH Low
EUT Pol	:E2 Plane

Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:VERTICAL
Engineer	:Kane

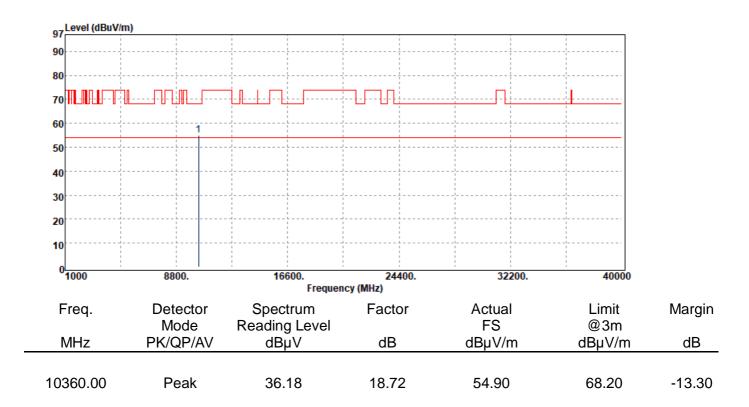




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B1	Temp./Humi.	:23.5/64
Test Channel	:5180 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

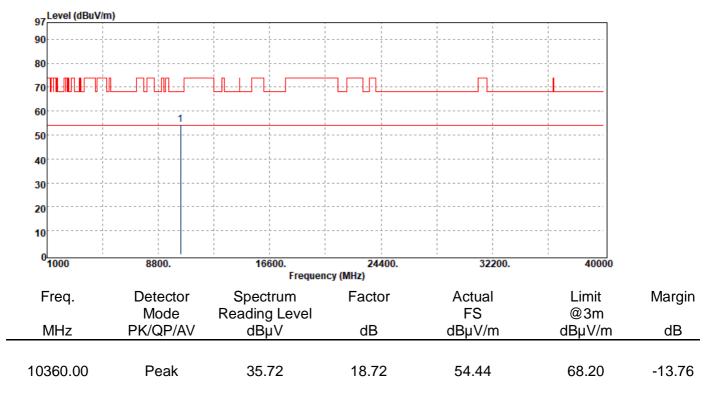




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B1	Temp./Humi.	:23.5/64
Test Channel	:5220 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

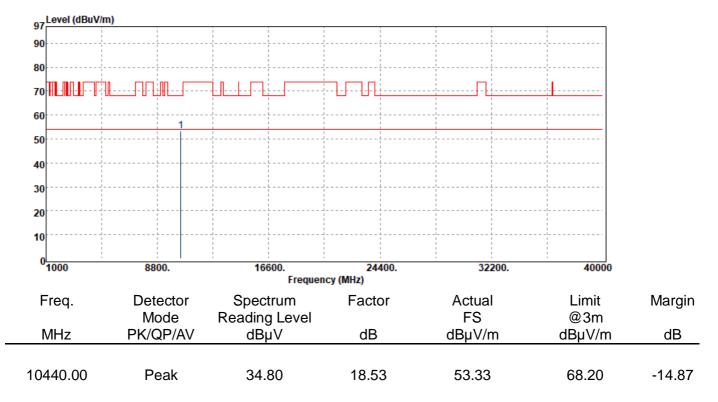



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B1	Temp./Humi.	:23.5/64
Test Channel	:5220 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

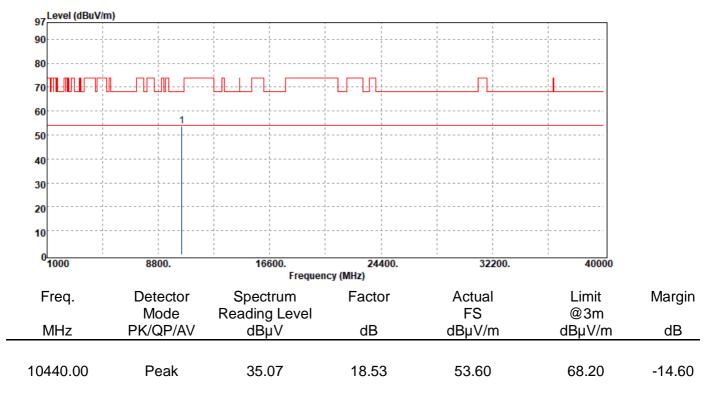




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B1	Temp./Humi.	:23.5/64
Test Channel	:5240 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		



Report No.: ER/2019/C0048 Page: 192 of 361




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B1	Temp./Humi.	:23.5/64
Test Channel	:5240 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

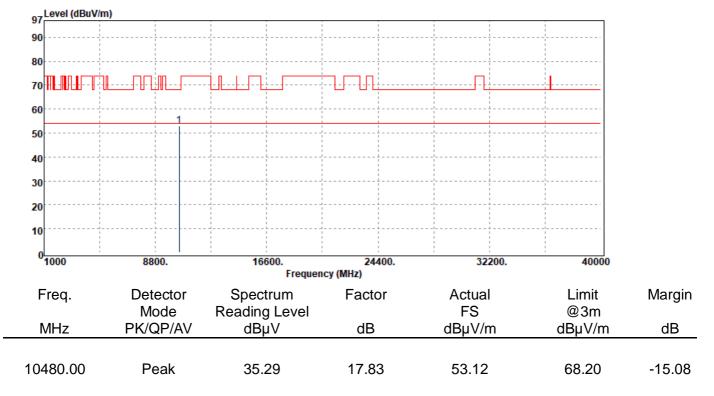




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B2	Temp./Humi.	:23.5/64
Test Channel	:5260 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

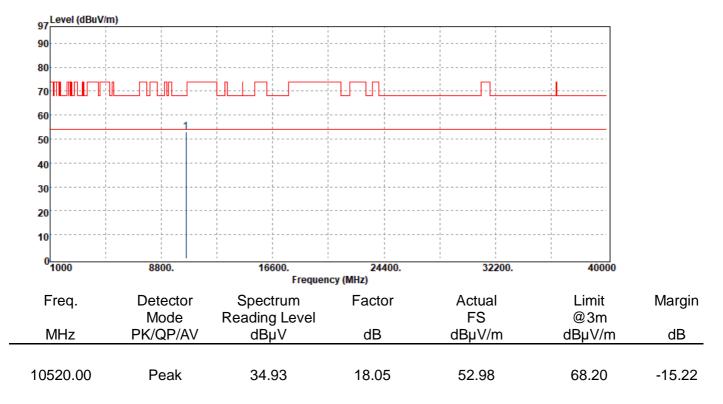




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B2	Temp./Humi.	:23.5/64
Test Channel	:5260 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

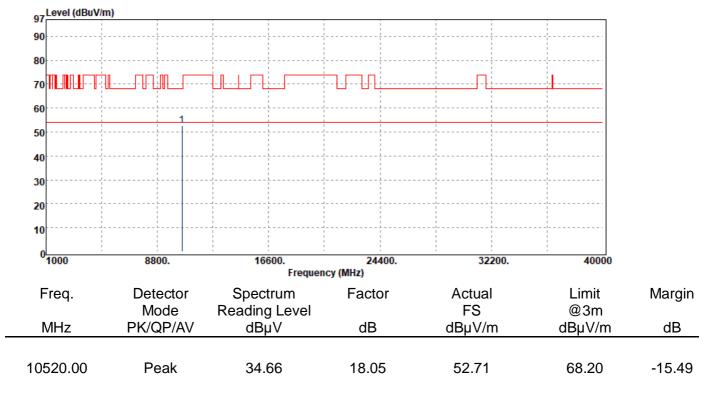




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B2	Temp./Humi.	:23.5/64
Test Channel	:5300 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

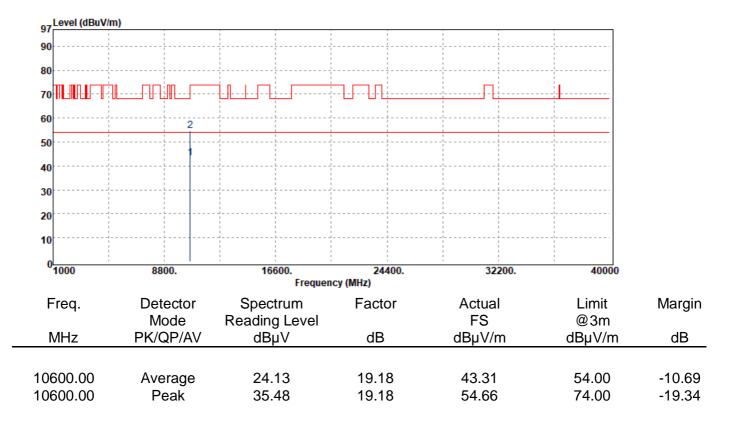




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B2	Temp./Humi.	:23.5/64
Test Channel	:5300 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

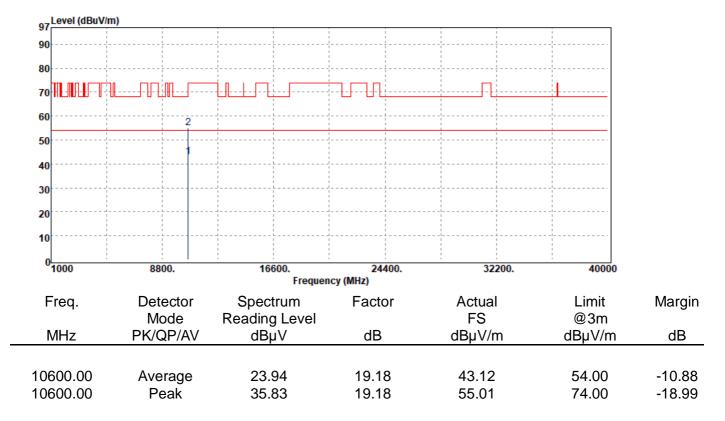




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B2	Temp./Humi.	:23.5/64
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

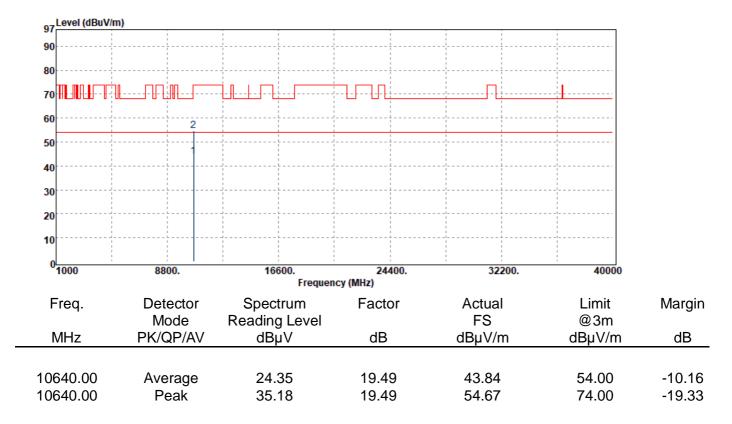




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B2	Temp./Humi.	:23.5/64
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

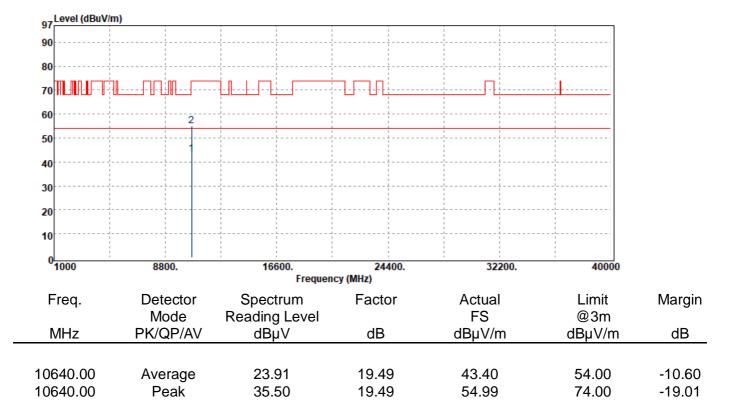




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B3	Temp./Humi.	:23.5/64
Test Channel	:5500 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

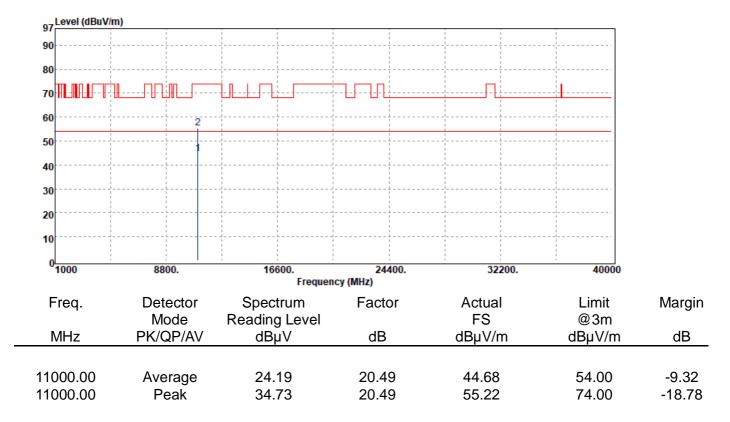




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B3	Temp./Humi.	:23.5/64
Test Channel	:5500 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

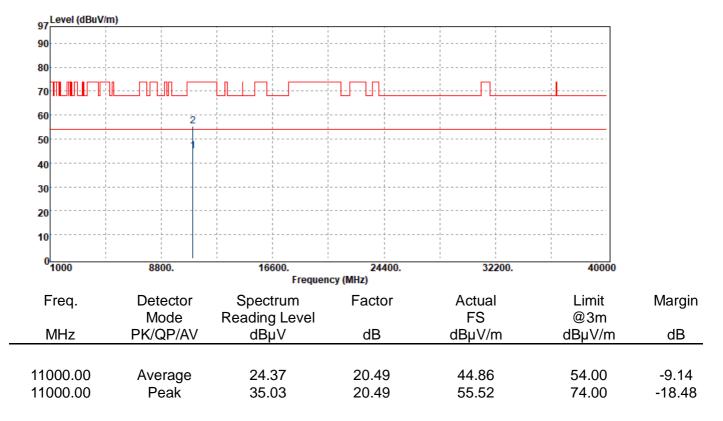




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B3	Temp./Humi.	:23.5/64
Test Channel	:5580 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

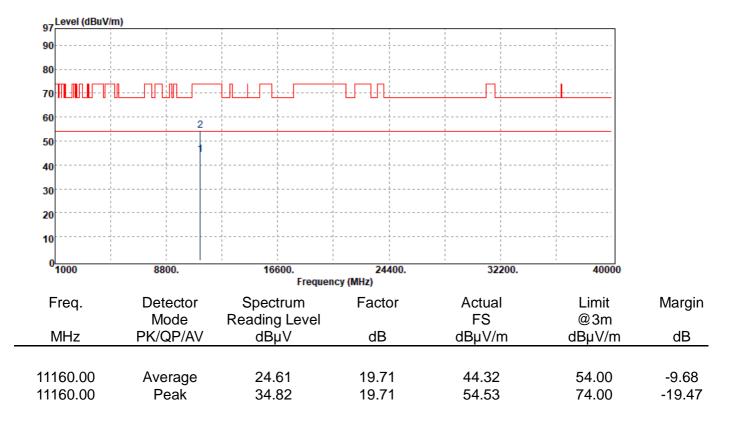




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B3	Temp./Humi.	:23.5/64
Test Channel	:5580 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

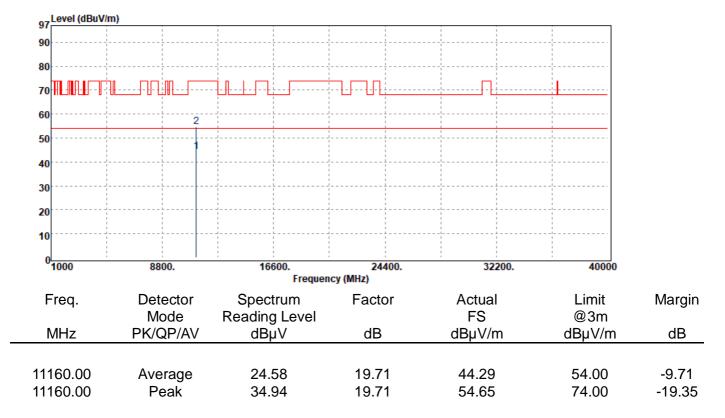




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B3	Temp./Humi.	:23.5/64
Test Channel	:5700 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

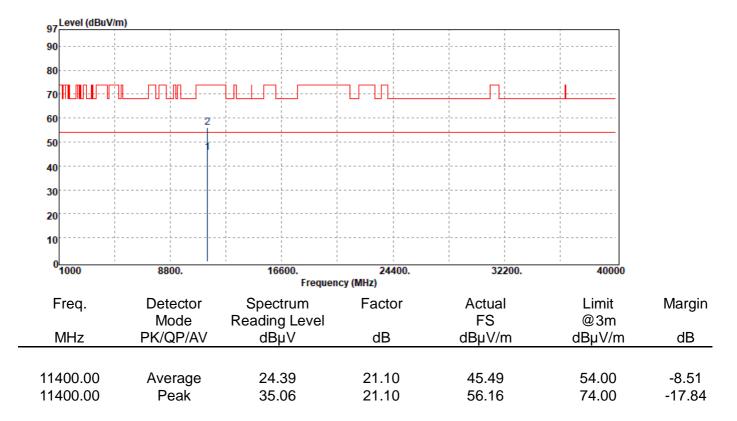




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B3	Temp./Humi.	:23.5/64
Test Channel	:5700 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

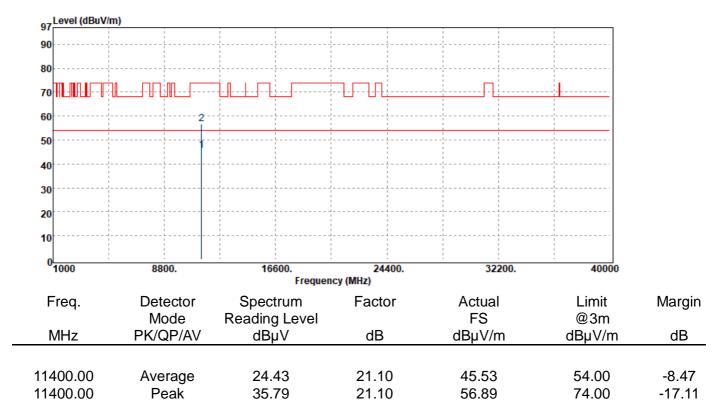




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B4	Temp./Humi.	:23.5/64
Test Channel	:5745 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

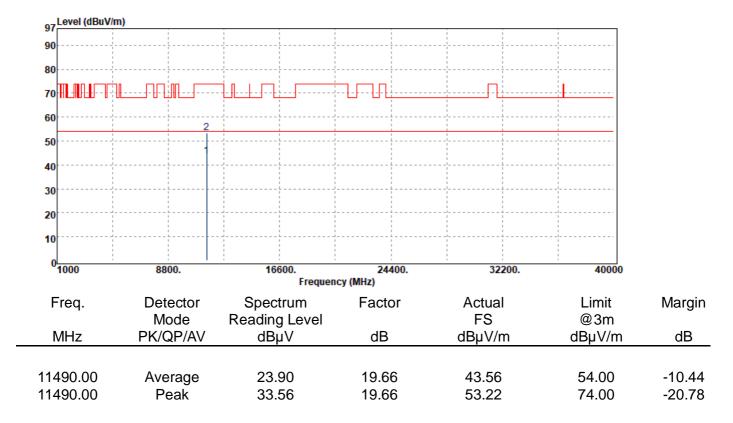




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B4	Temp./Humi.	:23.5/64
Test Channel	:5745 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

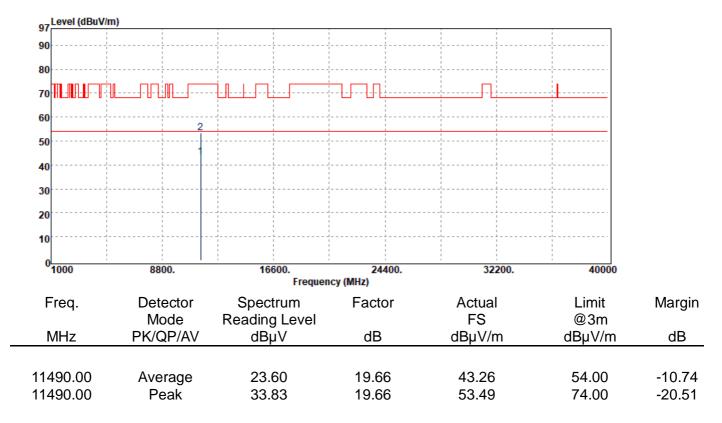




Rep	ort Number	:ER/2019/C0048	Test Date	:2019-11-26
Ope	ration Mode	:802.11a B4	Temp./Humi.	:23.5/64
Test	Channel	:5785 MHz	Antenna Pol.	:VERTICAL
Test	Mode	:Tx CH Mid	Engineer	:Kane
EUT	Pol	:E2 Plane		

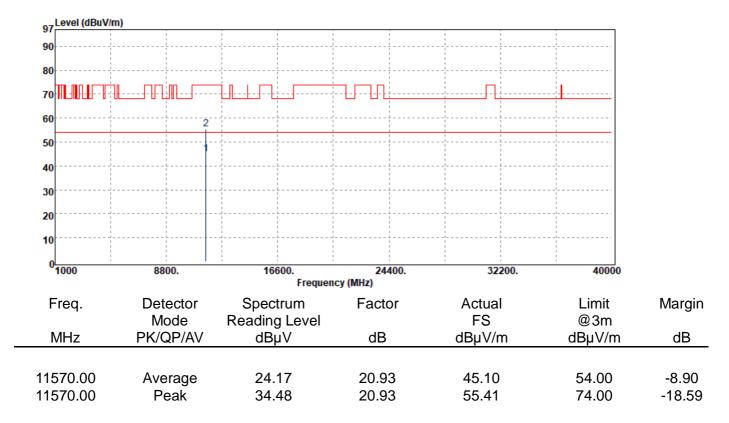




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B4	Temp./Humi.	:23.5/64
Test Channel	:5785 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

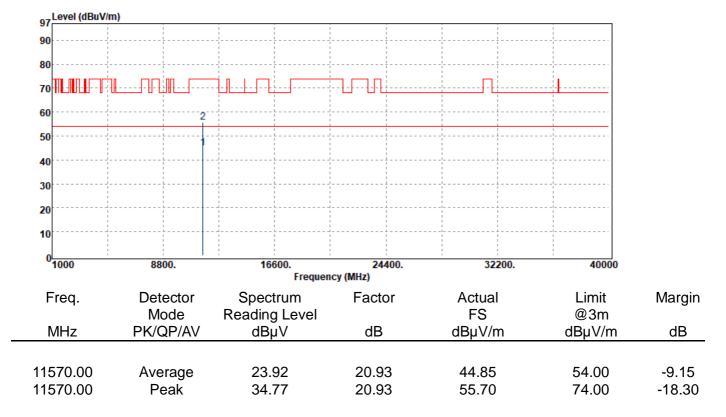




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B4	Temp./Humi.	:23.5/64
Test Channel	:5825 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

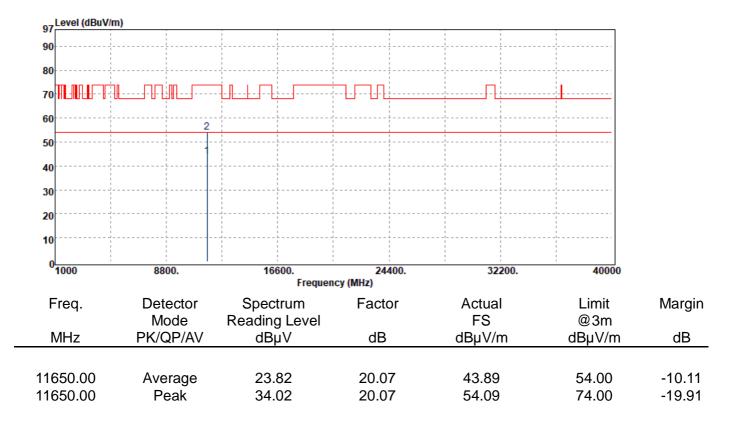




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11a B4	Temp./Humi.	:23.5/64
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

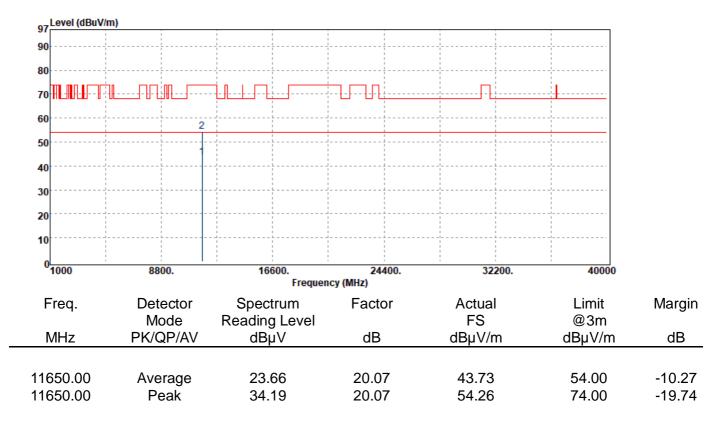




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B1	Temp./Humi.	:23.5/64
Test Channel	:5180 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

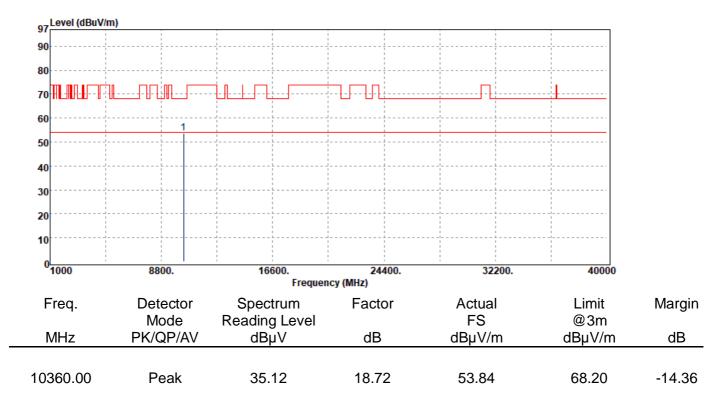

Report No.: ER/2019/C0048 Page: 212 of 361




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B1	Temp./Humi.	:23.5/64
Test Channel	:5180 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

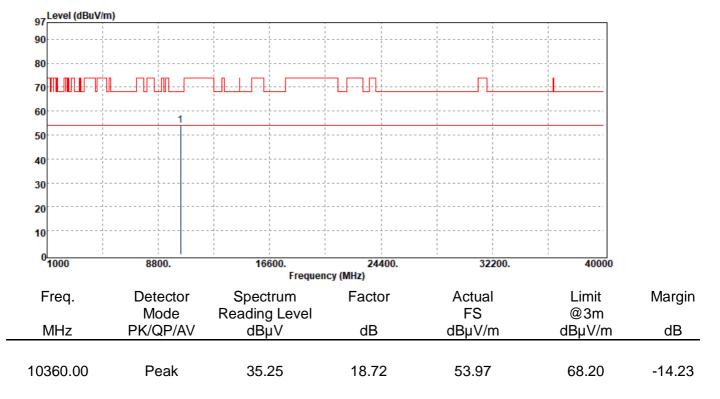




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B1	Temp./Humi.	:23.5/64
Test Channel	:5220 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

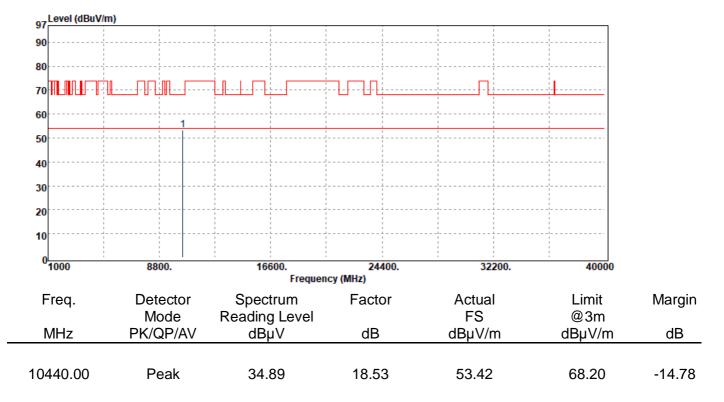




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B1	Temp./Humi.	:23.5/64
Test Channel	:5220 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

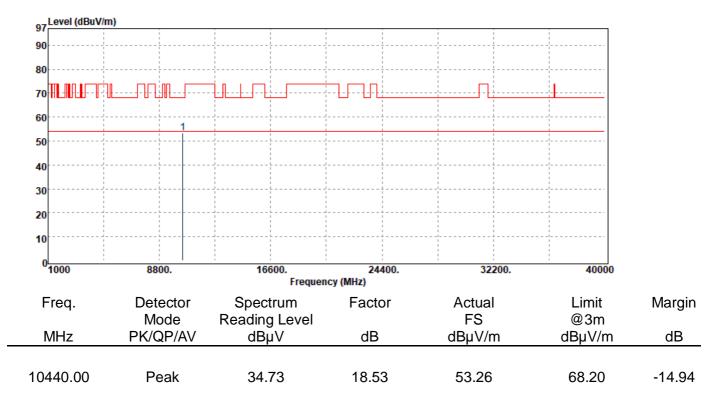




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B1	Temp./Humi.	:23.5/64
Test Channel	:5240 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

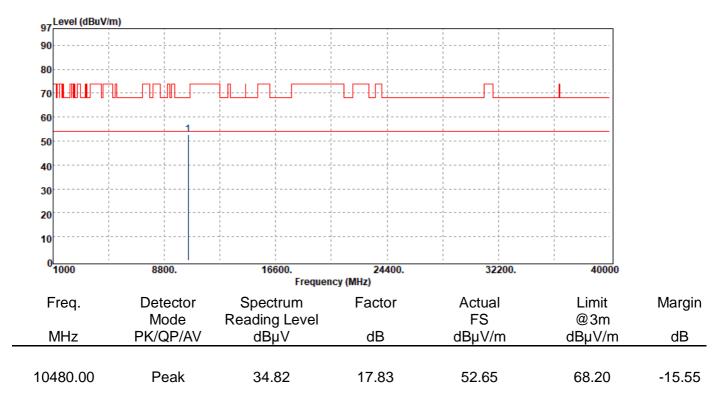




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B1	Temp./Humi.	:23.5/64
Test Channel	:5240 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

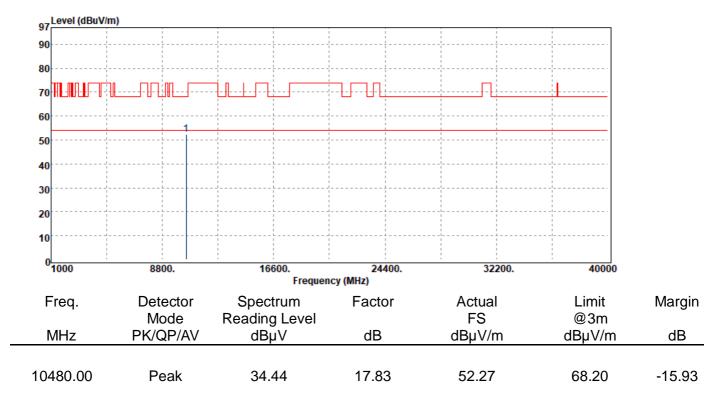




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B2	Temp./Humi.	:23.5/64
Test Channel	:5260 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

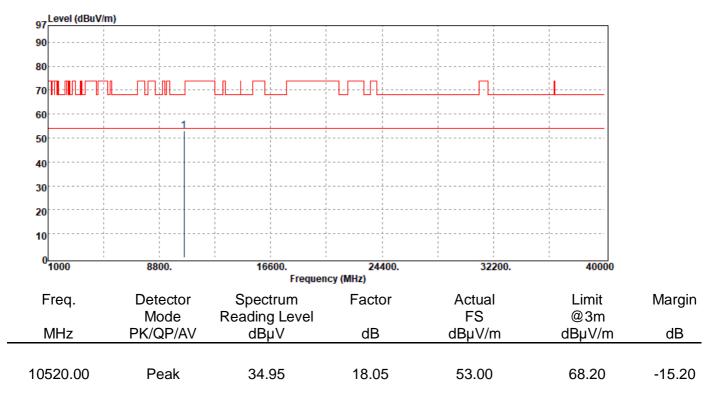




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B2	Temp./Humi.	:23.5/64
Test Channel	:5260 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

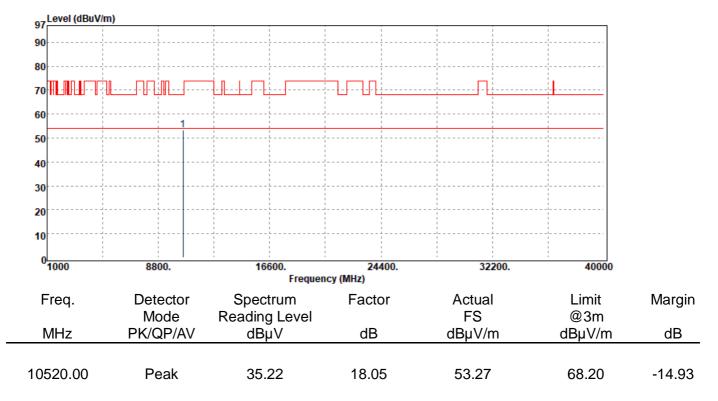




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B2	Temp./Humi.	:23.5/64
Test Channel	:5300 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

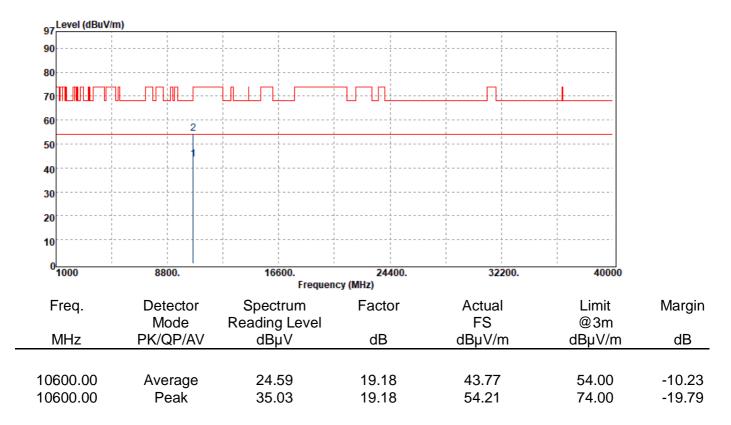



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B2	Temp./Humi.	:23.5/64
Test Channel	:5300 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

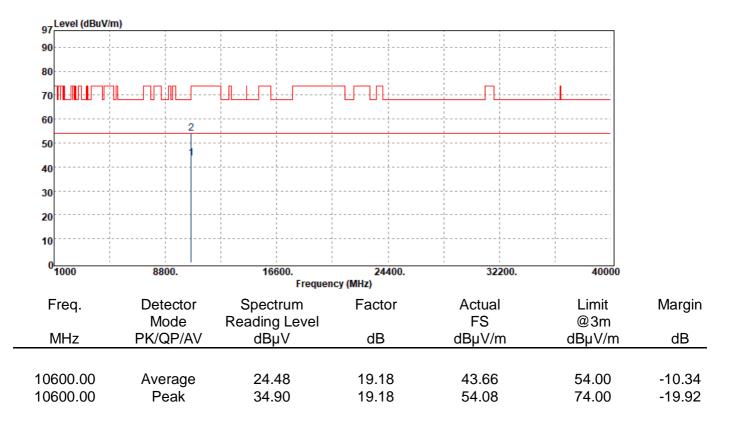



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B2	Temp./Humi.	:23.5/64
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/n	n)					
90						
80						
70 H						
60	2					
50			 			
40						
30						
20						
10						
0 <mark></mark>	8800.	16600. Frequence	24400. cy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margir
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
0040.00		24.69	10.40	44 47	F 4 00	0.02
10640.00 10640.00	Average Peak	24.68 34.18	19.49 19.49	44.17 53.67	54.00 74.00	-9.83 -20.33
10040.00	FEak	54.10	19.49	55.07	74.00	-20.53

Report No.: ER/2019/C0048 Page: 222 of 361




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B2	Temp./Humi.	:23.5/64
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

)					
			· · · · · · · · · · · · · · · · · · ·		
8800	16600	24400	32200	40000	
0000.			52200.	40000	
Detector	Spectrum	Factor	Actual	Limit	Margin
PK/QP/AV	αΒμν	dВ	aBhr/w	aBh n/w	dB
Average	24.43	19.49	43.92	54.00	-10.08
	2	2 8800. 16600. Frequence Detector Spectrum Mode Reading Level PK/QP/AV dBµV	2 2 8800. 16600. 24400. Frequency (MHz) Detector Spectrum Factor Mode Reading Level PK/QP/AV dBµV dB	2 2 8800. 16600. 24400. 32200. Frequency (MHz) Detector Spectrum Factor Actual Mode Reading Level FS PK/QP/AV dBµV dB dBµV/m	2 2 3 8800. 16600. 24400. 32200. 40000 Frequency (MHz) Detector Mode Reading Level FS @3m PK/QP/AV dBµV dB dBµV/m dBµV/m




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B3	Temp./Humi.	:23.5/64
Test Channel	:5500 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

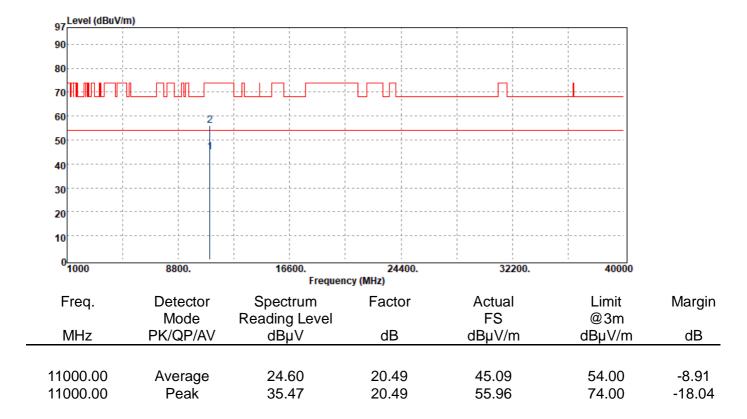



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B3	Temp./Humi.	:23.5/64
Test Channel	:5500 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

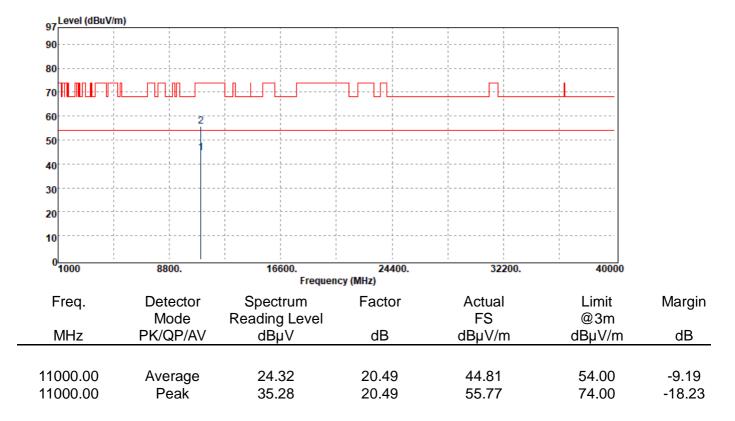




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B3	Temp./Humi.	:23.5/64
Test Channel	:5580 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/n	1)					
90						
80						
70 _ 	<u>₽</u> 9-1-1 <u>-</u> 9819			<u></u>		
60	2					
50						
40						
30	L		 		1 1 1 1	
20			 		1 1 1 1	
10						
0 <mark></mark> 1000	8800.	16600. Frequen	24400. cy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Marg
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
1160.00	Average	24.59	19.71	44.30	54.00	-9.7
1160.00	Peak	34.94	19.71	54.65	74.00	-19.3




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B3	Temp./Humi.	:23.5/64
Test Channel	:5580 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

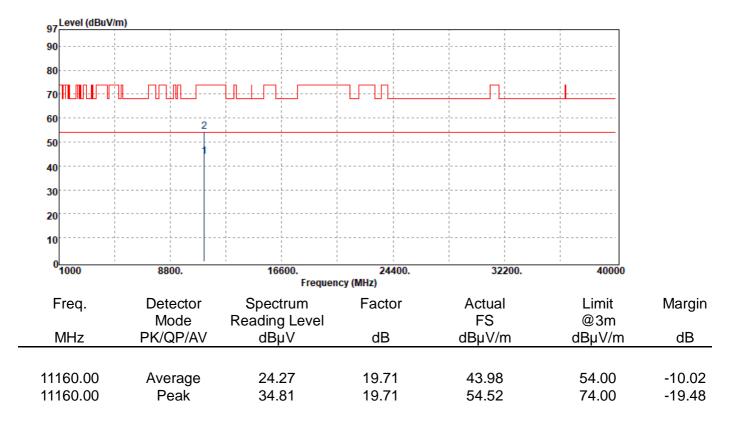



Report Number	:ER/2019/C0048	Test Da
Operation Mode	:802.11n20 B3	Temp./
Test Channel	:5700 MHz	Antenr
Test Mode	:Tx CH High	Engine
EUT Pol	:E2 Plane	


Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:VERTICAL
Engineer	:Kane

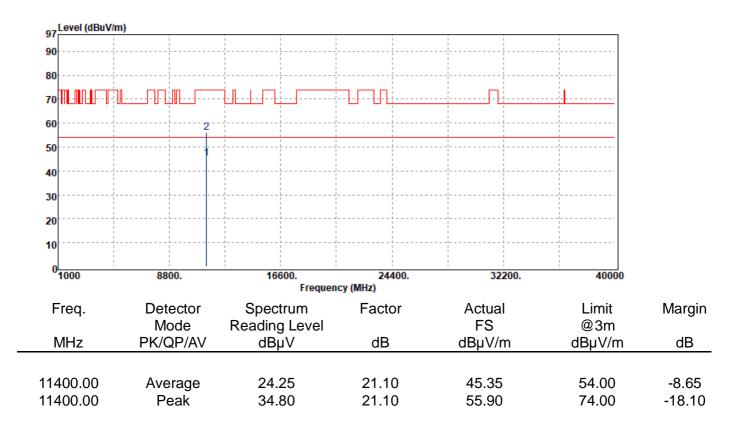

Report No.: ER/2019/C0048 Page: 228 of 361




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B3	Temp./Humi.	:23.5/64
Test Channel	:5700 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

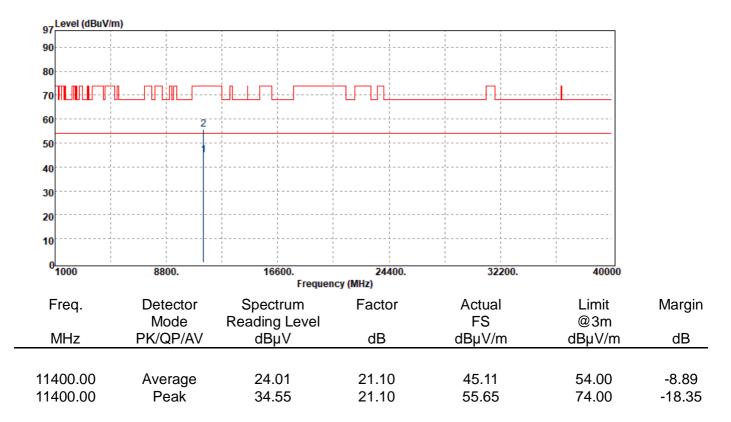




Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11n20 B4	Temp./Hu
Test Channel	:5745 MHz	Antenna F
Test Mode	:Tx CH Low	Engineer
EUT Pol	:E2 Plane	

Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:VERTICAL
Engineer	:Kane

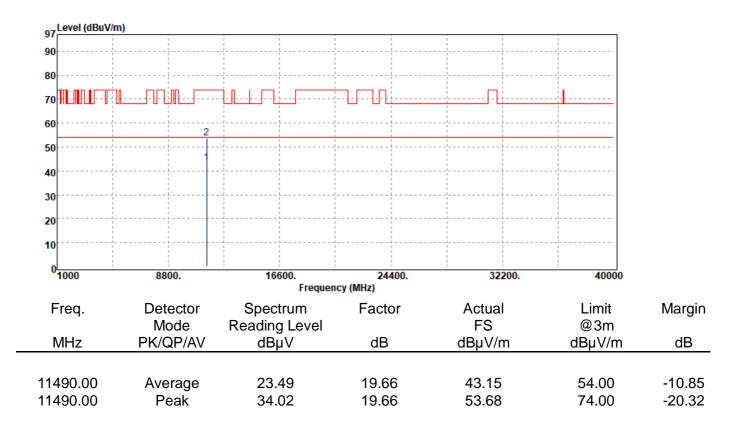




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B4	Temp./Humi.	:23.5/64
Test Channel	:5745 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

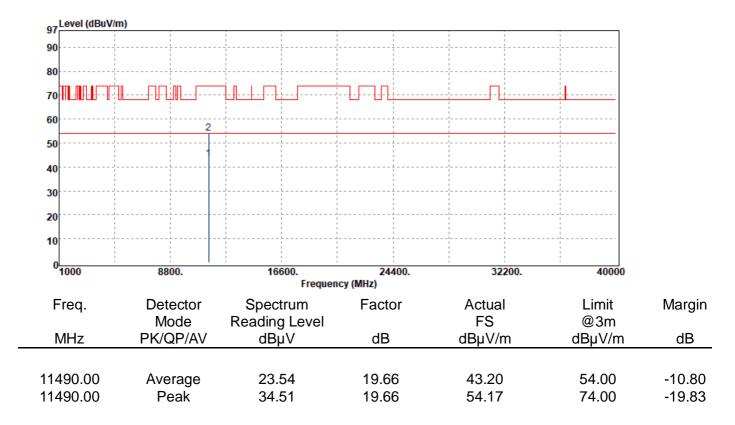




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B4	Temp./Humi.	:23.5/64
Test Channel	:5785 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

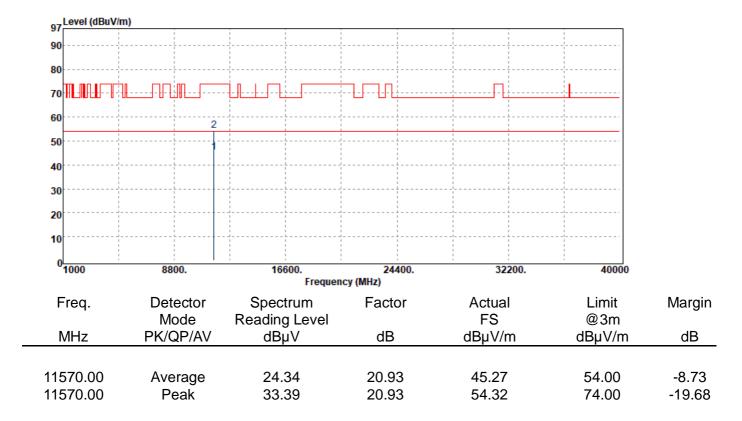

Report No.: ER/2019/C0048 Page: 232 of 361



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B4	Temp./Humi.	:23.5/64
Test Channel	:5785 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

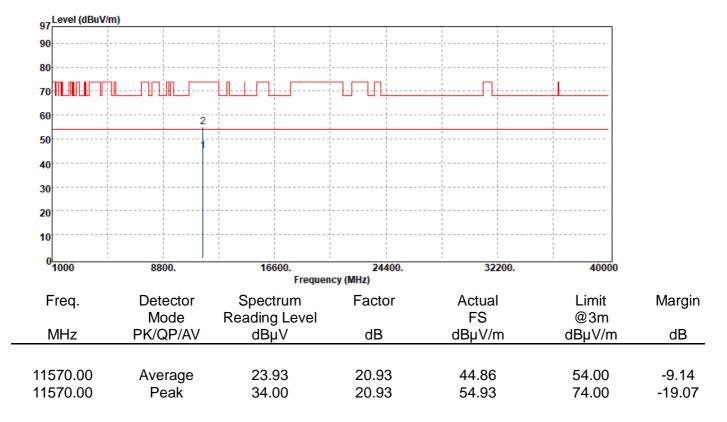


:2019-11-26

:23.5/64 :VERTICAL

:Kane



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11n20 B4	Temp./Humi.
Test Channel	:5825 MHz	Antenna Pol.
Test Mode	:Tx CH High	Engineer
EUT Pol	:E2 Plane	

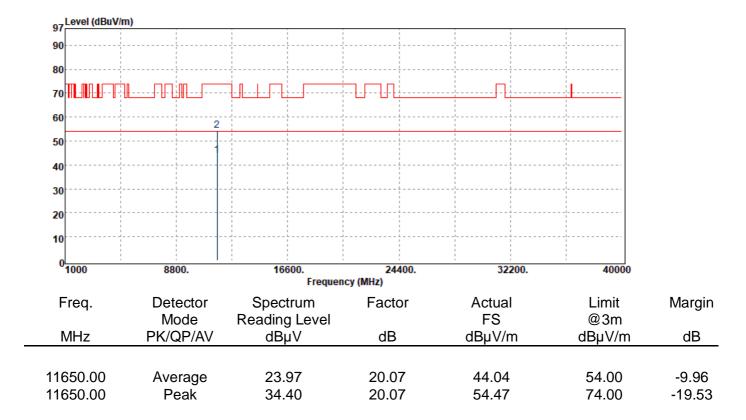




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n20 B4	Temp./Humi.	:23.5/64
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		






Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B1	Temp./Humi.	:23.5/64
Test Channel	:5190 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

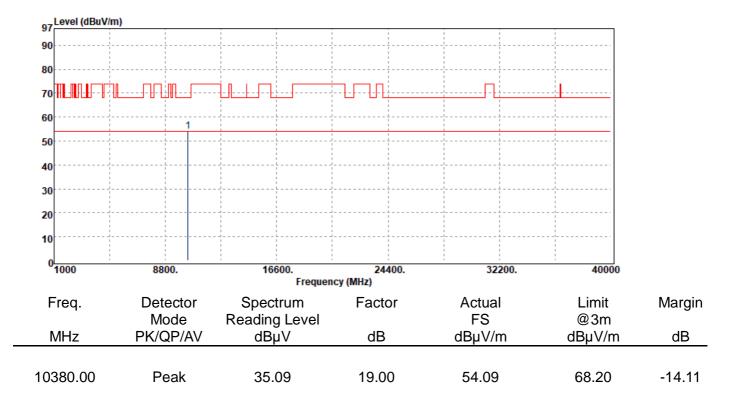




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B1	Temp./Humi.	:23.5/64
Test Channel	:5190 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

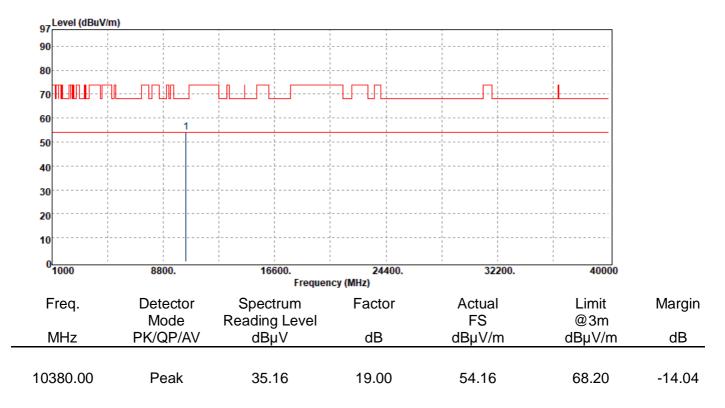




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B1	Temp./Humi.	:23.5/64
Test Channel	:5230 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

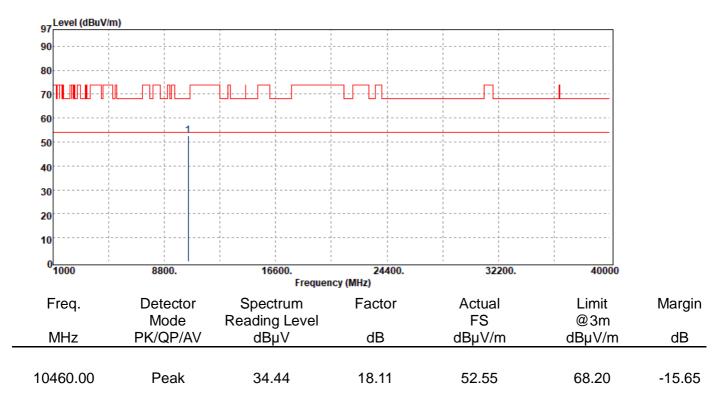



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B1	Temp./Humi.	:23.5/64
Test Channel	:5230 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

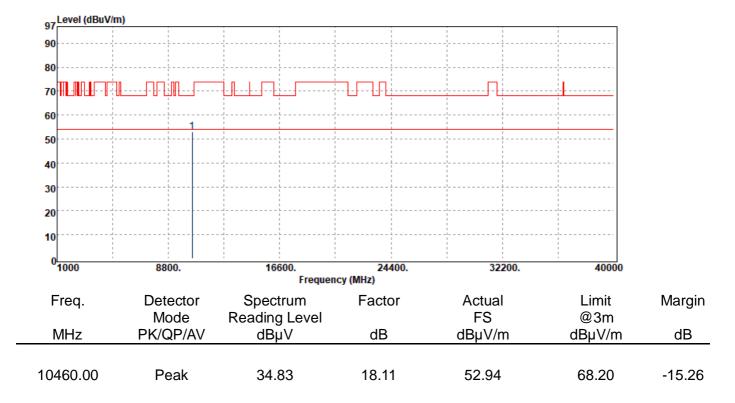




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B2	Temp./Humi.	:23.5/64
Test Channel	:5270 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		






Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B2	Temp./Humi.	:23.5/64
Test Channel	:5270 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

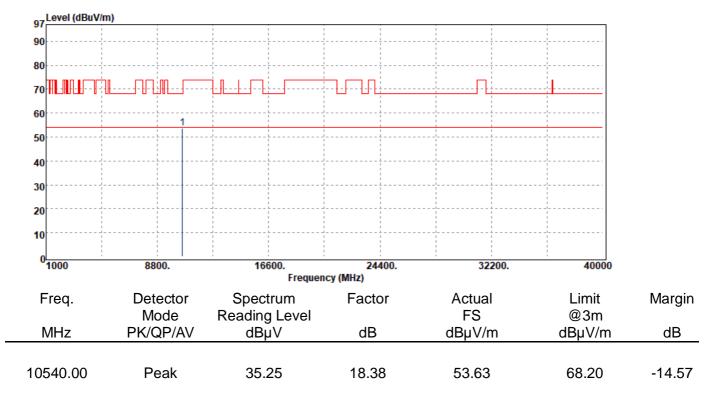



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11n40 B2	Temp./Hu
Test Channel	:5310 MHz	Antenna F
Test Mode	:Tx CH High	Engineer
EUT Pol	:E2 Plane	

Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:VERTICAL
Engineer	:Kane

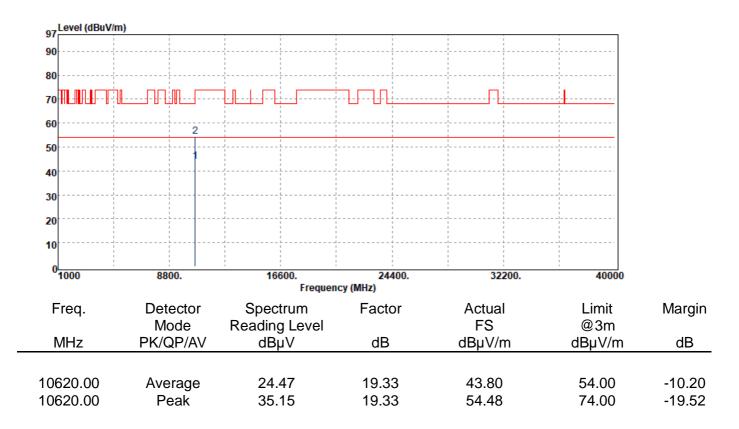


Report No.: ER/2019/C0048 Page: 242 of 361



Report Number	:ER/2019/C0048	Te
Operation Mode	:802.11n40 B2	Te
Test Channel	:5310 MHz	Ar
Test Mode	:Tx CH High	Er
EUT Pol	:E2 Plane	

Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:HORIZONTAL
Engineer	:Kane

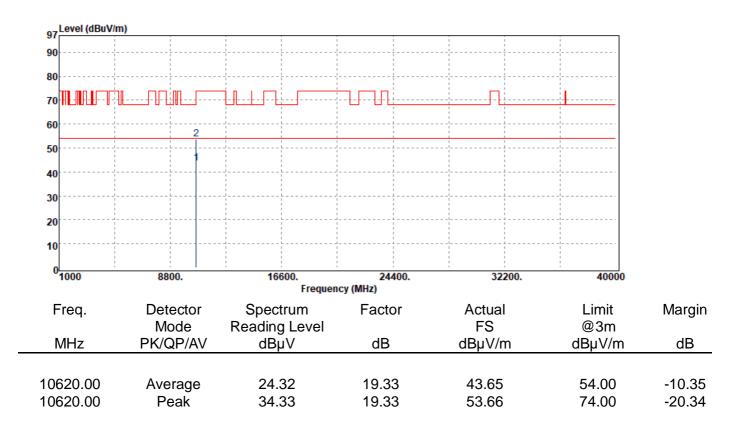

:2019-11-26

:23.5/64 :VERTICAL

:Kane




Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11n40 B3	Temp./Humi.
Test Channel	:5510 MHz	Antenna Pol.
Test Mode	:Tx CH Low	Engineer
EUT Pol	:E2 Plane	

97 Level (dBuV/m	1)					
90						
80						
70						
60	2					
50						
40						
30					1 1 1 1	
20						
10						
0 <mark></mark>	8800.	16600. Frequenc	24400. cy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margi
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
11020.00	Average	24.24	20.69	44.93	54.00	-9.07
11020.00	Average Peak	24.24 33.98	20.69	44.93 54.67	54.00 74.00	-9.07




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B3	Temp./Humi.	:23.5/64
Test Channel	:5510 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

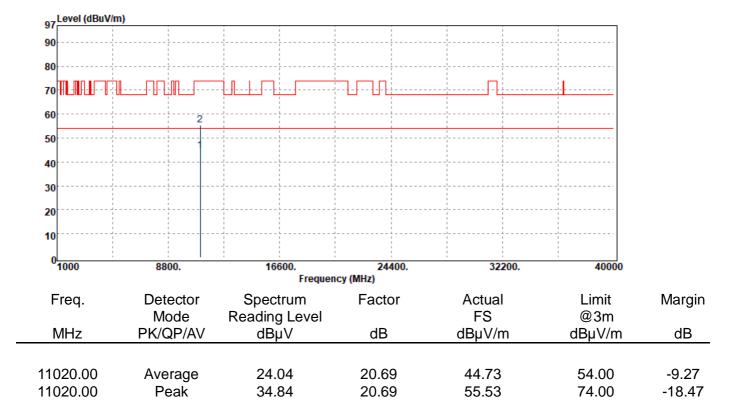




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B3	Temp./Humi.	:23.5/64
Test Channel	:5550 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

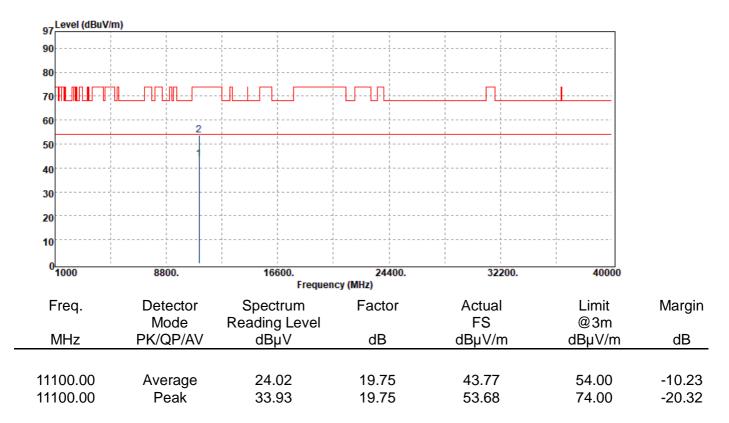



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B3	Temp./Humi.	:23.5/64
Test Channel	:5550 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Mid	Engineer	:Kane
EUT Pol	:E2 Plane		

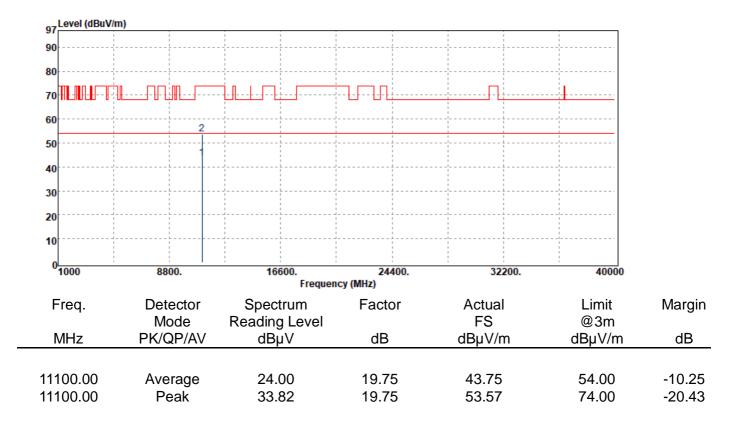




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B3	Temp./Humi.	:23.5/64
Test Channel	:5670 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/m	n)					
90						
80			·			
70	┠╛-┠╴┖┊╢╢╴-╛	╶┨╌╢╴╴┟╴╴┚╴╴╴╴╸				
60	2	· · · · · · · · · · · · · · · · · · ·				
50						
40						
30						
20						
10						
0 <mark></mark> 1000	8800.	16600. Frequence	24400. cy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Marg
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
40.40.00		04.00	40.70	10.00	54.00	40.0
1340.00	Average	24.20	19.73	43.93	54.00	-10.0
1340.00	Peak	34.75	19.73	54.48	74.00	-19.5



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11n40 B3	Temp./Hu
Test Channel	:5670 MHz	Antenna
Test Mode	:Tx CH High	Engineer
EUT Pol	:E2 Plane	


Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:HORIZONTAL
Engineer	:Kane

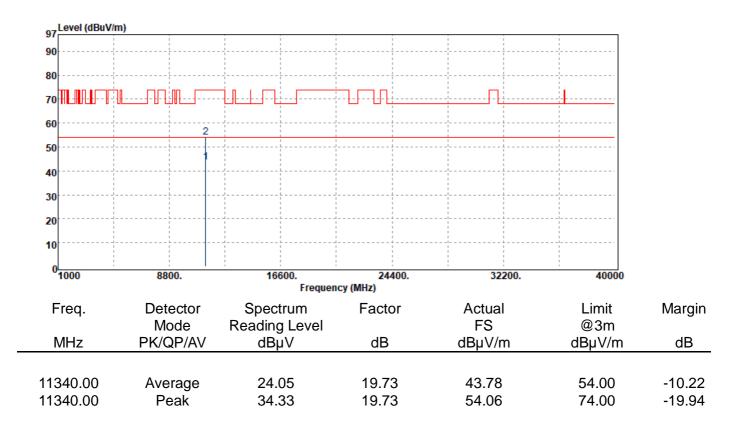




Report Number	:ER/2019/C0048	Test Date	:2
Operation Mode	:802.11n40 B4	Temp./Humi.	:2
Test Channel	:5755 MHz	Antenna Pol.	:\
Test Mode	:Tx CH Low	Engineer	:k
EUT Pol	:E2 Plane		

2019-11-26 23.5/64 VERTICAL Kane

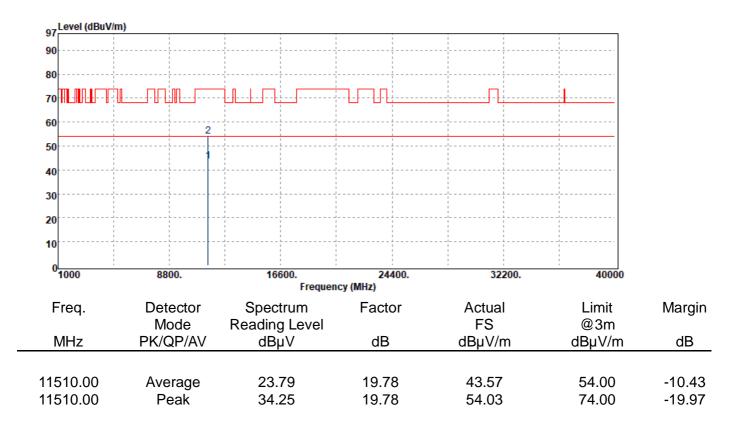




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B4	Temp./Humi.	:23.5/64
Test Channel	:5755 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

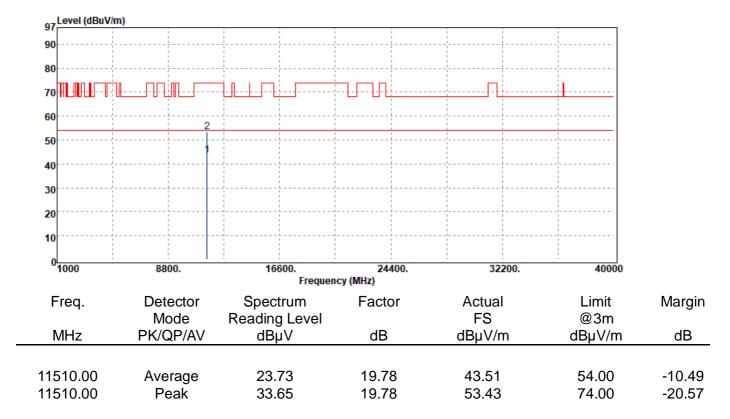




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B4	Temp./Humi.	:23.5/64
Test Channel	:5795 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

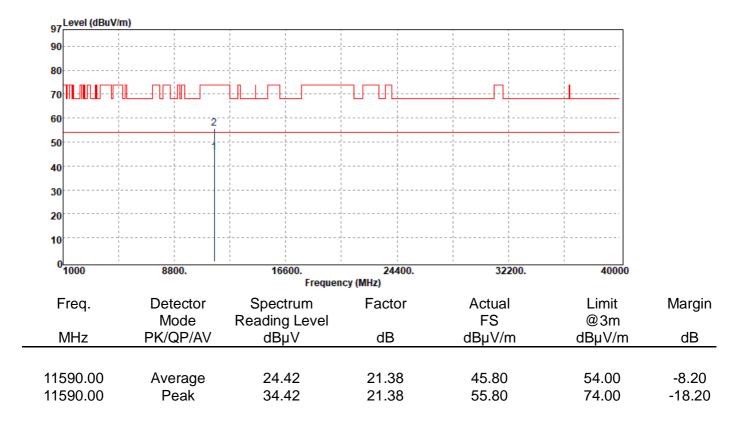

Report No.: ER/2019/C0048 Page: 252 of 361



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11n40 B4	Temp./Humi.	:23.5/64
Test Channel	:5795 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

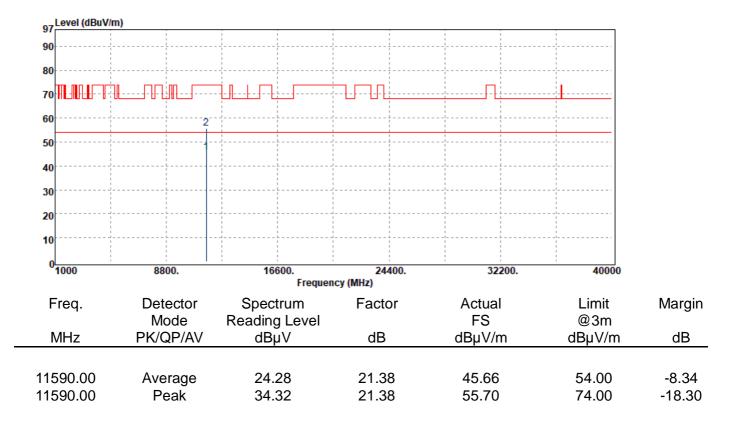



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11ac80 B1	Temp./Humi.	:23.5/64
Test Channel	:5210 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/n	n)					
90						
80	 				1 1 1 1	
70						
60	1					
50						
40						
30						
20						
10	 				1 	
0 <mark></mark>	8800.	16600. Frequen	24400. cy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10420.00	Peak	35.11	18.93	54.04	68.20	-14.16




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11ac80 B1	Temp./Humi.	:23.5/64
Test Channel	:5210 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

97 <mark>Level (dBuV/n</mark> 90	n)					
80 70	₽ <u></u>			Π		
60						
50 40						
30						
20 10						
0 <mark></mark>	8800.	16600. Frequer	24400. icy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margir
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10420.00	Peak	35.02	18.93	53.95	68.20	-14.25




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11ac80 B2	Temp./Humi.	:23.5/64
Test Channel	:5290 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

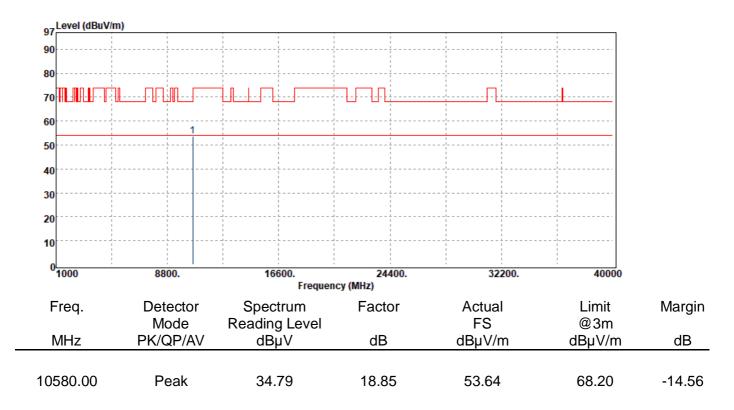



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80 B2	Temp./Humi
Test Channel	:5290 MHz	Antenna Pol
Test Mode	:Tx CH High	Engineer
EUT Pol	:E2 Plane	

:2019-11-26 i. :23.5/64 I. :HORIZONTAL :Kane

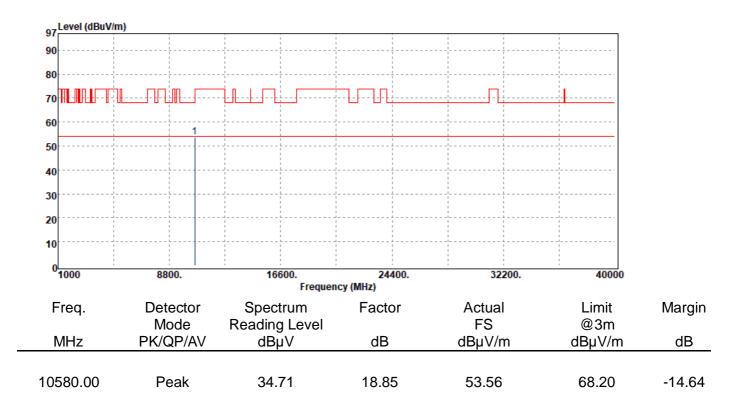




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11ac80 B3	Temp./Humi.	:23.5/64
Test Channel	:5530 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

97 Level (dBuV/n	n)		:			
90						
80						
70	╟╴╴╴╴╛╴╽╴ᡶ╶╢╢ᡫ╸╴╴╸╴					
60	2					
50						
40			· · · · · · · · · · · · · · · · · · ·			
30						
20						
10			i i i i i i i i i i i i i i i i i i i			
0 1000	8800 .	16600. Frequer	24400. 1cy (MHz)	32200.	40000	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Mar
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	d
11060.00	Average	24.14	20.19	44.33	54.00	-9.0
11060.00	Peak	34.58	20.19	54.77	74.00	-19.

Report No.: ER/2019/C0048 Page: 258 of 361




Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11ac80 B3	Temp./Humi.	:23.5/64
Test Channel	:5530 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

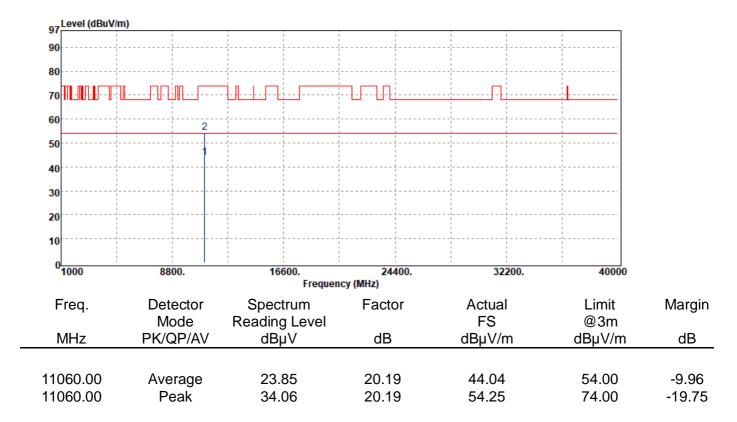



Report Number	:ER/2019/C0048
Operation Mode	:802.11ac80 B3
Test Channel	:5610 MHz
Test Mode	:Tx CH High
EUT Pol	:E2 Plane

Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:VERTICAL
Engineer	:Kane

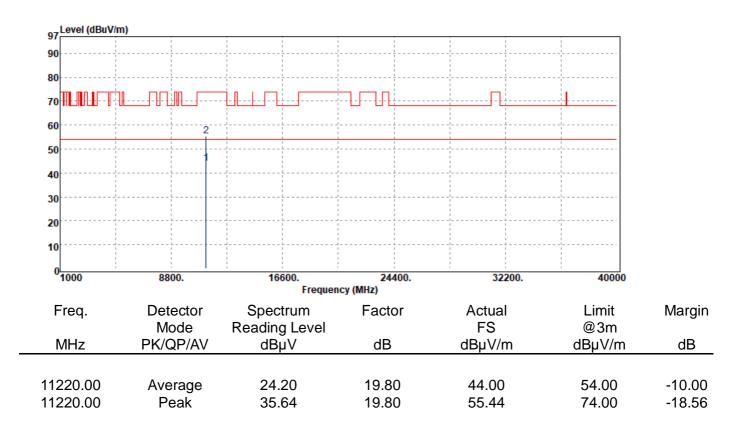


Report No.: ER/2019/C0048 Page: 260 of 361



Report Number	:ER/2019/C0048
Operation Mode	:802.11ac80 B3
Test Channel	:5610 MHz
Test Mode	:Tx CH High
EUT Pol	:E2 Plane


Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:HORIZONTAL
Engineer	:Kane

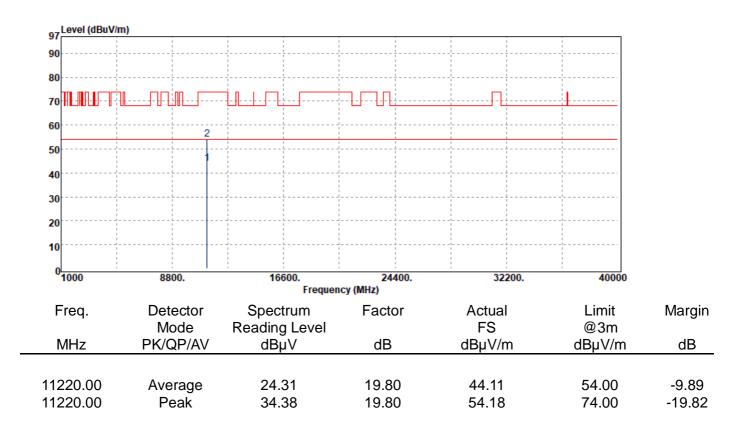



Report Number	:ER/2019/C0048	Те
Operation Mode	:802.11ac80 B4	Те
Test Channel	:5775 MHz	An
Test Mode	:Tx CH Low	En
EUT Pol	:E2 Plane	


Test Date	:2019-11-26
Temp./Humi.	:23.5/64
Antenna Pol.	:VERTICAL
Engineer	:Kane

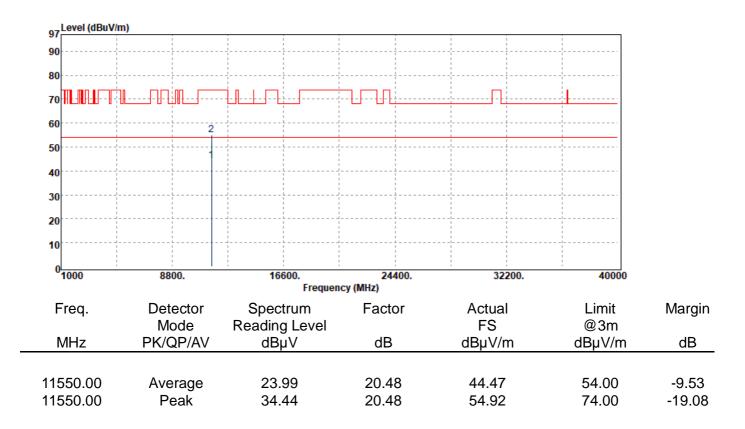

Report No.: ER/2019/C0048 Page: 262 of 361



Report Number	:ER/2019/C0048	Test Date	:2019-11-26
Operation Mode	:802.11ac80 B4	Temp./Humi.	:23.5/64
Test Channel	:5775 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

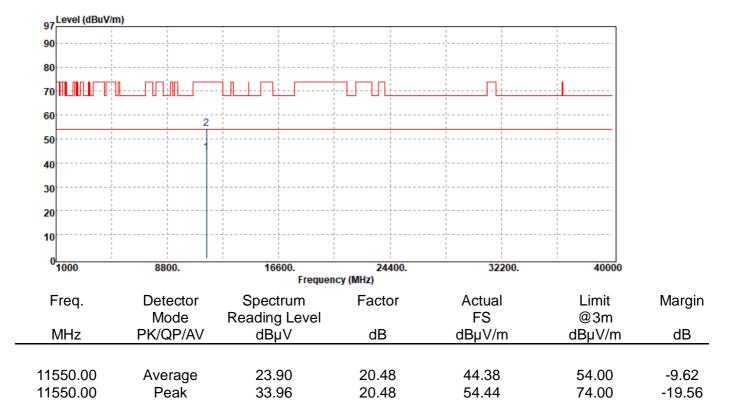




11.7.3 Band edge falling to restricted band

External Antenna (Type: Dipole Antenna, Model no: R380500314)

Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11aB1	Temp./Humi.	:22.3/65
Test Channel	:5180 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

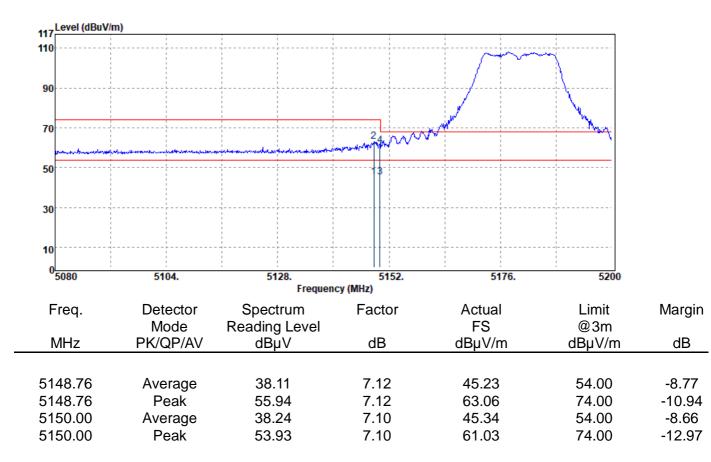

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2019/C0048 Page: 264 of 361

:2019-11-31

54.00

74.00

-9.26

-16.36

Test Date



:ER/2019/C0048

Report Number

5150.00

5150.00

Average

Peak

Operation Mode Test Channel Test Mode EUT Pol	:802.11aB :5180 MH :Bandedge :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZON ⁻ :Kane	TAL
117					·	
110						
90				h	\	
70					<u> </u>	
	and a superior of the superior	and a second and a second and the second	2	- And a start of the	Mary	
50				·····		
30						
10						
0 <mark></mark> 5080	5104.	5128. Frequen	5152. cy (MHz)	5176.	5200	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	U
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB

7.10

7.10

44.74


57.64

37.64

50.54



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11aB2	Temp./Humi.	:22.3/65
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

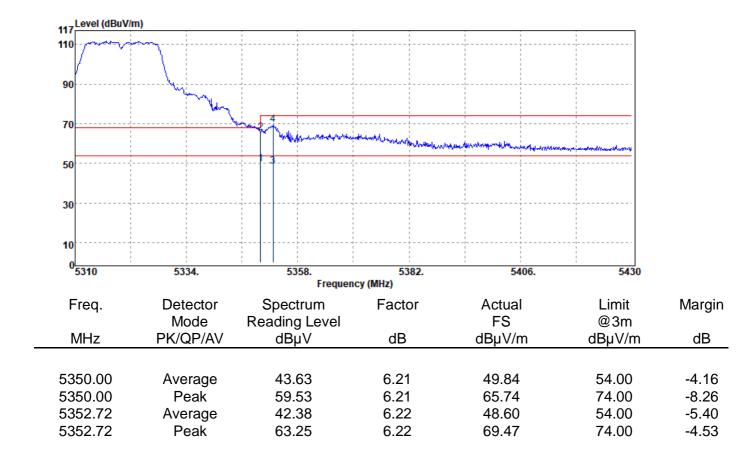




Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11aB2	Temp./Humi.	:22.3/65
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

117 Level (dBuV	/m)					
110	i		· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·		
90	η					
70	- Ymy					
50		13				
30						
10						
0 ^L 5310	5334.	5358. Frequer	5382. icy (MHz)	5406.	5430	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Marg
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5350.00	Average	38.05	6.21	44.26	54.00	-9.7
5350.00	Average Peak	50.97	6.21	57.18	74.00	-16.8
5352.24	Average	38.16	6.22	44.38	54.00	-9.6
5352.24	Peak	52.49	6.22	58.71	74.00	-15.2



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11aB3	Temp./Humi.	:22.3/65
Test Channel	:5500 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

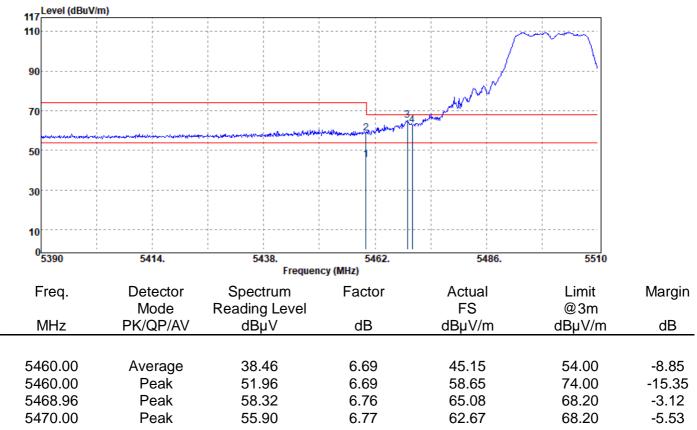

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份程表。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市五股區新北產業園區五工路 134 號

Report No.: ER/2019/C0048 Page: 268 of 361

:2019-11-31

68.20

-11.01

Test Date



:ER/2019/C0048

Report Number

5470.00

Peak

Operation Mode Test Channel Test Mode EUT Pol	:802.11aE :5500 MH :Bandedg :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZON ⁻ :Kane	ΓAL
117 Level (dBuV/m)						
110						
90				\sim	$\sim \gamma$	
70				/		
A Set Angle and an and the count of	han a survey and a survey and a survey of the survey of	and any commencementation and any contraction of the	2	and the second and the		
50						
30						
10						
0 5390	5414.	5438.	5462.	5486.	5510	
		Frequen				
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
		p		P		
5460.00	Average	37.54	6.69	44.23	54.00	-9.77
5460.00	Peak	50.58	6.69	57.27	74.00	-16.73

6.77

57.19

50.42

Test Date



:ER/2019/C0048

Report Number

peration Mode est Channel	:802.11aB :5700 MH:	z		Antenna P	ni. :22.3/65 ol. :VERTICAL
est Mode	:Bandedg	e CH High		Engineer	:Kane
JT Pol	:E2 Plane				
Level (dBuV/m)					
117 110		i i			
- man					
90/					
70	min	Winter months and make many man	and the state of the	alarhan marta an	
50					
30					
10					
0 5690	5714.	5738. Frea	5762. Jency (MHz)	5786.	5810

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5725.00	Peak	54.63	7.53	62.16	68.20	-6.04

68.20

-10.31

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

-		:802.11aE :5700 MH :Bandedg :E2 Plane	lz le CH High		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZON ⁻ :Kane	TAL
117	Level (dBuV/m)						
110				1 1 1 1 1 1 1 1 1			
90							
70			1				
50				4	y		
30							
10							
0	5690	5714.	5738. Frequer	5762. ncy (MHz)	5786.	5810	
F	req.	Detector	Spectrum	Factor	Actual	Limit	Margin
Ν	ИНz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
			·		•	•	

7.53

57.89

50.36

-35.00

-37.64

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5720.00

5725.00

Peak

Peak

Tes Tes	eration Mode t Channel t Mode Γ Pol	:802.11aB :5745 MH :Bandedg :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer		
	60						
	50						
1	30						
	10						
	90			3	4 martine and the		
	70	·····	a total	mun and the second	<u>/</u>		
	50		and a manufacture of the second s				
	30	·					
	10						
	0 5645	5667.	5689. Frequen	5711. cy (MHz)	5733.	5755	
	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
		. .	10.04	7.00	50.00	~~~~	44.07
	5650.00 5700.00	Peak Peak	49.81 56.72	7.02 7.54	56.83 64.26	68.20 105.20	-11.37 -40.94
•	5700.00	1 Call	50.7 Z	7.04	04.20	100.20	40.04

68.27

77.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No. 134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

7.53

7.53

75.80

84.56

Report No.: ER/2019/C0048 Page: 272 of 361

:2019-11-31

105.20

110.80

122.20

-47.11

-46.17

-49.11

Test Date



:ER/2019/C0048

Report Number

5700.00

5720.00

5725.00

Peak

Peak

Peak

Operation Mode Test Channel Test Mode EUT Pol	:802.11aE :5745 MH :Bandedg :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer		TAL
160 Level (dBuV/m)						
150		· · · · · · · · · · · · · · · · · · ·				
130						
110						
90				\sim		
				Freemont	N N	
70			2	3		
50	 					
30						
10	 					
05645	5667.	5689. Freque	5711. ency (MHz)	5733.	5755	
F ire e	Detector			Astual	L ives it	Manain
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5650.00	Peak	50.11	7.02	57.13	68.20	-11.07

7.54

7.53

7.53

58.09

64.63

73.09


50.55

57.10

65.56




Rep	ort Number	:ER/2019/C0048	Test Date	:2019-11-31
Ope	eration Mode	:802.11aB4	Temp./Humi.	:22.3/65
Test	Channel	:5825 MHz	Antenna Pol.	:VERTICAL
Test	Mode	:Bandedge CH High	Engineer	:Kane
EUT	Pol	:E2 Plane		

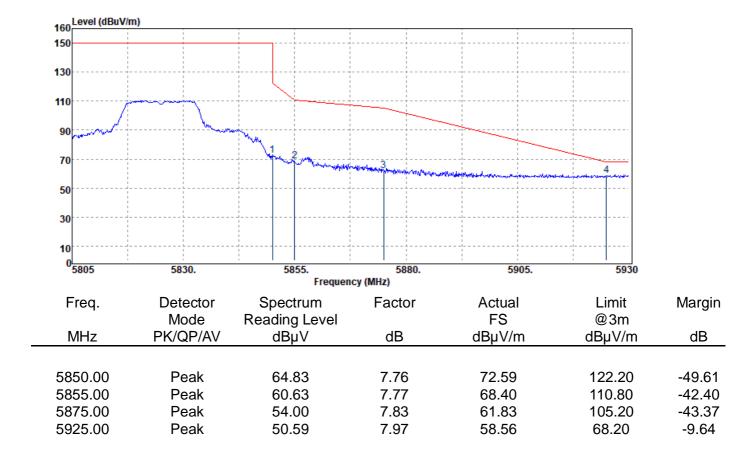



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11aB4	Temp./Humi.	:22.3/65
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

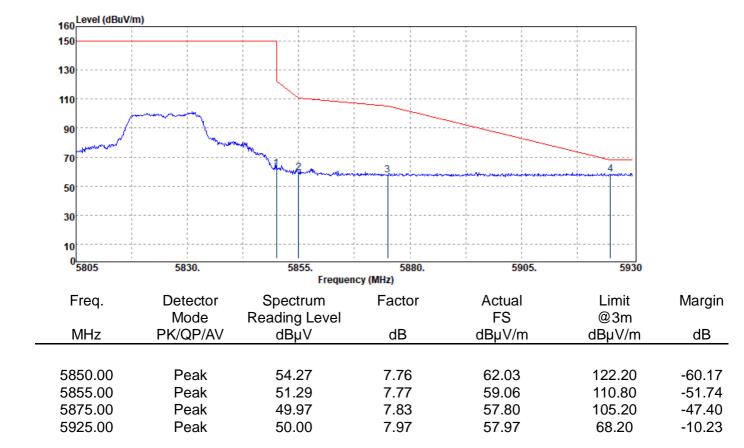

Test Date



:ER/2019/C0048

Report Number

peration Mode est Channel est Mode JT Pol	:802.11n2 :5180 MH :Bandedg :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer		
117					·	
110				m	~	
90	 					
70			244.444.44			
50	unnanna gunna saidh an saidh	and the second state of the second state of the second states of the sec				
30						
10		5440			5000	
5080	5104.	5128. Freque	5152. ncy (MHz)	5176.	5200	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Marg
MHz	PK/QP/AV	dBuV	dB	dBuV/m	dBuV/m	dB

MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5150.00	Average	37.91	7.10	45.01	54.00	-8.99
5150.00	Peak	57.35	7.10	64.45	74.00	-9.55

Report No.: ER/2019/C0048 Page: 276 of 361

:2019-11-31

-17.21

74.00

Test Date

56.79



:ER/2019/C0048

Report Number

5150.00

Peak


Operation Mode Test Channel Test Mode EUT Pol	:5180 MH	lz je CH Low		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZON ⁻ :Kane	ΓAL
117						
110						
90					\	
70						
50	hunderskippenson og for	ela anane descendents and a second and a second	2		Notice of the second	
50			1			
30						
10						
0						
5080	5104.	5128. Freque	5152. ncy (MHz)	5176.	5200	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5150.00	Average	37.54	7.10	44.64	54.00	-9.36

7.10

49.69




Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n20B2	Temp./Humi.	:22.3/65
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

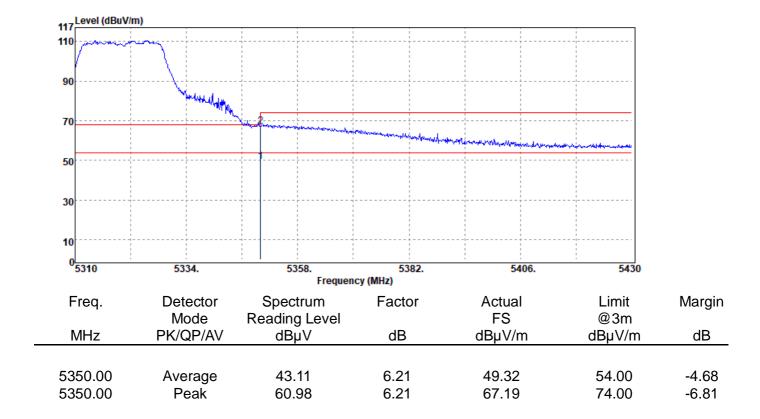



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n20B2	Temp./Humi.	:22.3/65
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

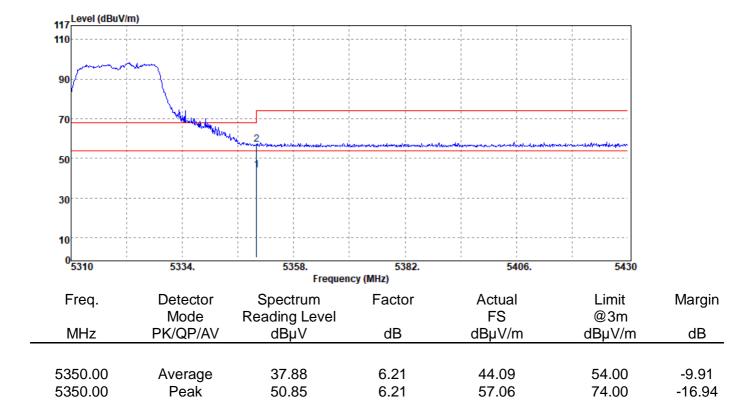

5510

Margin

dB

-9.45 -12.04

-4.35

Limit

@3m

dBµV/m

54.00

74.00

68.20

Test Date

5486.

Actual

FS

dBµV/m

44.55

61.96

63.85



:ER/2019/C0048

Report Number

10

0 5390

Freq.

MHz

5460.00

5460.00

5470.00

5414.

Detector

Mode

PK/QP/AV

Average

Peak

Peak

opentinamber	. 2013/00040	
peration Mode	:802.11n20B3	Temp./Humi. :22.3/65
est Channel	:5500 MHz	Antenna Pol. :VERTICA
est Mode	:Bandedge CH Low	Engineer :Kane
UT Pol	:E2 Plane	-
117 Level (dBuV/m)		
110		minin
90		
70	·····	
1	and the second second second second second	and a start and a start
50	and the second and the	

Frequency (MHz)

5462.

Factor

dB

6.69

6.69

6.77

5438.

Spectrum

Reading Level

dBµV

37.86

55.27

57.08

Report No.: ER/2019/C0048 Page: 280 of 361

:2019-11-31

Test Date



Report Number :ER/2019/C0048

Operation Mode Test Channel Test Mode EUT Pol	:5500 MH	lz je CH Low		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZON ⁻ :Kane	ΓAL
117 Level (dBuV/m)						
110			· · · · · · · · · · · · · · · · · · ·			
90				يسيبير	enur	
50					- N	
70						
70				white		
ale she was a state of the second	Manageration	and would work that the second s	2	and a should be should be should be a should be a should be a should be a shou		
50						
30						
10						
0 5390	5414.	5438.	5462.	5486.	5510	
			ncy (MHz)			
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5460.00	Average	37.29	6.69	43.98	54.00	-10.02
5460.00	Peak	50.20	6.69	56.89	74.00	-17.11
5470.00	Peak	50.17	6.77	56.94	68.20	-11.26

68.20

-7.05

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

•		:802.11n2 :5700 MH :Bandedg :E2 Plane	z e CH High		Temp./Humi. Antenna Pol. Engineer		
447	Level (dBuV/m)						
11/							
90		<u></u>					
70							
		Well	mound and and and and an and and and and an	tom the summer how	and an	and the second second	
50							
30				· · · · · · · · · · · · · · · · · · ·			
10							
0	5690	5714.	5738. Freque	5762. ncy (MHz)	5786.	5810	
F	req.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB

7.53

61.15

53.62

68.20

-11.06

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

•		:802.11 :5700 N :Bande :E2 Pla	/IHz dge CH High		Temp./F Antenna Enginee	a Pol. :HORIZO	ONTAL
117	Level (dBuV/m)						
110							
90-	for the second s	1					
70		<u> </u>					
50 -		mar	njfertur			ne glande av dig stalle blev men som bar som er	
30 -							
10							
U.	5690	5714.	5738. Fre	5762 quency (MHz)	2. 578	5. 5810)
	req.	Detector Mode	Spectrum Reading Leve	Factor	FS	Limit @3m	Margin
N	ЛНz	PK/QP/A	√ dBµV	dB	dBµV/m	dBµV/m	dB

7.53

57.14

49.61

-11.06

-41.92

-34.01

-38.32

68.20

105.20

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5650.00

5700.00

5720.00

5725.00

Peak

Peak

Peak

Peak

Operation Mode Test Channel	:802.11n2 :5745 MH			Temp./Humi.	:22.3/65 . :VERTICAL	
Test Mode	-	e CH Low		Engineer	:Kane	
EUT Pol	:E2 Plane)				
160 Level (dBuV/m)						
150						
130						
110					PERSONAL	
					N N	
90				3. there are a second		
70		a had a hard a show a far and	and and we have a survey of the and	w ^m		
50	huden	AND				
30						
10			1			
⁰ 5645	5667.	5689. Frequen	5711. cy (MHz)	5733.	5755	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
		•		•	•	

50.12

55.74

69.26

76.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.02

7.54

7.53

7.53

57.14

63.28

76.79

83.88

Report No.: ER/2019/C0048 Page: 284 of 361

:2019-11-31

-11.36

-47.74

-46.01

-51.73

68.20

105.20

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5650.00

5700.00

5720.00

5725.00

Peak

Peak

Peak

Peak

Operation Mode Test Channel Test Mode EUT Pol	:802.11n20B4 :5745 MHz :Bandedge CH L :E2 Plane	ow		Temp./Humi. Antenna Pol. Engineer		ΓAL
160 Level (dBuV/m)						
150				-		
130						
110						
90				p		
70				Auronal		
		2				
50						
30						
10					1 1 	
05645	5667.	5689. Frequency (MHz)	5711.	5733.	5755	
Freq.			ctor	Actual	Limit	Margin
		ng Level	-	FS	@3m	10
MHz	PK/QP/AV dl	BµV d	В	dBµV/m	dBµV/m	dB

7.02

7.54

7.53

7.53

56.84

57.46

64.79

70.47

49.82


49.92

57.26

62.94



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n20B4	Temp./Humi.	:22.3/65
Test Channel	:5825 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

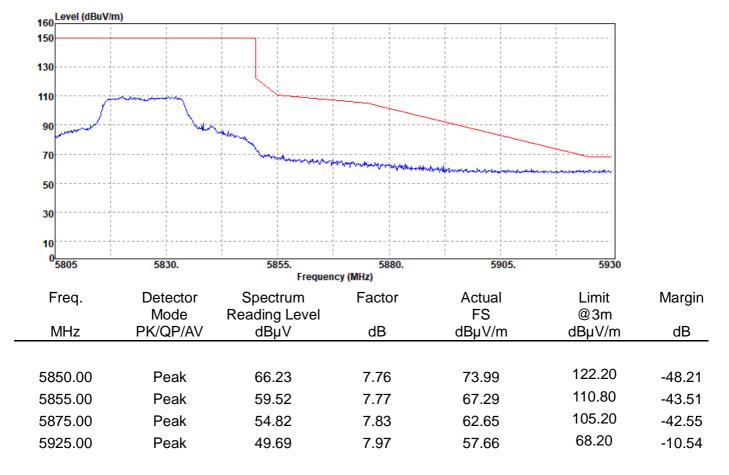


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_comment.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新 北市 五股區新北產業園區五工路 134 號



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n20B4	Temp./Humi.	:22.3/65
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

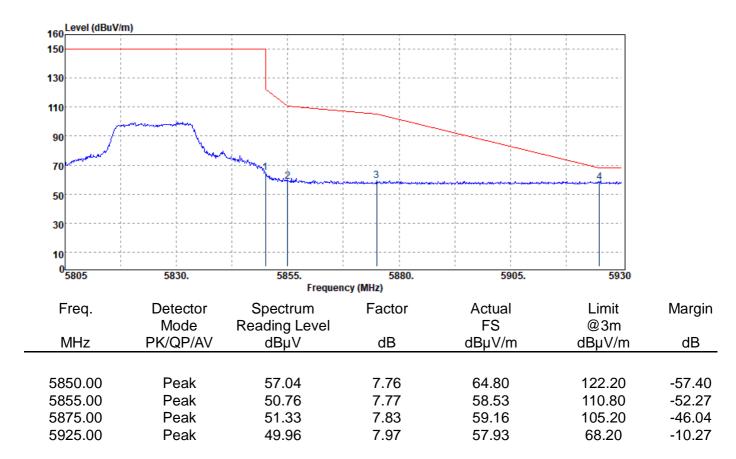

Test Date



:ER/2019/C0048

Report Number

Dperation Mode Test Channel	:802.11n4 :5190 MH			Temp./Humi. Antenna Pol	:22.3/65 . :VERTICAL	
est Mode	:Bandedg	ge CH Low		Engineer	:Kane	
UT Pol	:E2 Plane	-		5		
117						
110						
90						
70	www.anhalananalanana	nogengethal where the register of a register of the	and the man and the stand of the	••••		
50						
30						
10						
0 <mark>5080</mark>	5104.	5128. Freque	5152. ncy (MHz)	5176.	5200	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margi

MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
5150.00	Average	39.08	7.10	46.18	54.00	-7.82
5150.00	Peak	57.31	7.10	64.41	74.00	-9.59

Test Date




:ER/2019/C0048

Report Number

Operation Mode Test Channel Test Mode EUT Pol	:5190 MH	lz je CH Low		Temp./Humi. Antenna Pol. Engineer		ΓAL
117 Level (dBuV/m)						
110						
90				Junior		
70						
	annan berdenanan ana		+dentr-server	second .		
50			1			
30						
10						
0 5080	5104.	5128. Frequen	5152. cy (MHz)	5176.	5200	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5150.00	Average	37.28	7.10	44.38	54.00	-9.62
5150.00	Peak	50.25	7.10	57.35	74.00	-16.65




Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n40B2	Temp./Humi.	:22.3/65
Test Channel	:5310 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

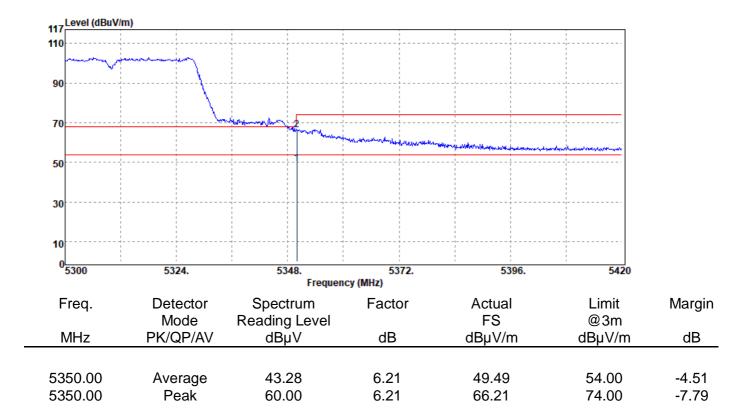




Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n40B2	Temp./Humi.	:22.3/65
Test Channel	:5310 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

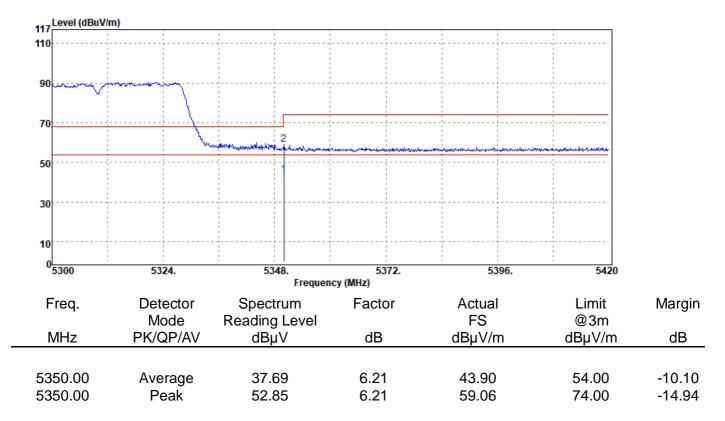



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n40B3	Temp./Humi.	:22.3/65
Test Channel	:5510 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

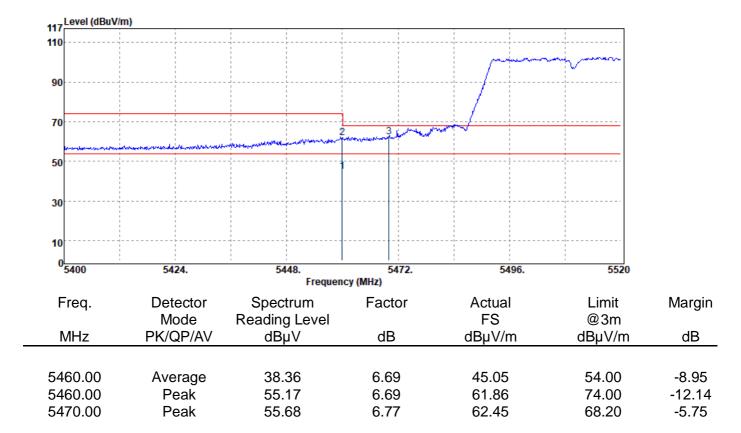

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另方說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市 五股區新北產業園區五工路 134 號

Report No.: ER/2019/C0048 Page: 292 of 361



90

70

50

30

10

Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n40B3	Temp./Humi.	:22.3/65
Test Channel	:5510 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		
117 ^{Level} (dBuV/m)			
110	······································	·····	

0 5400	5424.	5448.	5472.	5496.	5520	
	0.2.0	Frequenc			0020	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
-	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
6460.00	Average	37.61	6.69	44.30	54.00	-9.70
6460.00	Peak	49.41	6.69	56.10	74.00	-17.90
6470.00	Peak	49.19	6.77	55.96	68.20	-12.24

Test Date



:ER/2019/C0048

Report Number

Operation Mode Test Channel Test Mode EUT Pol	:802.11n40B :5670 MHz :Bandedge (:E2 Plane			Temp./Humi. Antenna Pol. Engineer	
Level (dBuV/m)					
117 110					
many	monte				
90					
70	hum	nd and			
		- Aller	mulador for farming	mannennennennen	and and the set of the
50			· · · · · · · · · · · · · · · · · · ·		
30					
10					
05660	5684.	5708.	5732.	5756.	5780
			uency (MHz)		
Freq	Detector	Spectrum	Factor	Actual	Limit N

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5725.00	Peak	52.48	7.53	60.01	68.20	-8.19
5726.96	Peak	54.80	7.53	62.33	68.20	-5.87

68.20

-10.73

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

Operation Mode Test Channel Test Mode EUT Pol	:802.11n4 :5670 MH :Bandedge :E2 Plane	Z		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZON :Kane	ΓAL
117 Level (dBuV/m)		i	i			
90 marca						
70		Munutu Maiyan	1			
50						
30						
10 0 5660	5684.	5708. Frequer	5732. ncy (MHz)	5756.	5780	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB

7.53

57.47

49.94

-25.61

-34.94

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5720.00

5725.00

Peak

Peak

:5755 MHz						
			, marine and the second			
		3-4				
un an un markent	and the second second second	Autor				
				1		
0 5645 5669. 5693. 5717. 5741. 5765 Frequency (MHz)						
Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
Poak	52 57	7.02	50 50	68.20	-8.61	
		7.54		105.20	-31.98	
	:5755 MHz :Bandedge :E2 Plane 5669. 5669. Detector Mode PK/QP/AV Peak	5669. 5693. Trequen Detector Mode PK/QP/AV Backing Level dBµV	:5755 MHz :Bandedge CH Low :E2 Plane	:5755 MHz Antenna Pol. Engineer :E2 Plane Engineer :5669. 5693. 5717. 5741. Frequency (MHz) Detector Spectrum Factor Actual Mode Reading Level FS PK/QP/AV dBµV dB dBµV/m	:5755 MHz :Bandedge CH Low :E2 Plane 	

77.66

79.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No. 134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

7.53

7.53

85.19

87.26

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

•		:802.11n4 :5755 MH: :Bandedge :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer	:22.3/65 :HORIZONT :Kane	AL
160 ^{L0}	evel (dBuV/m)						
150				· · · · · · · · · · · · · · · · · · ·			
130							
110							
90							
70			2		watan ma		
س −50		and the second	for a second start of the second of the second start of the second				
30							
10							
~ 5	645	5669.	5693. Frequer	5717. ncy (MHz)	5741.	5765	
Fr	req.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
M	lHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
		- '	10 0				
	50.00	Peak	49.67	7.02	56.69	68.20	-11.51
	00.00	Peak	56.13	7.54	63.67	105.20	-41.53
5/2	20.00	Peak	66.05	7.53	73.58	110.80	-37.22

66.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.53


73.95

122.20

-48.25




Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n40B4	Temp./Humi.	:22.3/65
Test Channel	:5795 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

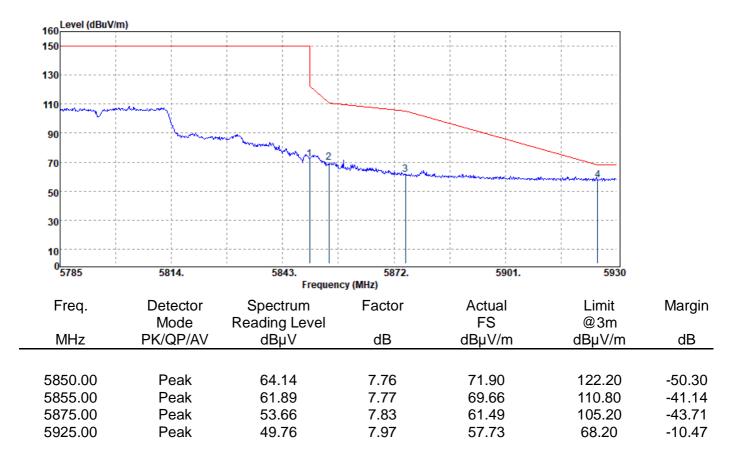



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11n40B4	Temp./Humi.	:22.3/65
Test Channel	:5795 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

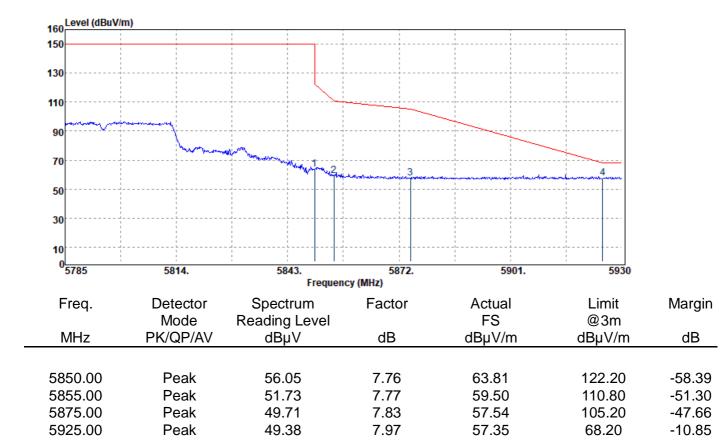


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另方說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市 五股區新北產業園區五工路 134 號



Report Number	:ER/2019/C0048	Test Da
Operation Mode	:802.11ac80B1	Temp./
Test Channel	:5210 MHz	Antenn
Test Mode	:Bandedge CH Low	Engine
EUT Pol	:E2 Plane	

:2019-11-31 ate :22.3/65 /Humi. na Pol. :VERTICAL :Kane eer

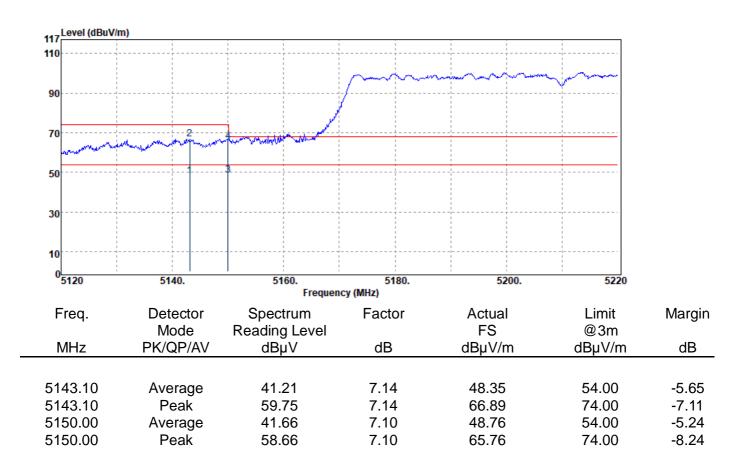

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方角就明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Test Date




:ER/2019/C0048

Report Number

Test	ration Mode Channel	:5210 MH	z			Temp./Humi. Antenna Pol.	:HORIZON	TAL
	Mode	-	e CH Low			Engineer	:Kane	
EUT	Pol	:E2 Plane	:					
	7 Level (dBuV/m)							
11								
9	0				 	 	1 1 1	
				\sim			Jun -	
7	0			/				
		and a summer of	2		1			
5	0							
3	0			, , , , , , , , , , , , , , , , , , ,				
1	0	 			 			
	0 <mark>5120</mark>	5140.	5160.	5180		5200.	5220	
	0120	01101		ncy (MHz)		02001	0220	
	Freq.	Detector	Spectrum	Factor		Actual	Limit	Margin
		Mode	Reading Level			FS	@3m	
	MHz	PK/QP/AV	dBµV	dB		dBµV/m	dBµV/m	dB
_			<u></u>	- 40		44.07	- 4 0 0	0.00
	150.00	Average	37.57	7.10		44.67	54.00	-9.33
5	150.00	Peak	49.41	7.10		56.51	74.00	-17.49



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11ac80B2	Temp./Humi.	:22.3/65
Test Channel	:5290 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

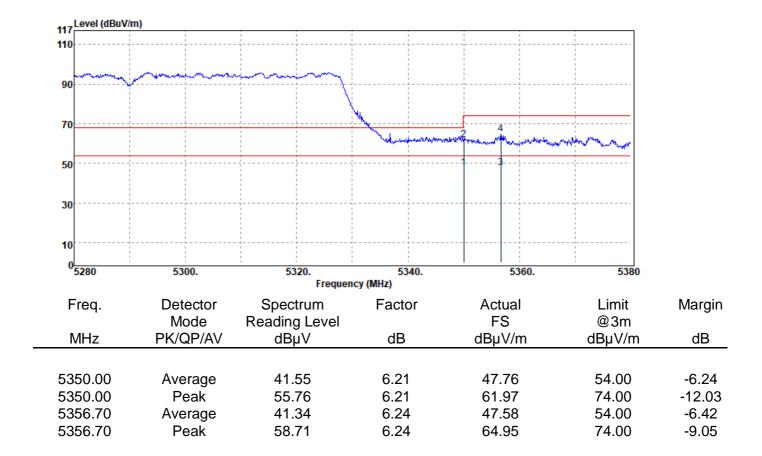

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份程表。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市五股區新北產業園區五工路 134 號

Test Date



:ER/2019/C0048

Report Number


Dperation Mode	:802.11ac80 :5290 MHz)B2			•		:22.3/65 :HORIZC	NTAL
Fest Mode	:Bandedge	CH High			Engine	er	:Kane	
EUT Pol	:E2 Plane							
117 Level (dBuV/m)								
110						 		
90								
70	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	concrete and	ų			1 1 1 1 1		
			Mandy man and the second		ala under a dere a	an a	programment of the	
50				1		 		
30								
10						; ; ; ; ; ;		
0 5280	5300.	5320. Freque	534 ency (MHz)	0.	53	60.	5380	
Freq	Detector	Spectrum	Facto	r	Actual		l imit	Mai

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5350.00	Average	37.48	6.21	43.69	54.00	-10.31
5350.00	Peak	50.13	6.21	56.34	74.00	-17.66



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80B3	Temp./Humi.
Test Channel	:5530 MHz	Antenna Pol.
Test Mode	:Bandedge CH Low	Engineer
EUT Pol	:E2 Plane	

:2019-11-31 :22.3/65 :VERTICAL :Kane

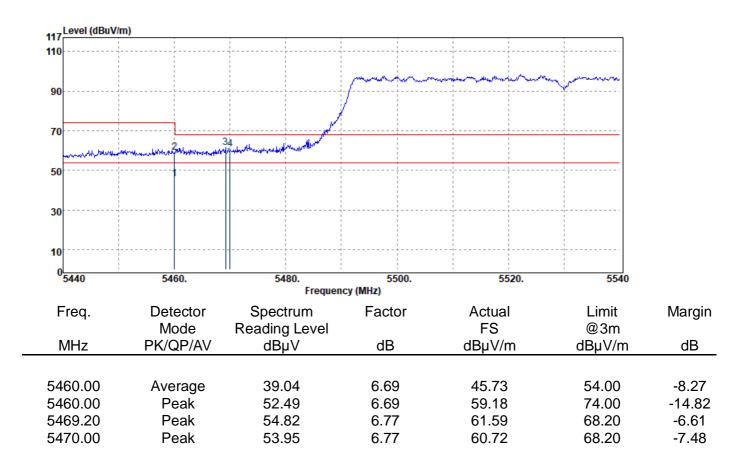

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_comment.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新 北市 五股區新北產業園區五工路 134 號

Test Date



:ER/2019/C0048

Report Number

Operation Mode Test Channel Test Mode EUT Pol	:5530 MH	lz je CH Low			•	na Pol.	:22.3/65 :HORIZC :Kane	ONTAL
117 Level (dBuV/m)								
110								
90			planen	mathin many	Juntarya	www.	monorm	
70			/			 		
50								
30						 		
10						 		
0 <mark></mark> 5440	5460.	5480. Freque	55(ncy (MHz)	00.	55	520.	5540)
Freq.	Detector Mode	Spectrum Reading Level	Facto	or	Actua FS	Į	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB		dBµV/r	n	dBµV/m	n dB

		uppv	uВ	ubp v/m	uDµ v/m	uD
5460.00	Average	37.63	6.69	44.32	54.00	-9.68
5460.00	Peak	49.57	6.69	56.26	74.00	-17.74
5470.00	Peak	49.96	6.77	56.73	68.20	-11.47

-29.30

-31.35

-41.86

105.20

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5700.00

5720.00

5725.00

Peak

Peak

Peak

Operation Mode	:802.11ac	80B4		Temp./Humi.	:22.3/65	
Test Channel	:5775 MH	z		Antenna Pol.	:VERTICAL	
Test Mode	:Bandedg	e CH Low		Engineer	:Kane	
EUT Pol	:E2 Plane	•				
160 Level (dBuV/m)						
150						
130						
110						
110			~	an man	- marine	
90		2	3 the			
70	uder and the second					
50						
30						
10						
0 ⁶ 5645	5673.	5701. Frequer	5729. 1cy (MHz)	5757.	5785	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
		In -		-		
5650.00	Peak	57.25	7.02	64.27	68.20	-3.93

68.36

71.92

72.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.54

7.53

7.53

75.90

79.45

80.34

Test Date




:ER/2019/C0048

Report Number

report rumbor		00010			.eet Bate		•
Operation Mode	:802.11ac80B4			Temp./Humi.	:22.3/65		
Test Channel	:5775 MH	Z			Antenna Pol.	:HORIZON	TAL
Test Mode	:Bandedg	e CH Low			Engineer	:Kane	
EUT Pol	:E2 Plane				-		
Lovel (dBuV/m)							
160 Level (dBuV/m)							
150							
130	 						
110					· · · · · · · · · · · · · · · · · · ·		
110							
90				- mark	the the second	and	
70		2	3.4	Jan Martin			
manterenance	manna	and and a submitted and the					
50				·			
30					1 1 1 1 1		
10				· · · · · · · · · · · · · · · · · · ·	-l		
0 <mark>5645</mark>	5673.	5701. Freque	ncy (MHz)	5729.	5757.	5785	
Freq.	Detector	Spectrum	Fac	tor	Actual	Limit	Margin
	Mode	Reading Level			FS	@3m	Ū.
MHz	PK/QP/AV	dBµV	dE	3	dBµV/m	dBµV/m	dB
5650.00	Peak	49.62	7.0		56.64	68.20	-11.56
5700.00 5720.00	Peak Peak	56.35 59.79	7.5 7.5		63.89 67.32	105.20 110.80	-41.31 -43.48
5725.00	Peak Peak	59.79 61.31	7.5 7.5		67.32 68.84	122.20	-43.48 -53.36
0720.00	roun	01.01	1.0		00.04	122.20	00.00




Report Number	:ER/2019/C0048	Test I	Date :20	019-11-31
Operation Mode	e:802.11ac80B4	Temp	./Humi. :22	2.3/65
Test Channel	:5775 MHz	Anter	nna Pol. :VE	ERTICAL
Test Mode	:Bandedge CH High	Engir	neer :Ka	ane
EUT Pol	:E2 Plane			

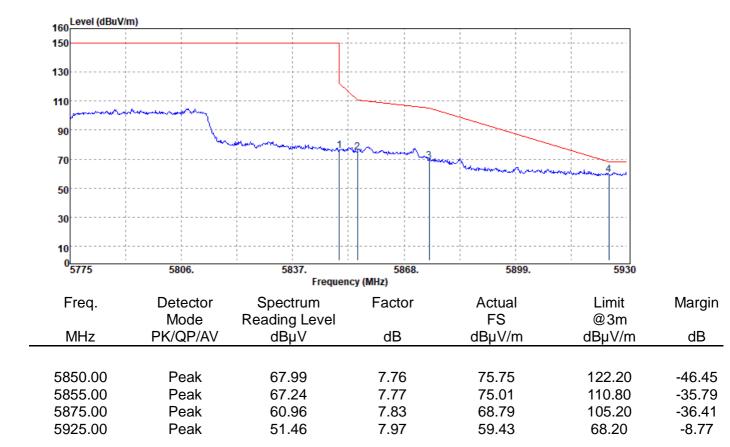



Report Number	:ER/2019/C0048	Test Date	:2019-11-31
Operation Mode	:802.11ac80B4	Temp./Humi.	:22.3/65
Test Channel	:5775 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

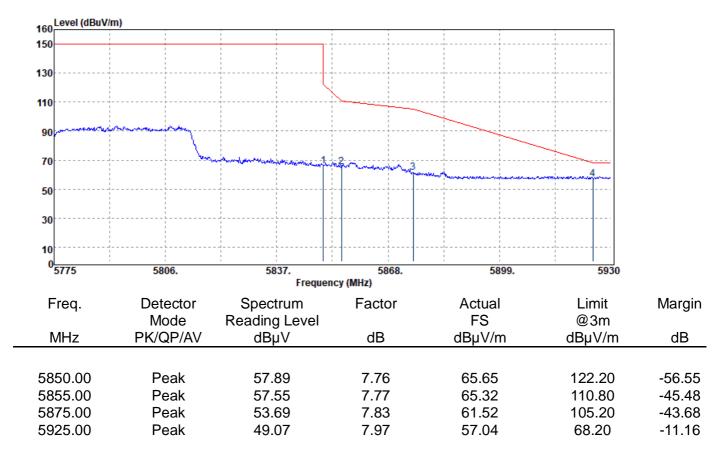




Internal Antenna

Report Number	:ER/2019/C0048	Test Date	:201
Operation Mode	:802.11aB1	Temp./Humi.	:22.
Test Channel	:5180 MHz	Antenna Pol.	:VE
Test Mode	:Bandedge CH Low	Engineer	:Kar
EUT Pol	:E2 Plane		

Test Date	:2019-11-25
Temp./Humi.	:22.8/66
Antenna Pol.	:VERTICAL
Engineer	:Kane

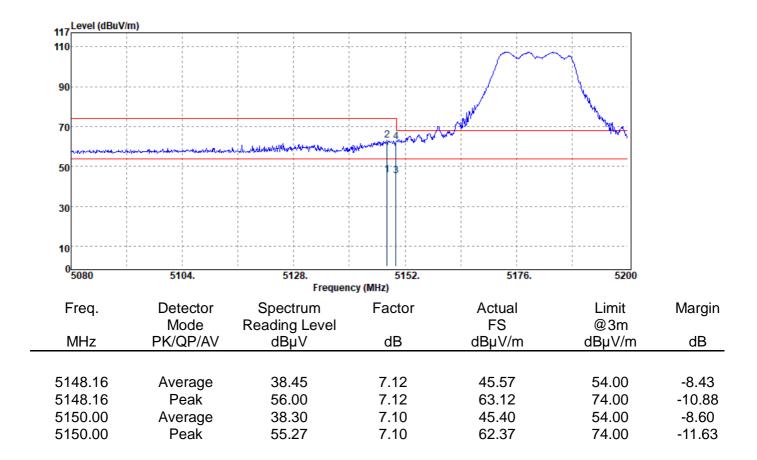


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Report No.: ER/2019/C0048 Page: 310 of 361




Report Number	:ER/2019/C0048		Test Date	:2019-11-25
Operation Mode	:802.11aB1		Temp./Humi.	:22.8/66
Test Channel	:5180 MHz		Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH Low		Engineer	:Kane
EUT Pol	:E2 Plane			
117 Level (dBuV/m)		 		
110			1	1

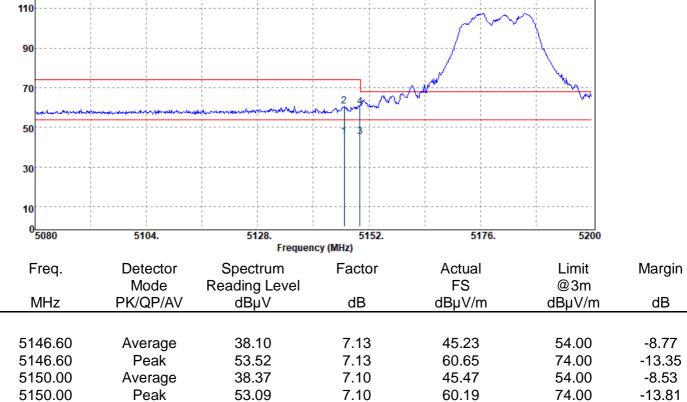




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11aB2	Temp./Humi.	:22.8/66
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

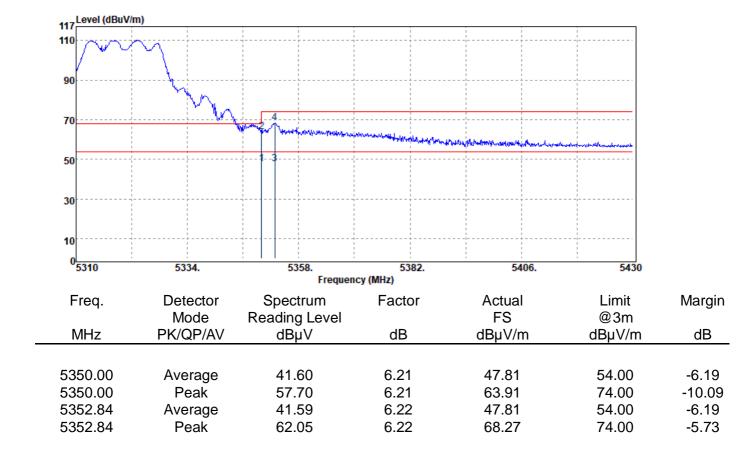

Report No.: ER/2019/C0048 Page: 312 of 361



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11aB2	Temp./Humi.	:22.8/66
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

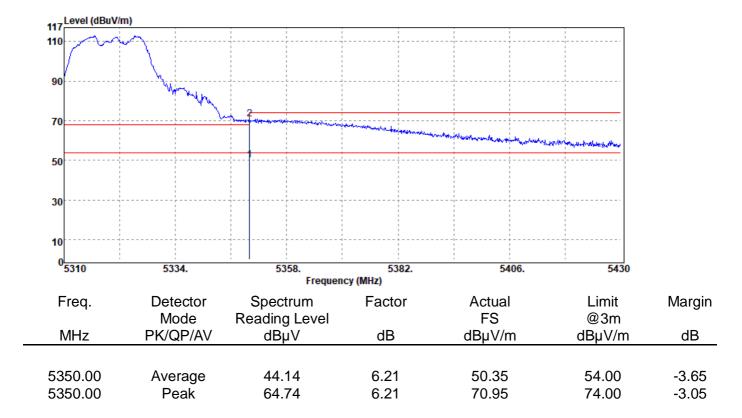

5510

Margin

dB

-9.52 -13.37

-9.25

-14.49-4.56

-5.07

Limit

@3m

dBµV/m

54.00

74.00

54.00

74.00

68.20

68.20



70

50

30

10

0 5390

Freq.

MHz

5444.84

5444.84

5460.00

5460.00

5468.96

5470.00

5414.

Detector

Mode

PK/QP/AV

Average

Peak

Average

Peak

Peak

Peak

Report Number	:ER/2019/C0048			Test Date	Э	:2019-11	-25
Operation Mode	:802.11aB3			Temp./Hu	umi.	:22.8/66	
Test Channel	:5500 MHz			Antenna Pol.		:VERTIC	AL
Test Mode	:Bandedge CH Lov	v		Engineer		:Kane	
EUT Pol	:E2 Plane	E2 Plane					
117							
110				· · · · · · · · · · · · · · · · · · ·	\sim		
						Γ N	
90			· · · · · · · · · · · · · · · · · · ·		r 		

2

Frequency (MHz)

5438.

Spectrum

Reading Level

dBµV

37.89

54.04

38.06

52.82

56.88

56.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeindustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市五股區新北產業園區五工路 134 號

56

5486.

Actual

FS

dBµV/m

44.48

60.63

44.75

59.51

63.64

63.13

5462.

Factor

dB

6.59

6.59

6.69

6.69

6.76

6.77

Report No.: ER/2019/C0048 Page: 314 of 361

:2019-11-25

Test Date



:ER/2019/C0048

Report Number

0 5390	5414.	5438.	5462.	5486.	5510
10					
30					
50		harmon she har water a start and the			
70		اسلام بروري	25		
30				Mayner	
90					
117				~	min
117 Level (dBuV/m)					
T Pol	:E2 Plane				
t Mode	:Bandedge C	H Low		Engineer	:Kane
eration Mode t Channel	:5500 MHz			Temp./Humi. Antenna Pol.	

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5459.24	Average	38.40	6.68	45.08	54.00	-8.92
5459.24	Peak	57.10	6.68	63.78	74.00	-10.22
5460.00	Average	38.61	6.69	45.30	54.00	-8.70
5460.00	Peak	52.69	6.69	59.38	74.00	-14.62
5470.00	Peak	60.35	6.77	67.12	68.20	-1.08



70

50

30

10 n

Report Number Operation Mode Test Channel Test Mode EUT Pol	:ER/2019/C0048 :802.11aB3 :5700 MHz :Bandedge CH High :E2 Plane	Test Date Temp./Humi. Antenna Pol. Engineer	
117 110 90	\		

5690	5714.	5738.	5762.	5786.	5810	
		Frequence	cy (MHZ)			
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	_
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5725.00	Peak	57.58	7.53	65.11	68.20	-3.09
5738.00	Peak	57.81	7.53	65.34	68.20	-2.86

Test Date



:ER/2019/C0048

Report Number

peration Mod est Channel	le :802.11aB :5700 MHz			Temp./Humi. Antenna Pol.	
est Mode	:Bandedge	e CH High		Engineer	:Kane
JT Pol	:E2 Plane				
117 Level (dBuV/m)				
110		i i i i i	, , , , , , , , , , , , , , , , , , ,	i i i 	
90	\mathcal{A}				
70	·····	· · · · · · · · · · · · · · · · · · ·			
	Withhow	igeneration and an advantaged on a	Antonia ta ta ta ta a seconda a	ะการการสารสาราสตรรรรรรณ สาราวัน เสราะ 	and and a stand
50					
30					
10					
0 ^L 5690	5714.	5738. Freque	5762. ncy (MHz)	5786.	5810
Freq.	Detector	Spectrum	Factor	Actual	Limit Ma

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5725.00	Peak	56.02	7.53	63.55	68.20	-4.65

-33.65

-36.16

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5720.00

5725.00

•		:802.11aB :5745 MH: :Bandedge :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer	:22.8/66 :VERTICAL :Kane	
160	Level (dBuV/m)						
150							
130	 	 					
110							
90					4	X	
				, ulahu "a	3		
70	-and	muchingenerations	wanter warper a reference and	panylonal a constraint of			
50							
30	· · · · · · · · · · · · · · · · · · ·	 		 			
10		 					
0	5645	5667.	5689. Frequen	5711. cy (MHz)	5733.	5755	
F	req.	Detector	Spectrum	Factor	Actual	Limit	Margin
Ν	MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
			- -	-	· •		-
	50.00	Peak	50.53	7.02	57.55	68.20	-10.65
57	00.00	Peak	59.02	7.54	66.56	105.20	-38.64

69.62

78.51

Peak

Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.53

7.53

77.15

86.04

Report No.: ER/2019/C0048 Page: 318 of 361

:2019-11-25

-35.06

122.20

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

Operation Mo Test Channel Test Mode EUT Pol	:5745 MH :Bandedg :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer		ΓAL
160 Level (dBuV/	m)				· · · · · · · · · · · · · · · · · · ·	
150						
130						
110					my	
90				3		
70		where the approximate and for a more that have	2 Marine Multer			
50			1 1 1 1 1			
30						
10						
0 5645	5667.	5689. Frequer	5711. ncy (MHz)	5733.	5755	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	. .		7.00	FT C C		40.0-
5650.00	Peak	50.31	7.02	57.33	68.20	-10.87
5700.00	Peak	60.39 70.62	7.54	67.93	105.20	-37.27
5720.00	Peak	70.63	7.53	78.16	110.80	-32.64

79.61


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.53

87.14




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11aB4	Temp./Humi.	:22.8/66
Test Channel	:5825 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

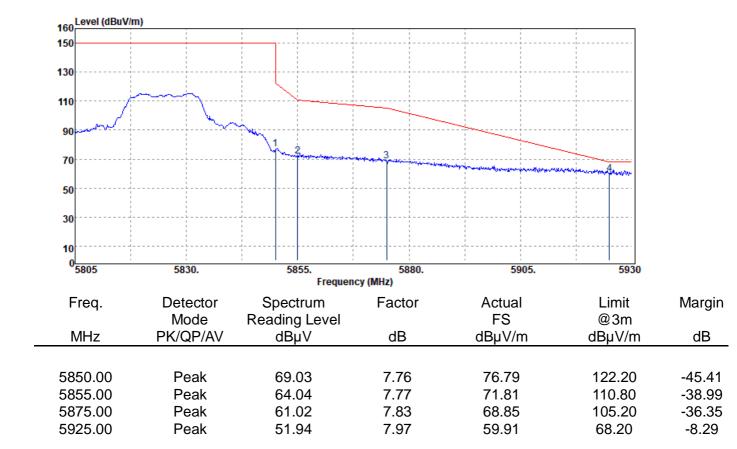



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11aB4	Temp./Humi.	:22.8/66
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

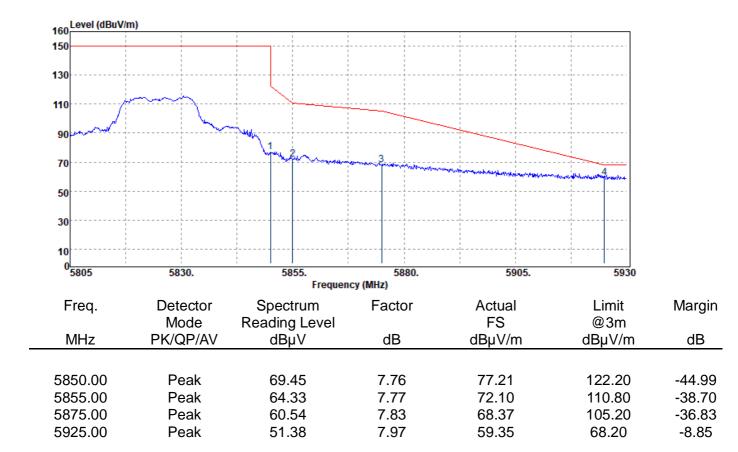

Report No.: ER/2019/C0048 Page: 321 of 361

:2019-11-25

Test Date



:ER/2019/C0048

Report Number

10 0

Operation Mode Test Channel Test Mode EUT Pol	:802.11n20B1 :5180 MHz :Bandedge CH Low :E2 Plane	Temp./Humi. :2 Antenna Pol. :V Engineer :K	
117 Level (dBuV/m)			
117			
90			·
		/	λ
70			
	and and and an all and the second	×	MP MU
and the state of the	- manager and a second of the		
50			
30			

5080	5104.	5128. Frequenc	5176.	5200		
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5150.00 5150.00	Average Peak	38.46 57.68	7.10 7.10	45.56 64.78	54.00 74.00	-8.44 -9.22

Report No.: ER/2019/C0048 Page: 322 of 361

:2019-11-25

5200

Margin

dB

-9.29

-14.30

Limit

@3m

dBµV/m

54.00

74.00

Test Date

5176.

Actual

FS

dBµV/m

44.71

59.70



:ER/2019/C0048

Report Number

10

0 5080

Freq.

MHz

5150.00

5150.00

5104.

Detector

Mode

PK/QP/AV

Average

Peak

Operation Test Chan Test Mode EUT Pol	inel	:5180	MHz edge CH	Low			•	na Pol.	:22.8/66 :HORIZ :Kane	
117	dBuV/m)									1
110							, ,	 		
90			 						<u>}</u>	
70										
	and the second second	And and a street	have been a free a new	and the stand of the state of the	www.where	where where the second s		1	White	
50					1	- - - - - - - - - - - - - - - - - - -				
30							 	1 1 1 1 1 1 1		

Frequency (MHz)

5152.

Factor

dB

7.10

7.10

5128.

Spectrum

Reading Level


dBµV

37.61

52.60




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n20B2	Temp./Humi.	:22.8/66
Test Channel	:5320 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

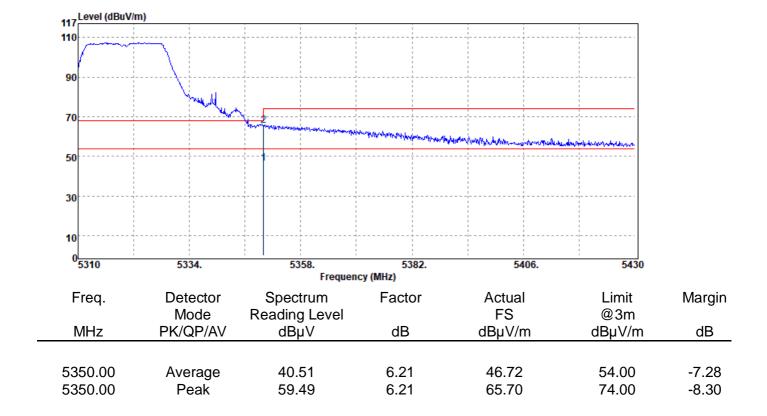




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n20B2	Temp./Humi.	:22.8/66
Test Channel	:5320 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

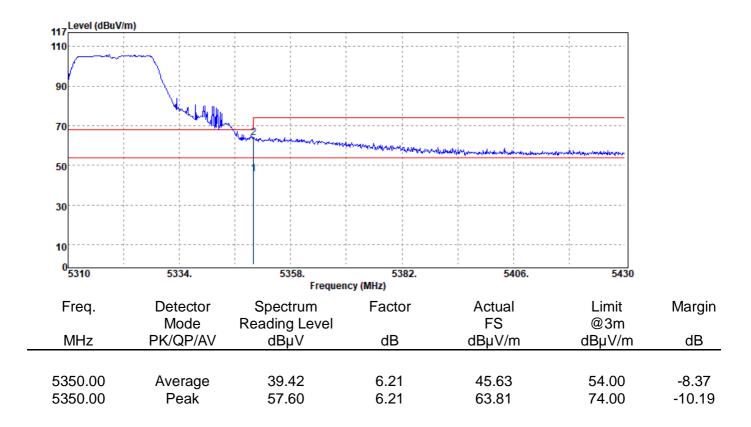



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n20B3	Temp./Humi.	:22.8/66
Test Channel	:5500 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

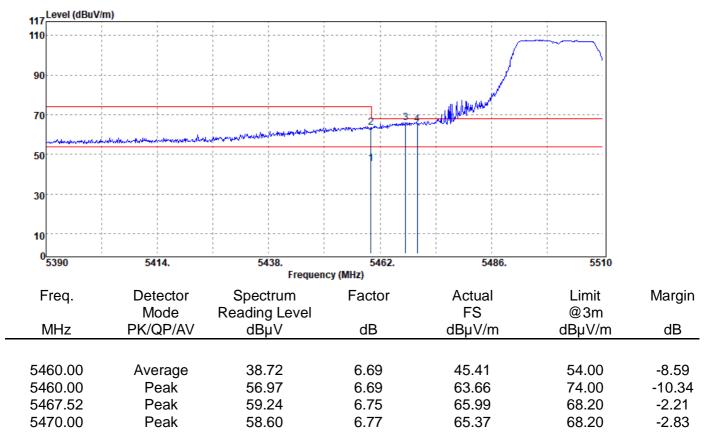

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_comment.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新 北市 五股區新北產業園區五工路 134 號

Report No.: ER/2019/C0048 Page: 326 of 361

:2019-11-25

5510

Margin

dB

-9.71

-14.00

-6.51

-6.89

Limit

@3m

dBµV/m

54.00

74.00

68.20

68.20

Test Date

5486.

Actual

FS

dBµV/m

44.29

60.00

61.69

61.31



:ER/2019/C0048

Report Number

10

0 5390

Freq.

MHz

5460.00

5460.00

5468.96

5470.00

5414.

Detector

Mode

PK/QP/AV

Average

Peak

Peak

Peak

Operation Mo Test Channel Test Mode EUT Pol	:5500 N	ИНz dge CH Low		•	na Pol.	:22.8/66 :HORIZON :Kane	NTAL
117 110	m)		· · · · · · · · · · · · · · · · · · ·				
90					\int		
70					w.		
		and a superior and the second standing of the	Writhington with the second	den specific and the second	-		
30							

Frequency (MHz)

5462.

Factor

dB

6.69

6.69

6.76

6.77

5438.

Spectrum

Reading Level

dBµV

37.60

53.31

54.93

54.54

5810



30

10

0 5690

5714.

Report Number Operation Mode Test Channel Test Mode EUT Pol	:ER/2019/C0048 :802.11n20B3 :5700 MHz :Bandedge CH High :E2 Plane	Test Date Temp./Humi. Antenna Pol. Engineer	:2019-11-25 :22.8/66 :VERTICAL :Kane
117 Level (dBuV/m)			
110	<u>\</u>		
90			
70			
	and a second and a second a	nadetartlenandterAussenanderan	ant and a second state of the second
50			

Frequency (MHz)							
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
5725.00	Peak	58.56	7.53	66.09	68.20	-2.11	
5733.08	Peak	59.20	7.53	66.73	68.20	-1.47	


5762.

5786.

5738.



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n20B3	Temp./Humi.	:22.8/66
Test Channel	:5700 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		
Lovel (dBu)//m)			

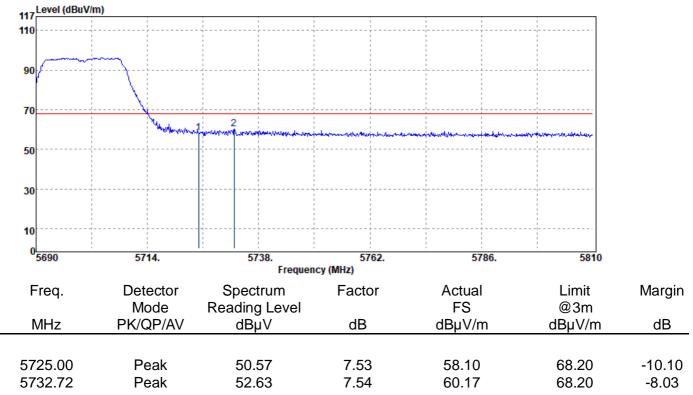

Test Date



:ER/2019/C0048

Report Number

	Detector	Spectrum	Factor	Actual	Limit
5645	5667.	5689. Freque	5711. ency (MHz)	5733.	5755
10					
30					
50					
montermore	Mary a harris and a second and a second de la seconda d	warman a second a second	A CONTRACTOR OF		
70			2 44 10-11-11	Aud The	
90				3-Wert March March	
110					
130					
150					
160 Level (dBuV/m)					
JT Pol	:E2 Plane				
st Mode	:Bandedge	e CH Low		Engineer	:Kane
st Channel	:5745 MH:	Z		Antenna Pol	. :VERTIC
peration Mod	e :802.11n2	0B4		Temp./Humi.	:22.8/66

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5650.00	Peak	49.56	7.02	56.58	68.20	-11.62
5700.00	Peak	60.90	7.54	68.44	105.20	-36.76
5720.00	Peak	70.26	7.53	77.79	110.80	-33.01
5725.00	Peak	80.13	7.53	87.66	122.20	-34.54

Report No.: ER/2019/C0048 Page: 330 of 361

:2019-11-25

-11.58

-44.89

-41.85

-43.36

68.20

105.20

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5650.00

5700.00

5720.00

5725.00

Peak

Peak

Peak

Peak

Operation Mode Test Channel Test Mode EUT Pol	:802.11n20 :5745 MHz :Bandedge :E2 Plane	2		Temp./ł Antenn Engine	a Pol.	:22.8/66 :HORIZOI :Kane	NTAL
160 Level (dBuV/m)						·	
150		· · · · · · · · · · · · · · · · · · ·					
130		 					
110	 						
					\int		
90				-4-harring the second	· · · · · ·		
70	 		2 manute by manuel	- U. THE		 	
50	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,						
30		, , , , , , , , , , , , , , , , , , ,					
10							
0 5645	5667.	5689. Freque	5711. ncy (MHz)	573	3.	5755	
Freq.	Detector	Spectrum	Factor	Actual		Limit	Margin
	Mode	Reading Level		FS		@3m	0
MHz	PK/QP/AV	dBµV	dB	dBµV/m		dBµV/m	dB

7.02

7.54

7.53

7.53

56.62

60.31

68.95

78.84

49.60


52.77

61.42

71.31




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n20B4	Temp./Humi.	:22.8/66
Test Channel	:5825 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

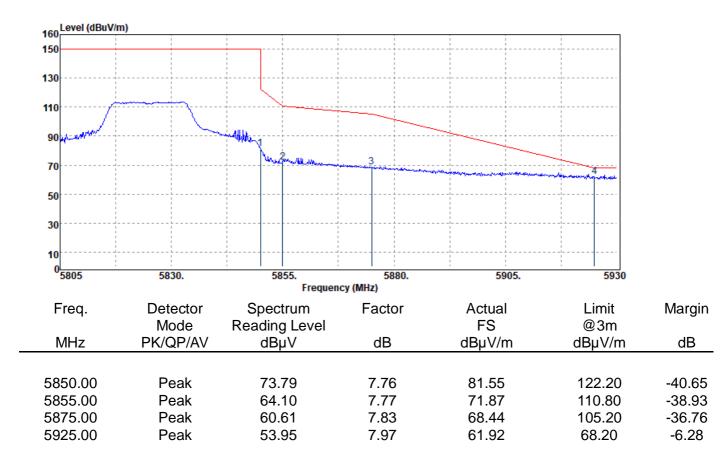



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n20B4	Temp./Humi.	:22.8/66
Test Channel	:5825 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

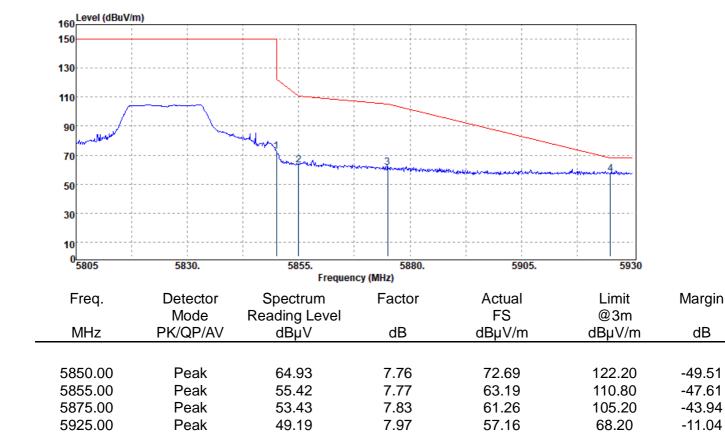


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另方說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市 五股區新北產業園區五工路 134 號



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n40B1	Temp./Humi.	:22.8/66
Test Channel	:5190 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

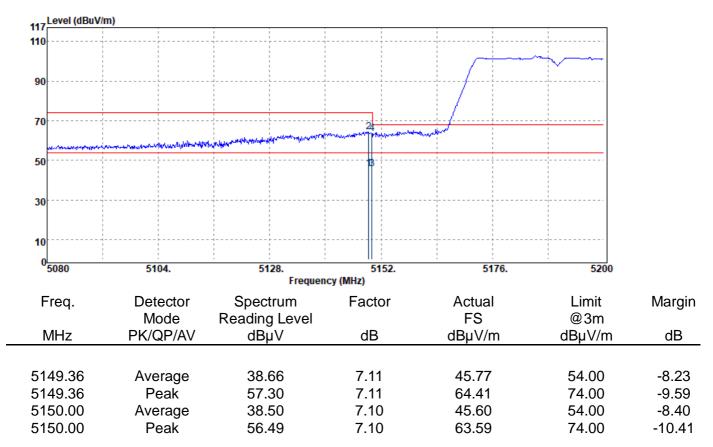

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複聚。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_comment.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新 北市 五股區新北產業園區五工路 134 號

Report No.: ER/2019/C0048 Page: 334 of 361



50

30

10

Report Number Operation Mode	:ER/2019/C0048 :802.11n40B1	Test Date Temp./Humi.	:2019-11-25 :22.8/66
Test Channel	:5190 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		
117_Level (dBuV/m)		 	
110			
90			
70	· · · · · · · · · · · · · · · · · · ·	 	

0 5080	5104.	5128. Frequenc	5152. cv (MHz)	5176.	5200	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5149.24	Average	37.80	7.12	44.92	54.00	-9.08
5149.24	Peak	54.68	7.12	61.80	74.00	-12.20
5150.00	Average	37.78	7.10	44.88	54.00	-9.12
5150.00	Peak	53.28	7.10	60.38	74.00	-13.62

 2_4




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n40B2	Temp./Humi.	:22.8/66
Test Channel	:5310 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

117,	evel (dBuV/m))	· · · ·				
110							
90							
70			24				
50				and an and a second	errordenselpedenservices	annow the second advantations	
30 -							
10							
0 ^L 5	5300	5324.	5348. Frequer	5372. icy (MHz)	5396.	5420	
F	req.	Detector	Spectrum	Factor	Actual	Limit	Margi
N	/Hz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
53	50.00	Average	39.91	6.21	46.12	54.00	-7.88
	50.00	Peak	57.84	6.21	64.05	74.00	-9.95
53	50.00						
	51.72	Average	39.87	6.22	46.09	54.00	-7.91




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n40B2	Temp./Humi.	:22.8/66
Test Channel	:5310 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

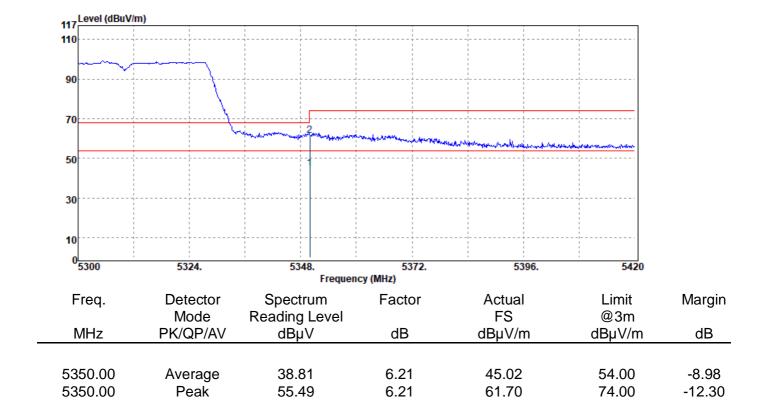



Report Number	:ER/2019/C0048	Test Date	:2
Operation Mode	:802.11n40B3	Temp./Humi.	:2
Test Channel	:5510 MHz	Antenna Pol.	:\
Test Mode	:Bandedge CH Low	Engineer	:ł
EUT Pol	:E2 Plane		

:2019-11-25 :22.8/66 :VERTICAL :Kane

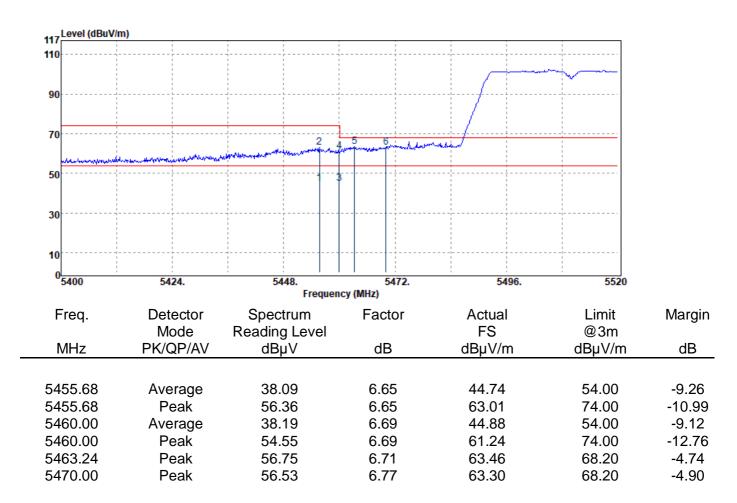

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

In H つ 3 成功 : 匹根 告約 不理 封測 紙乙 核 前具 頁 , 阿時此 株 前 佳 係 留 90 天 。 本報告 未經本公司 書 面許可 , 不可部份複製 。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2019/C0048 Page: 338 of 361



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n40B3	Temp./Humi.	:22.8/66
Test Channel	:5510 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH Low	Engineer	:Kane
EUT Pol	:E2 Plane		

117 Level (dBu\	//m)					
110						
90					~~~~	
70		phone warman and a second second	4.5 #++++++++++++++++++++++++++++++++++++			
50			3			
30						
10						
0L 5400	5424.	5448. Frequer	5472. ncy (MHz)	5496.	5520	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5454.84	Average	37.50	6.66	44.16	54.00	-9.84
5454.84	Peak	53.05	6.66	59.71	74.00	-14.29
5460.00	Average	37.66	6.69	44.35	54.00	-9.65
5460.00	Peak	52.88	6.69	59.57	74.00	-14.43
5462.52	Peak	54.09	6.71	60.80	68.20	-7.40
5470.00	Peak	52.19	6.77	58.96	68.20	-9.24

Test Date



:ER/2019/C0048

Report Number

peration Mode st Channel st Mode JT Pol	:802.11n40B3 :5670 MHz :Bandedge CH :E2 Plane	High		Temp./Humi. Antenna Pol. Engineer	
117					
110					
90					
70					
	- Sector Address	and a second second second second	mutal markation	water and the second second	normation and a horastering and a second
50					
30					
10					
0					
Š 5660	5684.	5708. Eroguoney (M	5732.	5756.	5780

Frequency (MHz)								
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin		
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB		
5725.00 5730.44	Peak Peak	53.74 55.56	7.53 7.53	61.27 63.09	68.20 68.20	-6.93 -5.11		

Test Date



:ER/2019/C0048

Report Number

Operation Mode Test Channel Test Mode EUT Pol	:802.11n4 :5670 MH: :Bandedge :E2 Plane	z		Temp./Humi. Antenna Pol. Engineer		AL
117						
110						
90						
70						
50	L.	en la material and a standard and a standard	mhuluomanistration	North Market Market and a start and a start and a start and a start a start a start a start a start a start a s	puljer u harrige Harrison Harr	
50						
30						
10						
0 <u>5660</u>	5684.	5708. Freque	5732. ncy (MHz)	5756.	5780	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin

MHz PK/QP/AV dBµV dB dBµV/m dBµV/m dB 5725.00 Peak 50.07 7.53 57.60 68.20 -10.60

-26.04

-35.72

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5720.00

5725.00

Peak

Peak

•	tion Mode hannel lode	:802.11n4 :5755 MH :Bandedg			Temp./Humi. Antenna Pol. Engineer	:22.8/66 :VERTICAL :Kane	
EUT P		:E2 Plane			Engineer	interno	
LOIP	01	.EZ FIANE					
160	evel (dBuV/m)		i i	i i	i i	i	
150	 						
130	 						
110	·		· · · · · · · · · · · · · · · · · · ·	+			
90	 					1	
90				when more and and	- mark		
70	1			· · · · · · · · · · · · · · · · · · ·			
50	water and the second second						
50							
30					· · · · · · · · · · · · · · · · · · ·		
10 0							
-50	645	5669.	5693. Freque	5717. ncy (MHz)	5741.	5765	
Fr	eq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	- 1.	Mode	Reading Level		FS	@3m	
Μ	IHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
565	50.00	Peak	51.29	7.02	58.31	68.20	-9.89
570	00.00	Peak	61.40	7.54	68.94	105.20	-36.26

77.23

78.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeindustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市五股區新北產業園區五工路 134 號

7.53

7.53

84.76

86.48

-36.26

-46.01

110.80

122.20

Test Date



:ER/2019/C0048

Report Number

5720.00

5725.00

Peak

Peak

Test	ration Mode Channel Mode Pol	:802.11n4 :5755 MH :Bandedg :E2 Plane	z e CH Low		Temp./Humi. Antenna Pol. Engineer		TAL .
	0 Level (dBuV/m)						
				1			
15	0						
13	o	·			· · · · · · · · · · · · · · · · · · ·		
11	0						
	0						
9	0						
7				- Anna - John - Anna	-		
	1	متواجعه ومعادي والمحالية والمحالية والمحالية والمحالية	- 2 million - 2 million				
5	0						
3				1			
J							
1		·					
	0 5645	5669.	5693.	5717.	5741.	5765	
				cy (MHz)			
	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level	10	FS	@3m	
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_			40.00	7.00	50.00	~~~~	44.00
	650.00	Peak	49.28	7.02	56.30	68.20	-11.90
5	700.00	Peak	52.94	7.54	60.48	105.20	-44.72

67.01

68.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.53


7.53

74.54

76.19




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n40B4	Temp./Humi.	:22.8/66
Test Channel	:5795 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

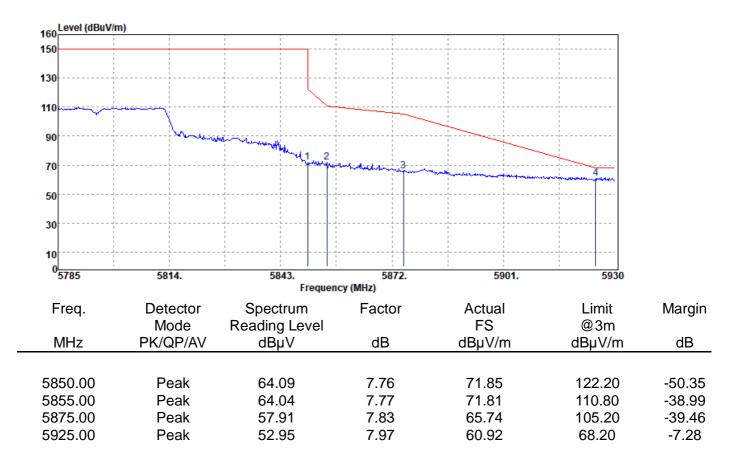



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11n40B4	Temp./Humi.	:22.8/66
Test Channel	:5795 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

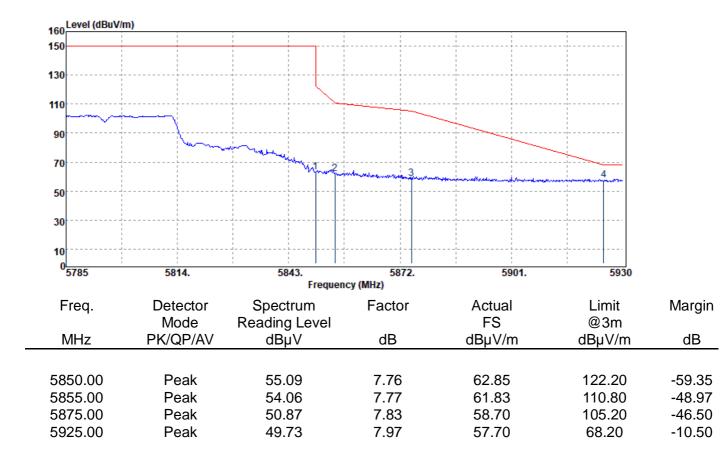


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另方說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新 北市 五股區新北產業園區五工路 134 號



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80B1	Temp./Hu
Test Channel	:5210 MHz	Antenna I
Test Mode	:Bandedge CH Low	Engineer
EUT Pol	:E2 Plane	

:2019-11-25 е :22.8/66 umi. Pol. :VERTICAL :Kane

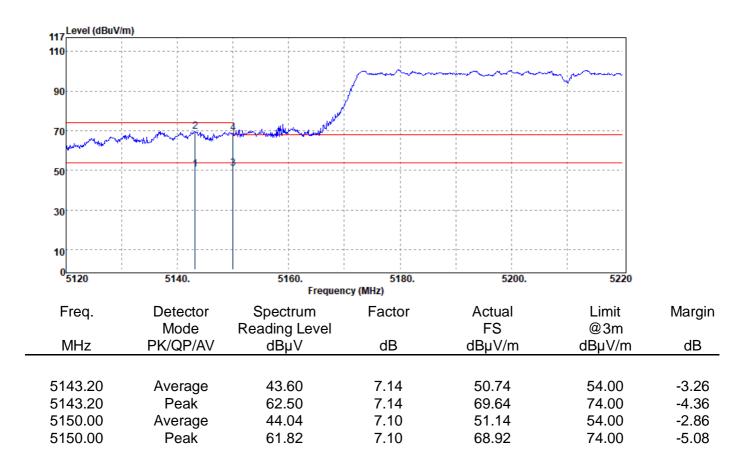


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd, INo.134 Wuk/LingRoad. NewTaineiIndustriaPark Wuk/Linjetrict NewTaineiClive Taiwan 24803/44. + まま地同じままままで 124. ³⁴



Report Number	:ER/2019/C0048	Test Date	:2
Operation Mode	:802.11ac80B1	Temp./Humi.	:2
Test Channel	:5210 MHz	Antenna Pol.	:⊦
Test Mode	:Bandedge CH Low	Engineer	:k
EUT Pol	:E2 Plane		

2019-11-25 22.8/66 HORIZONTAL :Kane

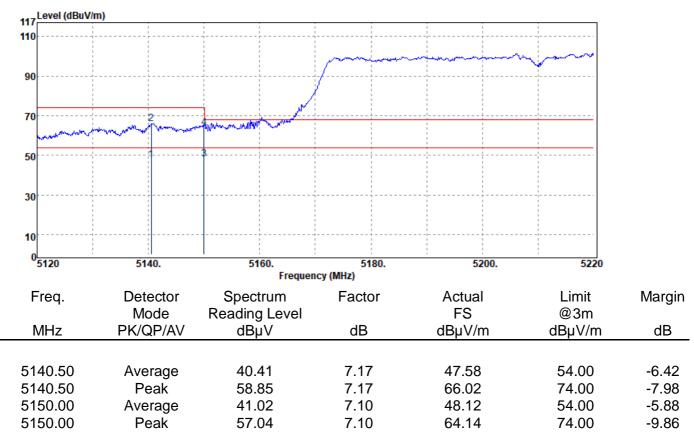


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方角就明,此報告結果僅對測試之樣品負責,同時此樣品僅係留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11ac80B2	Temp./Humi.	:22.8/66
Test Channel	:5290 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

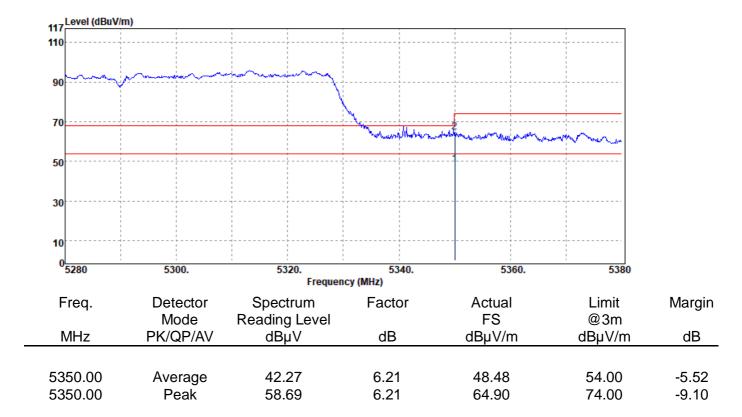




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11ac80B2	Temp./Humi.	:22.8/66
Test Channel	:5290 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

117	Level (dBu\	//m)					
110				i i i i i i i i i i i i i i i i i i i	· · · · · · · · · · · · · · · · · · ·		
90	un n	Jumpson					
70				And and and and a	2 4		
50							
30							
10							
0	5280	5300.	5320. Freque	5340. ncy (MHz)	5360.	5380	
F	req.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Marg
Ν	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
53	50.00	Average	42.13	6.21	48.34	54.00	-5.6
	50.00	Peak	57.43	6.21	63.64	74.00	-10.3
53	56.90	Average	41.87	6.24	48.11	54.00	-5.8
53	56.90	Peak	57.67	6.24	63.91	74.00	-10.0



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80B3	Temp./Humi
Test Channel	:5530 MHz	Antenna Pol
Test Mode	:Bandedge CH Low	Engineer
EUT Pol	:E2 Plane	

Test Date	:2019-11-25
Temp./Humi.	:22.8/66
Antenna Pol.	:VERTICAL
Engineer	:Kane

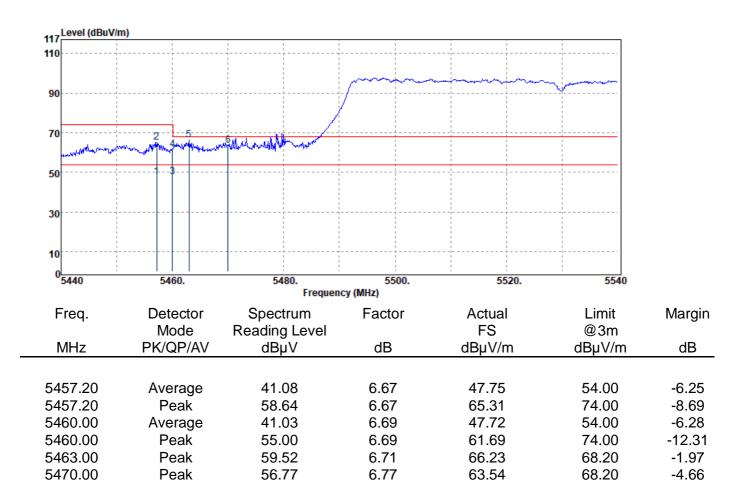

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

In H つ 3 成功 : 匹根 告約 不理 封測 紙乙 核 前具 頁 , 阿時此 株 前 佳 係 留 90 天 。 本報告 未經本公司 書 面許可 , 不可部份複製 。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report Number	:ER/2019/C0048	Test Date
Operation Mode	:802.11ac80B3	Temp./Humi.
Test Channel	:5530 MHz	Antenna Pol.
Test Mode	:Bandedge CH Low	Engineer
EUT Pol	:E2 Plane	

:2019-11-25 :22.8/66 :HORIZONTAL :Kane

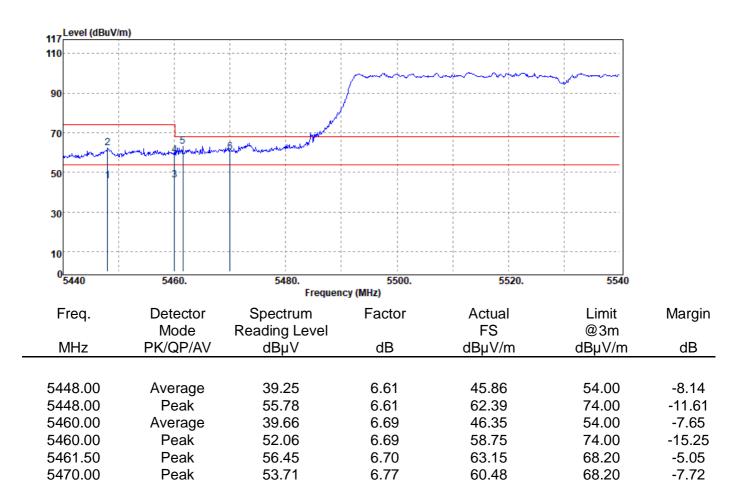

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

In H つ 3 成功 : 匹根 告約 不理 封測 紙乙 核 前具 頁 , 阿時此 株 前 佳 係 留 90 天 。 本報告 未經本公司 書 面許可 , 不可部份複製 。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Margin

ЧВ

Test Date



Report Number :ER/2019/C0048

Operation Mo Test Channel Test Mode EUT Pol	:5775 MH	lz e CH Low		Temp./Humi. Antenna Pol. Engineer	
160 Level (dBuV	//m)				
150					
130					
110				monorman	
90		2	3.4 m		
70	- An	man for some			
50			·····		
30					
10	· · · · · · · · · · · · · · · · · · ·				
0 5645	5673.	5701. Freque	5729. ncy (MHz)	5757.	5785
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m
MHz	PK/QP/AV	dBuV	dB	dBuV/m	dBuV/m

	FK/QF/AV	ибμν	uБ	иврулл	ubµv/m	uБ
5650.00	Peak	53.54	7.02	60.56	68.20	-7.64
5700.00	Peak	68.16	7.54	75.70	105.20	-29.50
5720.00	Peak	72.04	7.53	79.57	110.80	-31.23
5725.00	Peak	73.69	7.53	81.22	122.20	-40.98

Report No.: ER/2019/C0048 Page: 352 of 361

:2019-11-25

-39.25

122.20

Test Date



:ER/2019/C0048

Report Number

5725.00

Peak

Operation Mode Test Channel Test Mode EUT Pol	:5775 MH	lz je CH Low		Temp./Humi. Antenna Pol Engineer		TAL
160 Level (dBuV/m)						
150						
130				i i 		
110		· · · · · · · · · · · · · · · · · · ·				
				mannen	man marken	
90	·····	2	3 4 mm			
701	adente mon	warman				
morenalitiend	- and the second					
50	·	· · · · · · · · · · · · · · · · · · ·		i i 		
20						
30						
10			· · · · · · · · · · · · · · · · · · ·			
0 5645	5673.	5701.	5729.	5757.	5785	
		Freque	ncy (MHz)			
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
5650.00	Peak	59.22	7.02	66.24	68.20	-1.96
5700.00	Peak	71.11	7.54	78.65	105.20	-26.55
5720.00	Peak	75.29	7.53	82.82	110.80	-27.98

75.42


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the laws. SGS Taiwan Ltd. INo.134 WuKungRoad. NewTaineindustria/Park. WukuDistrict NewTaineic/Ltaiwan24803/ 創 七 五 五 股 區 新 七 產 業 聞 區 五 工 點 134 號

7.53

82.95




Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11ac80B4	Temp./Humi.	:22.8/66
Test Channel	:5775 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

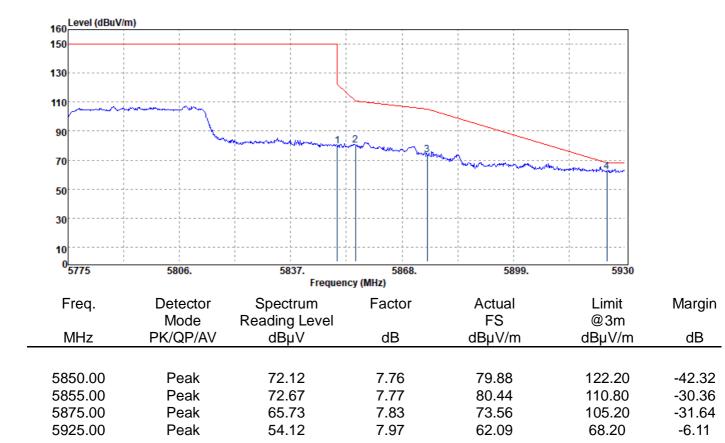



Report Number	:ER/2019/C0048	Test Date	:2019-11-25
Operation Mode	:802.11ac80B4	Temp./Humi.	:22.8/66
Test Channel	:5775 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Kane
EUT Pol	:E2 Plane		

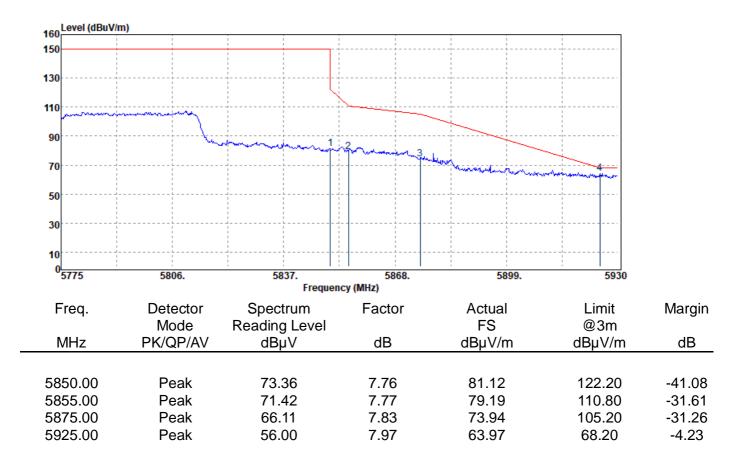



12 TRANSMISSION IN THE ABSENCE OF DATA

12.1 Standard Applicable

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

12.2 Result

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13 FREQUENCY STABILITY

13.1 Standard Applicable


Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

13.2 Measurement Procedure

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.

13.3 Test SET-UP

Temperature Chamber

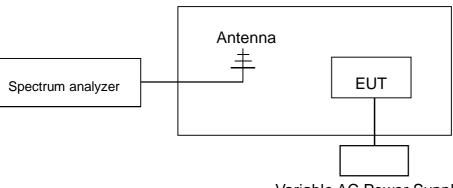

Variable AC Power Supply

13.4 Measurement Equipment Used:

SGS Conducted Room							
Name of Equip- ment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due		
DC Power Supply	Agilent	E3640A	MY52410006	12/10/2019	12/09/2020		
Temperature Chamber	TERCHY	MHG-120LF	911009	05/17/2019	05/16/2020		
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	02/13/2019	02/12/2020		
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2019	01/01/2020		
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2019	01/01/2020		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.5 Measurement Result

Start up

Operation Mode	802.11 a	Test Date	2019.12.24
Temperature	: 23.8°C	Test By	Tom
Humidity	: 45%		

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,179.90100	0.00001911
-30	10.8	36	5180	5,180.07200	-0.00001390
25	12	36	5180	5,179.93100	0.00001332
50	13.2	36	5180	5,179.98300	0.00000328
50	10.8	36	5180	5,180.07900	-0.00001525
Operation Mode		802.11 a		Test Date	2019.12.24
Temperature		: 23.8°C		Test By	Tom
Humidity		: 45%			

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,179.90100	0.00001911
-30	10.8	36	5180	5,180.07200	-0.00001390
25	12	36	5180	5,179.93100	0.00001332
50	13.2	36	5180	5,179.98300	0.00000328
50	10.8	36	5180	5,180.07900	-0.00001525



2 minutes

Operation Mode	802.11 a	Test Date	2019.12.24
Temperature	: 23.8°C	Test By	Tom
Humidity	: 45%	•	

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,180.09800	-0.00001892
-30	10.8	36	5180	5,180.04400	-0.00000849
25	12	36	5180	5,180.07800	-0.00001506
50	13.2	36	5180	5,180.08400	-0.00001622
50	10.8	36	5180	5,179.97700	0.00000444
Operation Mode		802.11 a		Test Date	2019.12.24
Temperature		: 23.8°C		Test By	Tom
Humidity		: 45%		-	

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,180.09800	-0.00001892
-30	10.8	36	5180	5,180.04400	-0.00000849
25	12	36	5180	5,180.07800	-0.00001506
50	13.2	36	5180	5,180.08400	-0.00001622
50	10.8	36	5180	5,179.97700	0.00000444



5 minutes

Operation Mode	802.11 a	Test Date	2019.12.24
Temperature	: 23.8°C	Test By	Tom
Humidity	: 45%		

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,179.99700	0.0000058
-30	10.8	36	5180	5,179.93600	0.00001236
25	12	36	5180	5,179.94000	0.00001158
50	13.2	36	5180	5,180.08800	-0.00001699
50	10.8	36	5180	5,179.99100	0.00000174
Operation Mode		802.11 a		Test Date	2019.12.24
Temperature		: 23.8°C		Test By	Tom
Humidity		: 45%		-	

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,179.99700	0.0000058
-50	10.8	36	5180	5,179.93600	0.00001236
25	12	36	5180	5,179.94000	0.00001158
50	13.2	36	5180	5,180.08800	-0.00001699
50	10.8	36	5180	5,179.99100	0.00000174



10 minutes

Operation Mode	802.11 a	Test Date	2019.12.24
Temperature	: 23.8°⊂	Test By	Tom
Humidity	: 45%	-	

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,180.04700	-0.00000907
-30	10.8	36	5180	5,179.94200	0.00001120
25	12	36	5180	5,179.98500	0.0000290
50	13.2	36	5180	5,180.06600	-0.00001274
50	10.8	36	5180	5,180.07900	-0.00001525
Operation Mode		802.11 a		Test Date	2019.12.24
Temperature		: 23.8°C		Test By	Tom
Humidity		: 45%		-	

Test Temp.(℃)	Test Voltage(V)	Channel	Measured Frequency (MHz)	Spectrum Frequency (MHz)	ΔFrequency (MHz)
-30	13.2	36	5180	5,180.04700	-0.00000907
-30	10.8	36	5180	5,179.94200	0.00001120
25	12	36	5180	5,179.98500	0.00000290
F0	13.2	36	5180	5,180.06600	-0.00001274
50	10.8	36	5180	5,180.07900	-0.00001525



14 ANTENNA REQUIREMENT

14.1 Standard Applicable

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. According to §15.407, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edcument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's

issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.