



FCC RF Test Report

APPLICANT : FIBOCOM WIRELESS INC.
EQUIPMENT : LTE Module
BRAND NAME : Fibocom
MODEL NAME : L811-EA
FCC ID : ZMOL811
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Sep. 12, 2015 and testing was completed on Sep. 18, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	6
1.1	Applicant.....	6
1.2	Manufacturer	6
1.3	Product Feature of Equipment Under Test	6
1.4	Product Specification subjective to this standard.....	7
1.5	Modification of EUT	7
1.6	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	8
1.7	Testing Location	8
1.8	Applicable Standards	9
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1	Test Mode.....	10
2.2	Connection Diagram of Test System	11
2.3	Support Unit used in test configuration	11
2.4	Measurement Results Explanation Example	12
3	CONDUCTED TEST RESULT.....	13
3.1	Measuring Instruments.....	13
3.2	Test Setup	13
3.3	Test Result of Conducted Test.....	13
3.4	Conducted Output Power	14
3.5	Peak-to-Average Ratio	14
3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	15
3.7	Conducted Band Edge	16
3.8	Conducted Spurious Emission	17
3.9	Frequency Stability	18
4	RADIATED TEST ITEMS	19
4.1	Measuring Instruments.....	19
4.2	Test Setup	19
4.3	Test Result of Radiated Test.....	19
4.4	Effective Radiated Power and Effective Isotropic Radiated Power Measurement	20
4.5	Field Strength of Spurious Radiation Measurement	22
5	LIST OF MEASURING EQUIPMENT	23
6	UNCERTAINTY OF EVALUATION	24

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG531804-01A	Rev. 01	Initial issue of report	Oct. 09, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		

Report Section	FCC Rule	Description	Limit	Result	Remark
4.4	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
4.5	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 26.97 dB at 1672.000 MHz



1 General Description

1.1 Applicant

FIBOCOM WIRELESS INC.

5/F, Tower A, Technology Building II,1057# Nanhai Blvd, Shenzhen, P.R.China

1.2 Manufacturer

FIBOCOM WIRELESS INC.

5/F, Tower A, Technology Building II,1057# Nanhai Blvd, Shenzhen, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Module
Brand Name	Fibocom
Model Name	L811-EA
FCC ID	ZMOL811
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE
IMEI Code	Radiation:867890020003253 Conducted: 867890020001919 ERP/EIRP: 867890020003253
HW Version	V1.0.1
SW Version	L811_V3E.0C.01.00
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	GPRS/EDGE: 850: 32.79 dBm 1900: 30.38 dBm WCDMA: Band V: 23.36 dBm Band II: 23.54 dBm Band IV: 23.63 dBm
Antenna Type	Fixed External Antenna
Type of Modulation	GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : QPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (Downlink Only) DC-HSDPA : 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 10	GMSK	1.8857	0.0478	247KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.5695	0.0179	247KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.2346	0.0335	4M09F9W
Part 24	GSM1900 GPRS class 10	GMSK	1.0000	0.0090	248KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.4064	0.0064	246KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2244	0.0037	4M09F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.1938	0.0052	4M09F9W

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH01-SZ	831040



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 10 Link ■ EDGE class 8 Link	■ GPRS class 10 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 10 Link ■ EDGE class 8 Link	■ GPRS class 10 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

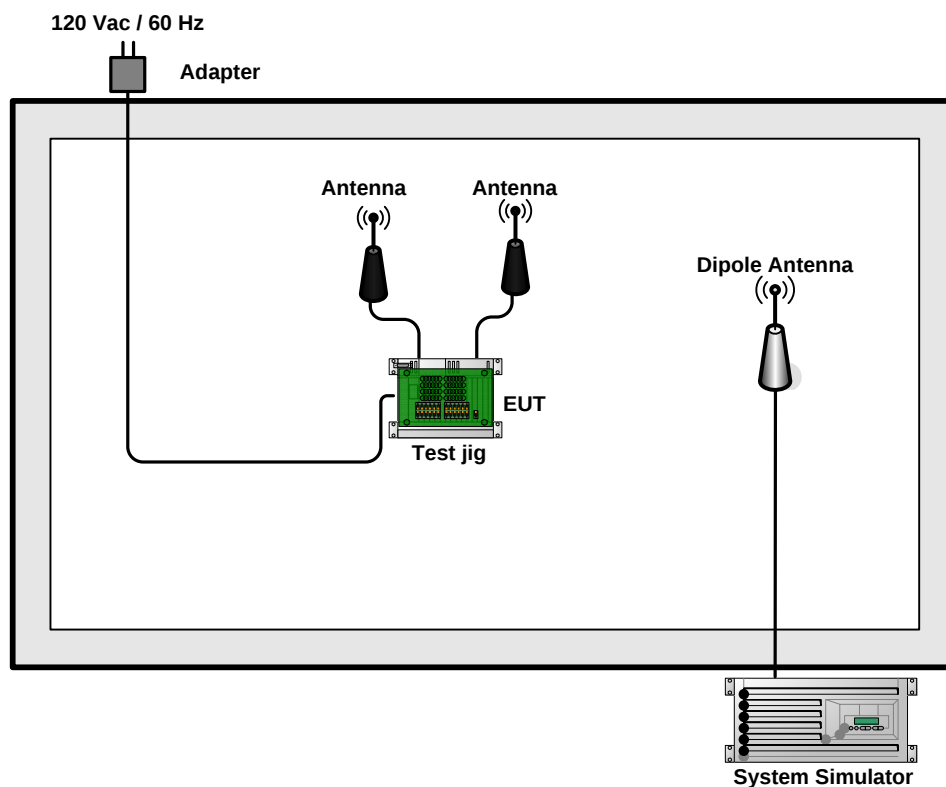

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Test jig	N/A	N/A	N/A	N/A	N/A
3.	Antenna	N/A	N/A	N/A	N/A	N/A
4.	Adapter	N/A	FY0502000	N/A	N/A	N/A



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.5 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.5 + 10 = 14.5 \text{ (dB)}\end{aligned}$$


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

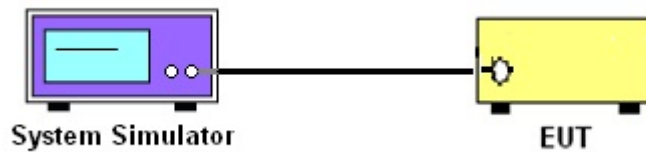

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

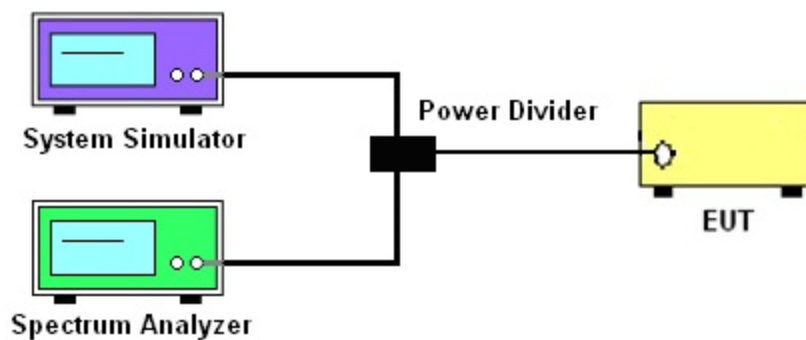

3.2.3 Frequency Stability

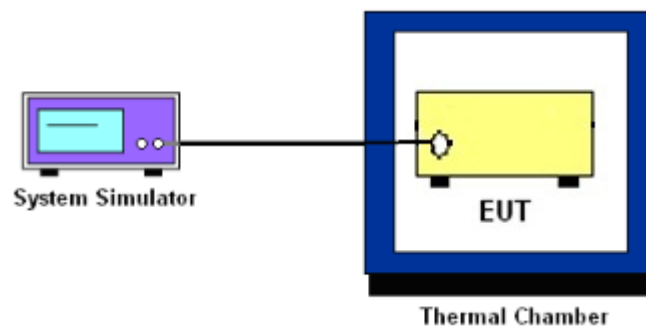

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the two sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, peak detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

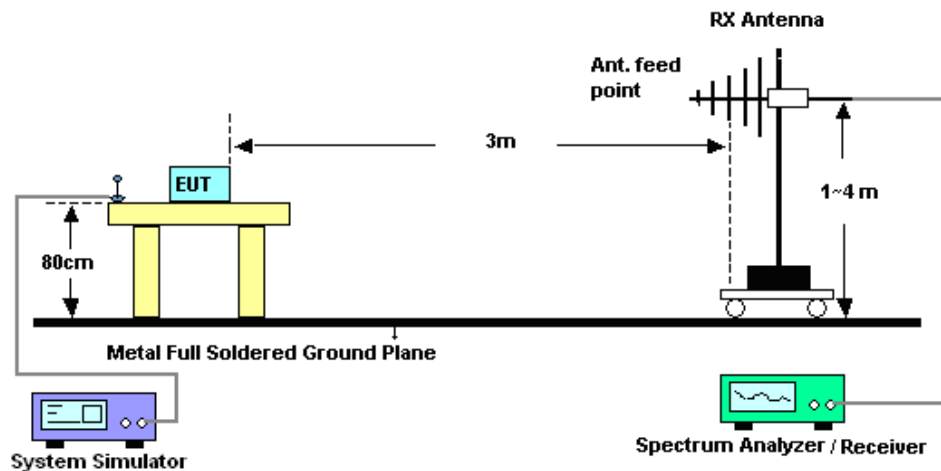

4.2.2 For radiated test above 1GHz

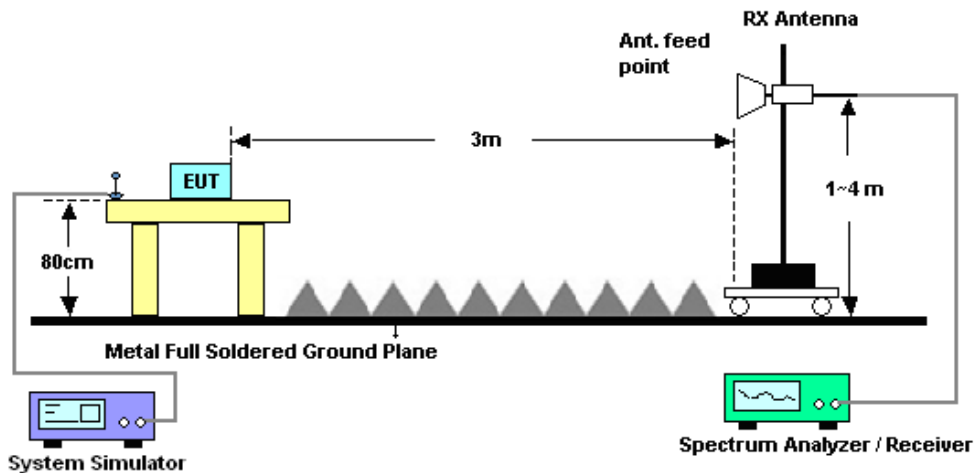

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

4.4.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	GSM/GPRS/EDGE	WCDMA/HSPA
SPAN	500kHz	10MHz
RBW	10kHz	100kHz
VBW	30kHz	300kHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

4.5 Field Strength of Spurious Radiation Measurement

4.5.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	Sep. 15, 2015~ Sep. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Sep. 15, 2015~ Sep. 16, 2015	May 04, 2016	Conducted (TH01-SZ)
Thermal Chamber	Hong zhangroup	LP-150U	HD20120425	-40℃~150℃	Jan. 28, 2015	Sep. 15, 2015~ Sep. 16, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 25, 2015	Sep. 18, 2015	May 24, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz;Max 30dBm	Sep. 25, 2014	Sep. 18, 2015	Sep. 24, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Nov. 07, 2014	Sep. 18, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Sep. 18, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug.19, 2015	Sep. 18, 2015	Aug. 18, 2016	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz / 30 dB	Jan. 28, 2015	Sep. 18, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 28, 2015	Sep. 18, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Sep. 18, 2015	May 04, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Sep. 18, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 18, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 18, 2015	NCR	Radiation (03CH01-SZ)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9dB
--	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	32.58	32.62	32.70	30.22	30.25	30.23
GPRS class 10	32.65	32.70	32.79	30.36	30.38	30.35
GPRS class 11	31.98	32.05	32.16	29.50	29.43	29.41
GPRS class 12	30.53	30.64	30.71	28.20	28.18	28.19
EGPRS class 8	27.27	27.25	27.22	26.53	26.56	26.65
EGPRS class 10	27.23	27.25	27.22	26.54	26.57	26.65
EGPRS class 11	26.44	26.47	26.44	25.75	25.78	25.86
EGPRS class 12	25.34	25.36	25.36	24.52	24.55	24.67

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	23.21	23.34	23.36	23.54	23.48	23.31	23.54	23.63	23.61
HSDPA Subtest-1	21.02	21.11	21.20	21.13	21.12	21.09	21.11	21.21	21.19
HSDPA Subtest-2	21.02	21.11	21.20	21.12	21.12	21.08	21.13	21.23	21.18
HSDPA Subtest-3	21.02	21.11	21.18	21.12	21.12	21.09	21.12	21.23	21.18
HSDPA Subtest-4	21.03	21.11	21.16	21.13	21.11	21.09	21.11	21.23	21.18
DC-HSDPA Subtest-1	21.58	21.65	21.63	21.72	21.66	21.64	21.75	21.81	21.78
DC-HSDPA Subtest-2	21.51	21.61	21.66	21.67	21.56	21.57	21.63	21.67	21.79
DC-HSDPA Subtest-3	21.49	21.59	21.62	21.61	21.58	21.61	21.59	21.69	21.75
DC-HSDPA Subtest-4	21.48	21.57	21.60	21.62	21.59	21.56	21.61	21.65	21.76
HSUPA Subtest-1	22.43	22.65	22.69	22.82	22.72	22.66	22.78	22.96	22.90
HSUPA Subtest-2	20.62	20.81	20.86	21.00	20.94	20.83	21.00	21.12	21.10
HSUPA Subtest-3	21.77	21.88	21.91	21.99	21.98	21.84	22.00	22.15	22.11
HSUPA Subtest-4	20.95	21.07	21.09	21.17	21.13	21.08	21.19	21.38	21.31
HSUPA Subtest-5	23.00	23.00	23.10	23.20	23.20	23.10	23.20	23.40	23.30







Peak-to-Average Ratio







Mode	GSM850		Limit: 13dB
Mod.	GPRS class 10	EDGE class 8	Result
Lowest CH	0.24	3.28	PASS
Middle CH	0.28	3.28	
Highest CH	0.24	3.12	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 10	EDGE class 8	Result
Lowest CH	0.20	3.08	PASS
Middle CH	0.24	3.12	
Highest CH	0.20	2.84	

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.92	2.64	2.48	PASS
Middle CH	2.84	2.80	2.48	
Highest CH	2.52	2.88	2.80	

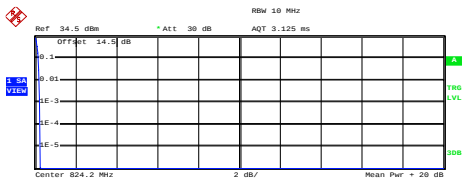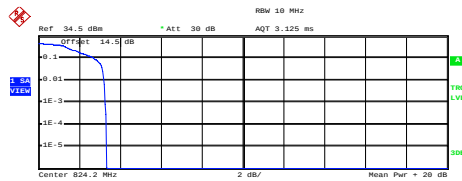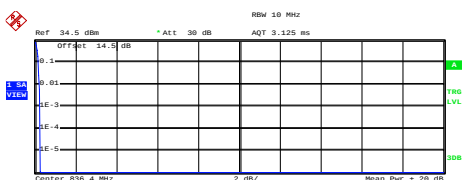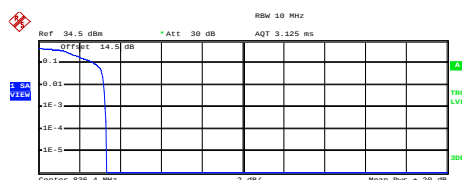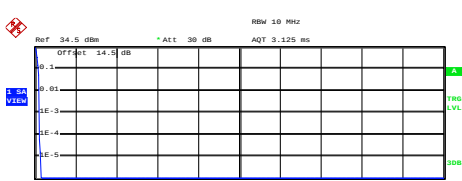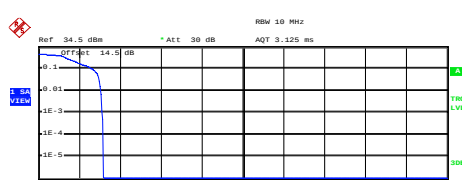


GSM850 (GPRS class 10)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset: 14.5 dB AQT 3.125 ms Center: 824.2 MHz 2 dB/ Mean Power: +20 dB Trace 1 Mean: 31.72 dBm Peak: 32.00 dBm Crest: 0.28 dB 10 % 0.20 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.28 dB Date: 15.SEP.2015 12:00:26		 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset: 14.5 dB AQT 3.125 ms Center: 824.2 MHz 2 dB/ Mean Power: +20 dB Trace 1 Mean: 27.03 dBm Peak: 30.38 dBm Crest: 3.35 dB 10 % 2.72 dB 1 % 3.24 dB .1 % 3.28 dB .01 % 3.36 dB Date: 15.SEP.2015 14:58:39	
Middle Channel		Middle Channel	
 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset: 14.5 dB AQT 3.125 ms Center: 824.2 MHz 2 dB/ Mean Power: +20 dB Trace 1 Mean: 31.80 dBm Peak: 32.07 dBm Crest: 0.27 dB 10 % 0.20 dB 1 % 0.24 dB .1 % 0.28 dB .01 % 0.28 dB Date: 15.SEP.2015 12:00:57		 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset: 14.5 dB AQT 3.125 ms Center: 824.2 MHz 2 dB/ Mean Power: +20 dB Trace 1 Mean: 26.98 dBm Peak: 30.31 dBm Crest: 3.33 dB 10 % 2.76 dB 1 % 3.20 dB .1 % 3.28 dB .01 % 3.36 dB Date: 15.SEP.2015 14:59:06	
Highest Channel		Highest Channel	
 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset: 14.5 dB AQT 3.125 ms Center: 848.8 MHz 2 dB/ Mean Power: +20 dB Trace 1 Mean: 31.85 dBm Peak: 32.14 dBm Crest: 0.29 dB 10 % 0.16 dB 1 % 0.24 dB .1 % 0.24 dB .01 % 0.24 dB Date: 15.SEP.2015 12:02:03		 Ref: 34.5 dBm *Att: 30 dB RBW 10 MHz Offset: 14.5 dB AQT 3.125 ms Center: 848.8 MHz 2 dB/ Mean Power: +20 dB Trace 1 Mean: 27.05 dBm Peak: 30.24 dBm Crest: 3.19 dB 10 % 2.64 dB 1 % 3.08 dB .1 % 3.12 dB .01 % 3.20 dB Date: 15.SEP.2015 14:59:22	

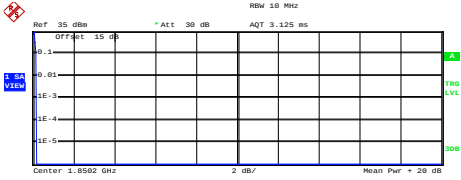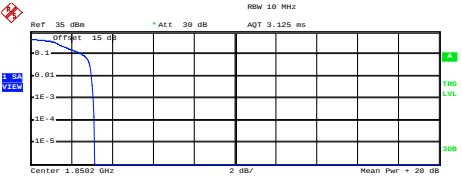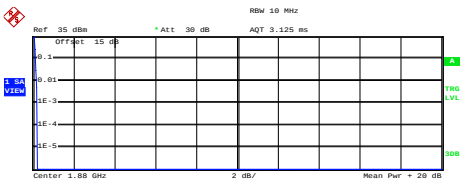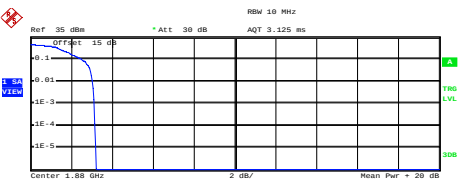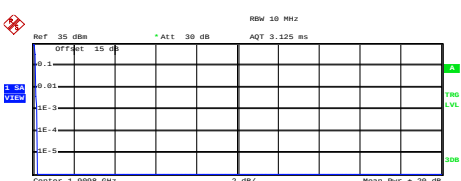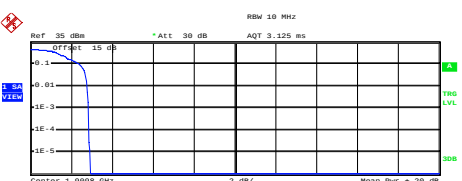GSM1900 (GPRS class 10)	GSM1900 (EDGE class 8)
Lowest Channel	Lowest Channel
 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center: 1.8502 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.64 dBm Peak 29.82 dBm Crest 0.18 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.20 dB .01 % 0.20 dB Date: 15.SEP.2015 12:48:33	 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center: 1.8502 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.85 dBm Peak 28.97 dBm Crest 3.12 dB 10 % 2.52 dB 1 % 3.00 dB .1 % 3.08 dB .01 % 3.12 dB Date: 15.SEP.2015 15:17:44
Middle Channel	Middle Channel
 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center: 1.86 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.40 dBm Peak 29.61 dBm Crest 0.21 dB 10 % 0.16 dB 1 % 0.20 dB .1 % 0.24 dB .01 % 0.24 dB Date: 15.SEP.2015 12:48:48	 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center: 1.86 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.63 dBm Peak 28.83 dBm Crest 3.20 dB 10 % 2.52 dB 1 % 3.04 dB .1 % 3.12 dB .01 % 3.16 dB Date: 15.SEP.2015 15:17:59
Highest Channel	Highest Channel
 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center: 1.9098 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.32 dBm Peak 29.54 dBm Crest 0.22 dB 10 % 0.16 dB 1 % 0.16 dB .1 % 0.20 dB .01 % 0.24 dB Date: 15.SEP.2015 12:49:04	 Ref: 35 dBm * Att: 30 dB AQT: 3.125 ms Center: 1.9098 GHz 2 dB/ Mean Pur: + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.89 dBm Peak 28.83 dBm Crest 2.94 dB 10 % 2.40 dB 1 % 2.80 dB .1 % 2.84 dB .01 % 2.88 dB Date: 15.SEP.2015 15:18:19



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

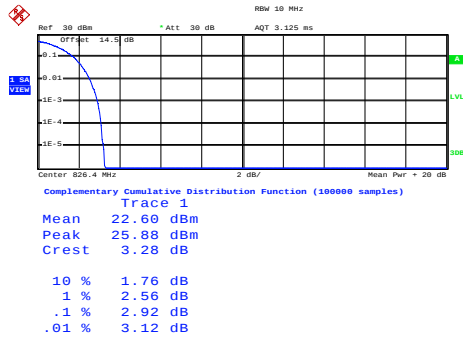

Date: 16.SEP.2015 11:23:10


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

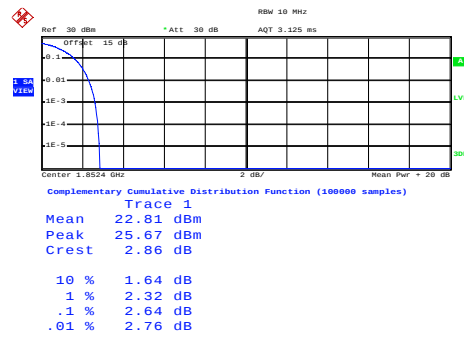


Date: 16.SEP.2015 11:35:41

Middle Channel

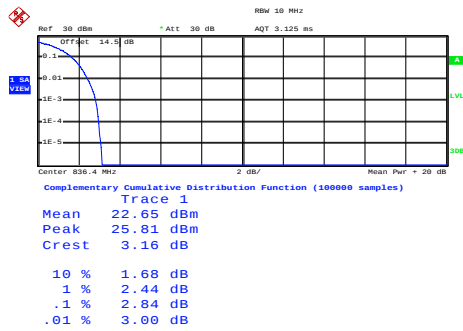


Date: 16.SEP.2015 11:23:23

Middle Channel

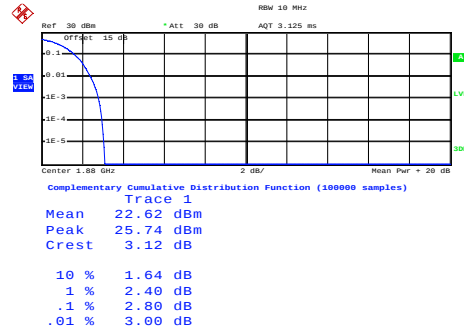


Date: 16.SEP.2015 11:35:57

Highest Channel

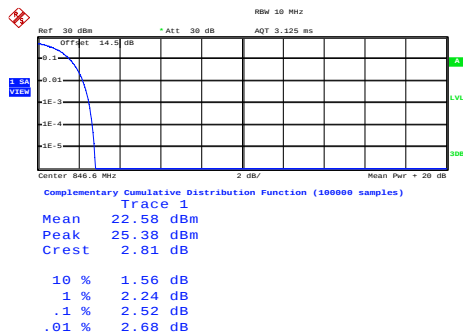




Date: 16.SEP.2015 11:23:41

Highest Channel

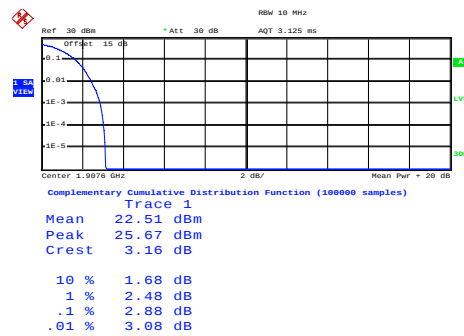

Date: 16.SEP.2015 11:36:08

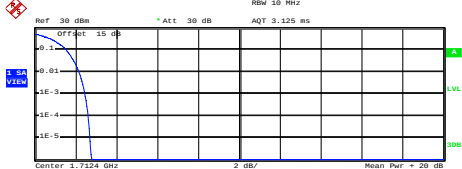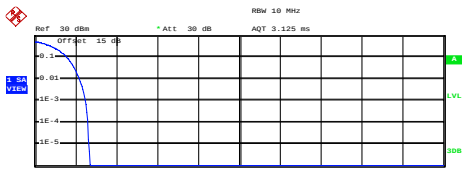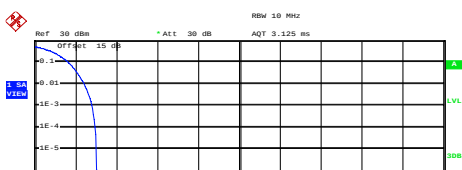

WCDMA Band IV (RMC 12.2Kbps)	
Lowest Channel	
 Ref: 30 dBm * Att: 30 dB RBW: 10 MHz Offset: 15 dB AQT: 3.125 ms Center: 1.7324 GHz 2 dB/ Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.62 dBm Peak: 25.38 dBm Crest: 2.77 dB 10 % 1.56 dB 1 % 2.16 dB .1 % 2.48 dB .01 % 2.64 dB Date: 16.SEP.2015 11:49:45	
Middle Channel	
 Ref: 30 dBm * Att: 30 dB RBW: 10 MHz Offset: 15 dB AQT: 3.125 ms Center: 1.7328 GHz 2 dB/ Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.83 dBm Peak: 25.53 dBm Crest: 2.69 dB 10 % 1.56 dB 1 % 2.20 dB .1 % 2.48 dB .01 % 2.60 dB Date: 16.SEP.2015 11:49:56	
Highest Channel	
 Ref: 30 dBm * Att: 30 dB RBW: 10 MHz Offset: 15 dB AQT: 3.125 ms Center: 1.7528 GHz 2 dB/ Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.79 dBm Peak: 25.81 dBm Crest: 3.02 dB 10 % 1.64 dB 1 % 2.44 dB .1 % 2.80 dB .01 % 2.96 dB Date: 16.SEP.2015 11:50:07	

**26dB Bandwidth**

Mode	GSM850	
Mod.	GPRS class 10	EDGE class 8
Lowest CH	0.314	0.310
Middle CH	0.315	0.316
Highest CH	0.312	0.318


Mode	GSM1900	
Mod.	GPRS class 10	EDGE class 8
Lowest CH	0.309	0.316
Middle CH	0.297	0.310
Highest CH	0.309	0.308

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.66	4.66	4.67
Middle CH	4.63	4.65	4.68
Highest CH	4.66	4.64	4.66



GSM850 (GPRS class 10)


Lowest Channel

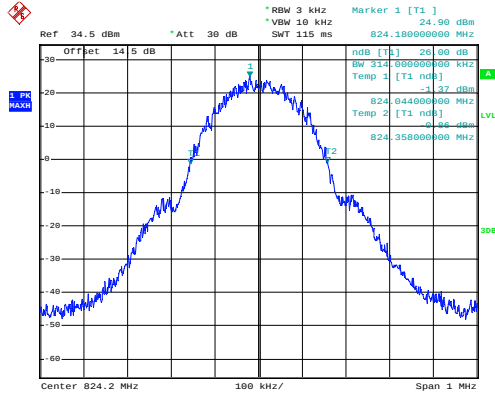

Date: 15.SEP.2015 11:45:17


GSM850 (EDGE class 8)

Lowest Channel

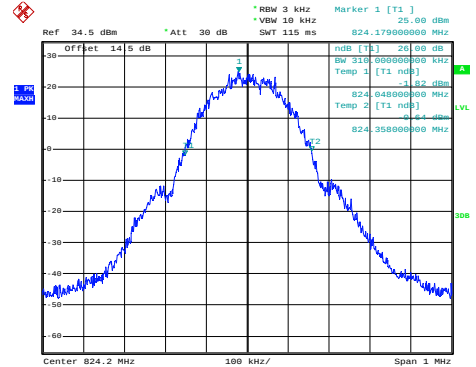


Date: 15.SEP.2015 13:03:47

Middle Channel

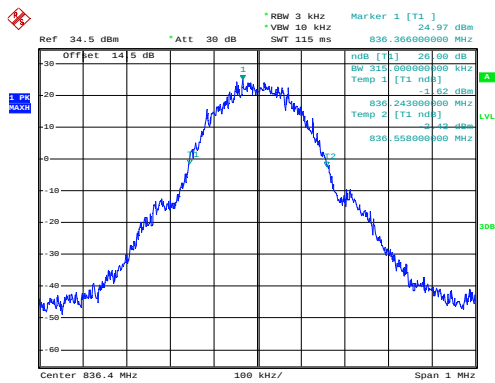


Date: 15.SEP.2015 11:45:45

Middle Channel

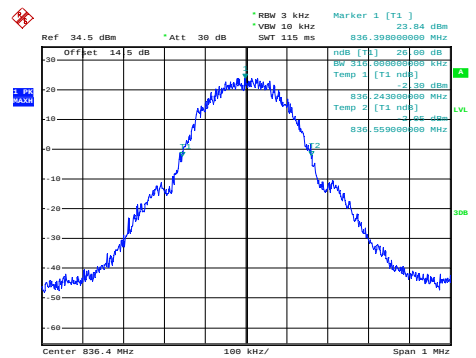


Date: 15.SEP.2015 13:04:16

Highest Channel

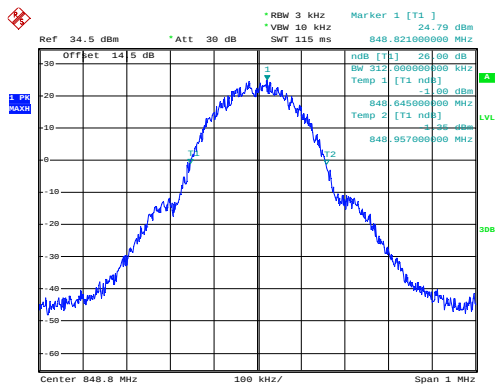


Date: 15.SEP.2015 11:46:13

Highest Channel

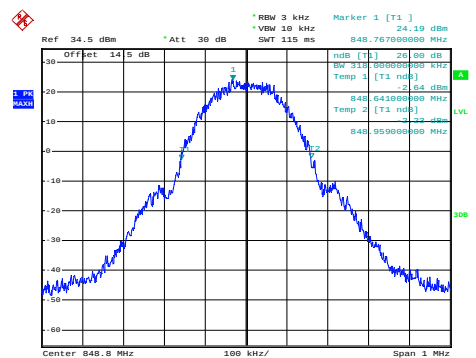


Date: 15.SEP.2015 13:04:44

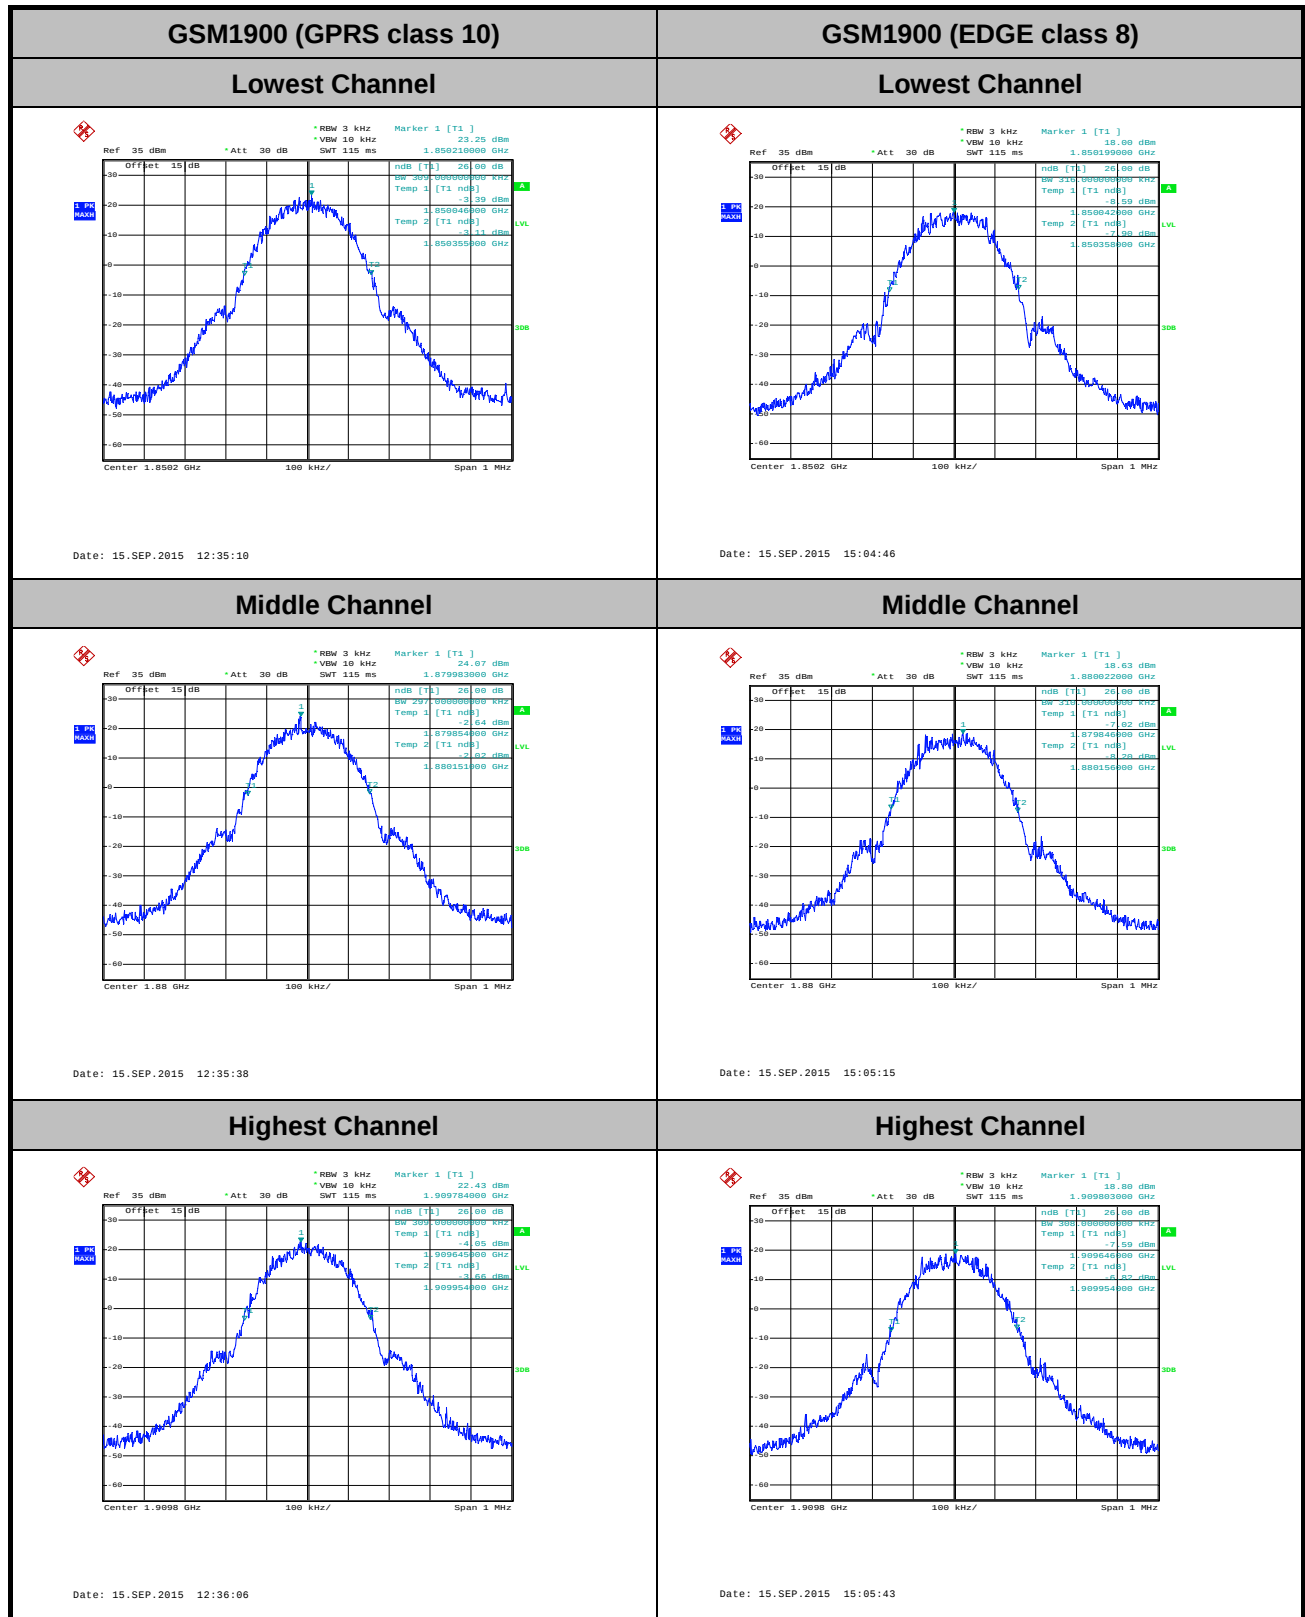



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

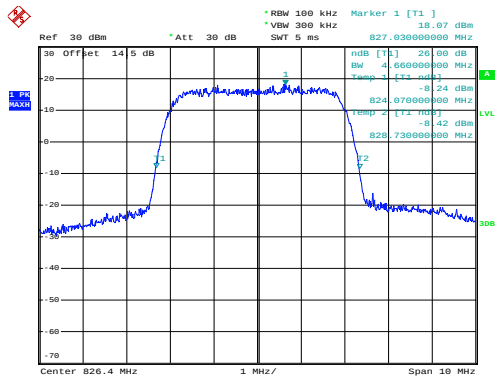

Date: 16.SEP.2015 11:07:50


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

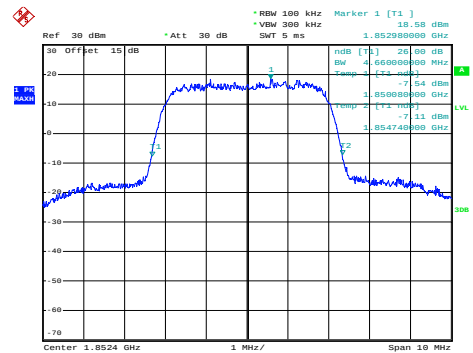


Date: 16.SEP.2015 11:25:35

Middle Channel

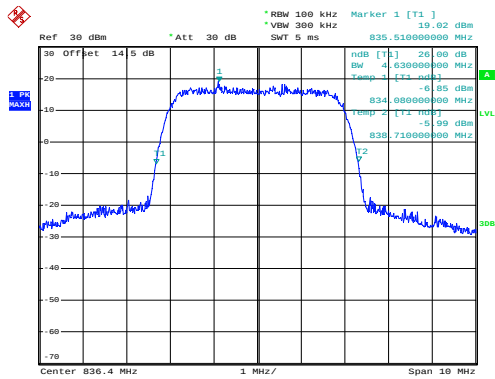


Date: 16.SEP.2015 11:08:18

Middle Channel

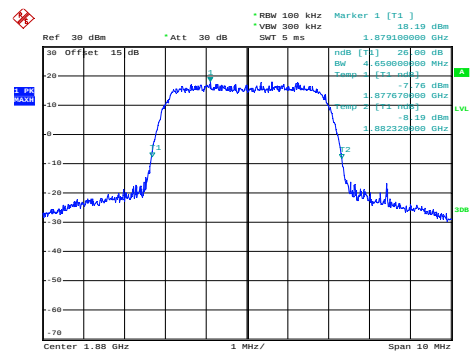


Date: 16.SEP.2015 11:26:03

Highest Channel

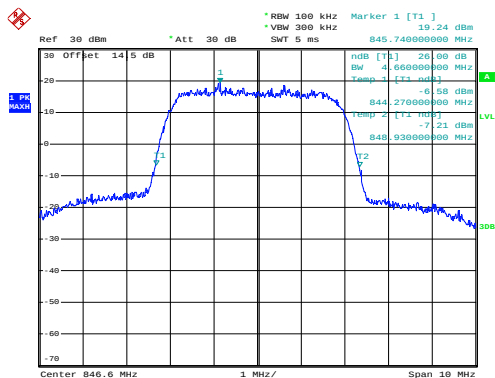

Date: 16.SEP.2015 11:08:46

Highest Channel

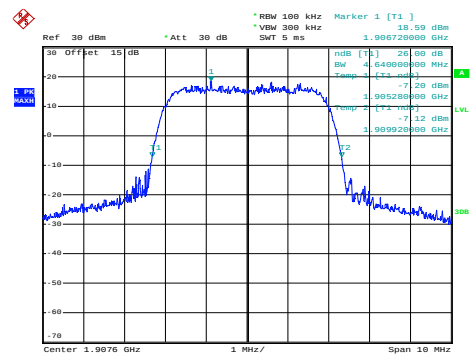


Date: 16.SEP.2015 11:26:31




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

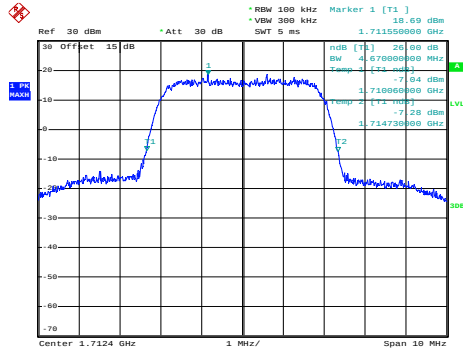


Date: 16.SEP.2015 11:39:26

Middle Channel

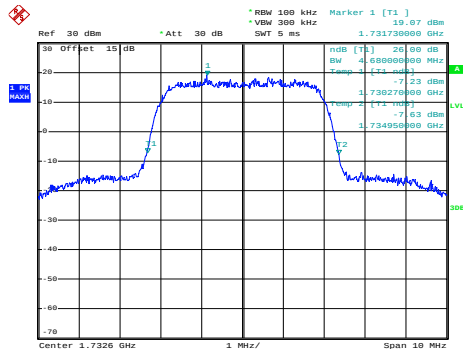

Date: 16.SEP.2015 11:39:54

Highest Channel

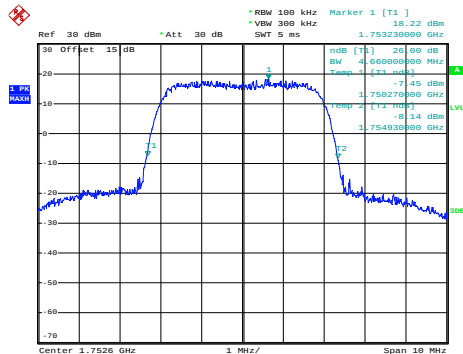

Date: 16.SEP.2015 11:40:22

**Occupied Bandwidth**


Mode	GSM850	
Mod.	GPRS class 10	EDGE class 8
Lowest CH	0.244	0.247
Middle CH	0.244	0.243
Highest CH	0.247	0.245

Mode	GSM1900	
Mod.	GPRS class 10	EDGE class 8
Lowest CH	0.248	0.237
Middle CH	0.244	0.246
Highest CH	0.243	0.243

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.09	4.08	4.09
Middle CH	4.08	4.08	4.09
Highest CH	4.08	4.09	4.09

GSM850 (GPRS class 10)


Lowest Channel

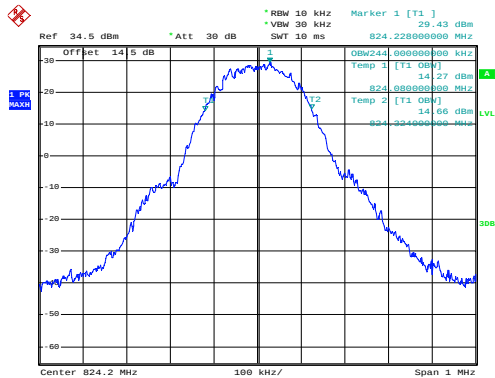

Date: 15.SEP.2015 11:46:58


GSM850 (EDGE class 8)

Lowest Channel

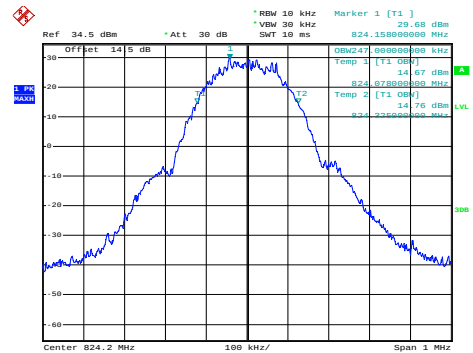


Date: 15.SEP.2015 13:06:07

Middle Channel

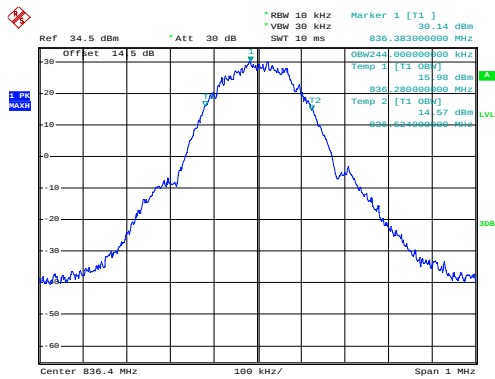


Date: 15.SEP.2015 11:47:26

Middle Channel

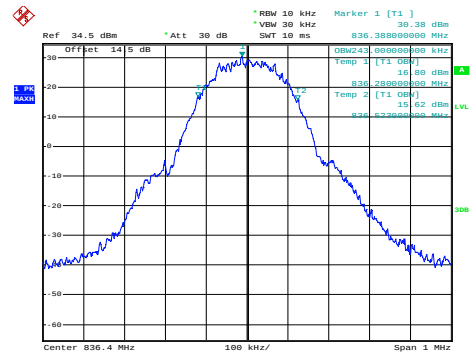


Date: 15.SEP.2015 13:06:35

Highest Channel

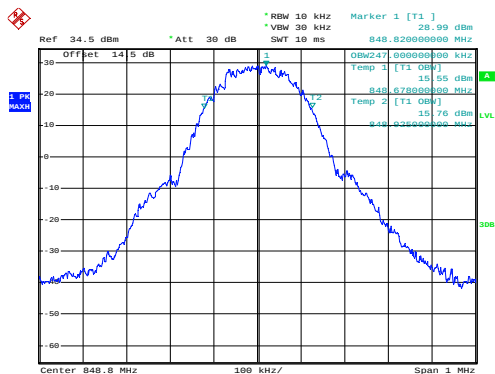


Date: 15.SEP.2015 11:47:54

Highest Channel

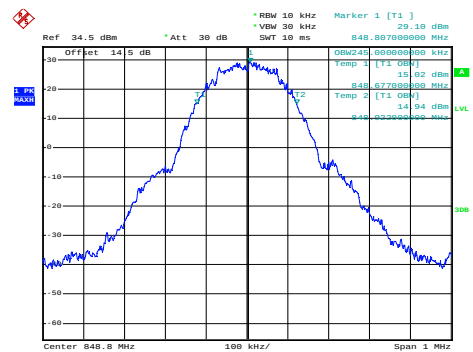


Date: 15.SEP.2015 13:07:03

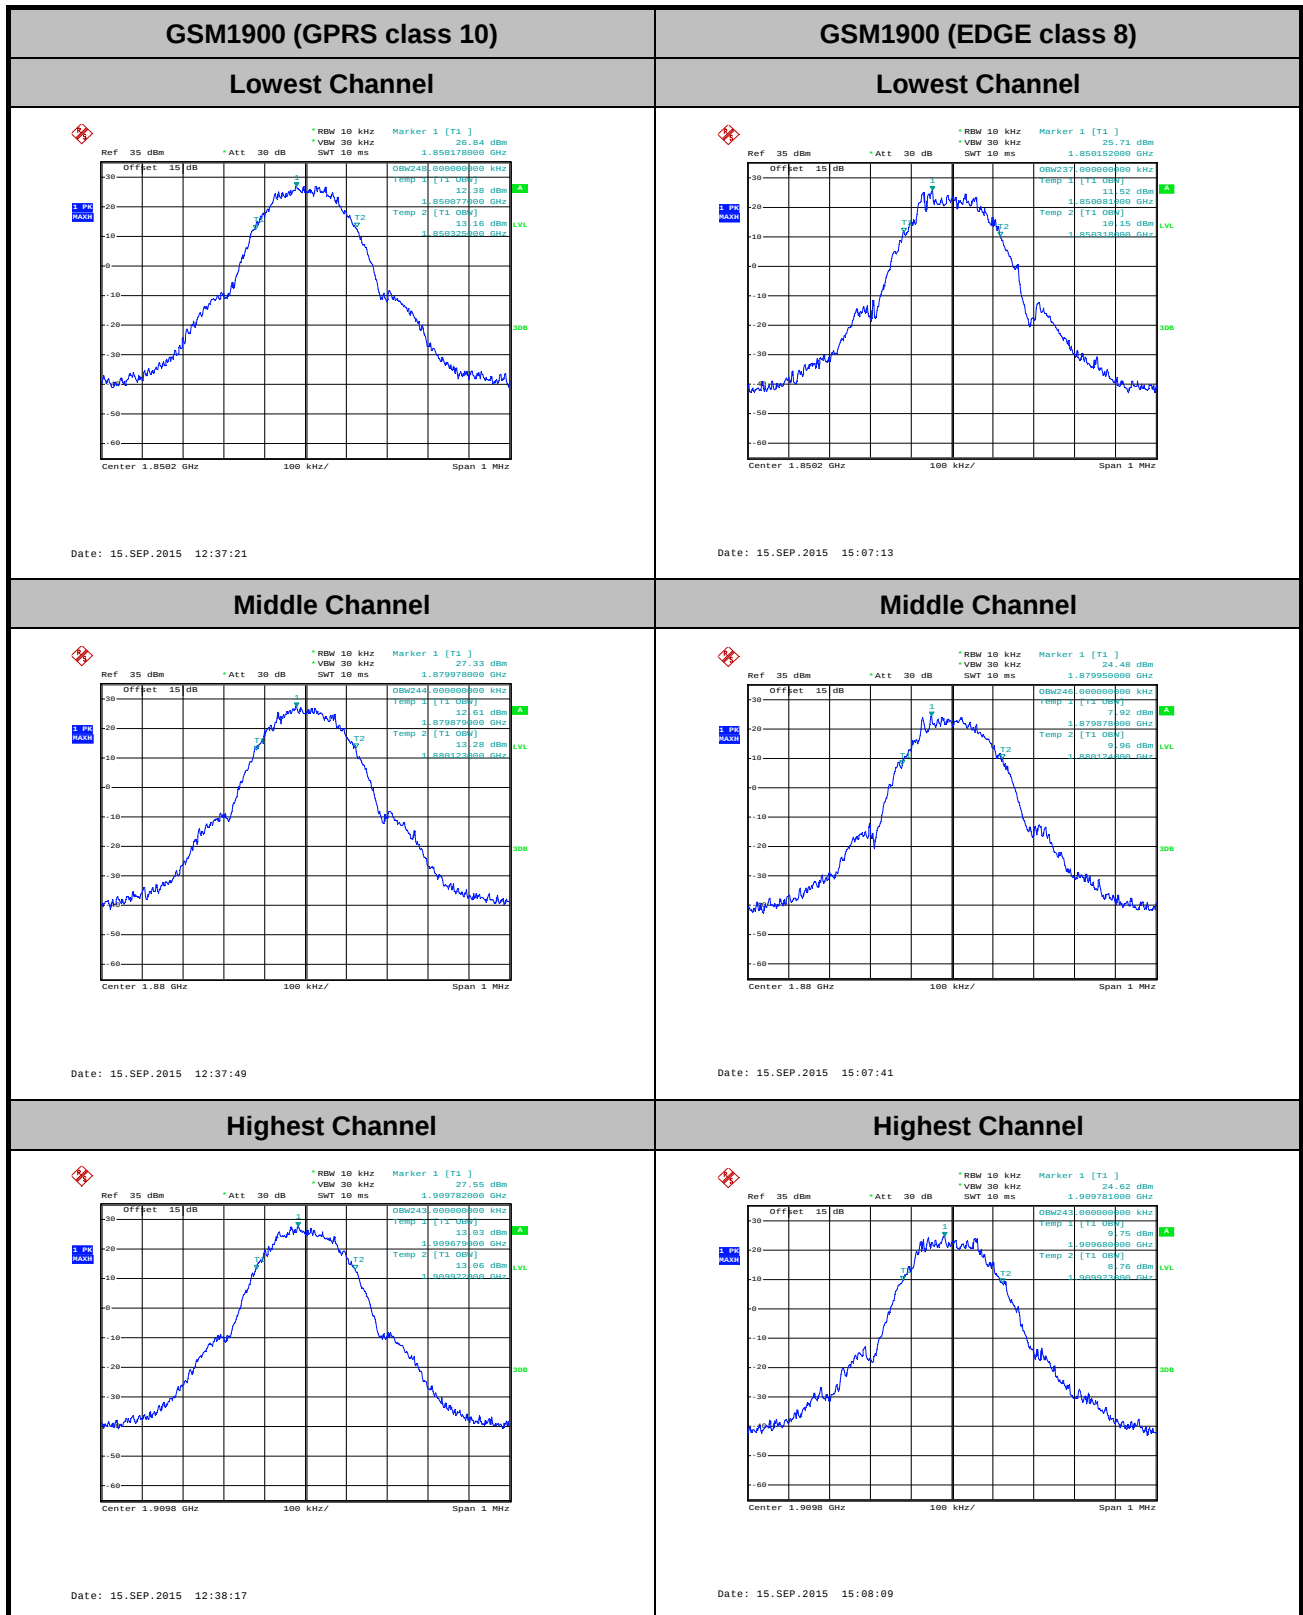



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

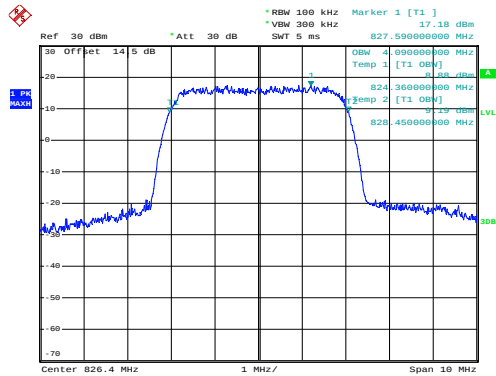

Date: 16.SEP.2015 11:09:20


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

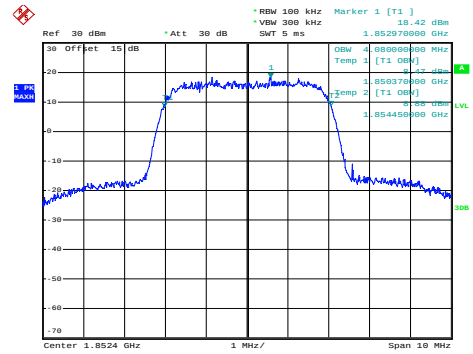


Date: 16.SEP.2015 11:27:35

Middle Channel

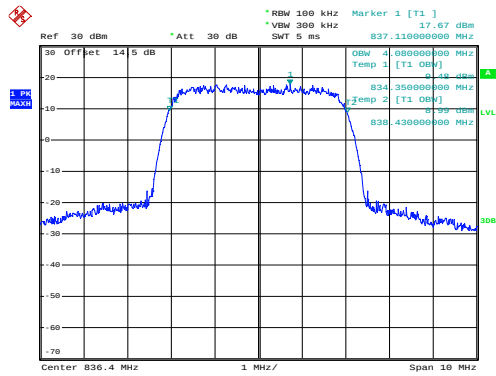


Date: 16.SEP.2015 11:09:48

Middle Channel

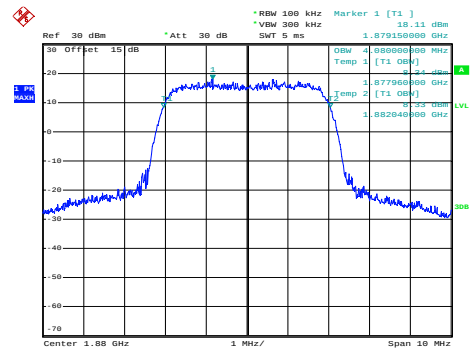


Date: 16.SEP.2015 11:28:03

Highest Channel

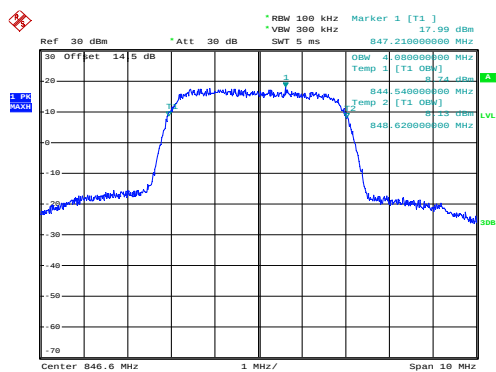

Date: 16.SEP.2015 11:10:16

Highest Channel

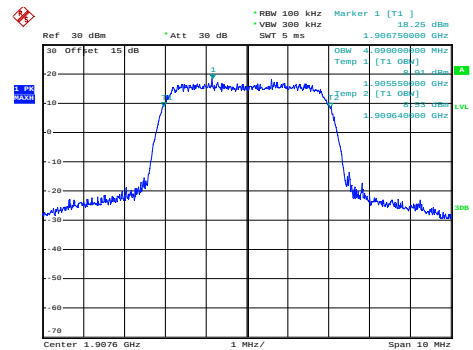


Date: 16.SEP.2015 11:28:31




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

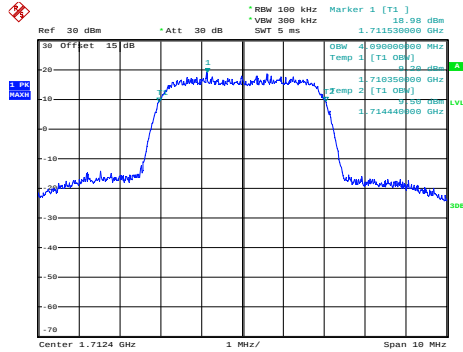


Date: 16.SEP.2015 11:41:01

Middle Channel

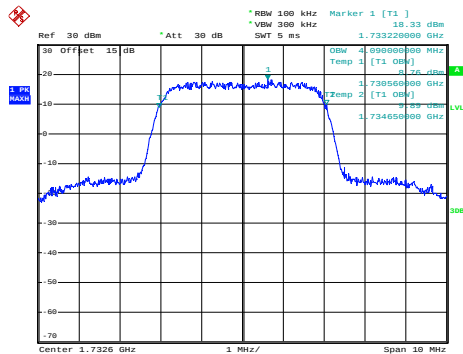


Date: 16.SEP.2015 11:41:29


Highest Channel

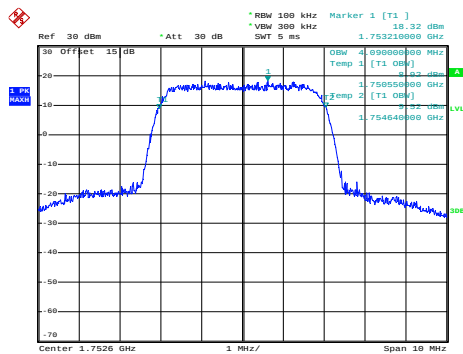


Date: 16.SEP.2015 11:41:57

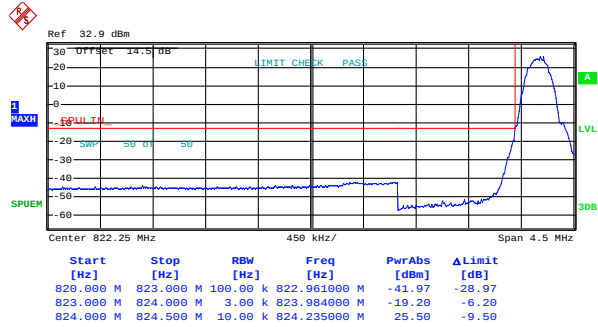**Conducted Band Edge****GSM850 (GPRS class 10)****Lowest Band Edge**


Date: 15.SEP.2015 11:49:52

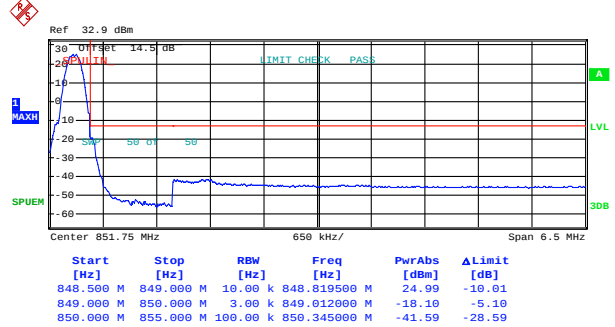Highest Band Edge

Date: 15.SEP.2015 11:51:19

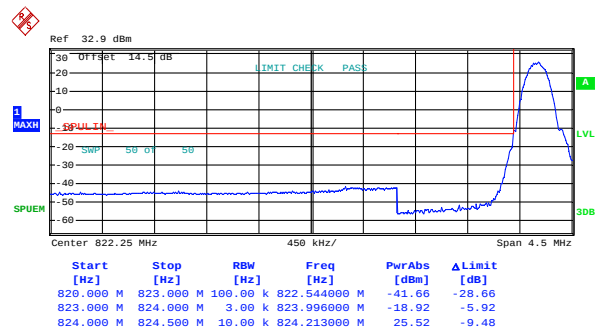GSM850 (EDGE class 8)**Lowest Band Edge**

Date: 15.SEP.2015 13:09:02

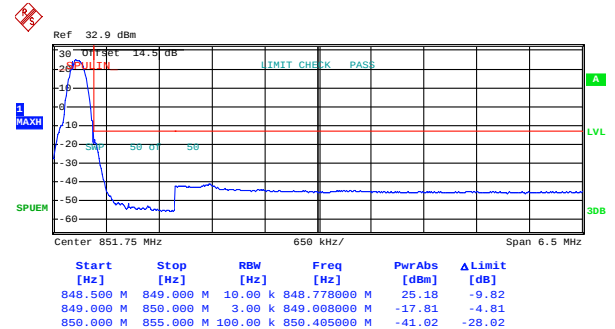
Highest Band Edge

Date: 15.SEP.2015 13:10:30




GSM1900 (GPRS class 10)

Lowest Band Edge

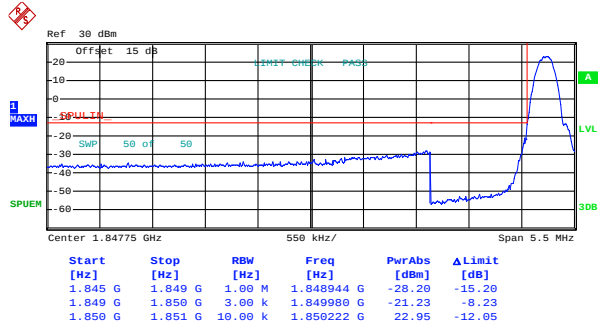

Date: 15.SEP.2015 12:40:50


Highest Band Edge

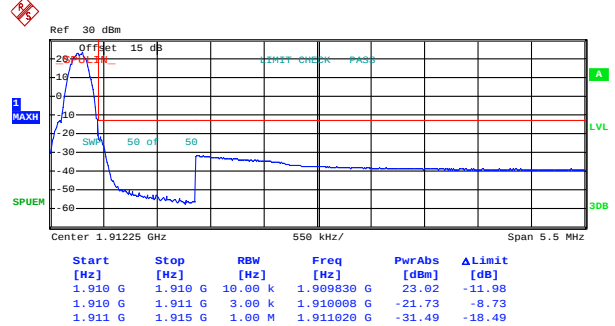

Date: 15.SEP.2015 12:42:17


GSM1900 (EDGE class 8)

Lowest Band Edge

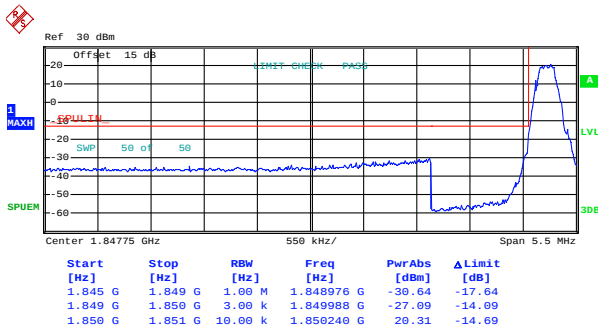

Date: 15.SEP.2015 15:10:13

Highest Band Edge

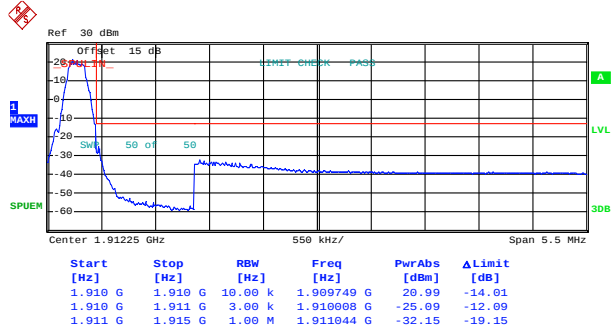


Date: 15.SEP.2015 15:11:40




WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

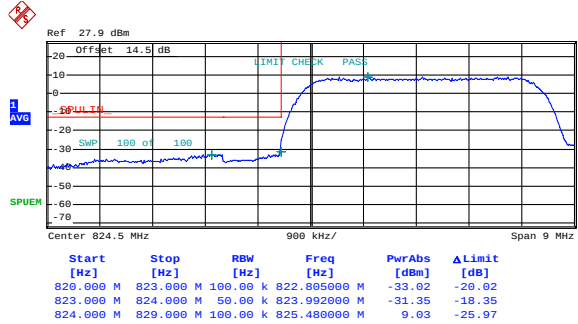

Date: 16.SEP.2015 12:50:17

Highest Band Edge

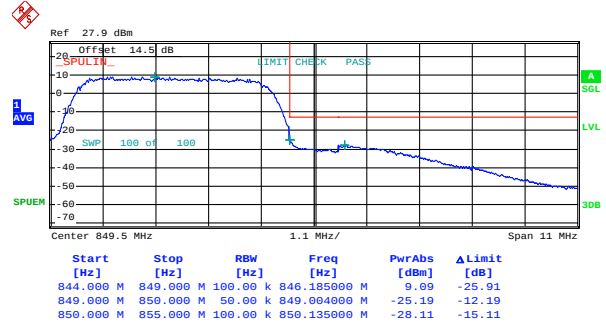


Date: 16.SEP.2015 12:53:36




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

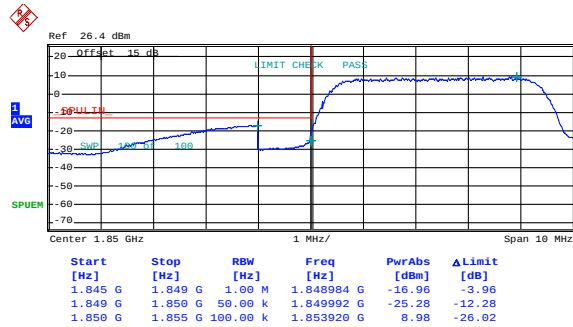

Date: 16.SEP.2015 12:31:50

Highest Band Edge

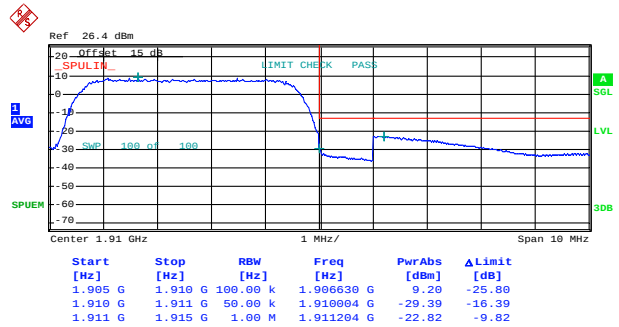


Date: 16.SEP.2015 12:38:26




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

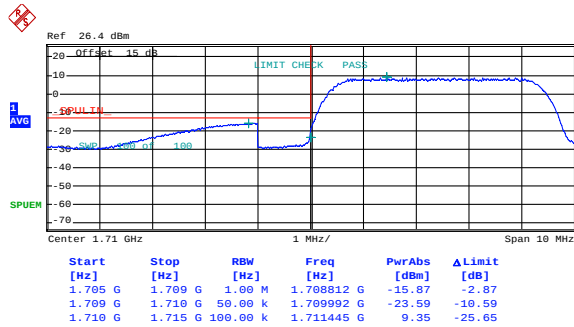

Date: 16.SEP.2015 12:27:32

Highest Band Edge

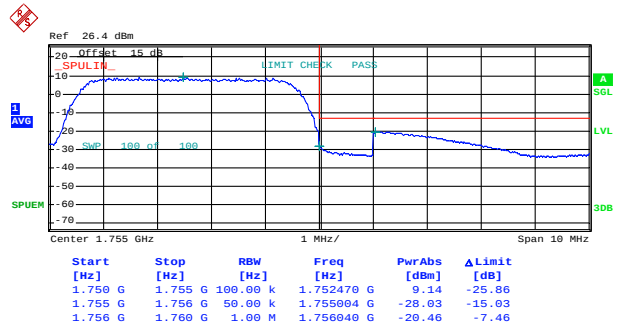

Date: 16.SEP.2015 11:59:59




Conducted Spurious Emission

GSM850 (GPRS class 10)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	



GSM1900 (GPRS class 10)


Lowest Channel

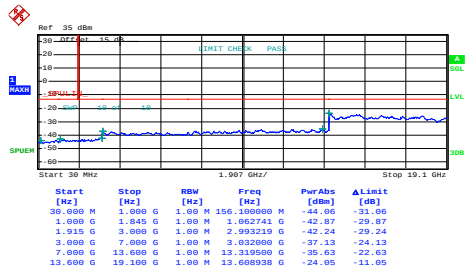

Date: 15.SEP.2015 12:46:10


GSM1900 (EDGE class 8)

Lowest Channel

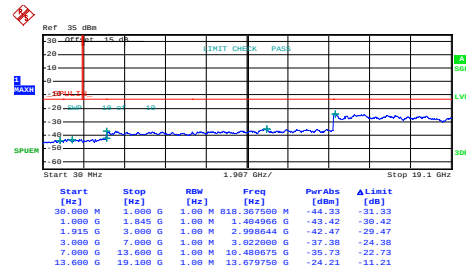


Date: 15.SEP.2015 15:13:49

Middle Channel

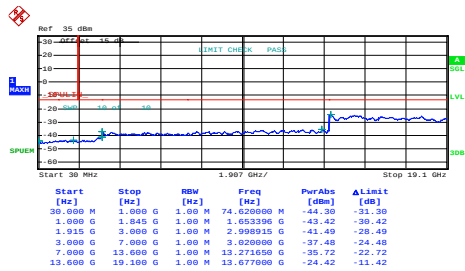


Date: 15.SEP.2015 12:46:40

Middle Channel

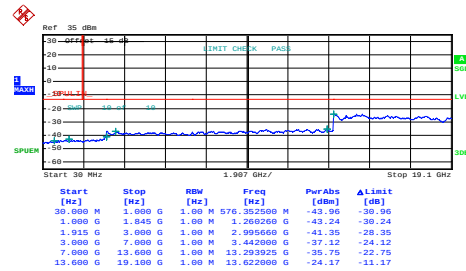


Date: 15.SEP.2015 15:14:19

Highest Channel

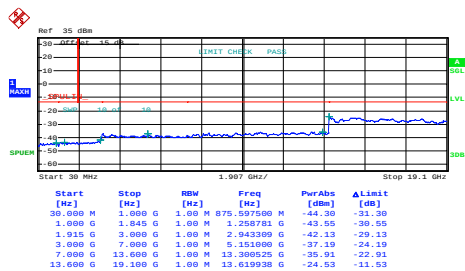

Date: 15.SEP.2015 12:47:10

Highest Channel

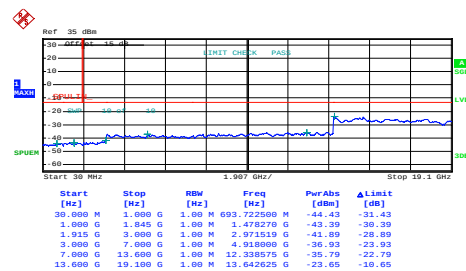


Date: 15.SEP.2015 15:14:49



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

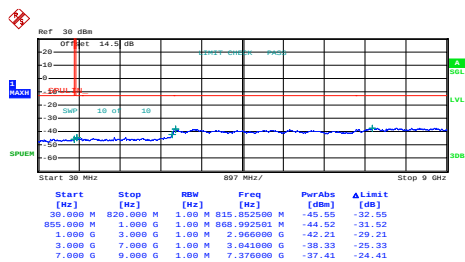

Date: 16.SEP.2015 11:15:19


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

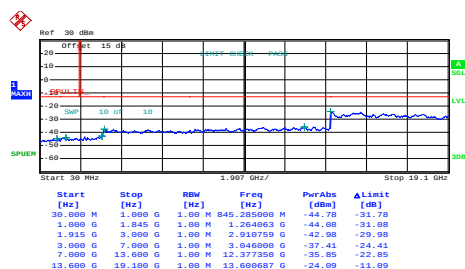


Date: 16.SEP.2015 11:33:32

Middle Channel

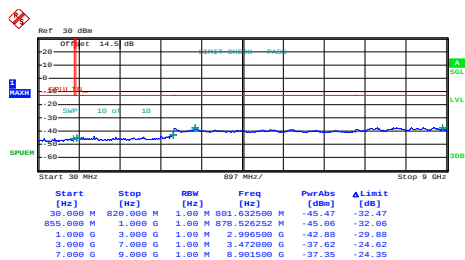


Date: 16.SEP.2015 11:15:48

Middle Channel

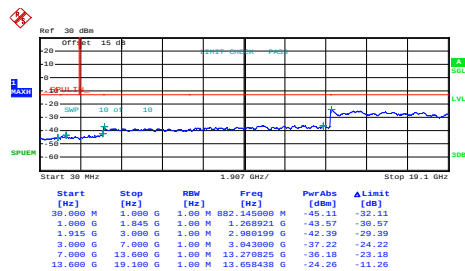


Date: 16.SEP.2015 11:34:01

Highest Channel

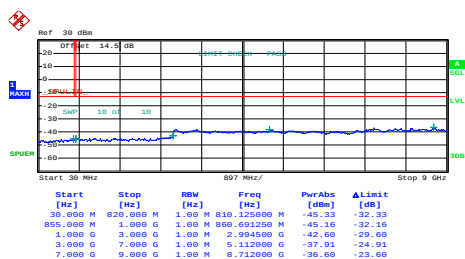

Date: 16.SEP.2015 11:16:18

Highest Channel

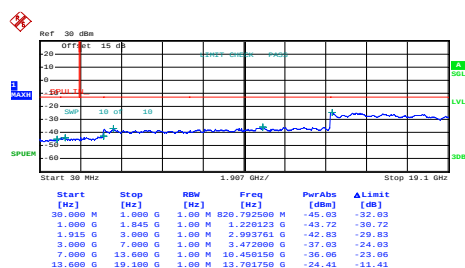


Date: 16.SEP.2015 11:34:31




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

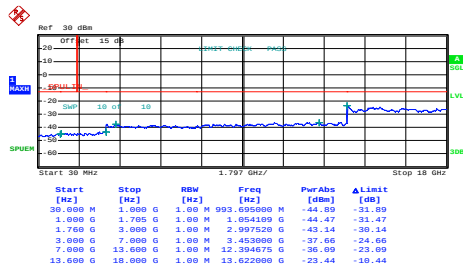


Date: 16.SEP.2015 11:47:01

Middle Channel

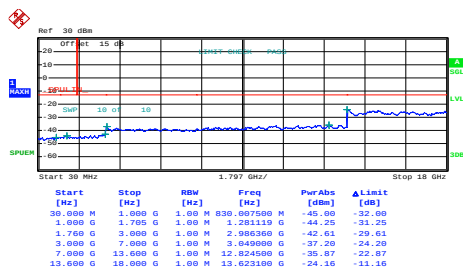

Date: 16.SEP.2015 11:47:30

Highest Channel

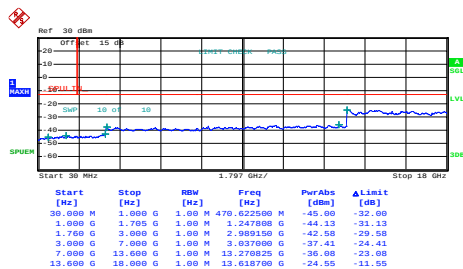

Date: 16.SEP.2015 11:48:00

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 10)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0096	0.0084	PASS
40	Normal Voltage	0.0048	0.0072	
30	Normal Voltage	0.0036	0.0024	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0024	0.0048	
0	Normal Voltage	0.0359	0.0072	
-10	Normal Voltage	0.0442	0.0132	
-20	Normal Voltage	0.0466	0.0155	
-30	Normal Voltage	0.0478	0.0179	
20	Maximum Voltage	0.0024	0.0024	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0012	0.0036	

Test Conditions	Middle Channel	GSM1900 (GPRS class 10)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0048	0.0048	PASS
40	Normal Voltage	0.0043	0.0043	
30	Normal Voltage	0.0027	0.0016	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0016	0.0021	
0	Normal Voltage	0.0053	0.0016	
-10	Normal Voltage	0.0069	0.0011	
-20	Normal Voltage	0.0085	0.0043	
-30	Normal Voltage	0.0090	0.0064	
20	Maximum Voltage	0.0021	0.0005	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0016	0.0005	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.3 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0048	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0036	
0	Normal Voltage	0.0299	
-10	Normal Voltage	0.0323	
-20	Normal Voltage	0.0335	
-30	Normal Voltage	0.0311	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0027	PASS
40	Normal Voltage	0.0021	
30	Normal Voltage	0.0011	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0005	
-10	Normal Voltage	0.0016	
-20	Normal Voltage	0.0027	
-30	Normal Voltage	0.0037	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0011	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.3 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0029	PASS
40	Normal Voltage	0.0006	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0006	
0	Normal Voltage	0.0029	
-10	Normal Voltage	0.0017	
-20	Normal Voltage	0.0035	
-30	Normal Voltage	0.0052	
20	Maximum Voltage	0.0017	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.3 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

ERP/EIRP

Channel	Mode	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 10	32.75	1.8857	29.44	0.8790
Middle		32.13	1.6329	29.19	0.8295
Highest		31.57	1.4352	28.78	0.7559
Lowest	GSM850 EDGE class 8	27.55	0.5695	23.29	0.2135
Middle		27.05	0.5070	22.85	0.1926
Highest		26.33	0.4297	22.20	0.1659
Lowest	WCDMA Band V RMC 12.2Kbps	23.70	0.2346	19.18	0.0828
Middle		23.38	0.2178	19.33	0.0858
Highest		22.92	0.1959	18.23	0.0665
Limit	ERP < 7W	Result		PASS	



Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 10	30.00	1.0000	17.49	0.0561
Middle		29.96	0.9919	14.90	0.0309
Highest		29.66	0.9240	12.79	0.0190
Lowest	GSM1900 EDGE class 8	26.09	0.4064	14.34	0.0272
Middle		26.05	0.4027	11.42	0.0139
Highest		26.09	0.4064	9.63	0.0092
Lowest	WCDMA Band II RMC 12.2Kbps	23.32	0.2147	12.08	0.0161
Middle		23.51	0.2244	8.68	0.0074
Highest		23.04	0.2015	7.36	0.0054
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Horizontal		Vertical	
		EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV RMC 12.2Kbps	22.32	0.1706	17.03	0.0505
Middle		22.87	0.1938	15.90	0.0389
Highest		22.70	0.1861	15.67	0.0369
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission**

GSM850 (GPRS class 10)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-39.97	-13	-26.97	-44.74	-43.79	0.53	6.50	H
	2510	-47.09	-13	-34.09	-53.34	-49.96	0.68	5.70	H
	3346	-53.68	-13	-40.68	-63.70	-58.72	0.81	8.00	H
	1672	-40.22	-13	-27.22	-46.17	-44.04	0.53	6.50	V
	2510	-50.47	-13	-37.47	-55.36	-53.34	0.68	5.70	V
	3346	-50.80	-13	-37.80	-59.81	-55.84	0.81	8.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-46.29	-13	-33.29	-50.44	-50.11	0.53	6.50	H
	2510	-53.80	-13	-40.80	-59.22	-56.67	0.68	5.70	H
	3346	-55.01	-13	-42.01	-65.03	-60.05	0.81	8.00	H
	1672	-40.60	-13	-27.60	-46.52	-44.42	0.53	6.50	V
	2510	-52.16	-13	-39.16	-56.75	-55.03	0.68	5.70	V
	3346	-51.64	-13	-38.64	-60.65	-56.68	0.81	8.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GPRS class 10)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-50.66	-13	-37.66	-63.43	-57.85	0.81	8.00	H
	5640	-49.32	-13	-36.32	-68.07	-59.31	1.01	11.00	H
	7520	-47.52	-13	-34.52	-69.69	-59.76	1.46	13.70	H
	3760	-47.66	-13	-34.66	-60.73	-54.85	0.81	8	V
	5640	-46.85	-13	-33.85	-65.91	-56.84	1.01	11	V
	7520	-47.20	-13	-34.20	-69.69	-59.44	1.46	13.7	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-53.85	-13	-40.85	-66.62	-61.04	0.81	8.00	H
	5640	-49.79	-13	-36.79	-68.54	-59.78	1.01	11.00	H
	7520	-47.63	-13	-34.63	-69.80	-59.87	1.46	13.70	H
	3760	-52.79	-13	-39.79	-65.86	-59.98	0.81	8	V
	5640	-49.73	-13	-36.73	-68.79	-59.72	1.01	11	V
	7520	-47.38	-13	-34.38	-69.87	-59.62	1.46	13.7	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-61.06	-13	-48.06	-63.61	-64.88	0.53	6.50	H
	2510	-59.00	-13	-46.00	-64.42	-61.87	0.68	5.70	H
	3346	-55.87	-13	-42.87	-65.89	-60.91	0.81	8.00	H
	1672	-60.87	-13	-47.87	-63.78	-64.69	0.53	6.50	V
	2510	-60.19	-13	-47.19	-64.51	-63.06	0.68	5.70	V
	3346	-57.31	-13	-44.31	-66.32	-62.35	0.81	8.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-52.53	-13	-39.53	-65.30	-59.72	0.81	8.00	H
	5640	-49.41	-13	-36.41	-68.16	-59.40	1.01	11.00	H
	7520	-46.45	-13	-33.45	-68.62	-58.69	1.46	13.70	H
	3760	-53.22	-13	-40.22	-66.29	-60.41	0.81	8	V
	5640	-48.80	-13	-35.80	-67.86	-58.79	1.01	11	V
	7520	-46.40	-13	-33.40	-68.89	-58.64	1.46	13.7	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465	-52.49	-13	-39.49	-65.32	-59.68	0.81	8.00	H
	5197.5	-47.39	-13	-34.39	-65.92	-56.44	0.95	10.00	H
	6930	-46.62	-13	-33.62	-67.96	-58.89	1.13	13.40	H
	3465	-51.63	-13	-38.63	-64.97	-63.42	0.81	12.6	V
	5197.5	-46.56	-13	-33.56	-65.19	-58.31	0.95	12.7	V
	6930	-46.88	-13	-33.88	-67.87	-57.45	1.13	11.7	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.