

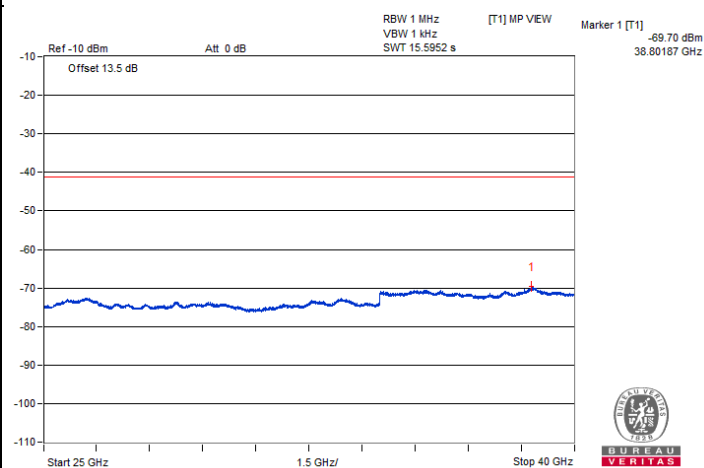
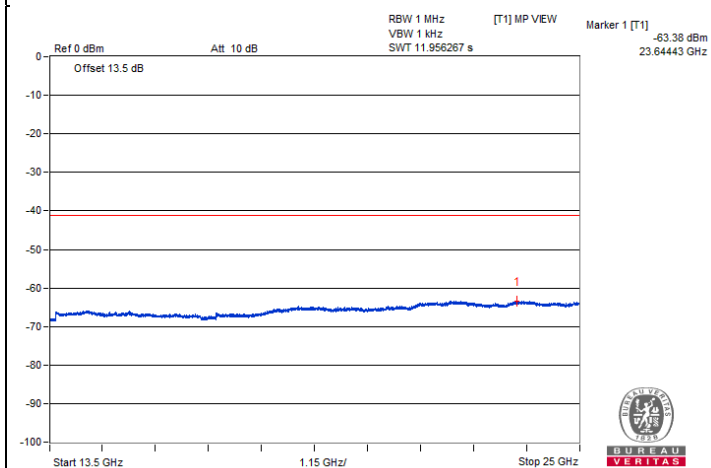
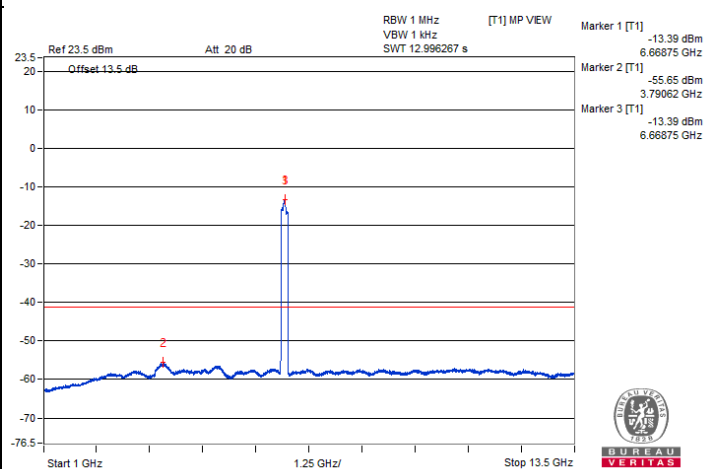
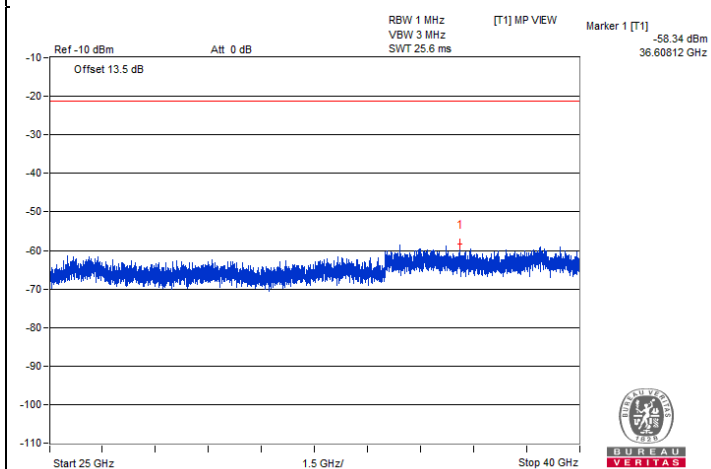
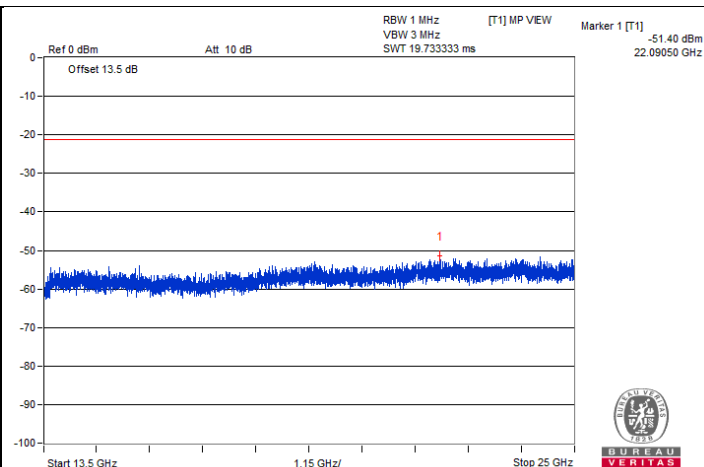


Chain 0

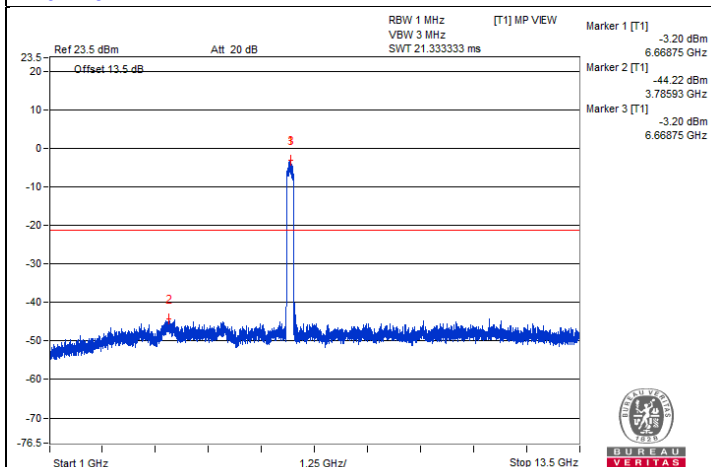

Chain 1

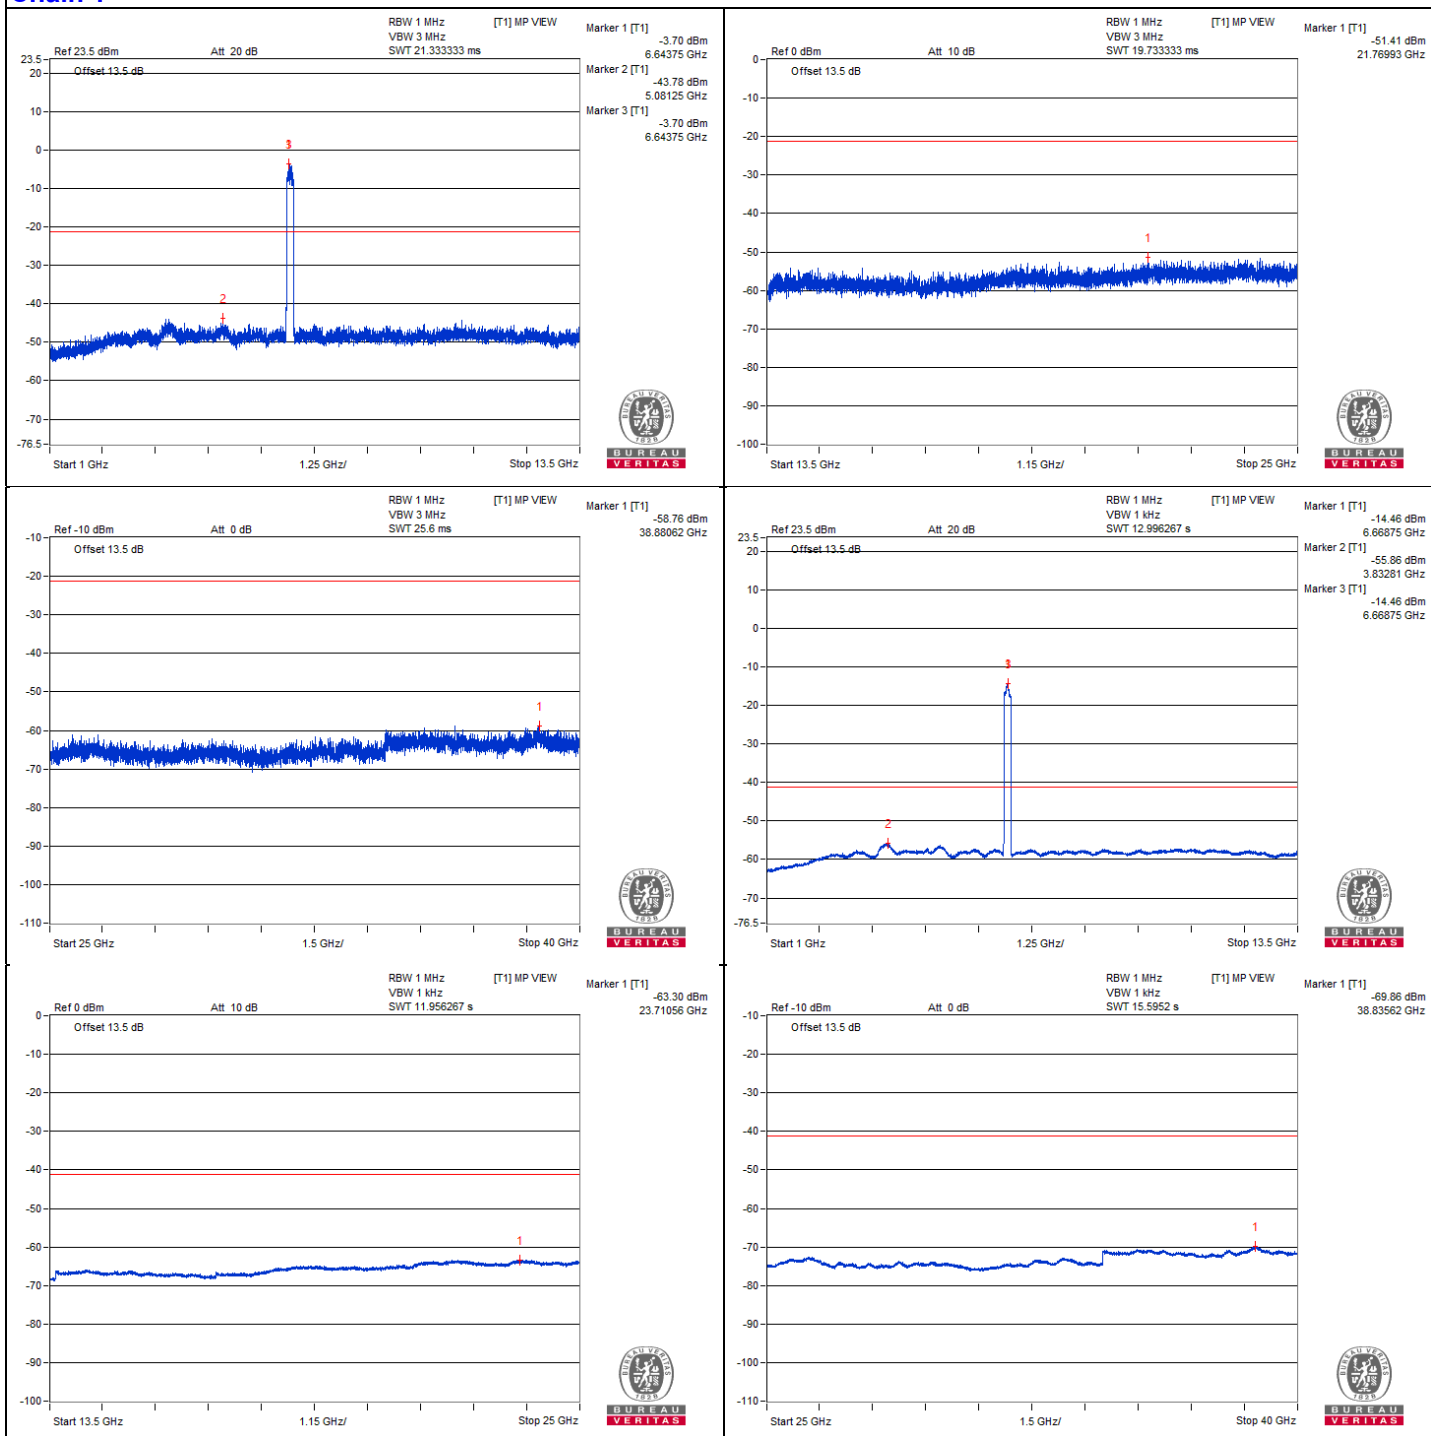

802.11be (EHT160) - Channel 175







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13640.87	49.25 PK	88.2	-38.95	-57.42	-56.98	8.17	-46.01
2	#13645.18	39.96 AV	68.2	-28.24	-66.29	-66.68	8.17	-55.30
3	20480.5	50.41 PK	74	-23.59	-58.02	-54.67	8.17	-44.85
4	20477.62	40.95 AV	54	-13.05	-65.58	-65.41	8.17	-54.31


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

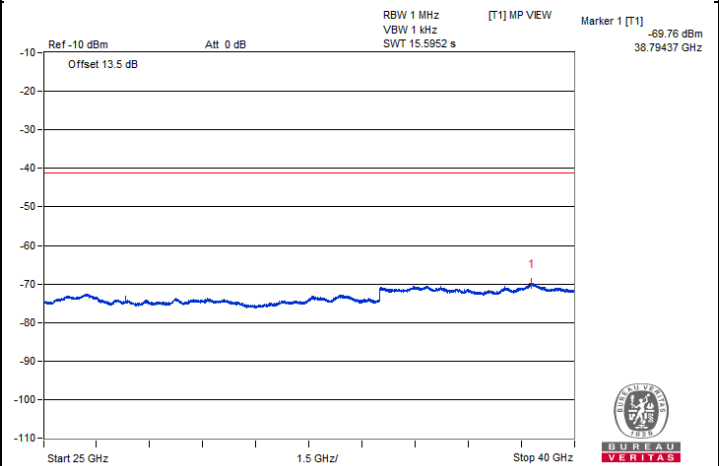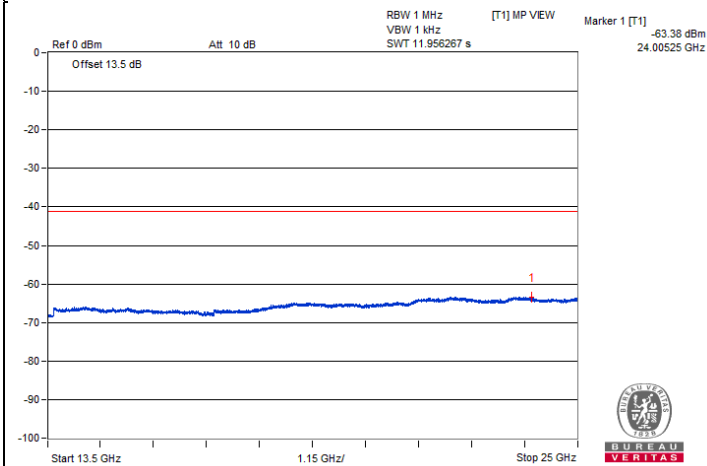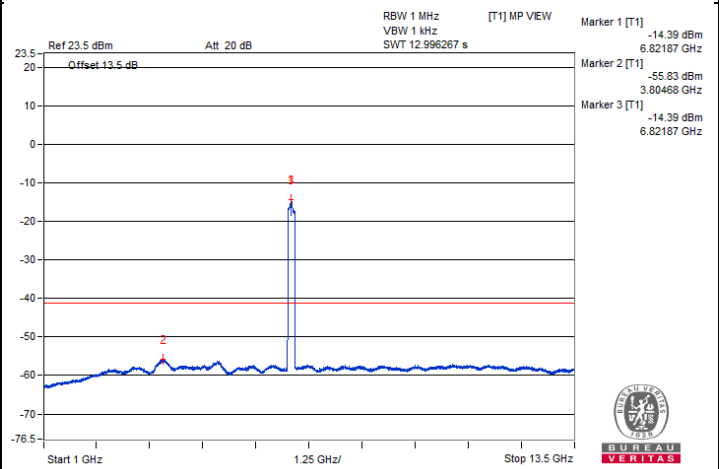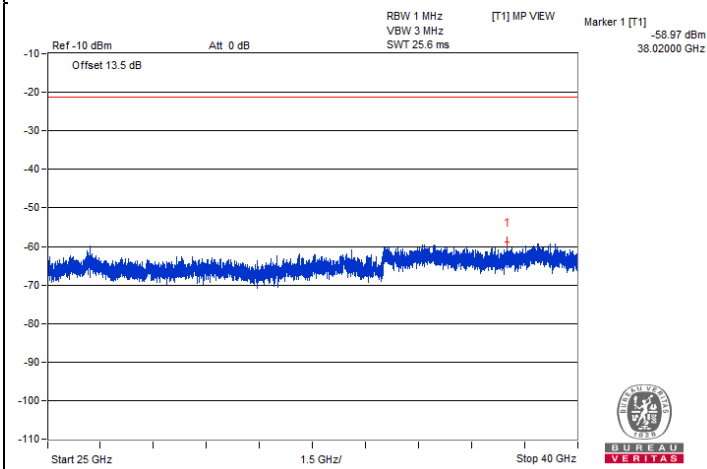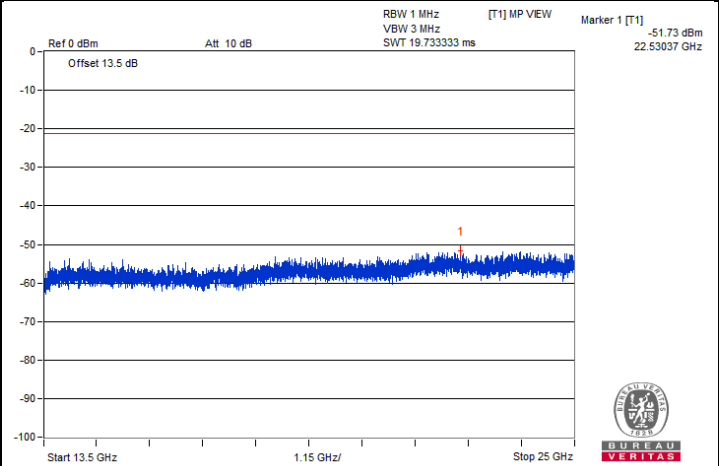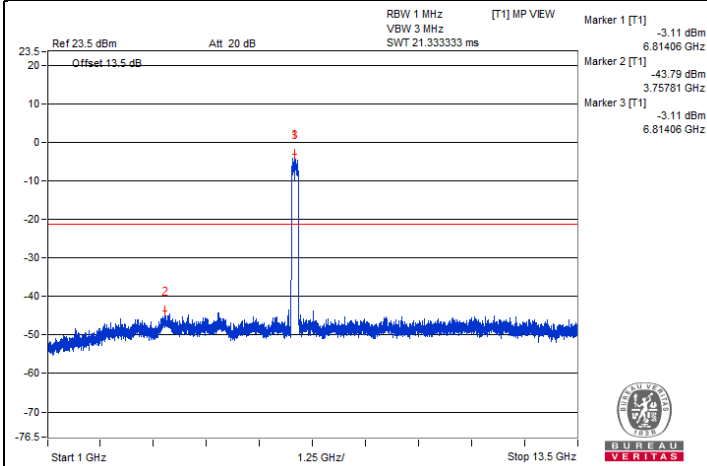

Chain 1

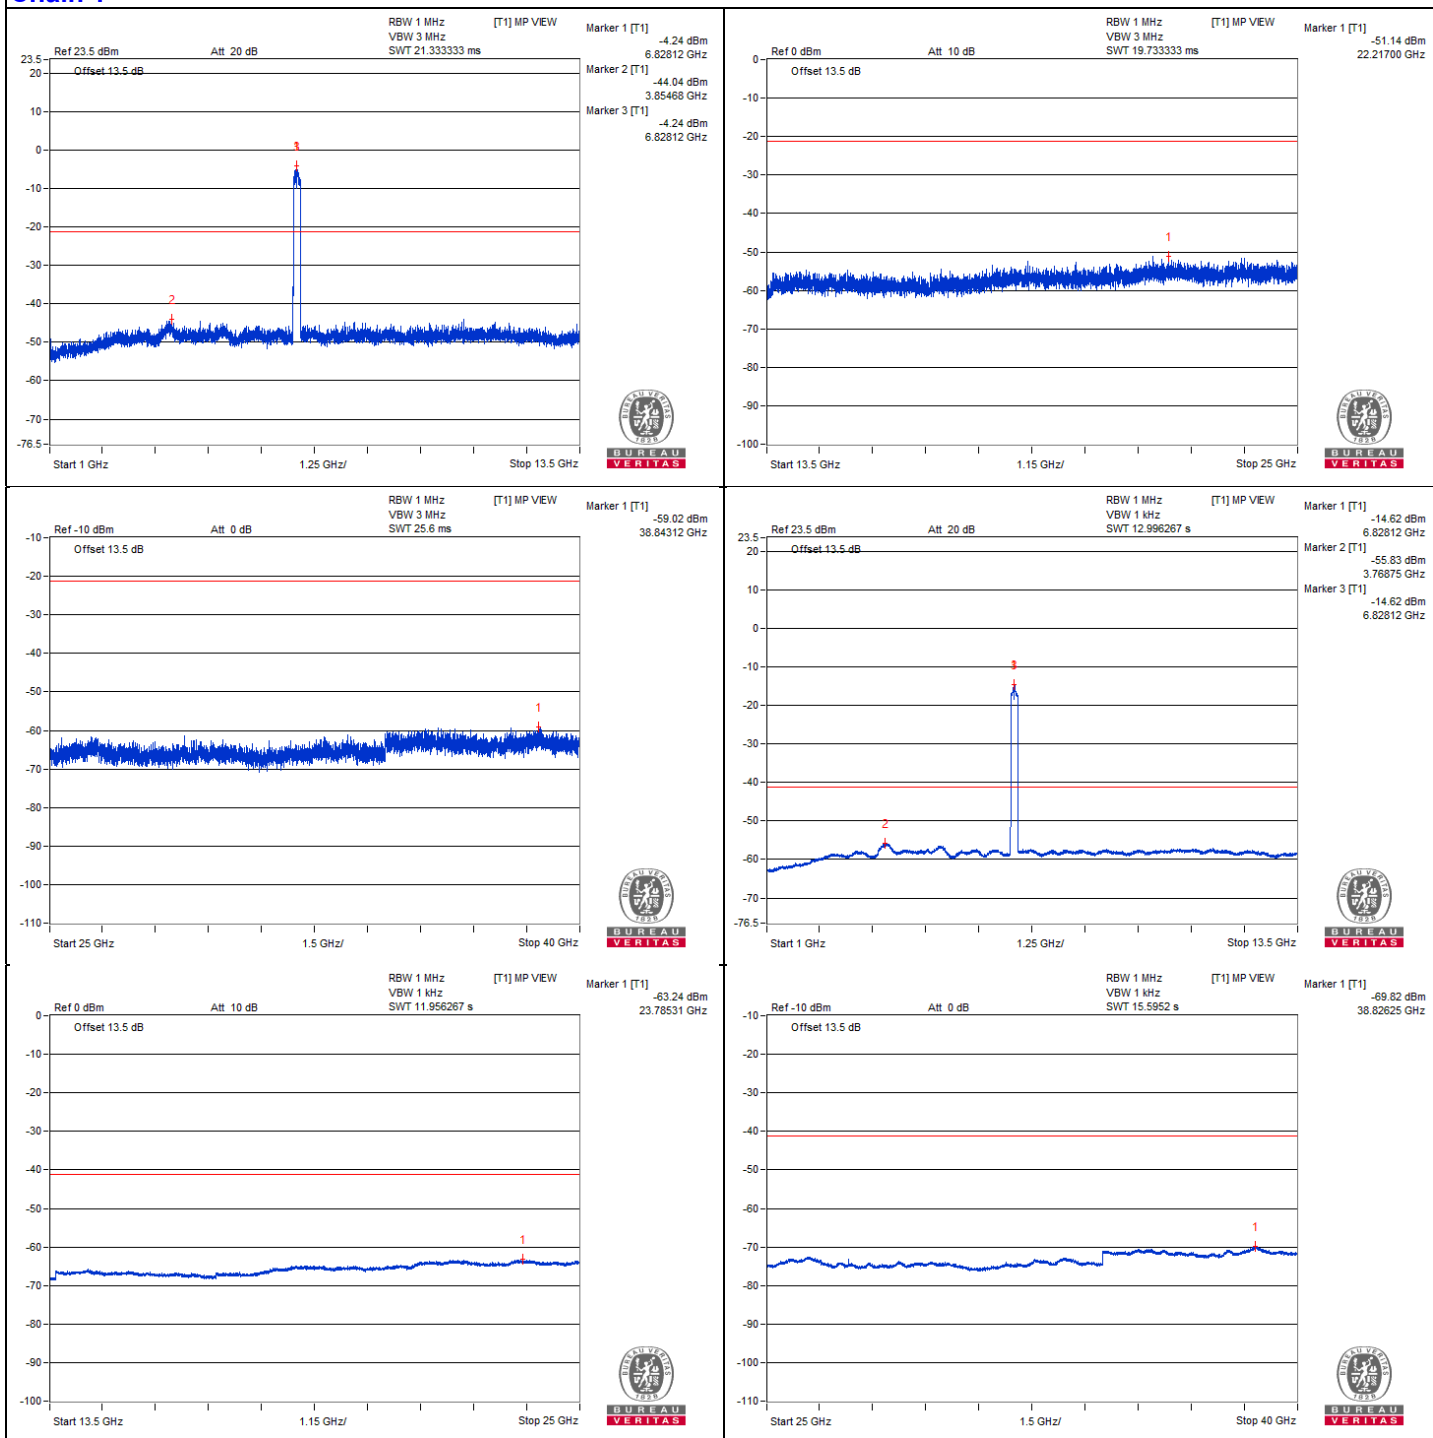

802.11be (EHT160) - Channel 207







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13971.5	49.3 PK	88.2	-38.9	-56.92	-57.37	8.17	-45.96
2	#13971.5	39.67 AV	68.2	-28.53	-66.94	-66.6	8.17	-55.59
3	20962.06	50.62 PK	74	-23.38	-55.88	-55.77	8.17	-44.64
4	20954.87	41.28 AV	54	-12.72	-65.26	-65.07	8.17	-53.98


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

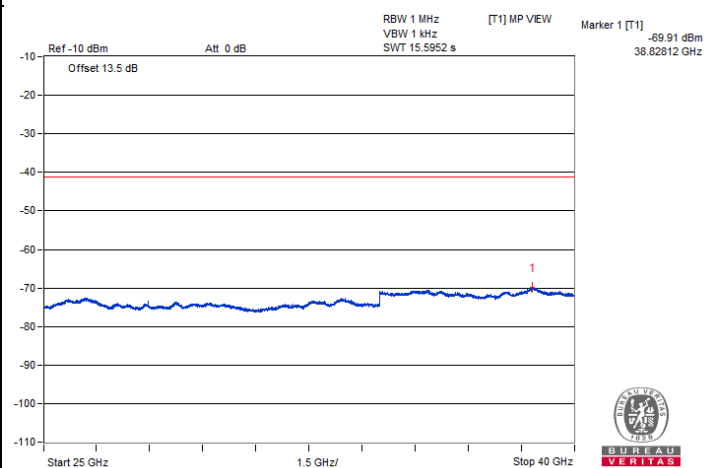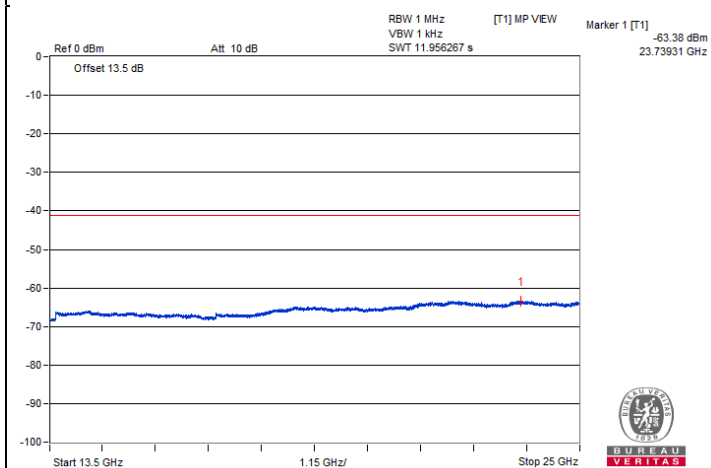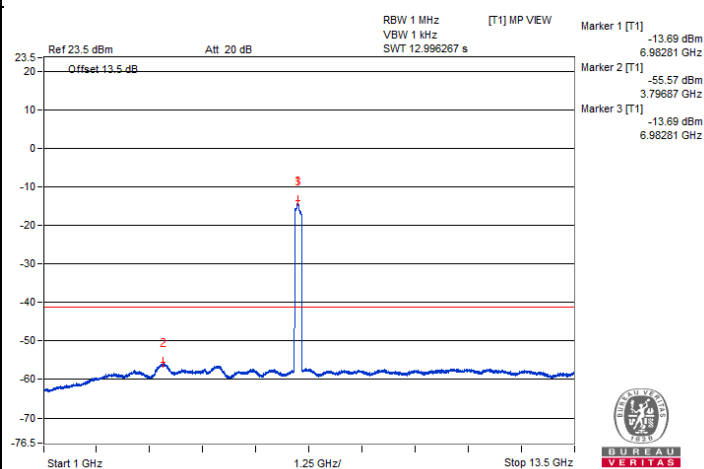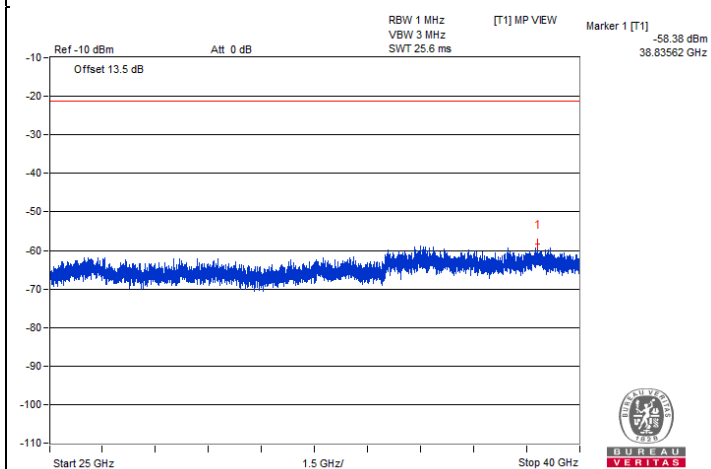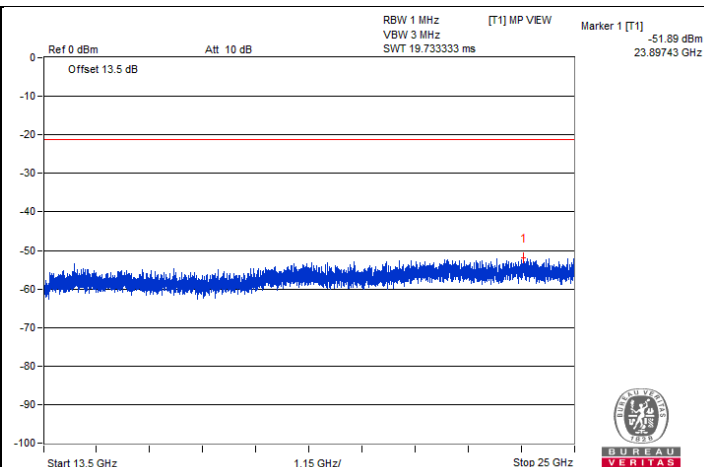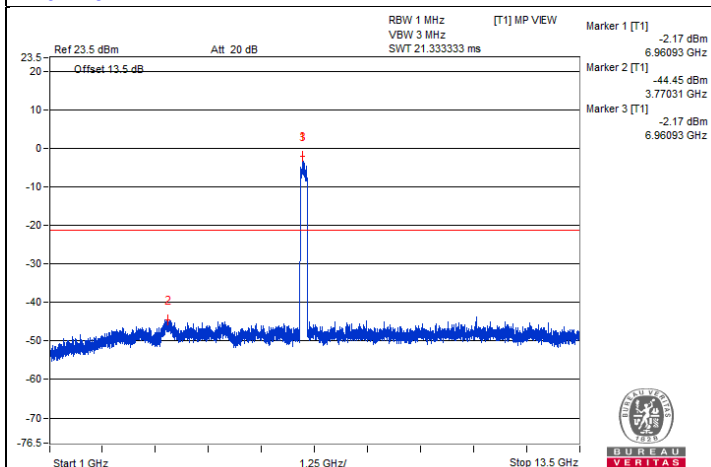

Chain 1

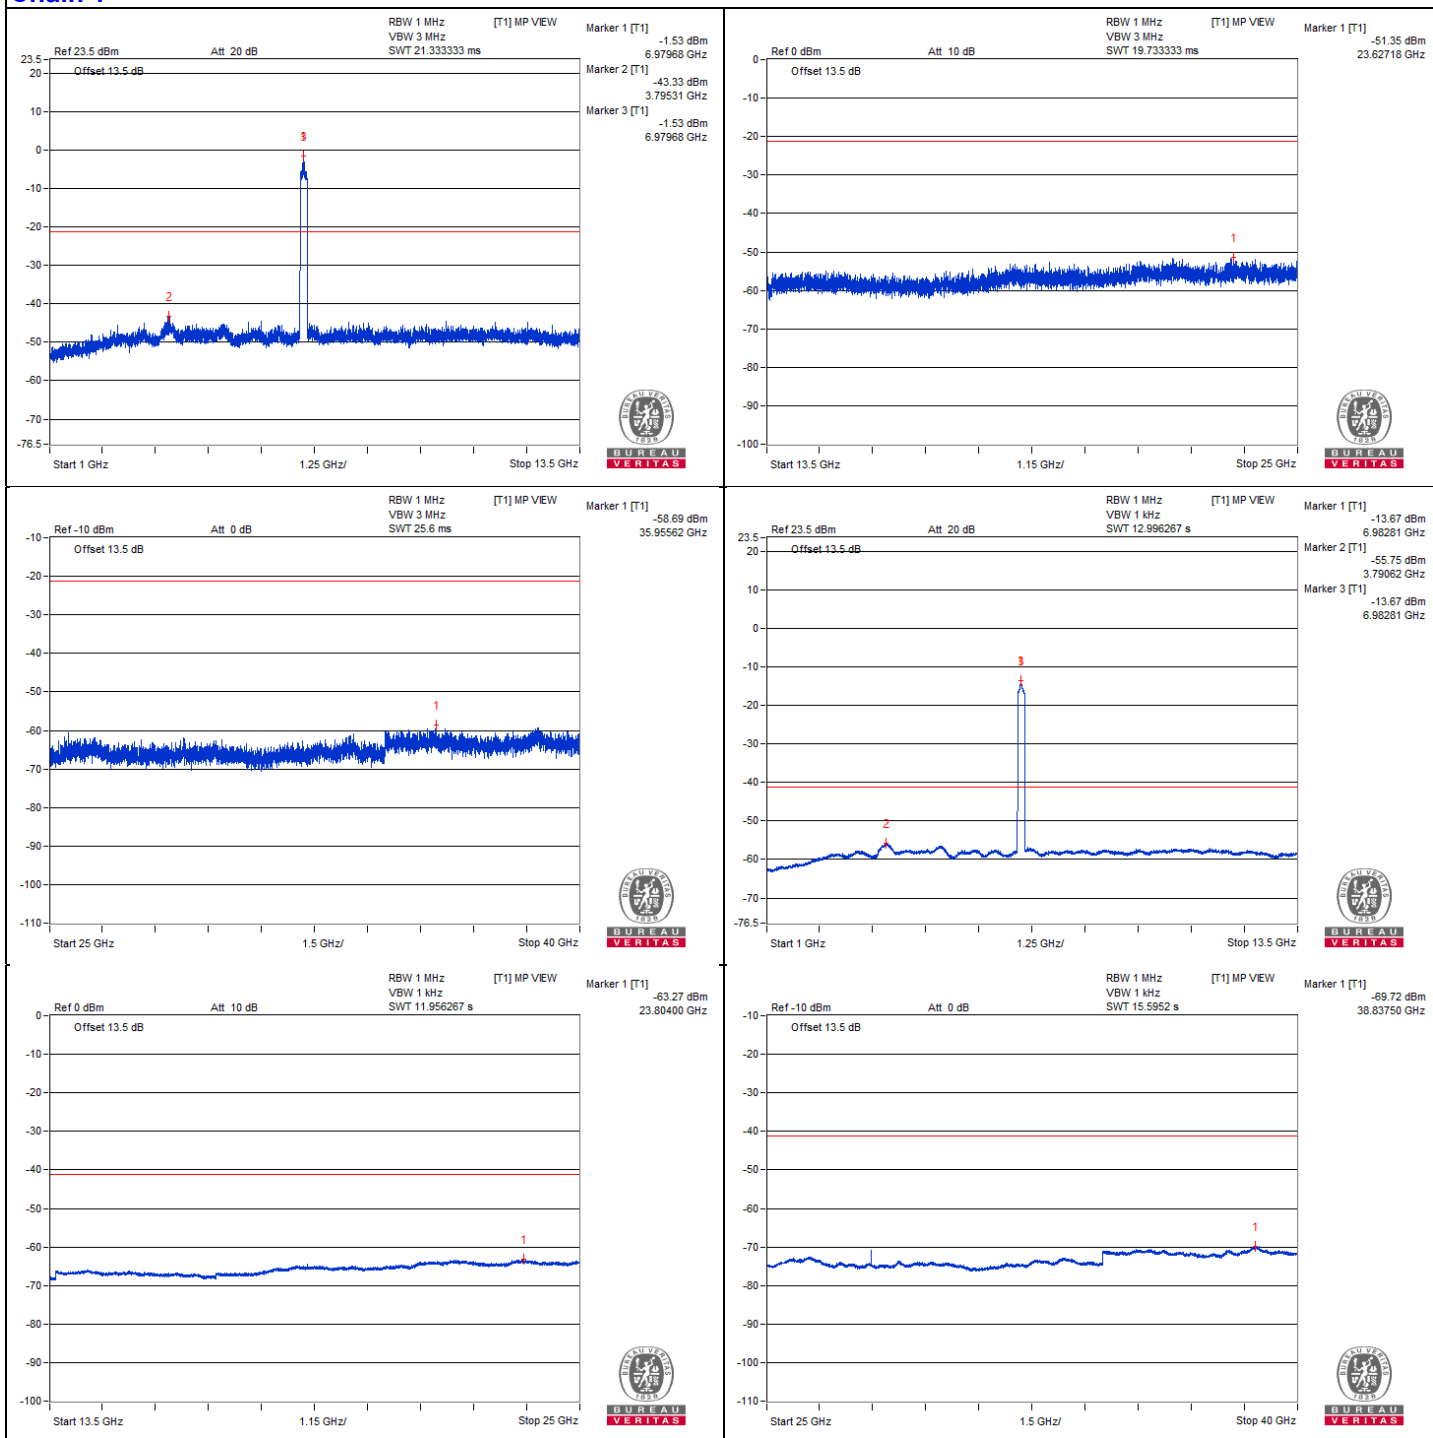


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7151.9	56.86 PK	88.2	-31.34	-46.95	-56.83	8.13	-38.40
2	#7138.37	41.2 AV	68.2	-27	-65.34	-65.06	8.13	-54.06


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

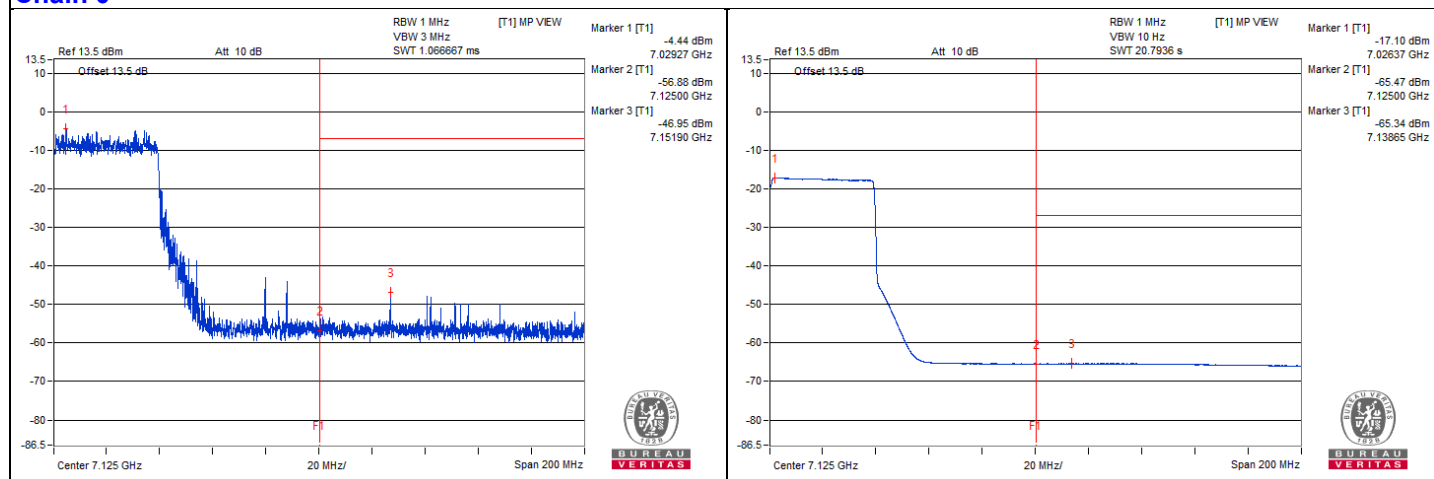

Chain 1

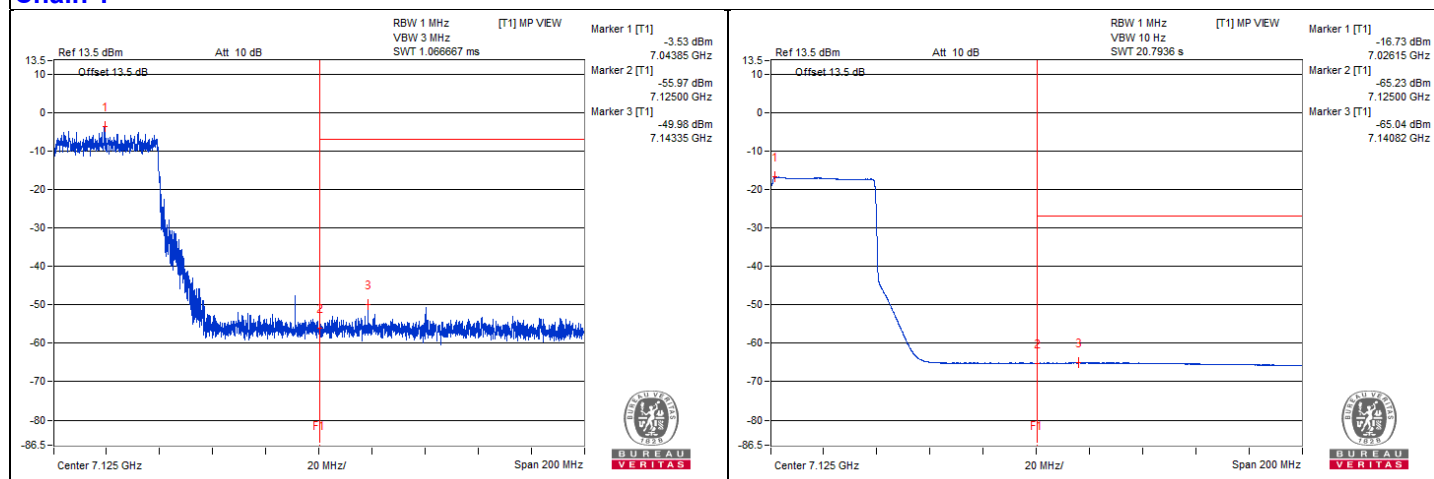

802.11be (EHT320) - Channel 31







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12203.12	57.9 PK	74	-16.1	-48	-49.16	8.17	-37.36
2	12214.06	48.16 AV	54	-5.84	-58.01	-58.57	8.17	-47.10
3	18309.87	50.42 PK	74	-23.58	-55.07	-57.25	8.17	-44.84
4	18312.75	40.44 AV	54	-13.56	-65.99	-66.02	8.17	-54.82


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

Chain 0

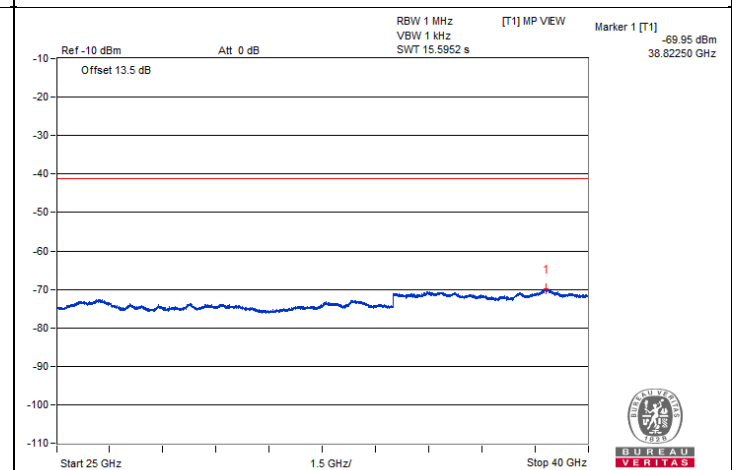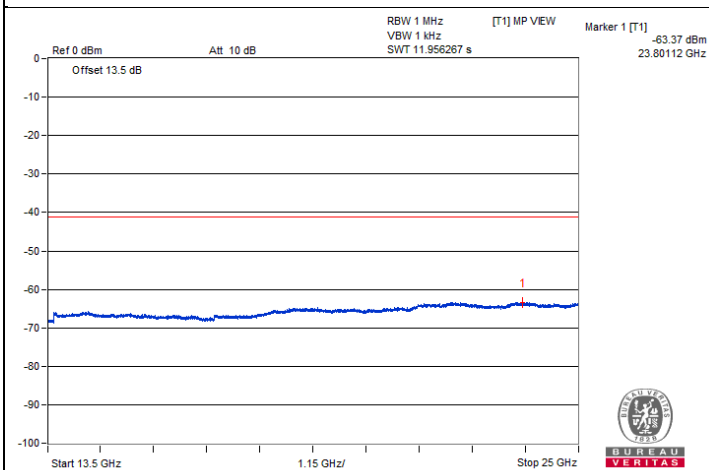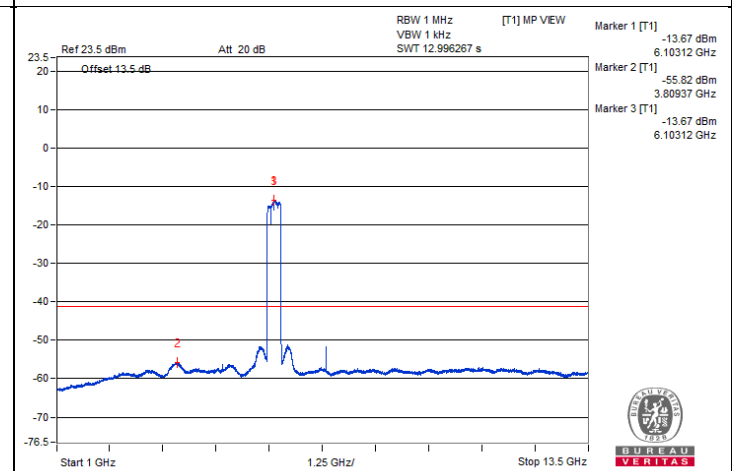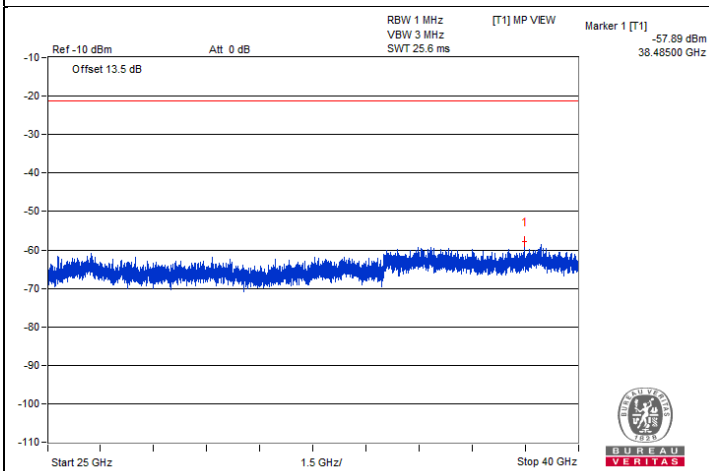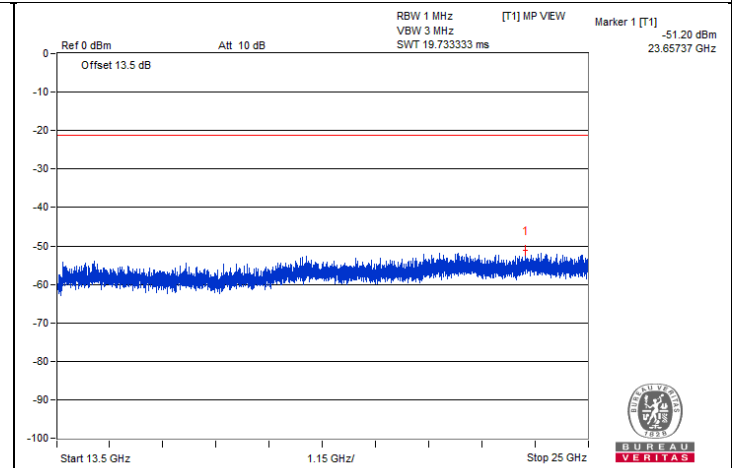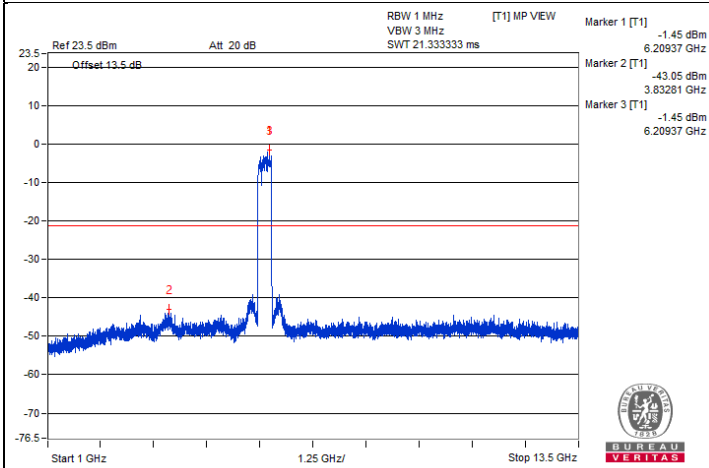

Chain 1

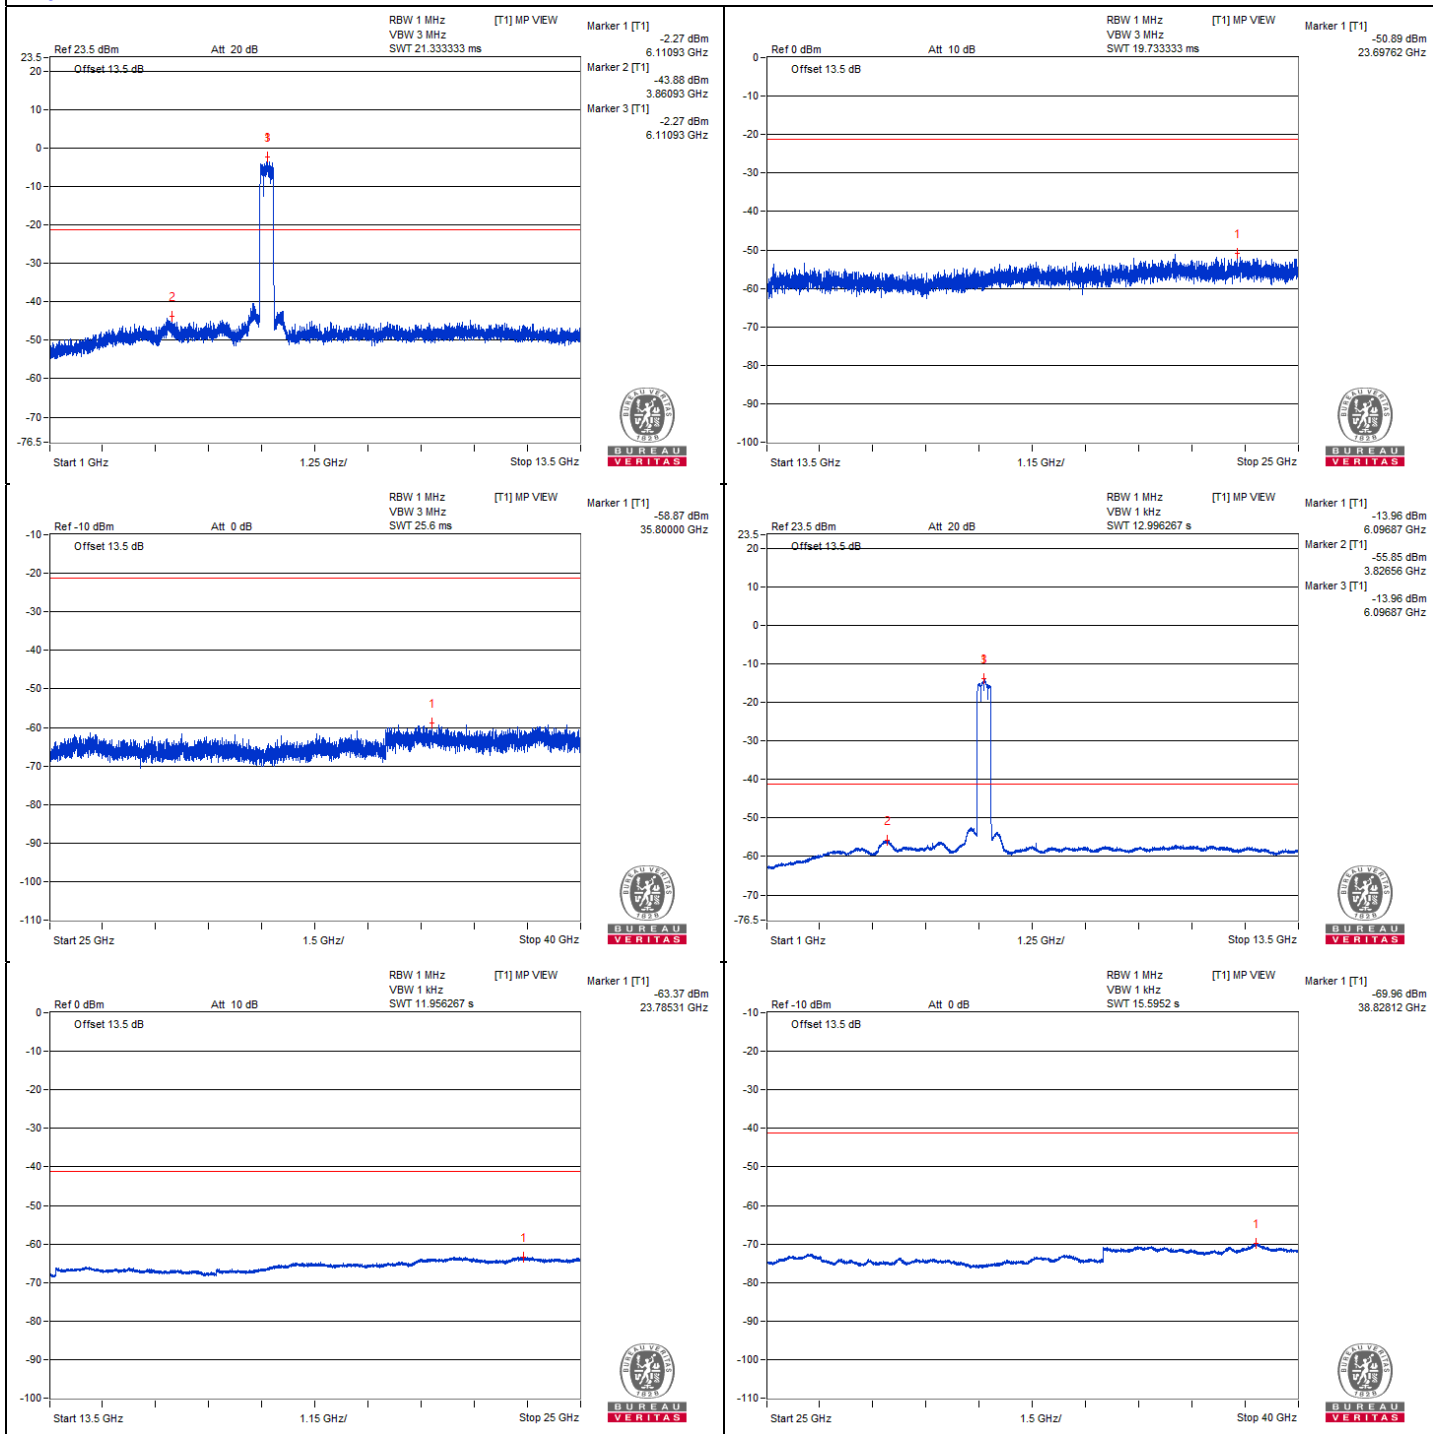


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5845.87	64.43 PK	88.2	-23.77	-41.07	-43.16	8.15	-30.83
2	#5828.52	51.59 AV	68.2	-16.61	-54.2	-55.57	8.15	-43.67


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

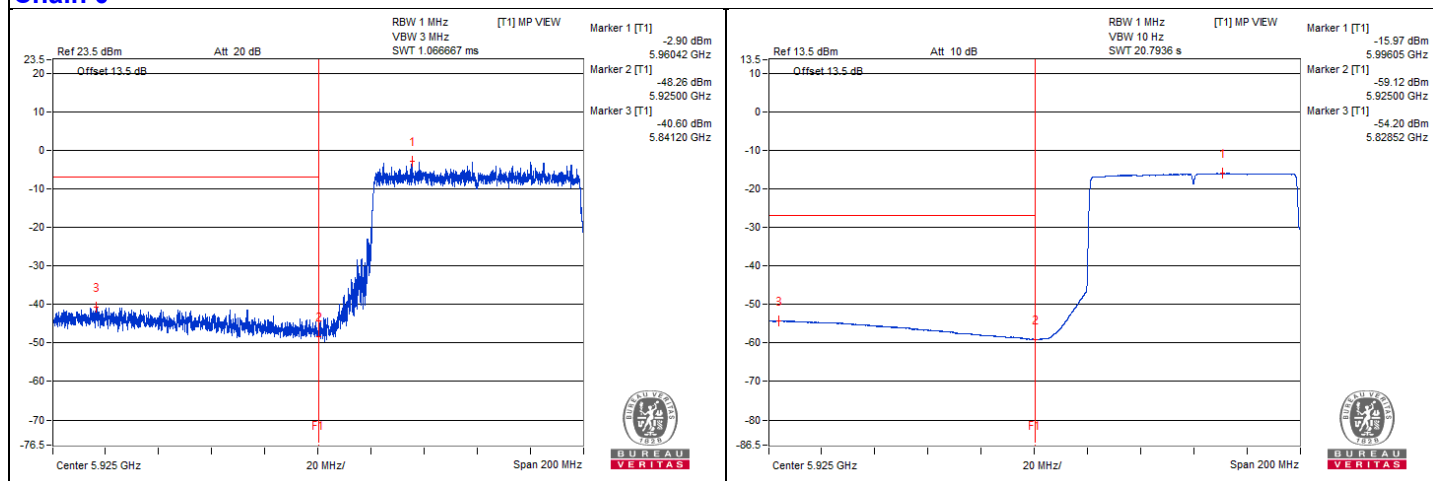

Chain 1

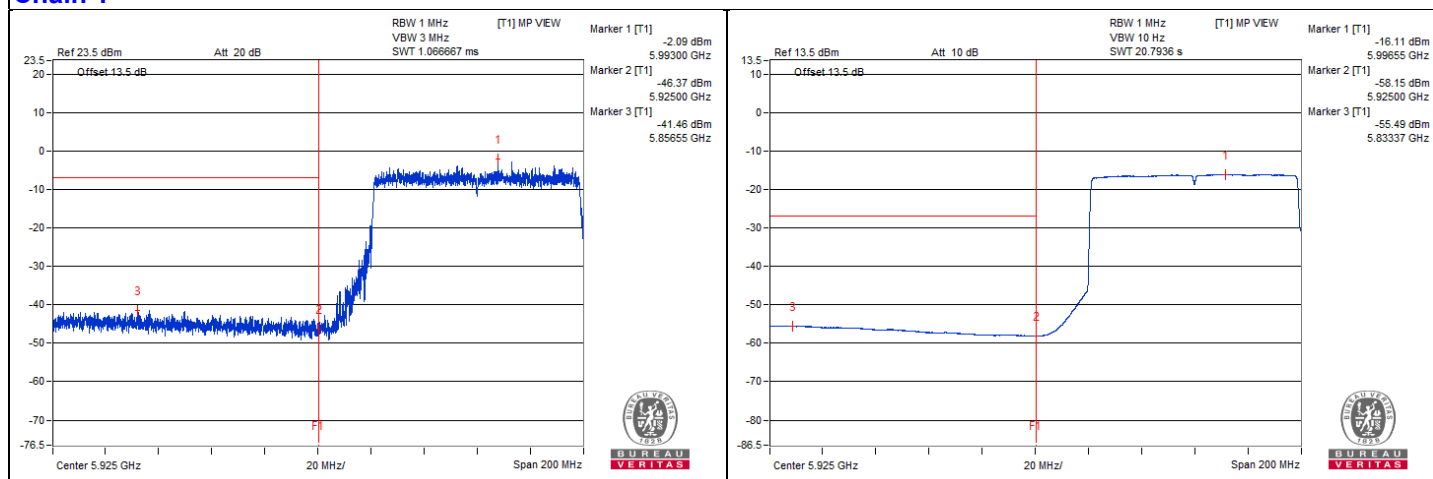

802.11be (EHT320) - Channel 63







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12520.31	59.32 PK	74	-14.68	-48.27	-46.21	8.17	-35.94
2	12521.87	48.17 AV	54	-5.83	-58.19	-58.35	8.17	-47.09
3	18800.06	51.22 PK	74	-22.78	-55.42	-55.02	8.17	-44.04
4	18802.93	41.25 AV	54	-12.75	-65.1	-65.28	8.17	-54.01


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

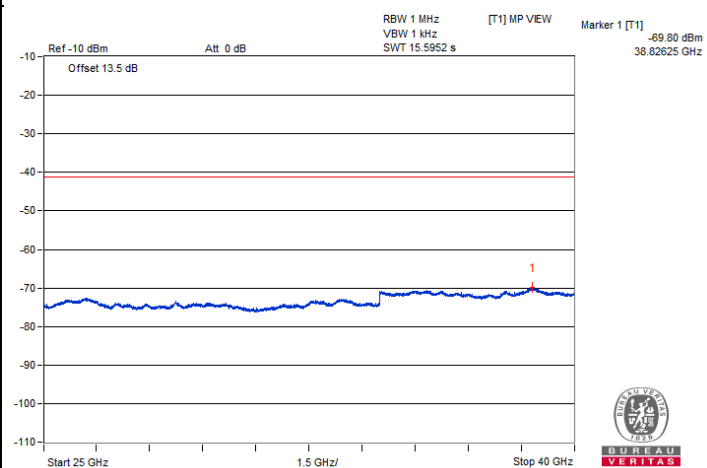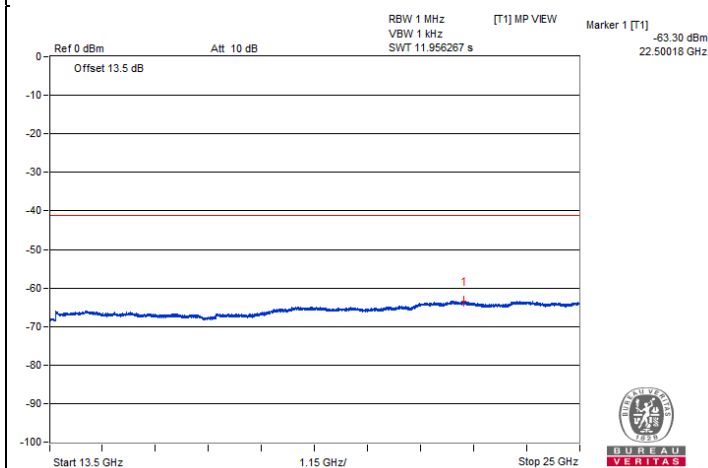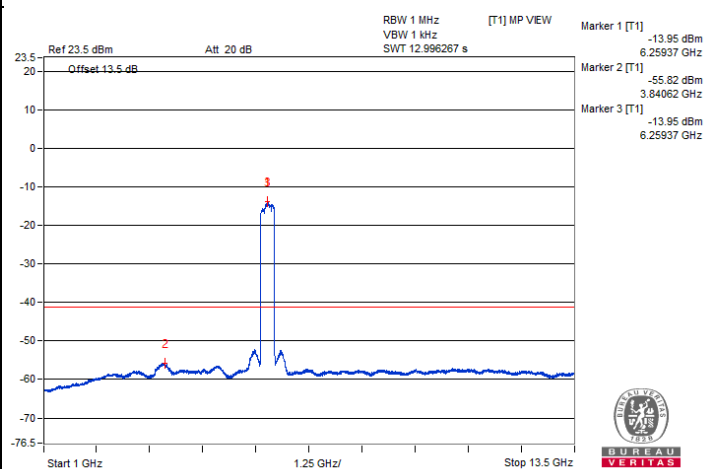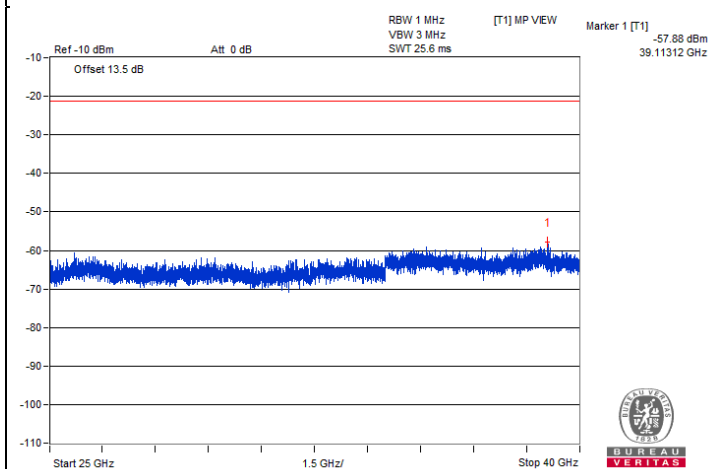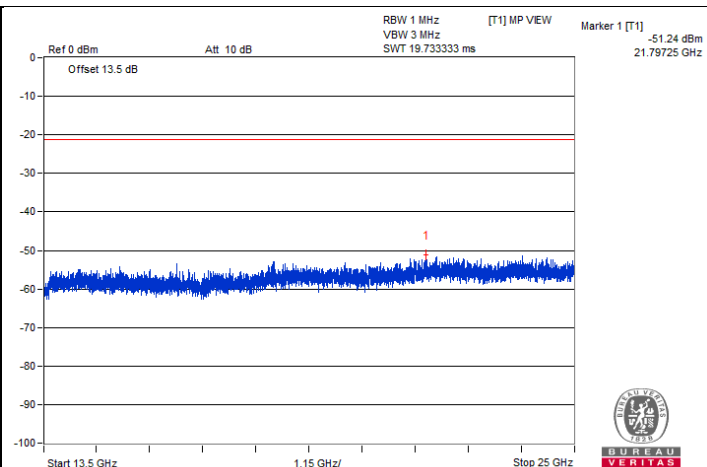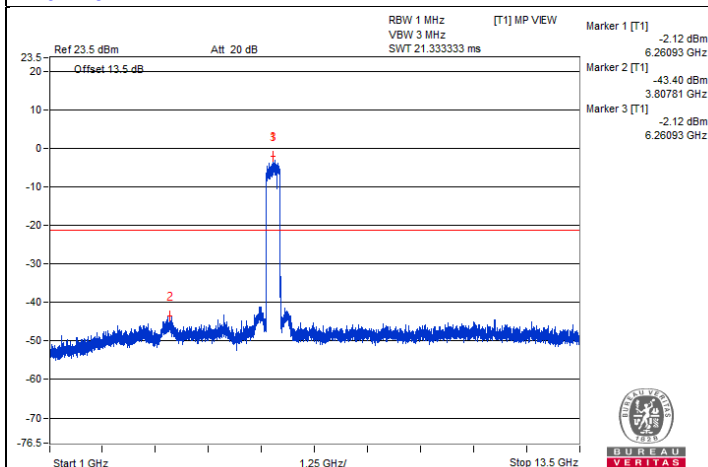

Chain 1

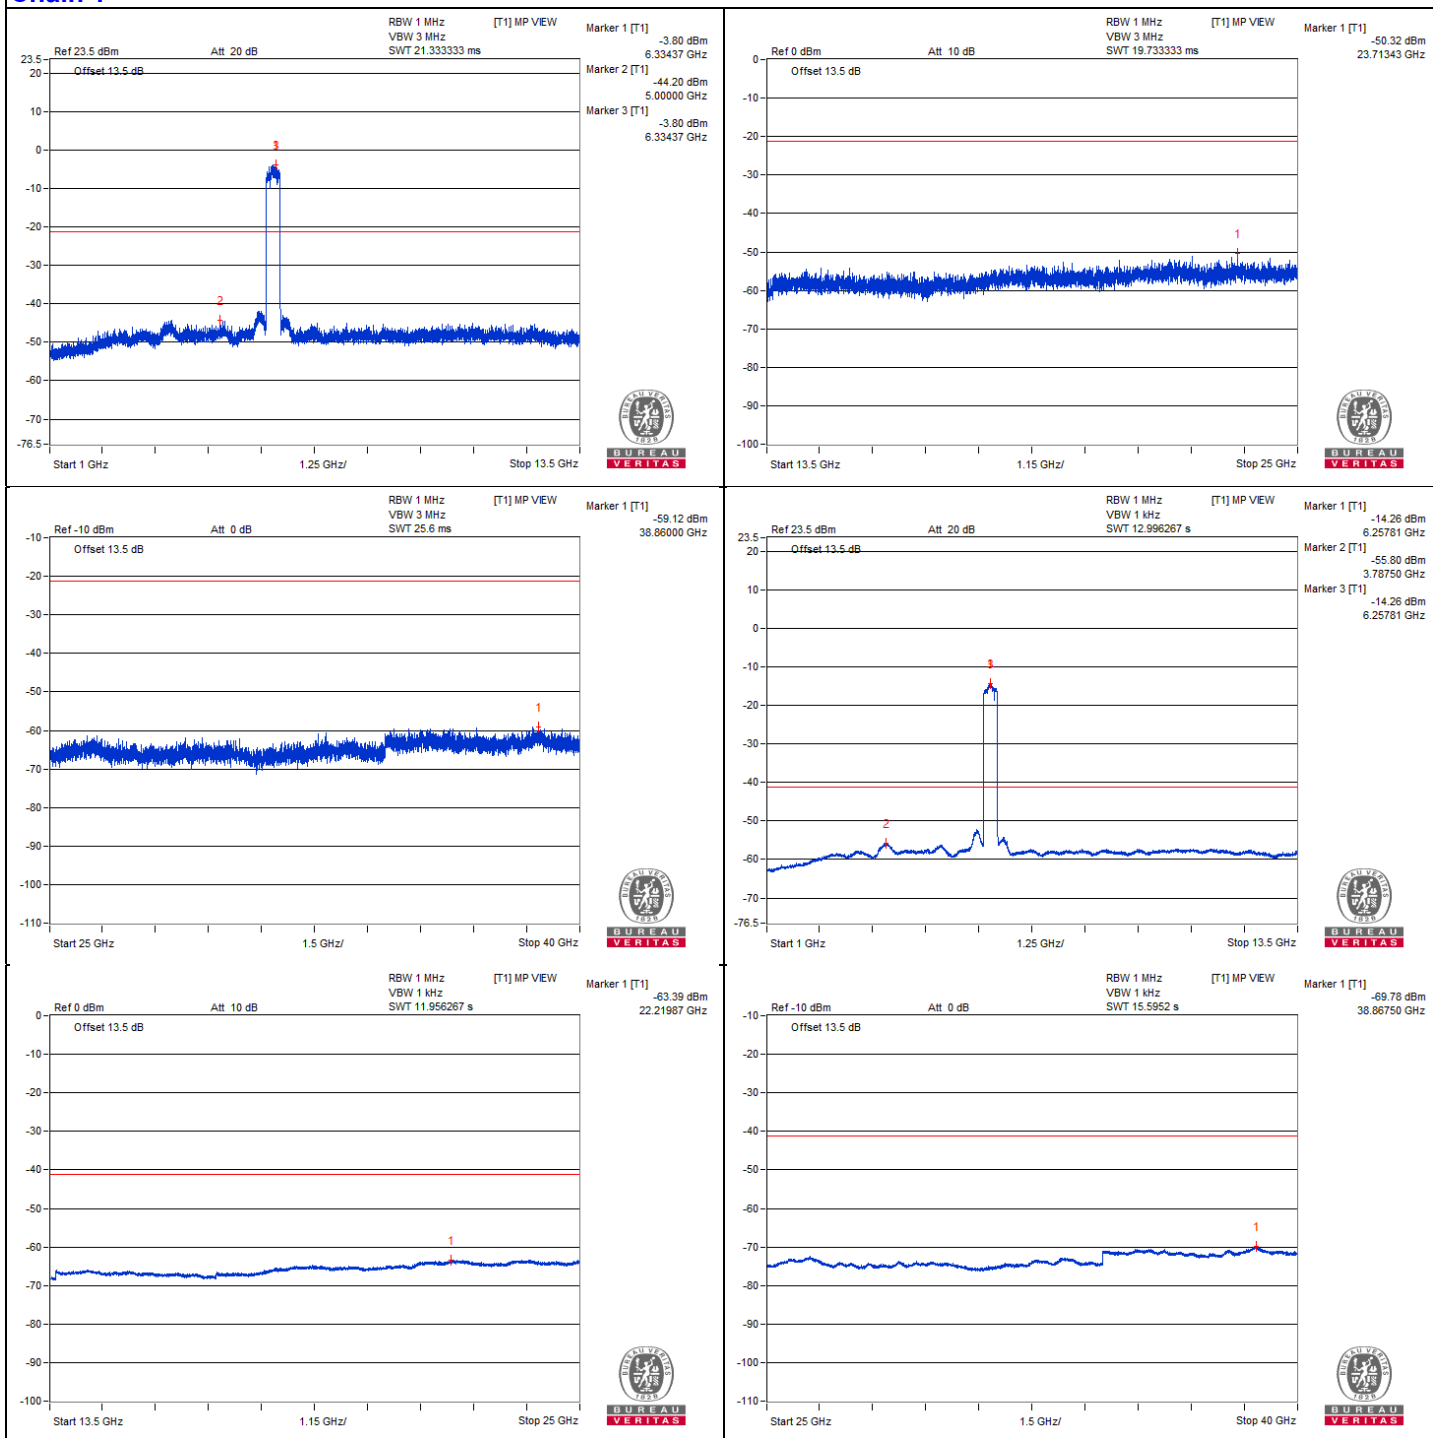

802.11be (EHT320) - Channel 95







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12859.37	58.99 PK	88.2	-29.21	-46.62	-48.47	8.17	-36.27
2	#12843.75	47.74 AV	68.2	-20.46	-58.76	-58.65	8.17	-47.52
3	19273	50.45 PK	74	-23.55	-58.26	-54.51	8.17	-44.81
4	19277.31	41.24 AV	54	-12.76	-65.12	-65.28	8.17	-54.02


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

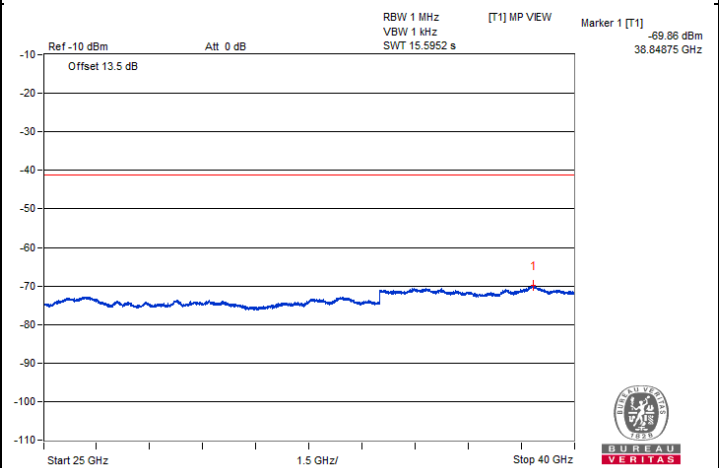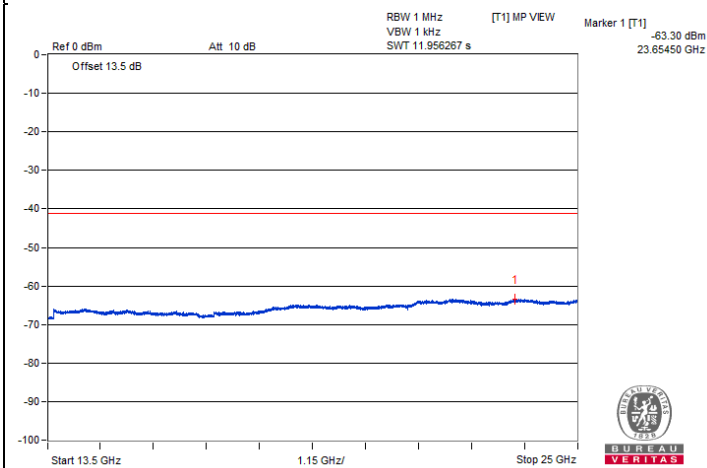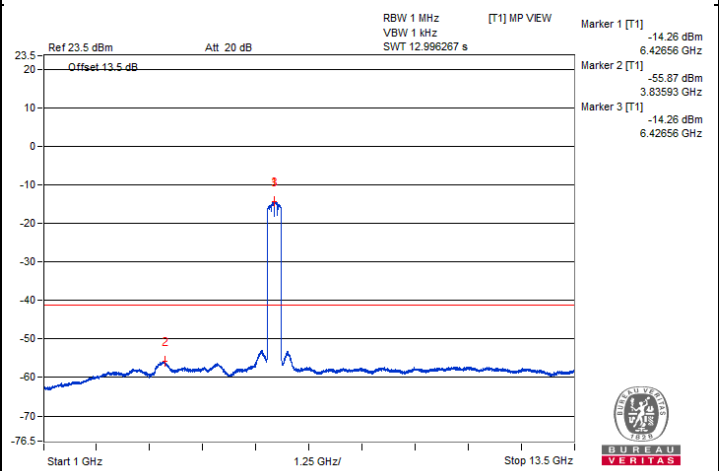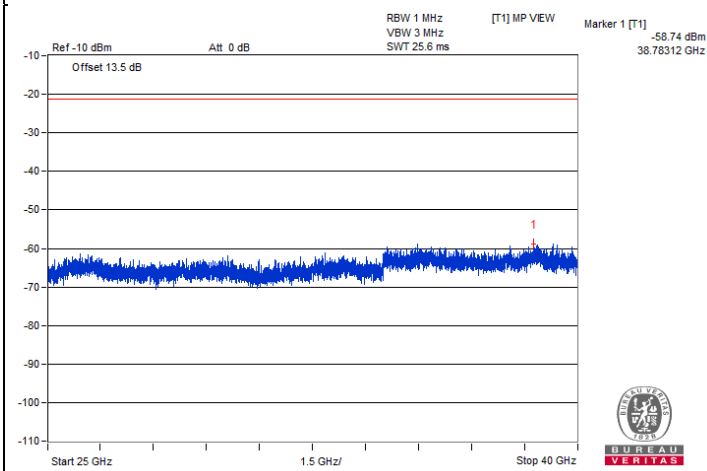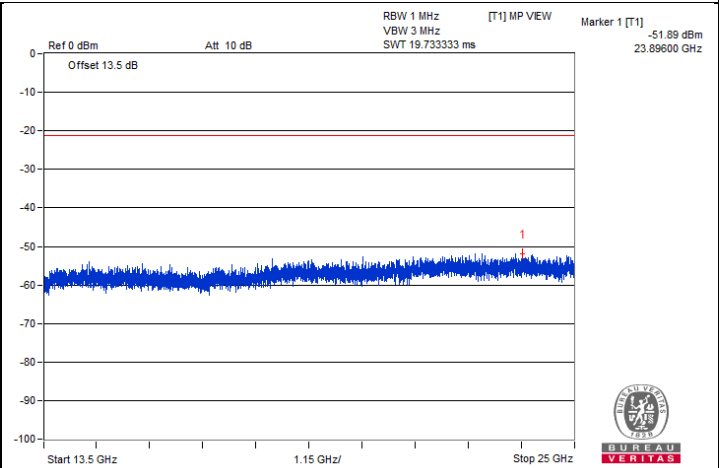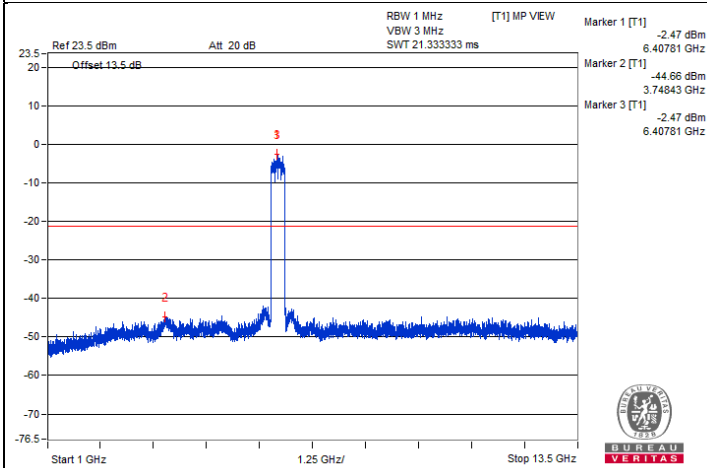

Chain 1

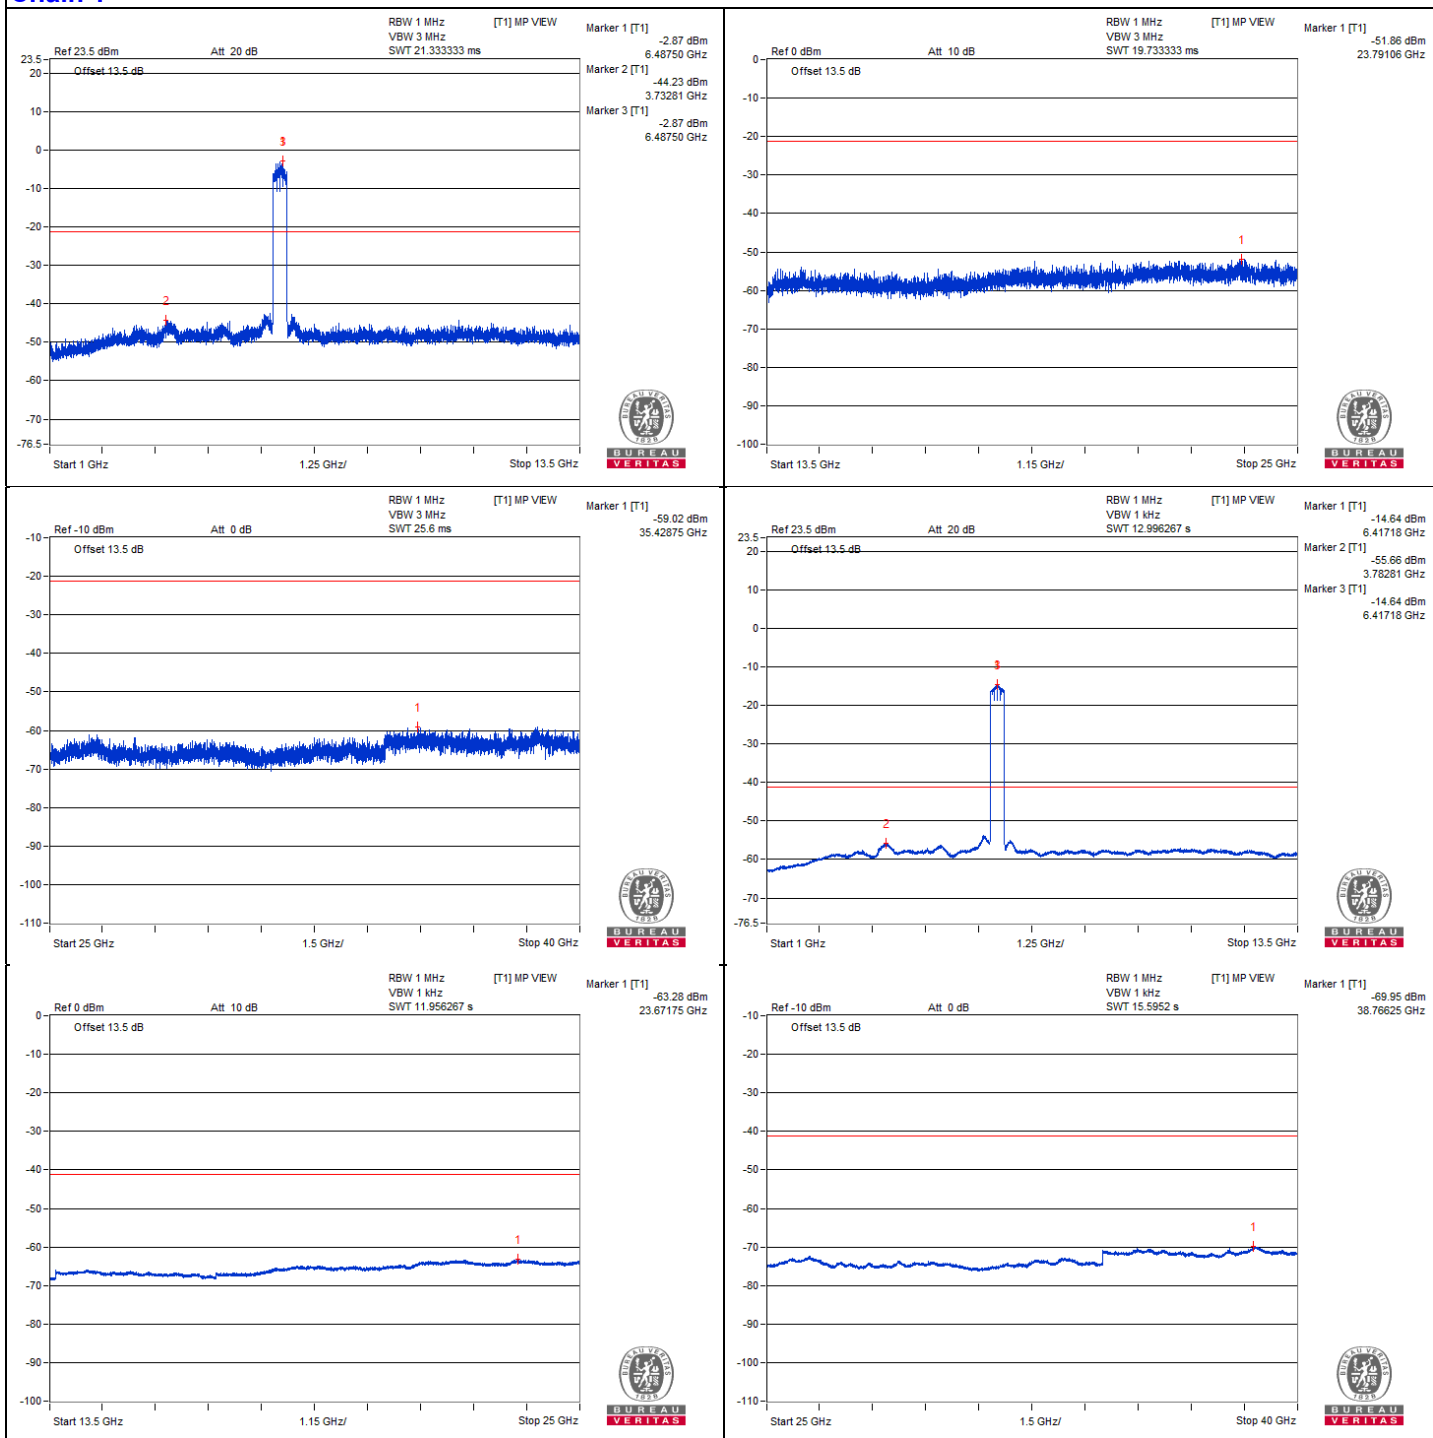

802.11be (EHT320) - Channel 127







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13171.87	58.43 PK	88.2	-29.77	-47.69	-48.36	8.17	-36.83
2	#13168.75	47.97 AV	68.2	-20.23	-58.58	-58.36	8.17	-47.29
3	19748.81	50.84 PK	74	-23.16	-54.85	-56.52	8.17	-44.42
4	19758.87	40.95 AV	54	-13.05	-65.63	-65.36	8.17	-54.31


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

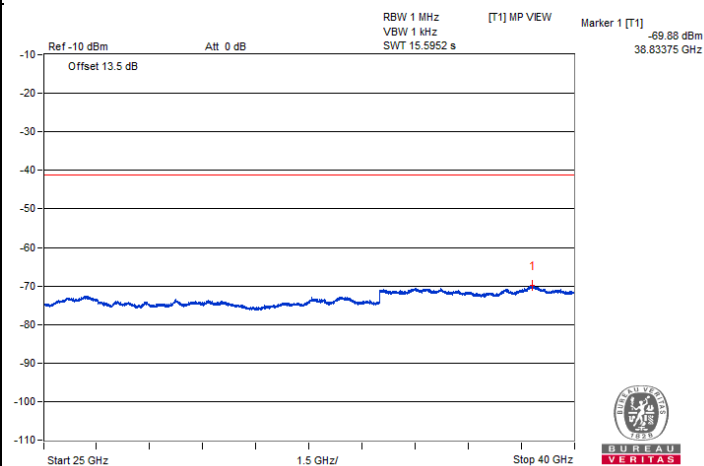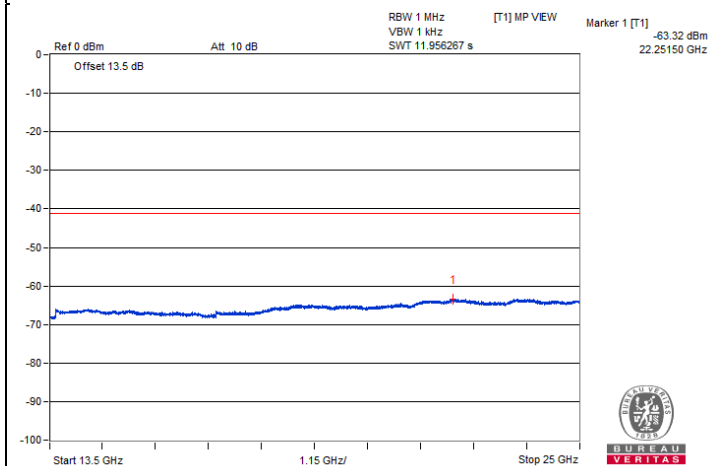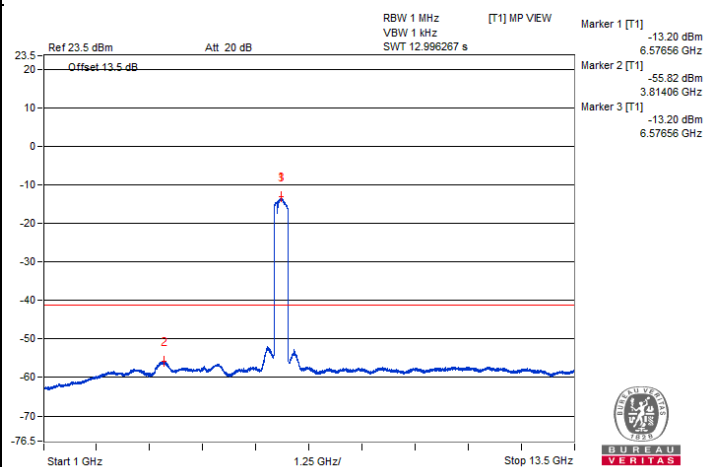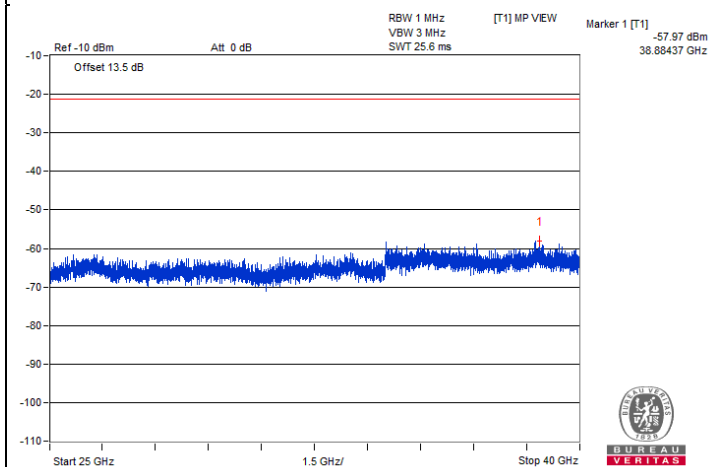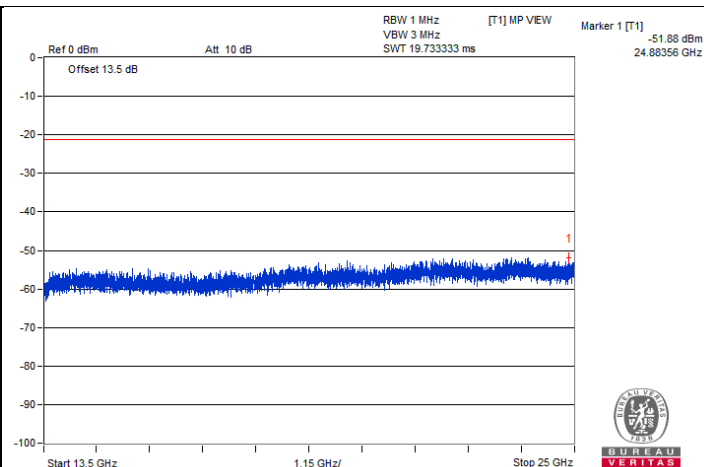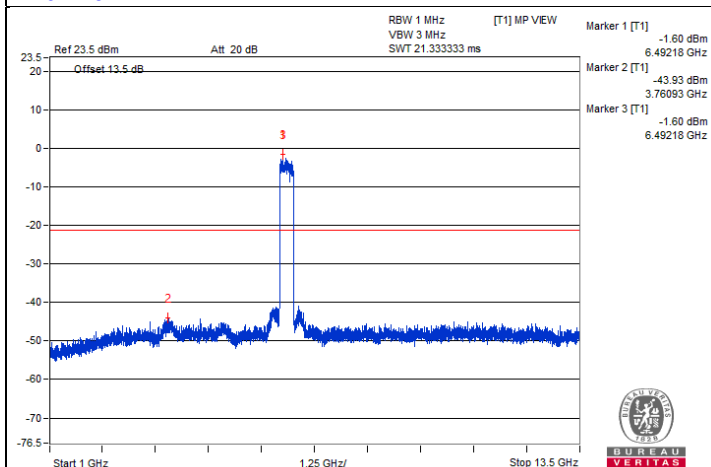

Chain 1

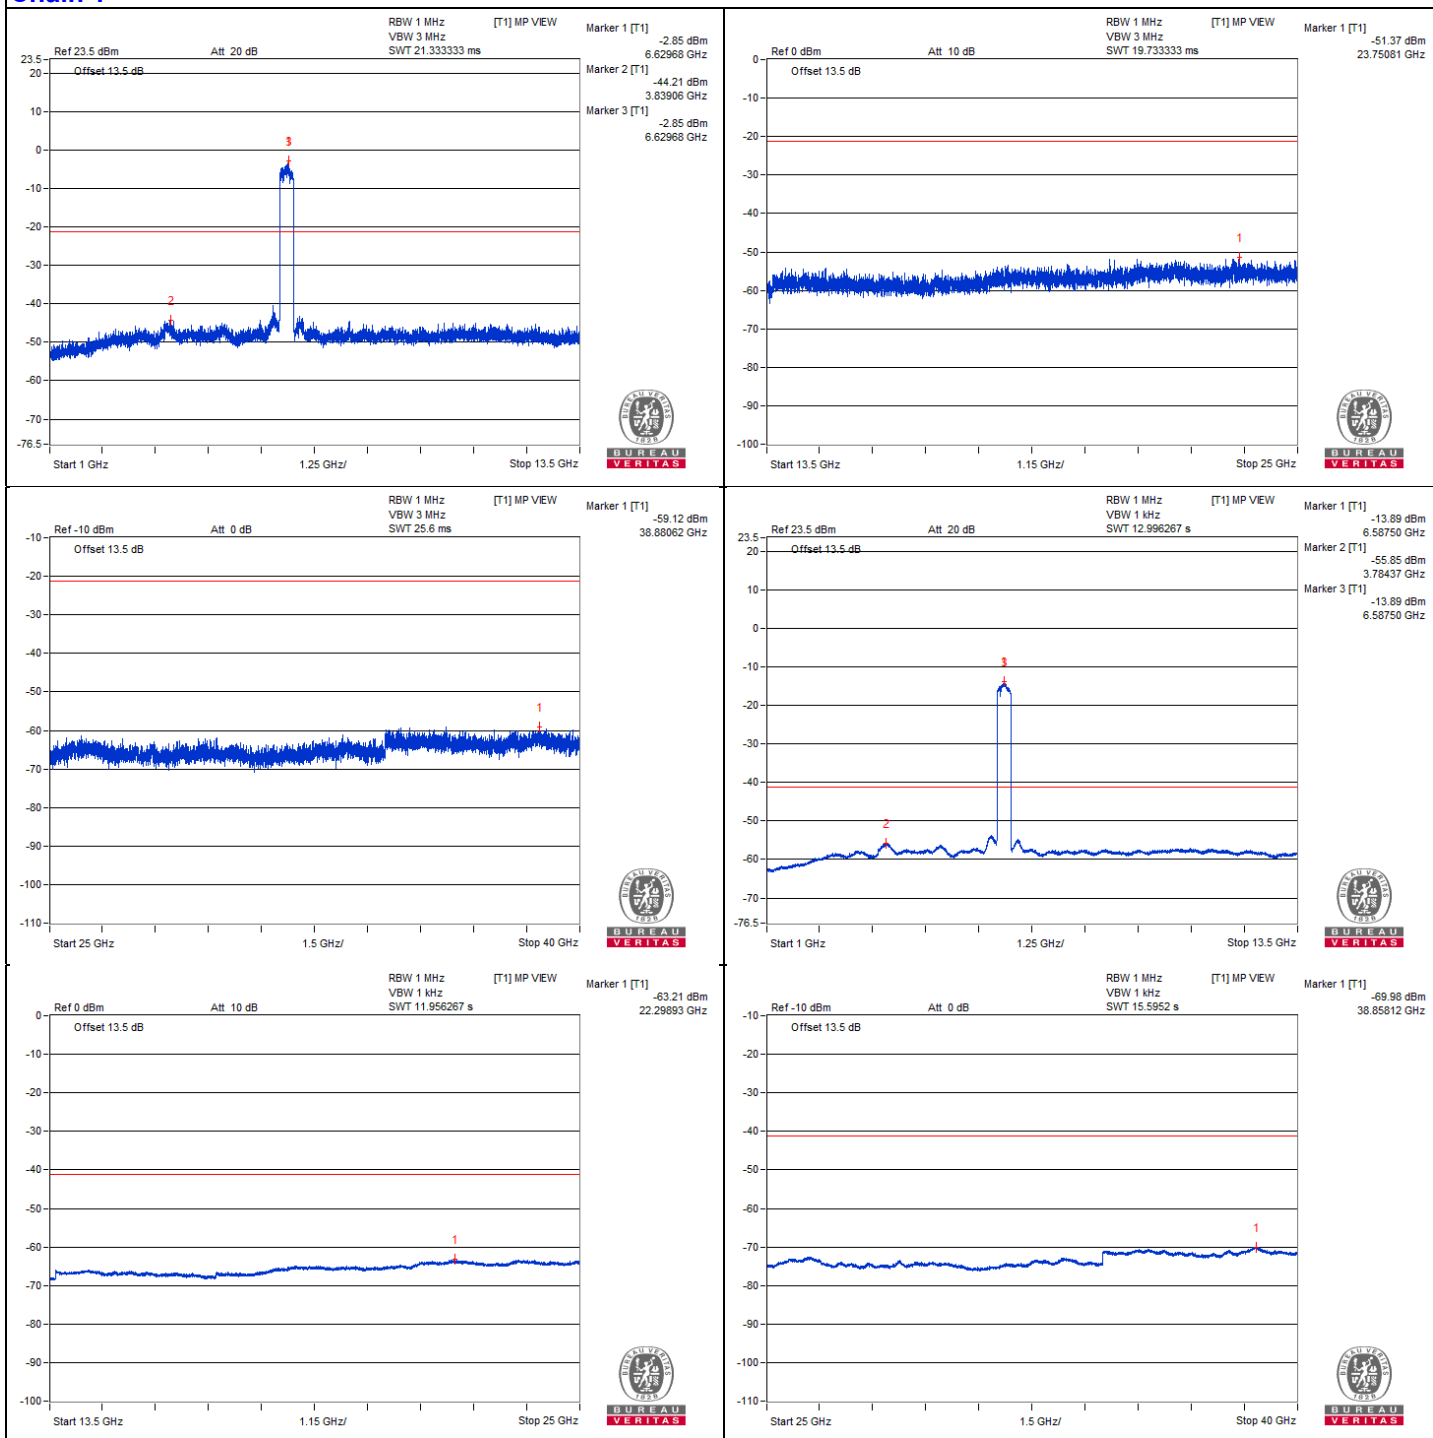

802.11be (EHT320) - Channel 159







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13498.43	58.81 PK	88.2	-29.39	-48.05	-47.24	8.17	-36.45
2	#13495.31	48.09 AV	68.2	-20.11	-58.2	-58.51	8.17	-47.17
3	20227.5	50.64 PK	74	-23.36	-57.04	-54.83	8.17	-44.62
4	20237.56	40.91 AV	54	-13.09	-65.33	-65.73	8.17	-54.35


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

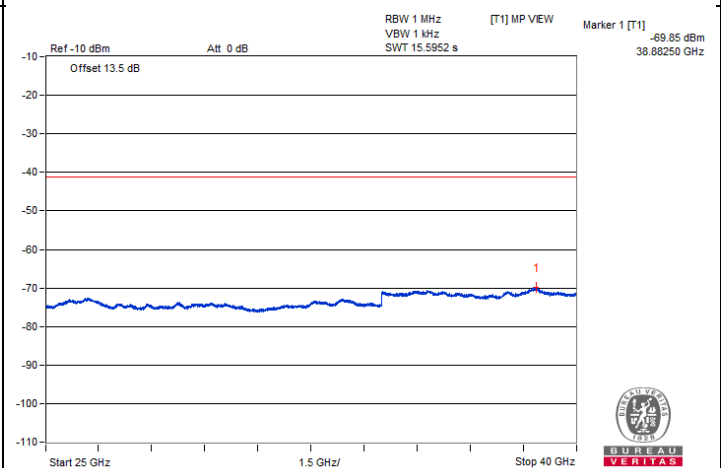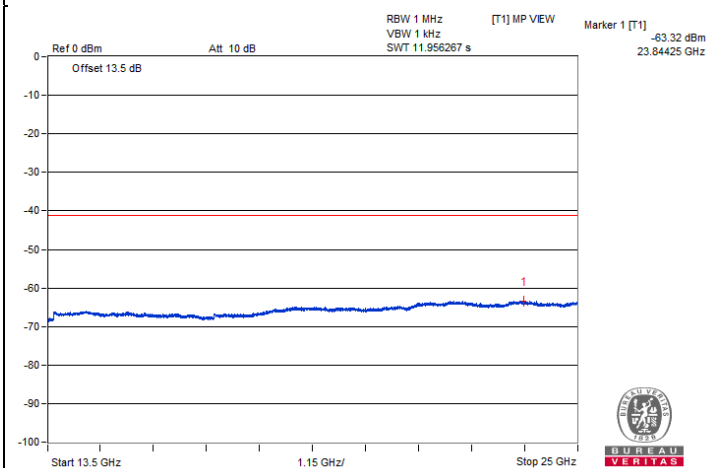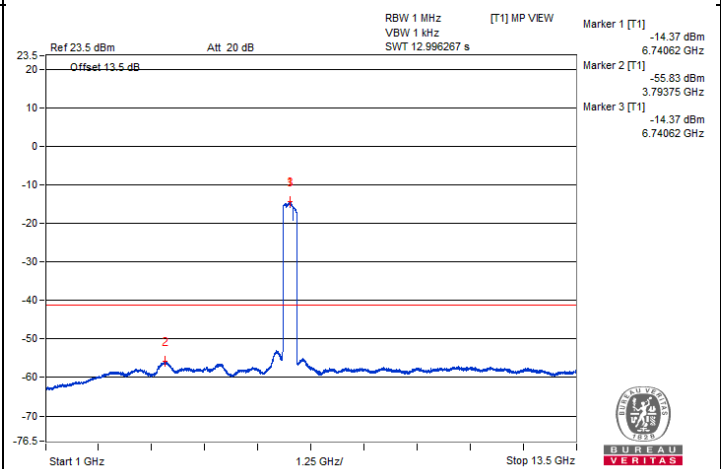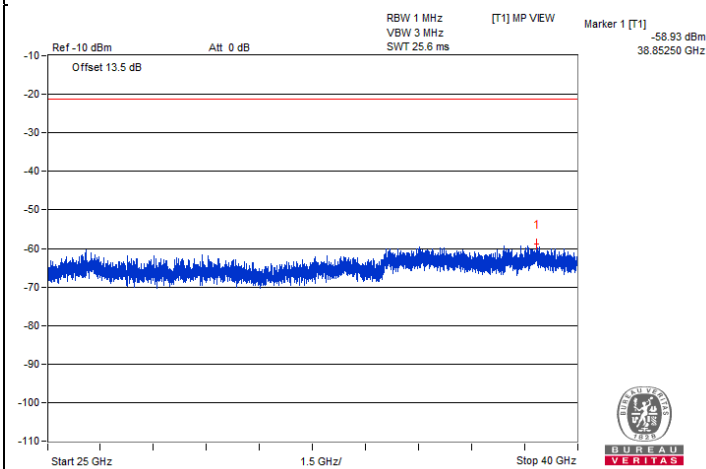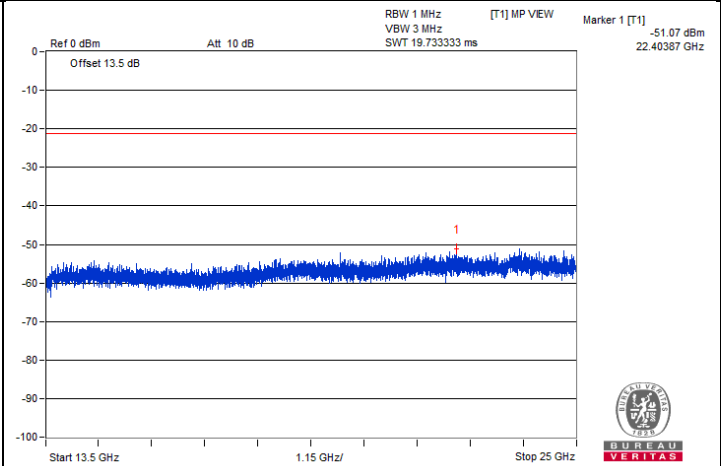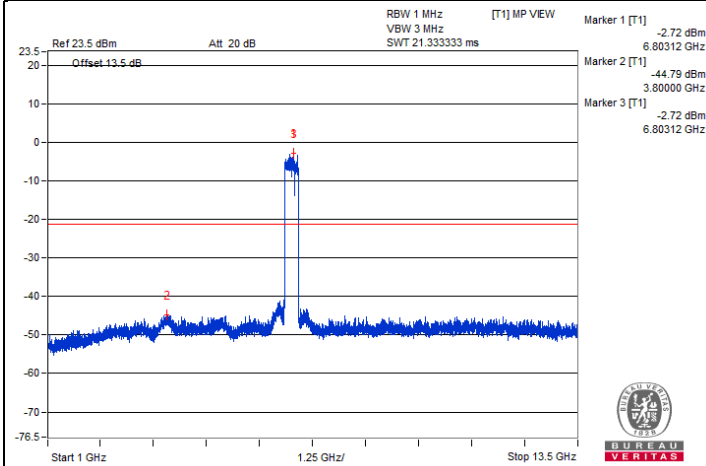

Chain 1

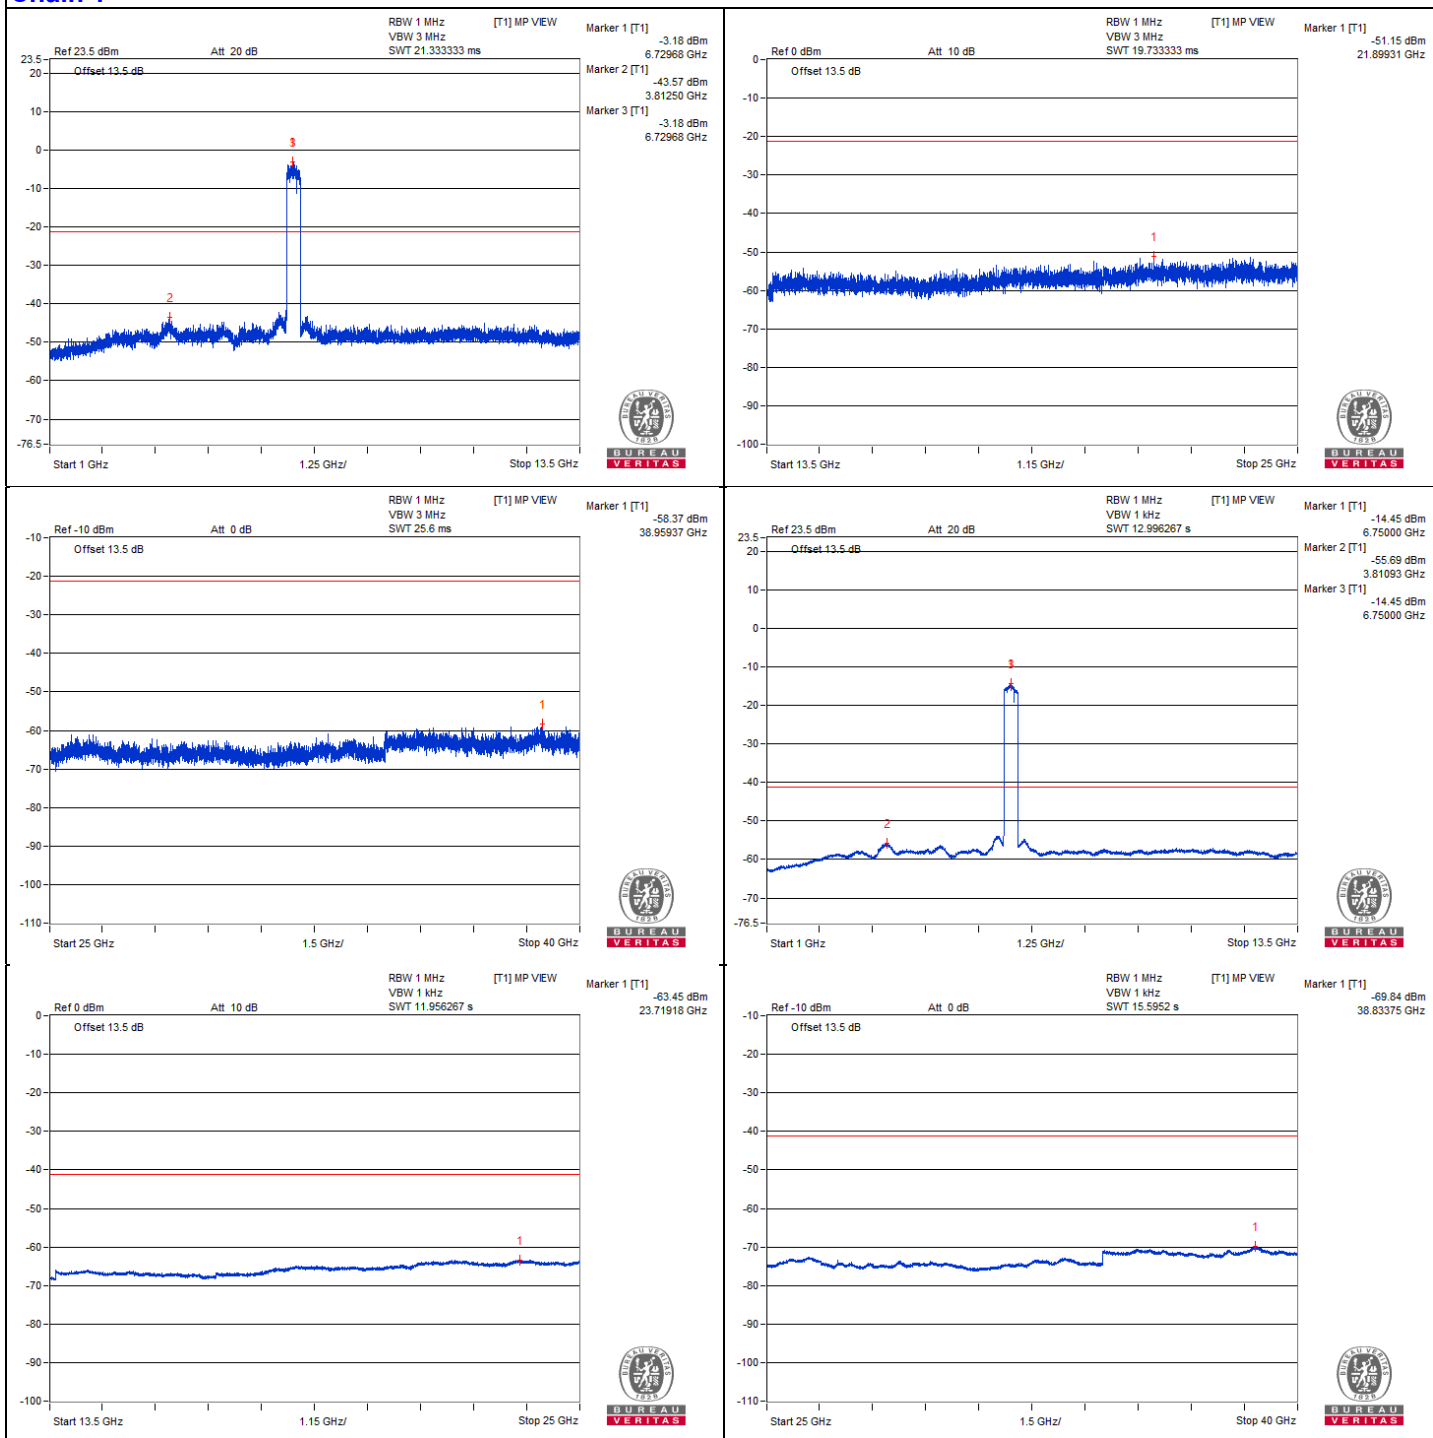

802.11be (EHT320) - Channel 191







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13817.68	48.84 PK	88.2	-39.36	-56.97	-58.33	8.17	-46.42
2	#13817.68	39.63 AV	68.2	-28.57	-66.77	-66.85	8.17	-55.63
3	20713.37	51.21 PK	74	-22.79	-54.11	-56.74	8.17	-44.05
4	20714.81	40.93 AV	54	-13.07	-65.56	-65.46	8.17	-54.33


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

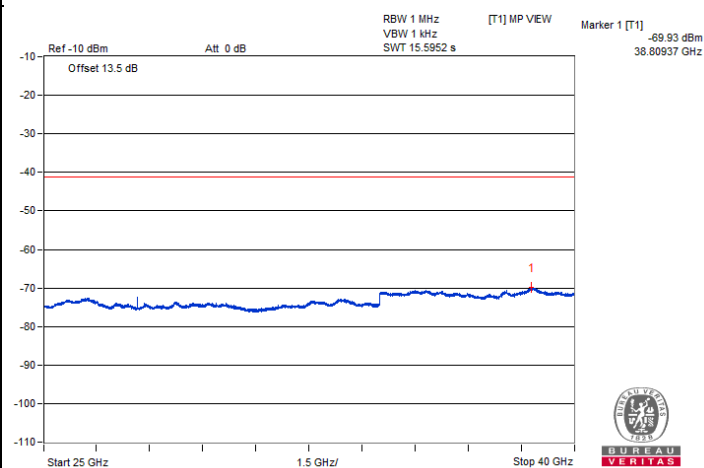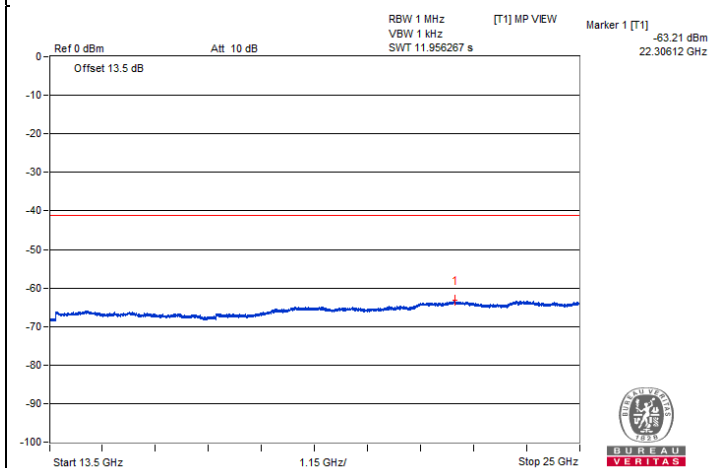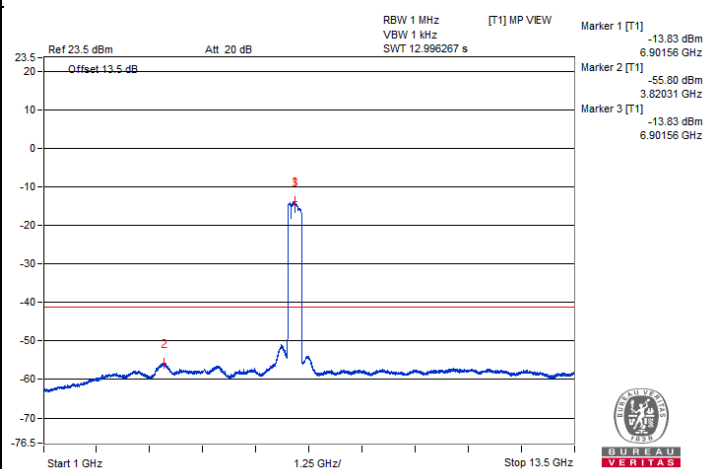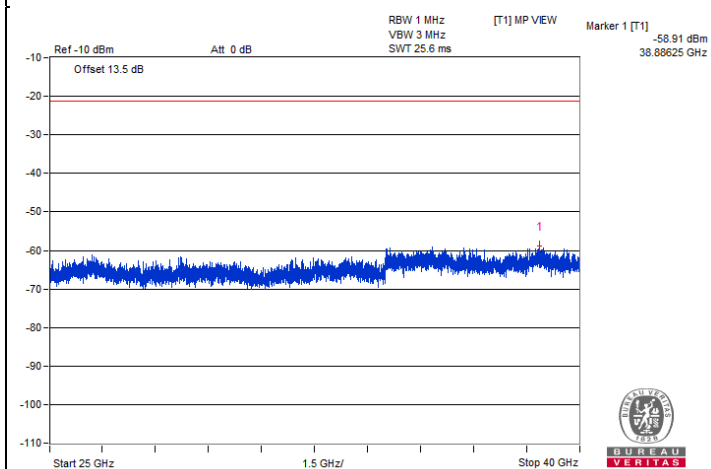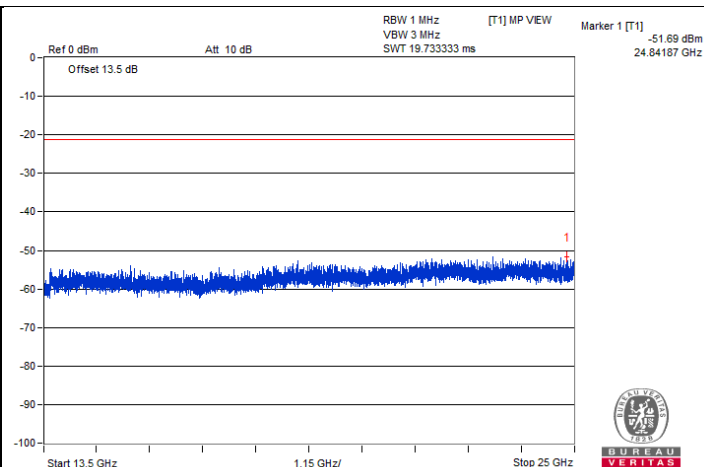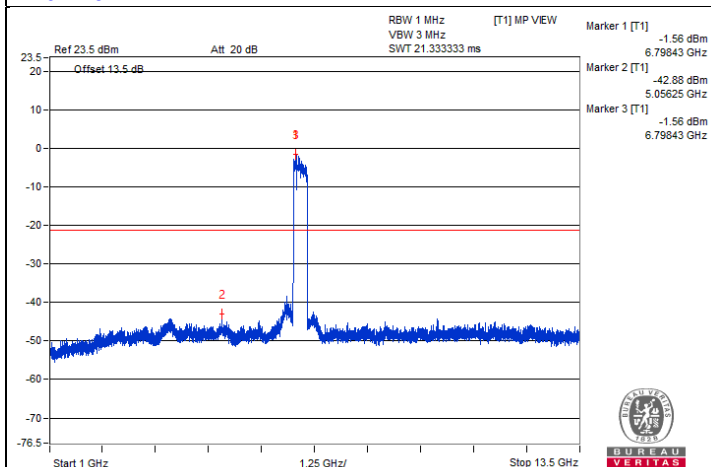

Chain 1

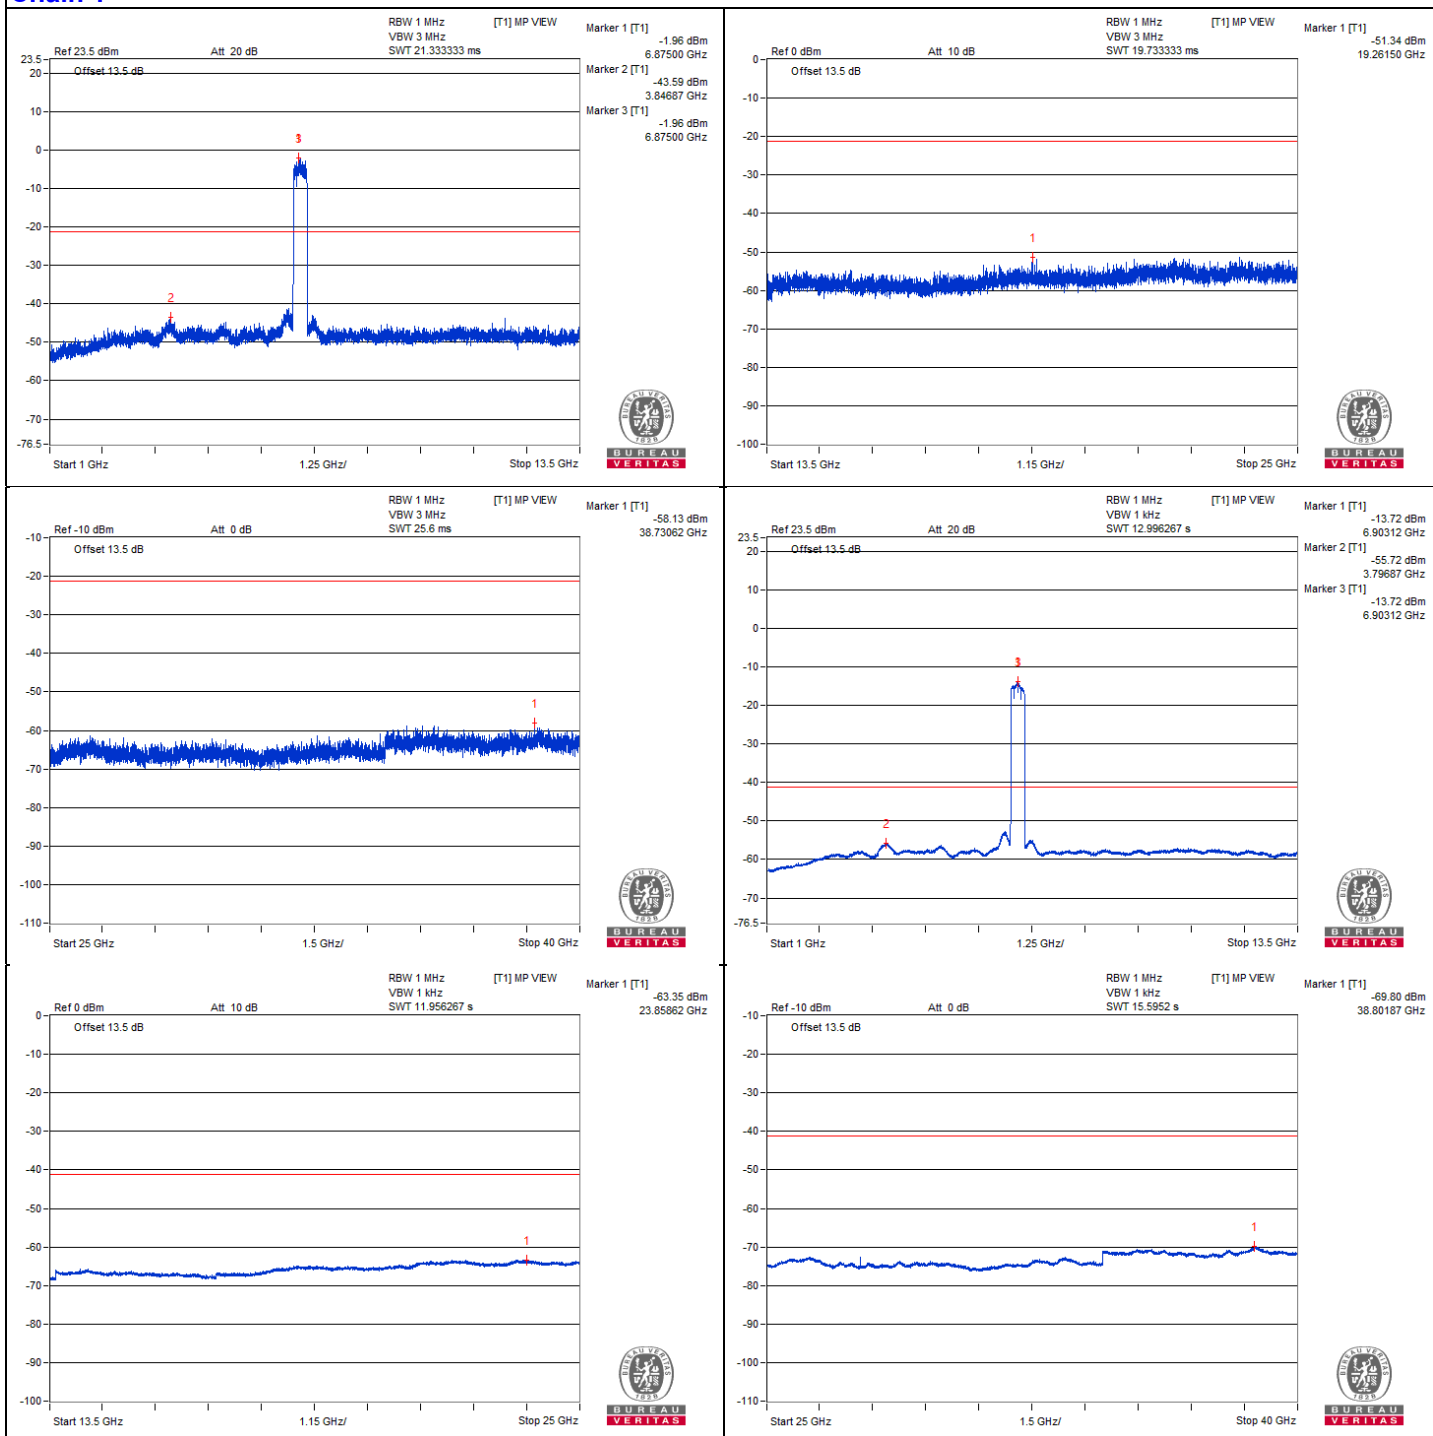


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7165.75	60.83 PK	88.2	-27.37	-43.62	-49.21	8.13	-34.43
2	#7207.2	48.47 AV	68.2	-19.73	-56.95	-59.21	8.13	-46.79


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

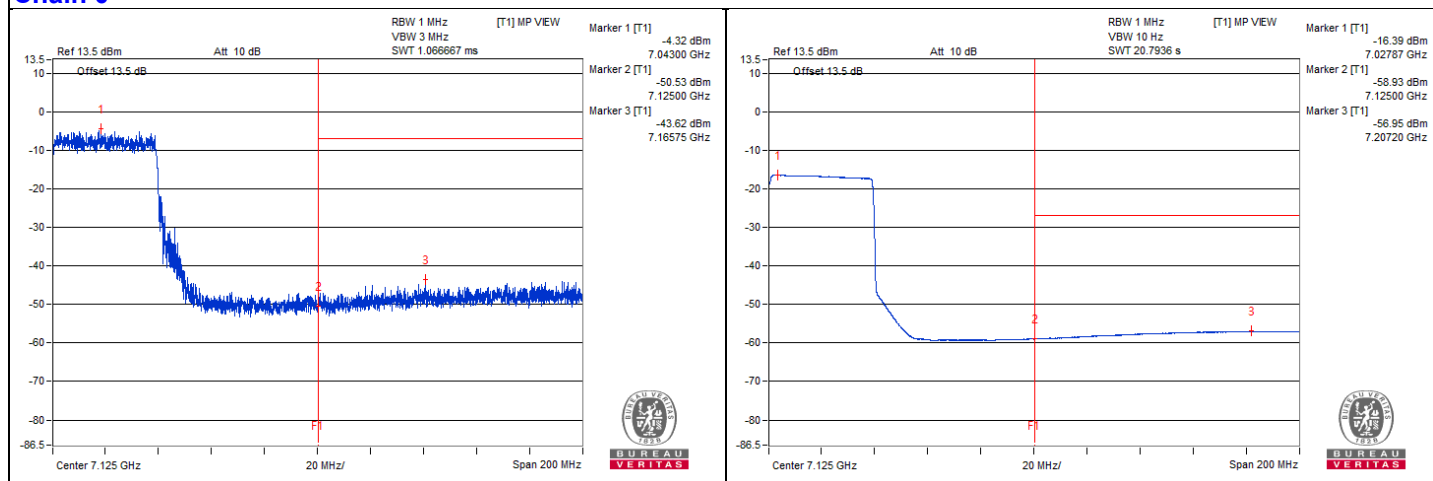

Chain 1

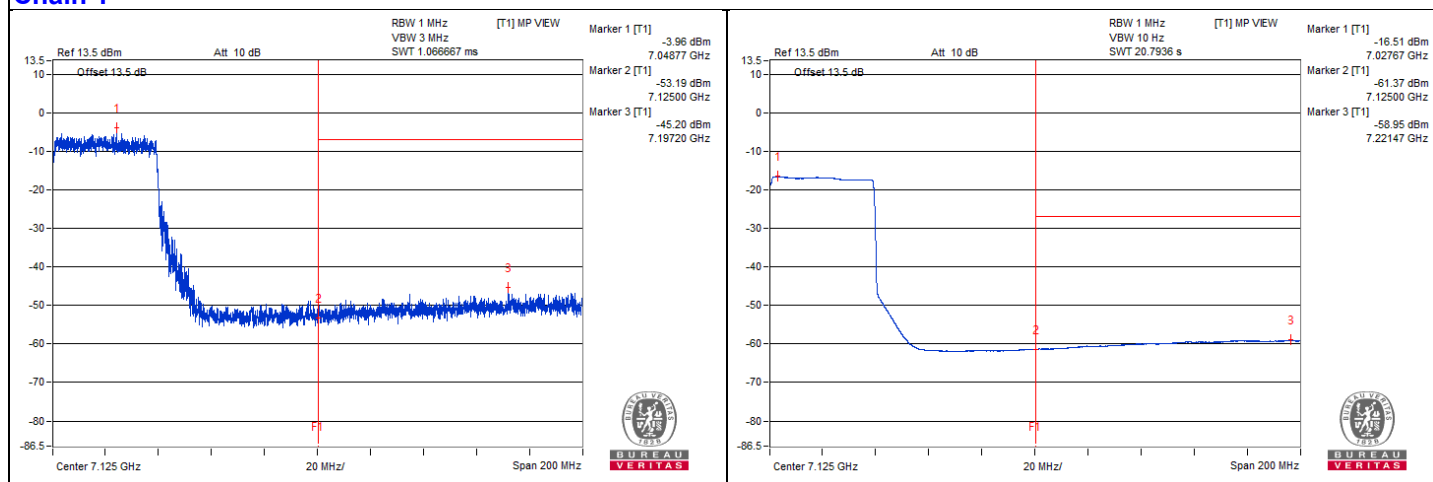

802.11be (EHT20) 26-tone RU - Channel 2


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11865.62	59.74 PK	74	-14.26	-46.77	-46.64	8.17	-35.52
2	11867.18	48.68 AV	54	-5.32	-57.64	-57.88	8.17	-46.58
3	17813.93	49.34 PK	74	-24.66	-58.56	-56.01	8.17	-45.92
4	17805.31	39.53 AV	54	-14.47	-66.8	-67.03	8.17	-55.73


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

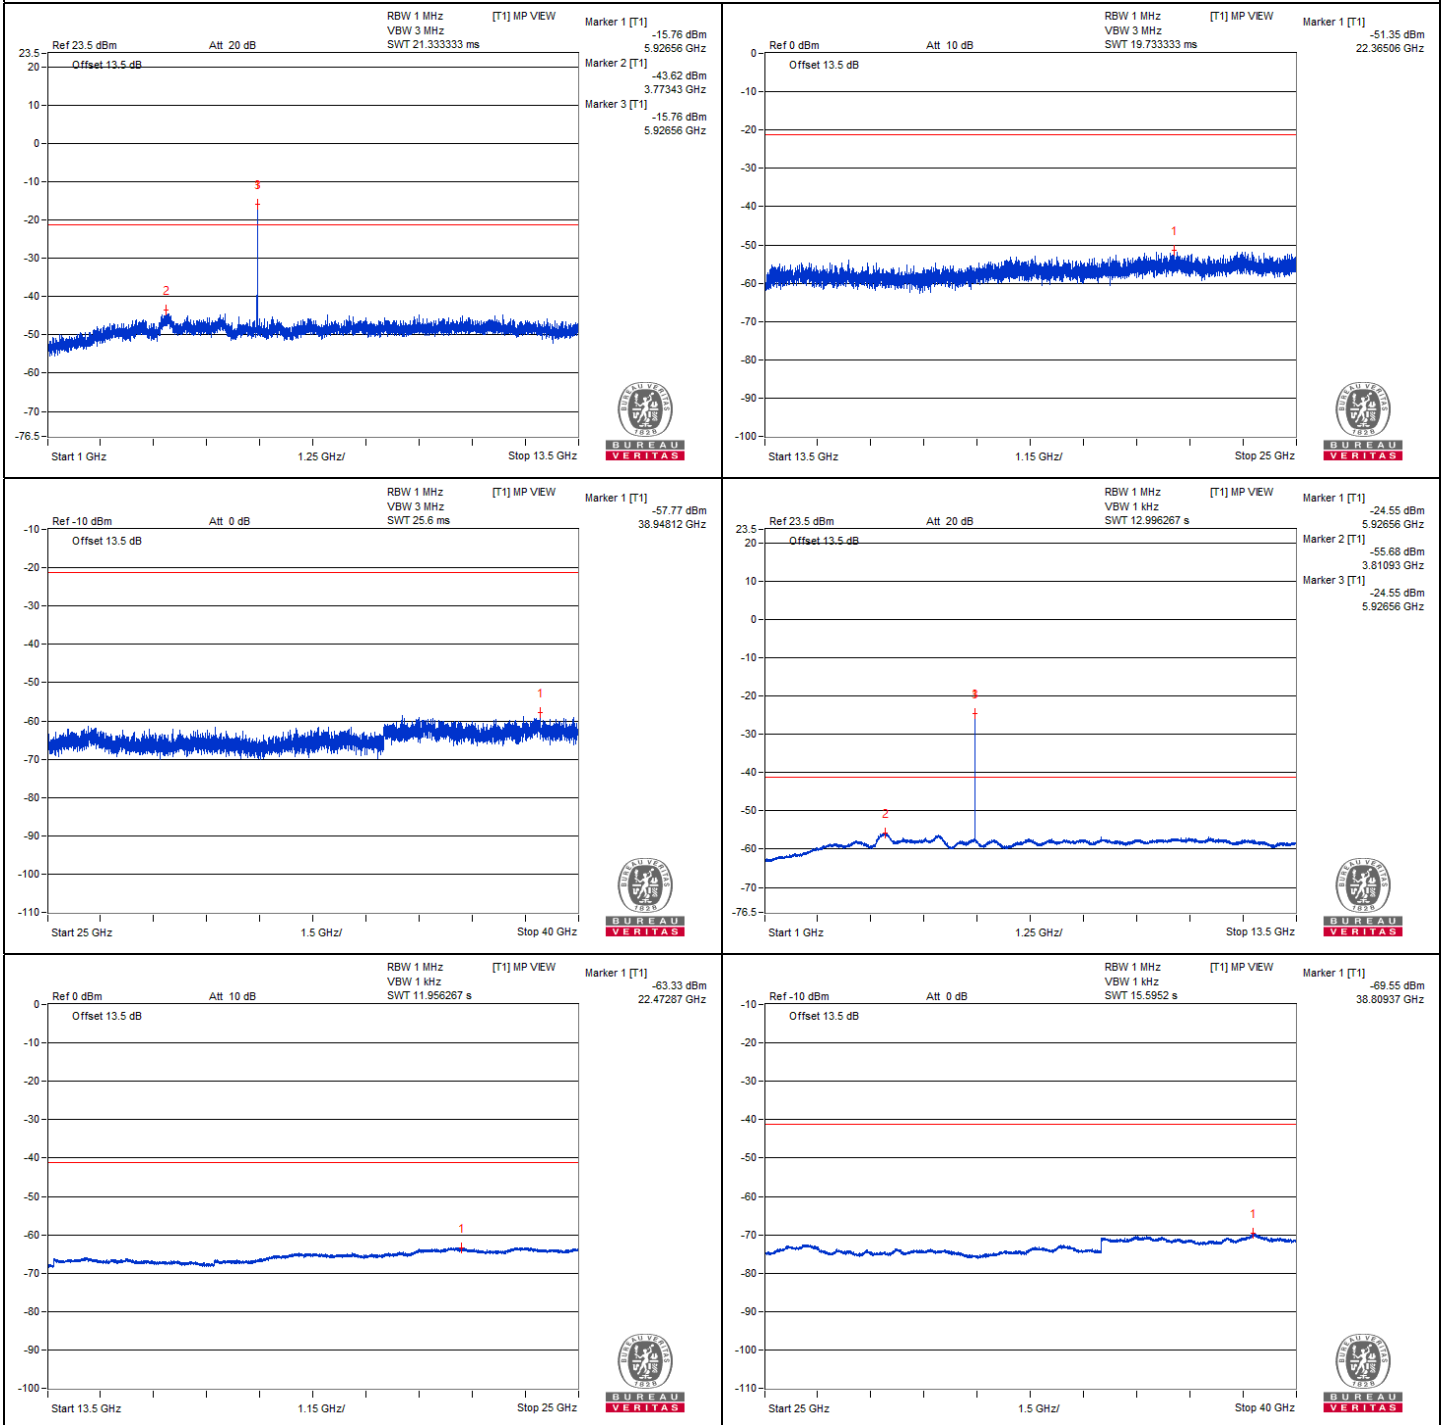

Chain 1

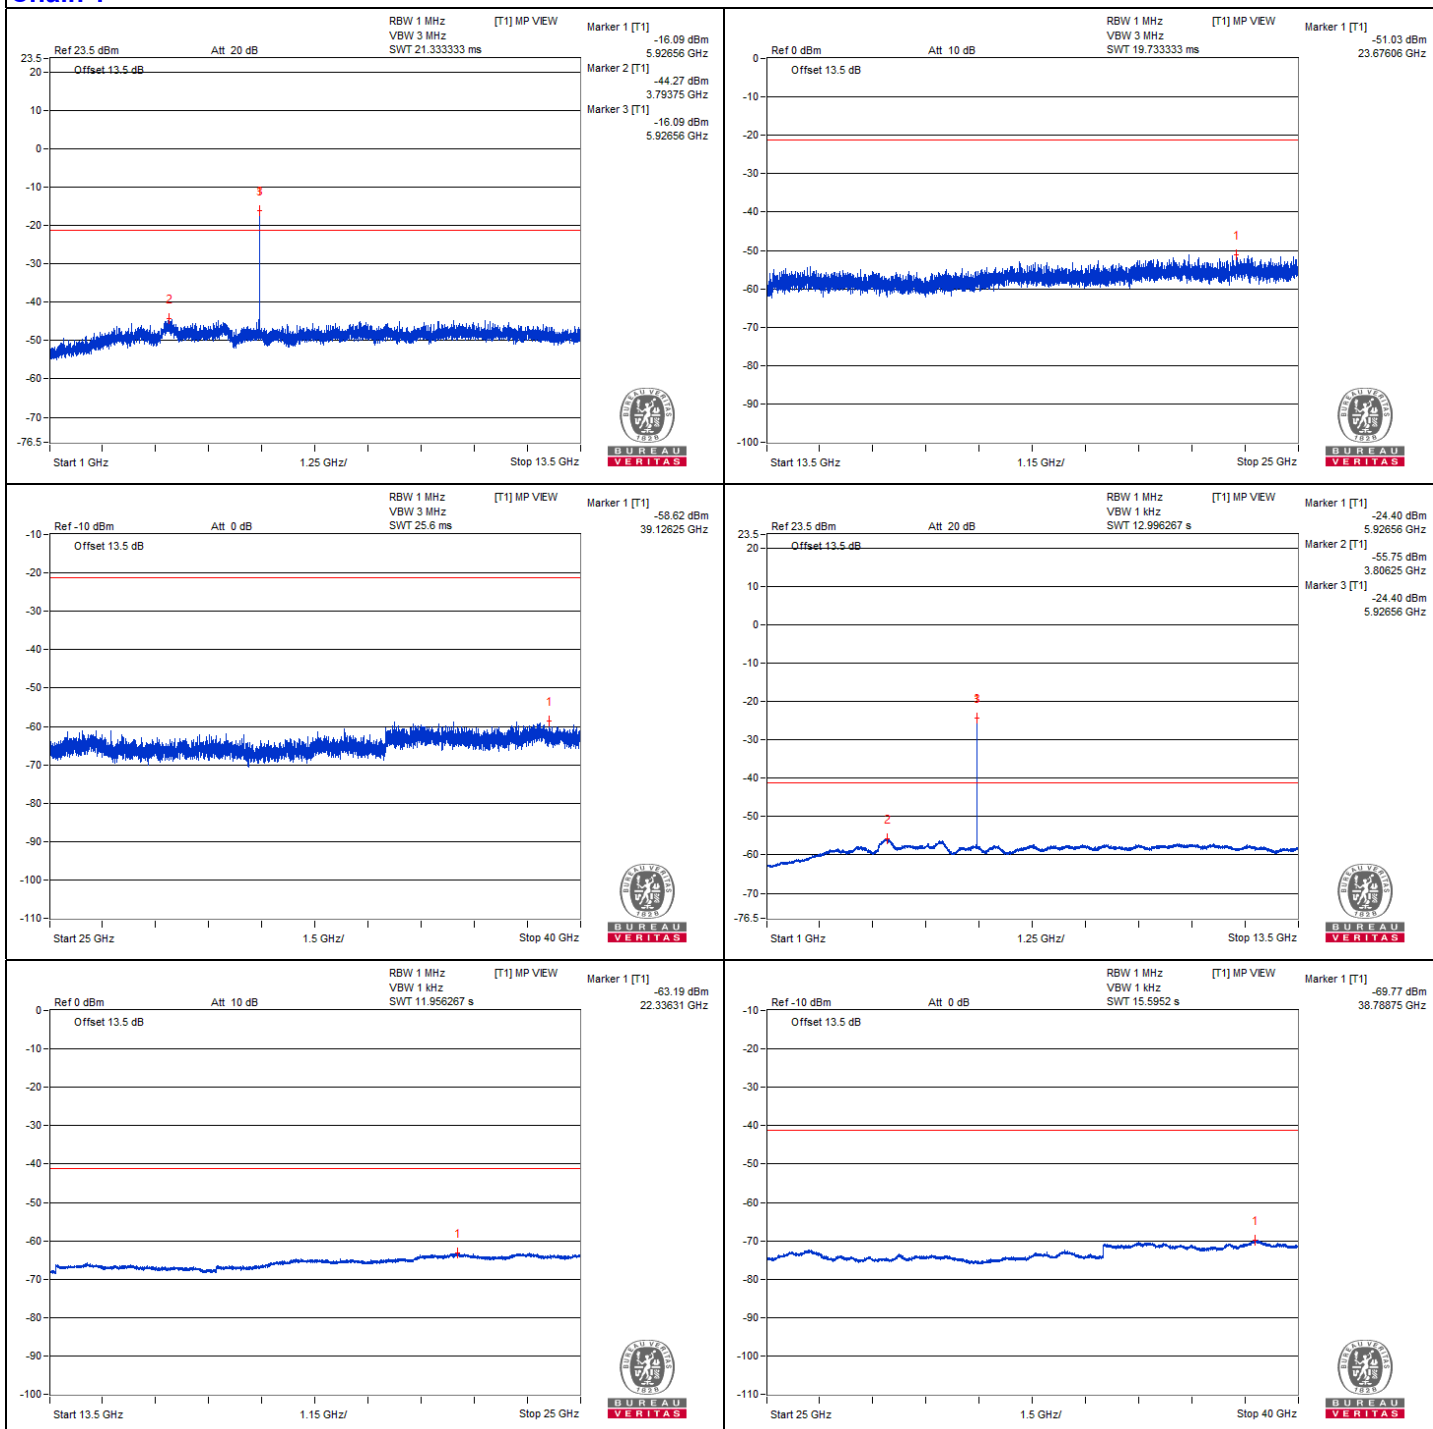


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5925	79.89 PK	88.2	-8.31	-25.44	-27.98	8.15	-15.37
2	#5925	67.69 AV	68.2	-0.51	-38.76	-38.71	8.15	-27.57


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

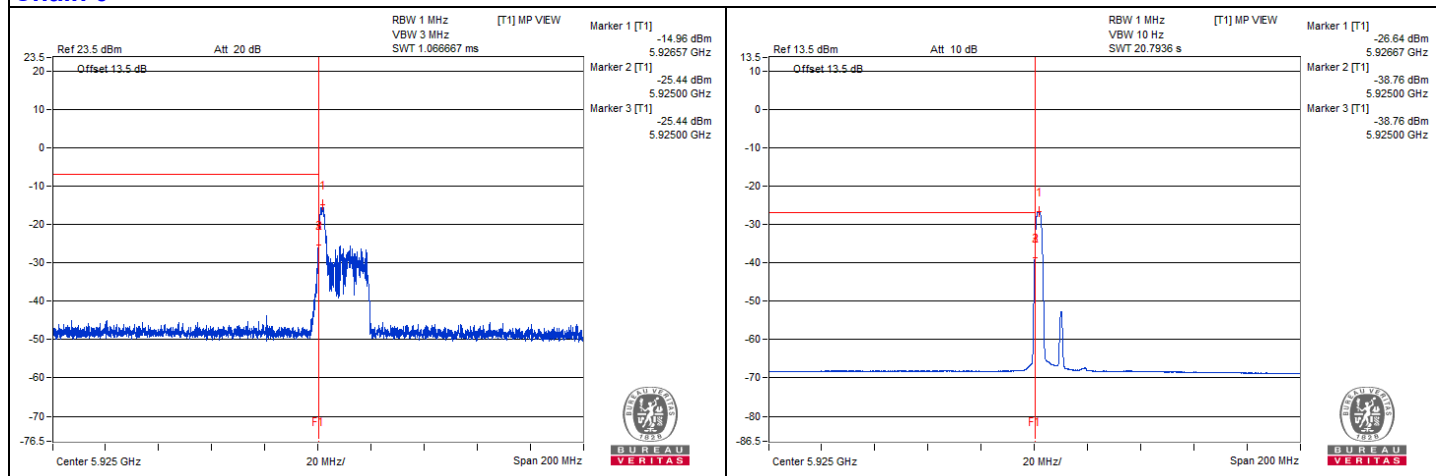

Chain 1

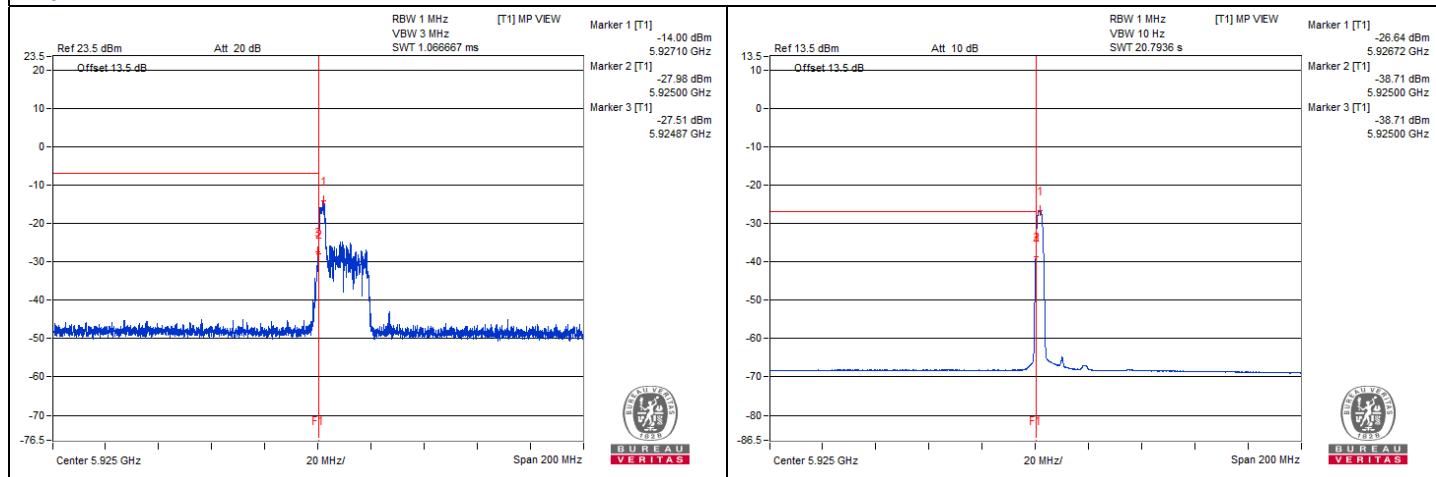

802.11be (EHT20) 26-tone RU - Channel 1


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11904.68	59.5 PK	74	-14.5	-45.73	-48.61	8.17	-35.76
2	11901.56	48.67 AV	54	-5.33	-57.64	-57.91	8.17	-46.59
3	17874.31	50.46 PK	74	-23.54	-56.07	-55.9	8.17	-44.80
4	17858.5	39.48 AV	54	-14.52	-66.84	-67.08	8.17	-55.78


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

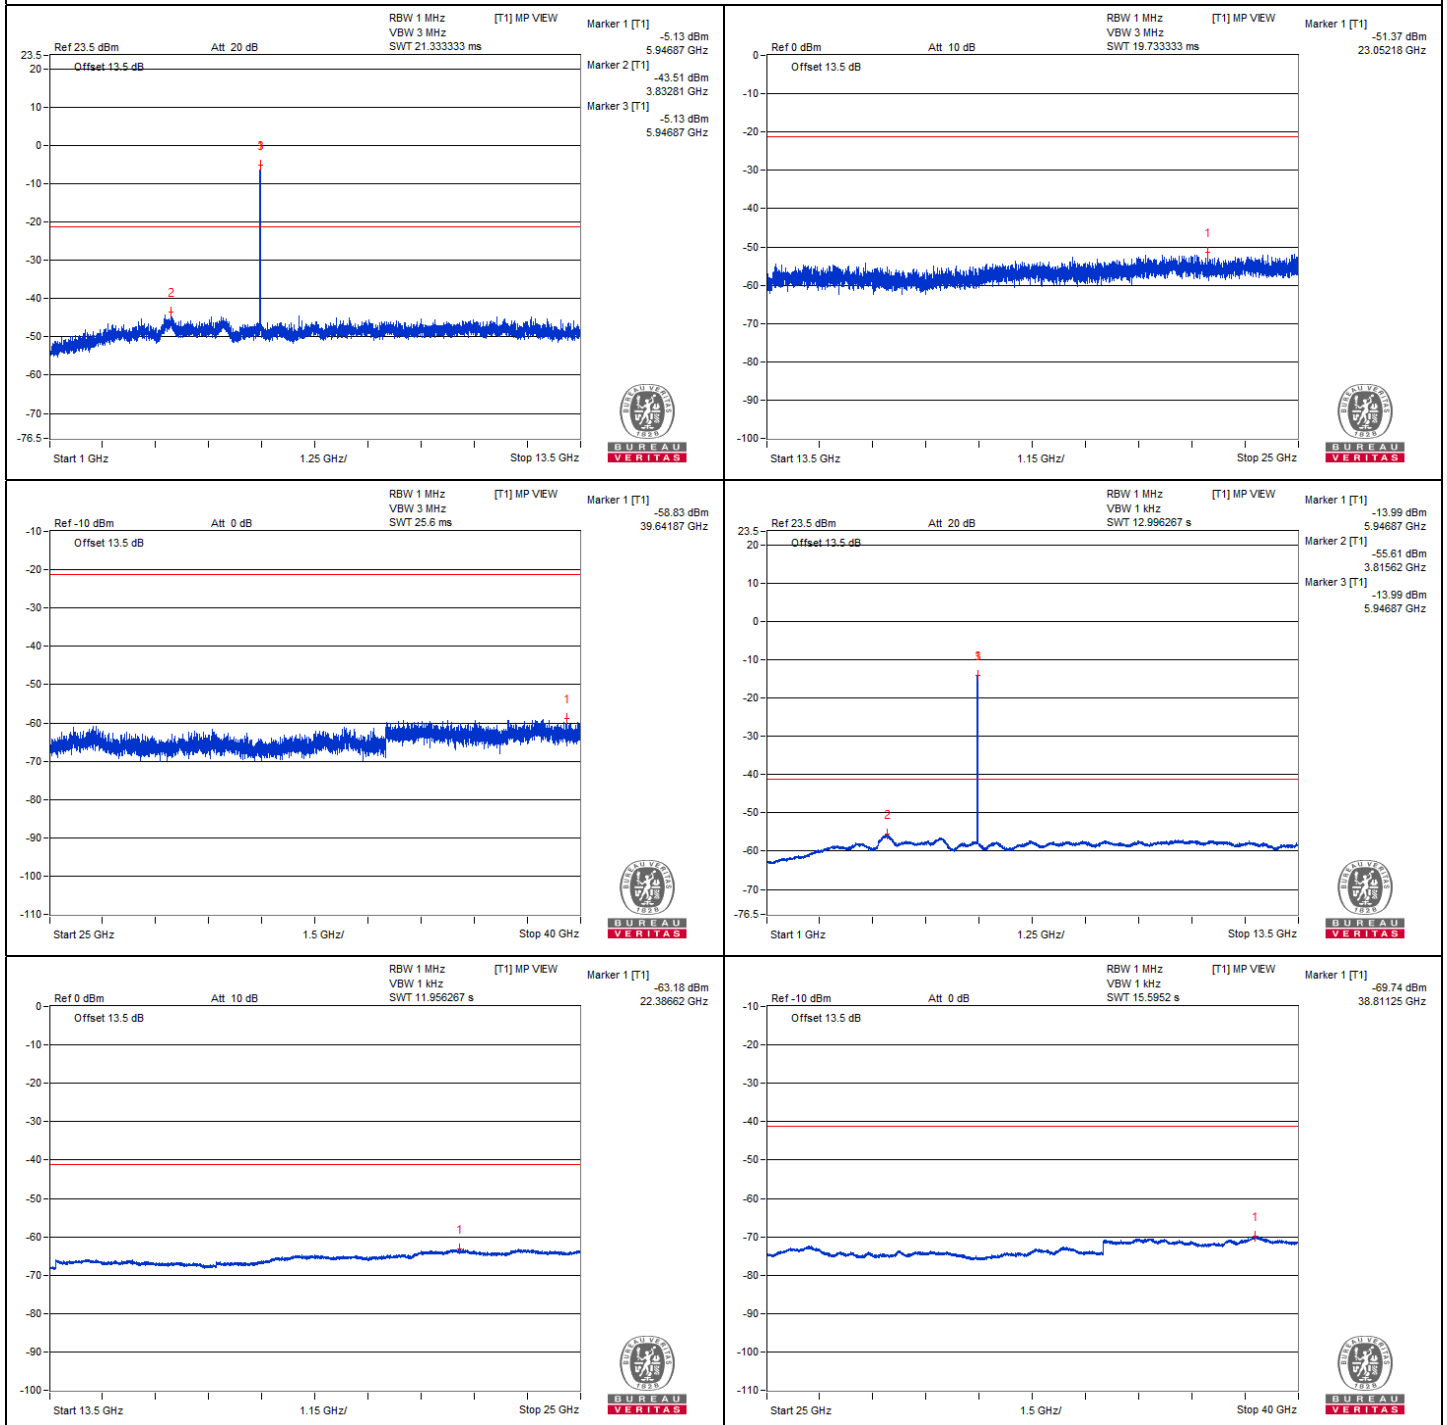

Chain 1

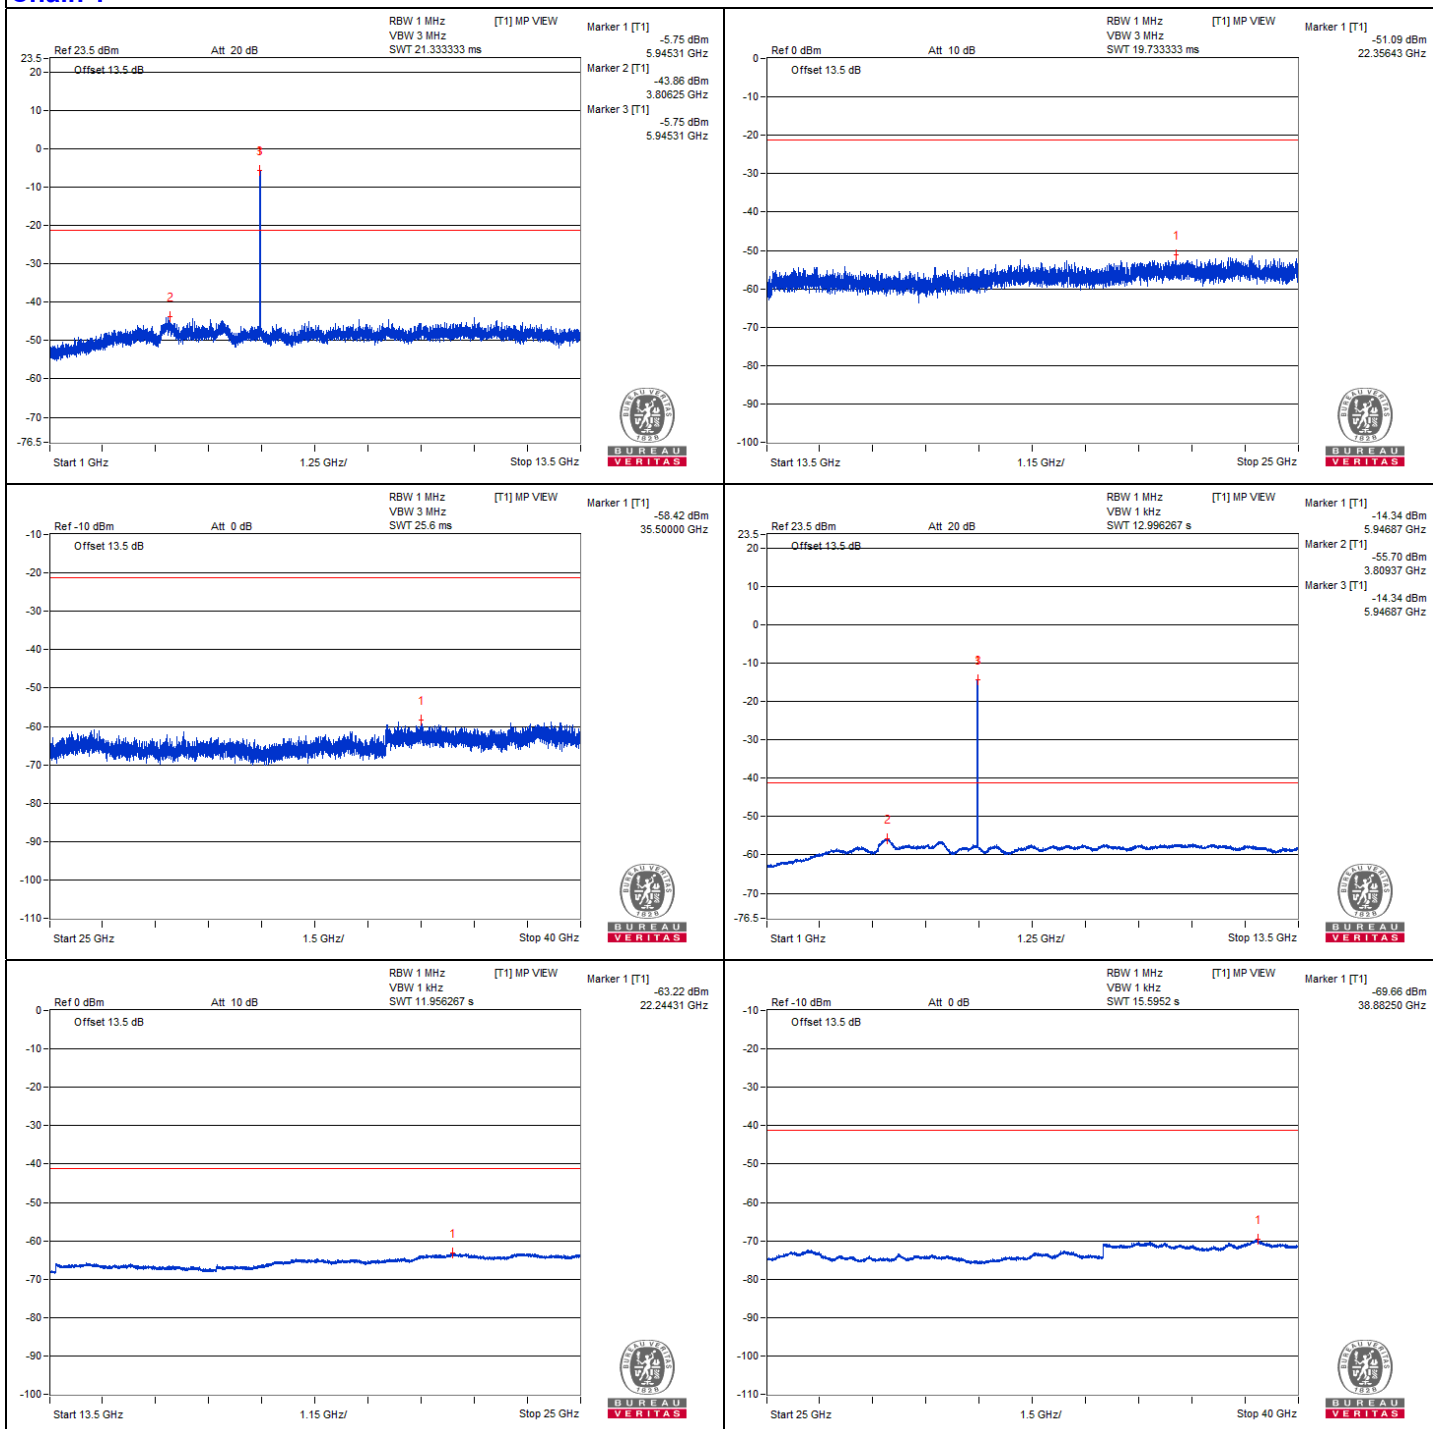


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5880.17	60.27 PK	88.2	-27.93	-46.82	-45.57	8.15	-34.99
2	#5913.52	38.28 AV	68.2	-29.92	-68.16	-68.12	8.15	-56.98


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

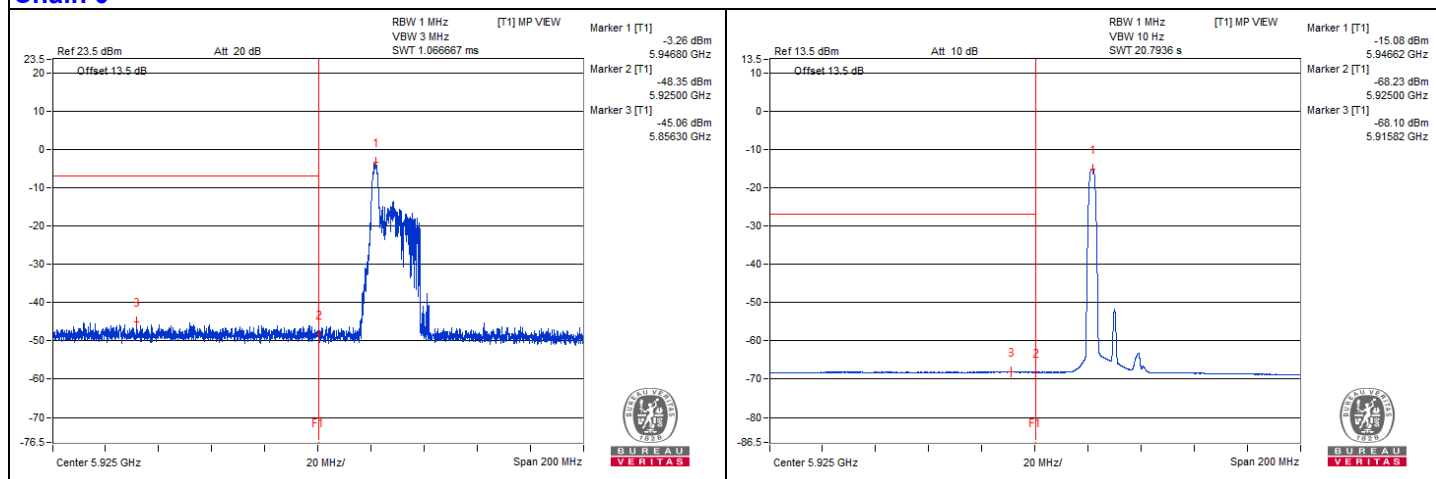

Chain 1

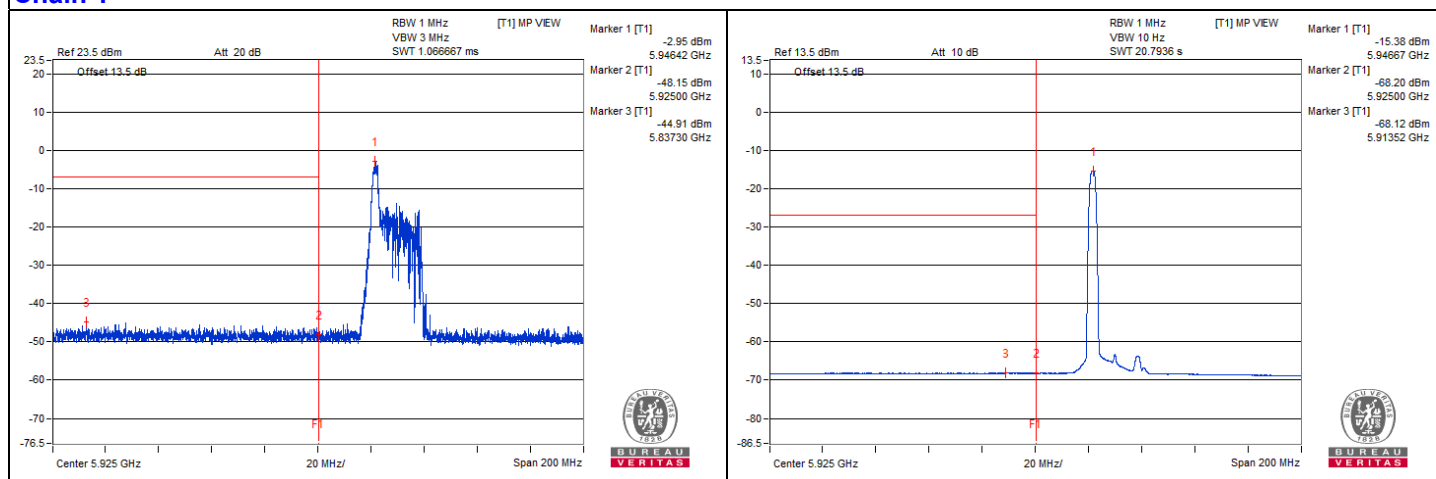

802.11be (EHT20) 26-tone RU - Channel 45


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12346.87	59.06 PK	74	-14.94	-48.25	-46.66	8.17	-36.20
2	12348.43	48.68 AV	54	-5.32	-57.83	-57.69	8.17	-46.58
3	18525.5	50.17 PK	74	-23.83	-55.68	-56.96	8.17	-45.09
4	18519.75	40.84 AV	54	-13.16	-65.51	-65.7	8.17	-54.42


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

Chain 0

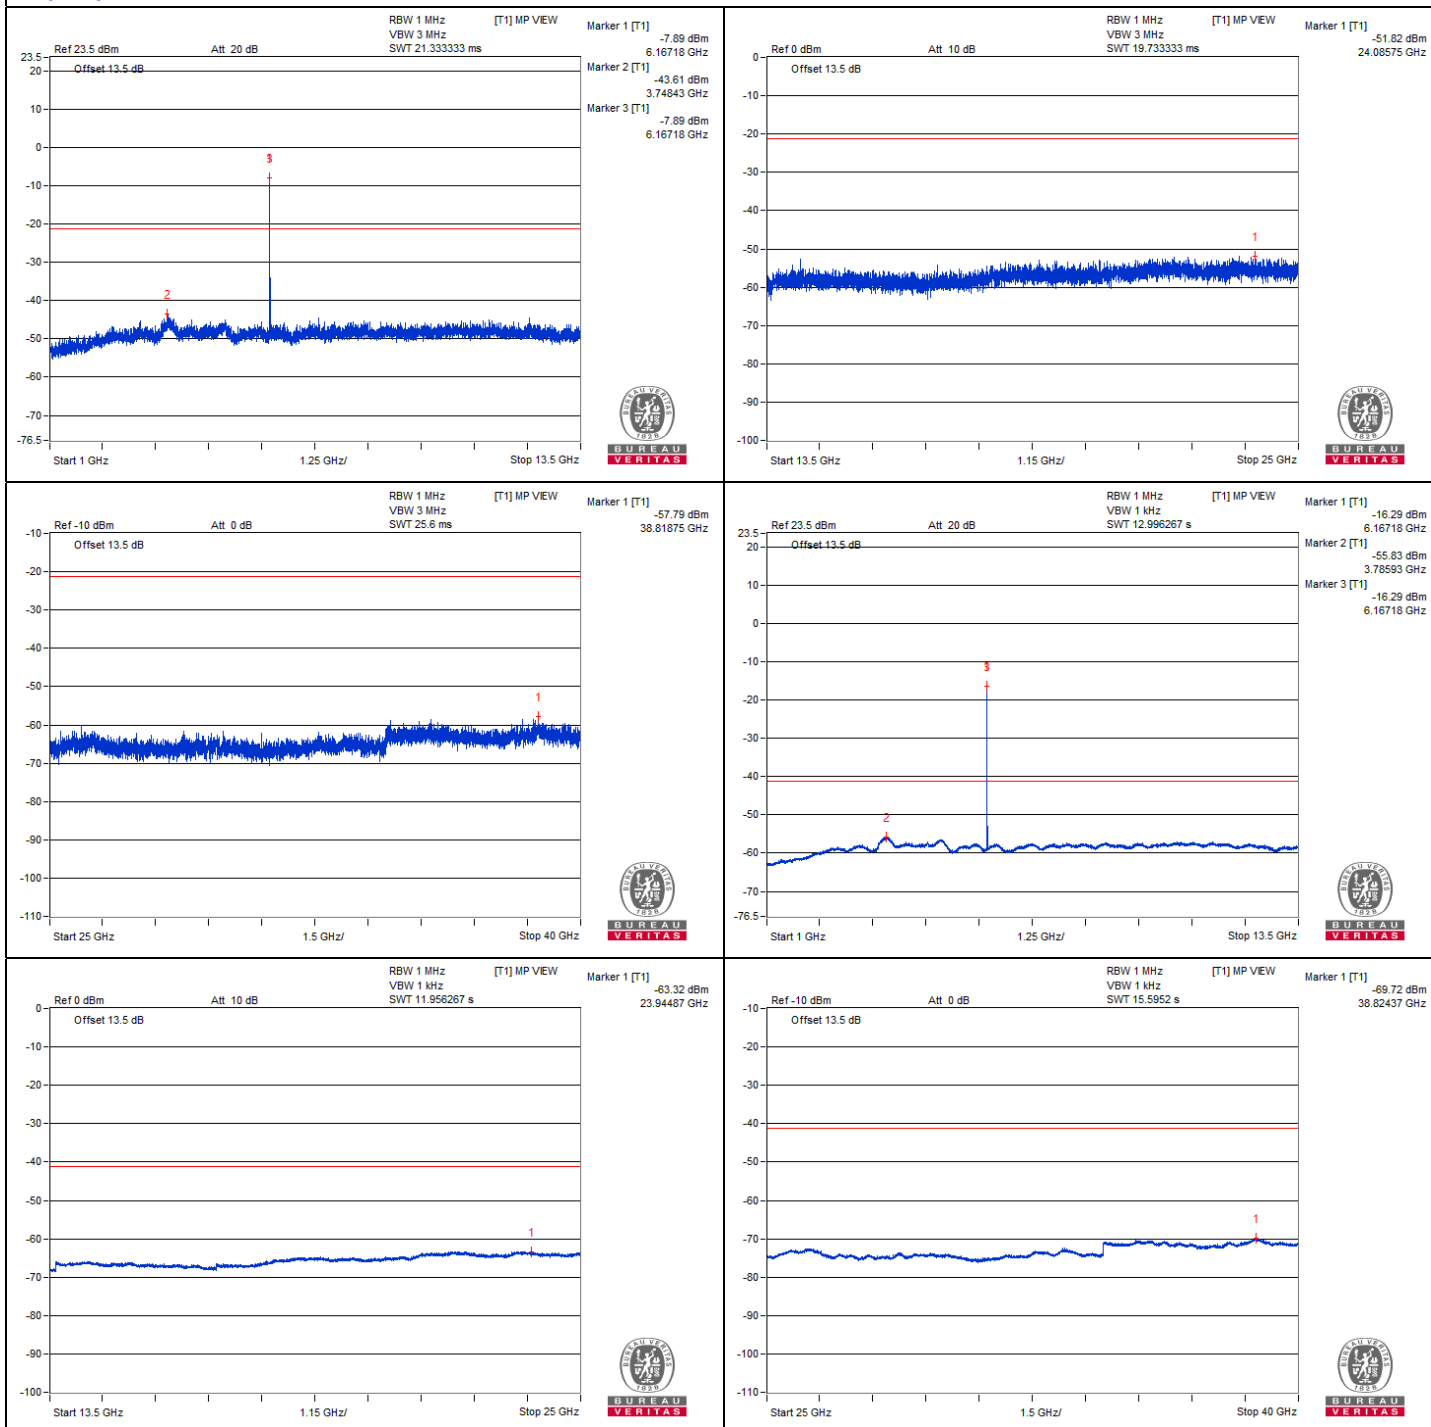

Chain 1

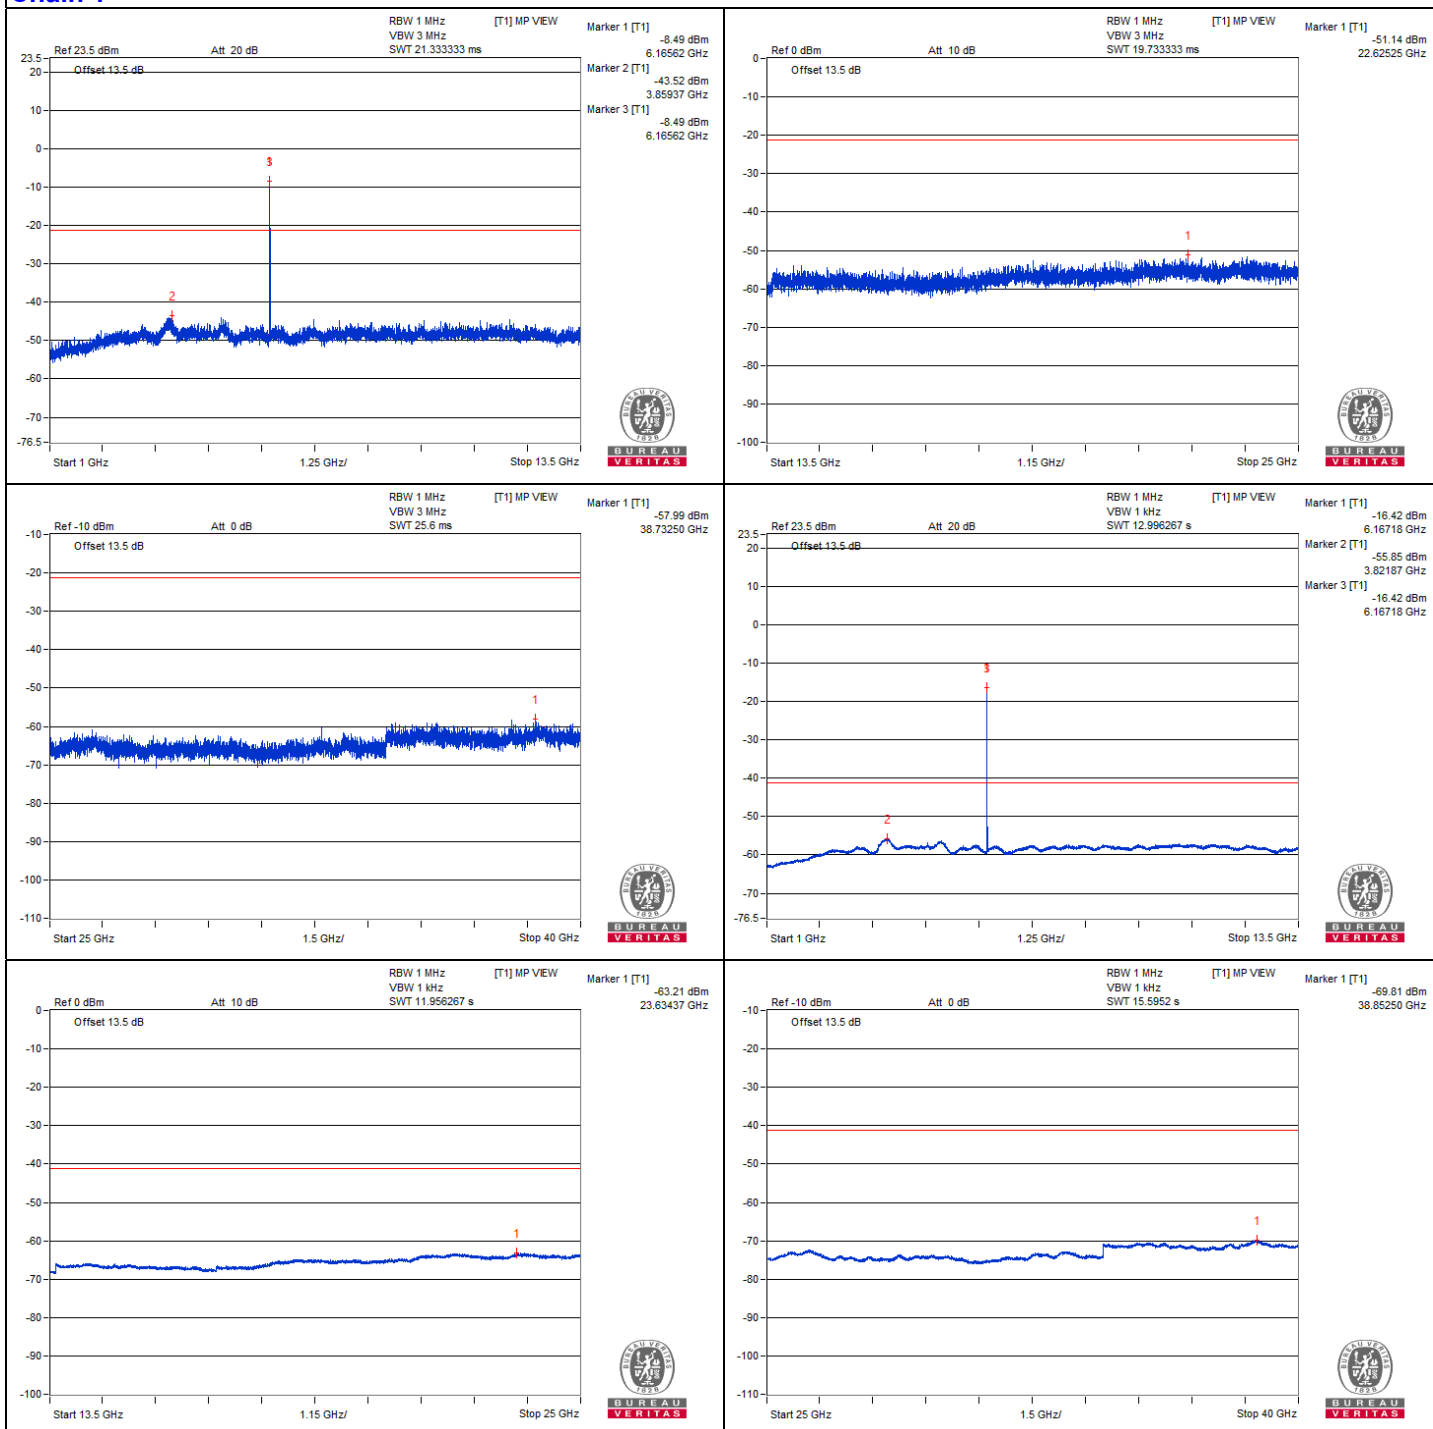

802.11be (EHT20) 26-tone RU - Channel 93


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12832.81	58.98 PK	88.2	-29.22	-47.52	-47.4	8.17	-36.28
2	#12829.68	48.01 AV	68.2	-20.19	-58.54	-58.33	8.17	-47.25
3	19248.56	51.18 PK	74	-22.82	-54.46	-56.25	8.17	-44.08
4	19242.81	41.36 AV	54	-12.64	-65.04	-65.12	8.17	-53.90


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

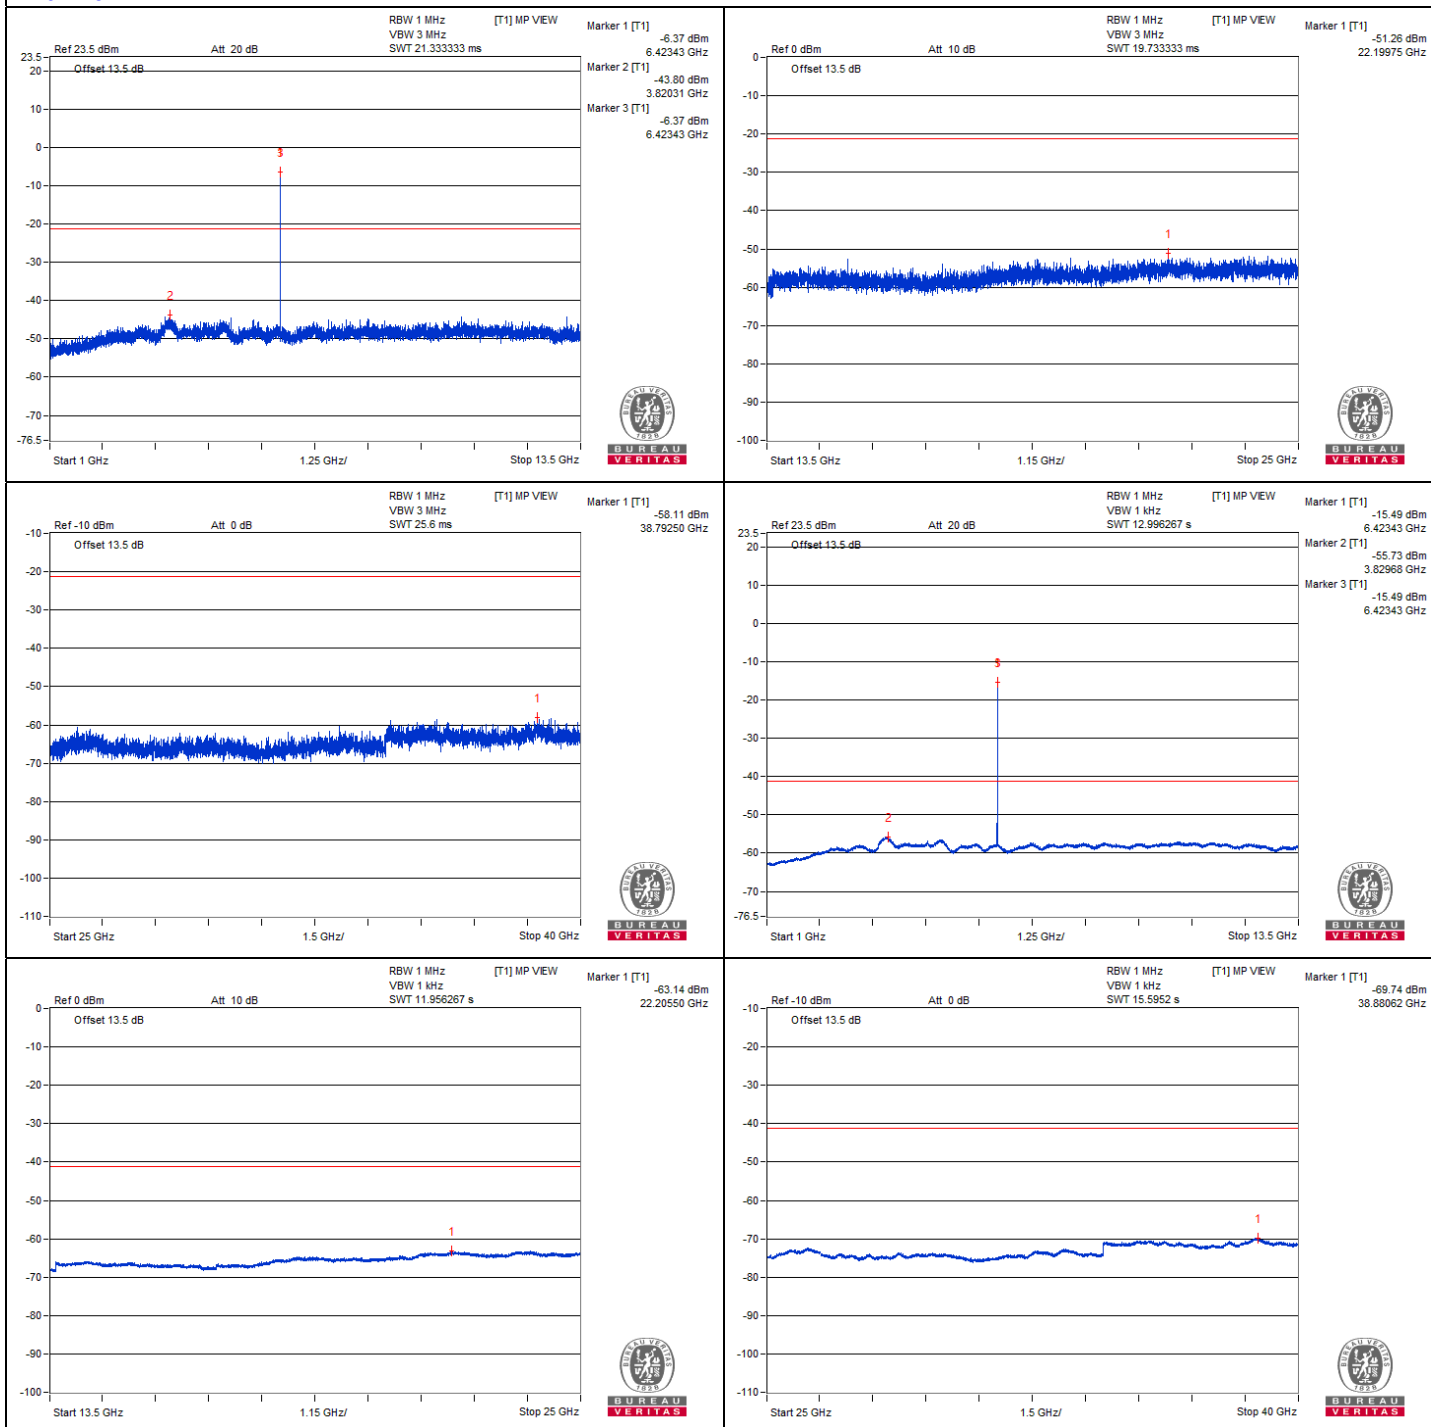

Chain 1

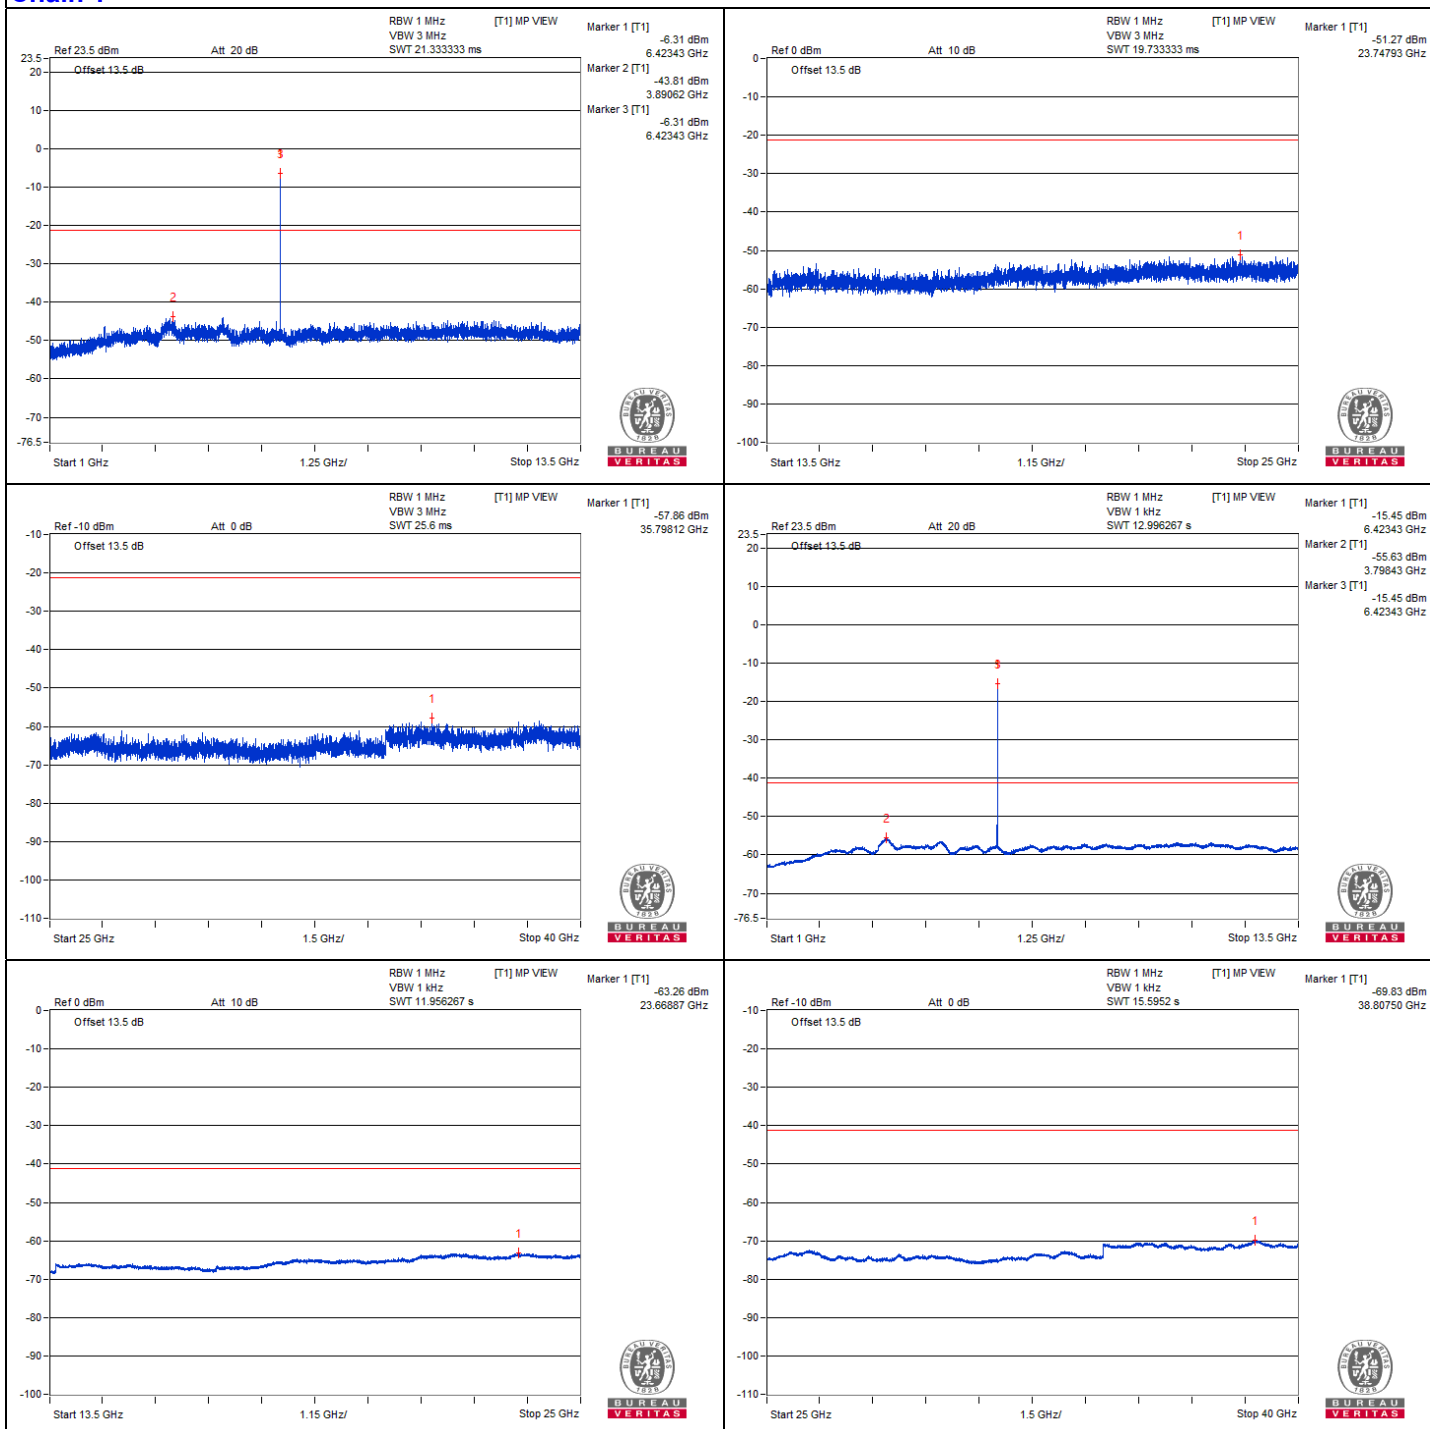

802.11be (EHT20) 26-tone RU - Channel 97







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12865.62	58.21 PK	88.2	-29.99	-49.2	-47.43	8.17	-37.05
2	#12873.43	47.94 AV	68.2	-20.26	-58.44	-58.57	8.17	-47.32
3	19296	51.01 PK	74	-22.99	-55.18	-55.69	8.17	-44.25
4	19301.75	41.24 AV	54	-12.76	-65.15	-65.25	8.17	-54.02


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

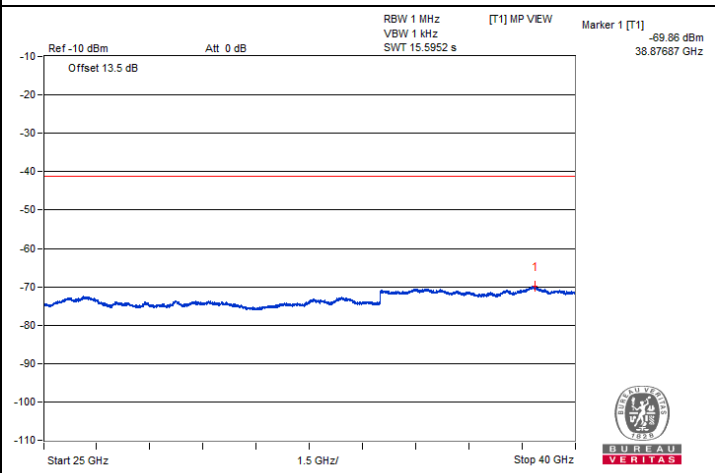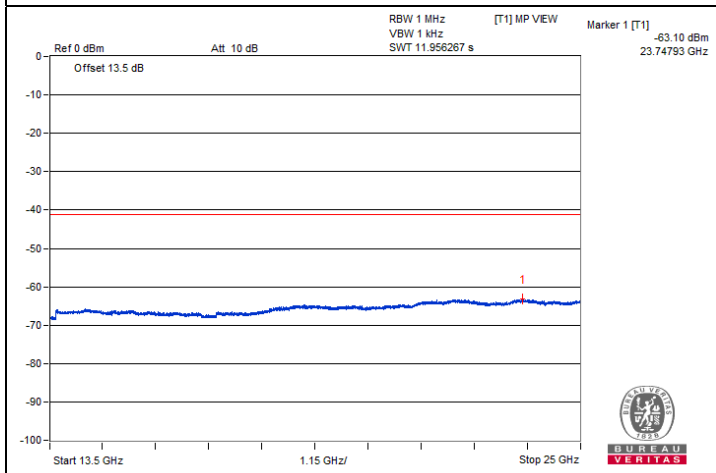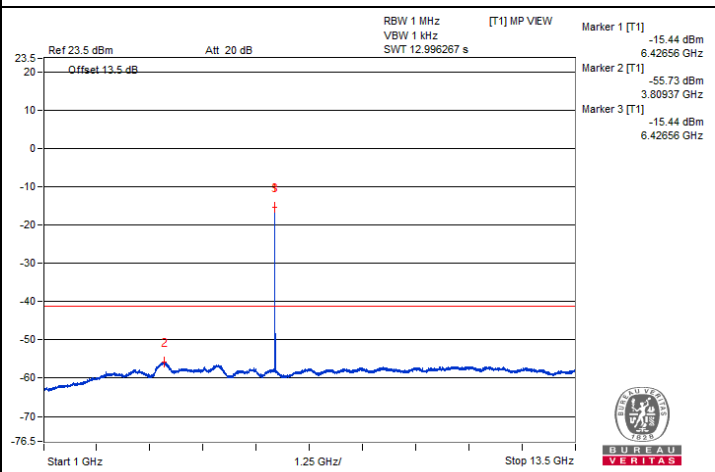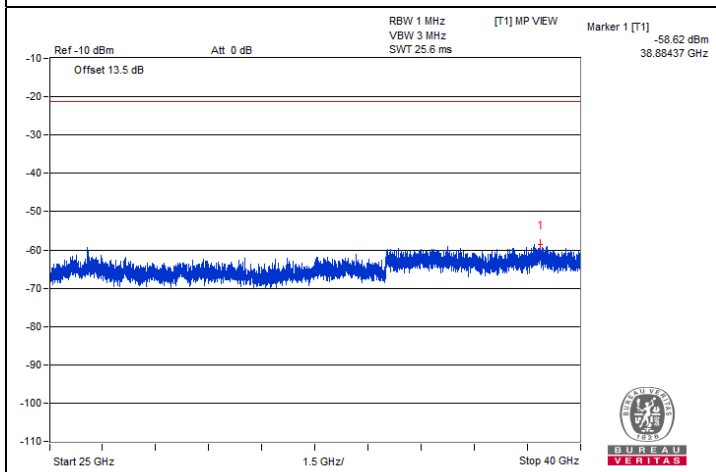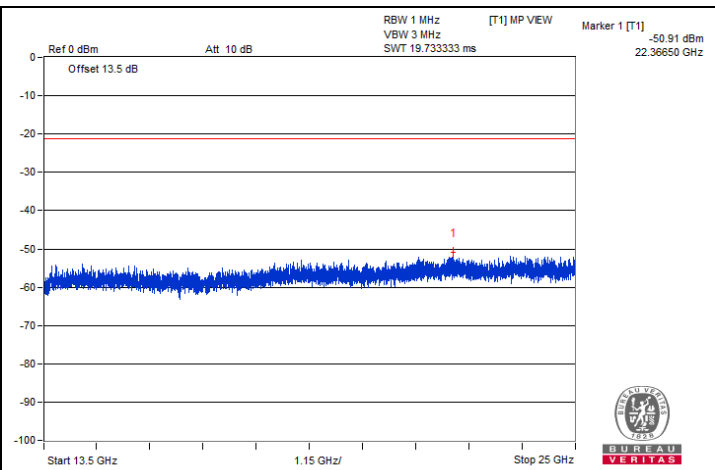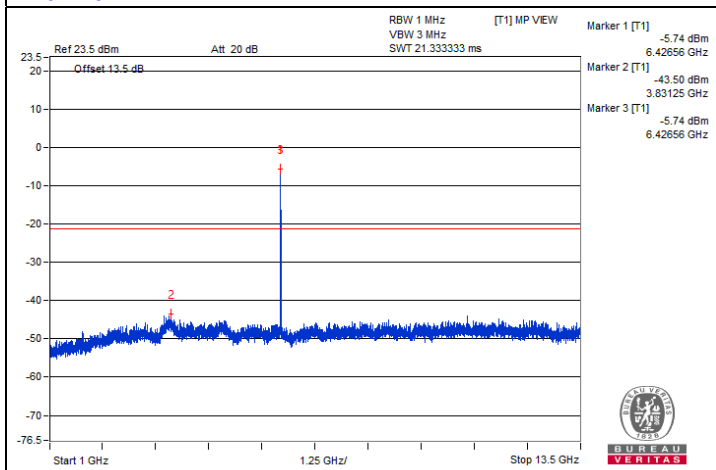

Chain 1

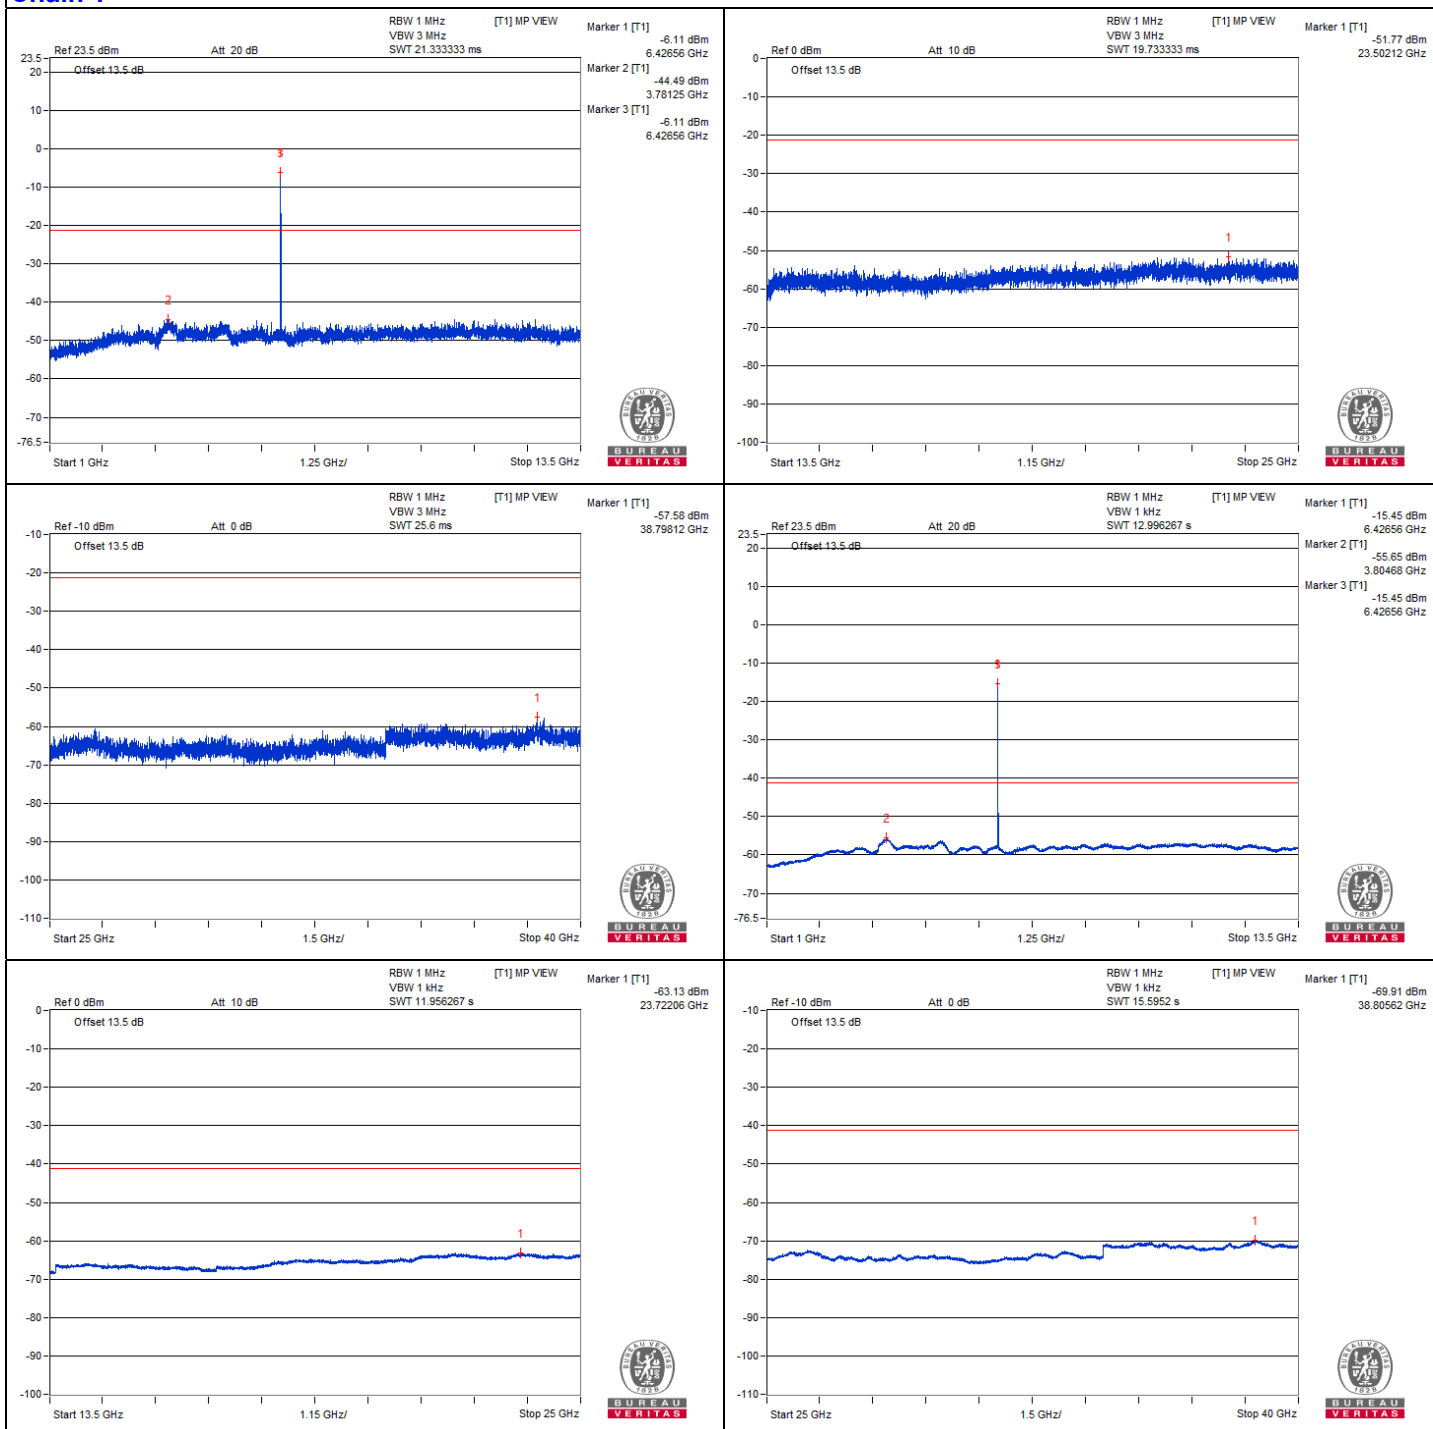

802.11be (EHT20) 26-tone RU - Channel 105







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12948.43	58.83 PK	88.2	-29.37	-47.45	-47.77	8.17	-36.43
2	#12945.31	47.68 AV	68.2	-20.52	-58.81	-58.71	8.17	-47.58
3	19423.93	50.94 PK	74	-23.06	-54.2	-57.36	8.17	-44.32
4	19419.62	41.22 AV	54	-12.78	-65.32	-65.13	8.17	-54.04


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

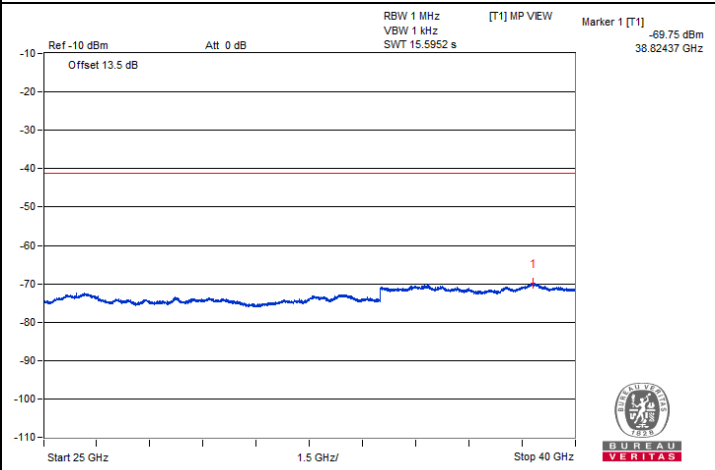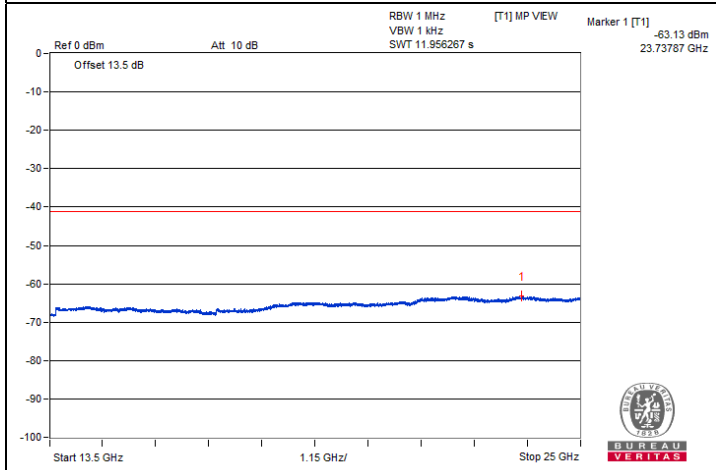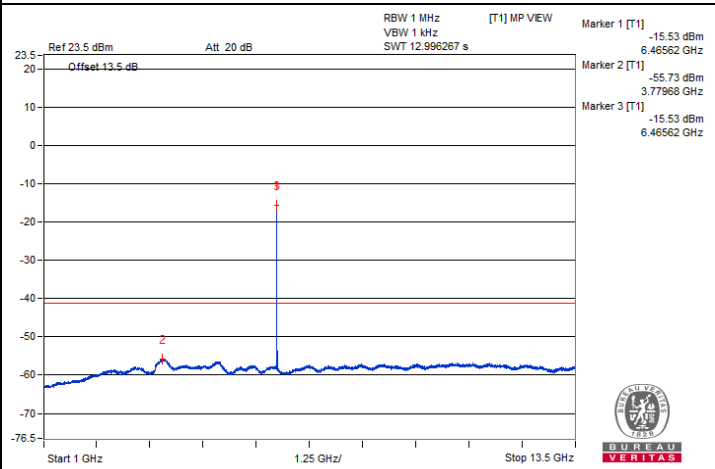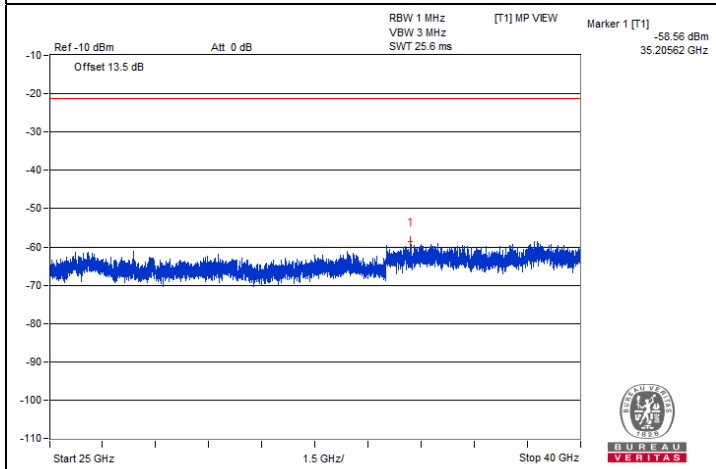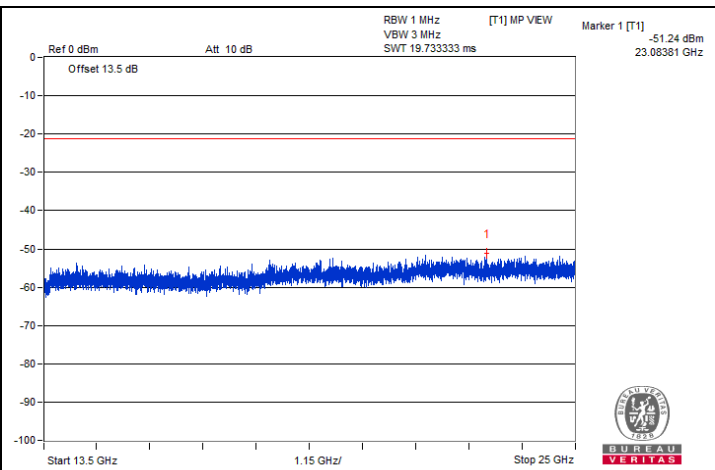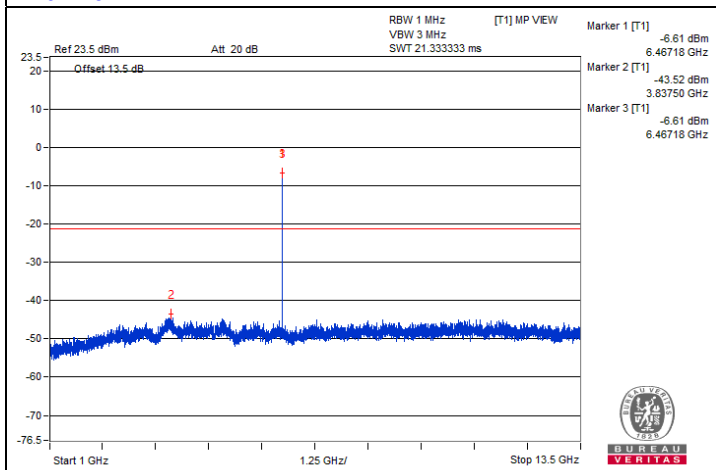

Chain 1

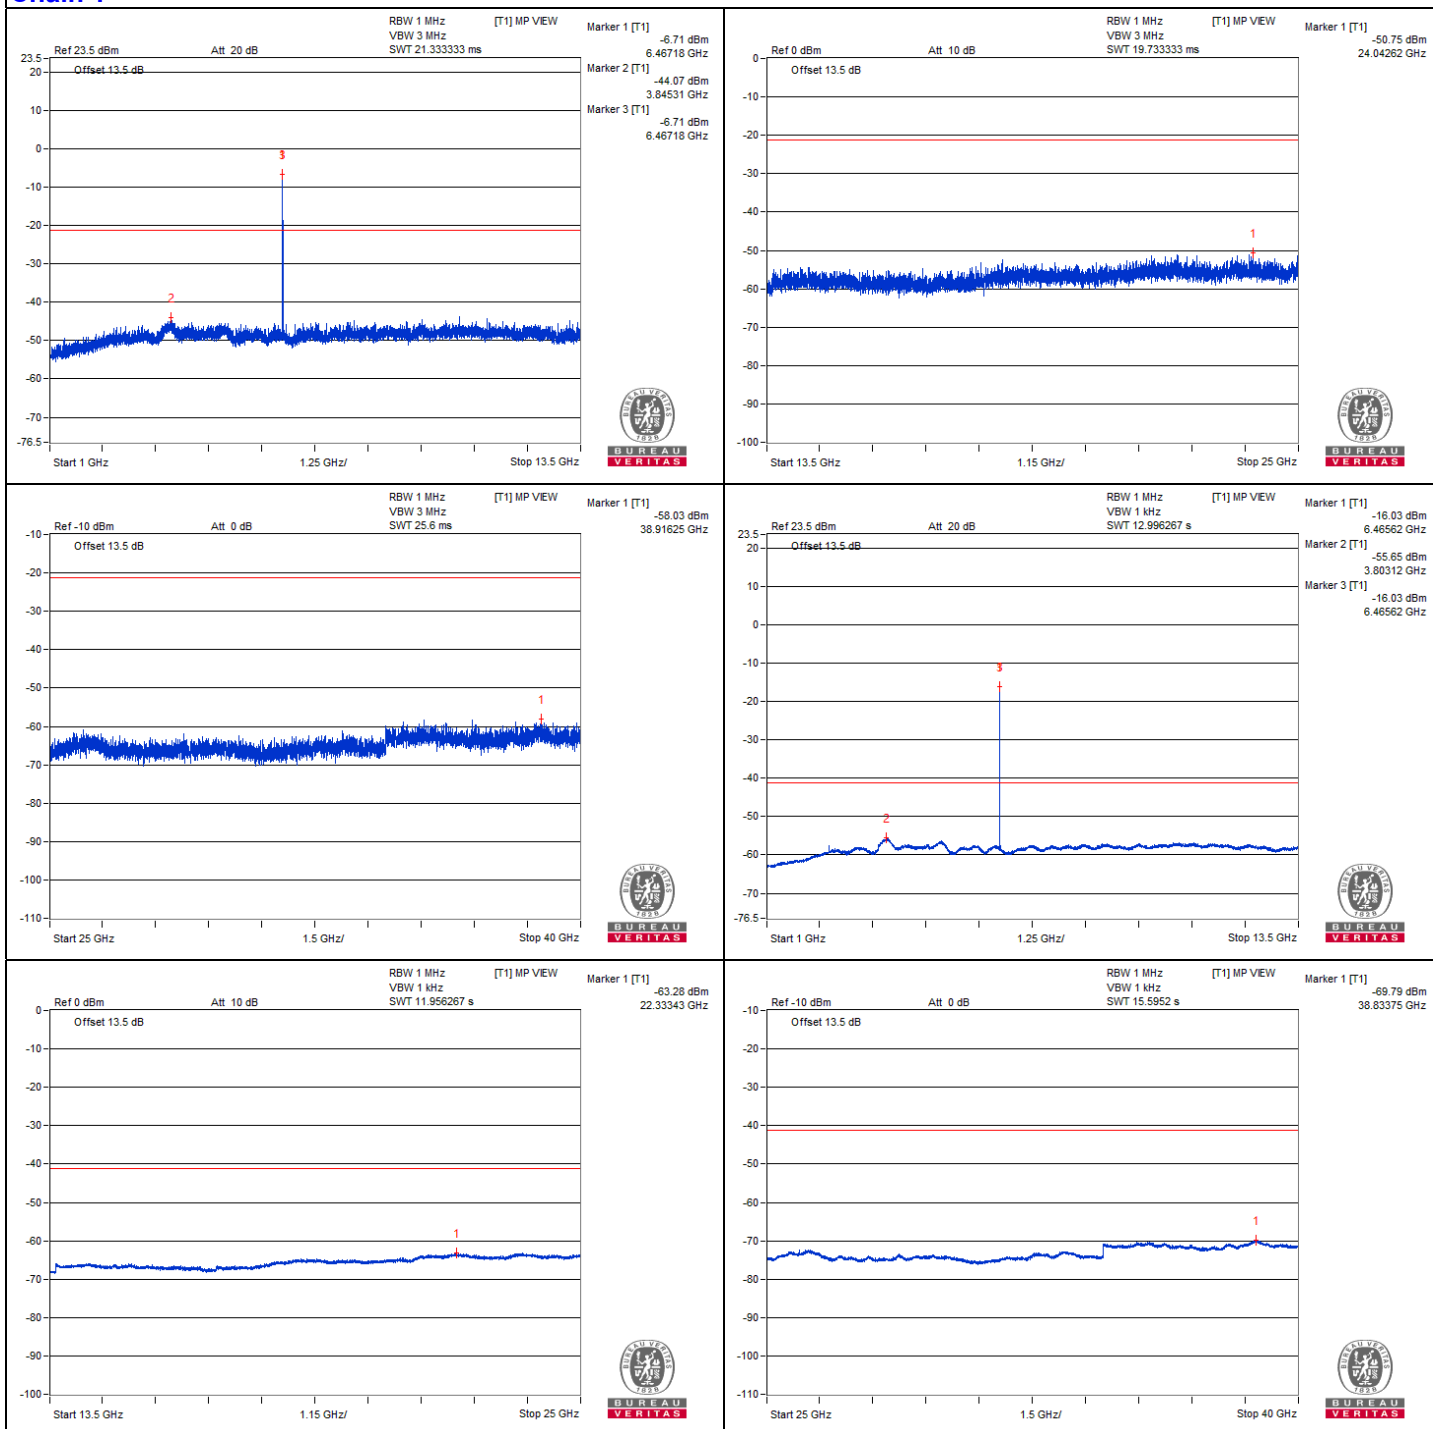

802.11be (EHT20) 26-tone RU - Channel 113







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13025	58.61 PK	88.2	-29.59	-47.82	-47.84	8.17	-36.65
2	#13037.5	47.64 AV	68.2	-20.56	-58.88	-58.72	8.17	-47.62
3	19550.43	50.38 PK	74	-23.62	-55.75	-56.39	8.17	-44.88
4	19540.37	40.97 AV	54	-13.03	-65.39	-65.56	8.17	-54.29


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

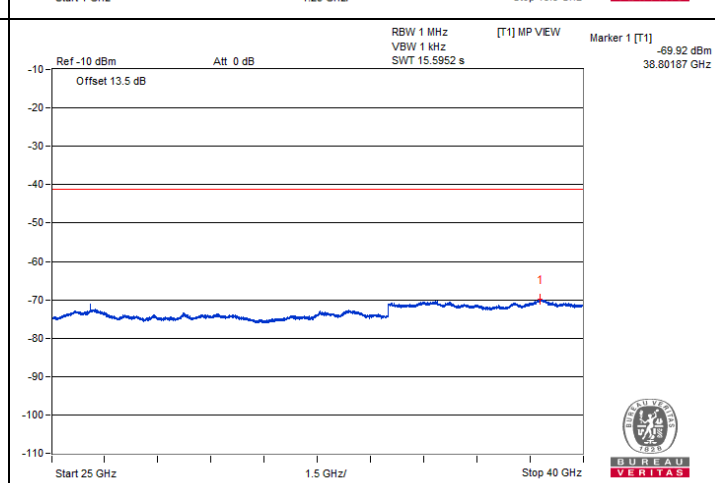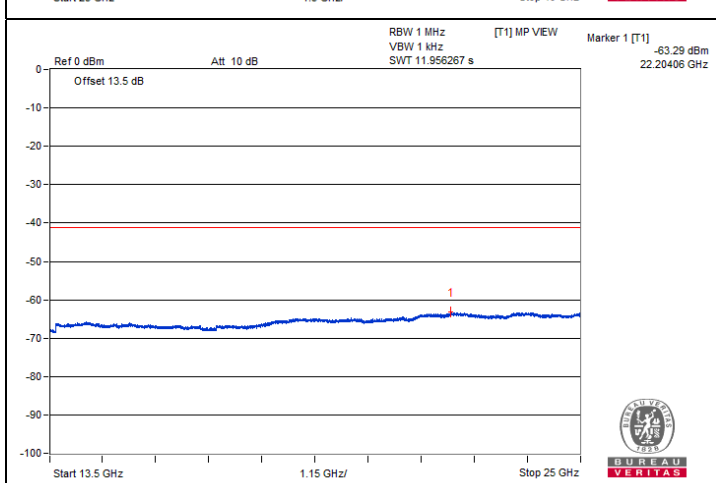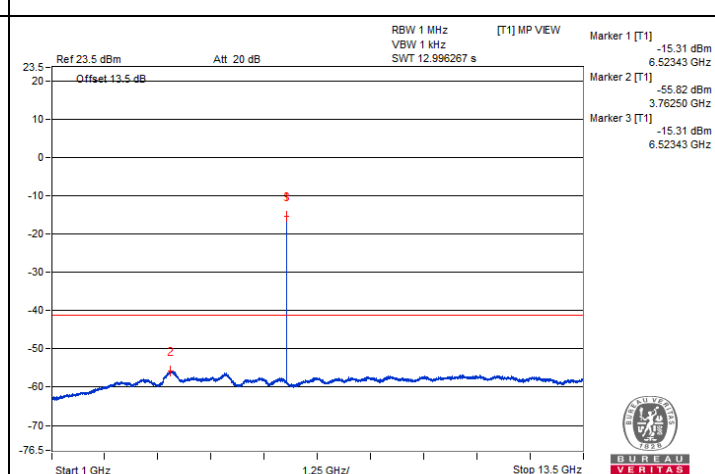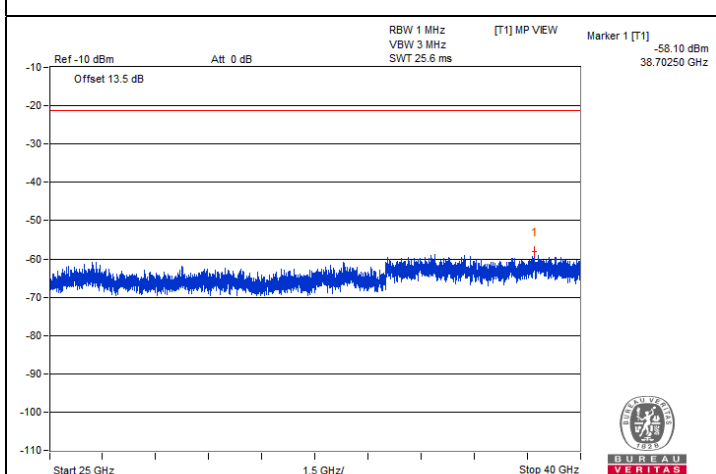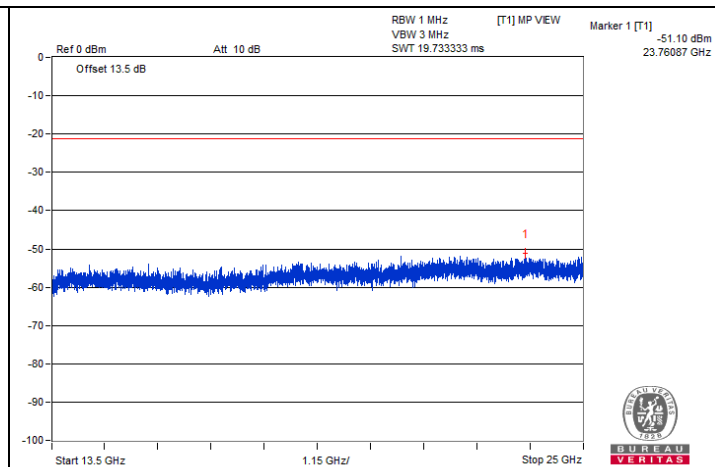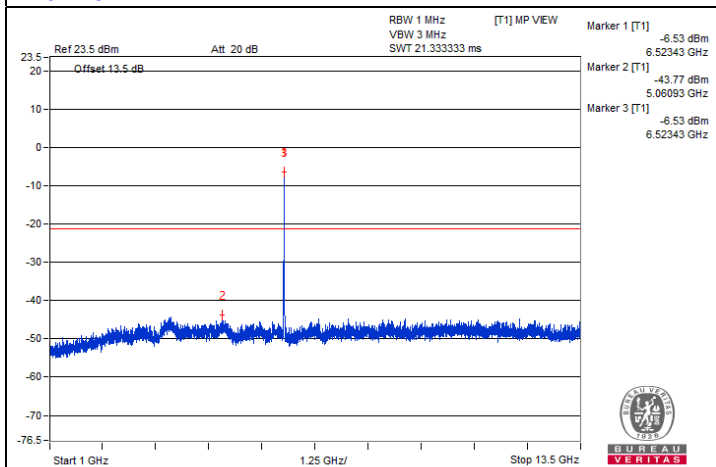

Chain 1

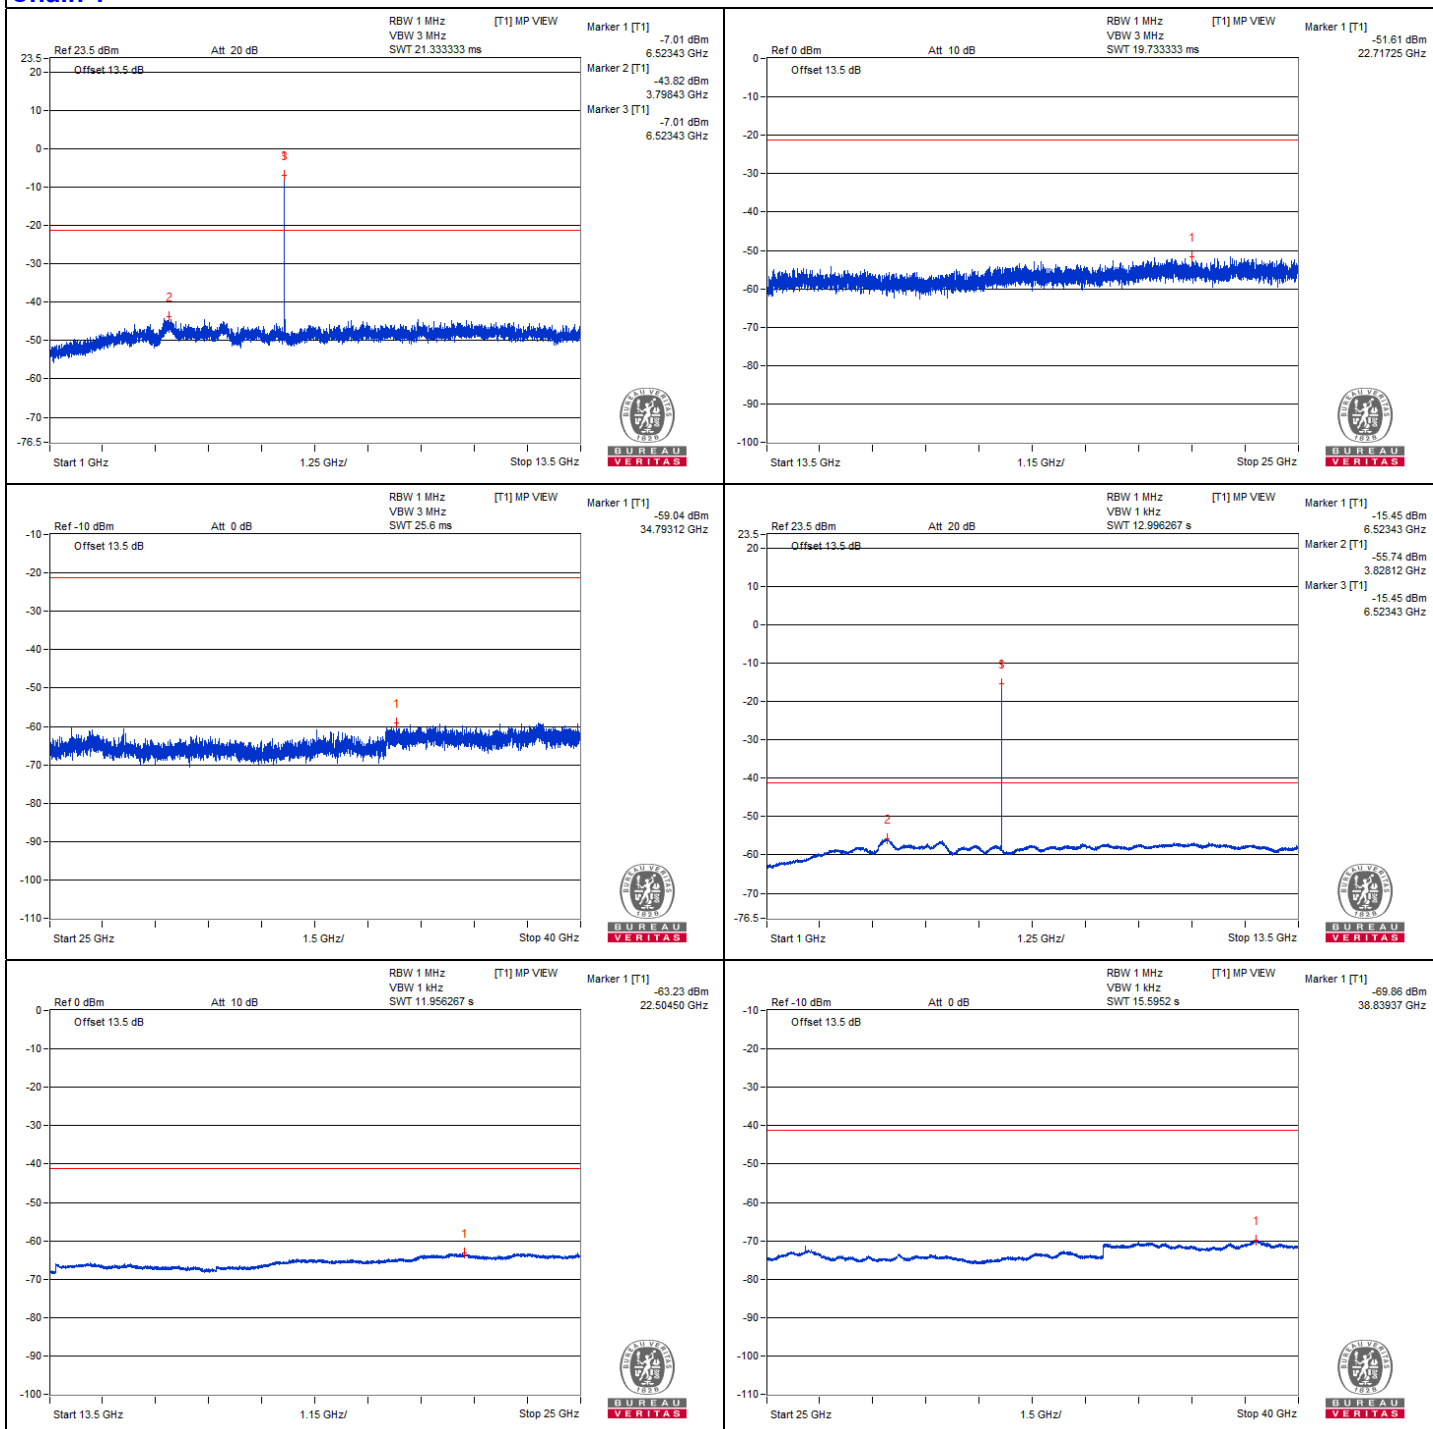

802.11be (EHT20) 26-tone RU - Channel 117


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13070.31	58.78 PK	88.2	-29.42	-47.02	-48.42	8.17	-36.48
2	#13067.18	47.91 AV	68.2	-20.29	-58.68	-58.38	8.17	-47.35
3	19597.87	50.4 PK	74	-23.6	-56.26	-55.84	8.17	-44.86
4	19600.75	41.02 AV	54	-12.98	-65.16	-65.7	8.17	-54.24


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

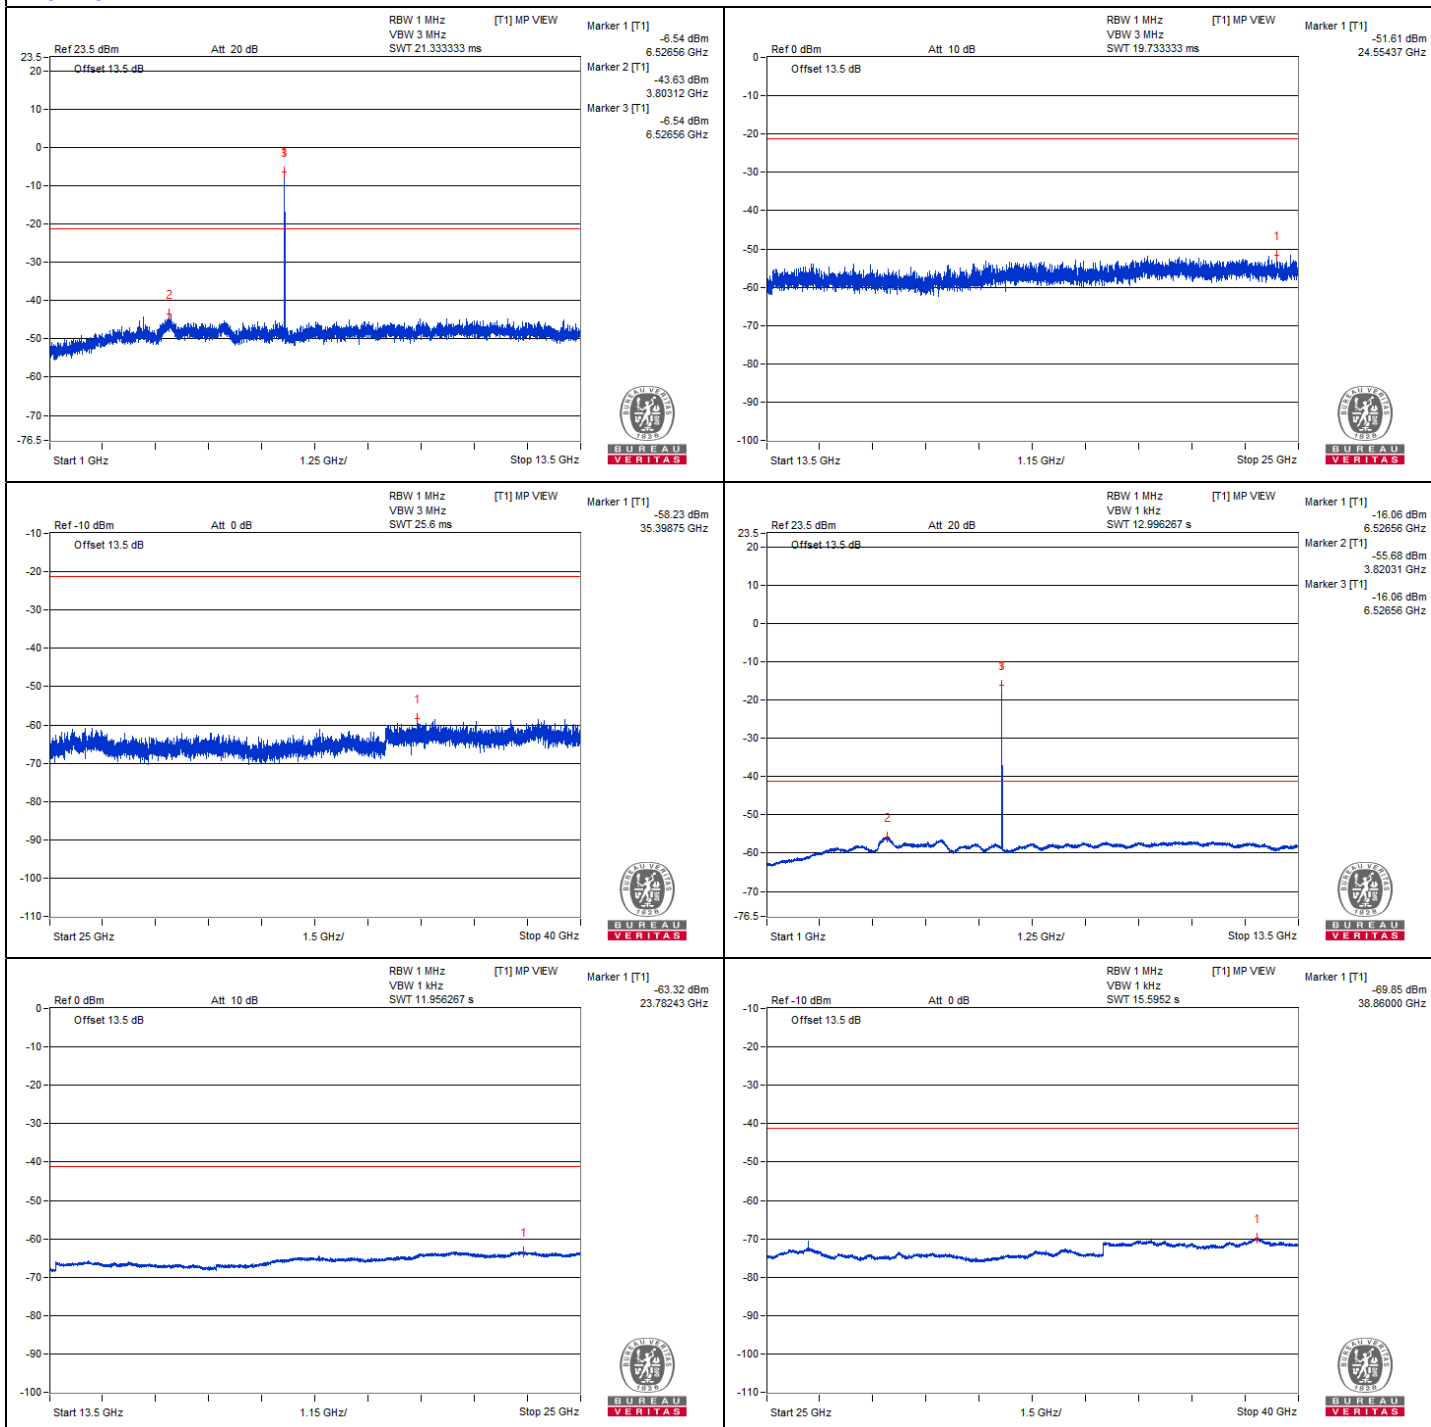

Chain 1

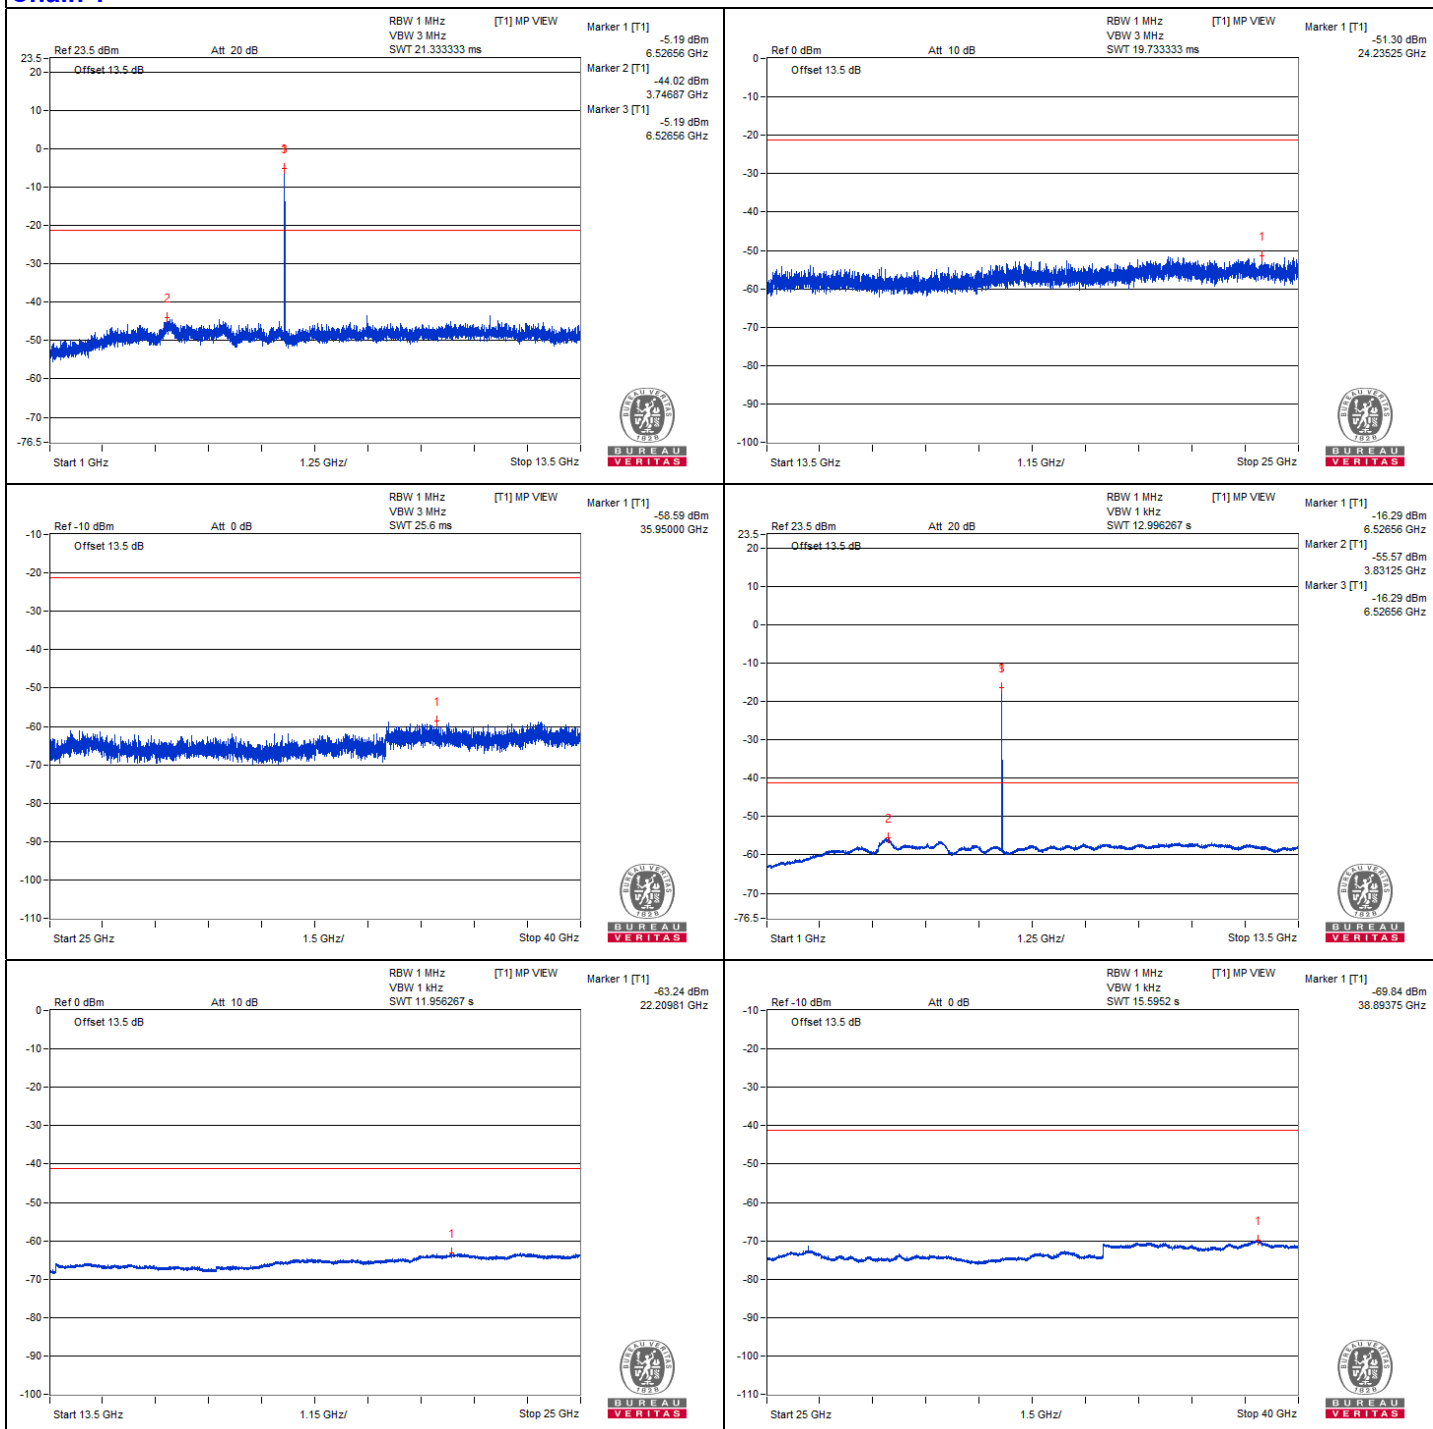

802.11be (EHT20) 26-tone RU - Channel 149


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13395.31	58.89 PK	74	-15.11	-48.55	-46.74	8.17	-36.37
2	13384.37	48.17 AV	54	-5.83	-58.31	-58.23	8.17	-47.09
3	20082.31	51.25 PK	74	-22.75	-54.04	-56.76	8.17	-44.01
4	20076.56	41.22 AV	54	-12.78	-65.21	-65.24	8.17	-54.04


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

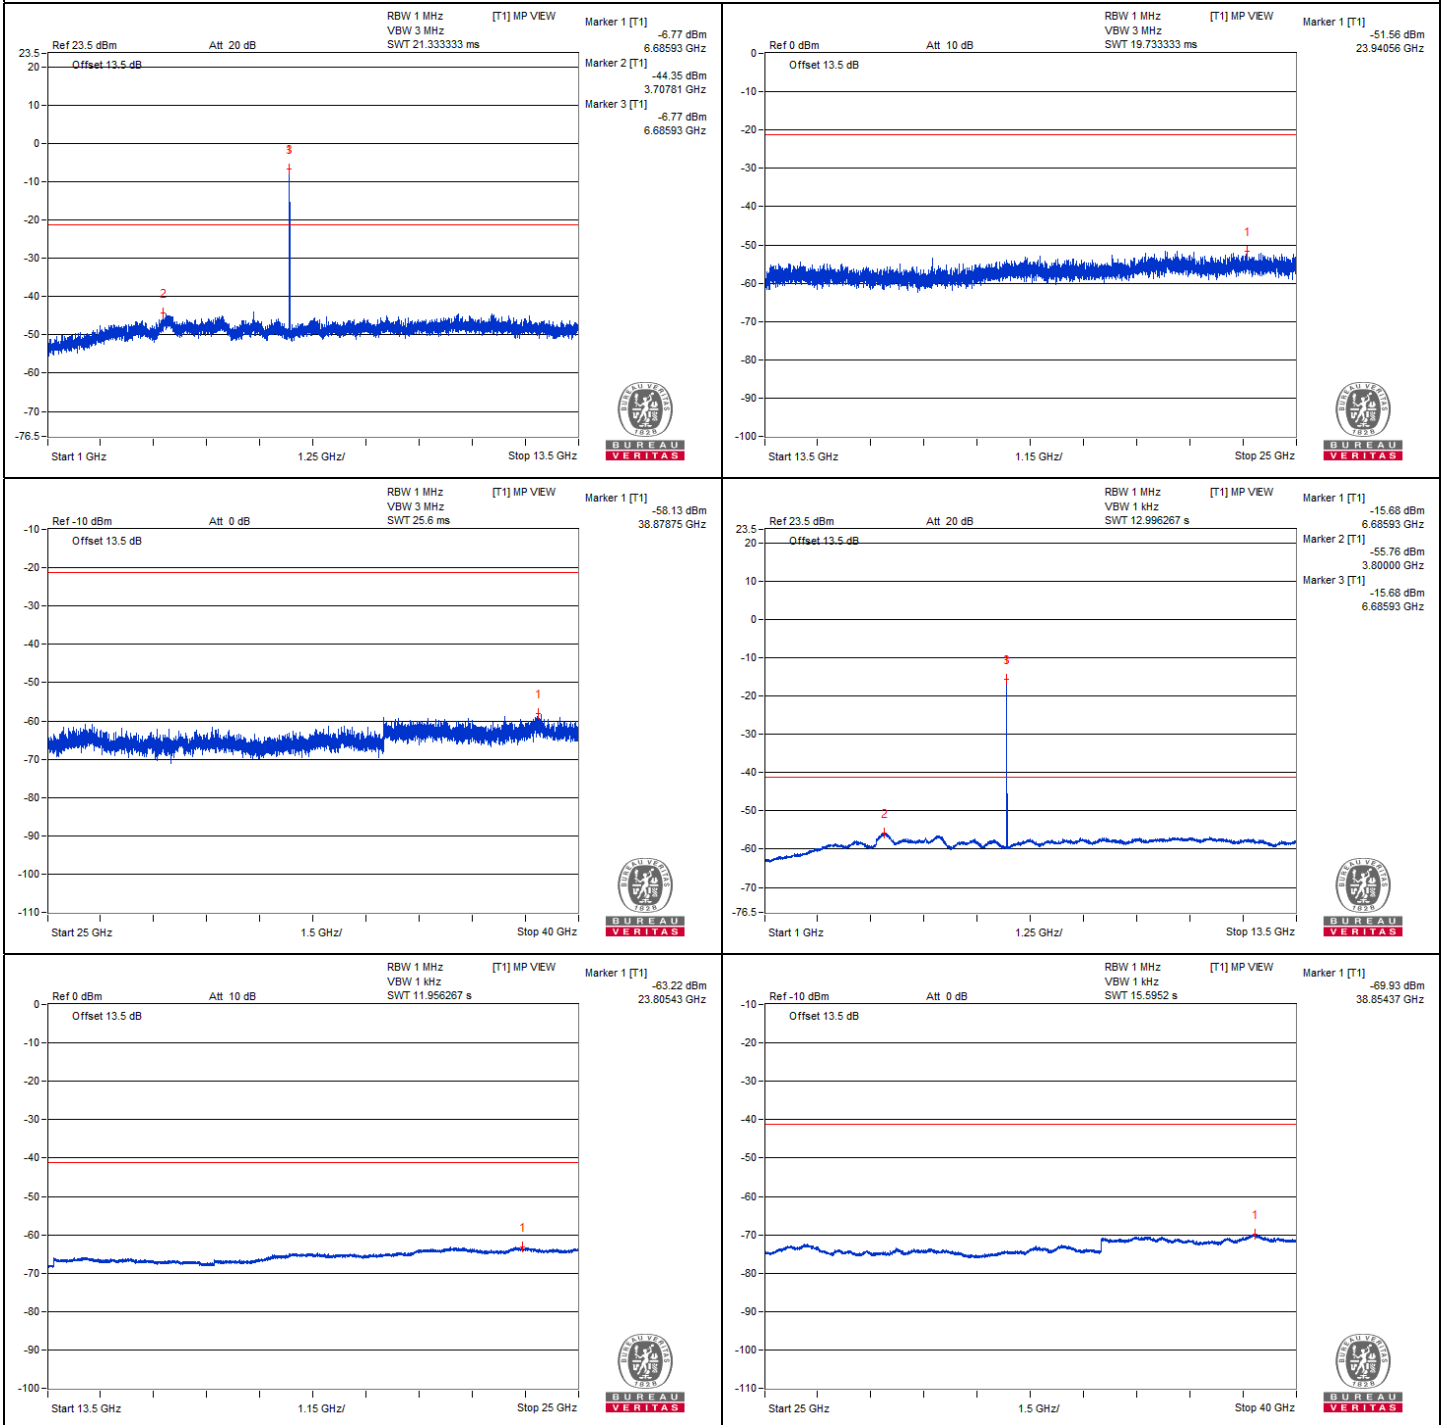

Chain 1

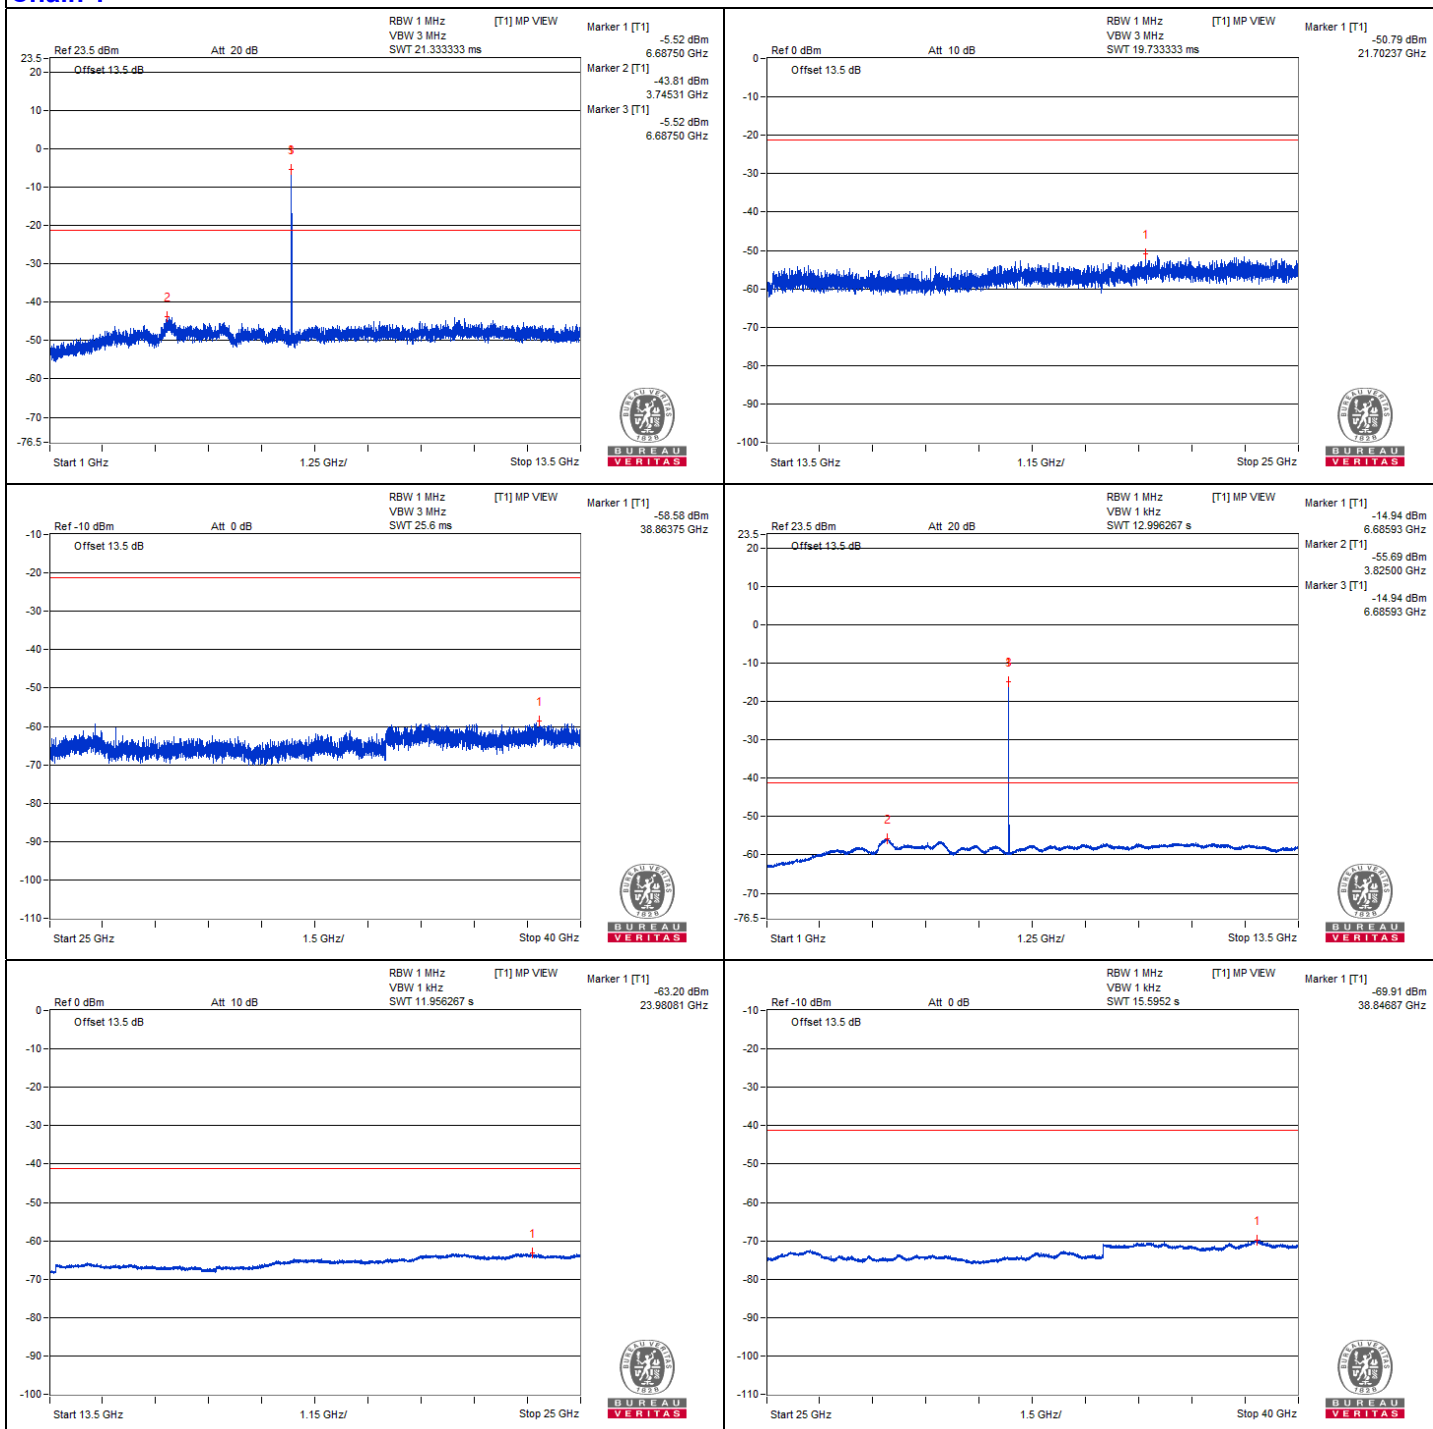

802.11be (EHT20) 26-tone RU - Channel 181







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13709.87	49.04 PK	88.2	-39.16	-57.85	-57	8.17	-46.22
2	#13704.12	39.69 AV	68.2	-28.51	-66.9	-66.61	8.17	-55.57
3	20568.18	51.07 PK	74	-22.93	-56.59	-54.42	8.17	-44.19
4	20562.43	41.16 AV	54	-12.84	-65.31	-65.26	8.17	-54.10


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

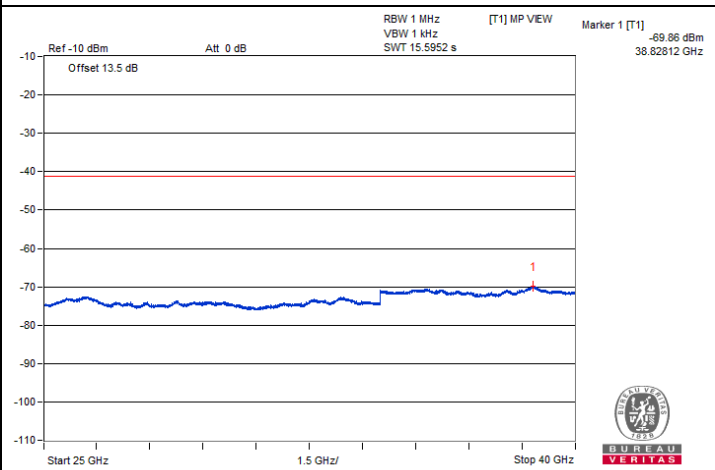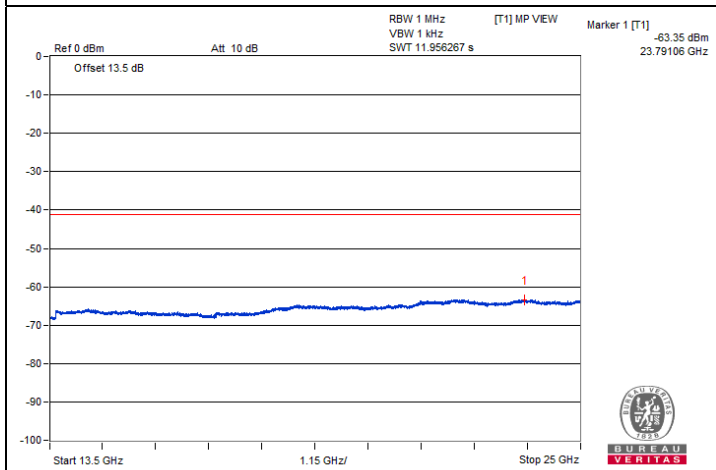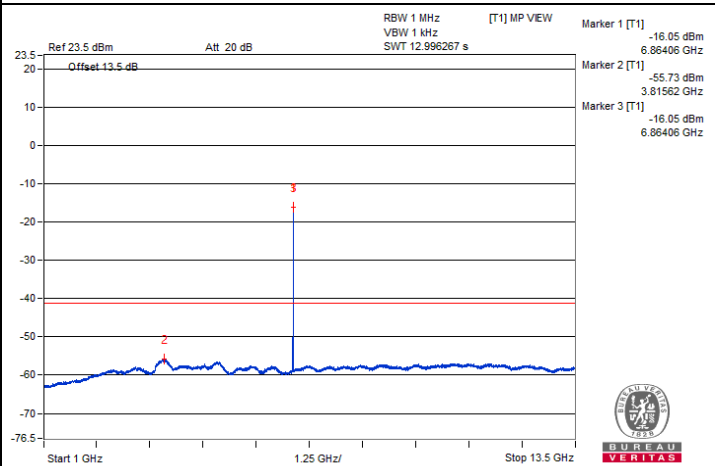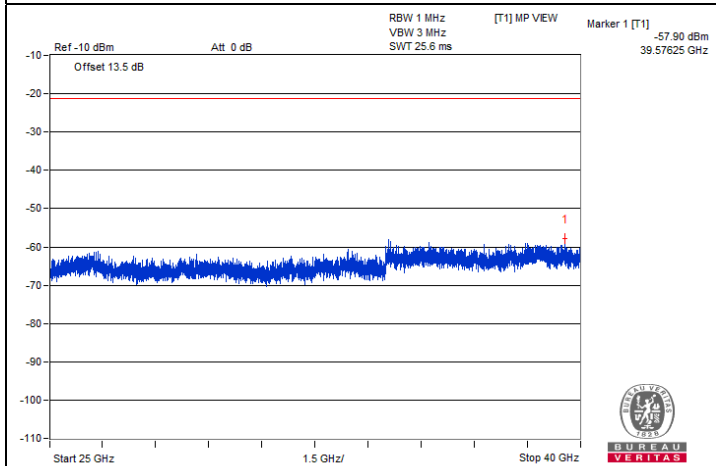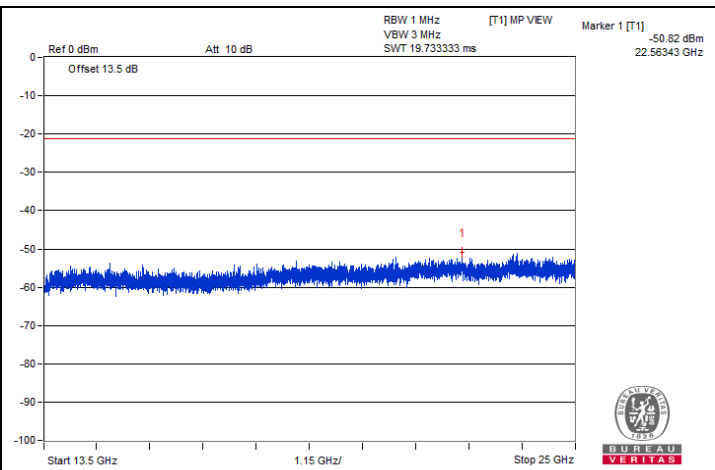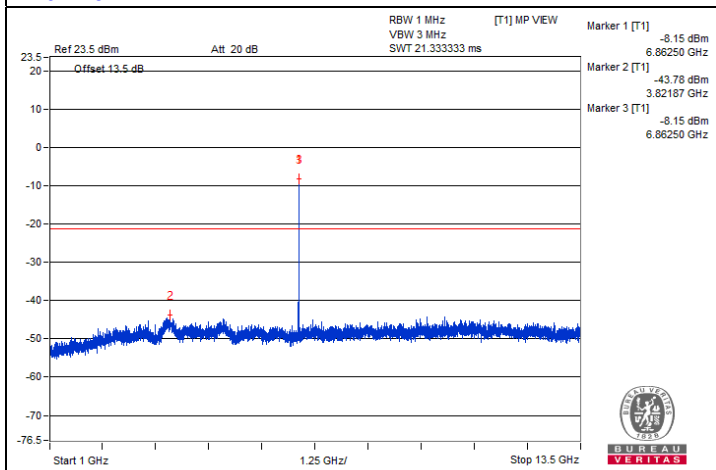

Chain 1

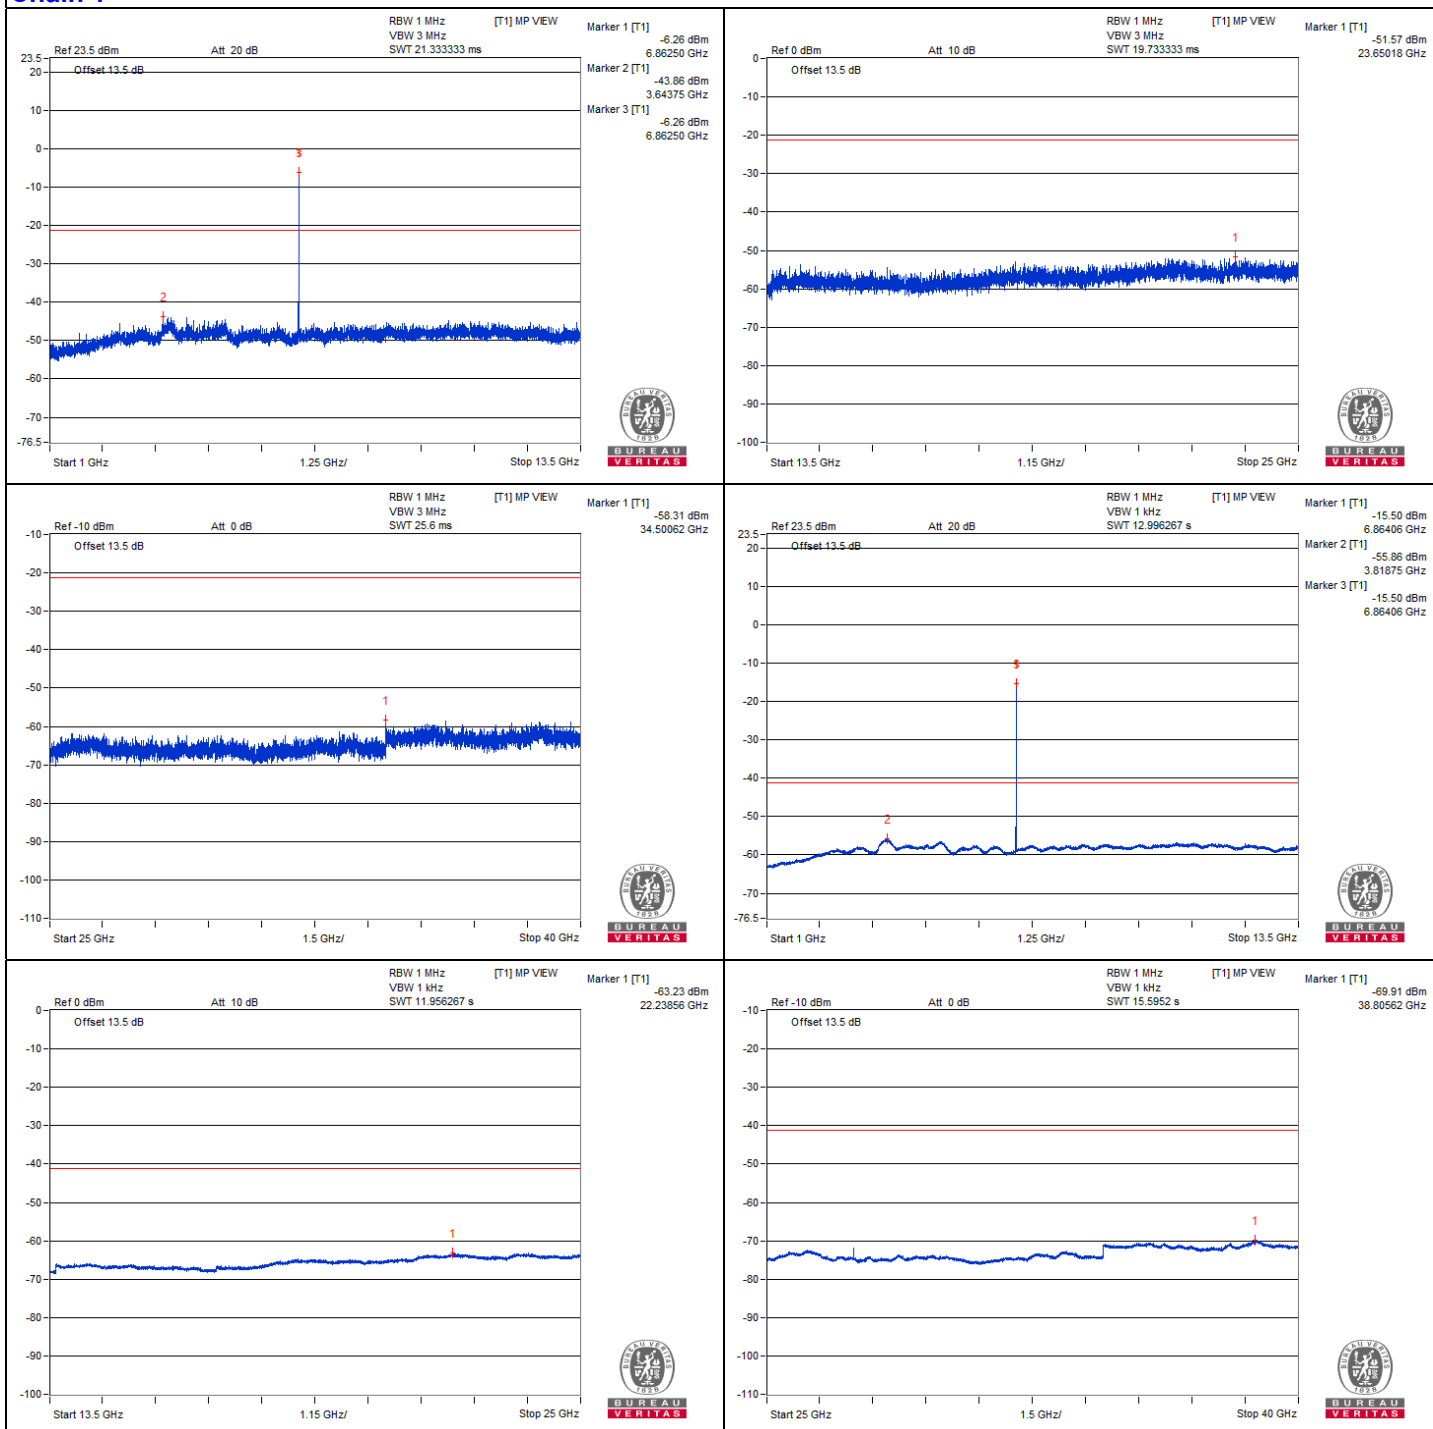

802.11be (EHT20) 26-tone RU - Channel 185


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13754.43	49 PK	88.2	-39.2	-58.07	-56.89	8.17	-46.26
2	#13754.43	39.87 AV	68.2	-28.33	-66.5	-66.65	8.17	-55.39
3	20634.31	51.87 PK	74	-22.13	-54.3	-54.85	8.17	-43.39
4	20630	41 AV	54	-13	-65.34	-65.55	8.17	-54.26


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

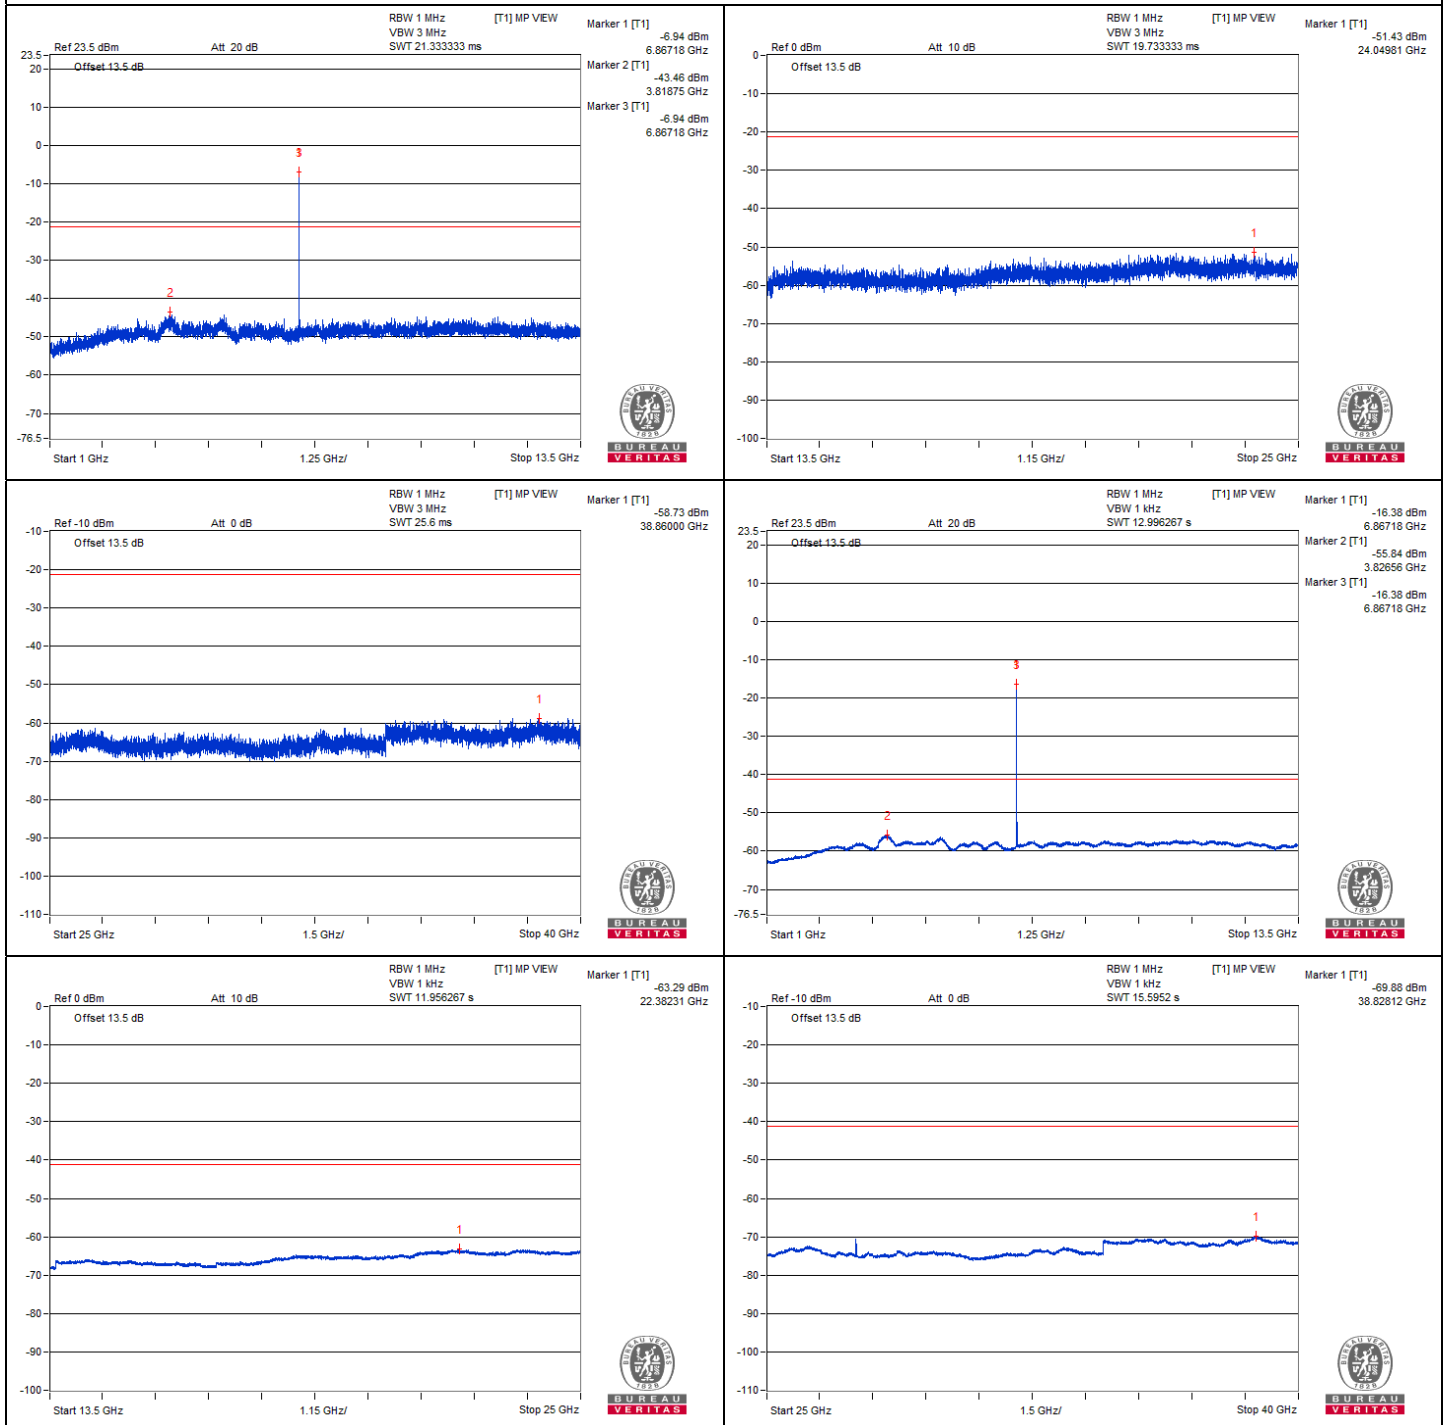

Chain 1

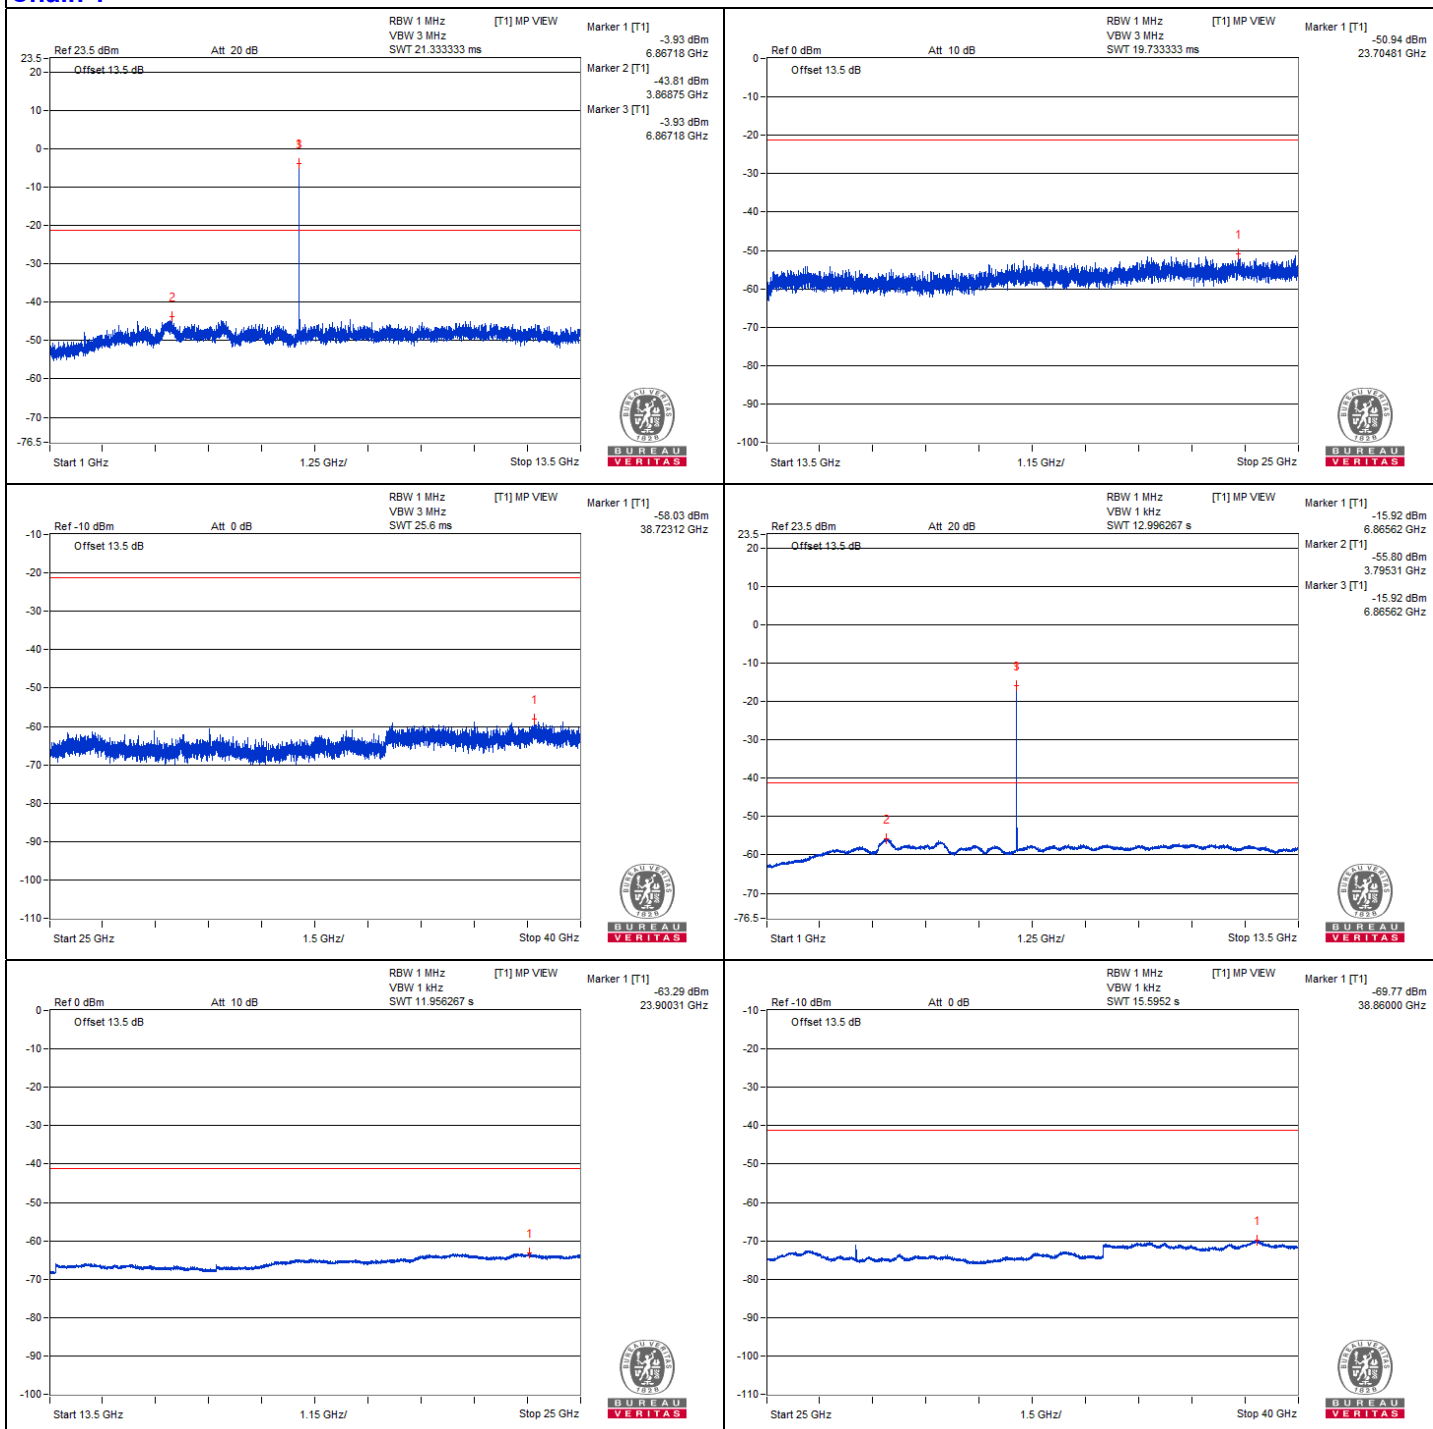

802.11be (EHT20) 26-tone RU - Channel 209


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13983	48.96 PK	88.2	-39.24	-56.96	-58.07	8.17	-46.30
2	#13998.81	39.73 AV	68.2	-28.47	-66.77	-66.66	8.17	-55.53
3	20989.37	51.1 PK	74	-22.9	-55.22	-55.46	8.17	-44.16
4	20975	41.36 AV	54	-12.64	-65.32	-64.86	8.17	-53.90


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

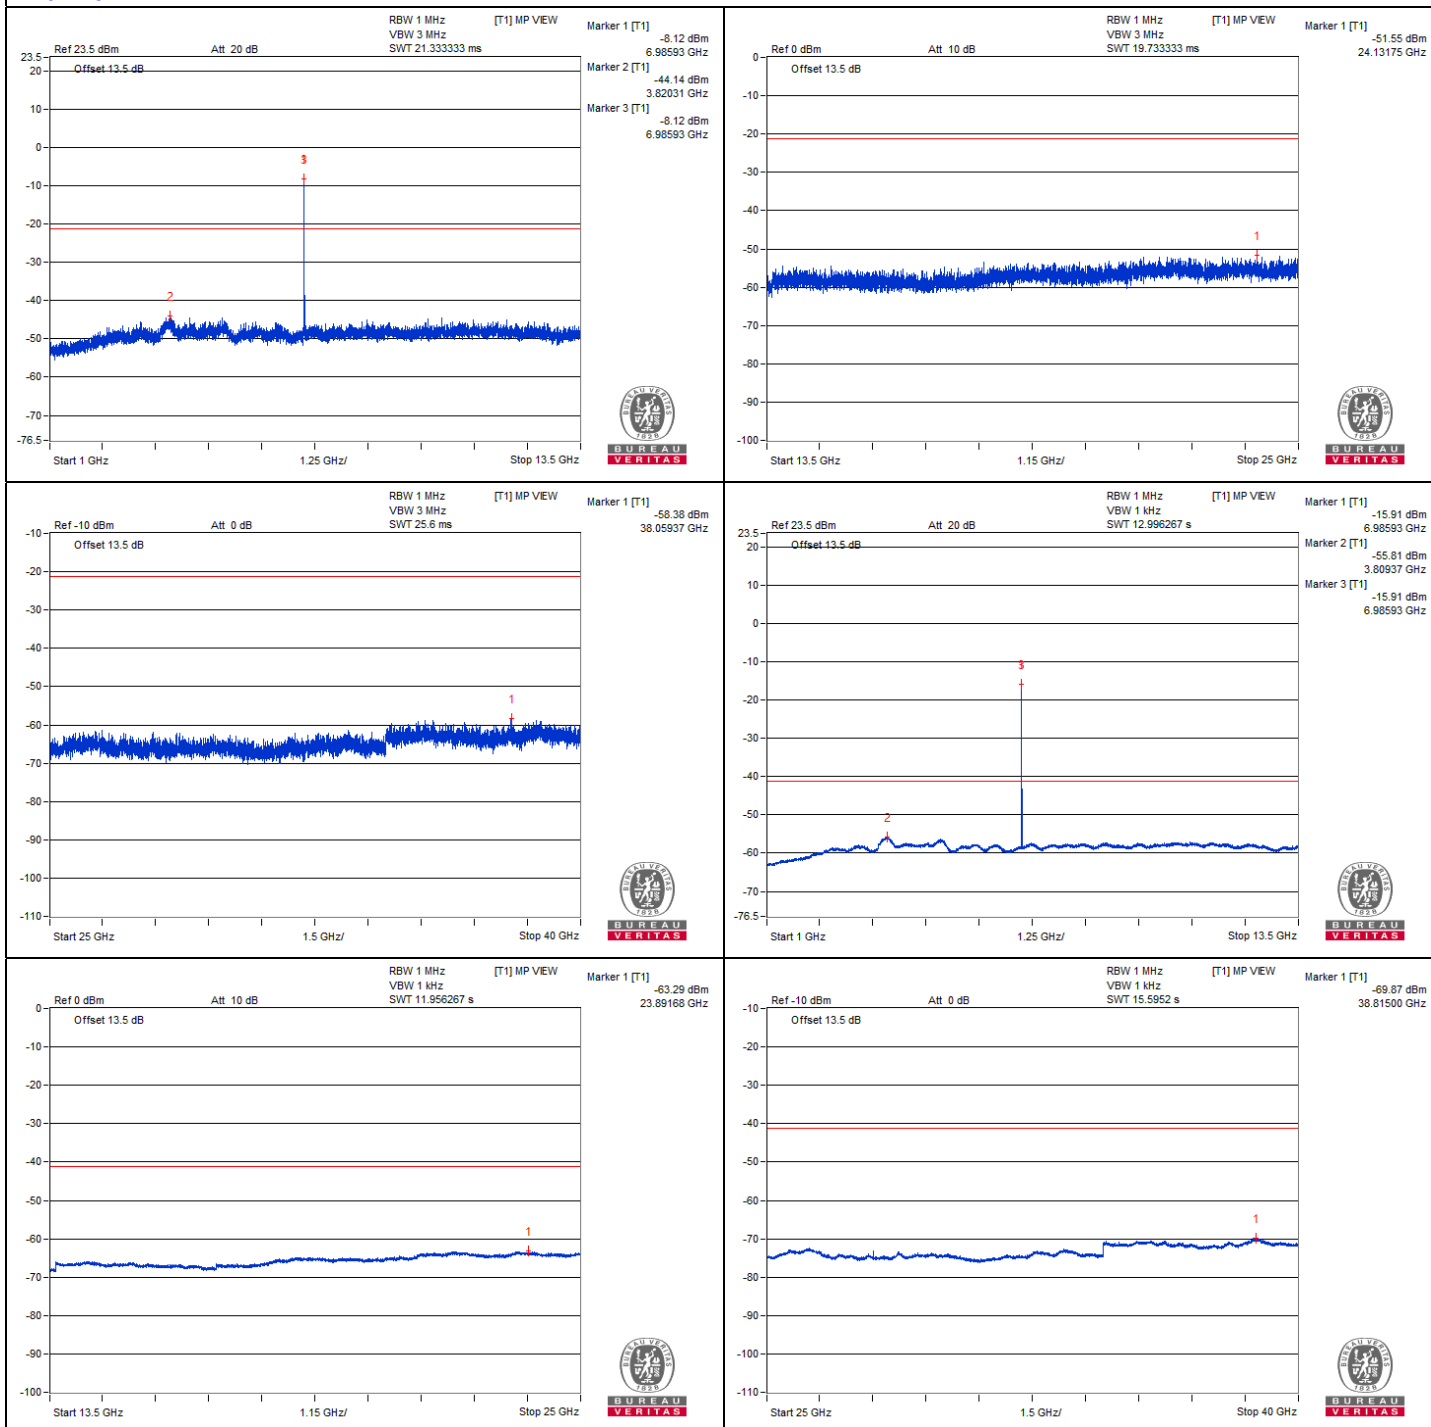

Chain 1

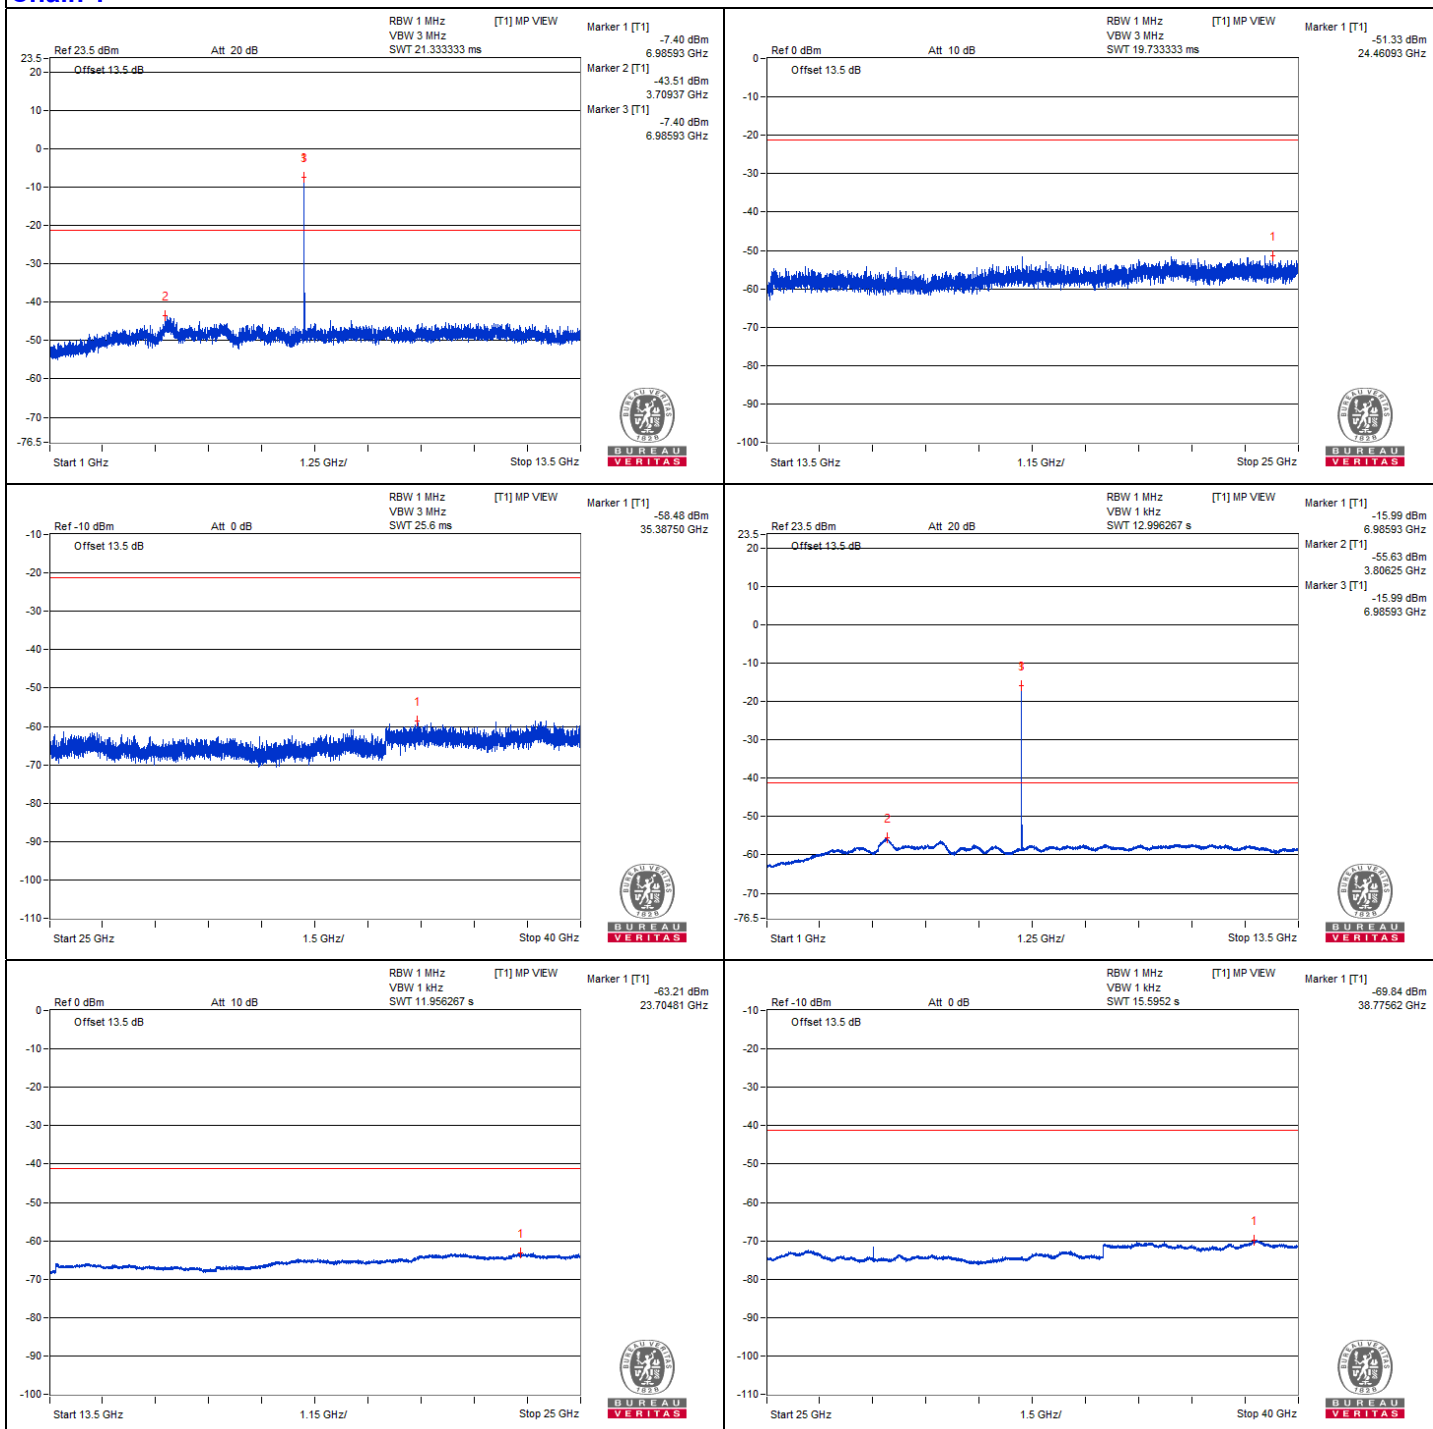

802.11be (EHT20) 26-tone RU - Channel 233


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#14221.62	50.27 PK	88.2	-37.93	-57.49	-55.16	8.17	-44.99
2	#14224.5	40.22 AV	68.2	-27.98	-66.45	-66.01	8.17	-55.04
3	21338.68	51.39 PK	74	-22.61	-55.36	-54.76	8.17	-43.87
4	21337.25	41.42 AV	54	-12.58	-65.08	-64.97	8.17	-53.84


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

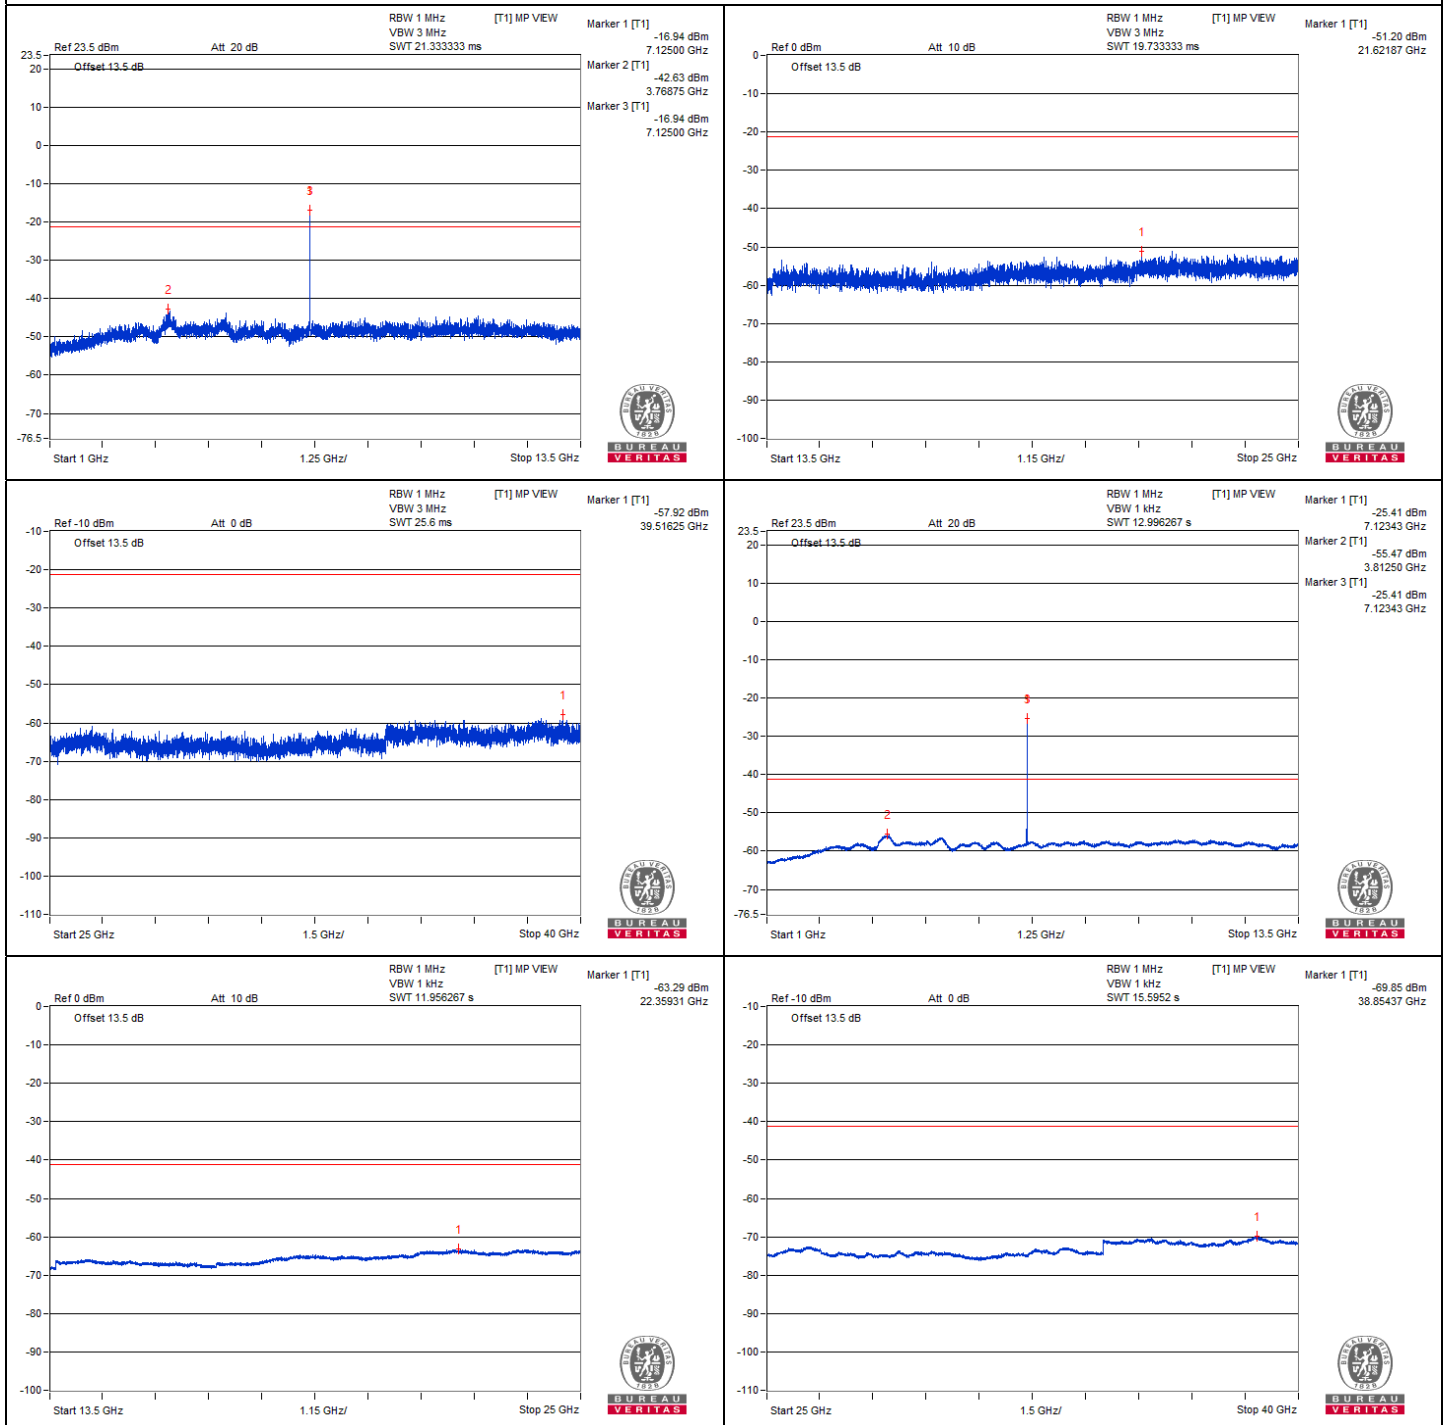

Chain 1

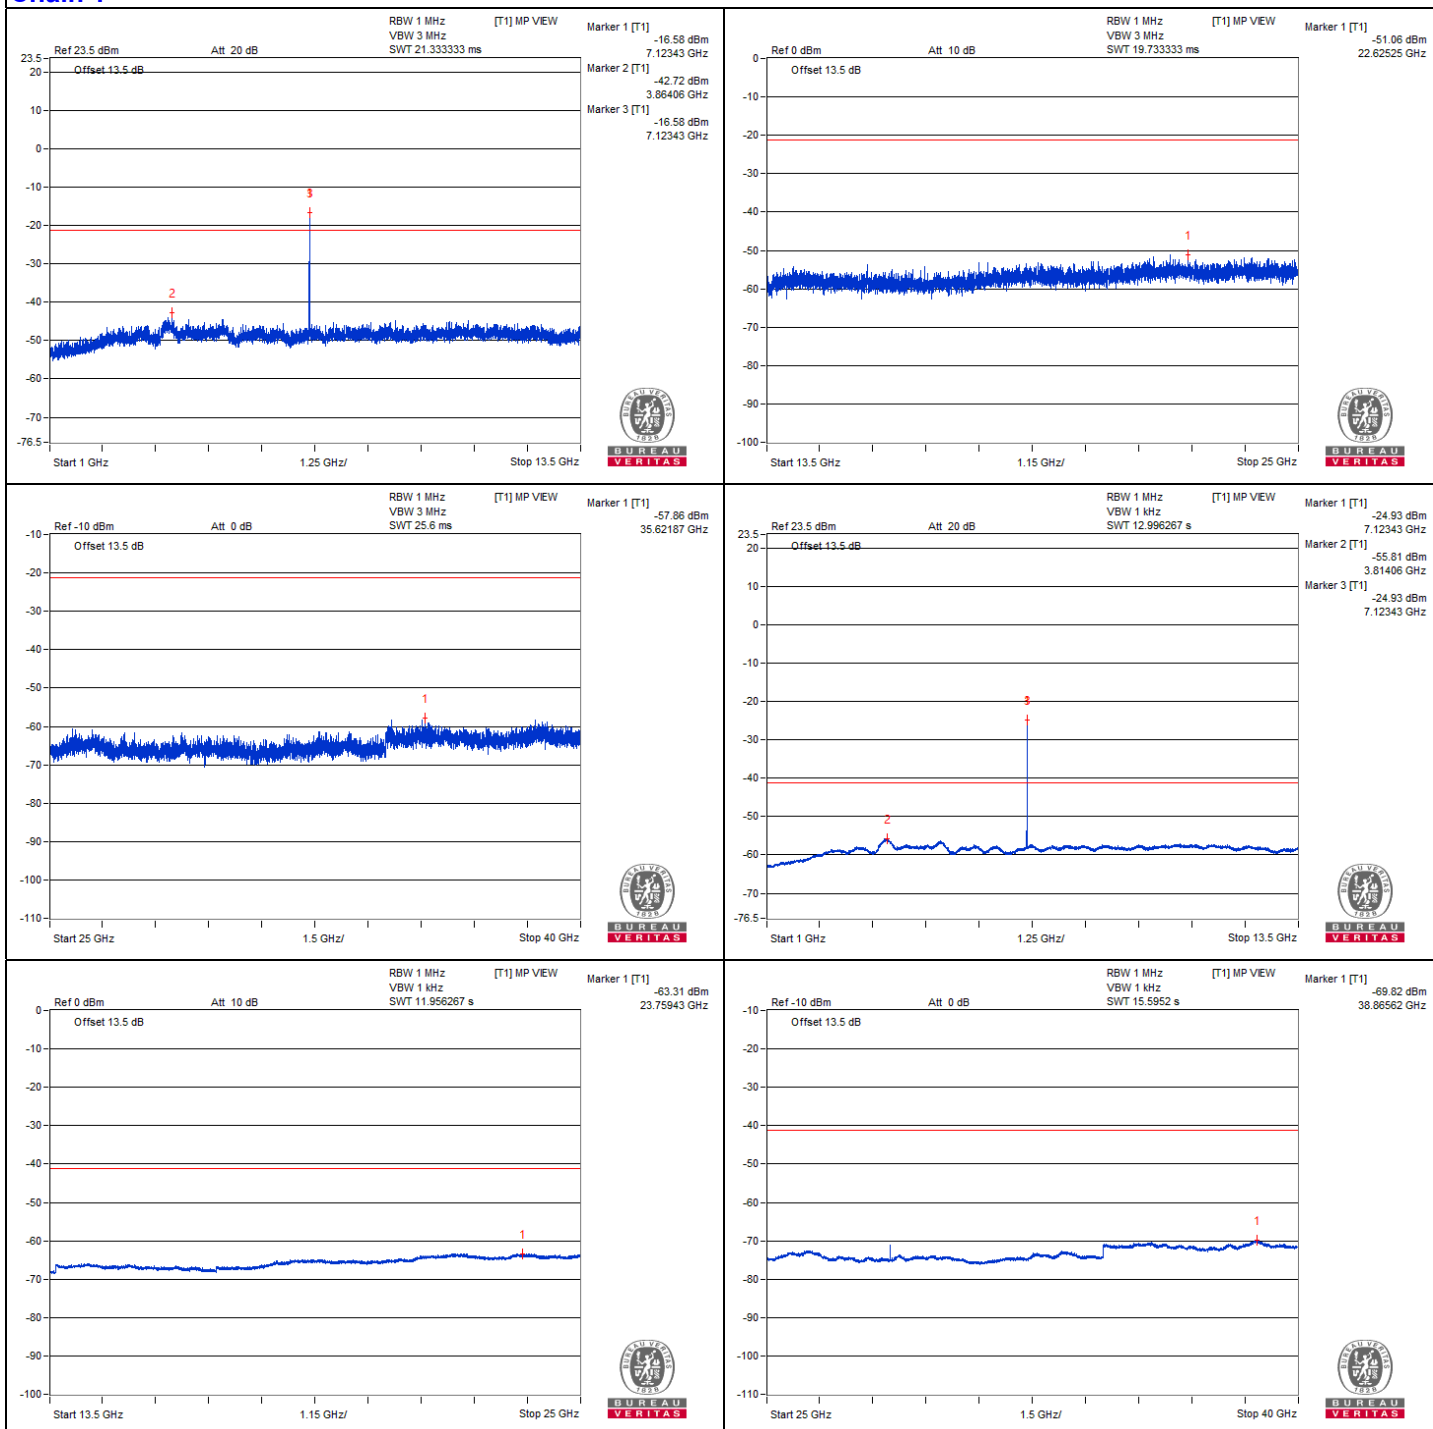


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	79.32 PK	88.2	-8.88	-27.13	-27.04	8.13	-15.94
2	#7125	67.76 AV	68.2	-0.44	-38.89	-38.41	8.13	-27.50


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

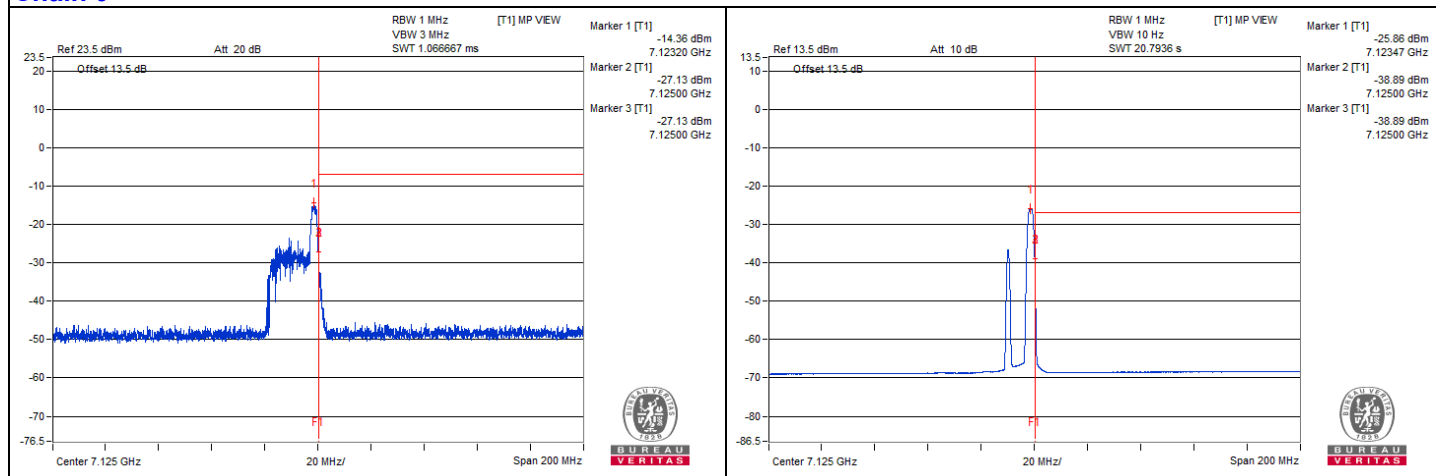

Chain 1

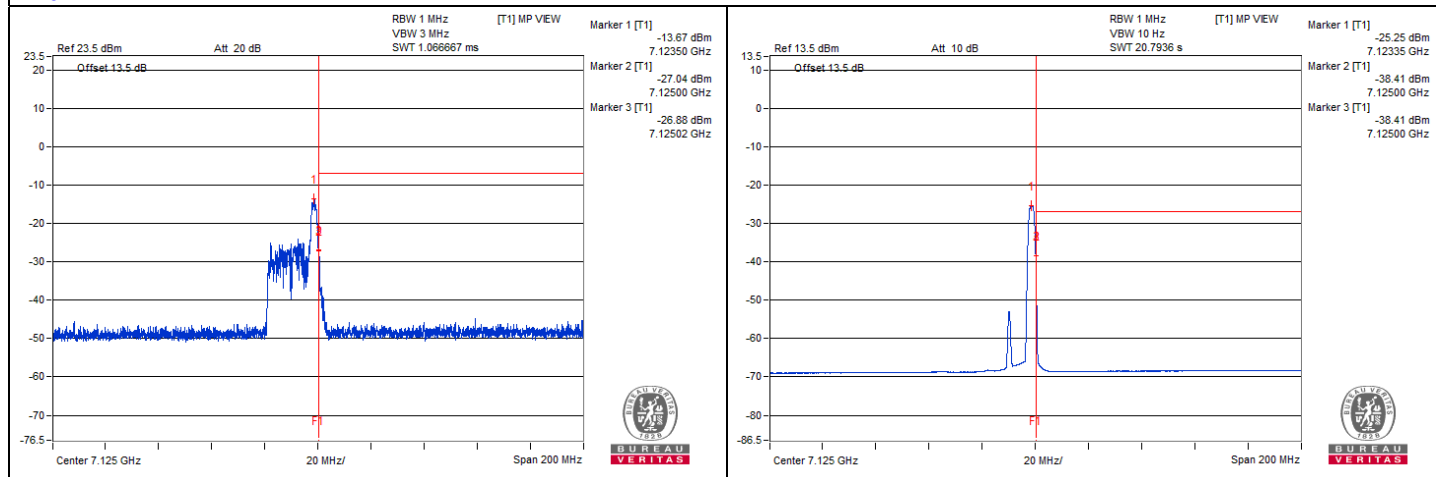

802.11be (EHT20) 52-tone RU - Channel 2


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11865.62	59.74 PK	74	-14.26	-46.77	-46.64	8.17	-35.52
2	11867.18	48.68 AV	54	-5.32	-57.64	-57.88	8.17	-46.58
3	17813.93	49.34 PK	74	-24.66	-58.56	-56.01	8.17	-45.92
4	17805.31	39.53 AV	54	-14.47	-66.8	-67.03	8.17	-55.73


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

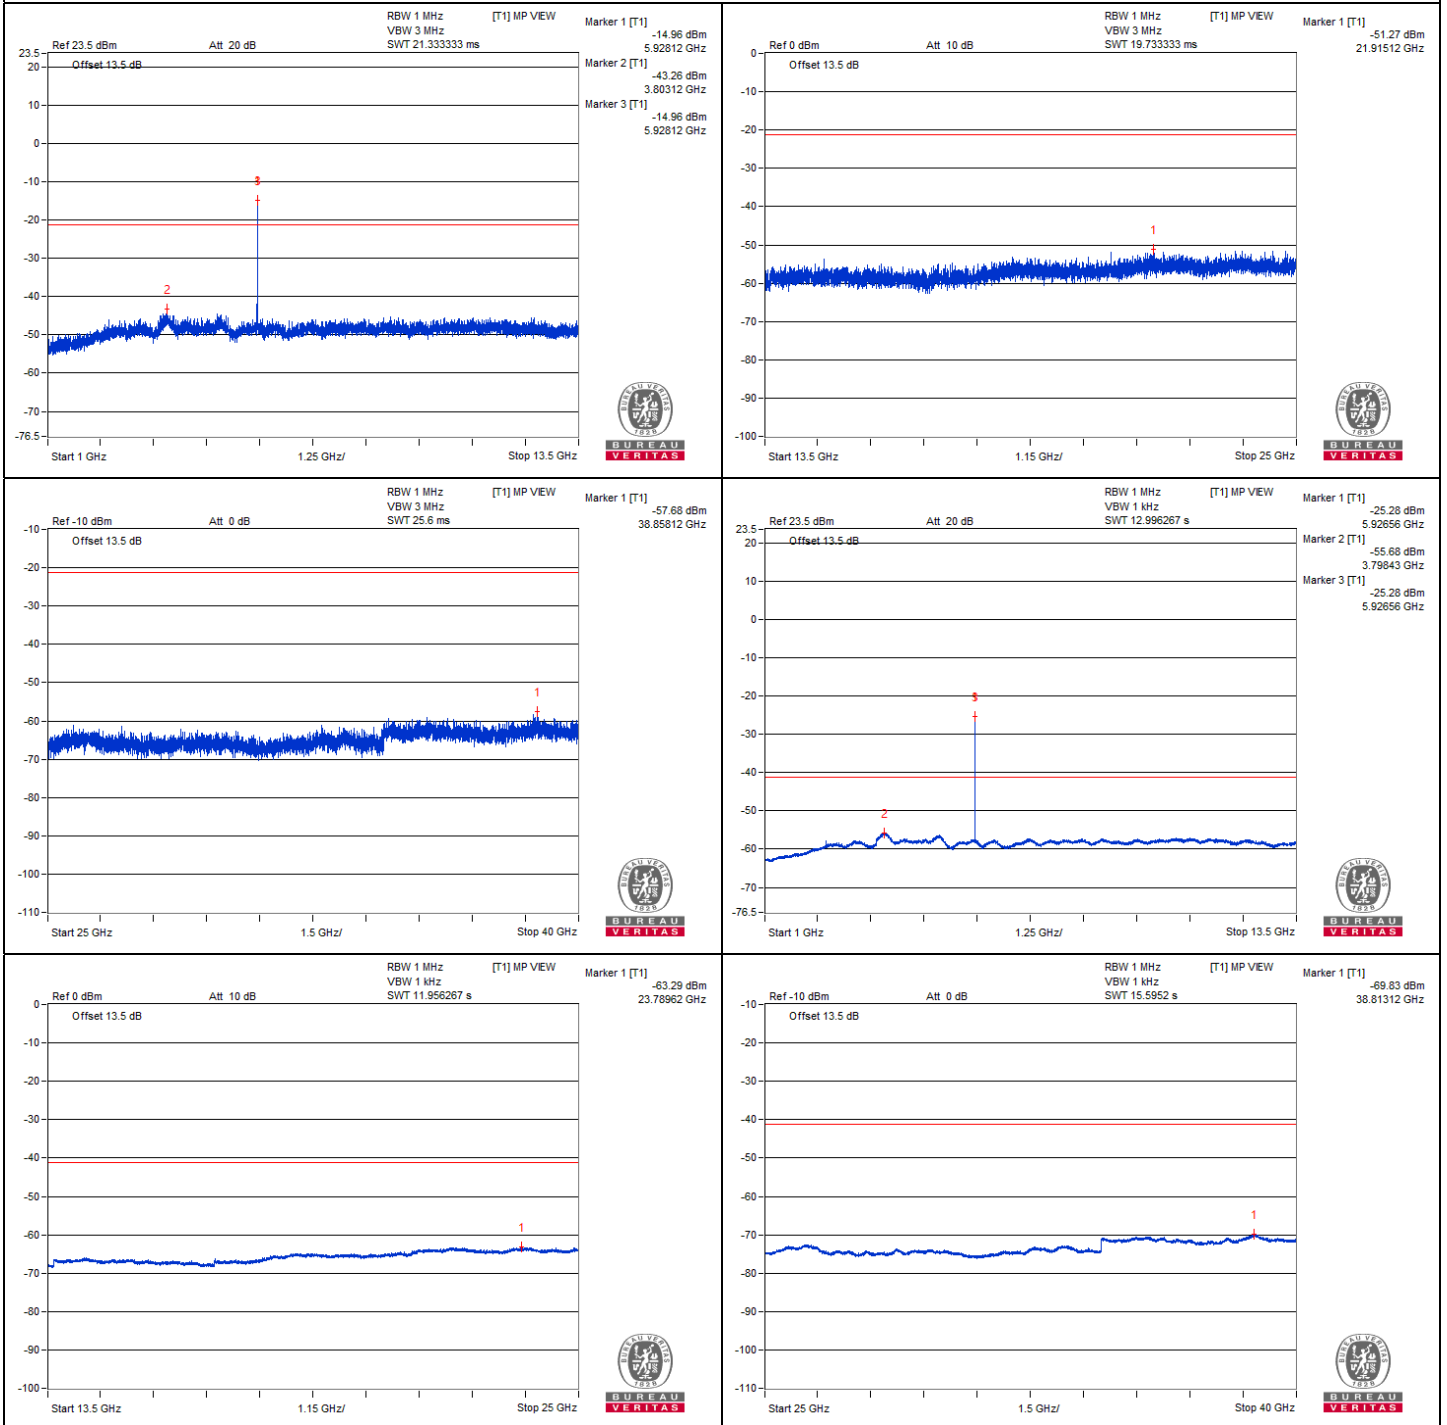

Chain 1

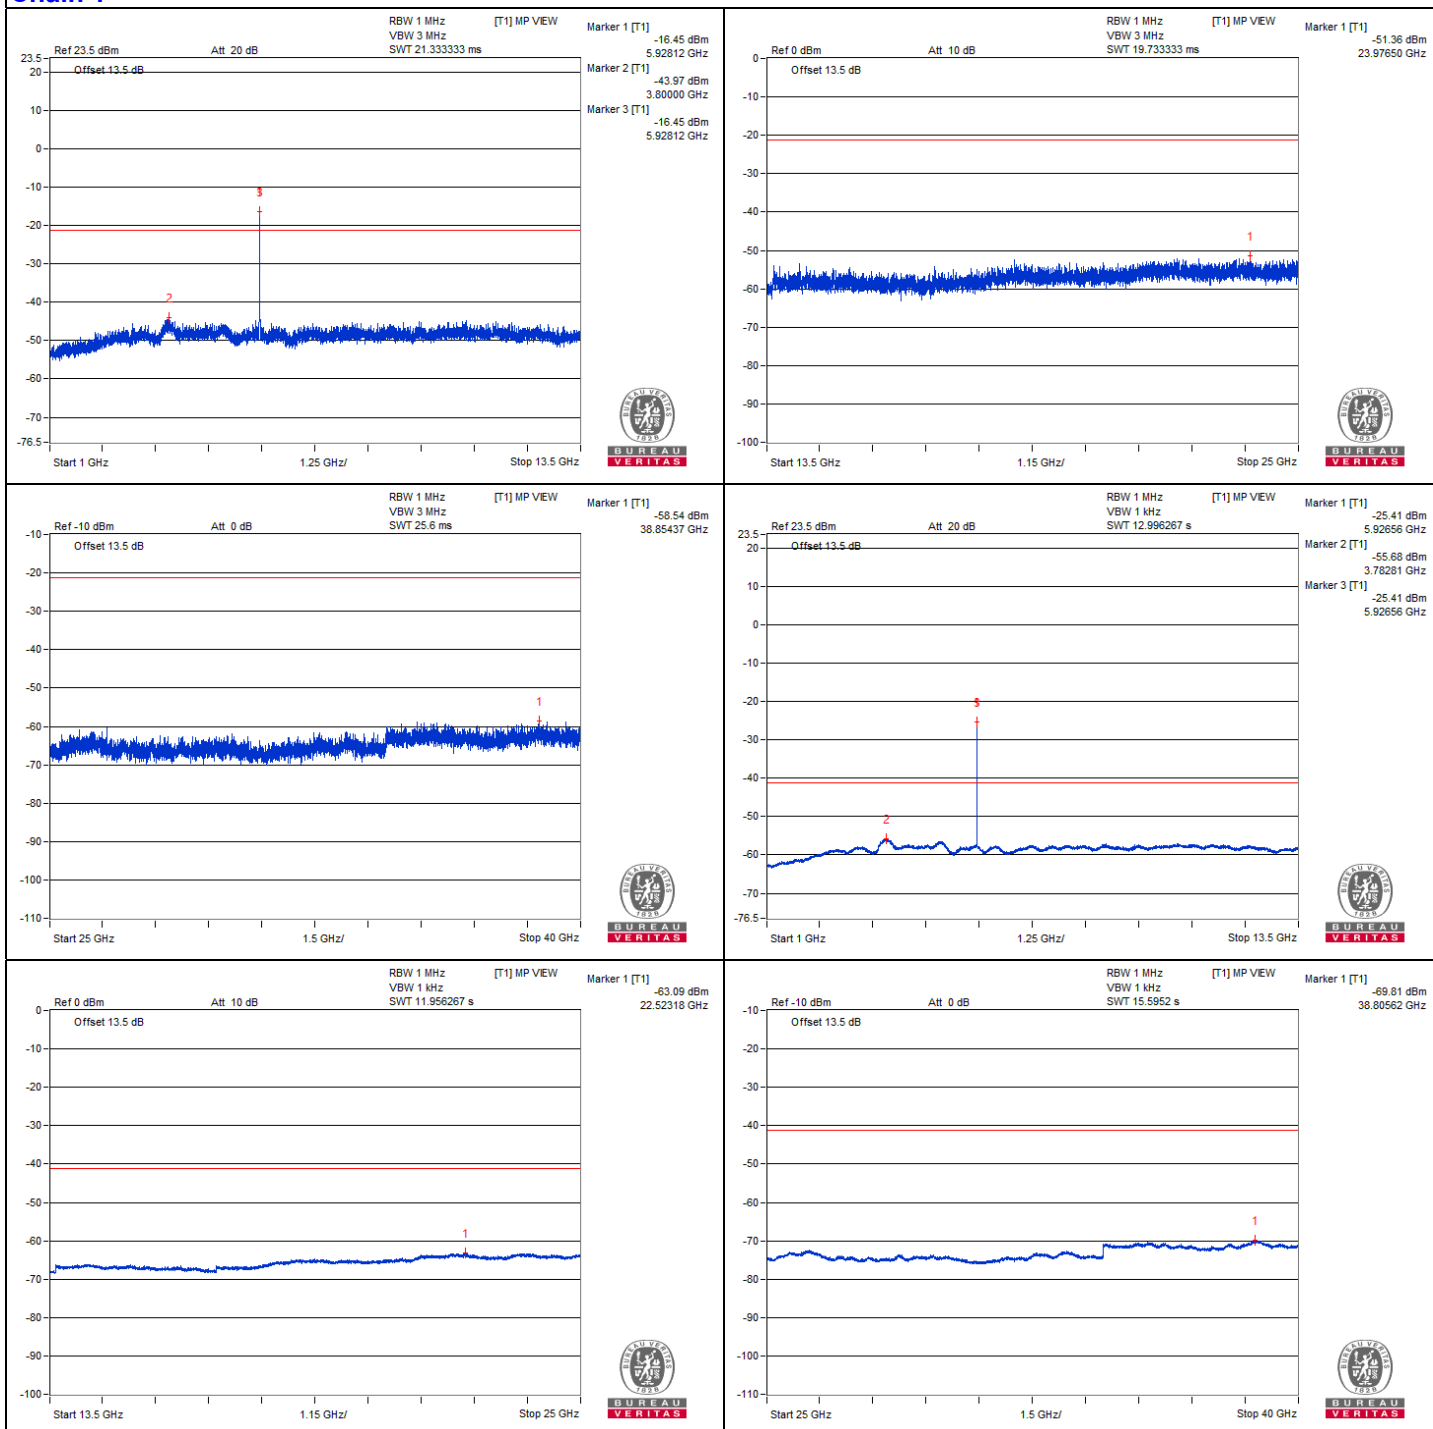


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5925	80.42 PK	88.2	-7.78	-26.1	-25.91	8.15	-14.84
2	#5925	67.47 AV	68.2	-0.73	-38.84	-39.07	8.15	-27.79


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

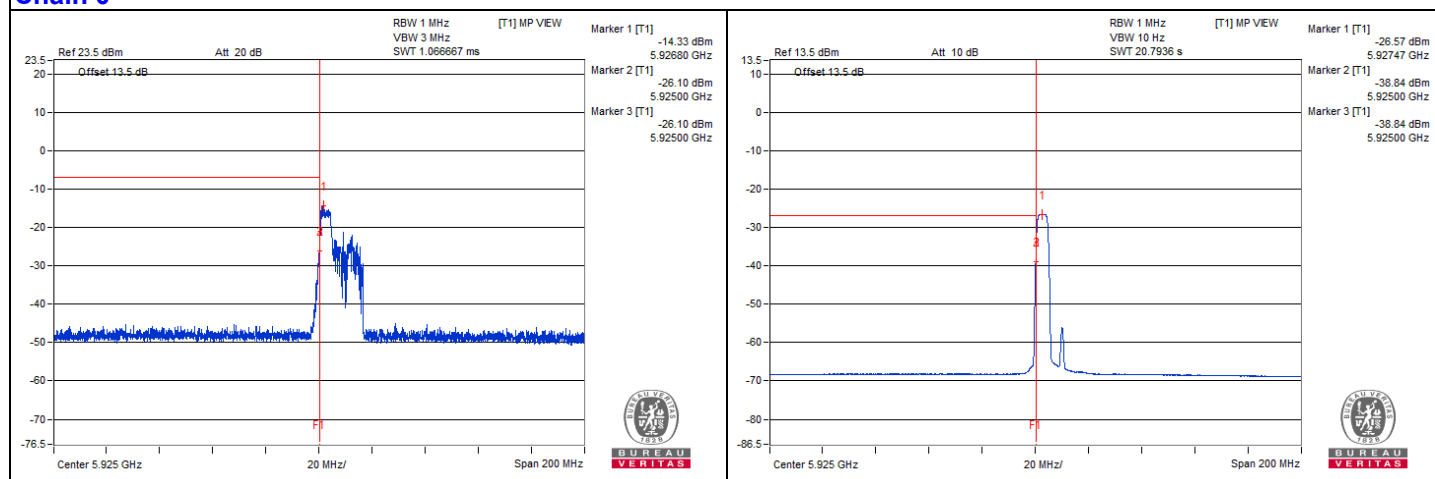

Chain 1

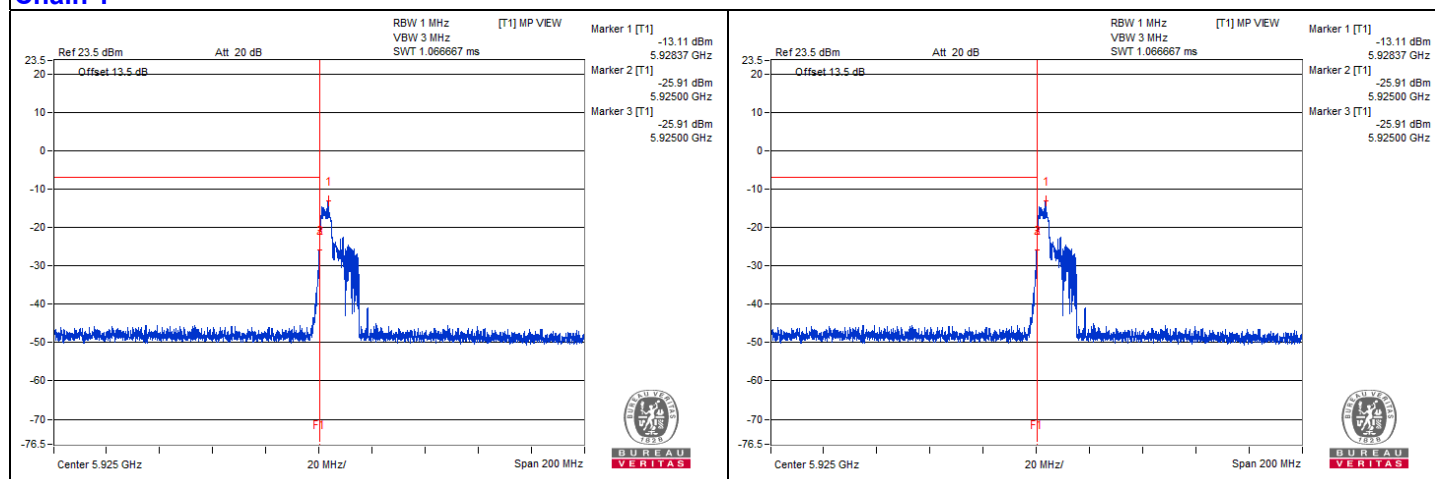

802.11be (EHT20) 52-tone RU - Channel 1


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11904.68	59.5 PK	74	-14.5	-45.73	-48.61	8.17	-35.76
2	11901.56	48.67 AV	54	-5.33	-57.64	-57.91	8.17	-46.59
3	17874.31	50.46 PK	74	-23.54	-56.07	-55.9	8.17	-44.80
4	17858.5	39.48 AV	54	-14.52	-66.84	-67.08	8.17	-55.78


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

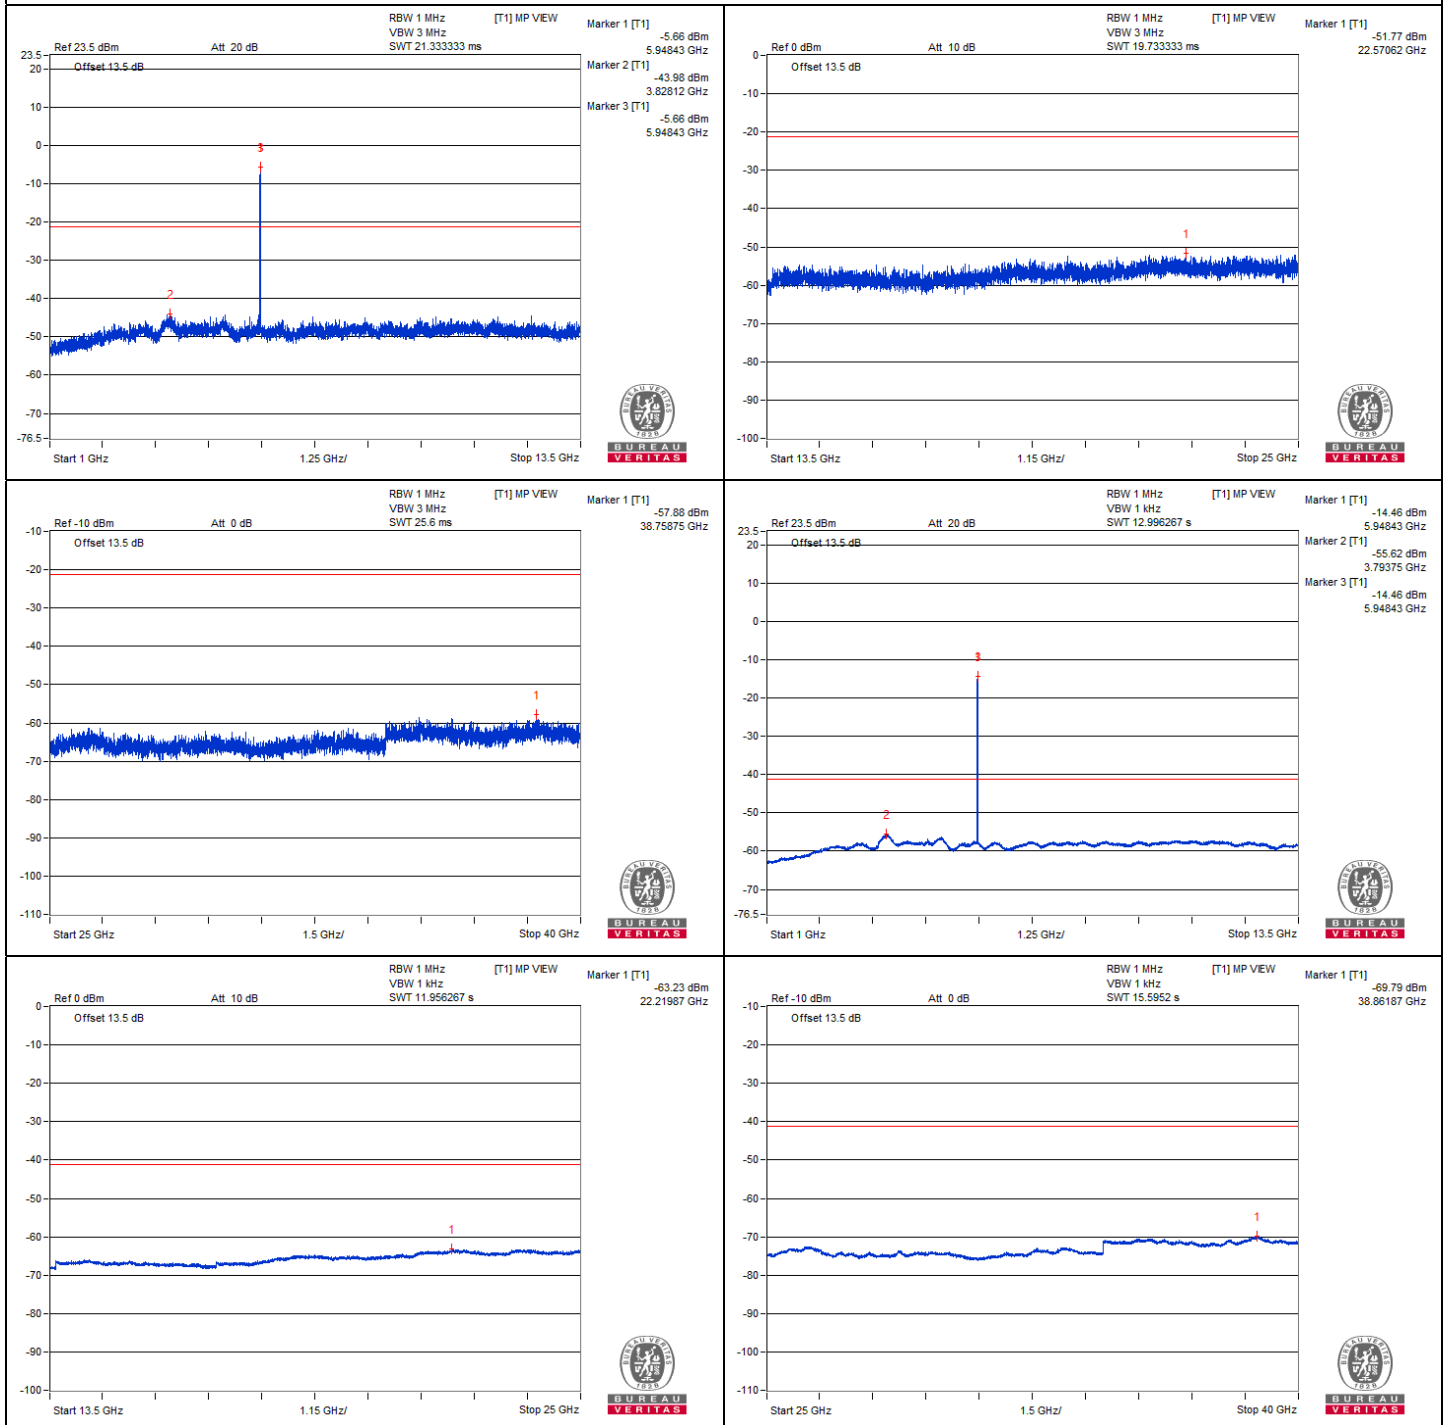

Chain 1

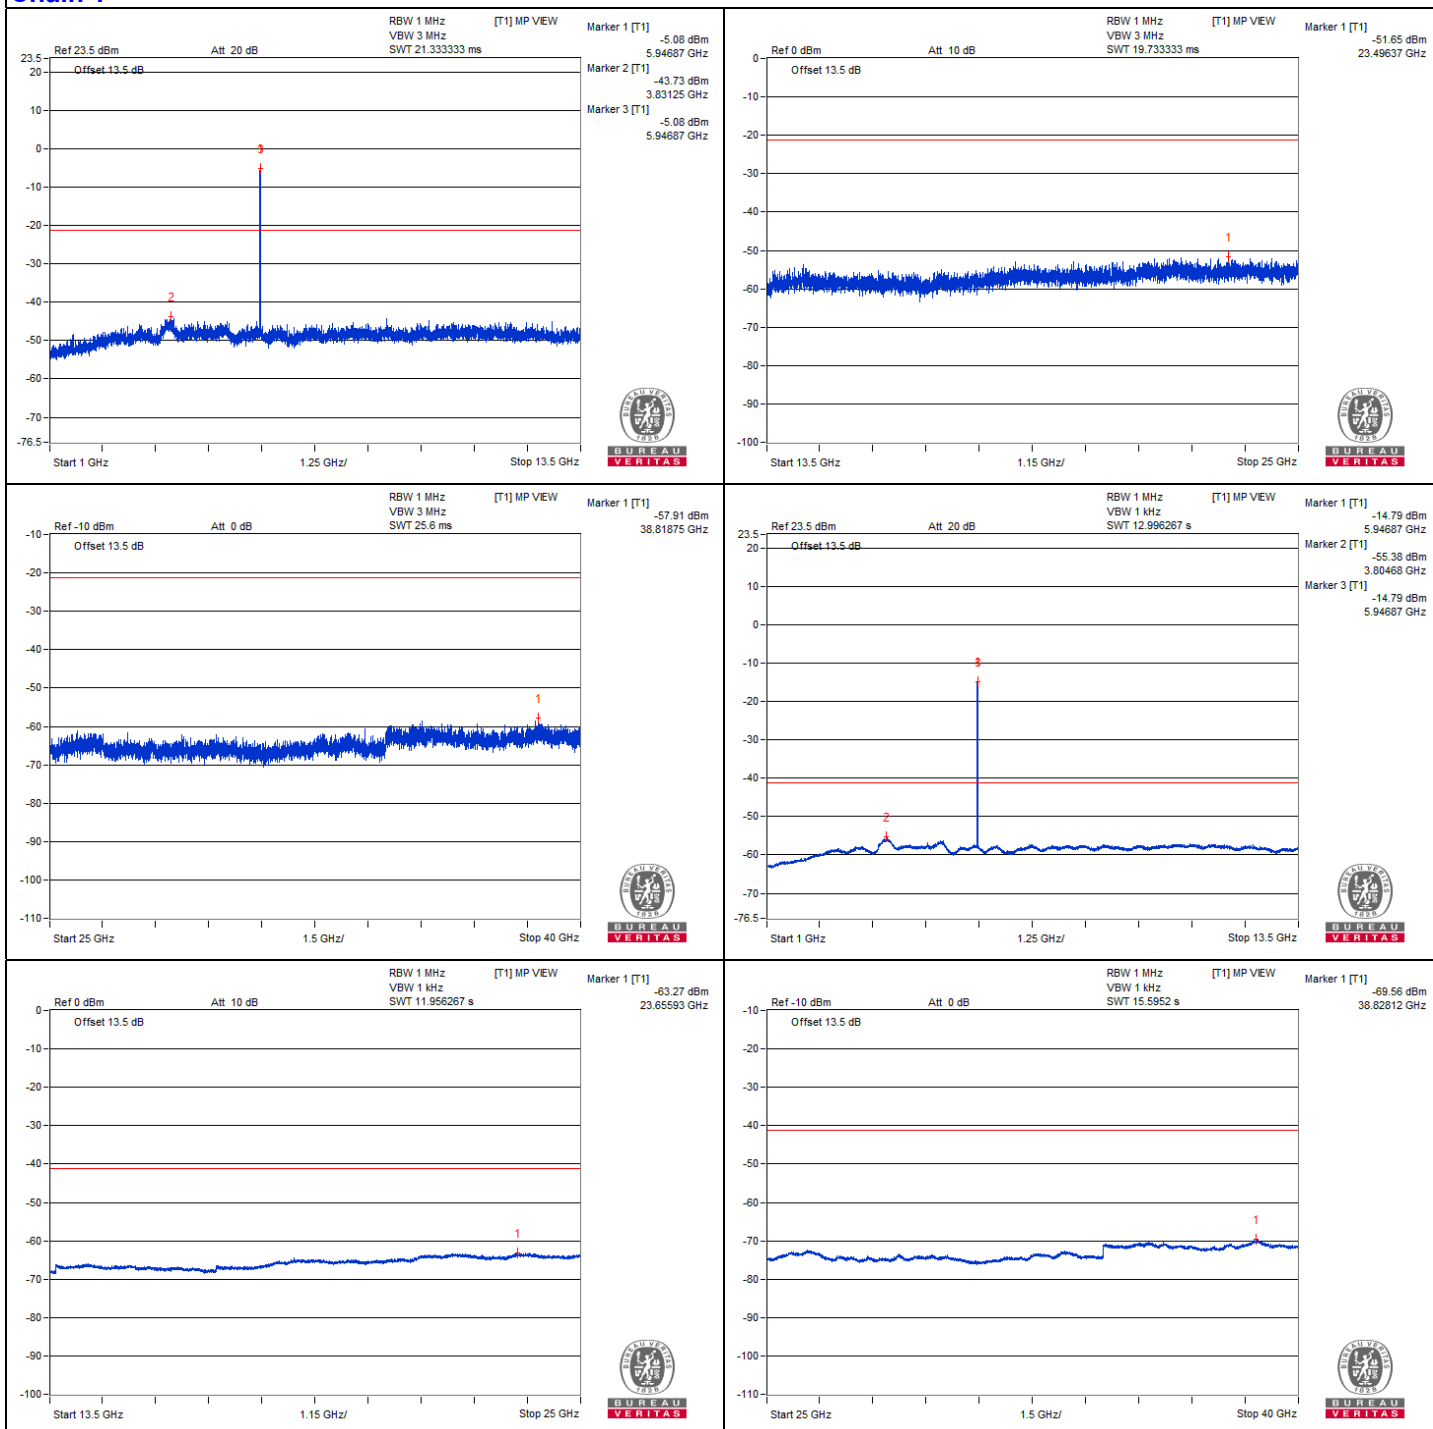


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5923.15	60.85 PK	88.2	-27.35	-44.72	-46.64	8.15	-34.41
2	#5915.87	38.49 AV	68.2	-29.71	-67.9	-67.96	8.15	-56.77


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

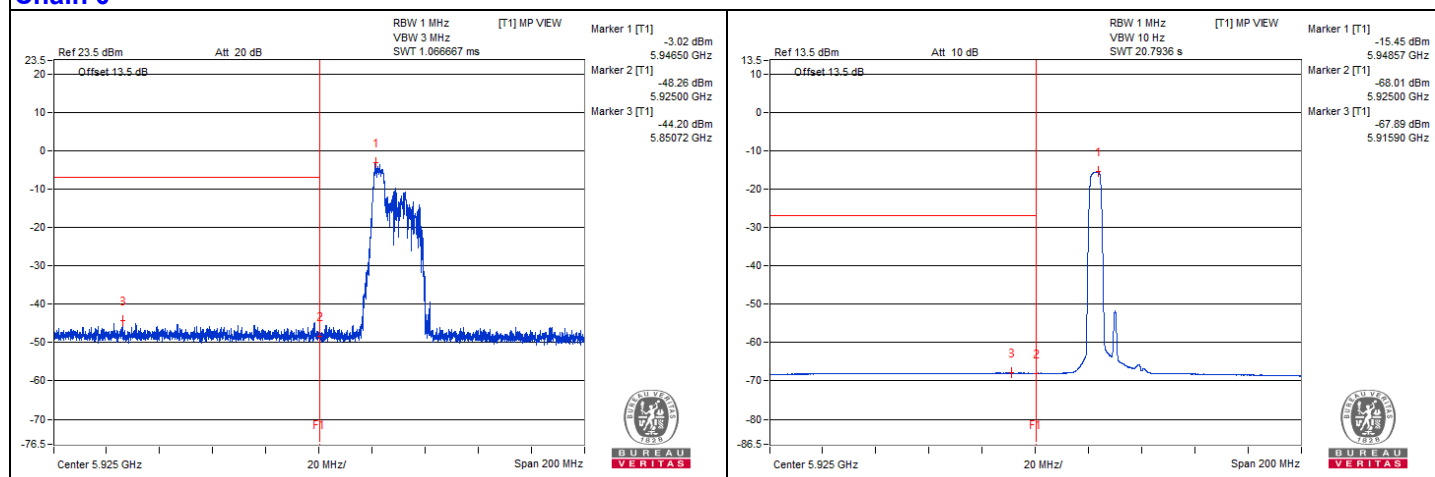

Chain 1

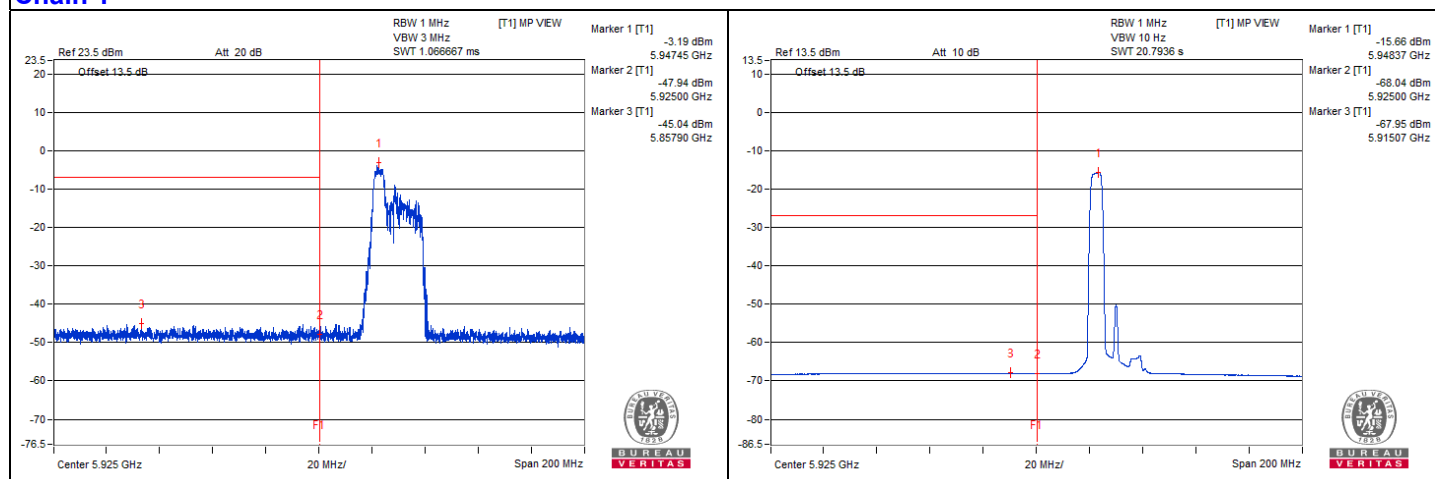

802.11be (EHT20) 52-tone RU - Channel 45


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12346.87	59.06 PK	74	-14.94	-48.25	-46.66	8.17	-36.20
2	12348.43	48.68 AV	54	-5.32	-57.83	-57.69	8.17	-46.58
3	18525.5	50.17 PK	74	-23.83	-55.68	-56.96	8.17	-45.09
4	18519.75	40.84 AV	54	-13.16	-65.51	-65.7	8.17	-54.42


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

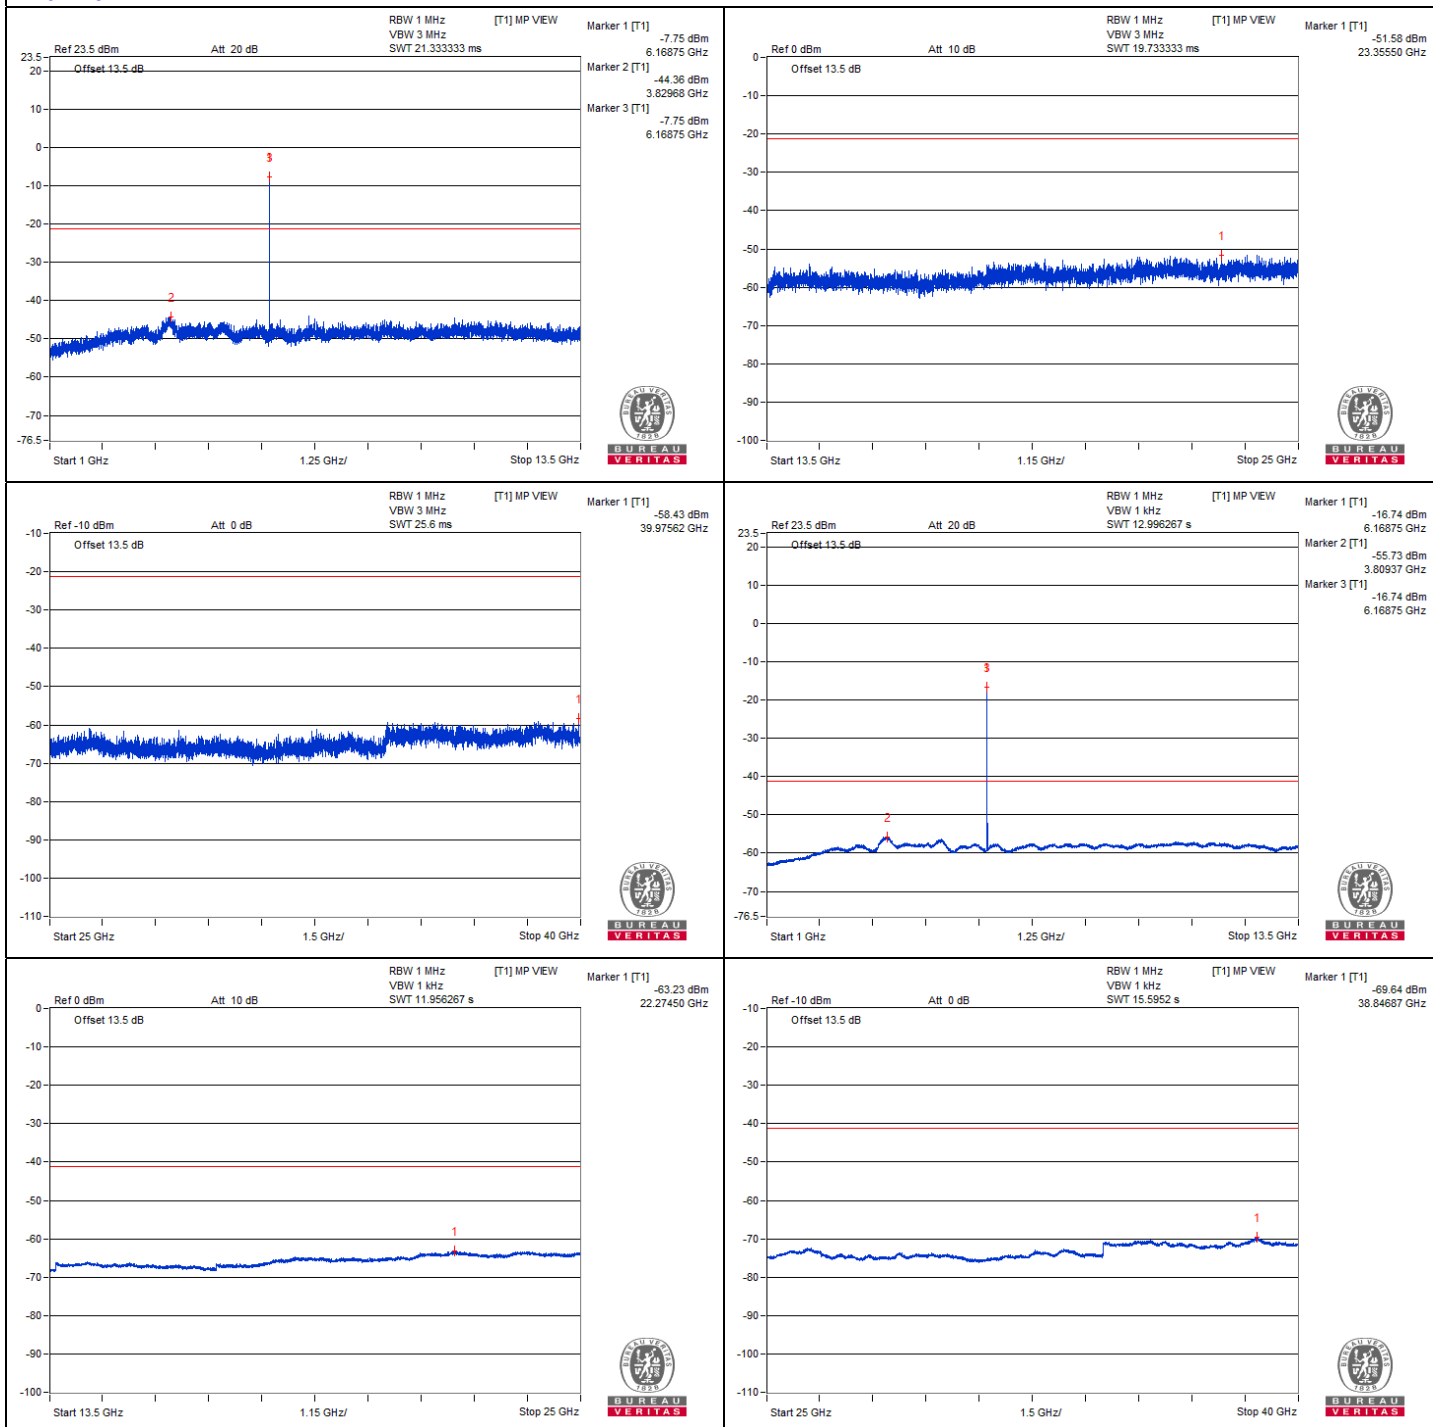

Chain 1

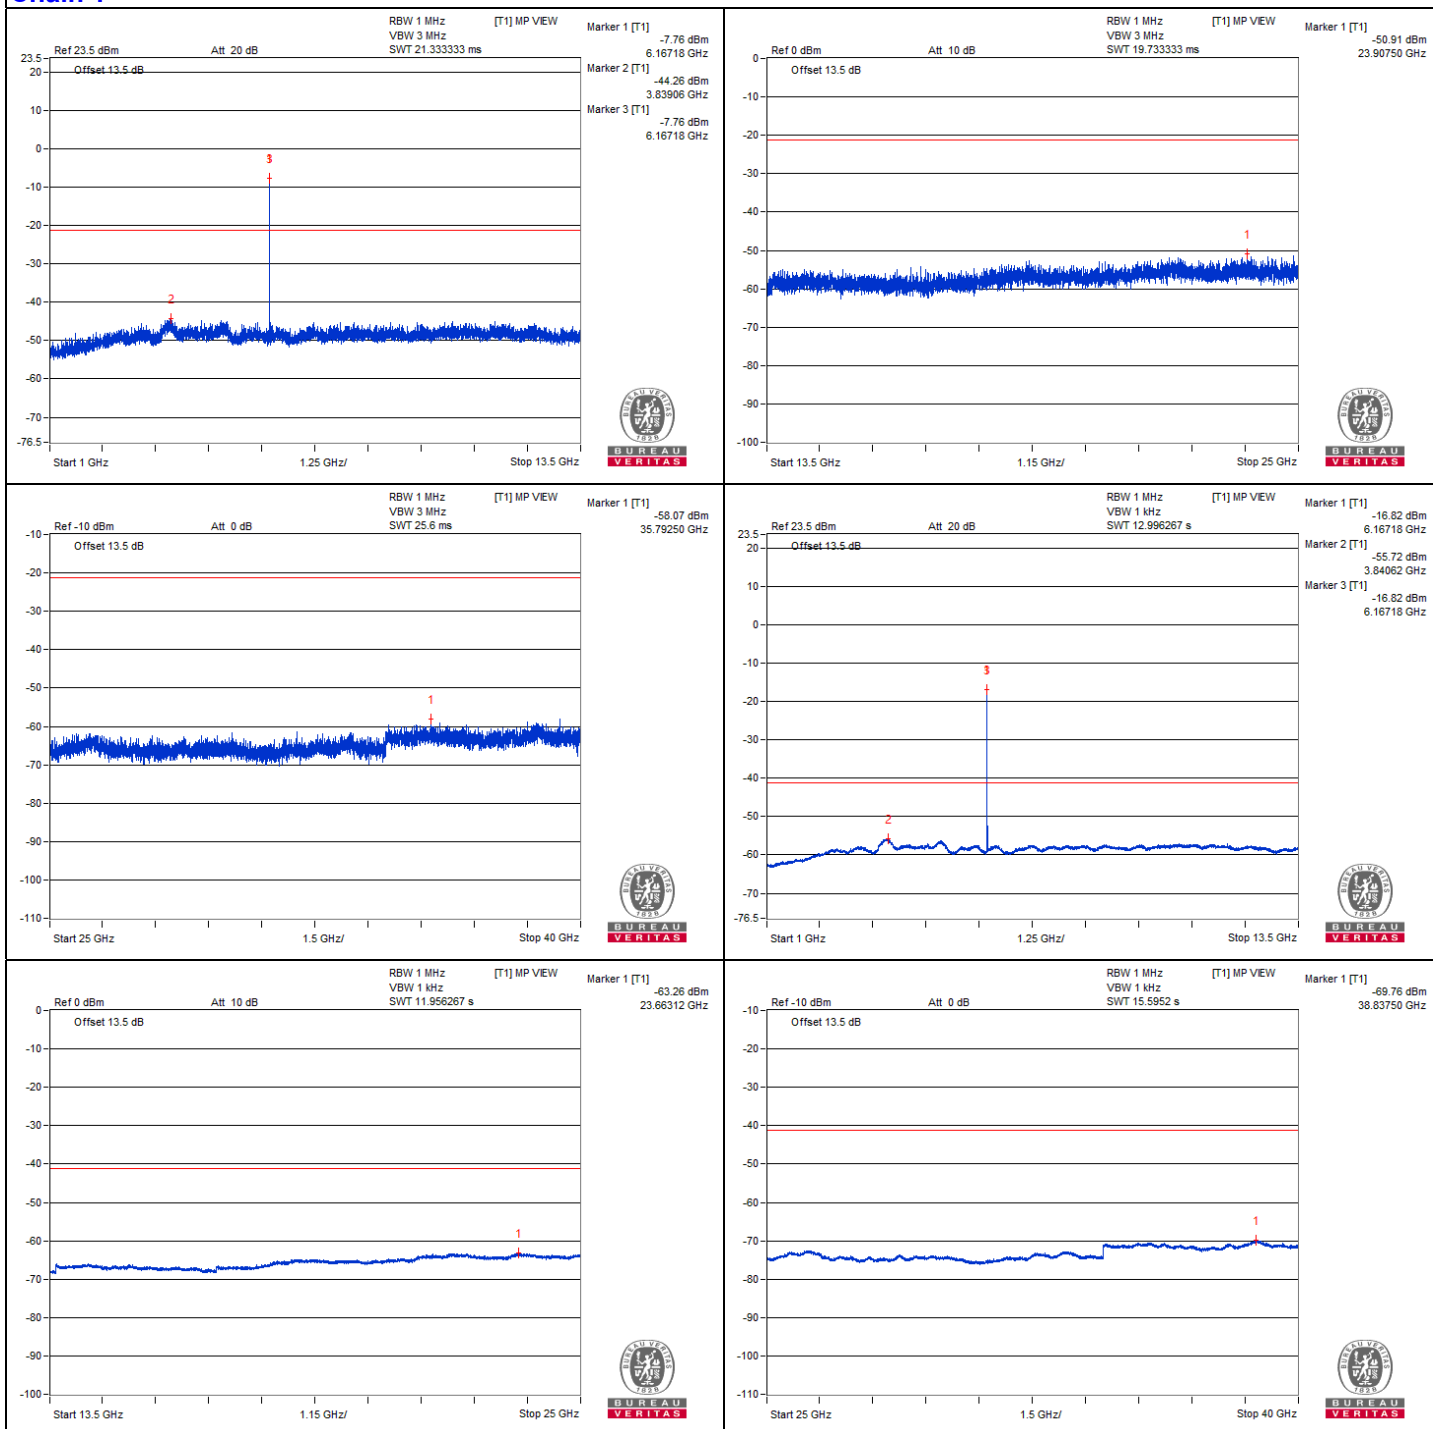

802.11be (EHT20) 52-tone RU - Channel 93


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12832.81	58.98 PK	88.2	-29.22	-47.52	-47.4	8.17	-36.28
2	#12829.68	48.01 AV	68.2	-20.19	-58.54	-58.33	8.17	-47.25
3	19248.56	51.18 PK	74	-22.82	-54.46	-56.25	8.17	-44.08
4	19242.81	41.36 AV	54	-12.64	-65.04	-65.12	8.17	-53.90


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

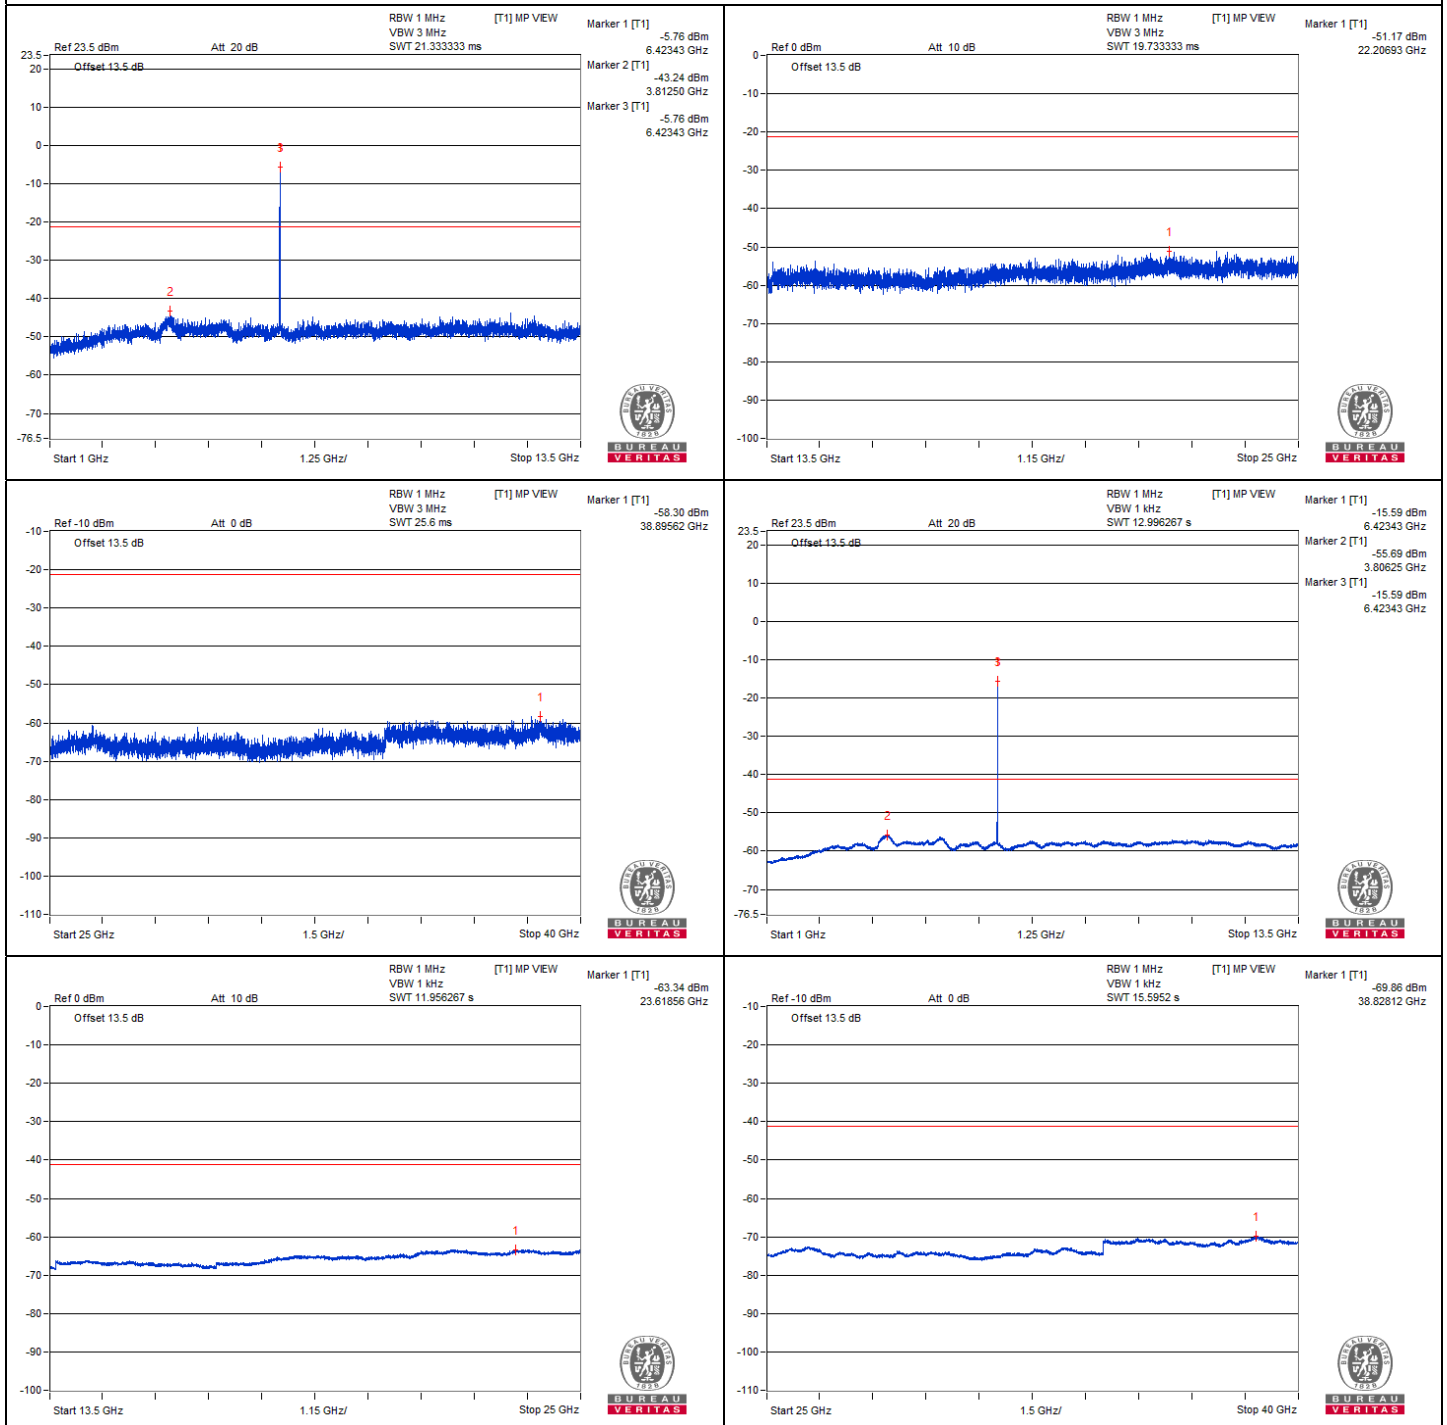

Chain 1

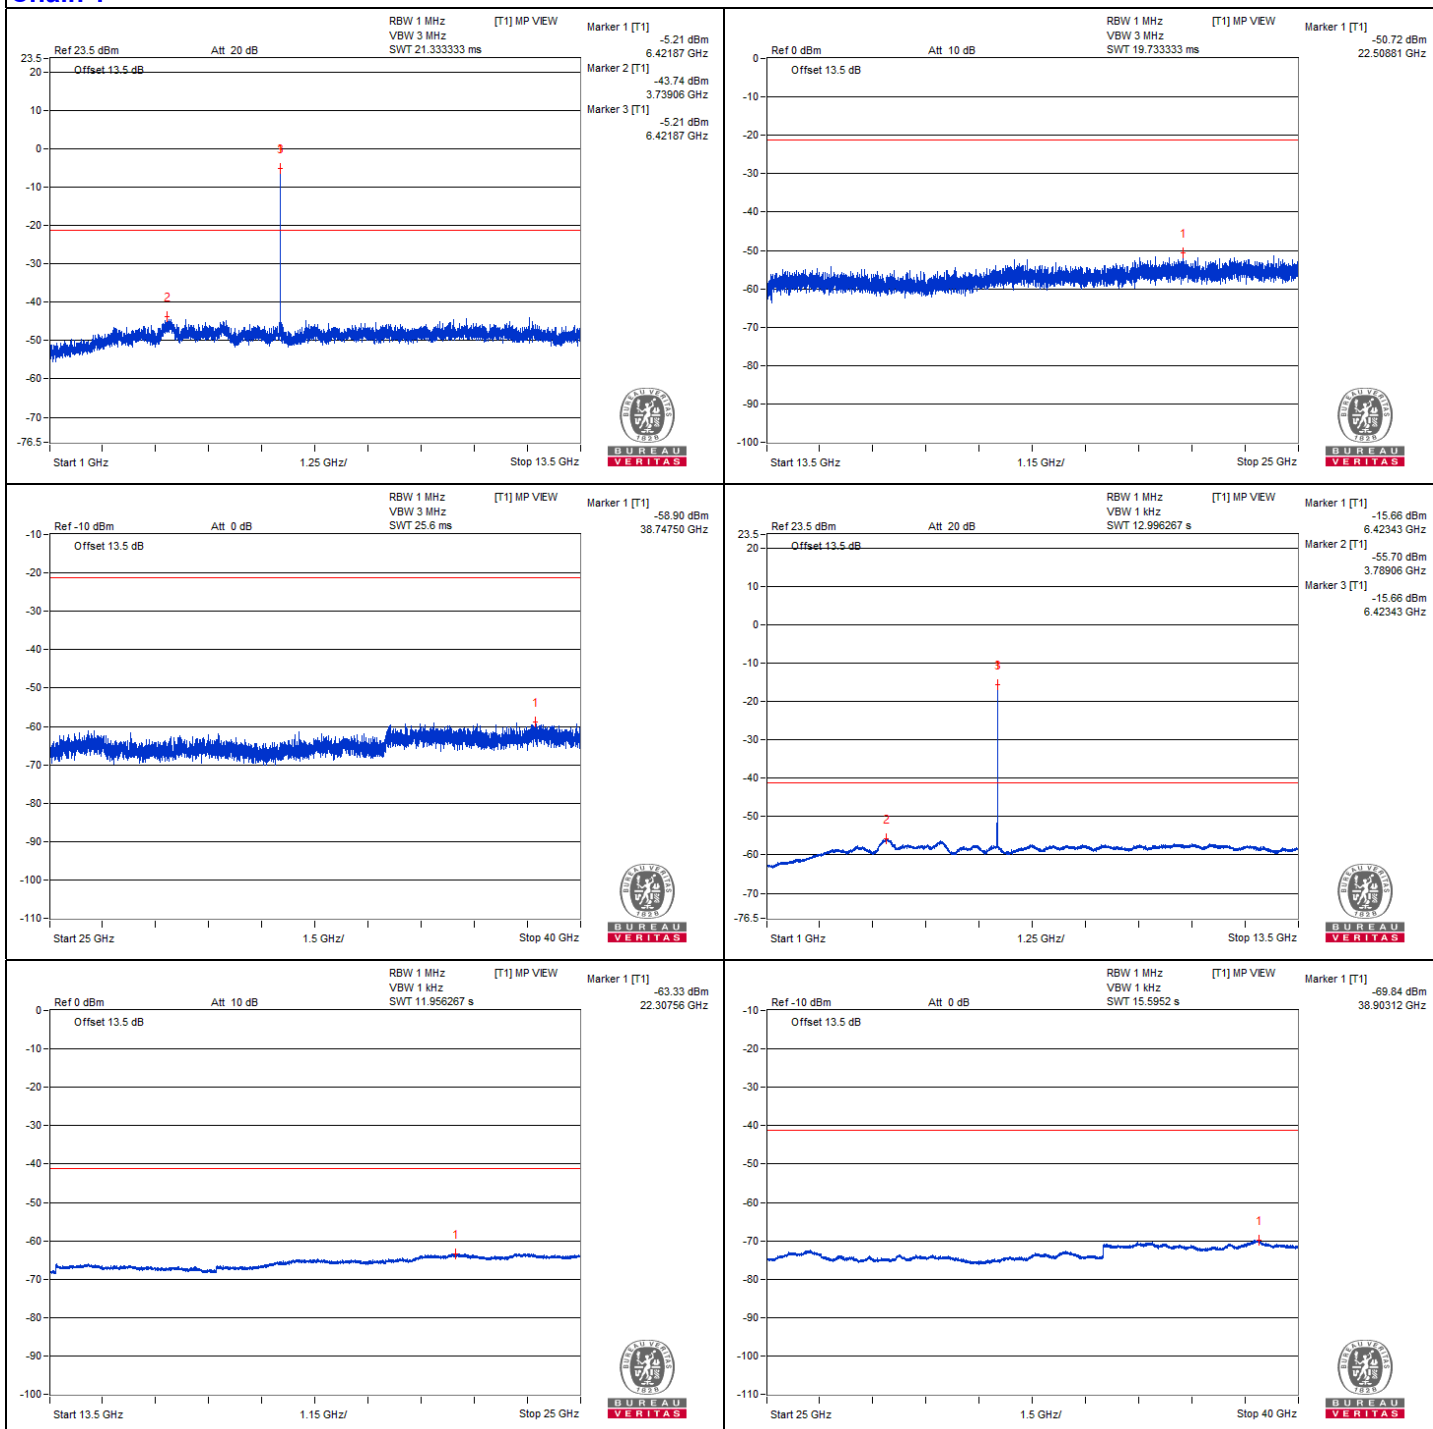

802.11be (EHT20) 52-tone RU - Channel 97


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12865.62	58.21 PK	88.2	-29.99	-49.2	-47.43	8.17	-37.05
2	#12873.43	47.94 AV	68.2	-20.26	-58.44	-58.57	8.17	-47.32
3	19296	51.01 PK	74	-22.99	-55.18	-55.69	8.17	-44.25
4	19301.75	41.24 AV	54	-12.76	-65.15	-65.25	8.17	-54.02


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

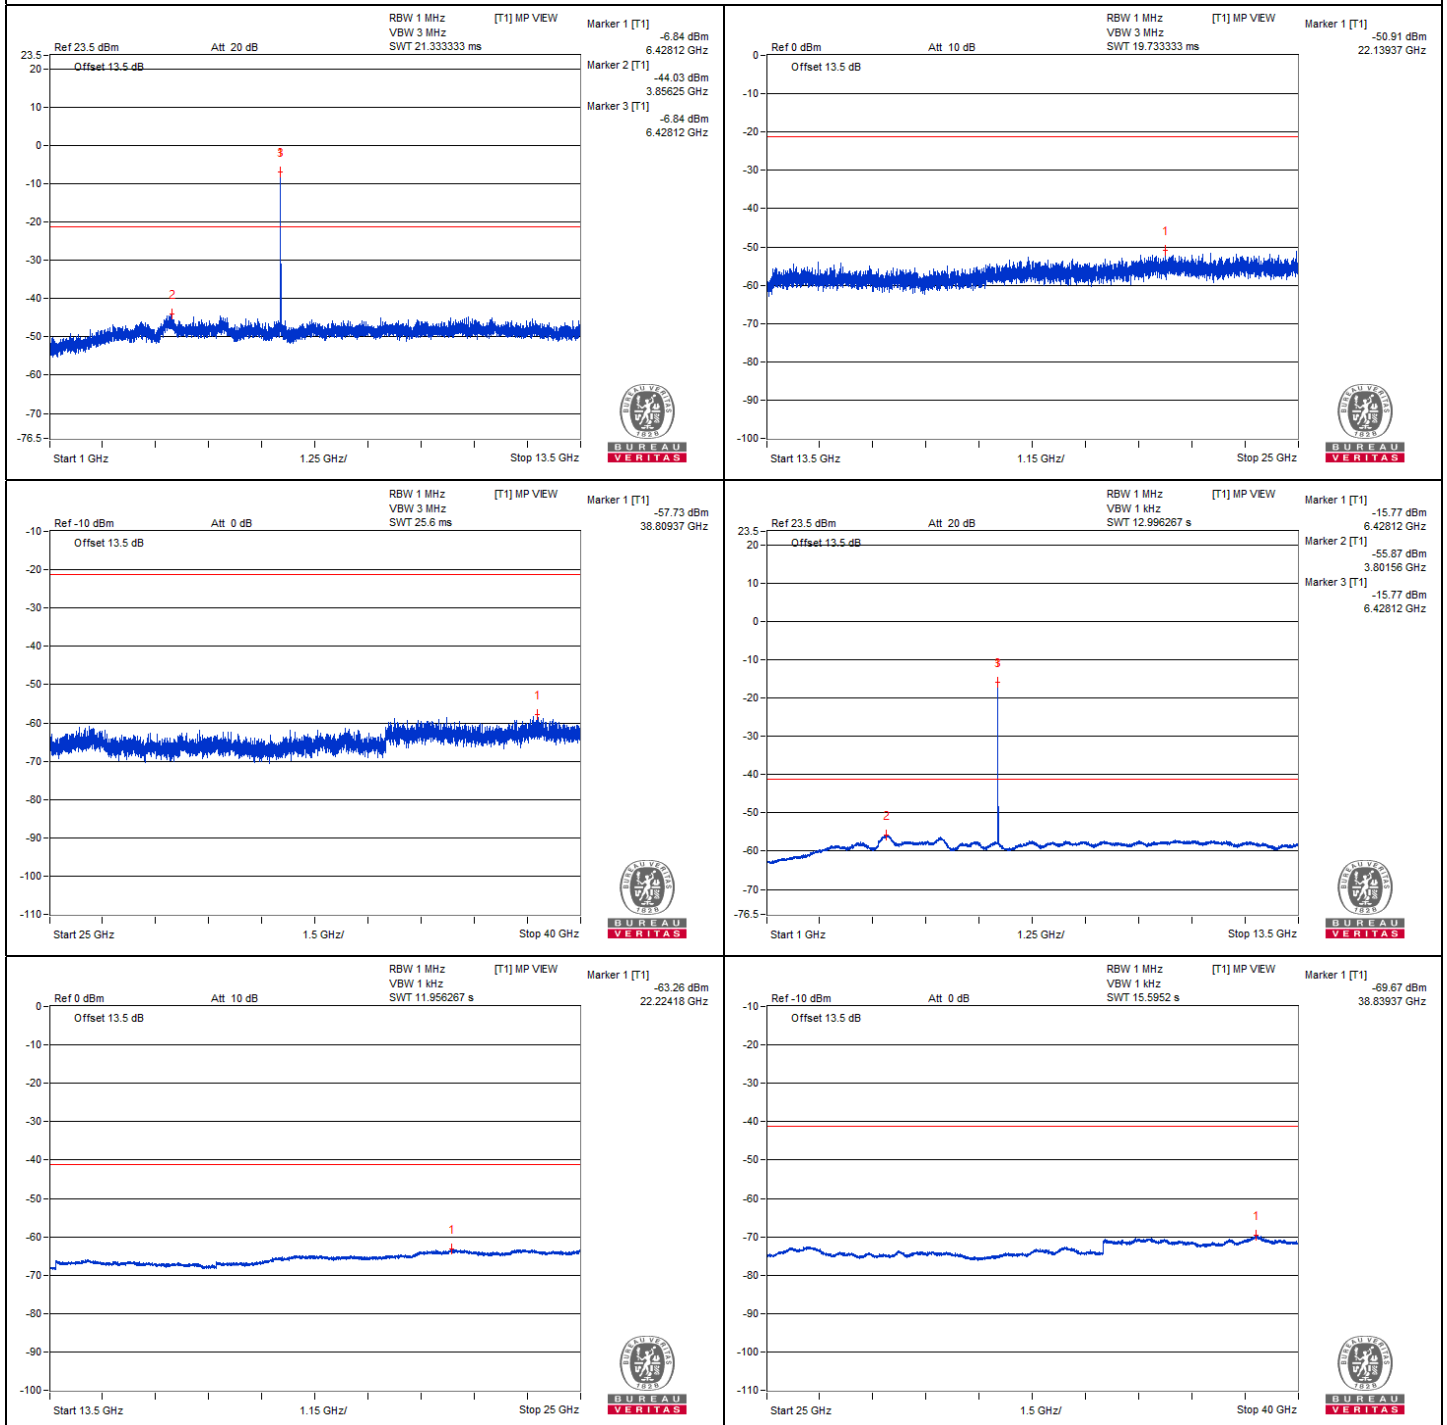

Chain 1

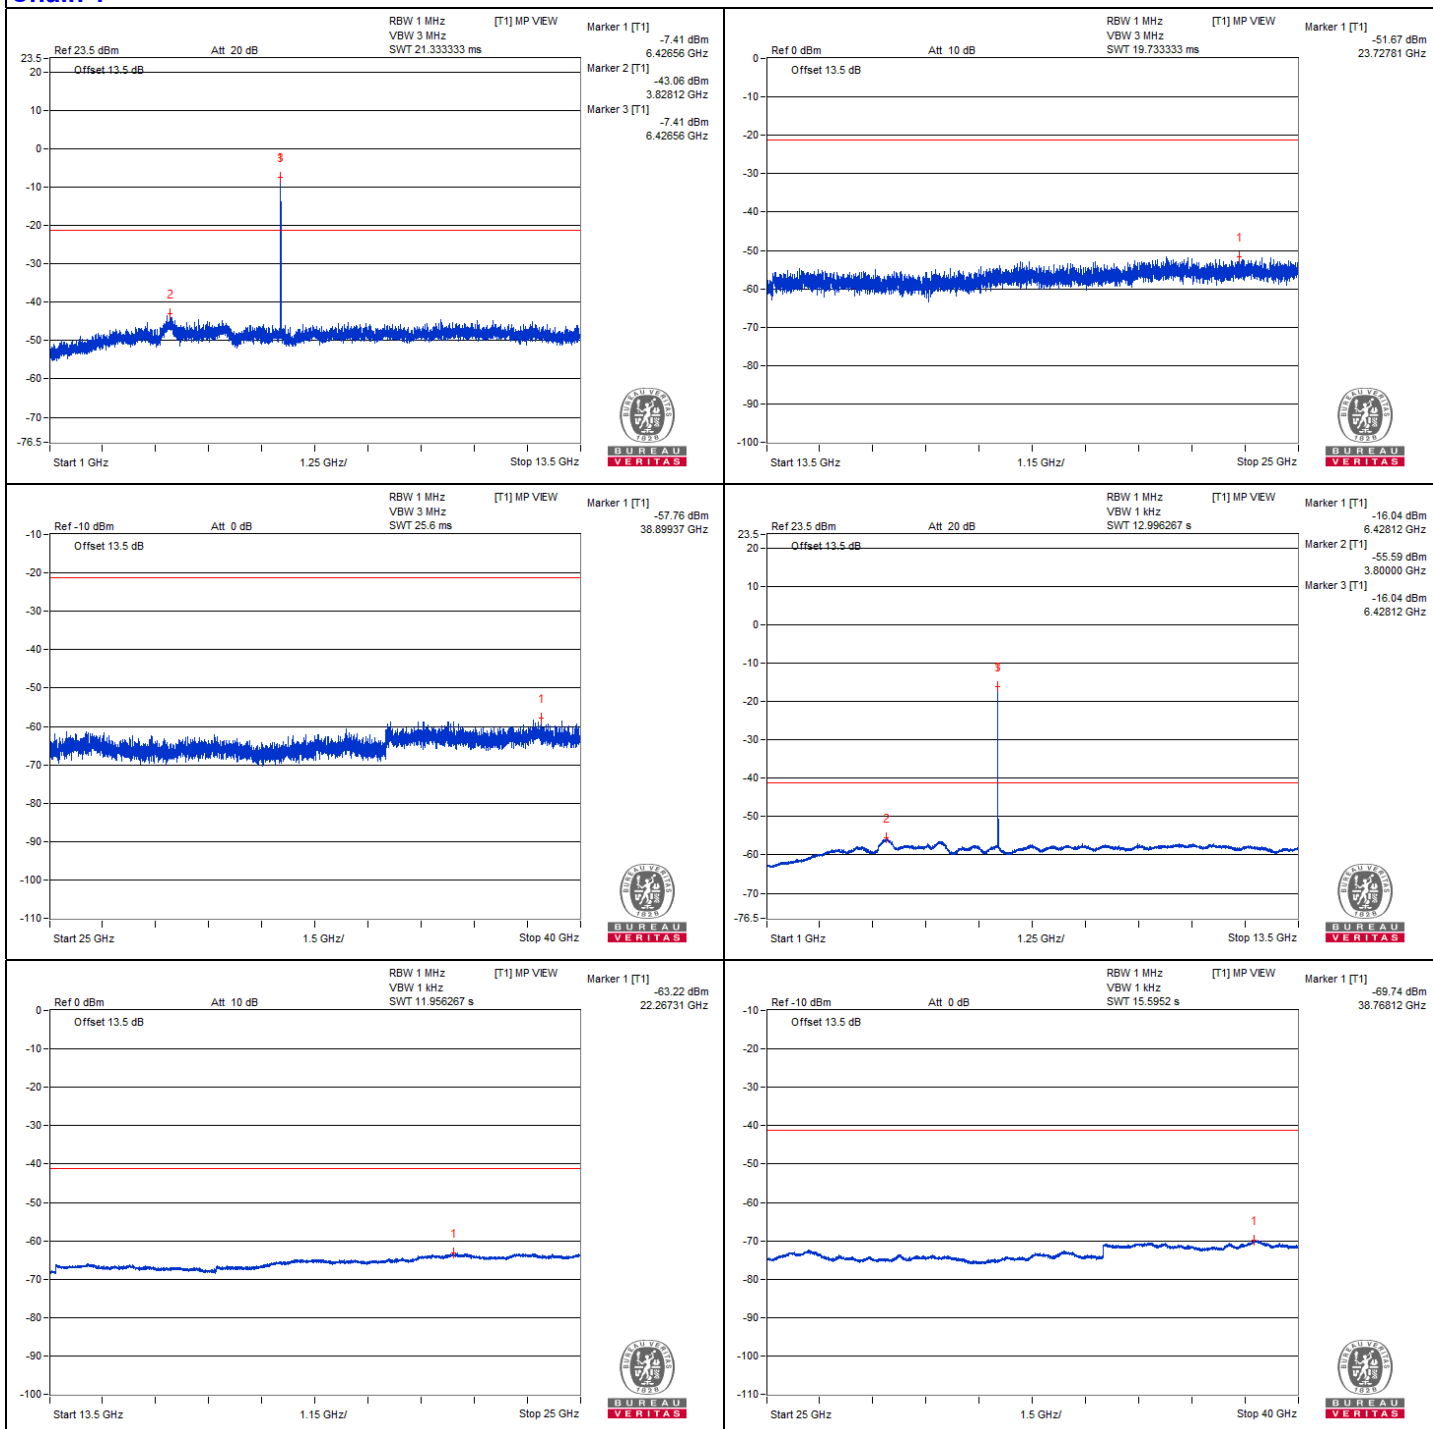

802.11be (EHT20) 52-tone RU - Channel 105


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12948.43	58.83 PK	88.2	-29.37	-47.45	-47.77	8.17	-36.43
2	#12945.31	47.68 AV	68.2	-20.52	-58.81	-58.71	8.17	-47.58
3	19423.93	50.94 PK	74	-23.06	-54.2	-57.36	8.17	-44.32
4	19419.62	41.22 AV	54	-12.78	-65.32	-65.13	8.17	-54.04


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

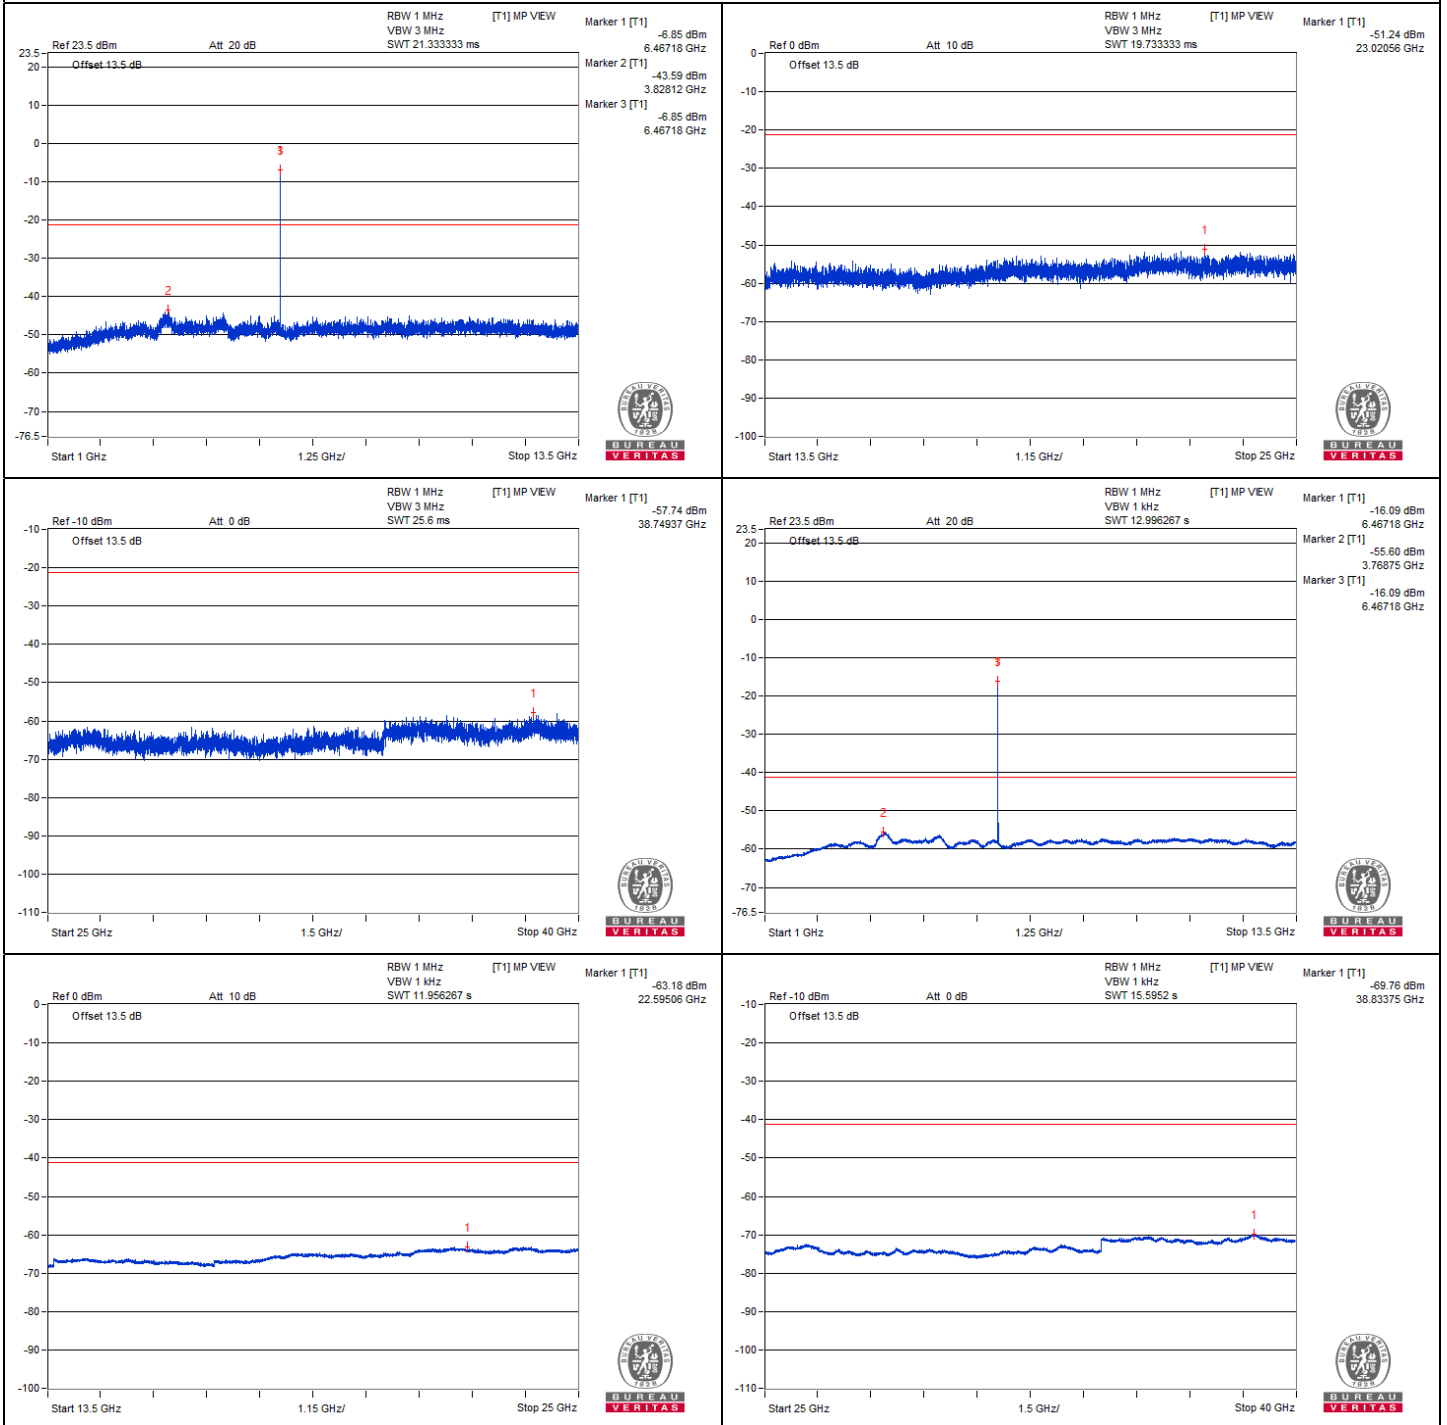

Chain 1

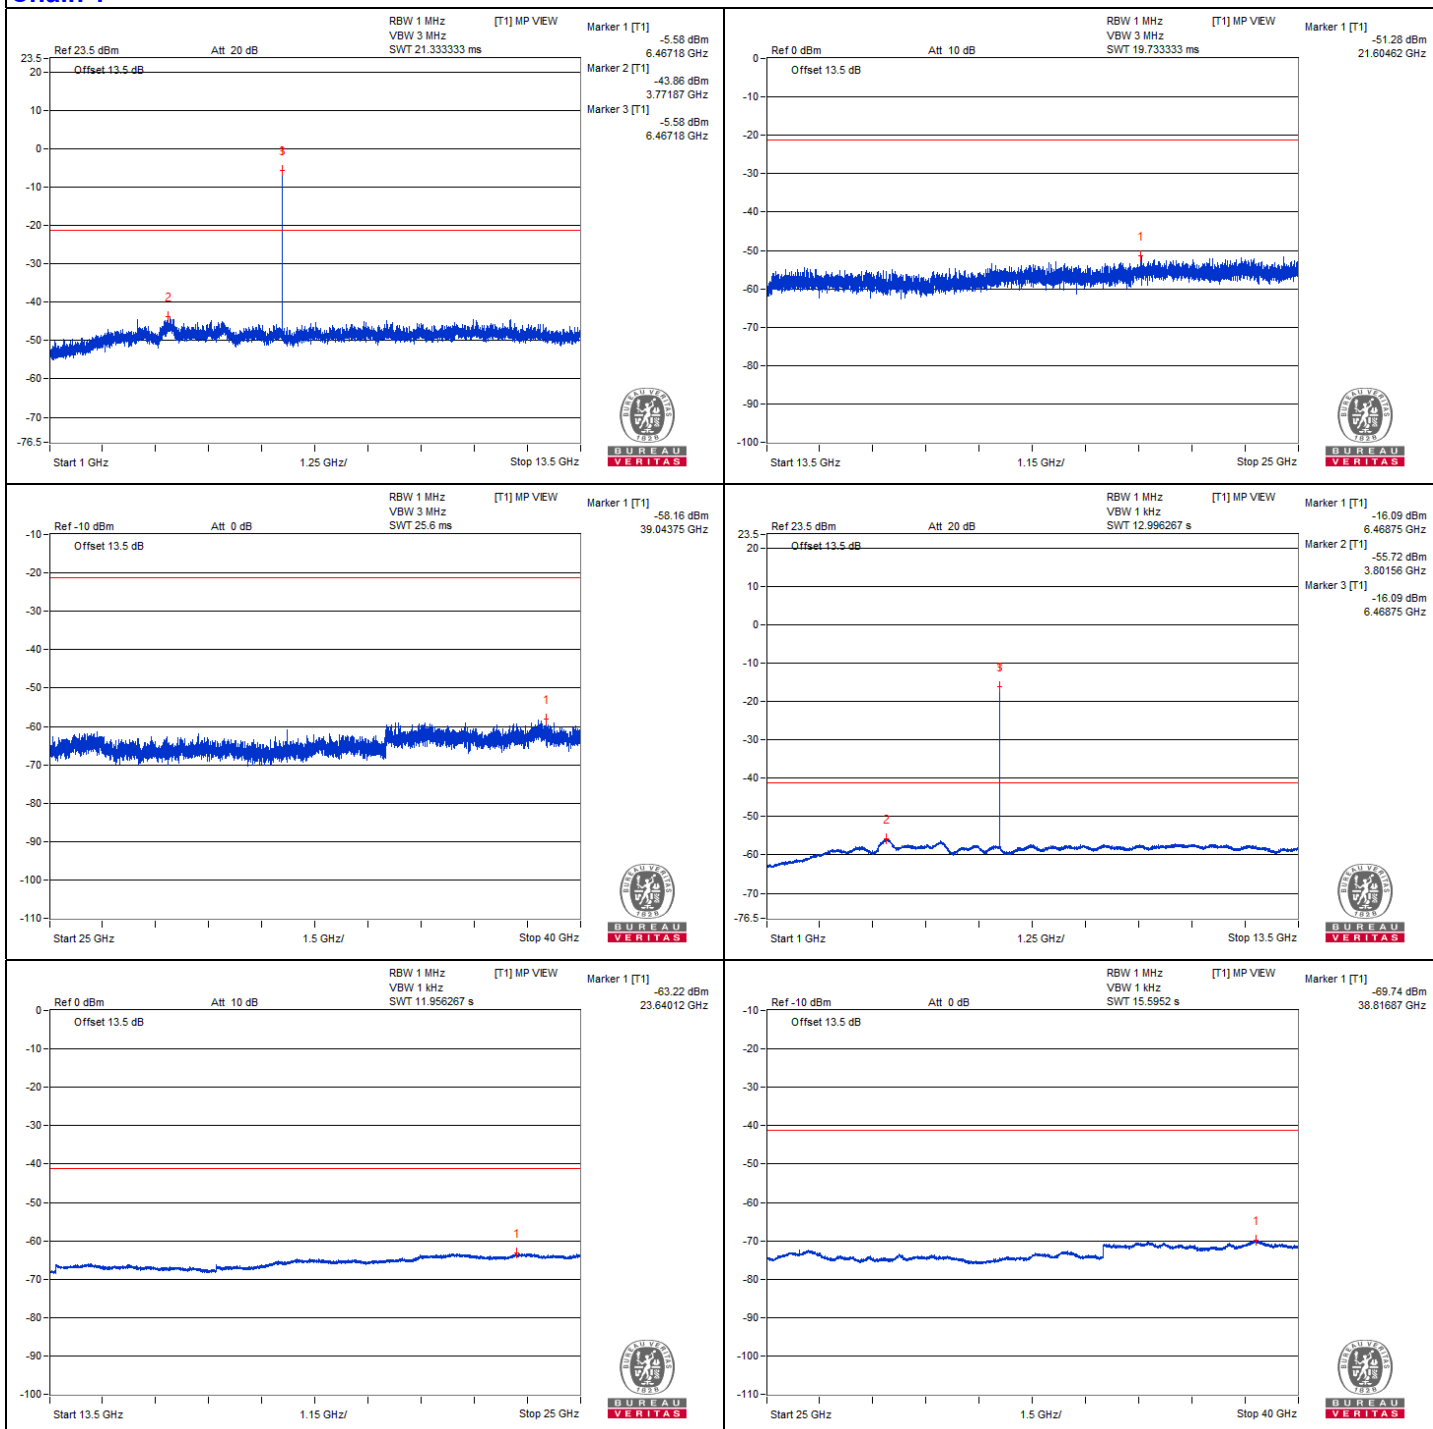

802.11be (EHT20) 52-tone RU - Channel 113


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13025	58.61 PK	88.2	-29.59	-47.82	-47.84	8.17	-36.65
2	#13037.5	47.64 AV	68.2	-20.56	-58.88	-58.72	8.17	-47.62
3	19550.43	50.38 PK	74	-23.62	-55.75	-56.39	8.17	-44.88
4	19540.37	40.97 AV	54	-13.03	-65.39	-65.56	8.17	-54.29


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

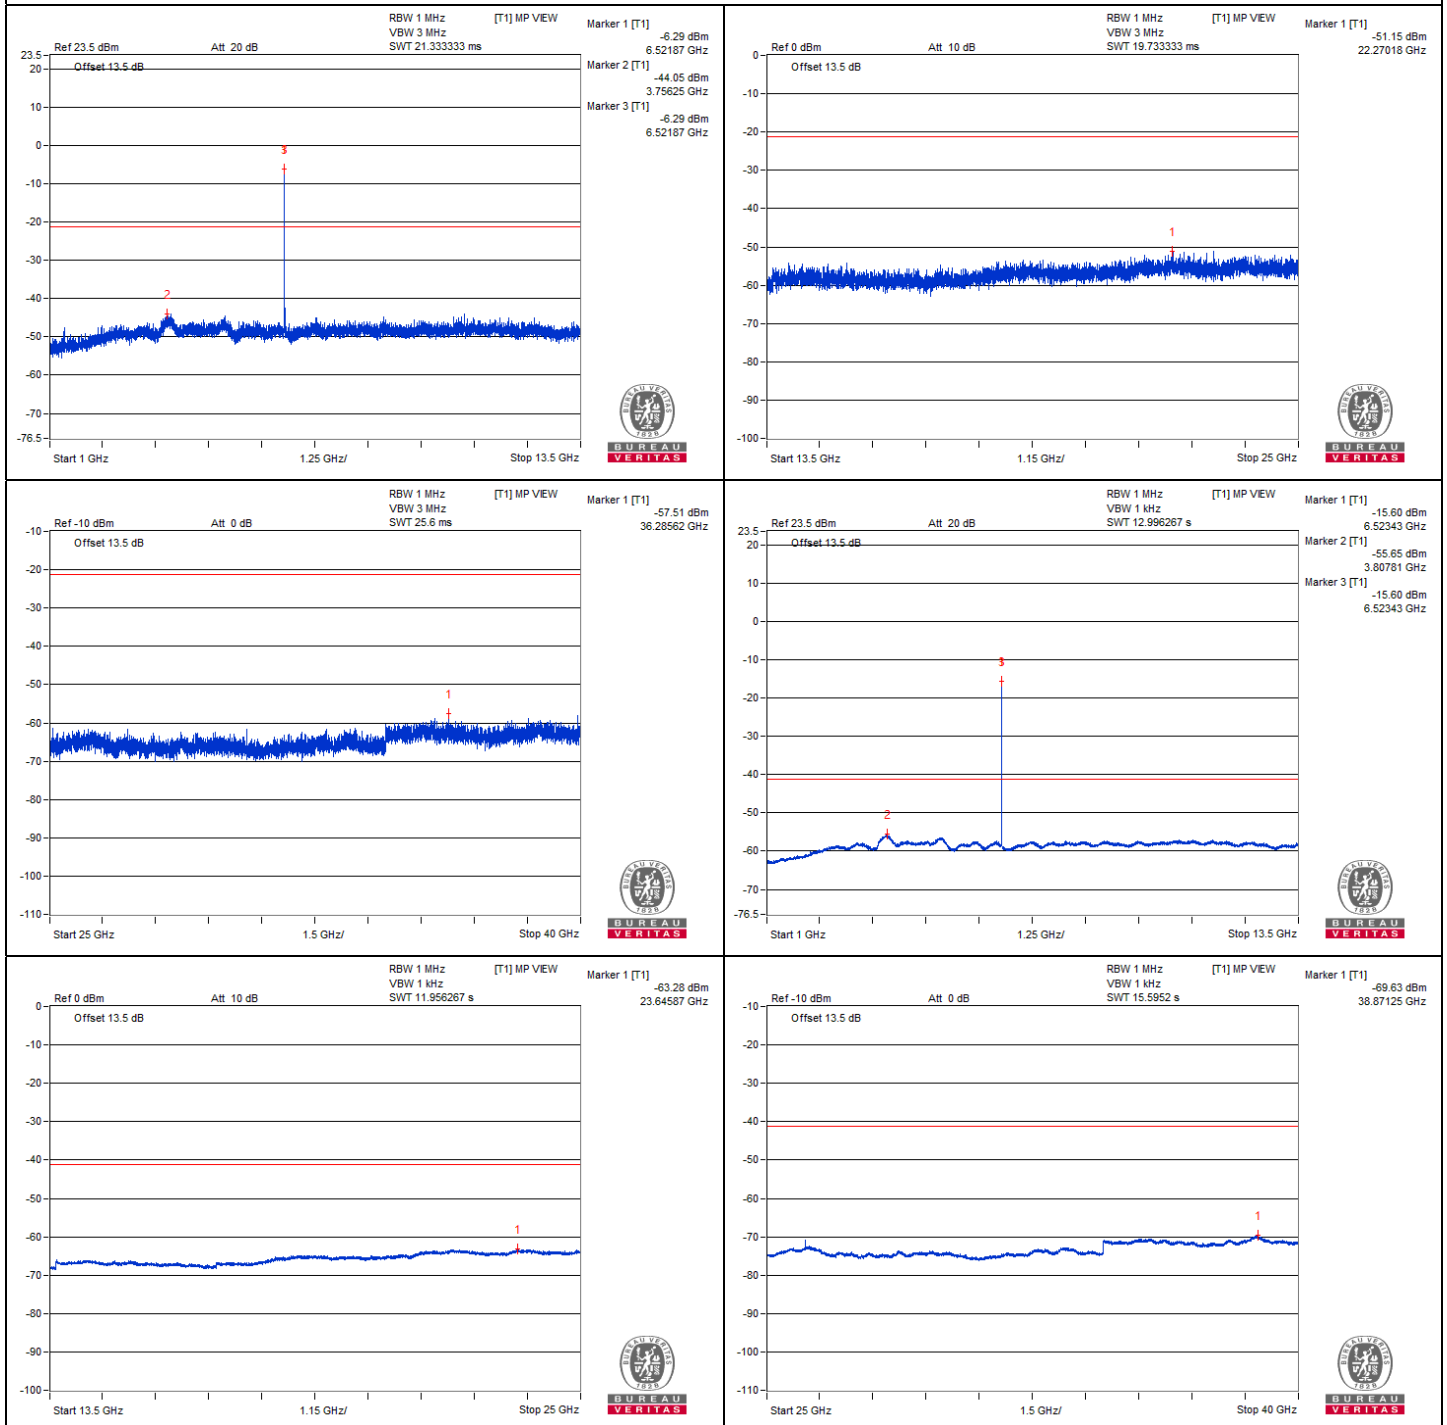

Chain 1

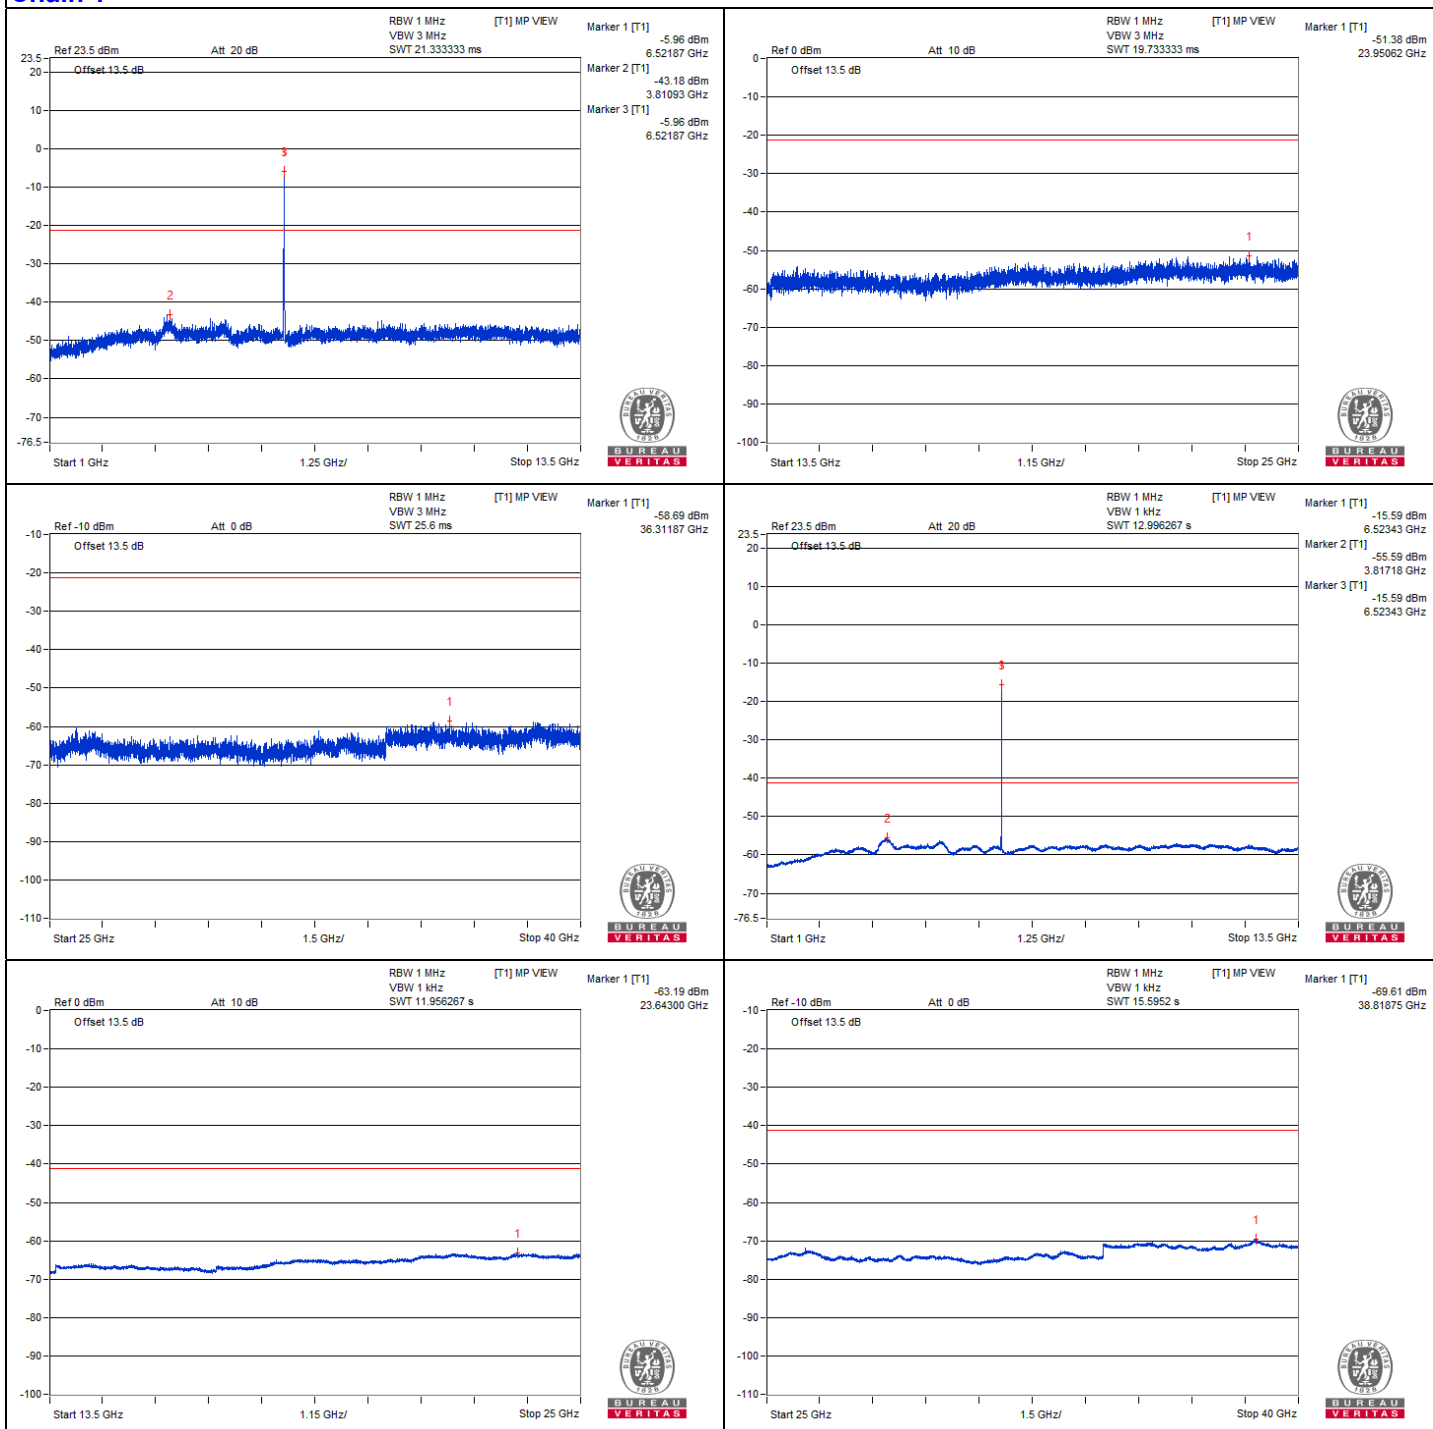

802.11be (EHT20) 52-tone RU - Channel 117


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13070.31	58.78 PK	88.2	-29.42	-47.02	-48.42	8.17	-36.48
2	#13067.18	47.91 AV	68.2	-20.29	-58.68	-58.38	8.17	-47.35
3	19597.87	50.4 PK	74	-23.6	-56.26	-55.84	8.17	-44.86
4	19600.75	41.02 AV	54	-12.98	-65.16	-65.7	8.17	-54.24


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

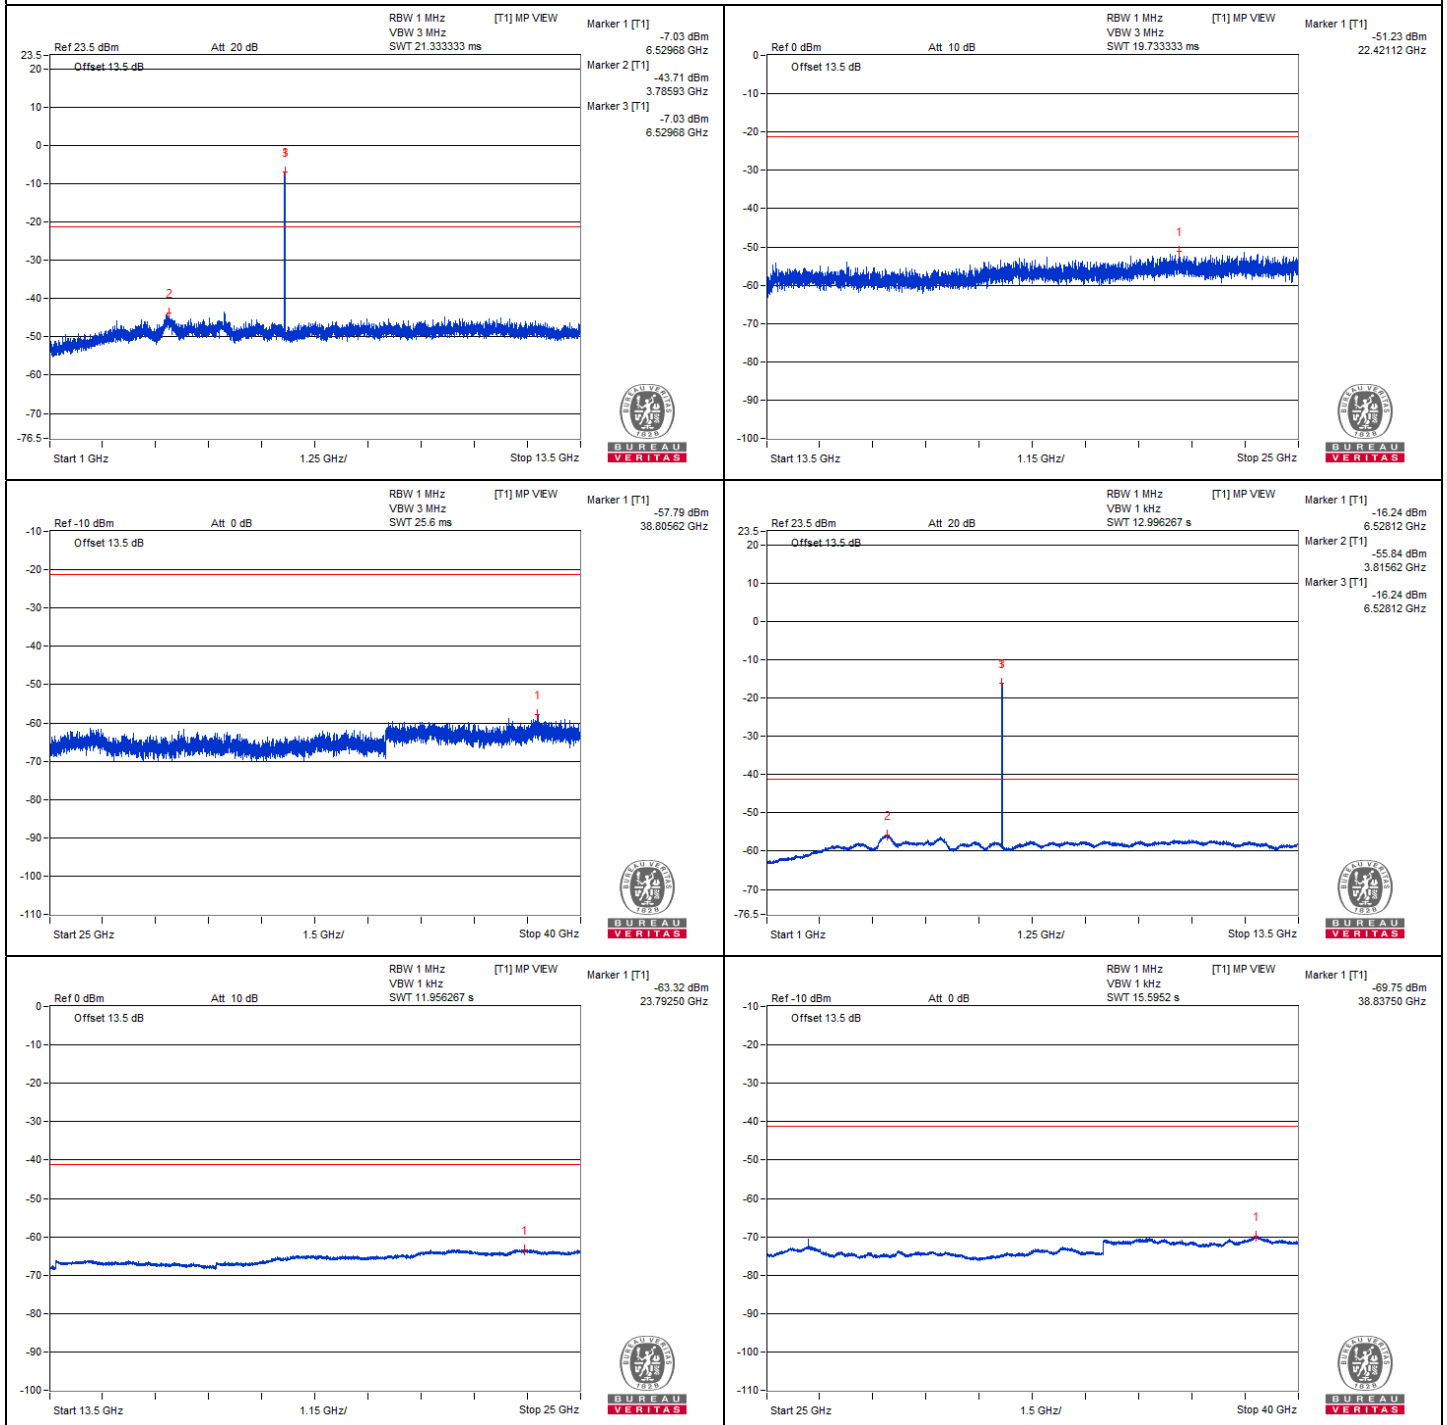

Chain 1

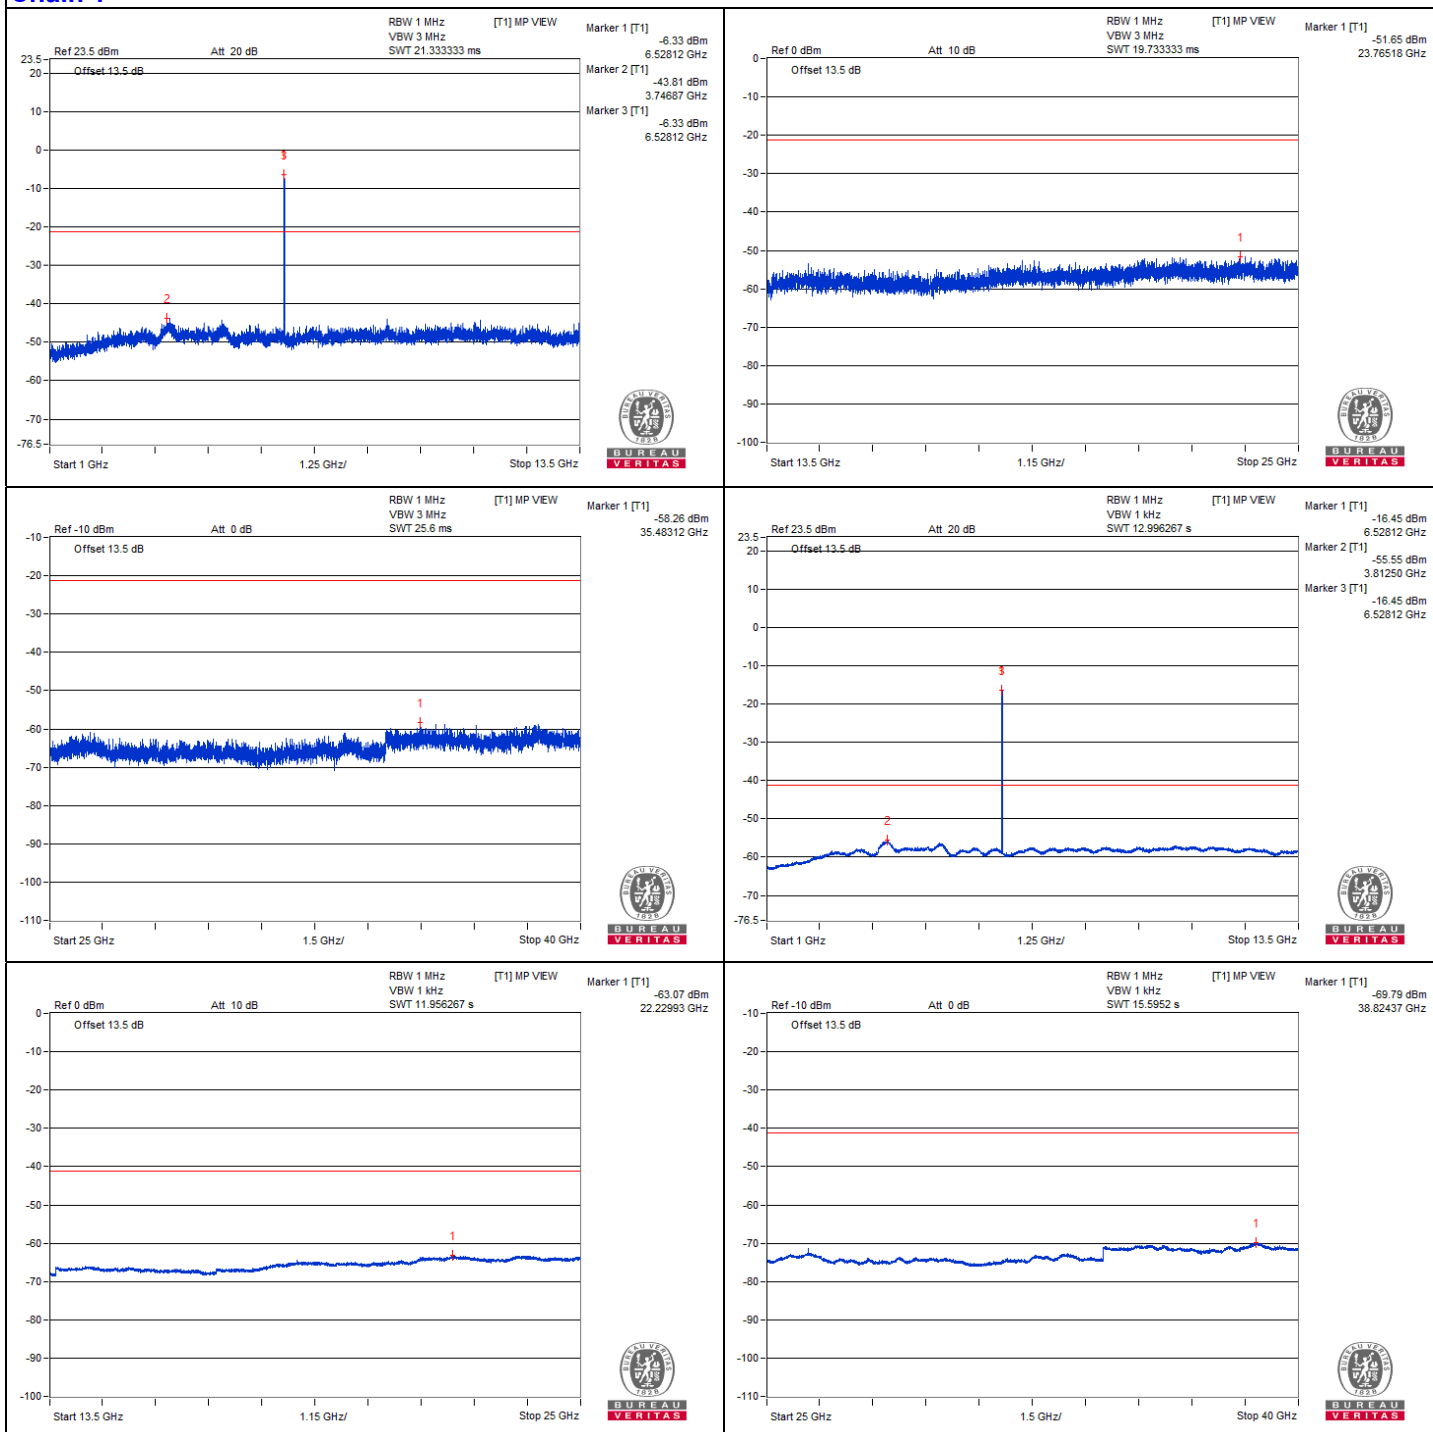

802.11be (EHT20) 52-tone RU - Channel 149


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13395.31	58.89 PK	74	-15.11	-48.55	-46.74	8.17	-36.37
2	13384.37	48.17 AV	54	-5.83	-58.31	-58.23	8.17	-47.09
3	20082.31	51.25 PK	74	-22.75	-54.04	-56.76	8.17	-44.01
4	20076.56	41.22 AV	54	-12.78	-65.21	-65.24	8.17	-54.04


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.

Chain 0

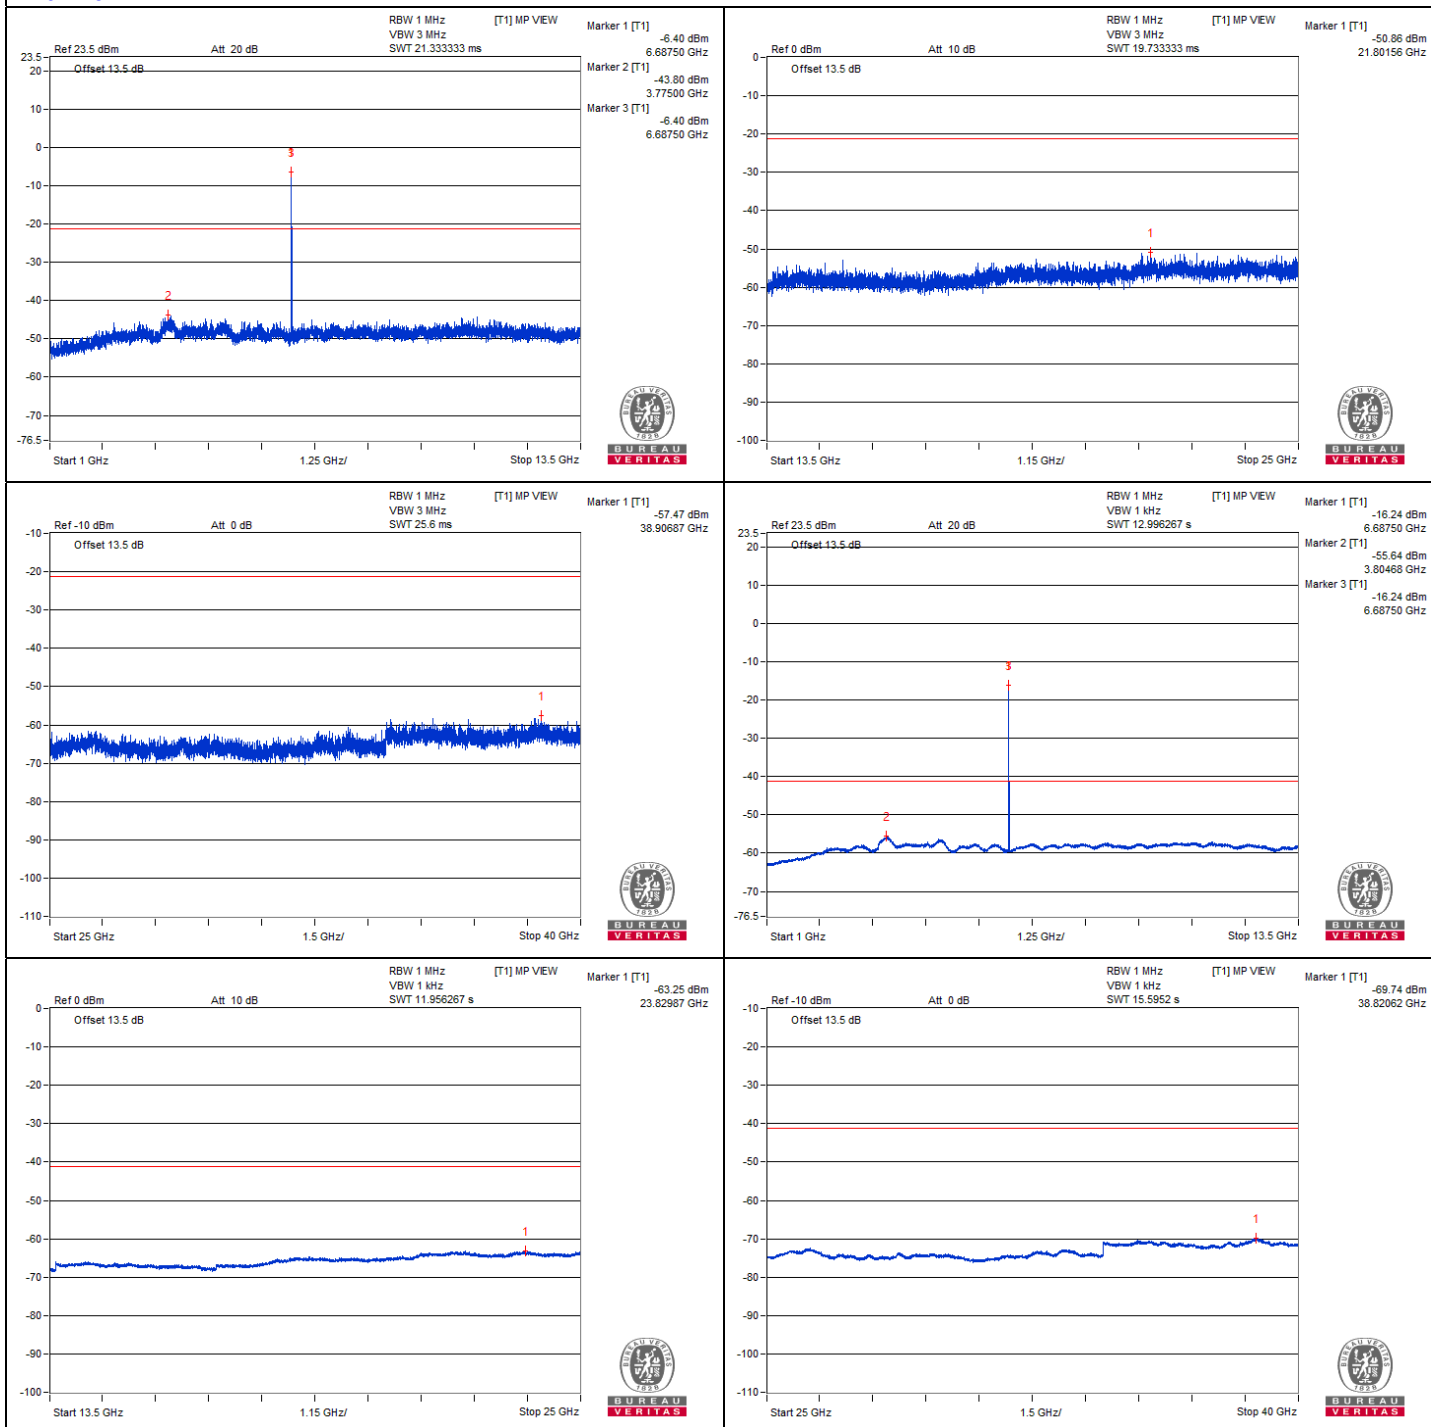

Chain 1

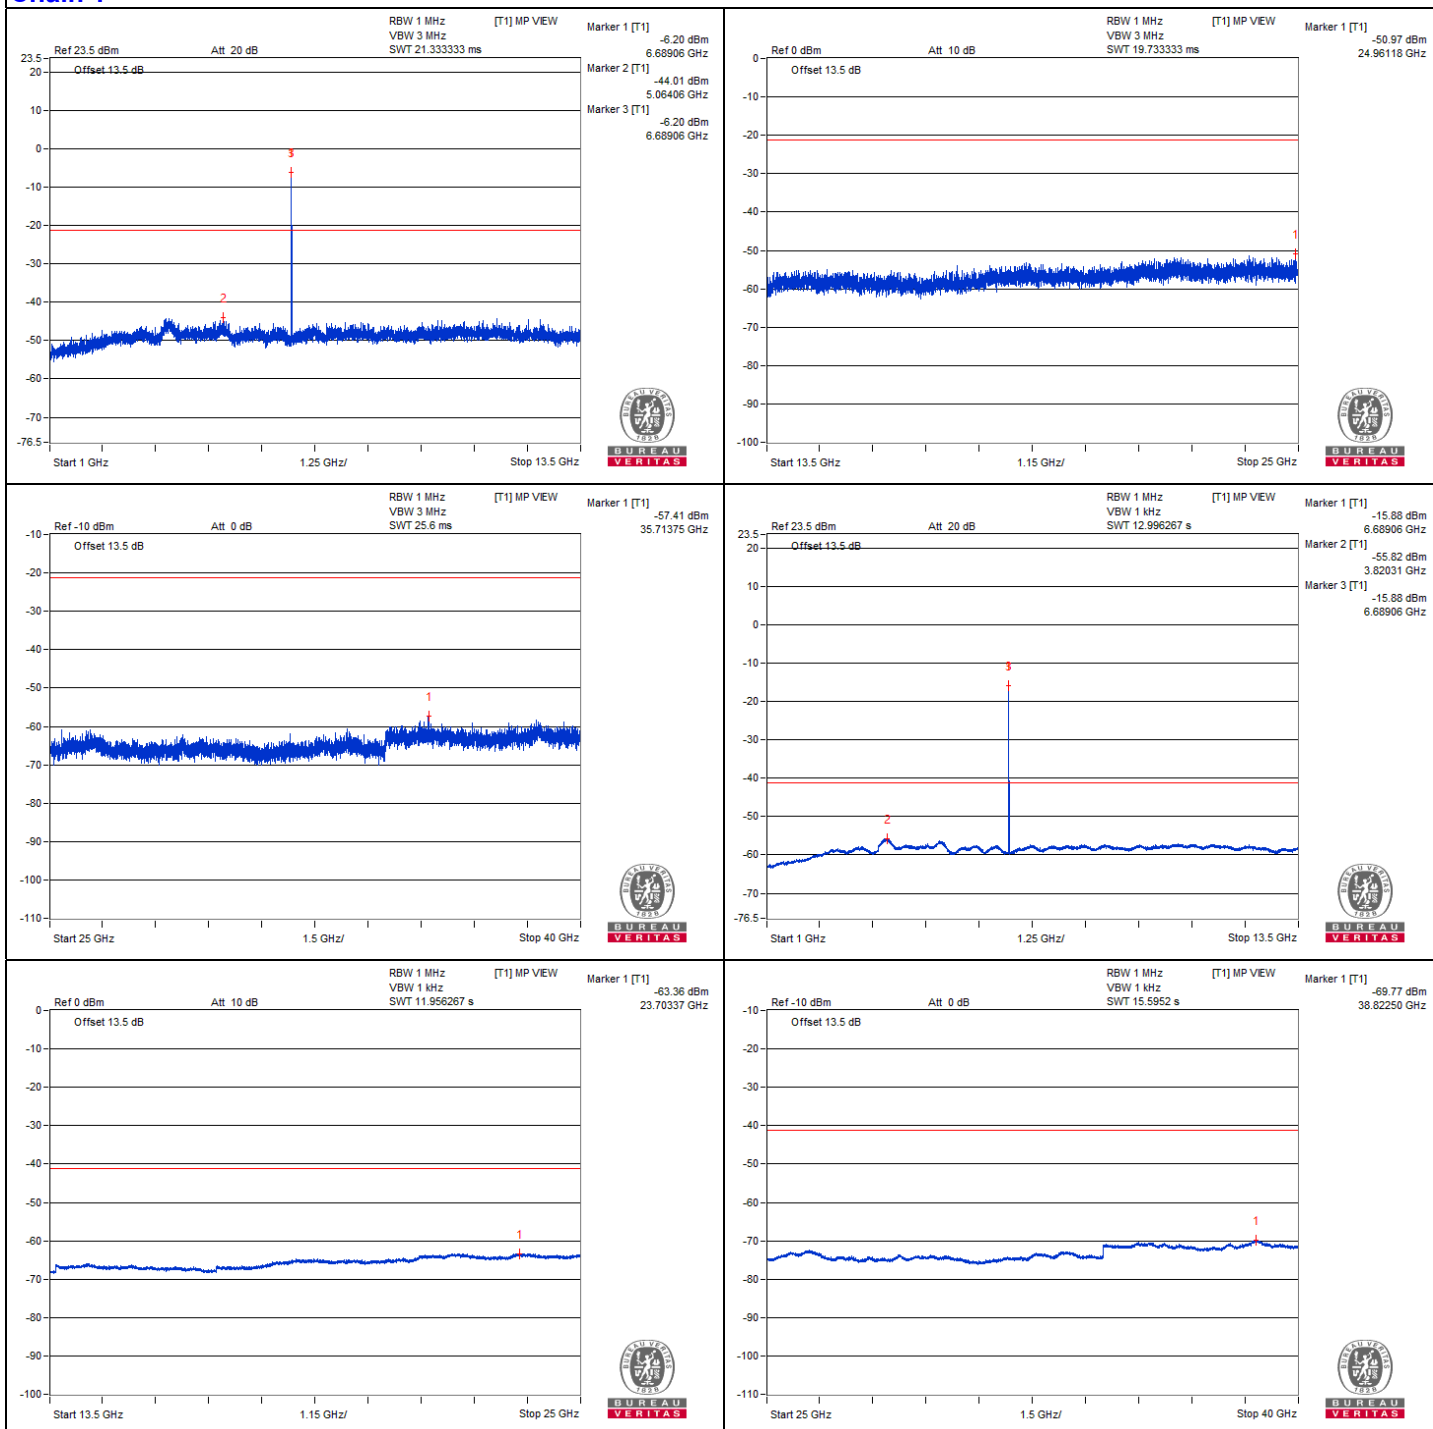

802.11be (EHT20) 52-tone RU - Channel 181


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13709.87	49.04 PK	88.2	-39.16	-57.85	-57	8.17	-46.22
2	#13704.12	39.69 AV	68.2	-28.51	-66.9	-66.61	8.17	-55.57
3	20568.18	51.07 PK	74	-22.93	-56.59	-54.42	8.17	-44.19
4	20562.43	41.16 AV	54	-12.84	-65.31	-65.26	8.17	-54.10


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

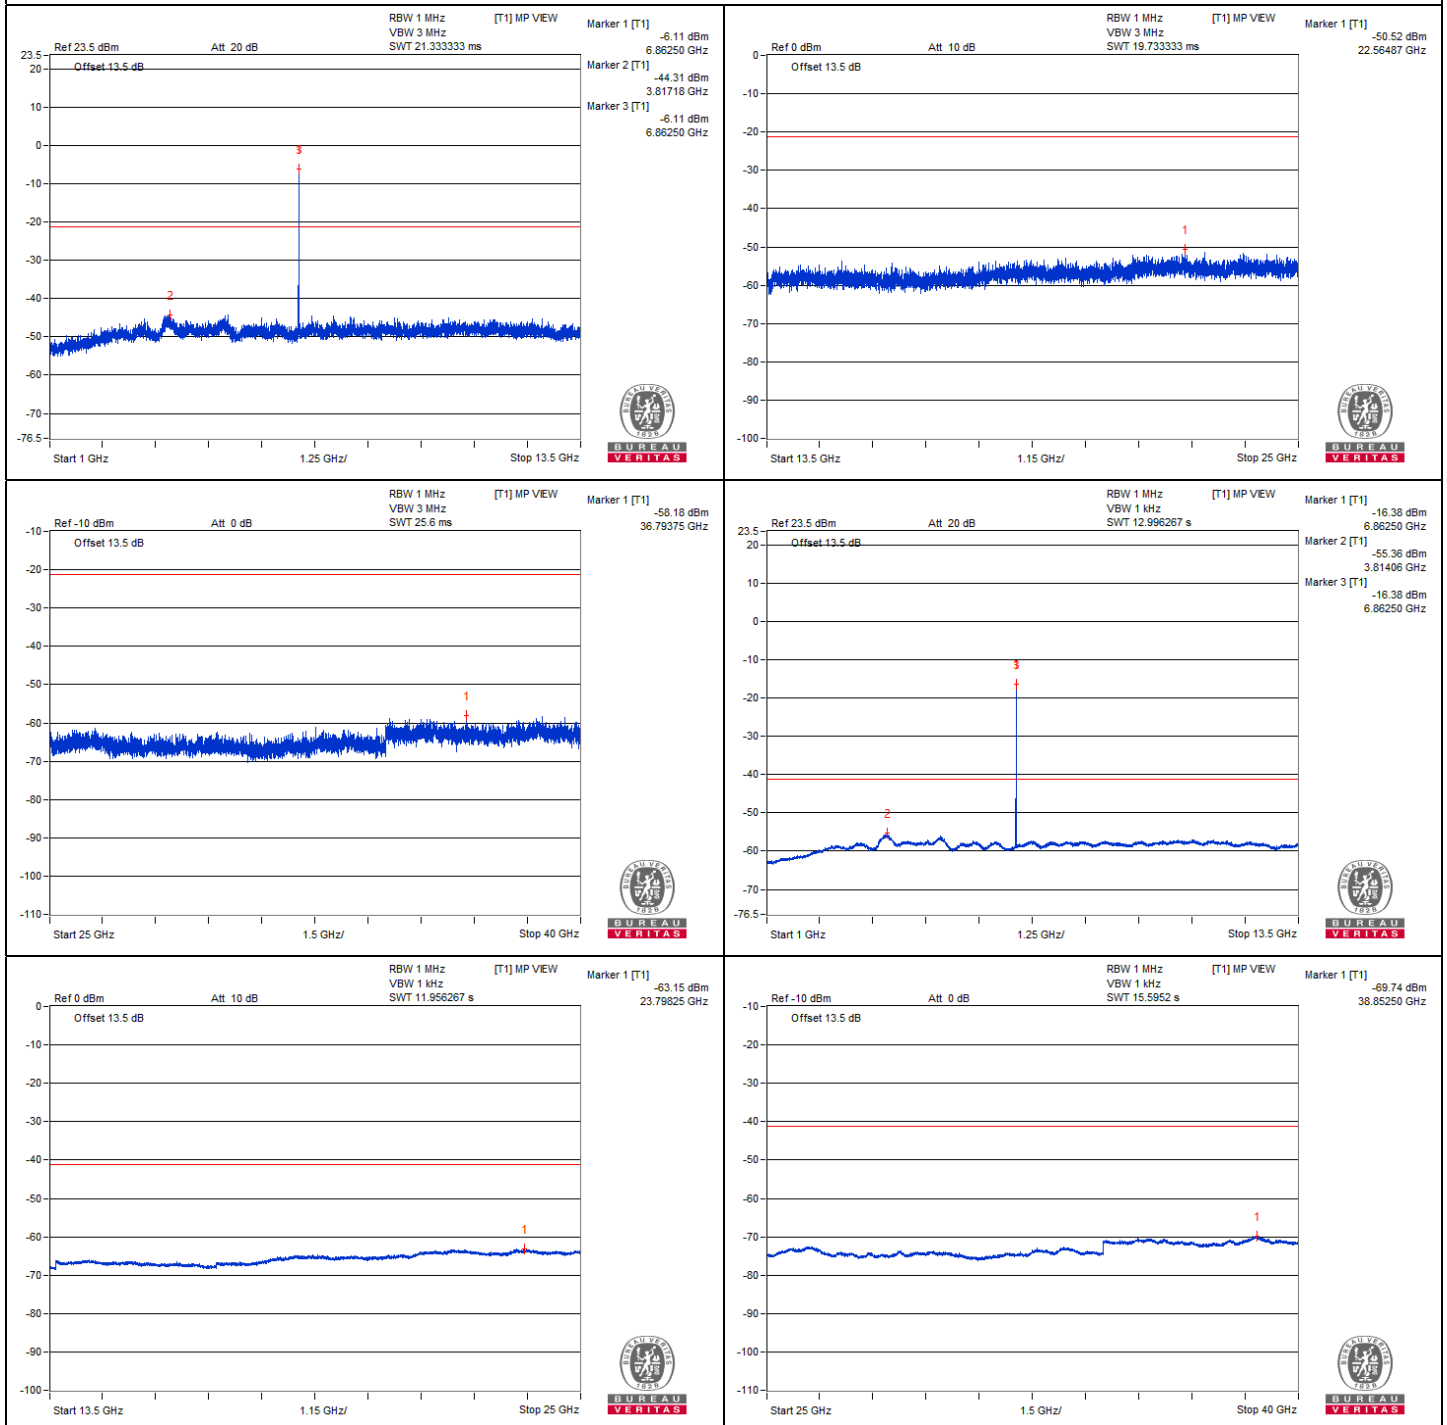

Chain 1

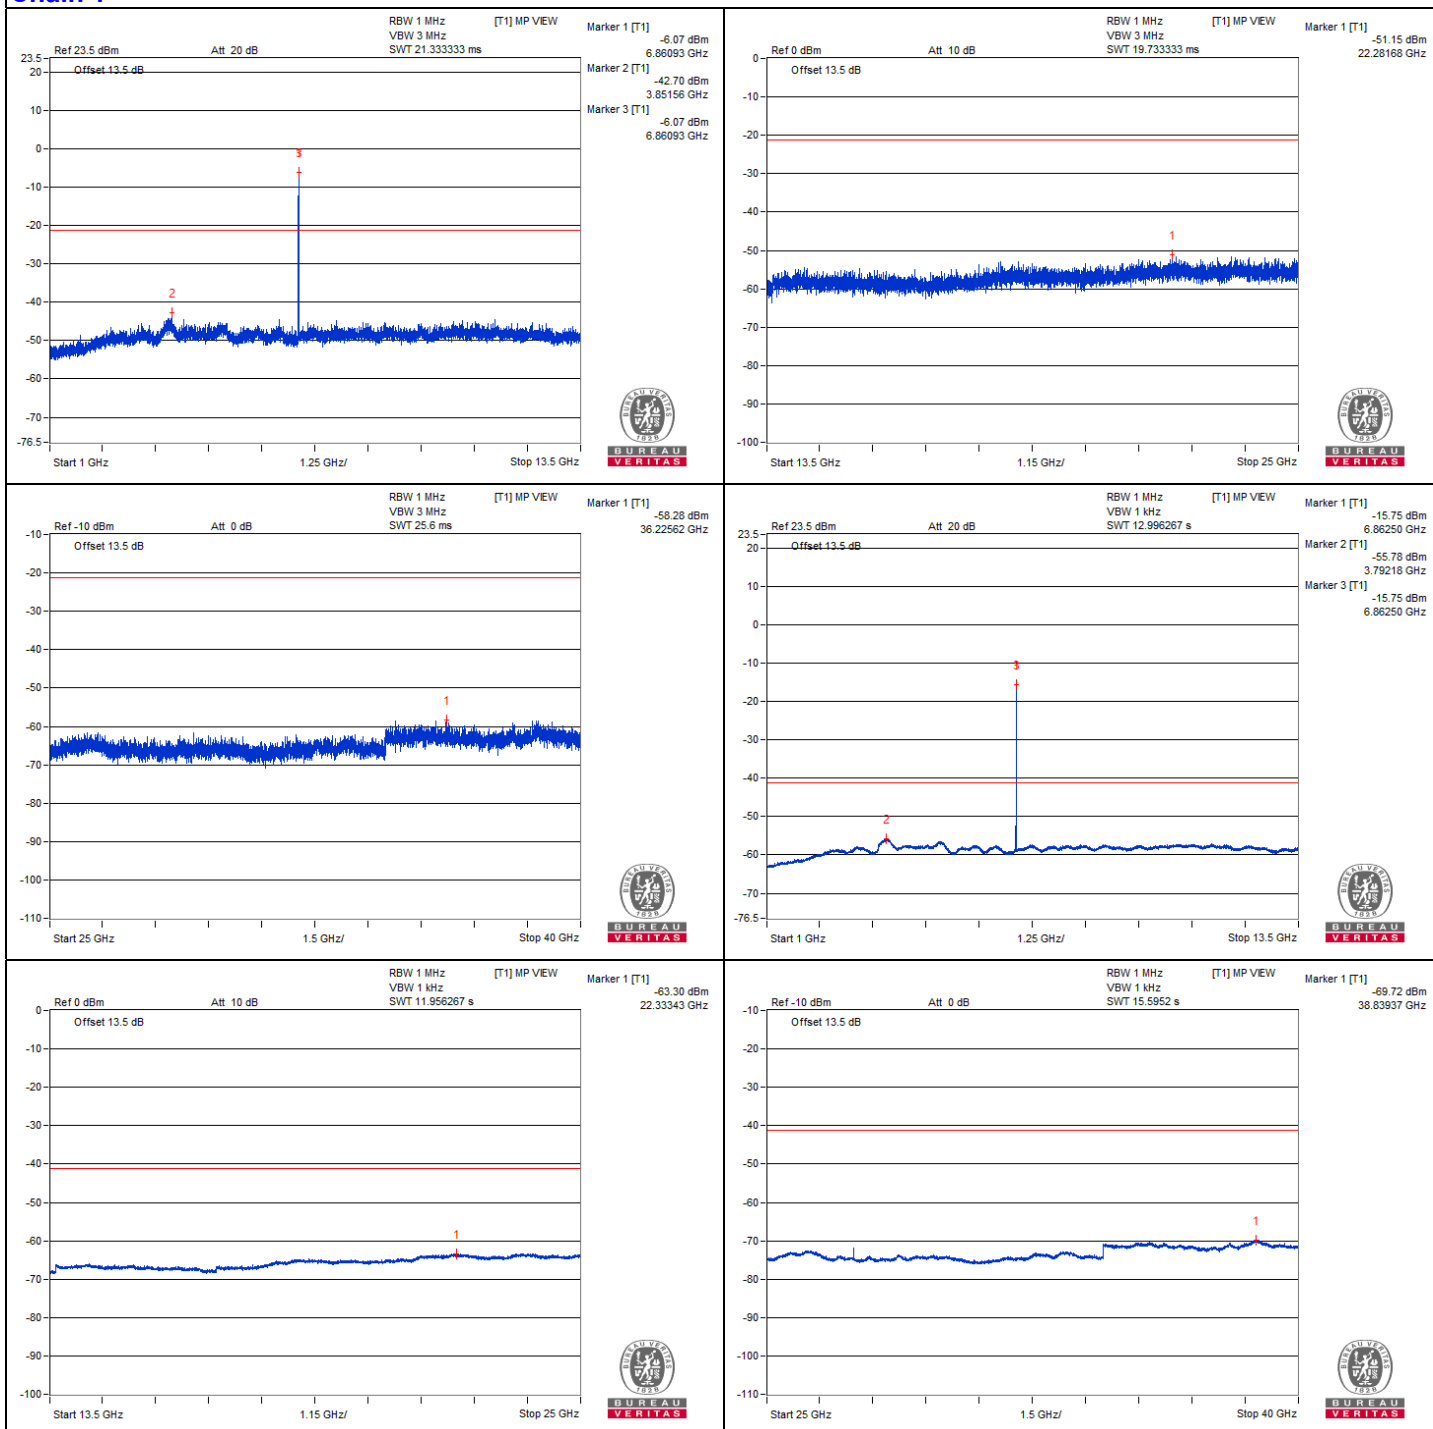

802.11be (EHT20) 52-tone RU - Channel 185


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13754.43	49 PK	88.2	-39.2	-58.07	-56.89	8.17	-46.26
2	#13754.43	39.87 AV	68.2	-28.33	-66.5	-66.65	8.17	-55.39
3	20634.31	51.87 PK	74	-22.13	-54.3	-54.85	8.17	-43.39
4	20630	41 AV	54	-13	-65.34	-65.55	8.17	-54.26


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

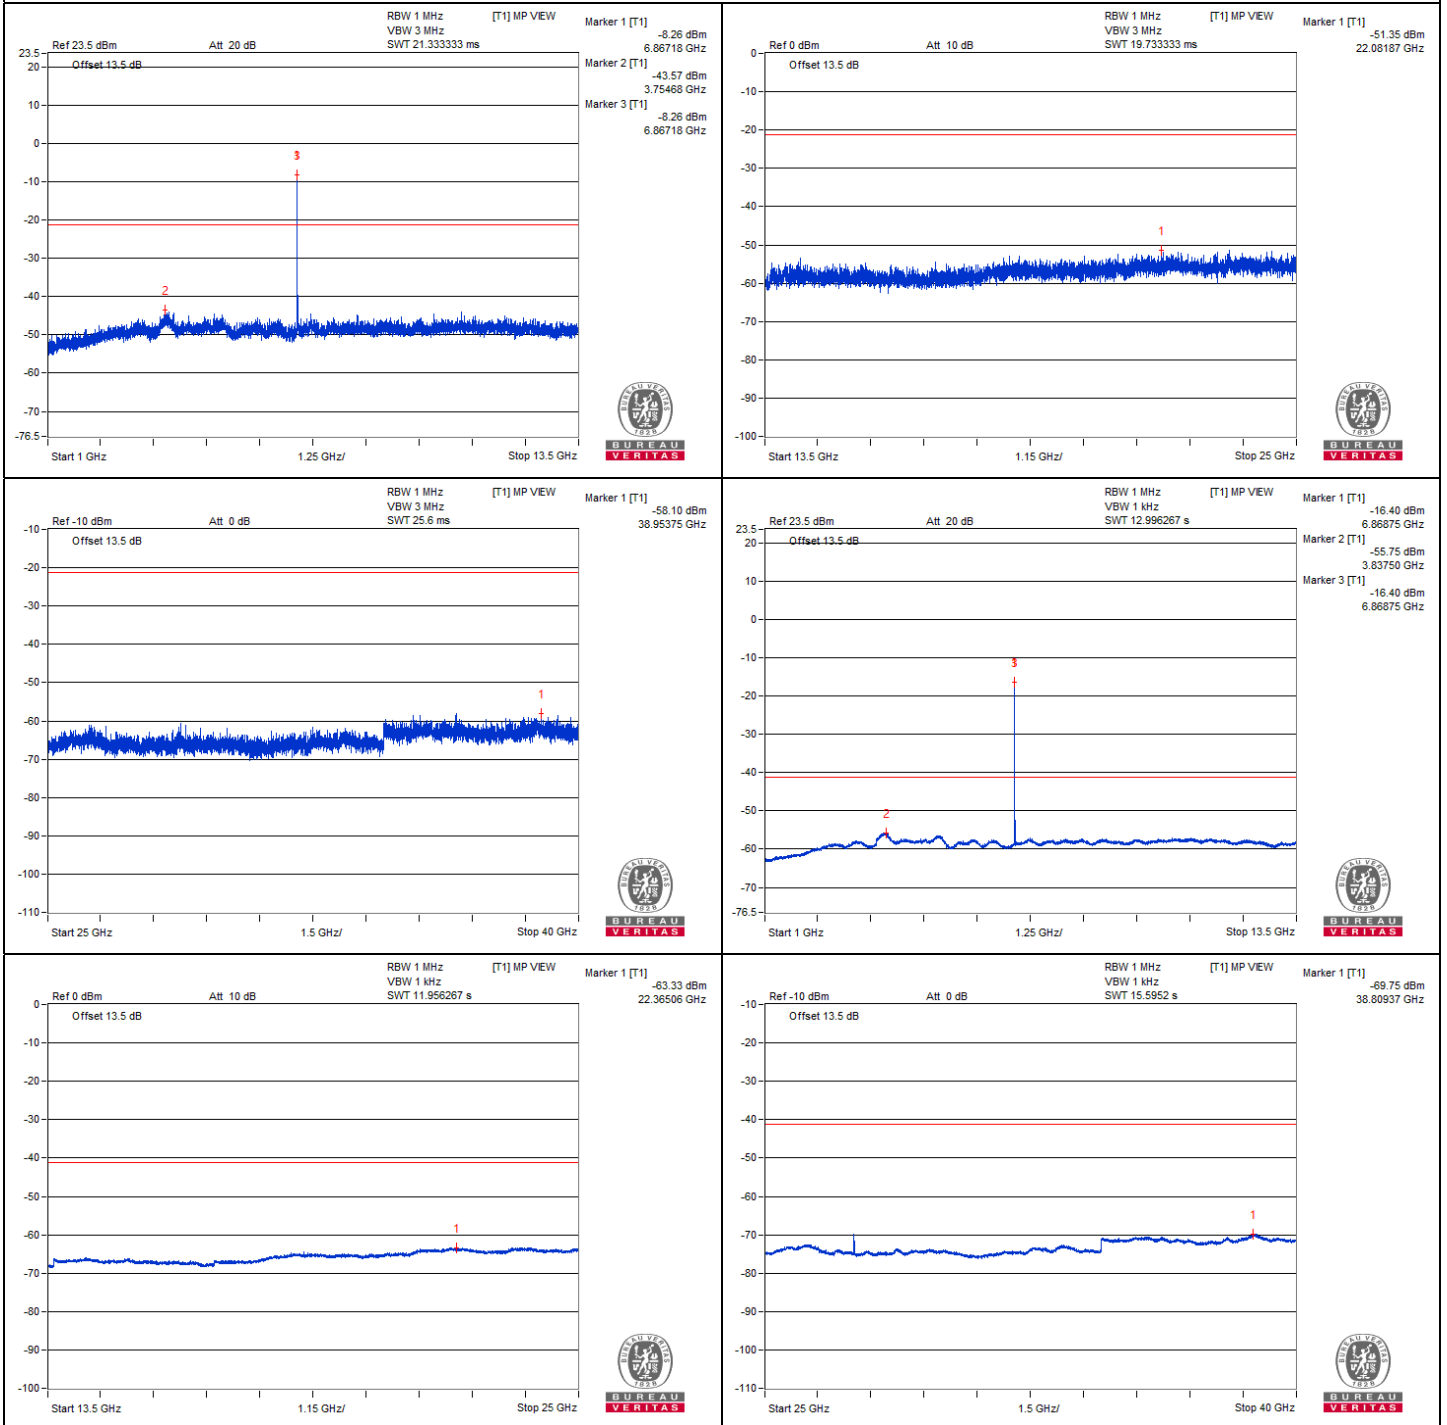

Chain 1

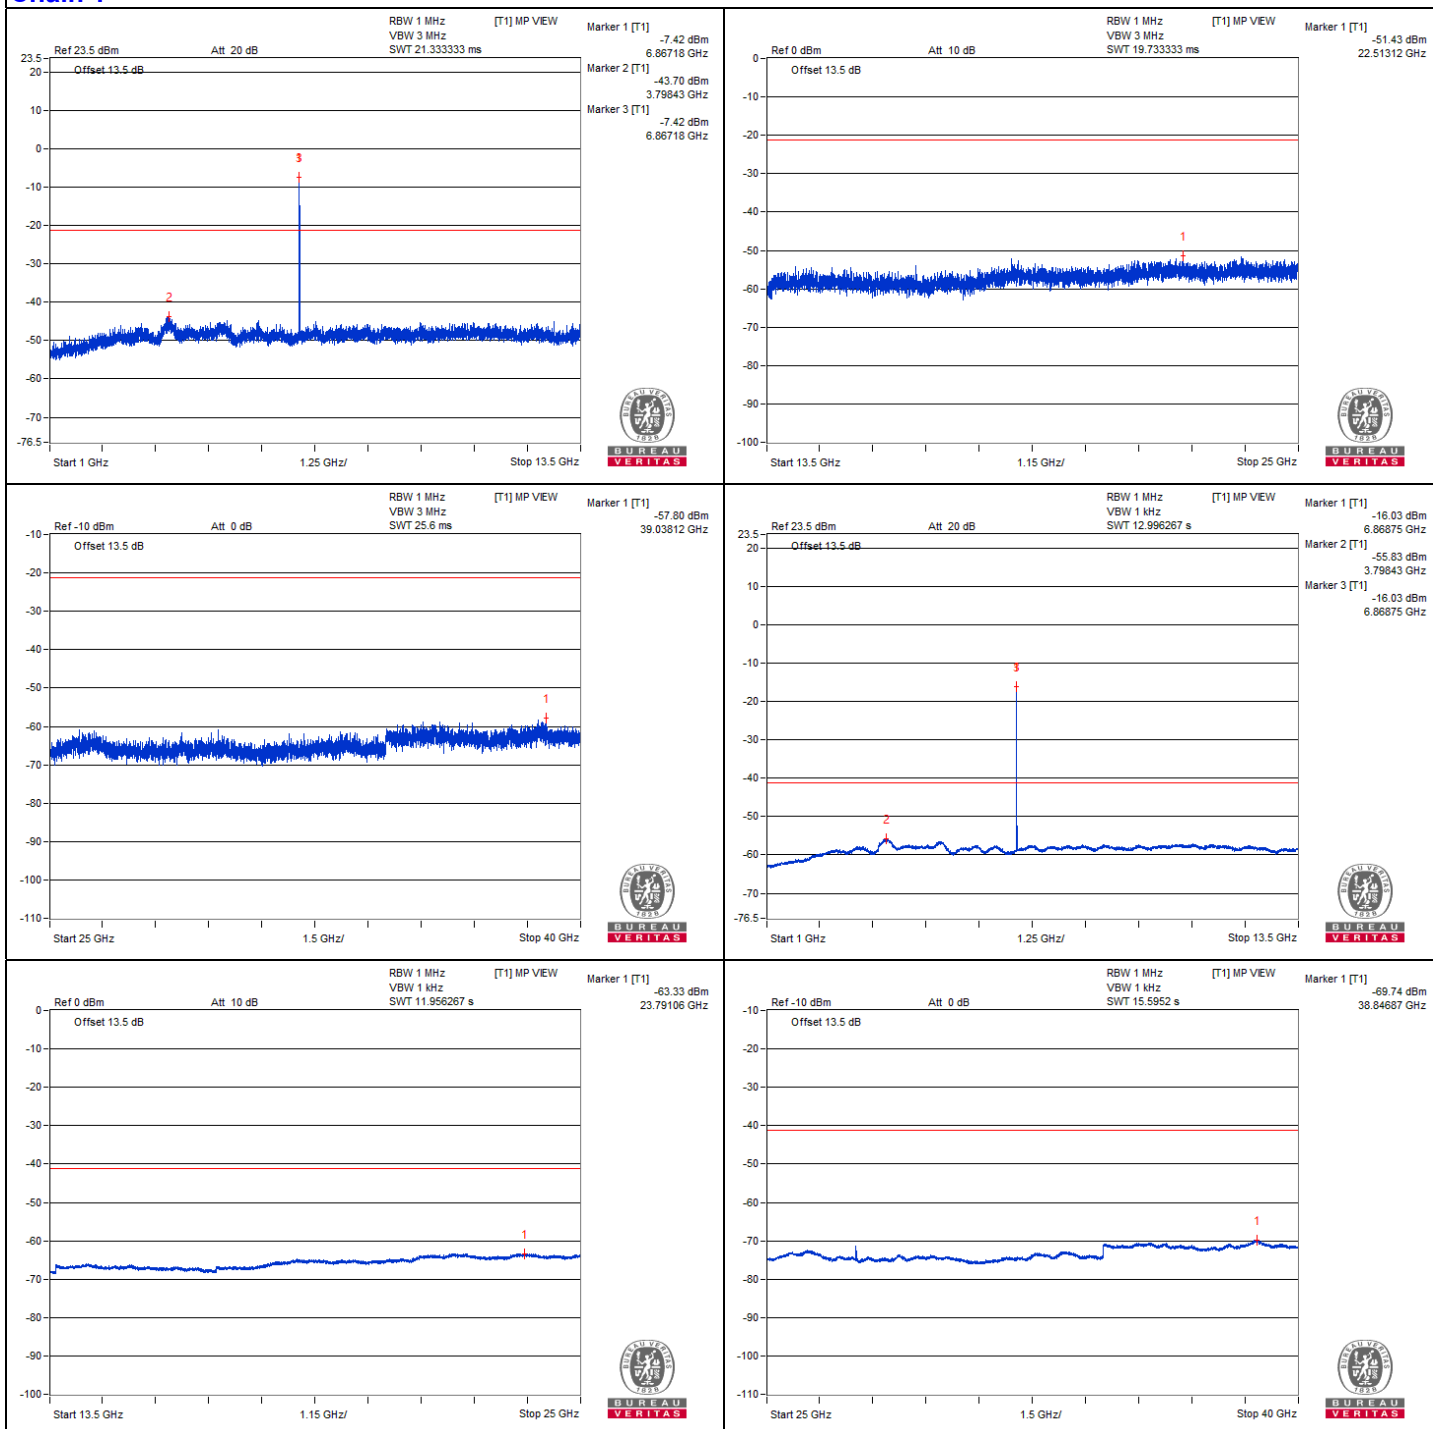

802.11be (EHT20) 52-tone RU - Channel 209


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13983	48.96 PK	88.2	-39.24	-56.96	-58.07	8.17	-46.30
2	#13998.81	39.73 AV	68.2	-28.47	-66.77	-66.66	8.17	-55.53
3	20989.37	51.1 PK	74	-22.9	-55.22	-55.46	8.17	-44.16
4	20975	41.36 AV	54	-12.64	-65.32	-64.86	8.17	-53.90


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

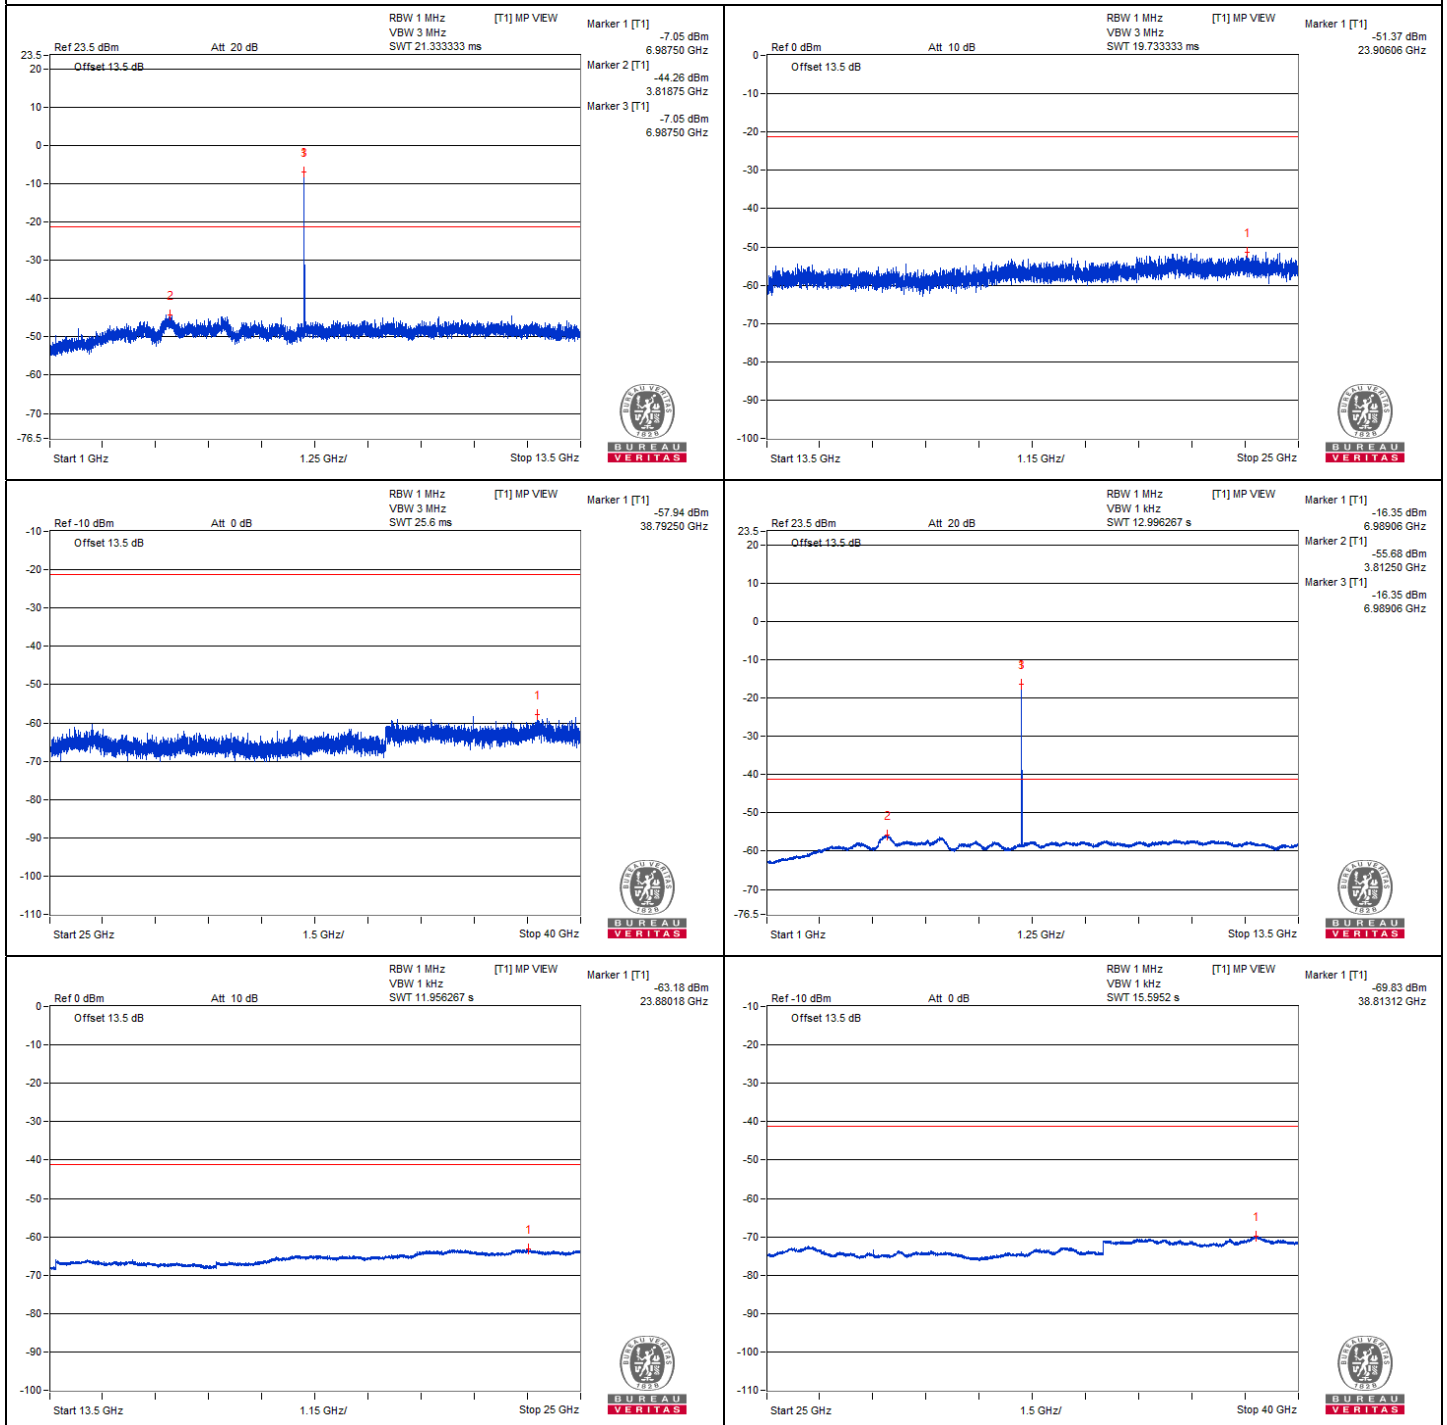

Chain 1

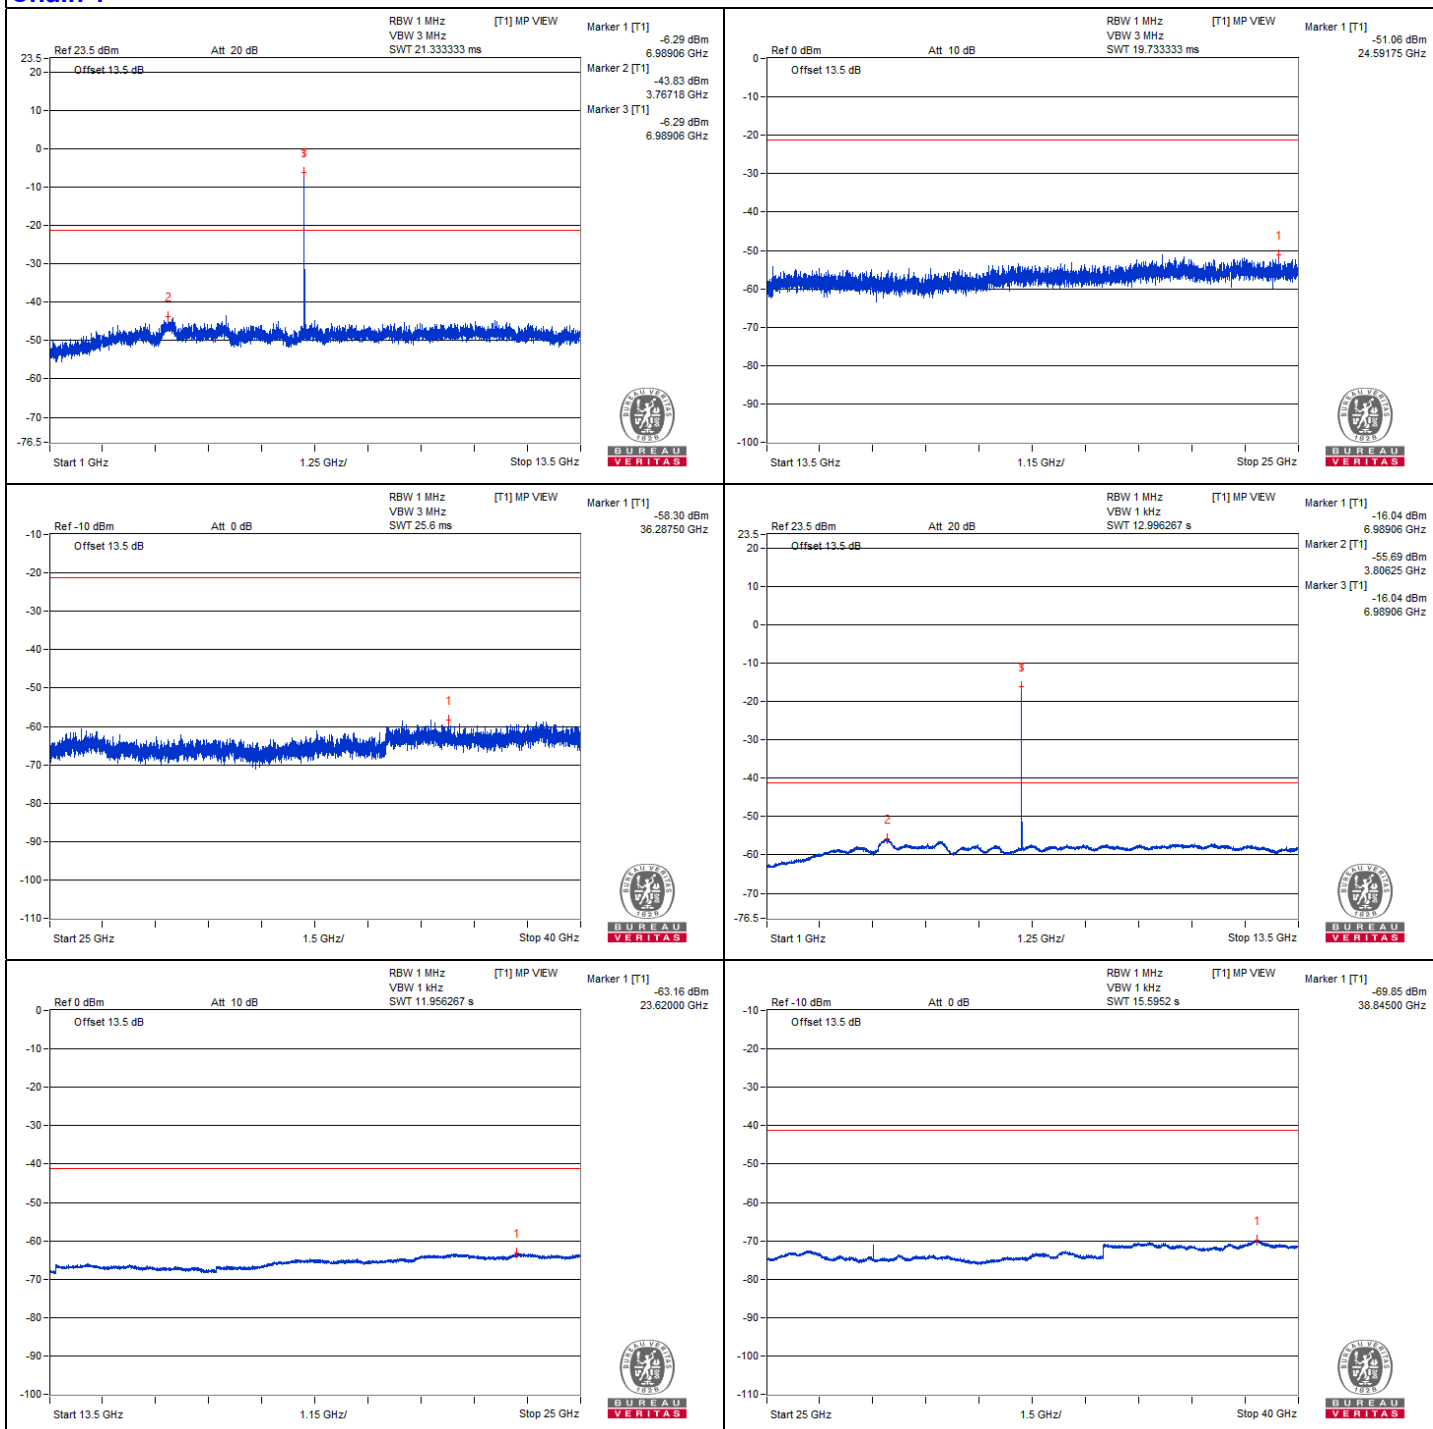

802.11be (EHT20) 52-tone RU - Channel 233







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#14234.56	50.07 PK	88.2	-38.13	-58.25	-55.06	8.17	-45.19
2	#14237.43	40.01 AV	68.2	-28.19	-66.66	-66.21	8.17	-55.25
3	21348.75	51.44 PK	74	-22.56	-57.93	-53.26	8.17	-43.82
4	21344.43	41.46 AV	54	-12.54	-64.98	-64.98	8.17	-53.80


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

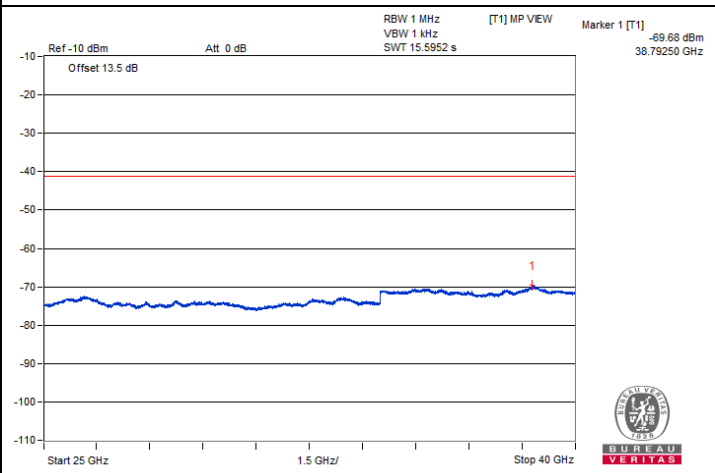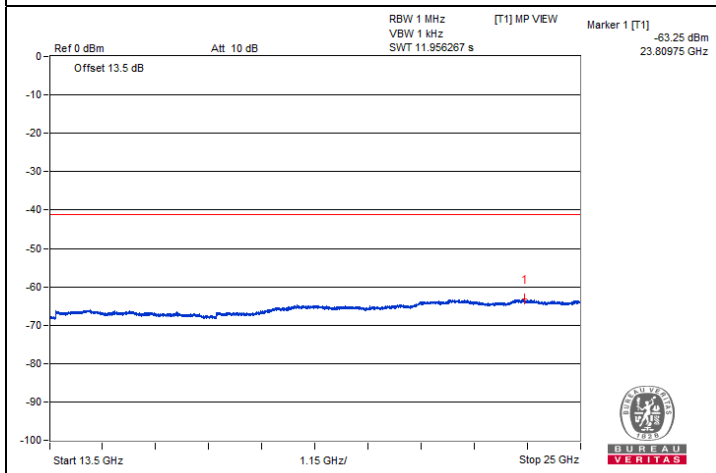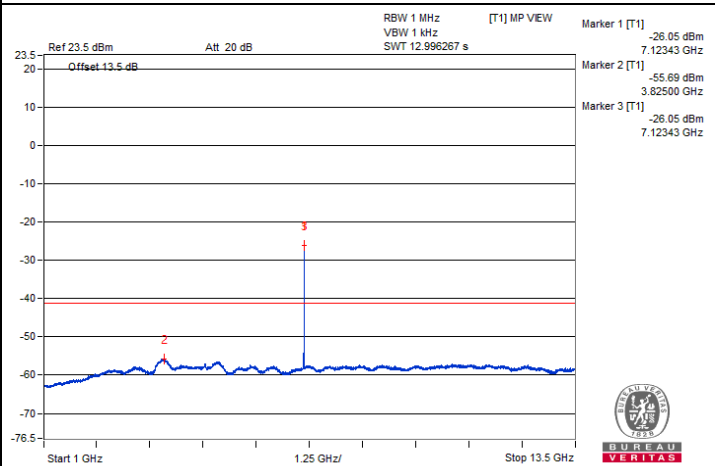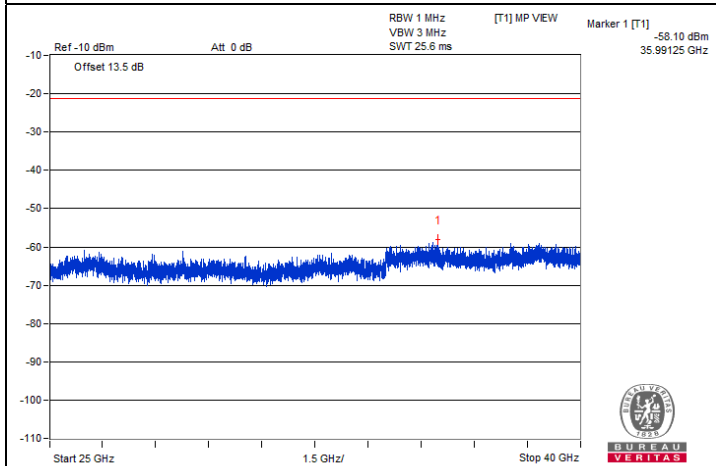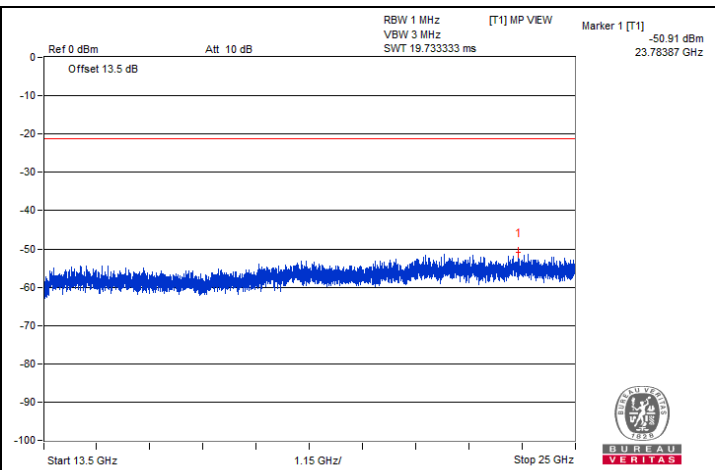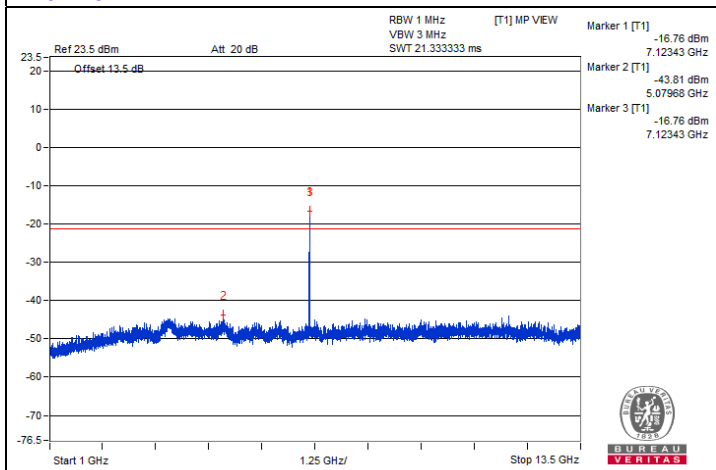

Chain 1

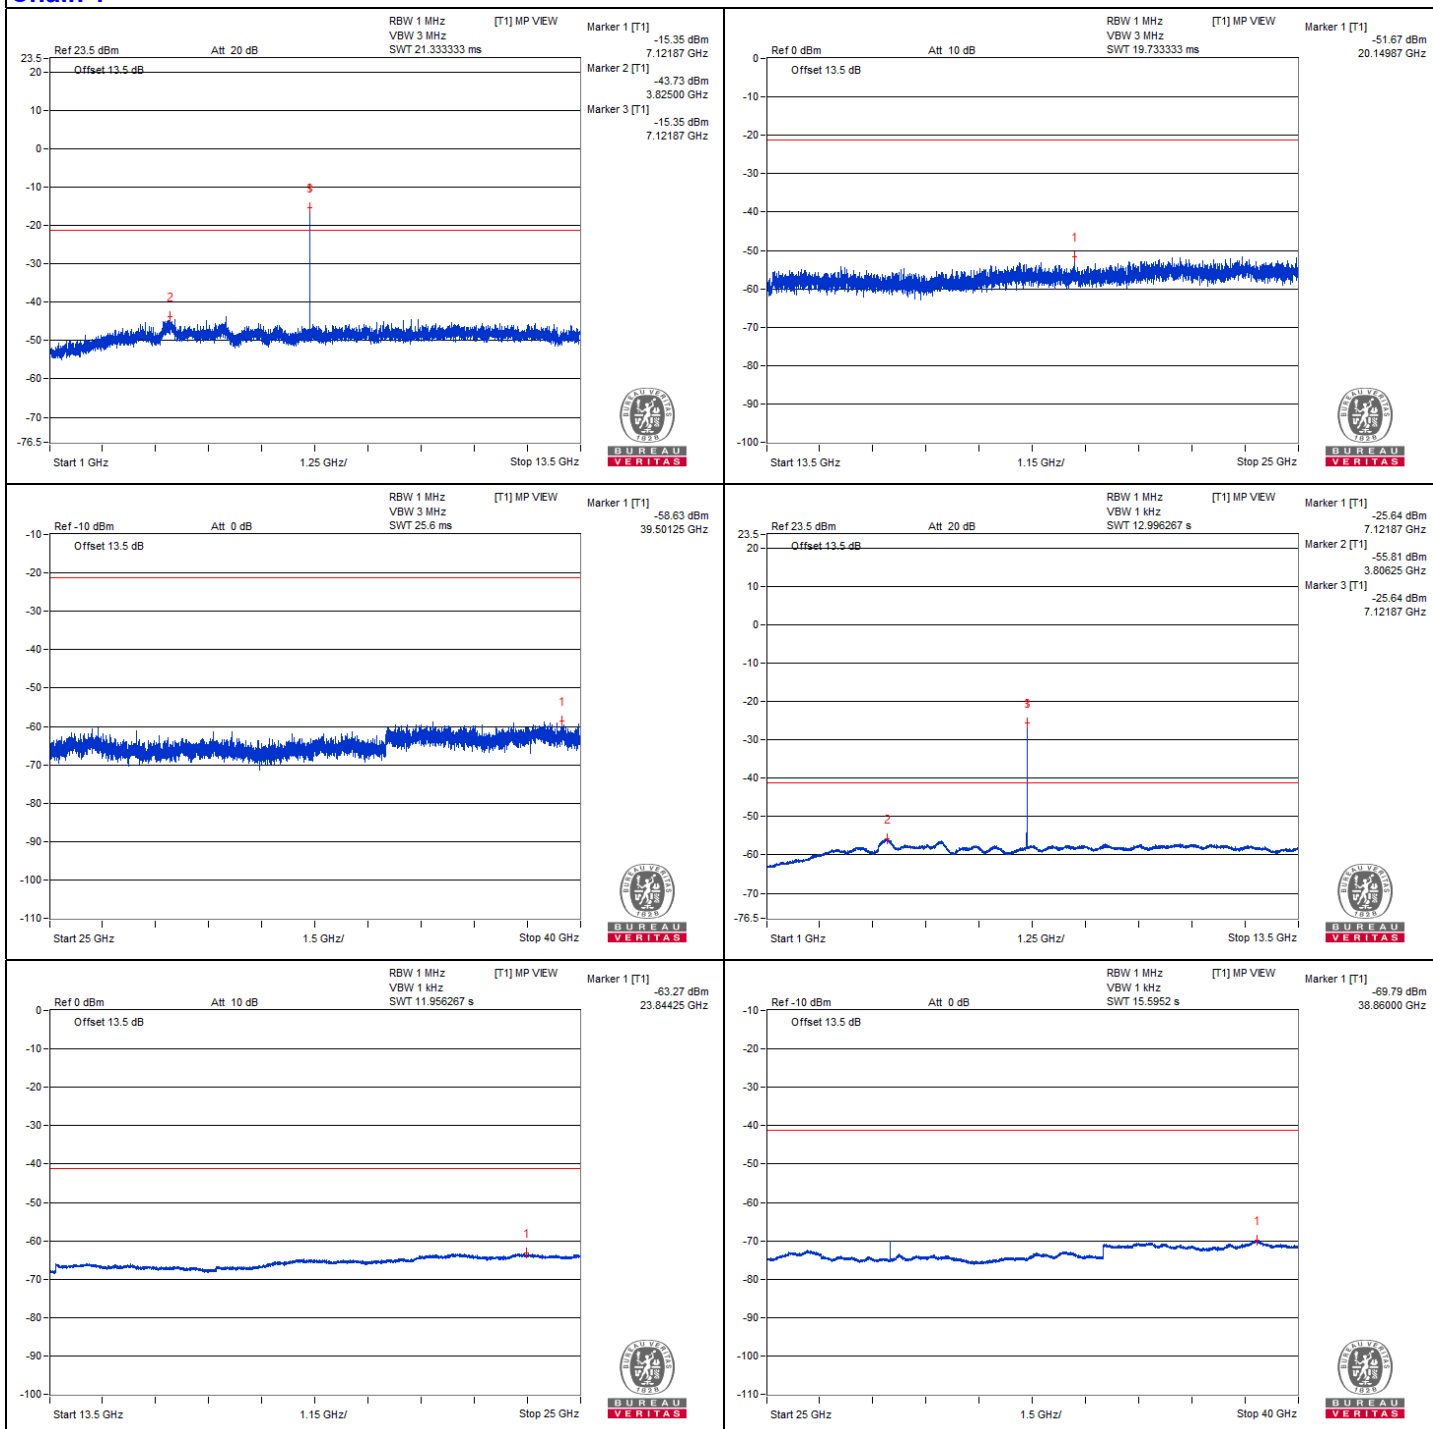


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	79.73 PK	88.2	-8.47	-26.44	-26.91	8.13	-15.53
2	#7125	66.76 AV	68.2	-1.44	-39.88	-39.42	8.13	-28.50


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

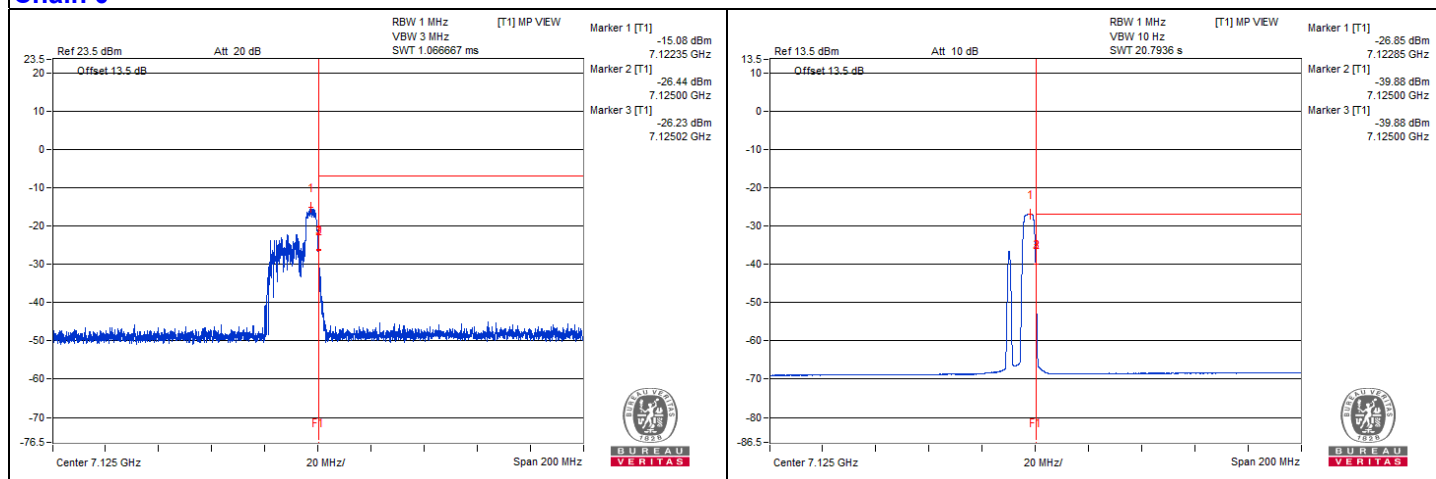

Chain 1

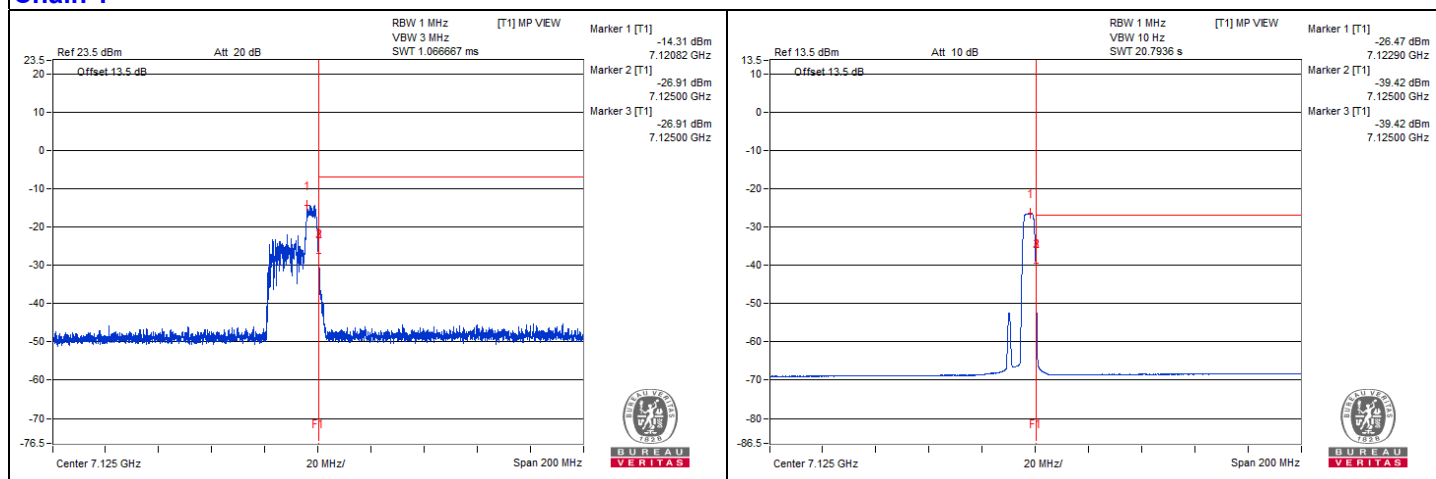

802.11be (EHT20) 106-tone RU - Channel 2


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11876.56	60.16 PK	74	-13.84	-48.65	-44.76	8.17	-35.10
2	11871.87	48.65 AV	54	-5.35	-57.92	-57.67	8.17	-46.61
3	17809.62	48.7 PK	74	-25.3	-56.67	-59.16	8.17	-46.56
4	17803.87	39.42 AV	54	-14.58	-66.91	-67.14	8.17	-55.84


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

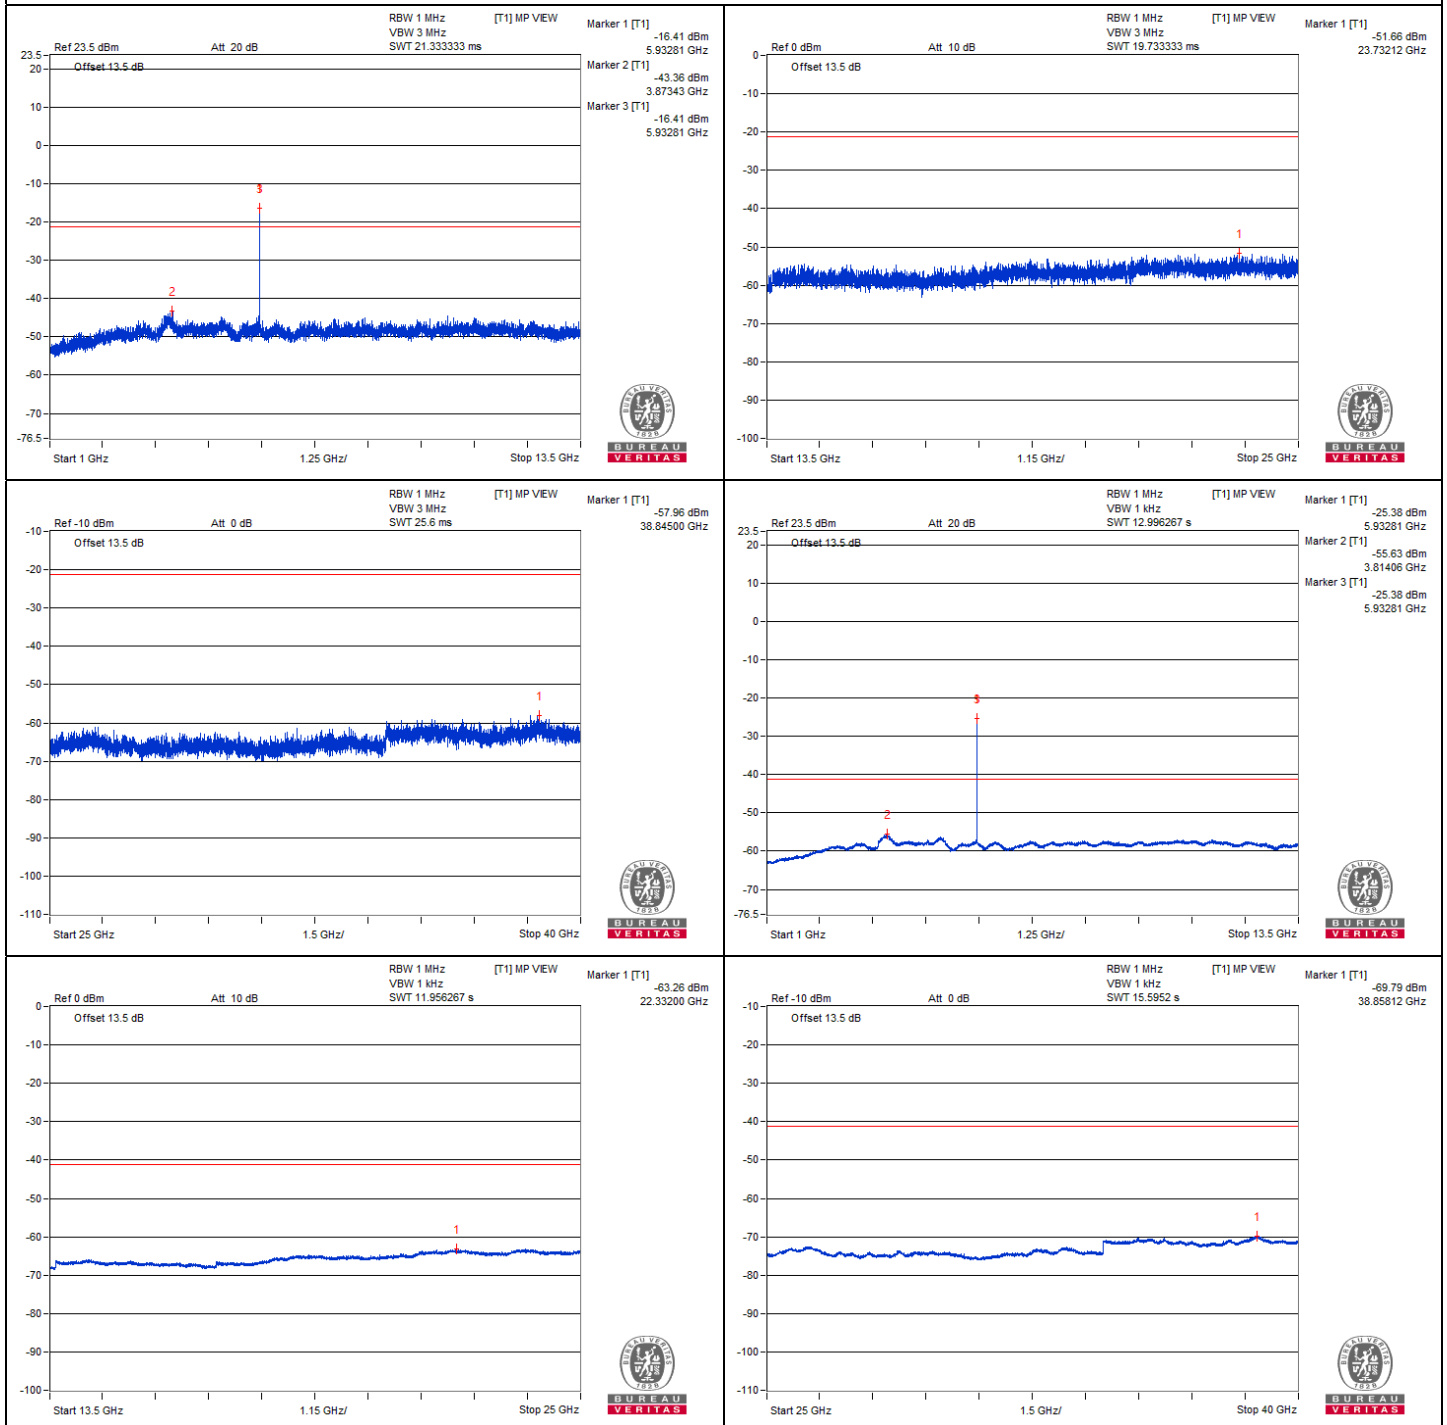

Chain 1

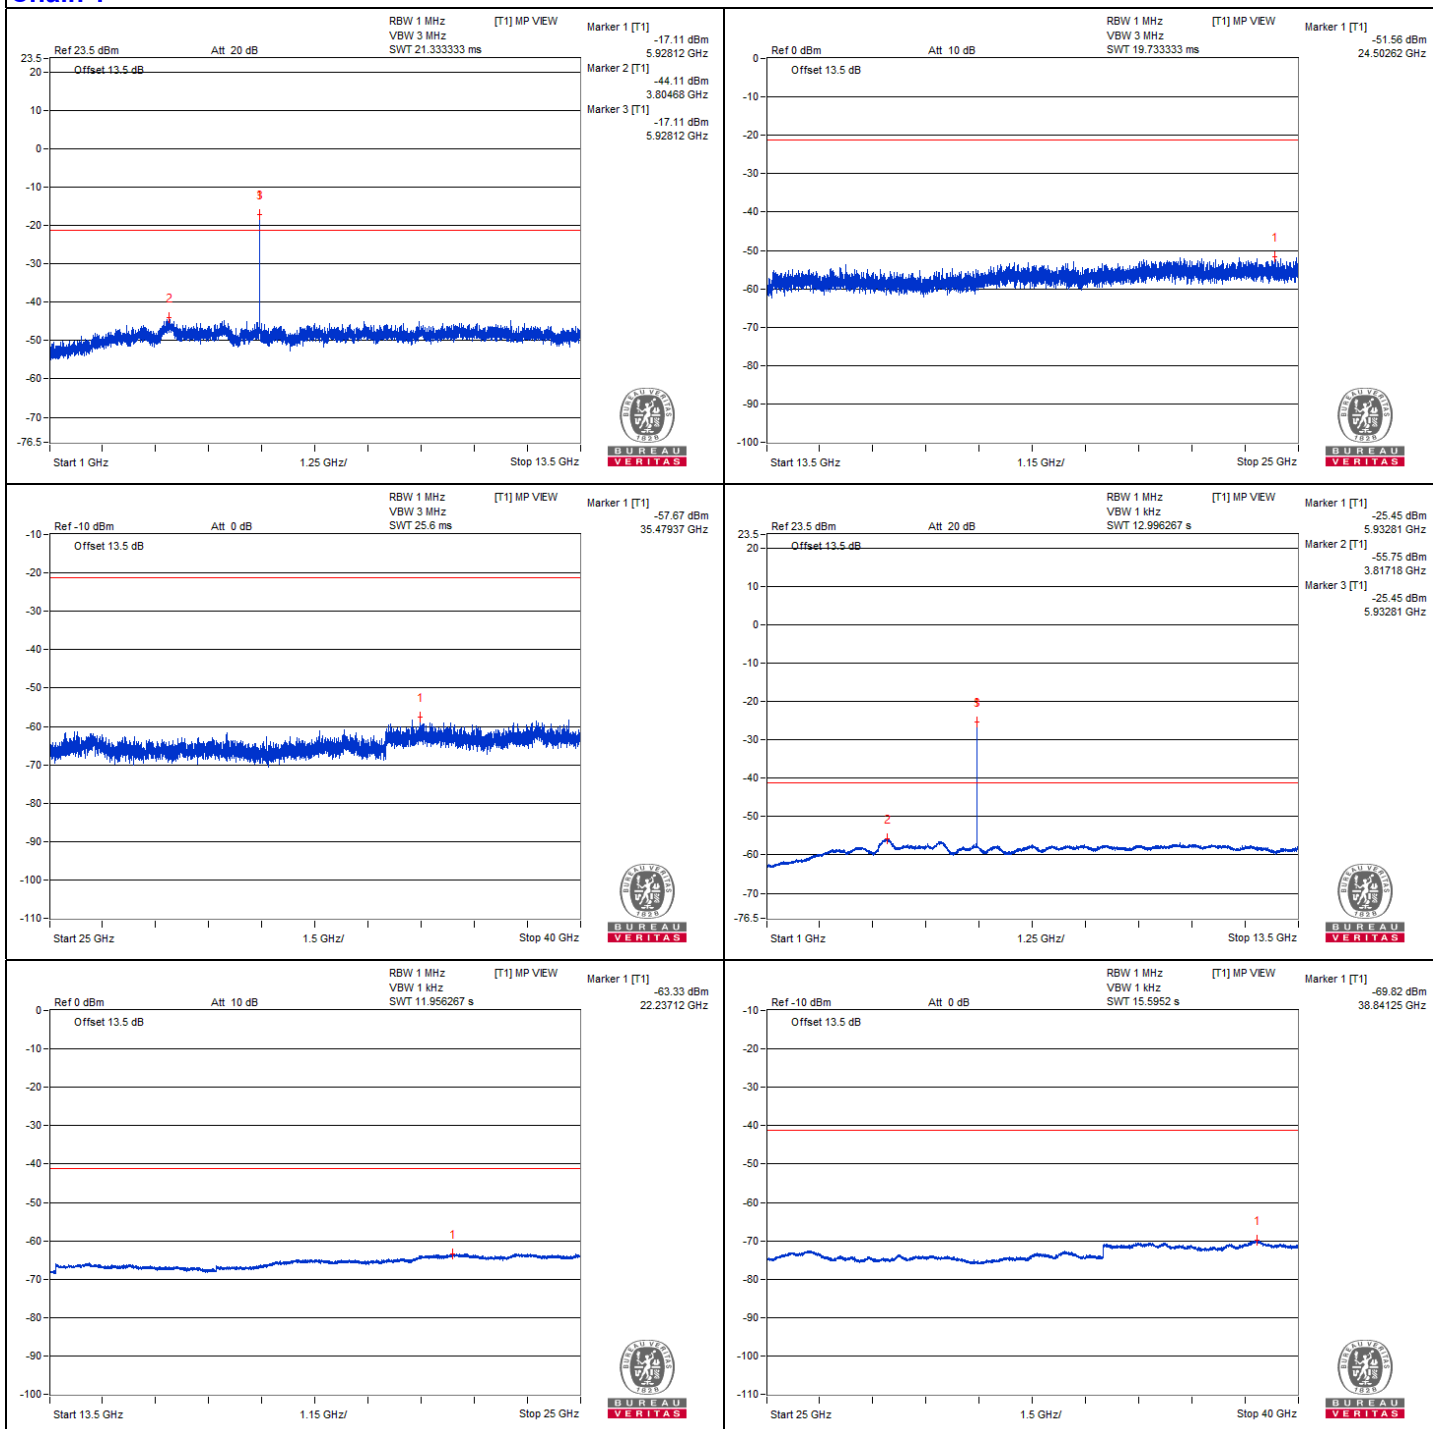


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5924.95	78.62 PK	88.2	-9.58	-29.08	-26.81	8.15	-16.64
2	#5925	67.31 AV	68.2	-0.89	-39.24	-38.98	8.15	-27.95


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

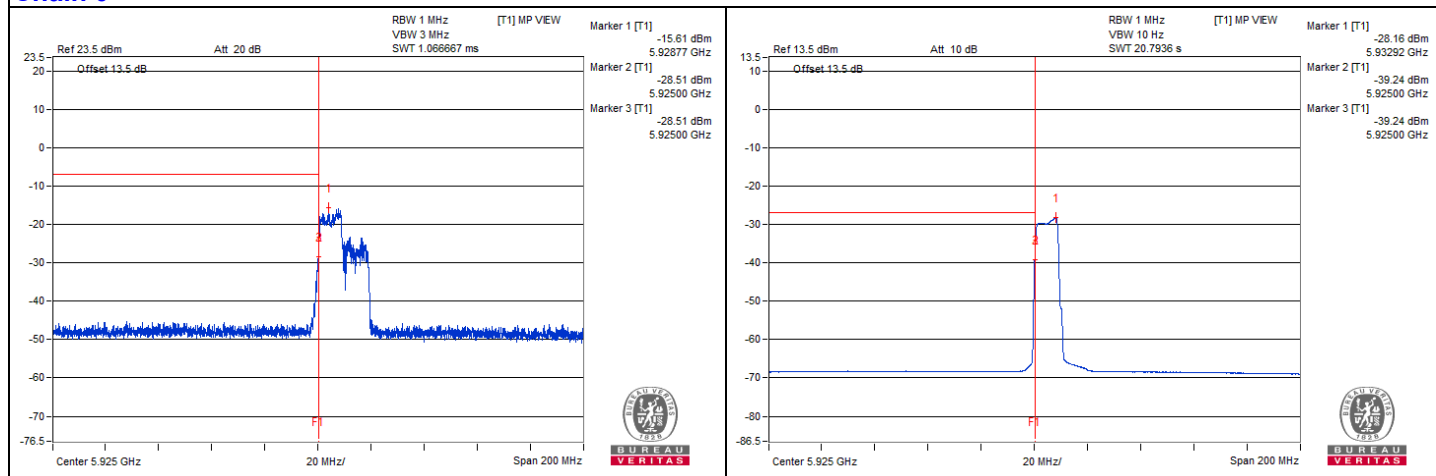

Chain 1

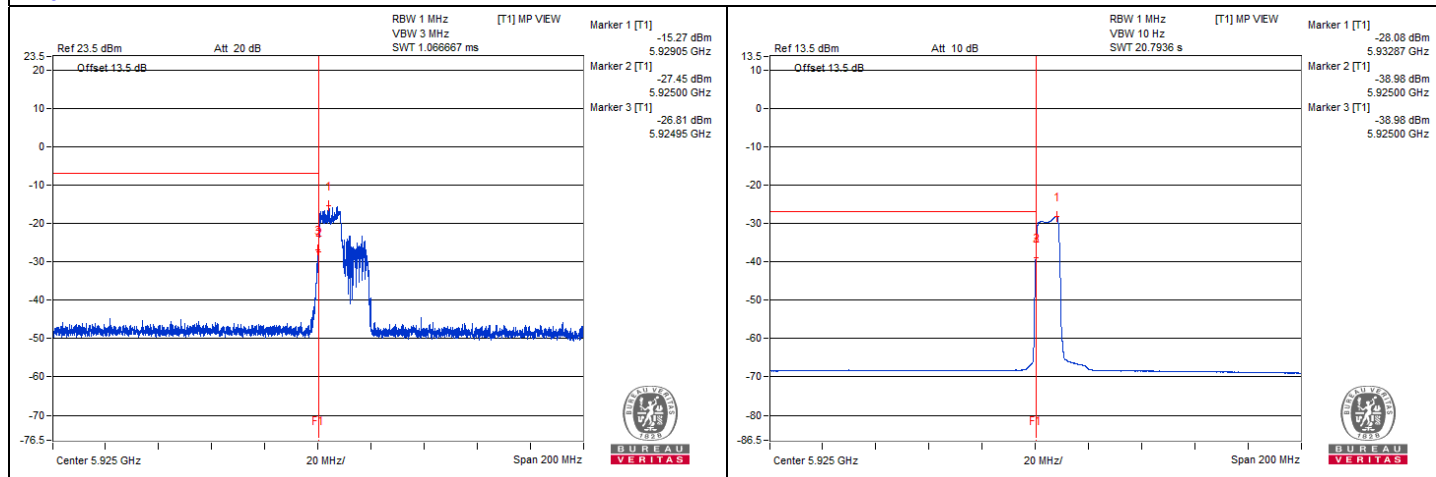

802.11be (EHT20) 106-tone RU – Channel 1


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	11904.68	59.7 PK	74	-14.3	-46.23	-47.33	8.17	-35.56
2	11914.06	48.48 AV	54	-5.52	-57.99	-57.93	8.17	-46.78
3	17868.56	50.18 PK	74	-23.82	-57.32	-55.41	8.17	-45.08
4	17874.31	39.66 AV	54	-14.34	-66.64	-66.93	8.17	-55.60


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

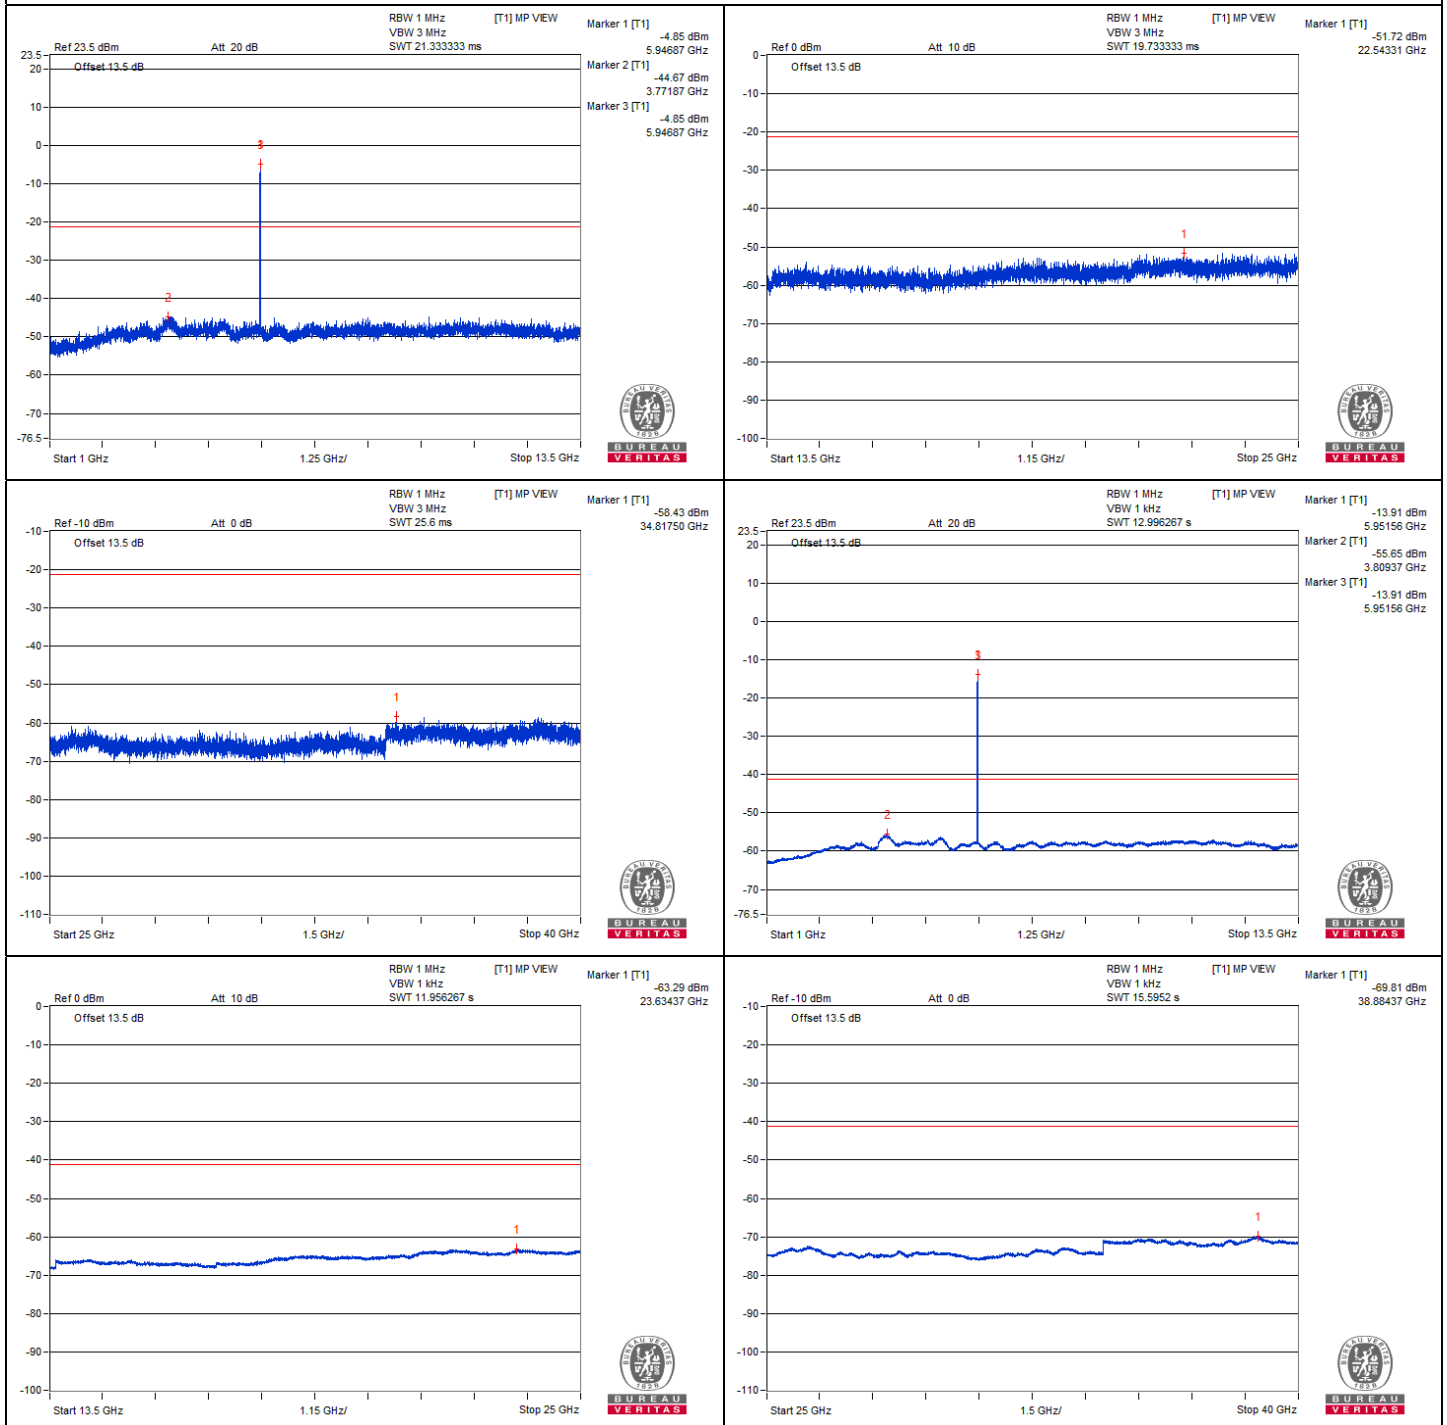

Chain 1

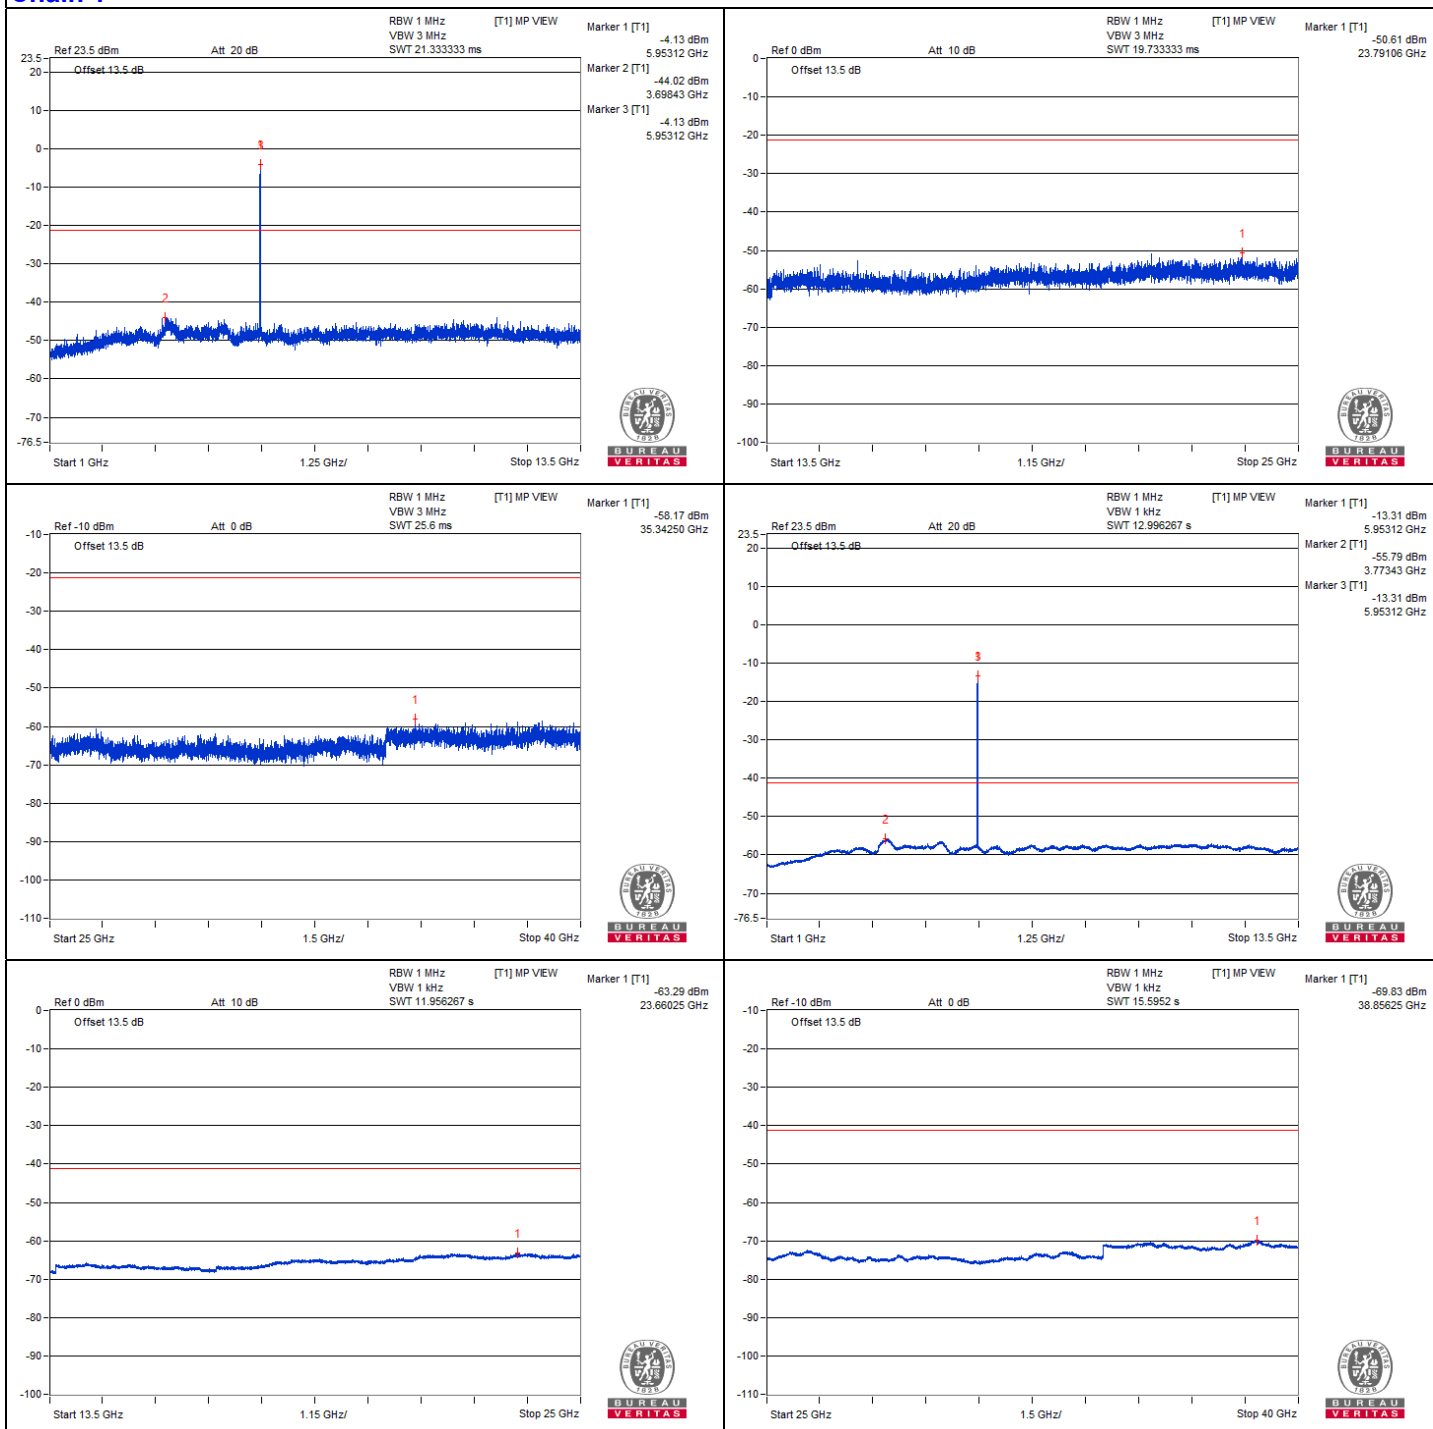


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5880.17	60.27 PK	88.2	-27.93	-46.82	-45.57	8.15	-34.99
2	#5913.52	38.28 AV	68.2	-29.92	-68.16	-68.12	8.15	-56.98


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

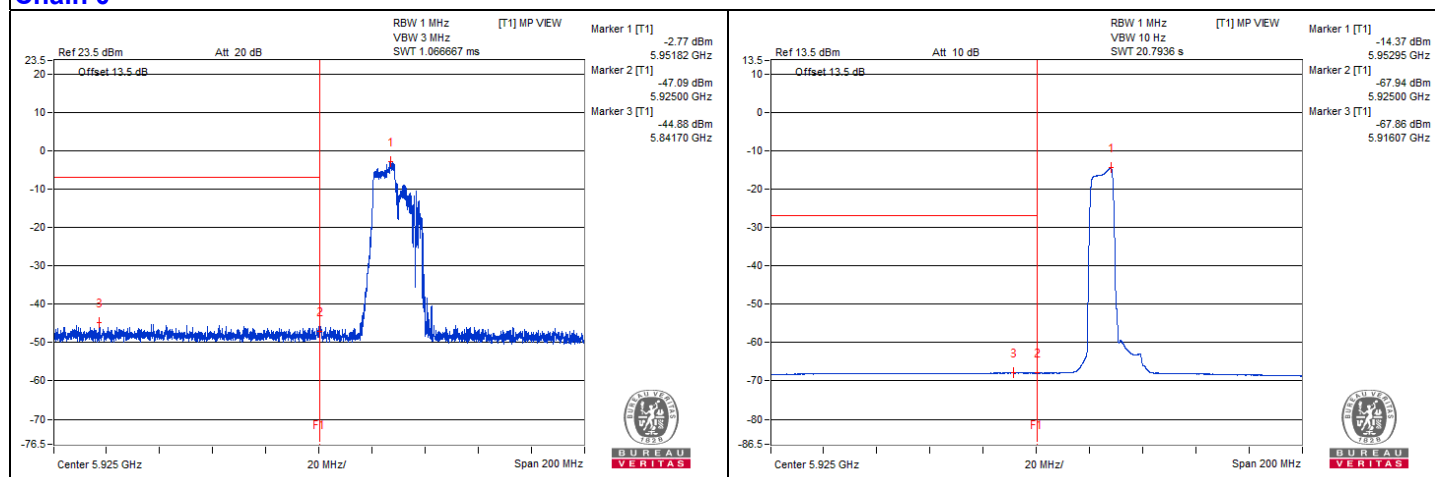

Chain 1

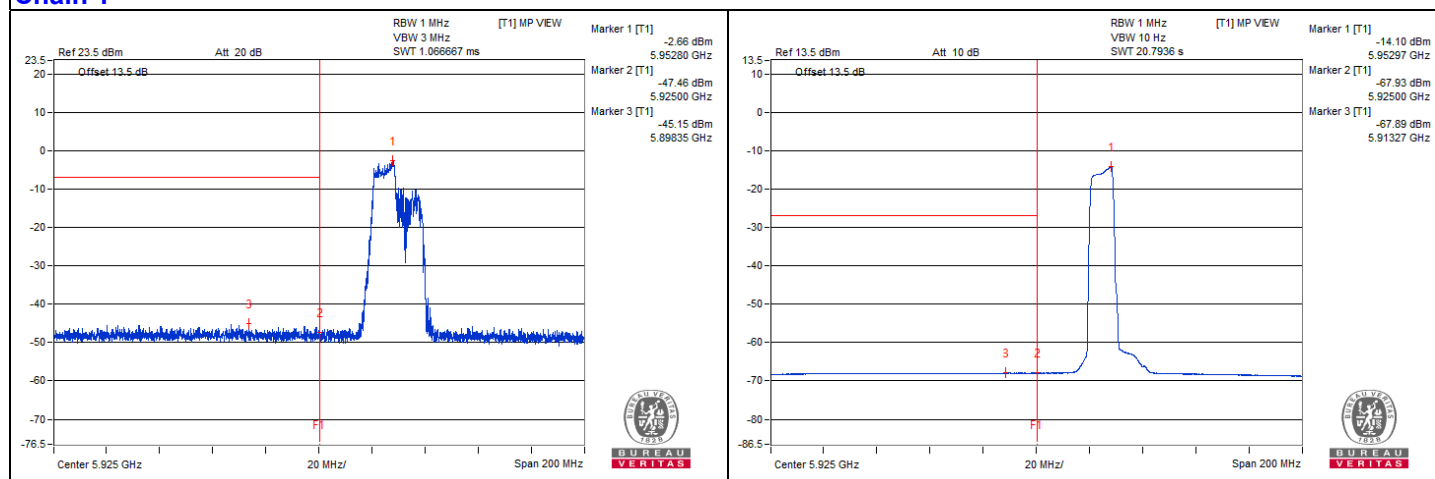

802.11be (EHT20) 106-tone RU - Channel 45


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	12354.68	59.51 PK	74	-14.49	-46.93	-46.93	8.17	-35.75
2	12348.43	48.72 AV	54	-5.28	-57.64	-57.8	8.17	-46.54
3	18534.12	50.47 PK	74	-23.53	-57.81	-54.68	8.17	-44.79
4	18521.18	40.91 AV	54	-13.09	-65.19	-65.89	8.17	-54.35


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

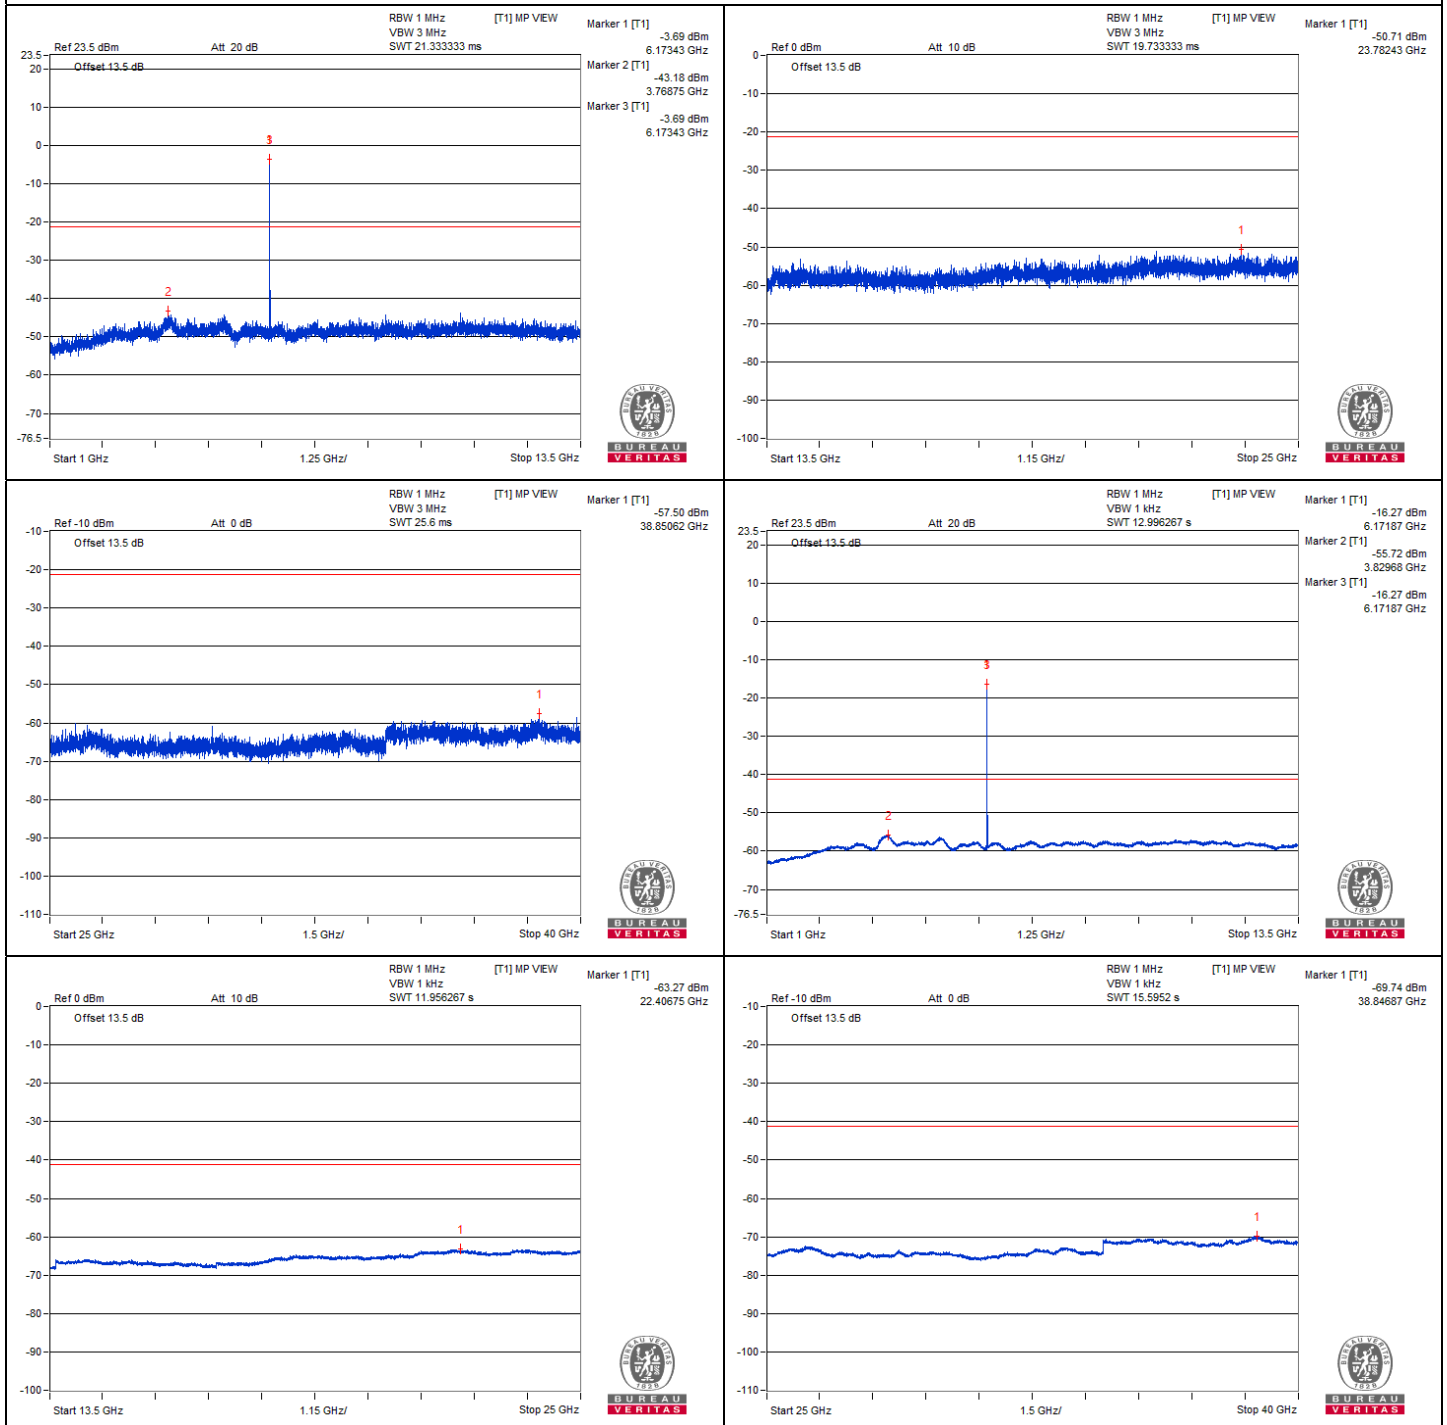

Chain 1

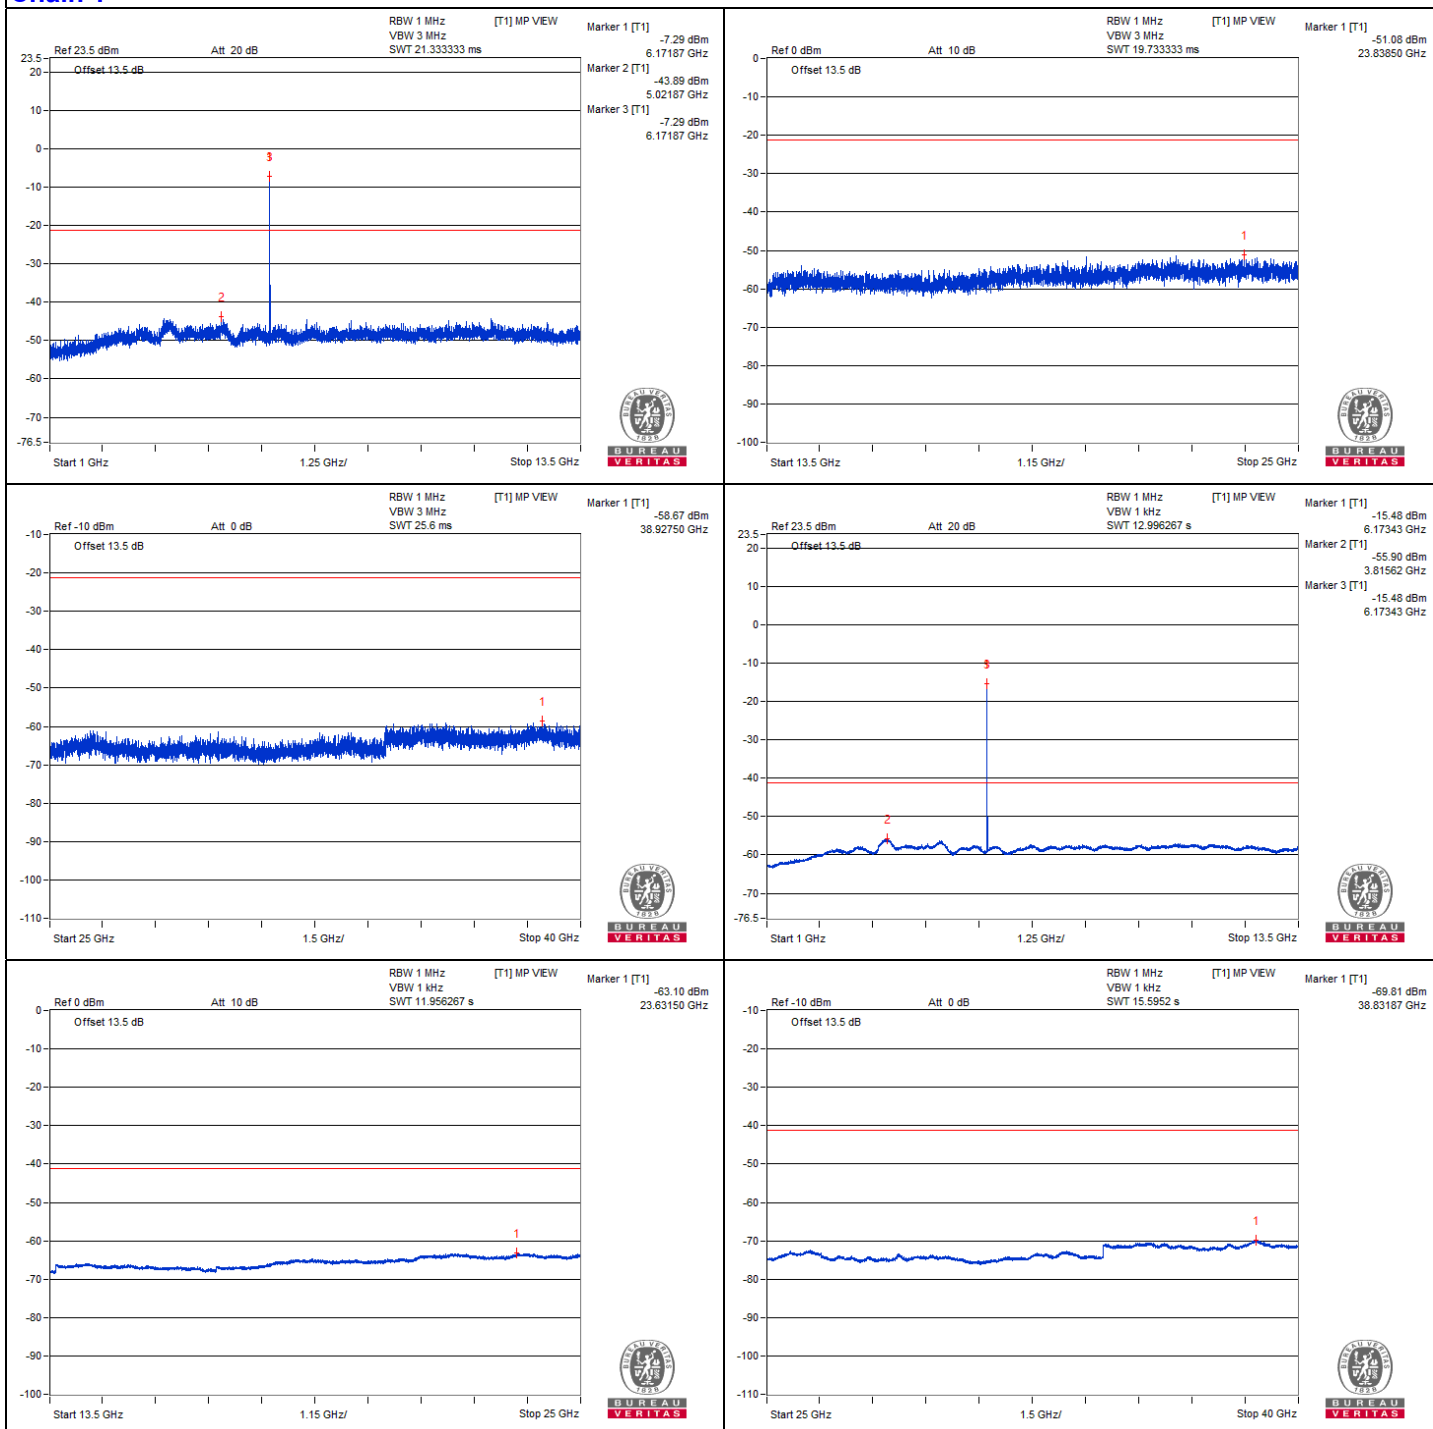

802.11be (EHT20) 106-tone RU - Channel 93


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12837.5	58.95 PK	88.2	-29.25	-46.55	-48.68	8.17	-36.31
2	#12835.93	47.82 AV	68.2	-20.38	-58.67	-58.57	8.17	-47.44
3	19251.43	51.68 PK	74	-22.32	-53.41	-56.74	8.17	-43.58
4	19237.06	41.25 AV	54	-12.75	-65.12	-65.27	8.17	-54.01


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

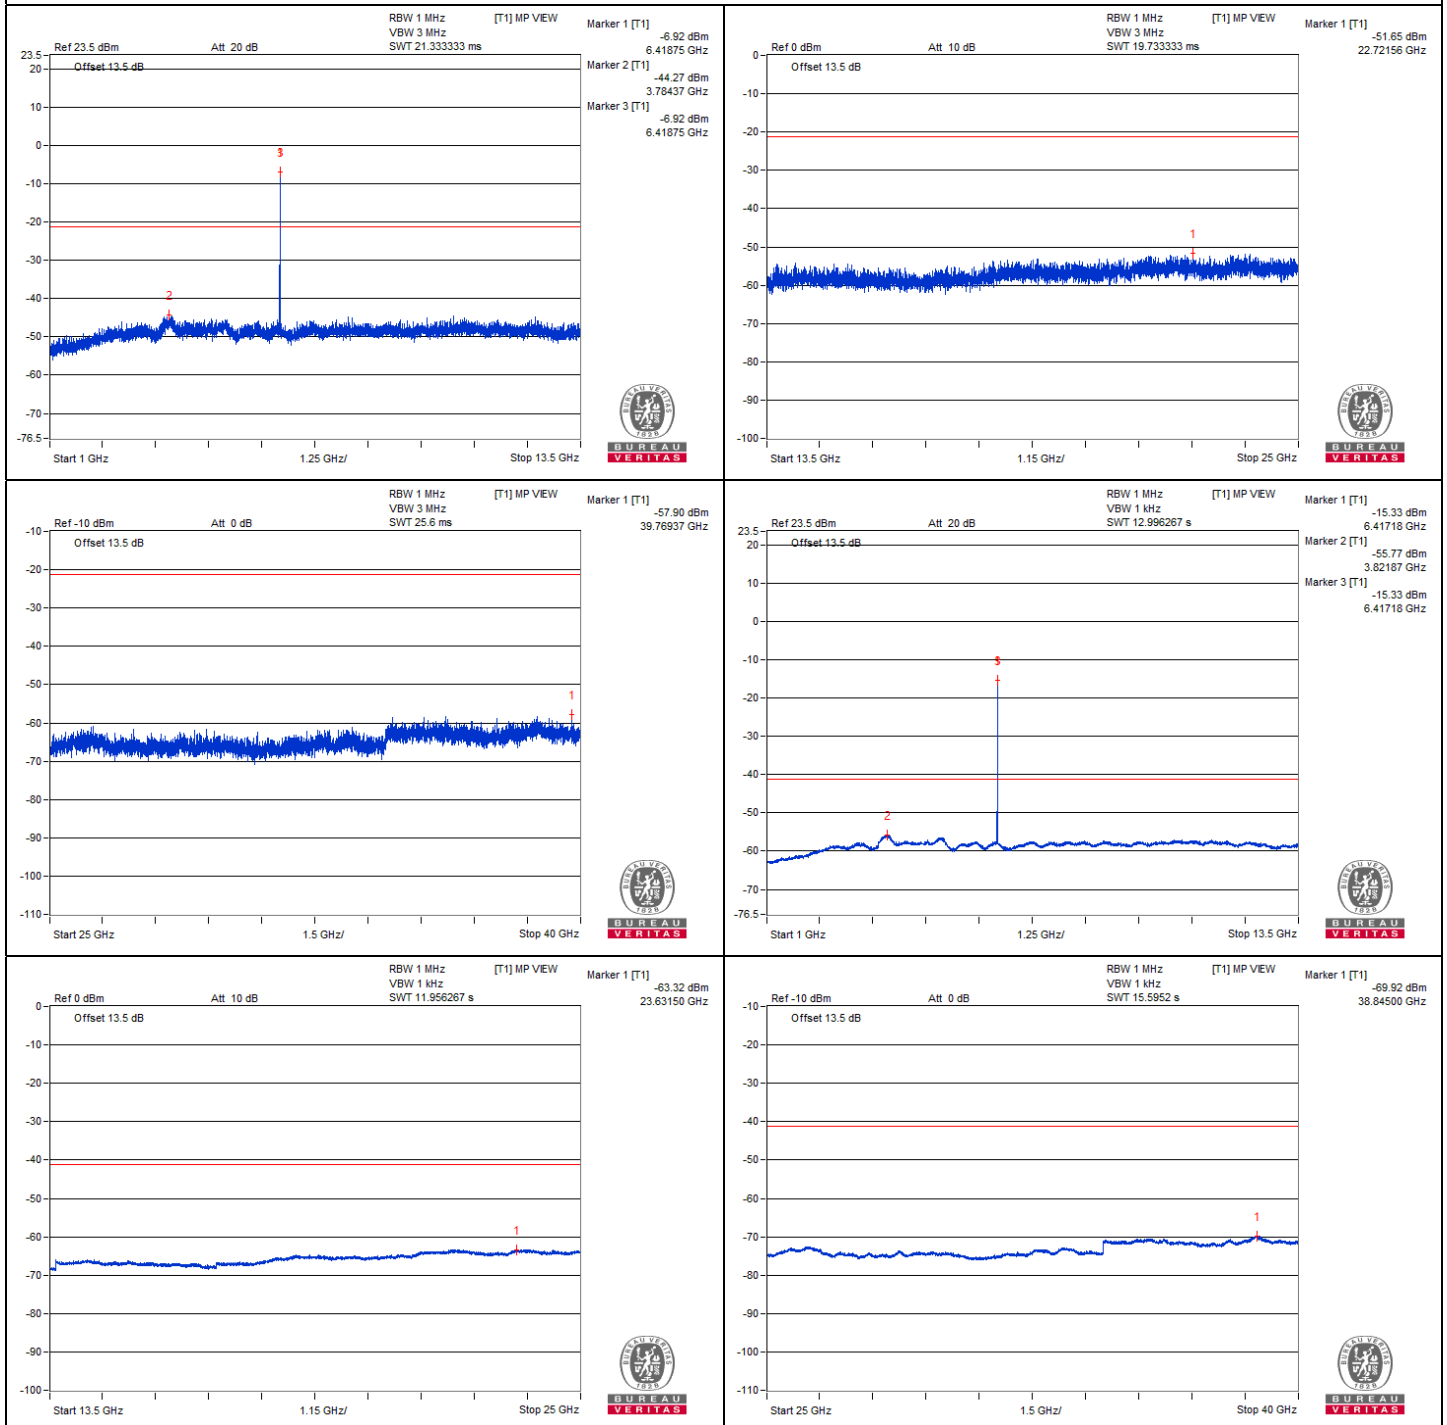

Chain 1

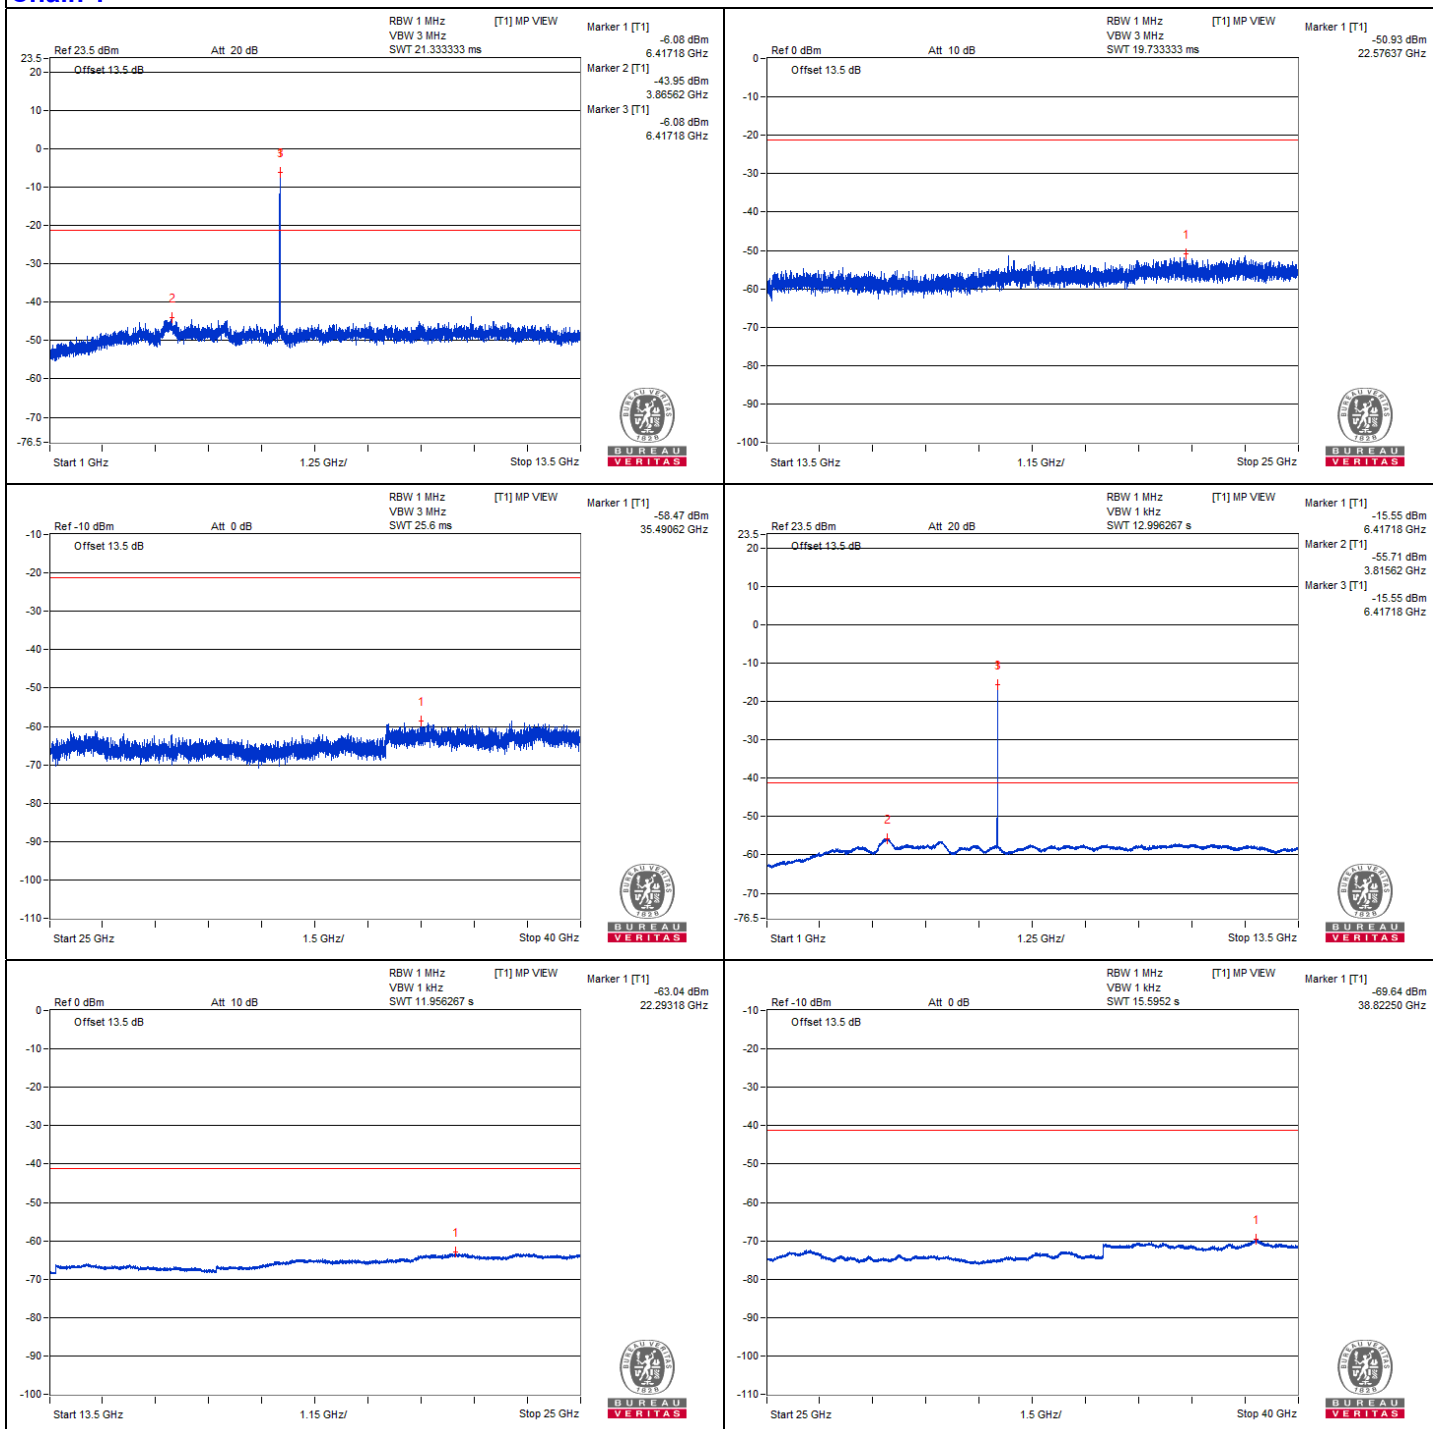

802.11be (EHT20) 106-tone RU - Channel 97


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12867.18	57.89 PK	88.2	-30.31	-48.9	-48.23	8.17	-37.37
2	#12862.5	47.63 AV	68.2	-20.57	-58.9	-58.72	8.17	-47.63
3	19310.37	51.95 PK	74	-22.05	-56.07	-53.33	8.17	-43.31
4	19304.62	41.4 AV	54	-12.6	-65.23	-64.85	8.17	-53.86


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

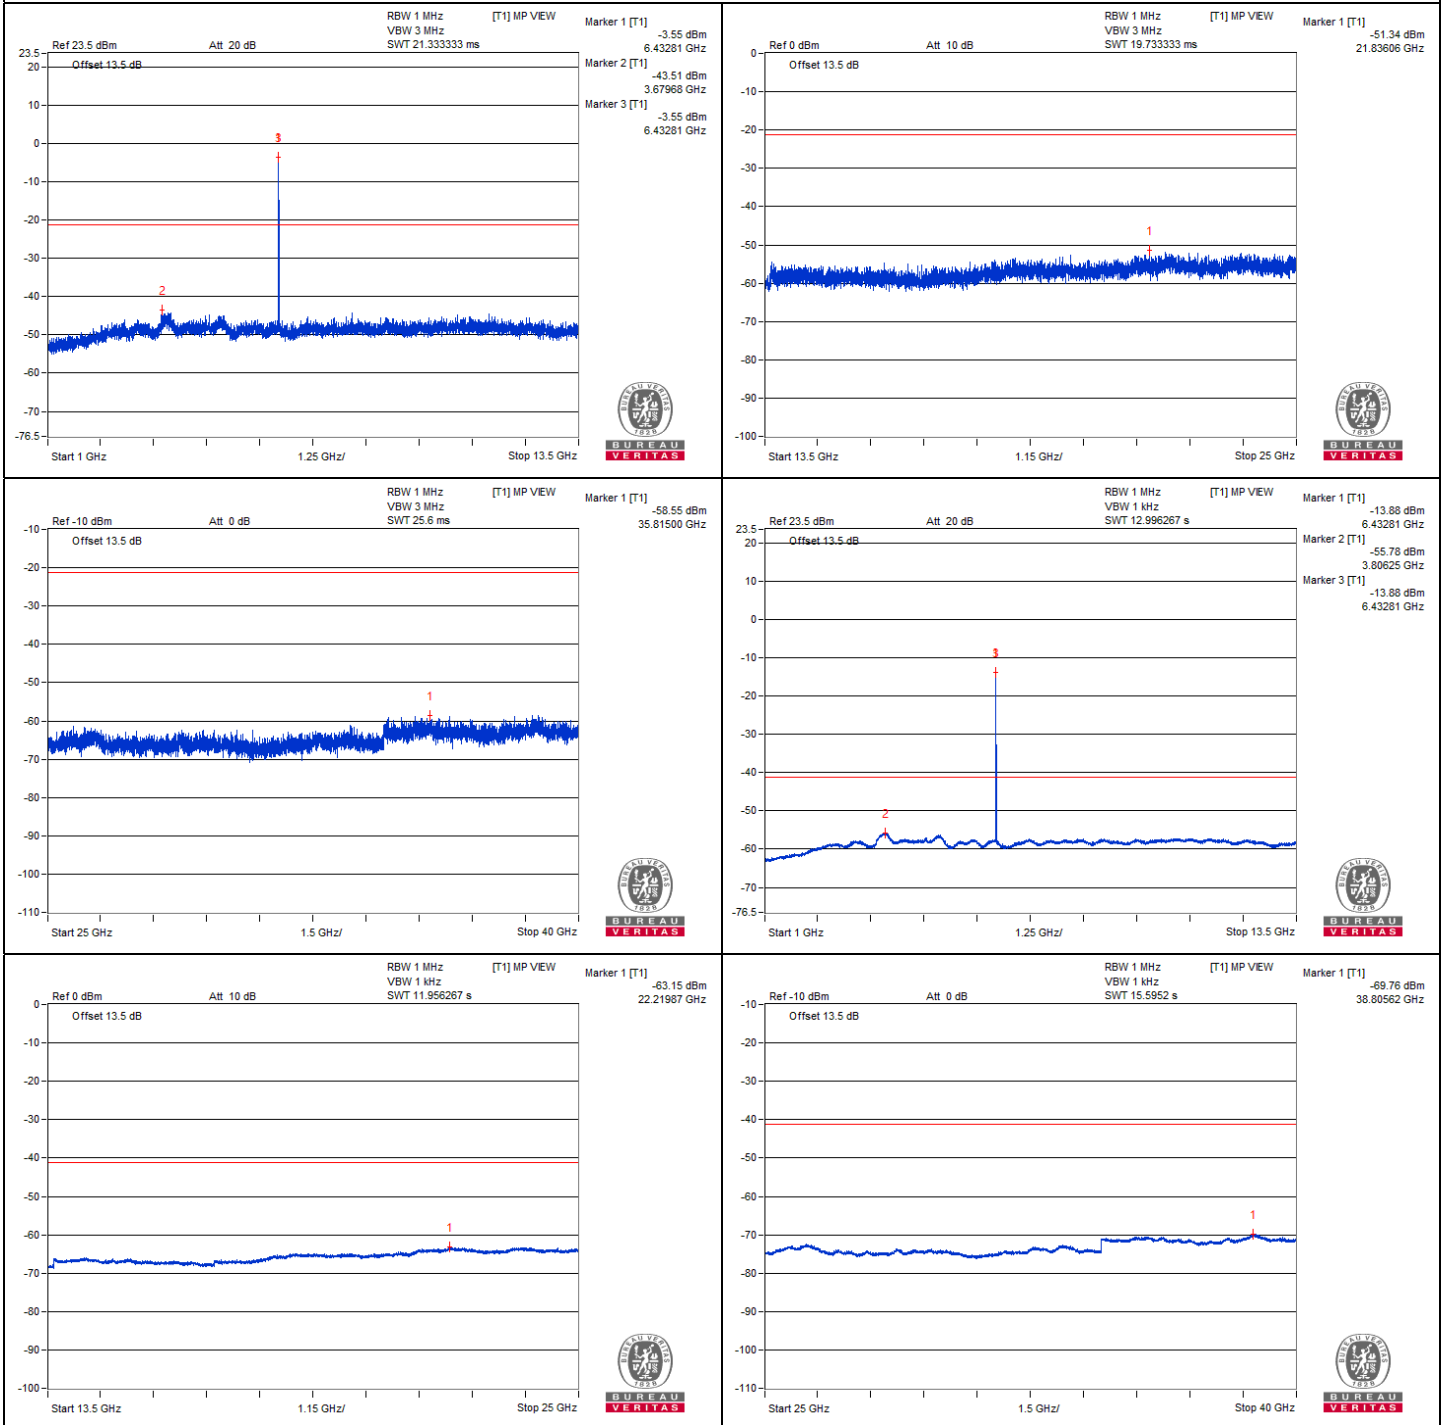

Chain 1

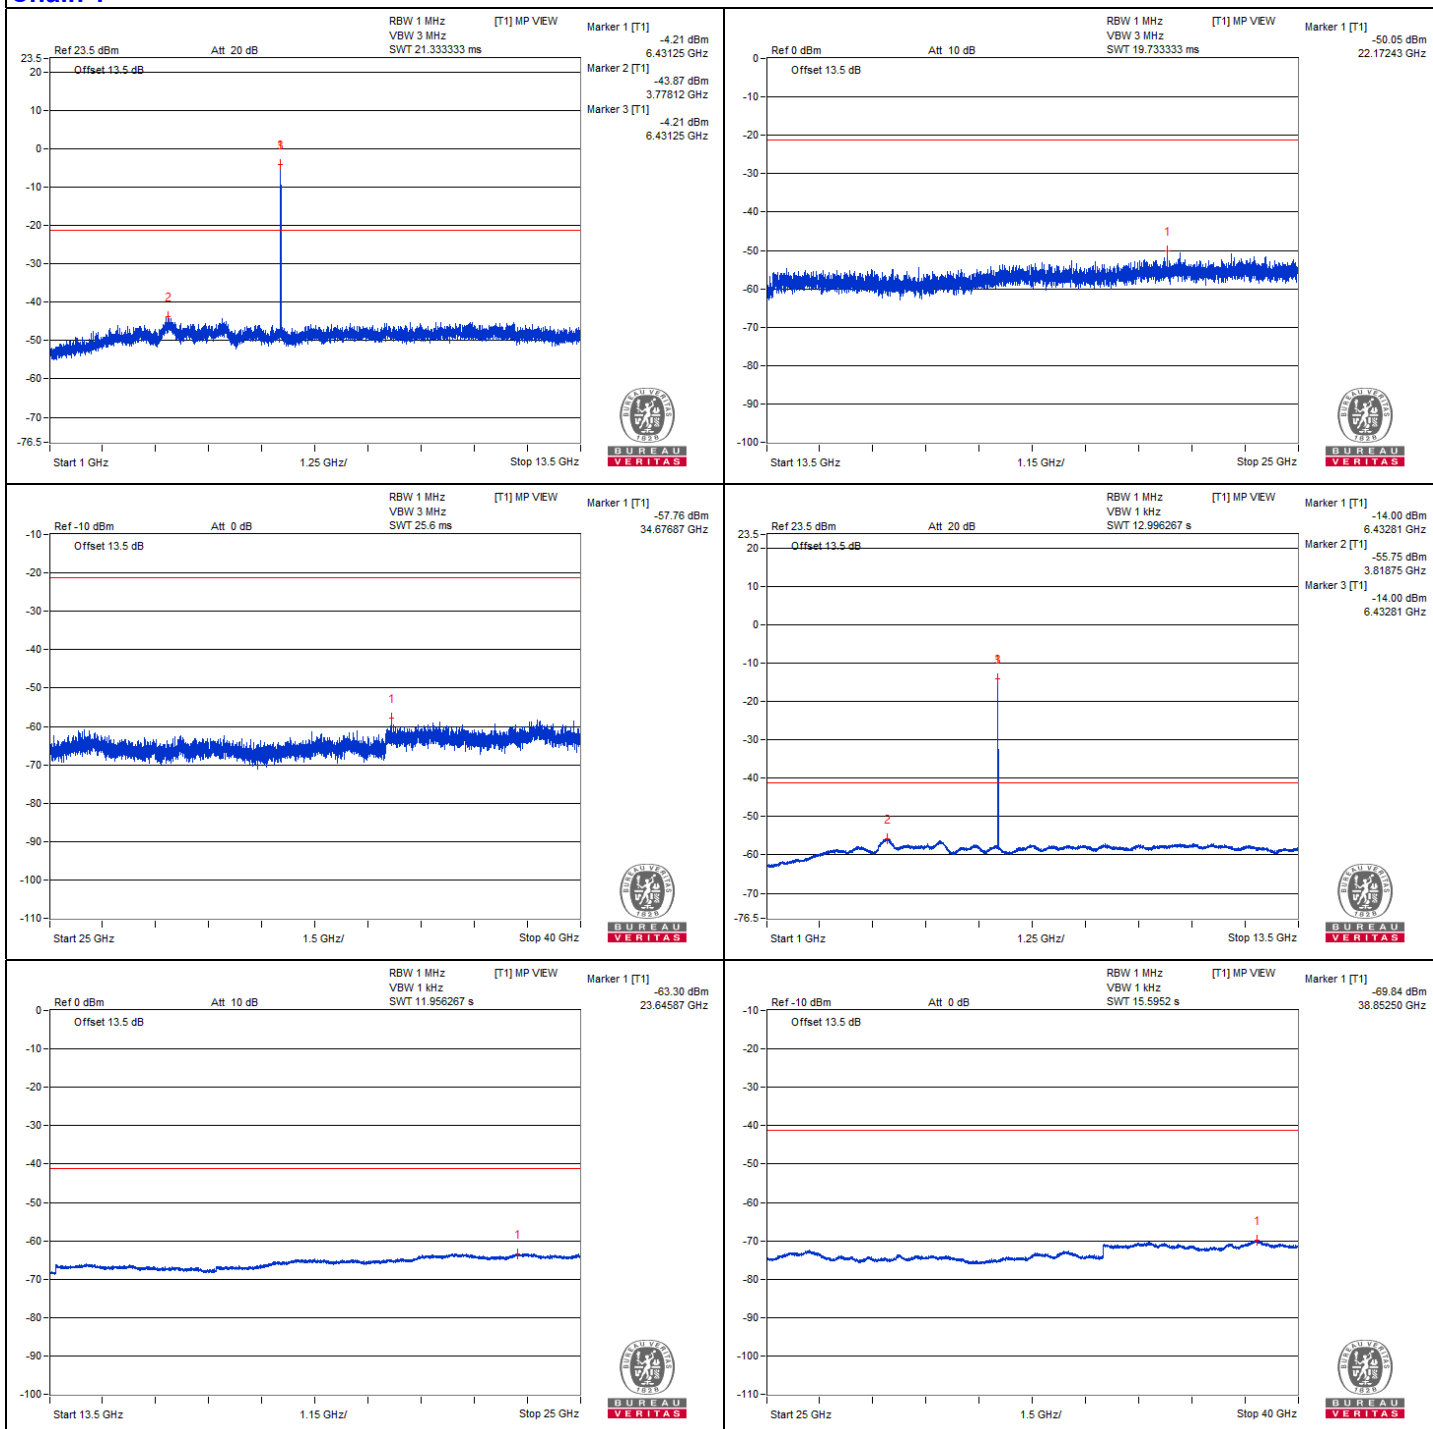

802.11be (EHT20) 106-tone RU - Channel 105


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#12945.31	58.25 PK	88.2	-29.95	-48	-48.38	8.17	-37.01
2	#12954.68	47.43 AV	68.2	-20.77	-59.17	-58.86	8.17	-47.83
3	19421.06	51.22 PK	74	-22.78	-55.36	-55.08	8.17	-44.04
4	19432.56	41.14 AV	54	-12.86	-65.3	-65.3	8.17	-54.12


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

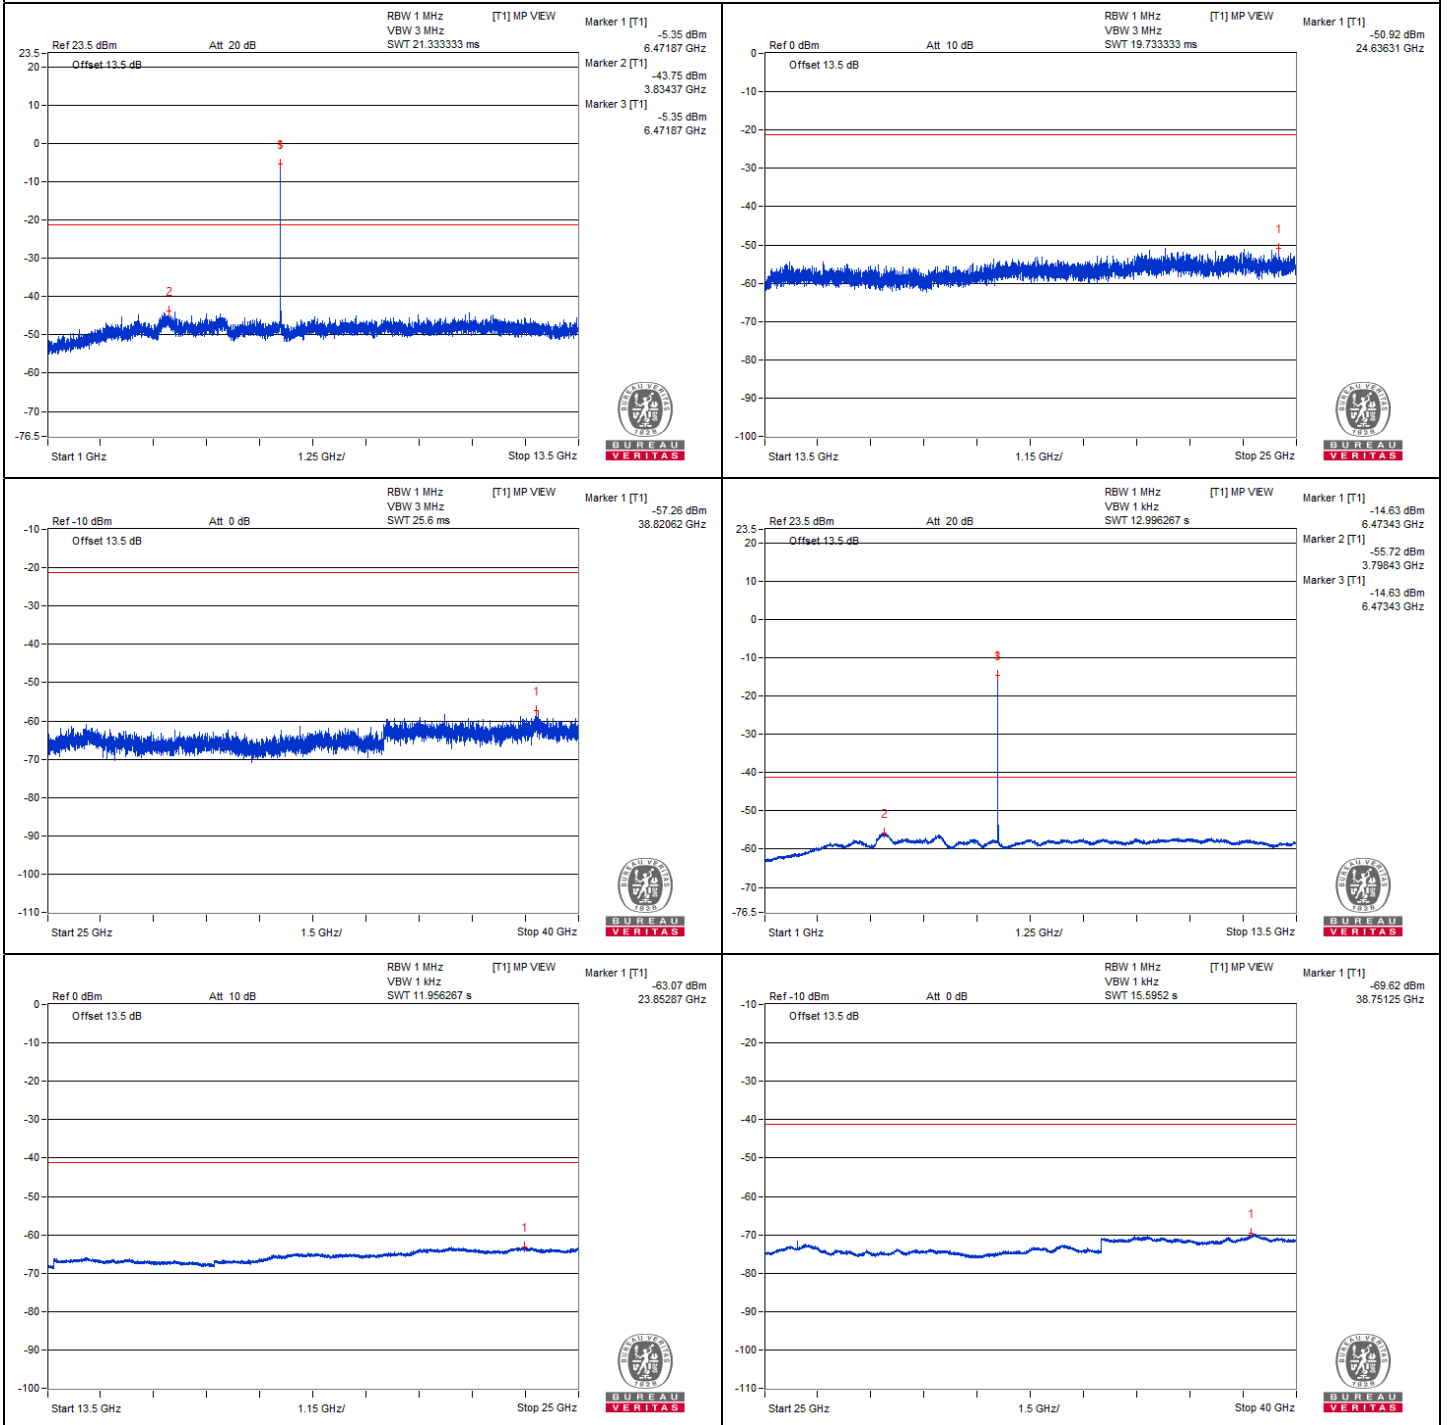

Chain 1

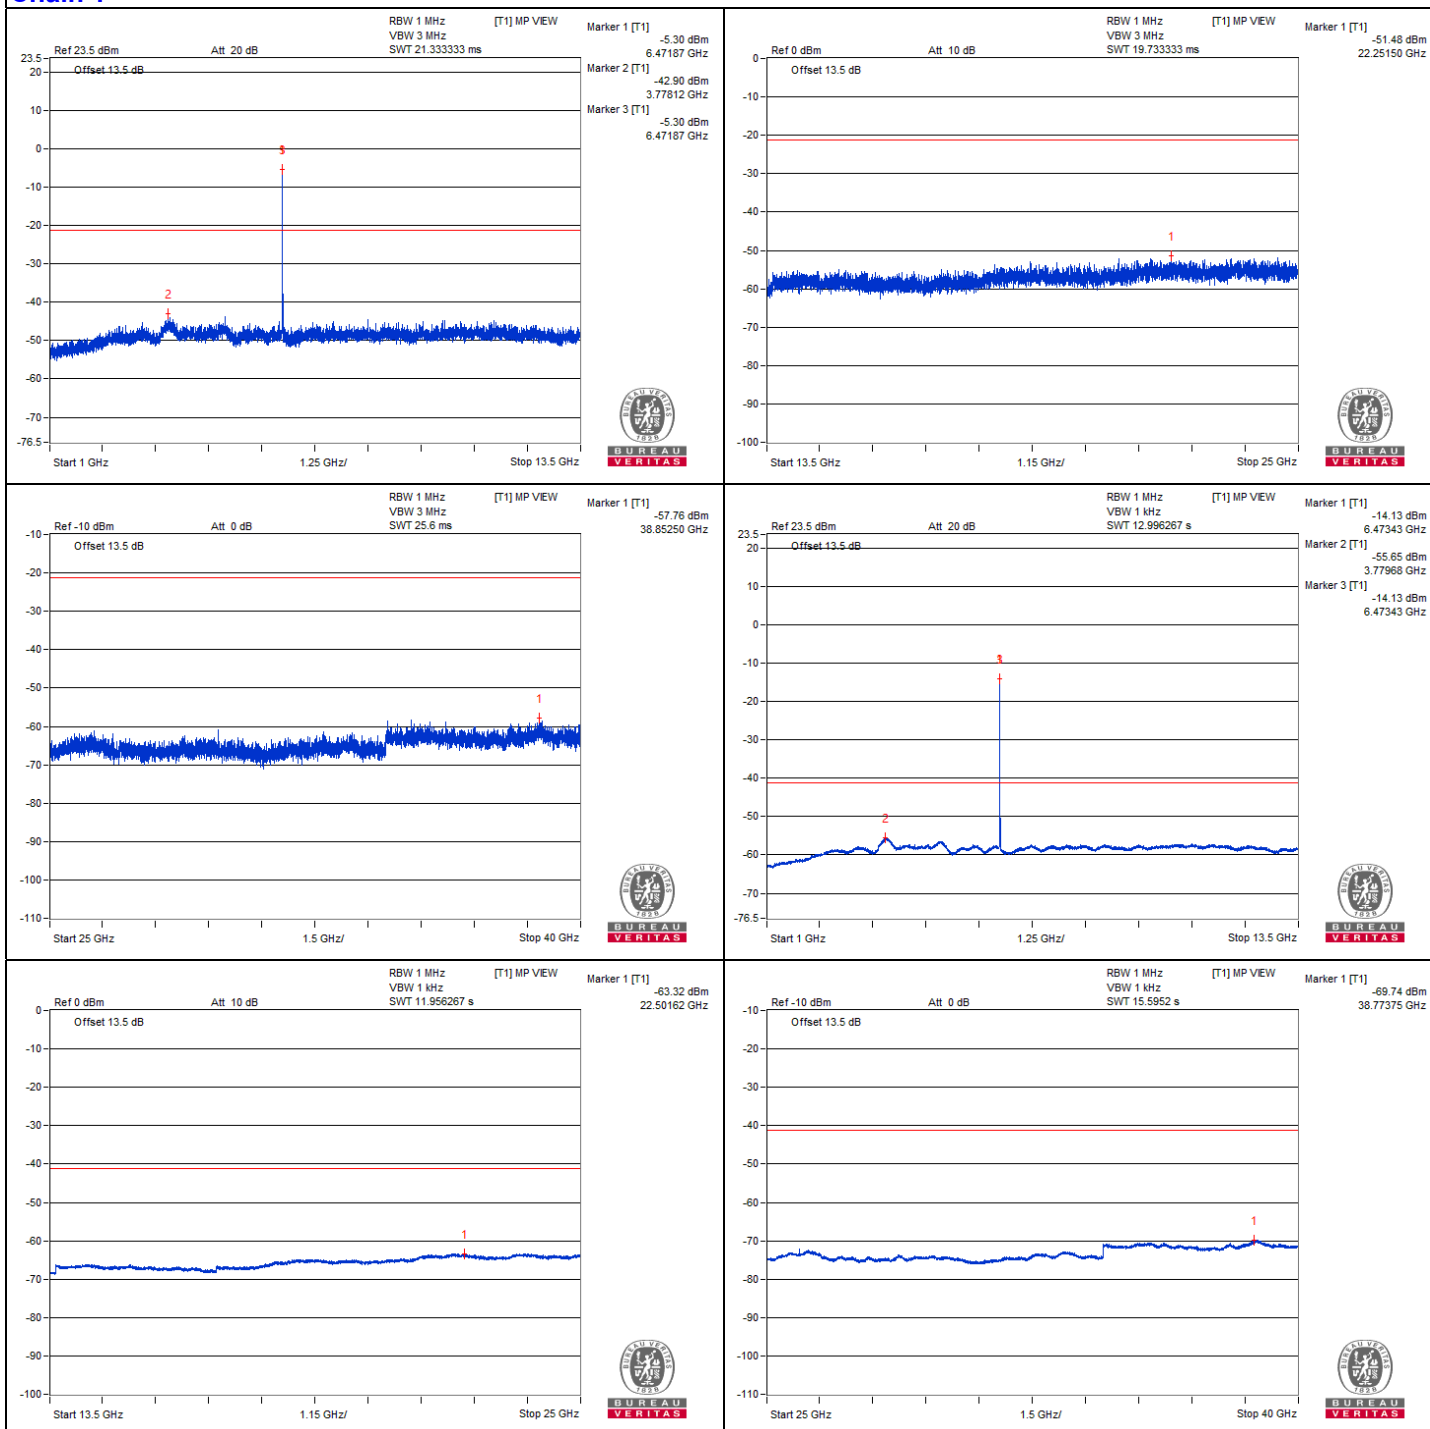

802.11be (EHT20) 106-tone RU - Channel 113


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13028.12	57.91 PK	88.2	-30.29	-50.58	-47.15	8.17	-37.35
2	#13039.06	47.4 AV	68.2	-20.8	-58.93	-59.15	8.17	-47.86
3	19551.87	50.76 PK	74	-23.24	-55.13	-56.32	8.17	-44.50
4	19550.43	41.01 AV	54	-12.99	-65.55	-65.32	8.17	-54.25


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

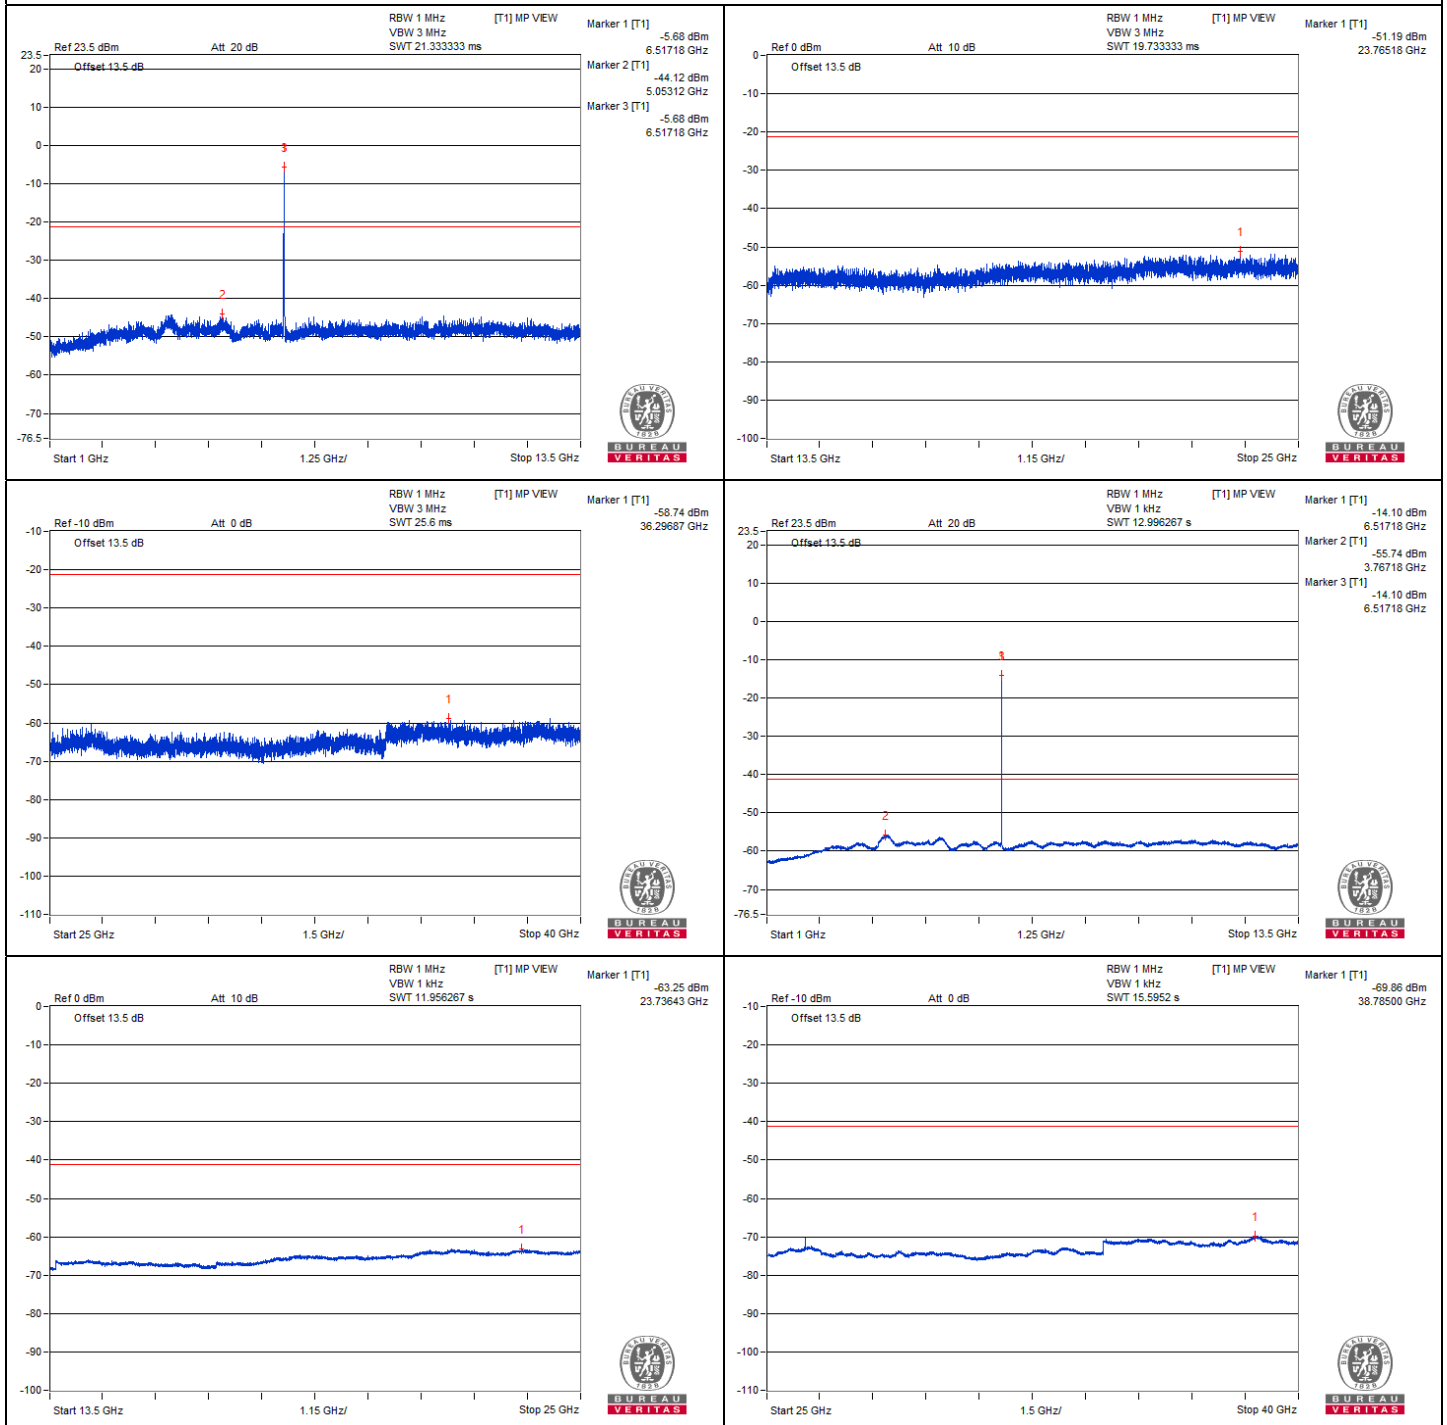

Chain 1

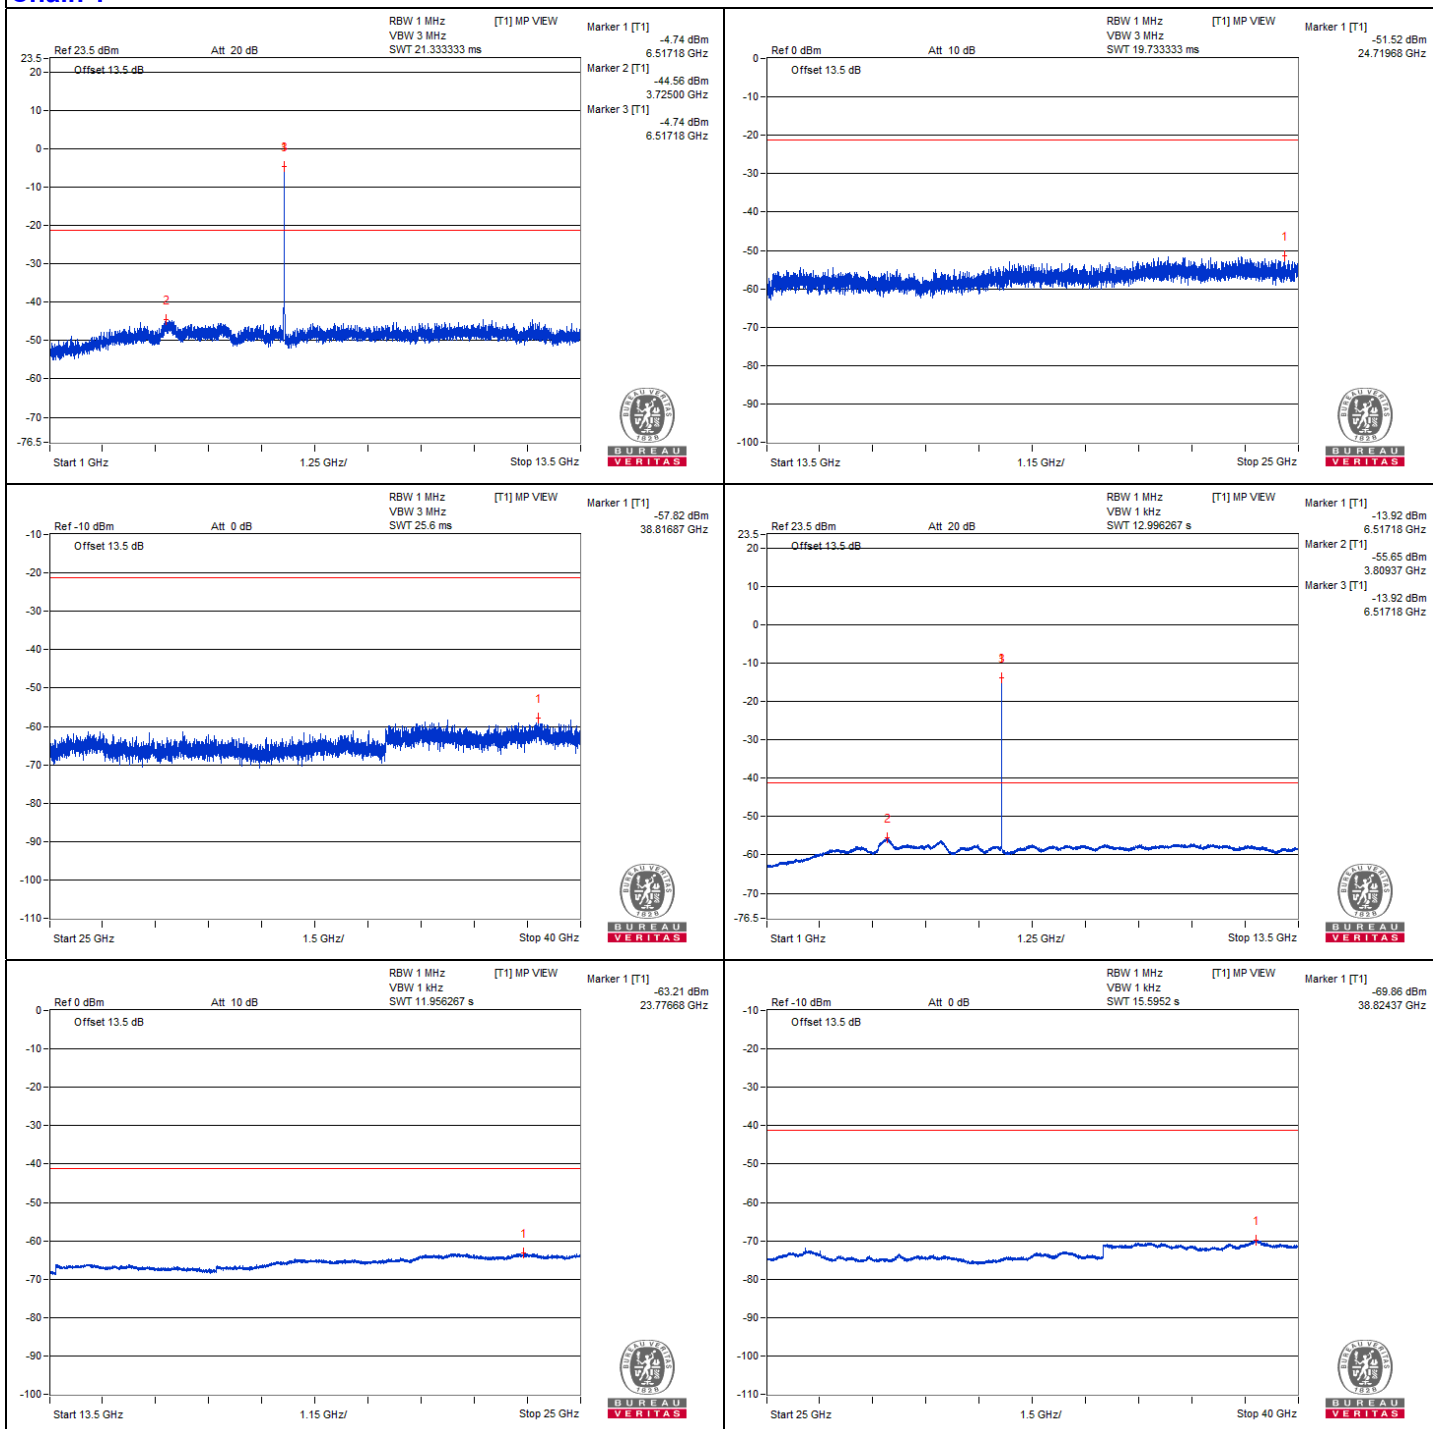

802.11be (EHT20) 106-tone RU - Channel 117







Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13062.5	58.43 PK	88.2	-29.77	-48.19	-47.83	8.17	-36.83
2	#13062.5	47.74 AV	68.2	-20.46	-58.58	-58.82	8.17	-47.52
3	19613.68	50.37 PK	74	-23.63	-56.39	-55.78	8.17	-44.89
4	19596.43	40.86 AV	54	-13.14	-65.62	-65.55	8.17	-54.40


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

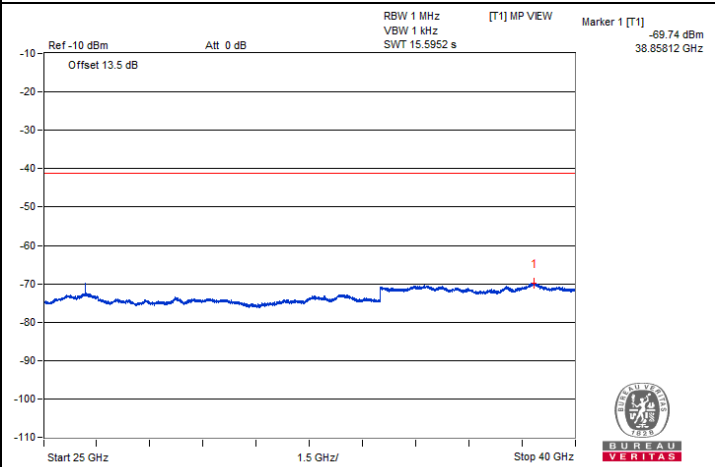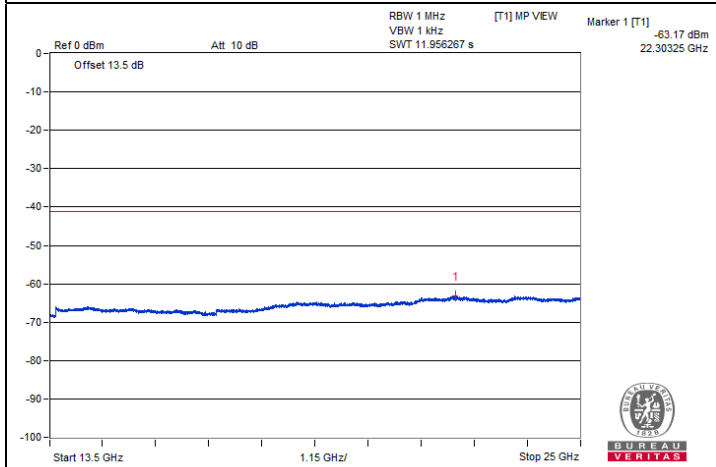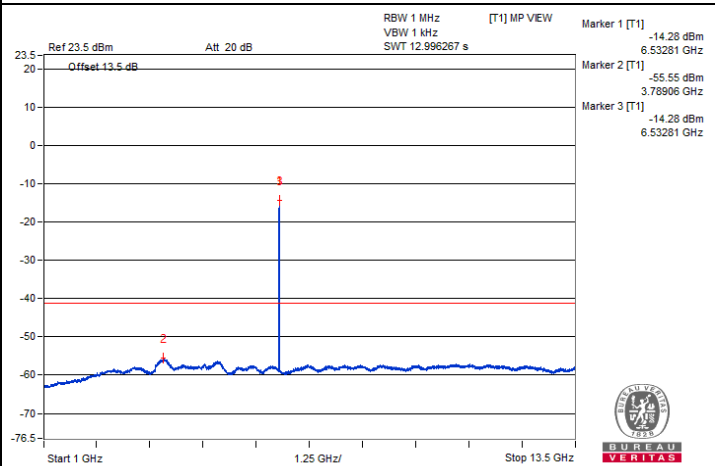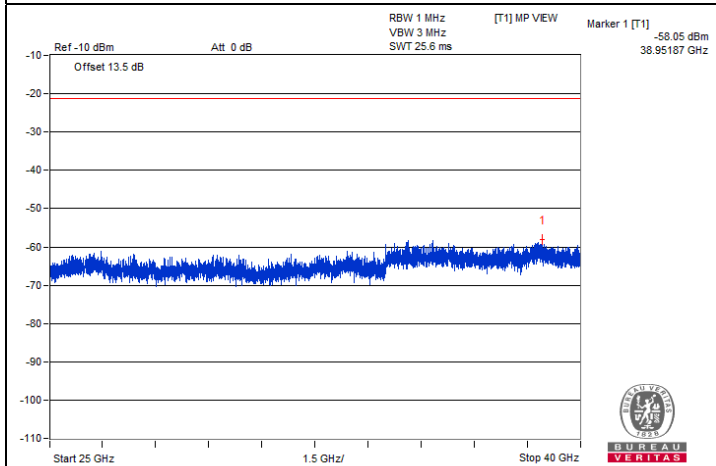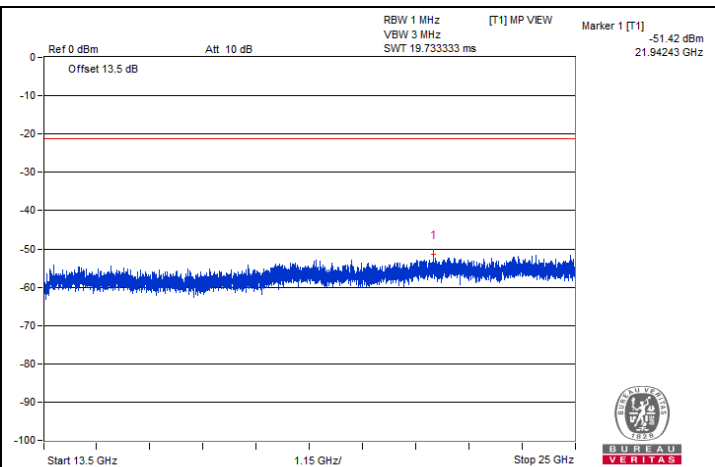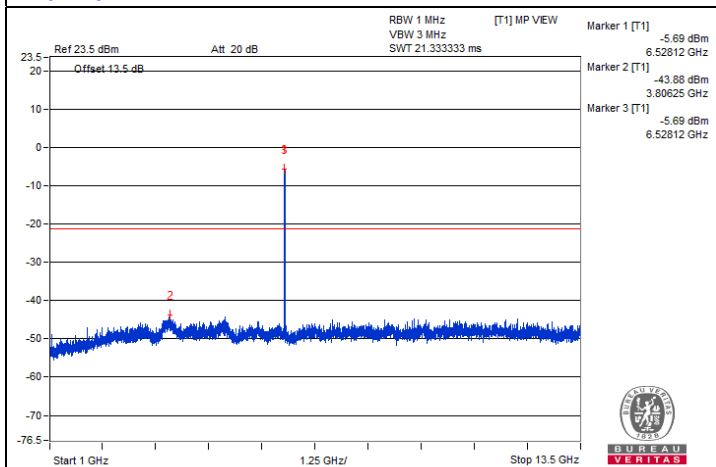

Chain 1

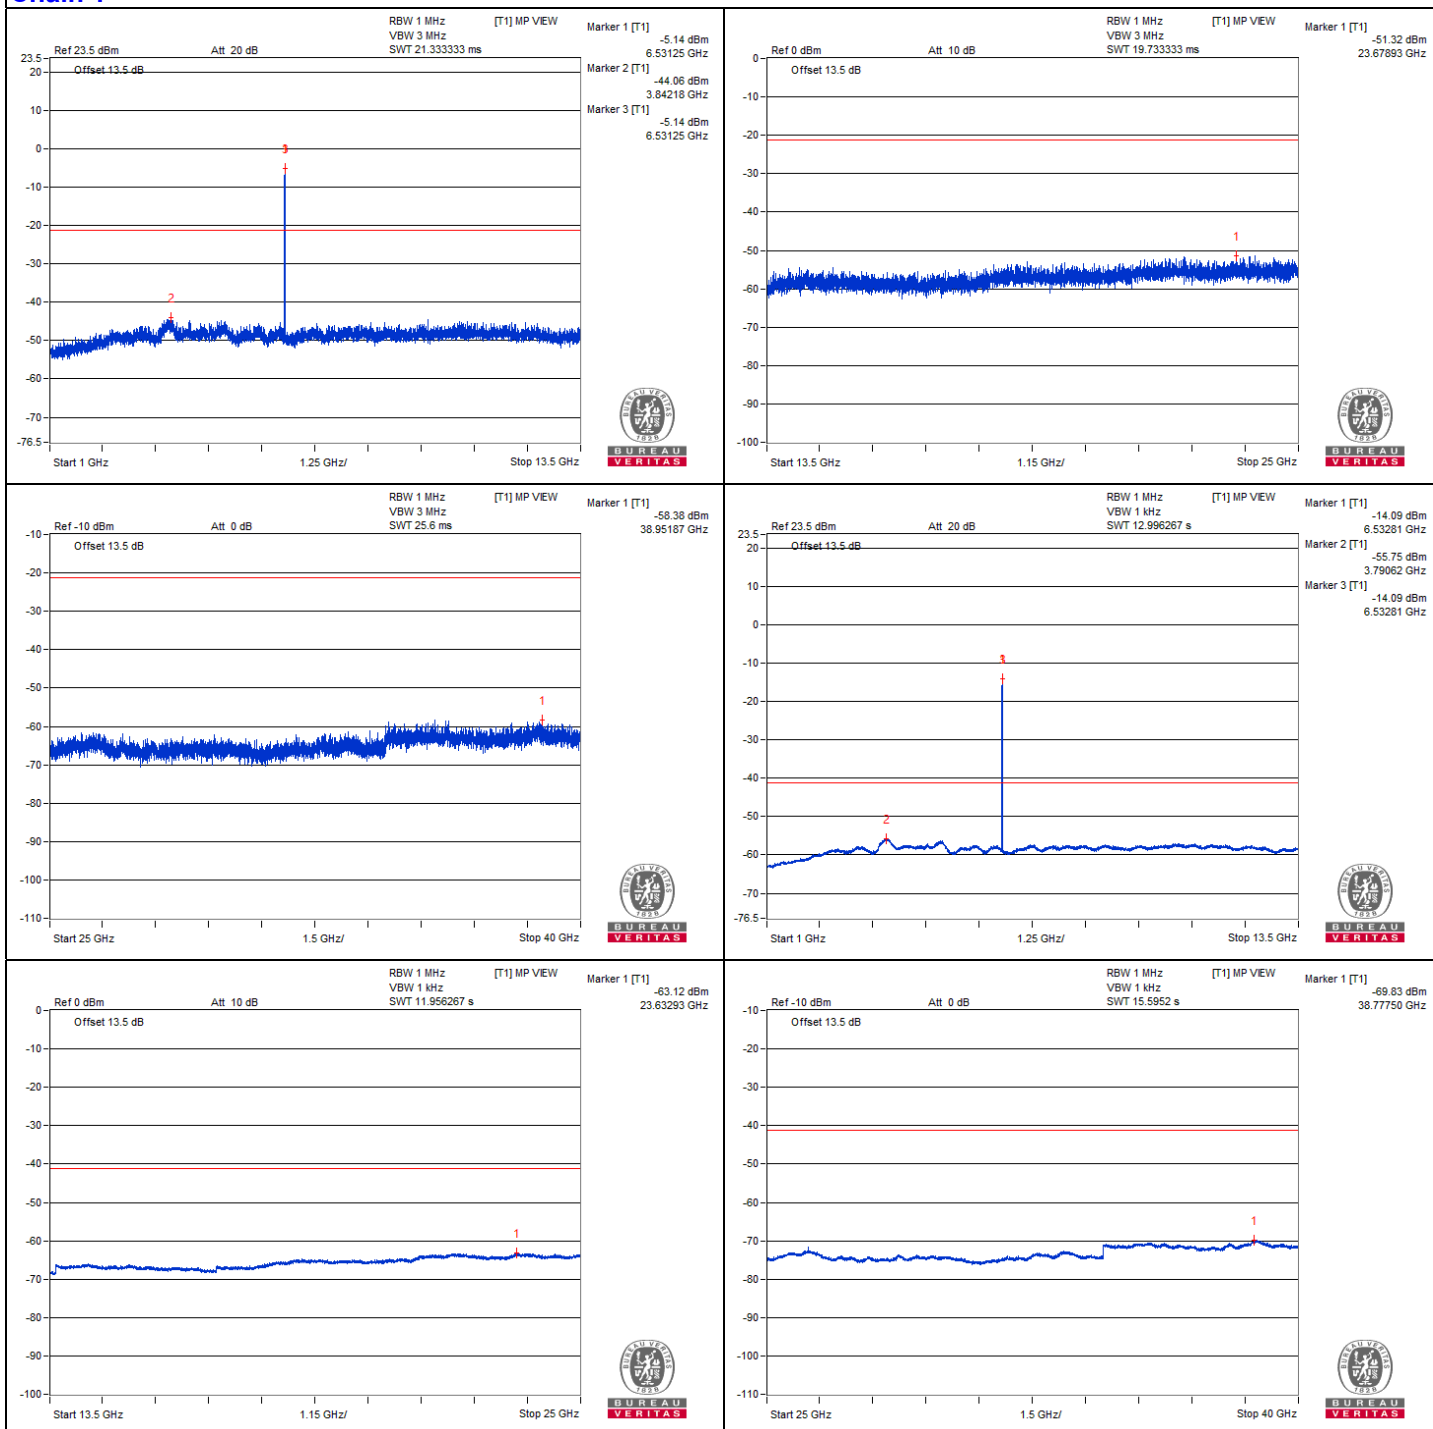

802.11be (EHT20) 106-tone RU - Channel 149


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	13387.5	58.02 PK	74	-15.98	-47.67	-49.33	8.17	-37.24
2	13385.93	47.77 AV	54	-6.23	-58.69	-58.65	8.17	-47.49
3	20082.31	51.46 PK	74	-22.54	-54.09	-56.09	8.17	-43.80
4	20075.12	41.19 AV	54	-12.81	-65.34	-65.17	8.17	-54.07


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

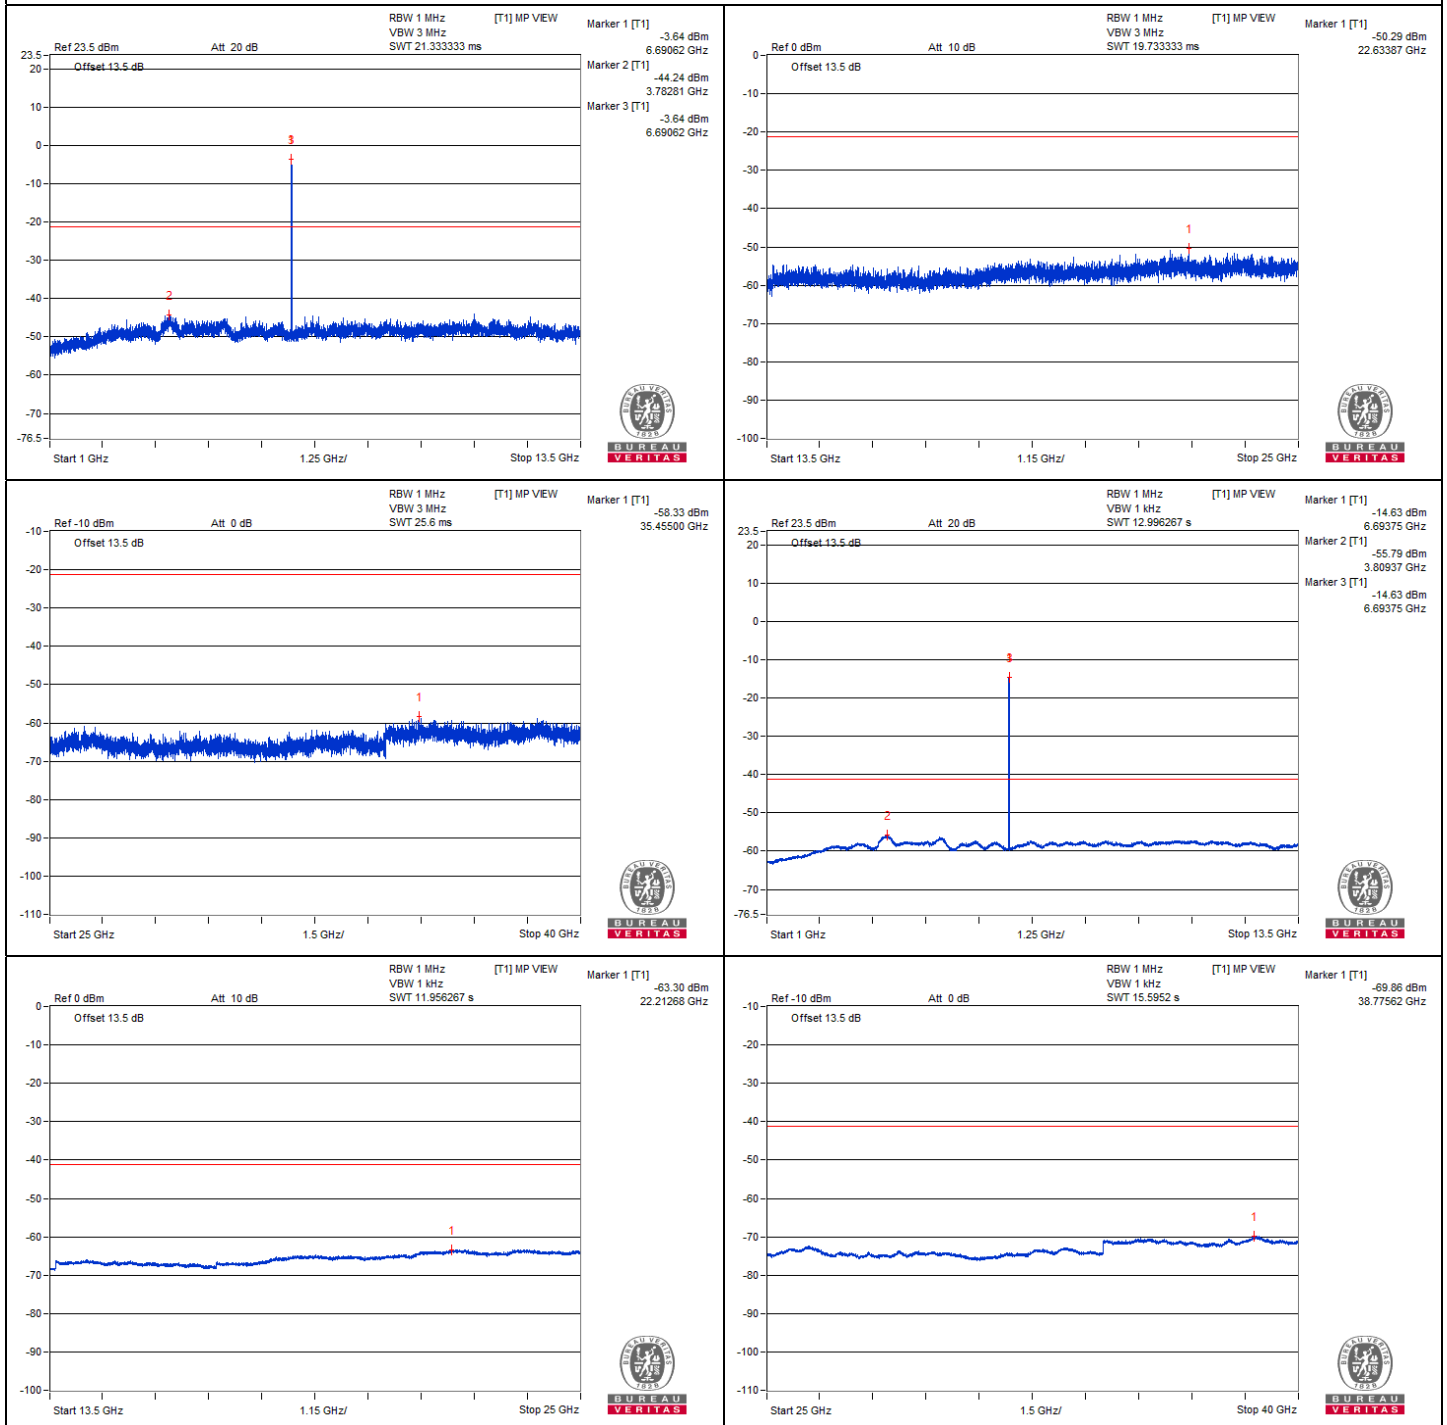

Chain 1

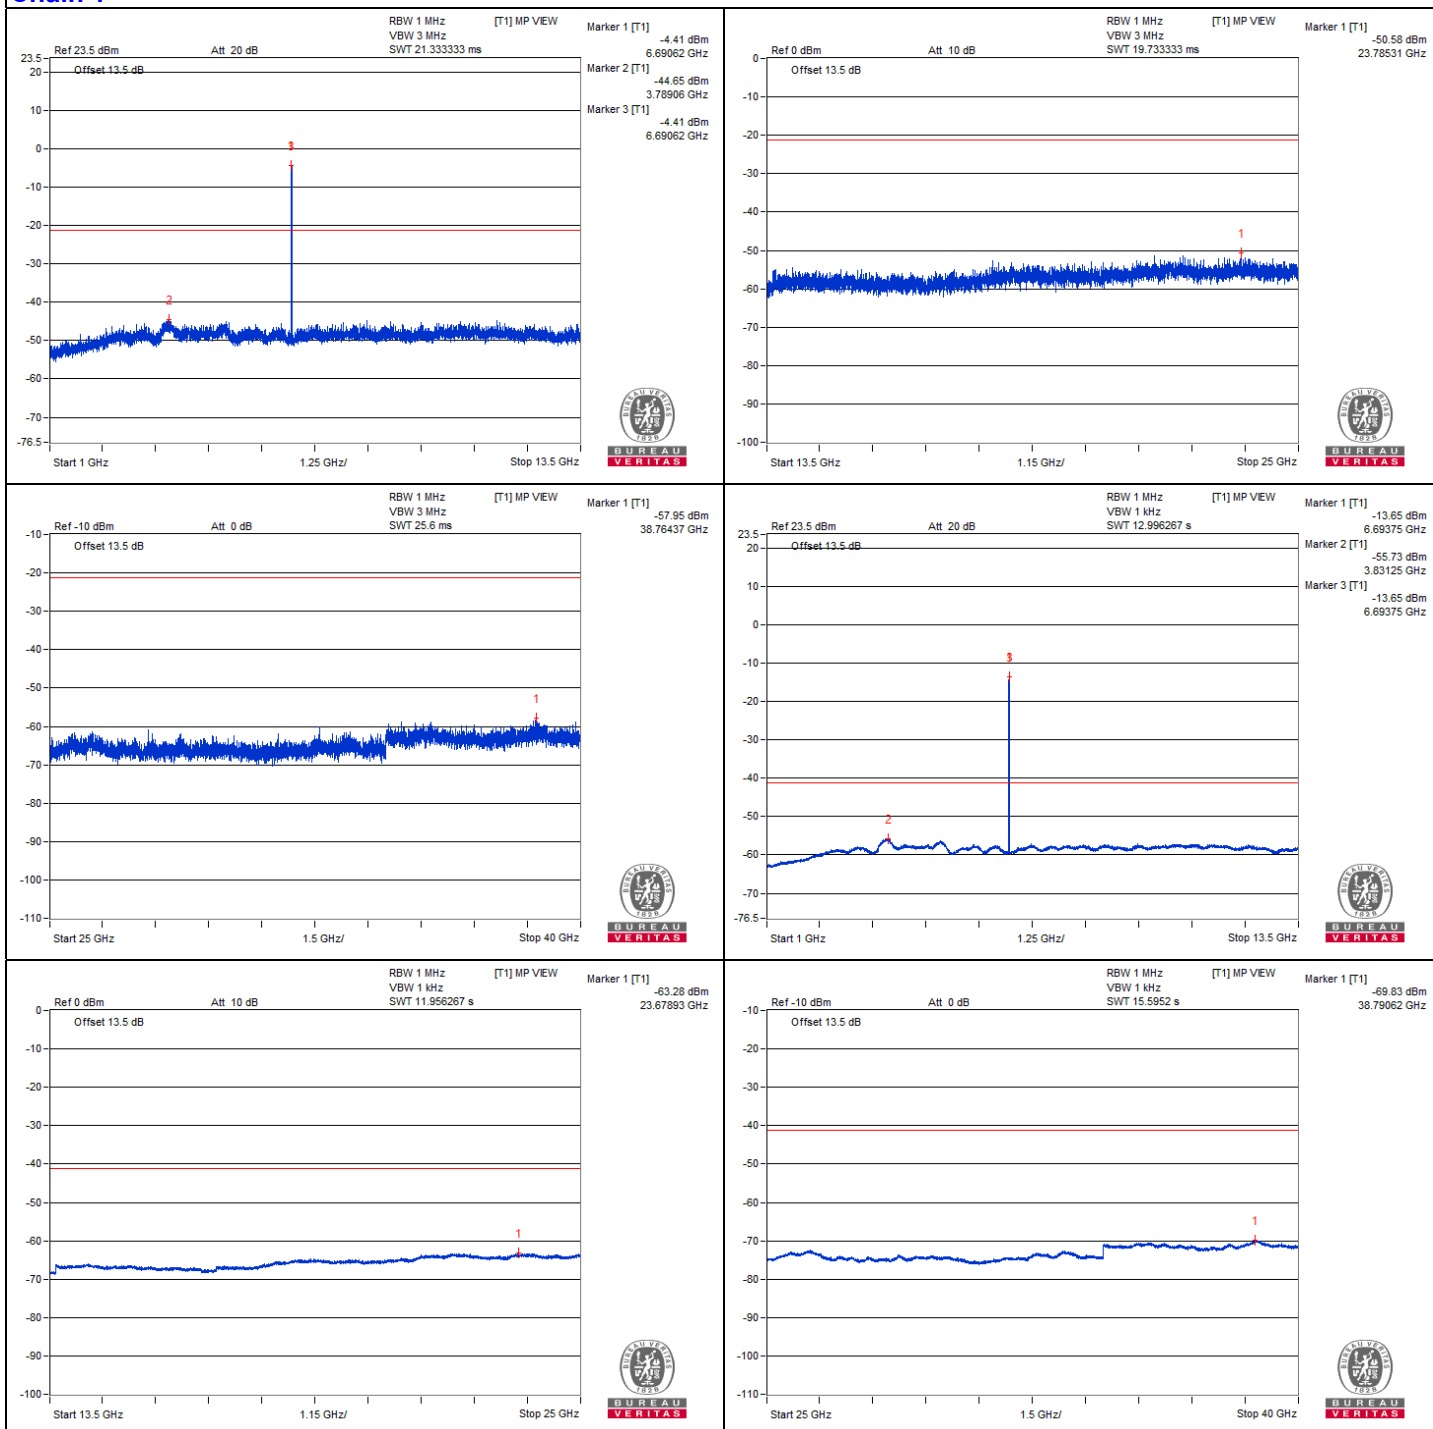

802.11be (EHT20) 106-tone RU - Channel 181


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13707	49.22 PK	88.2	-38.98	-56.94	-57.51	8.17	-46.04
2	#13715.62	39.71 AV	68.2	-28.49	-66.75	-66.72	8.17	-55.55
3	20561	51.05 PK	74	-22.95	-57.59	-53.94	8.17	-44.21
4	20572.5	41.03 AV	54	-12.97	-65.28	-65.55	8.17	-54.23


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

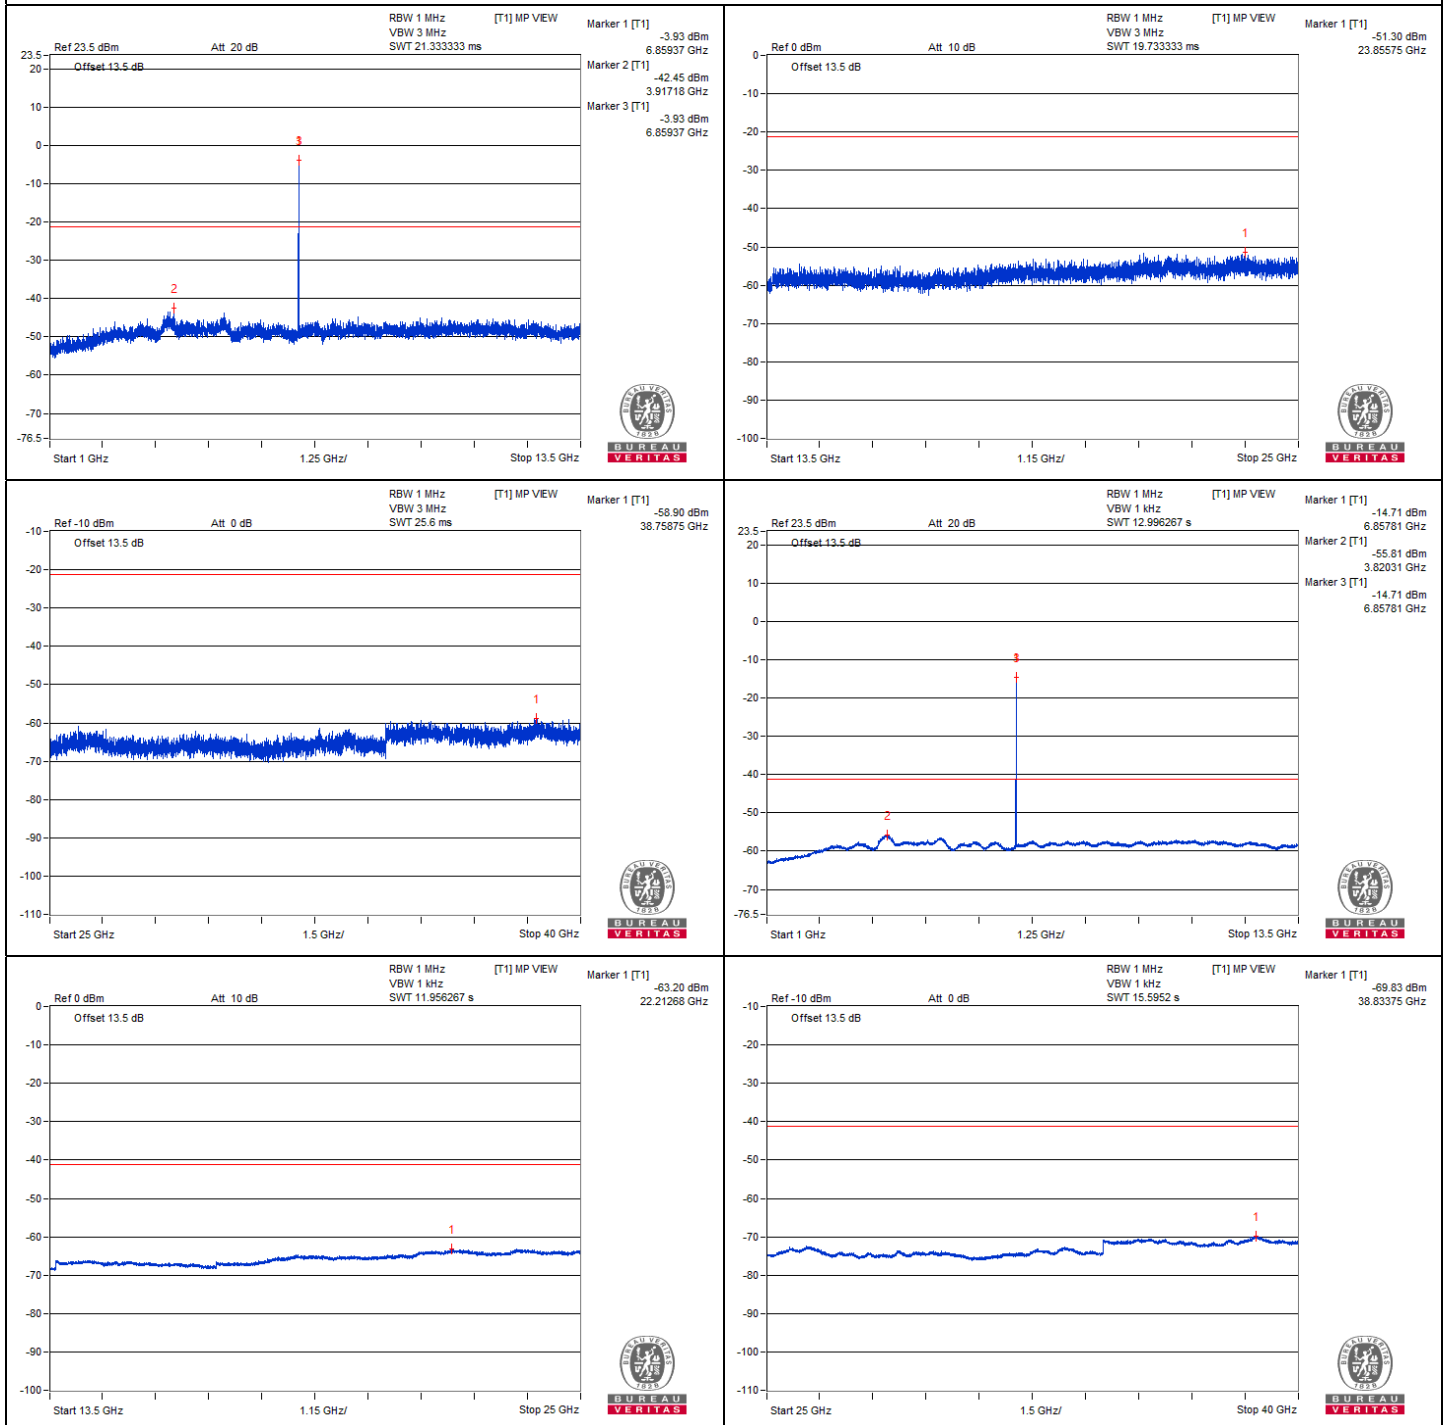

Chain 1

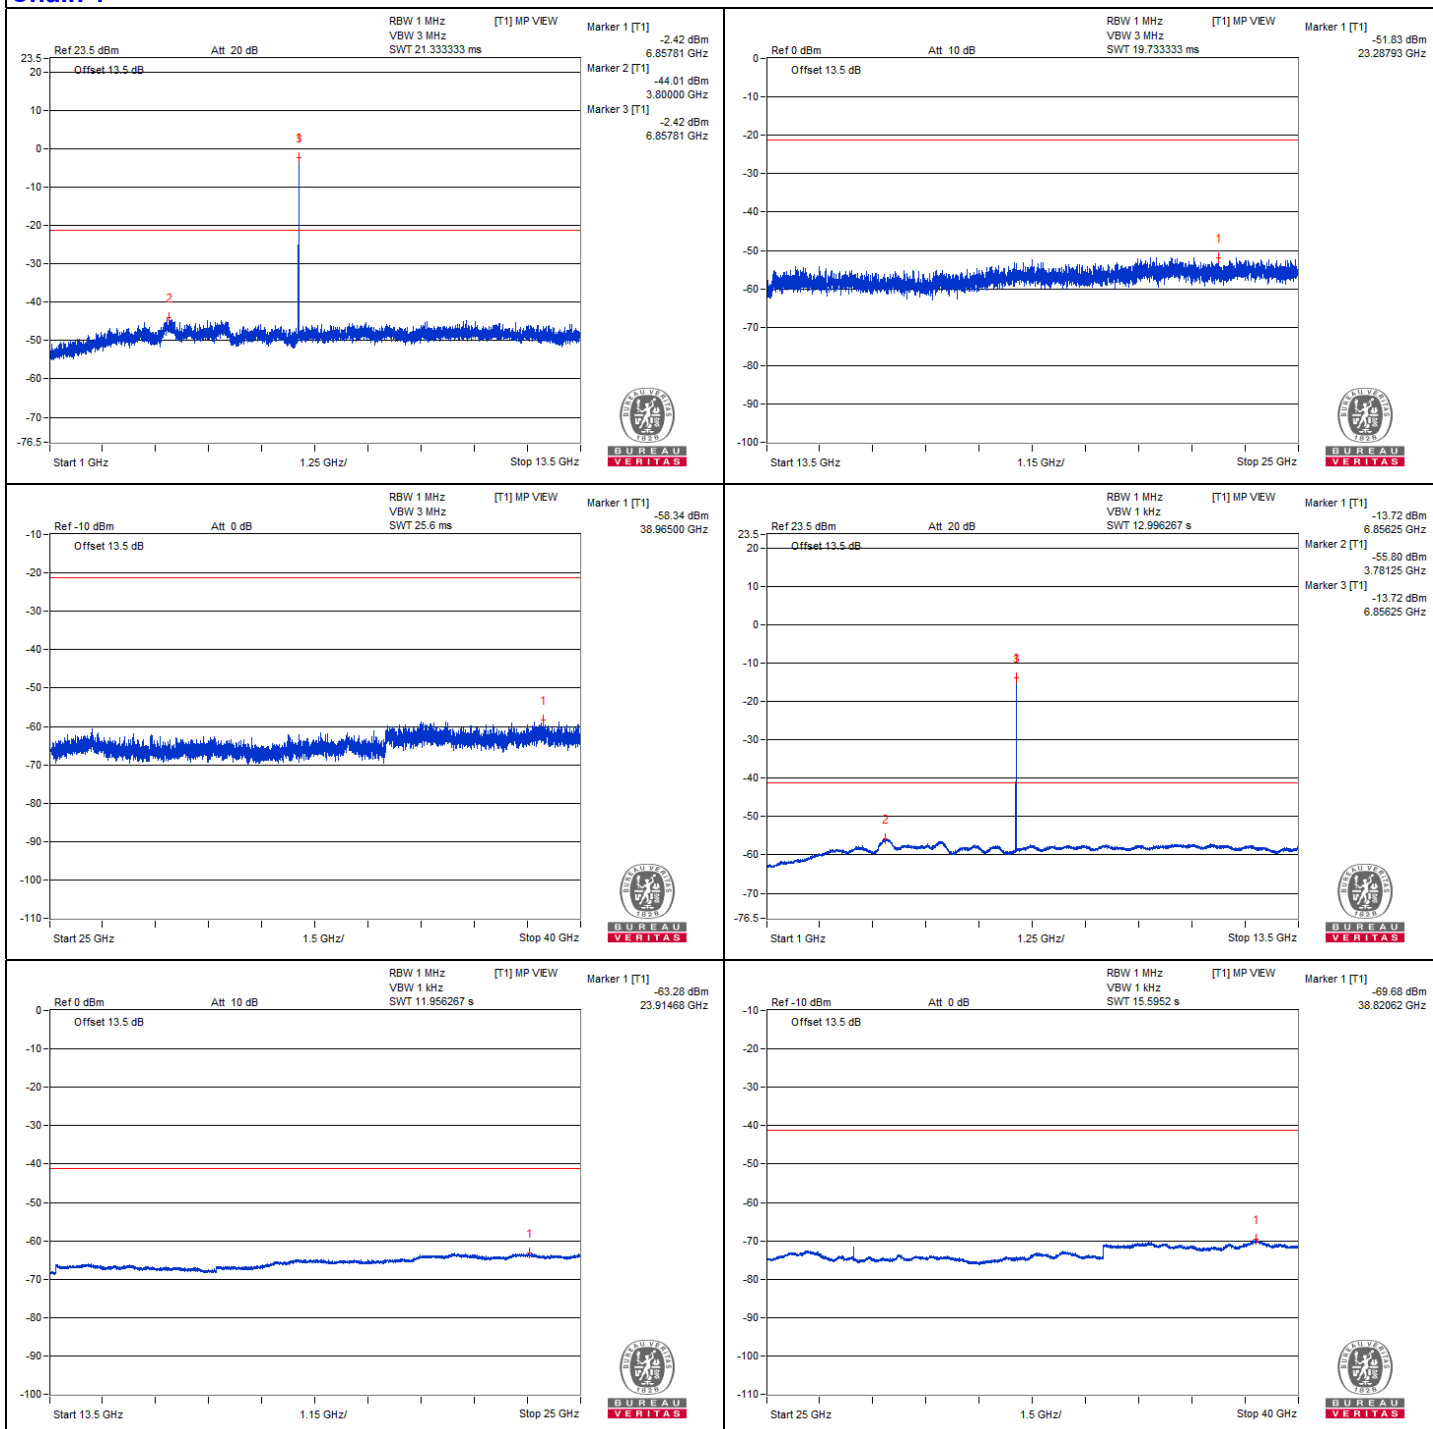

802.11be (EHT20) 106-tone RU - Channel 185


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13753	49.44 PK	88.2	-38.76	-56.42	-57.68	8.17	-45.82
2	#13758.75	39.58 AV	68.2	-28.62	-66.85	-66.87	8.17	-55.68
3	20631.43	51.45 PK	74	-22.55	-52.93	-59.07	8.17	-43.81
4	20624.25	41.15 AV	54	-12.85	-65.16	-65.43	8.17	-54.11


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

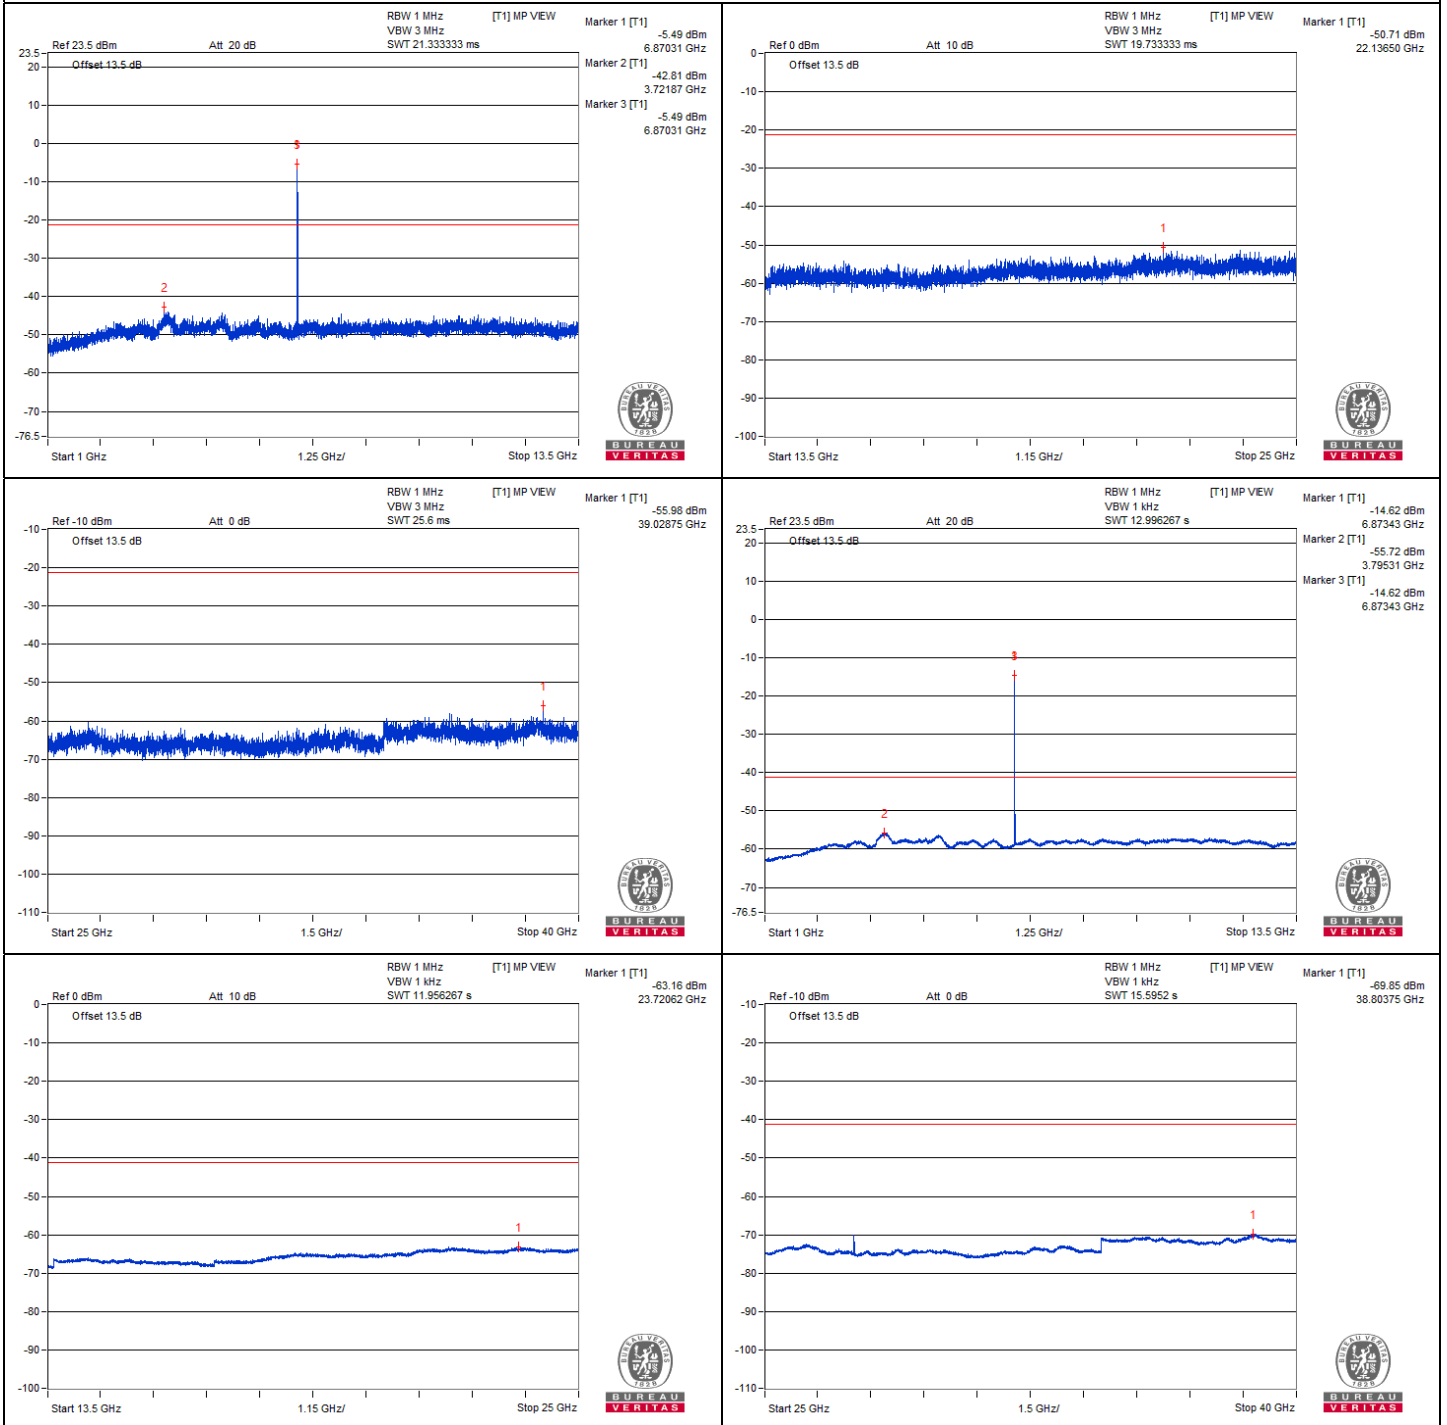

Chain 1

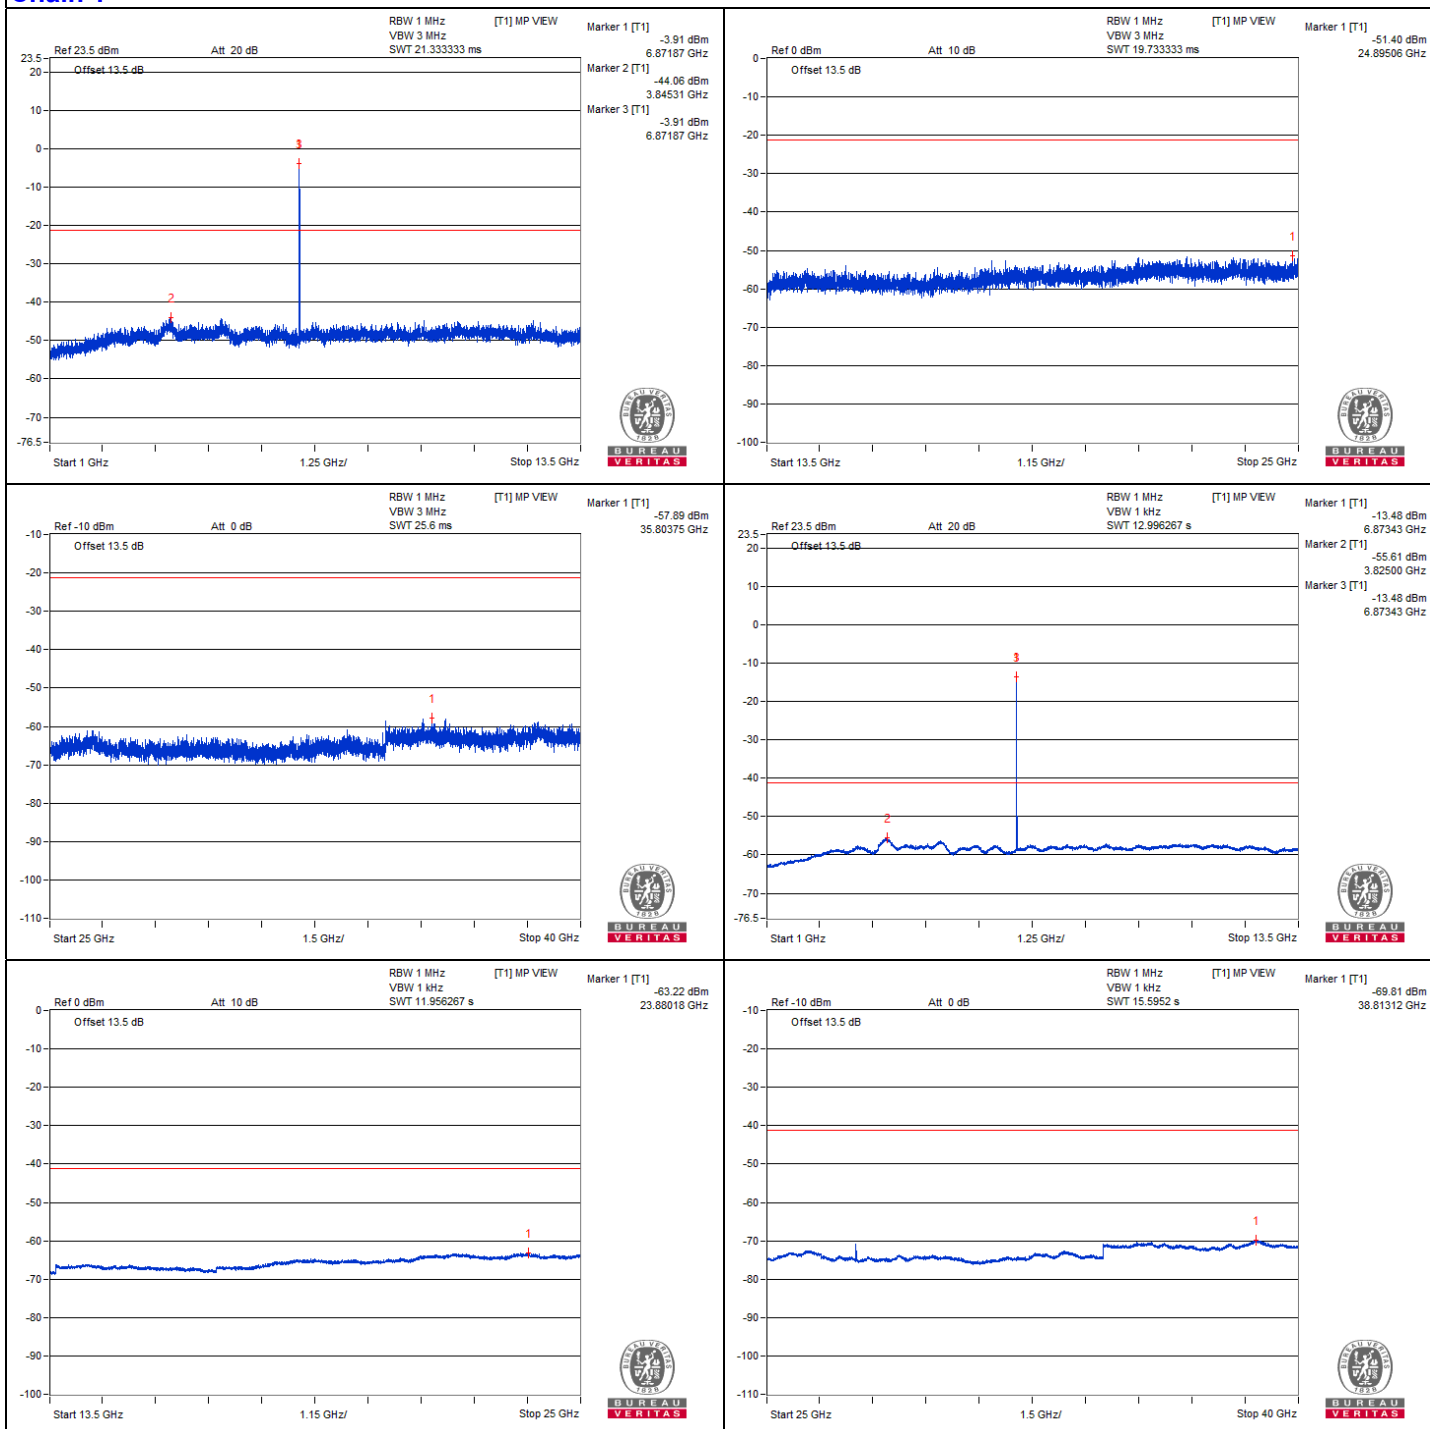

802.11be (EHT20) 106-tone RU - Channel 209


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#13983	49.62 PK	88.2	-38.58	-56.04	-57.77	8.17	-45.64
2	#13993.06	39.77 AV	68.2	-28.43	-66.46	-66.9	8.17	-55.49
3	20977.87	52.46 PK	74	-21.54	-56.64	-52.34	8.17	-42.80
4	20977.87	41.4 AV	54	-12.6	-65.27	-64.82	8.17	-53.86


Remarks:

- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " # " : The frequency is out of the restricted band.

Chain 0

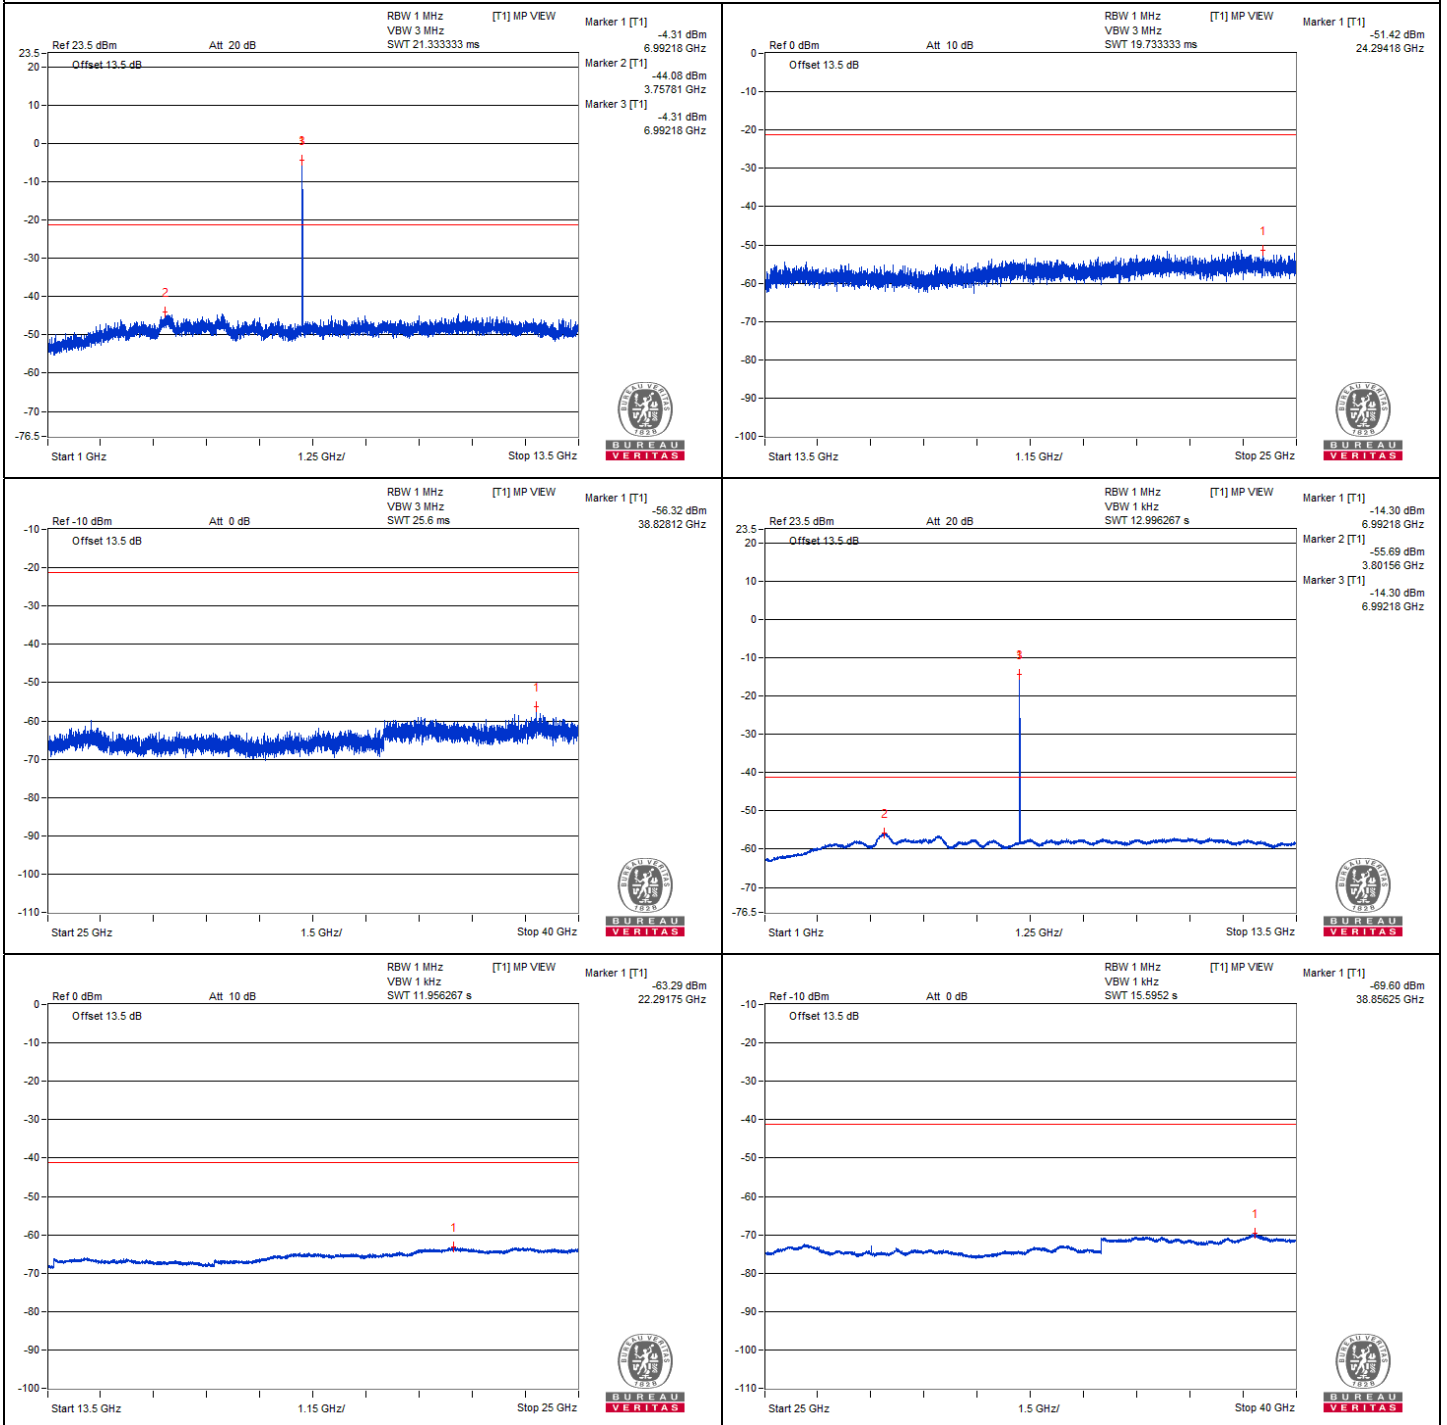

Chain 1

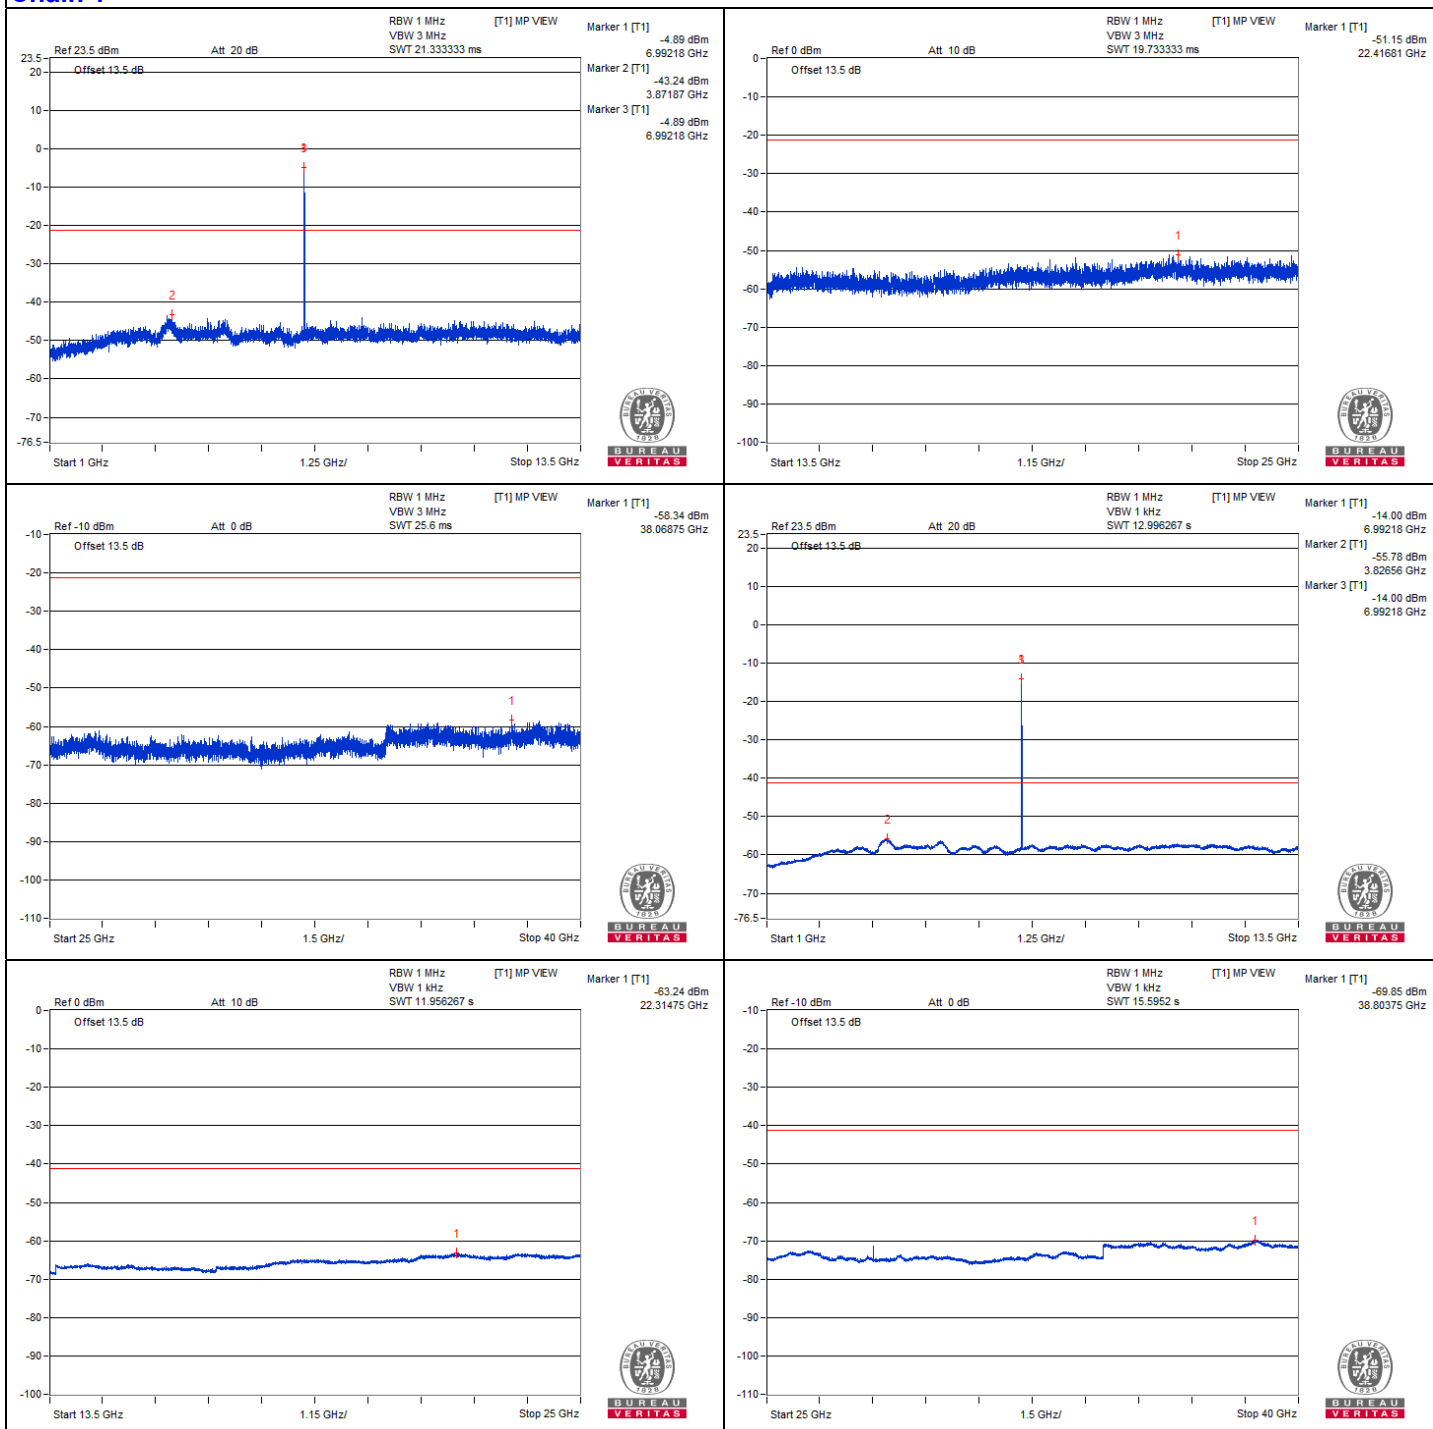

802.11be (EHT20) 106-tone RU - Channel 233


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#14224.5	50.86 PK	88.2	-37.34	-55.62	-55.54	8.17	-44.40
2	#14238.87	40 AV	68.2	-28.2	-66.44	-66.44	8.17	-55.26
3	21348.75	51.3 PK	74	-22.7	-54.41	-56.02	8.17	-43.96
4	21340.12	41.31 AV	54	-12.69	-65.17	-65.1	8.17	-53.95


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

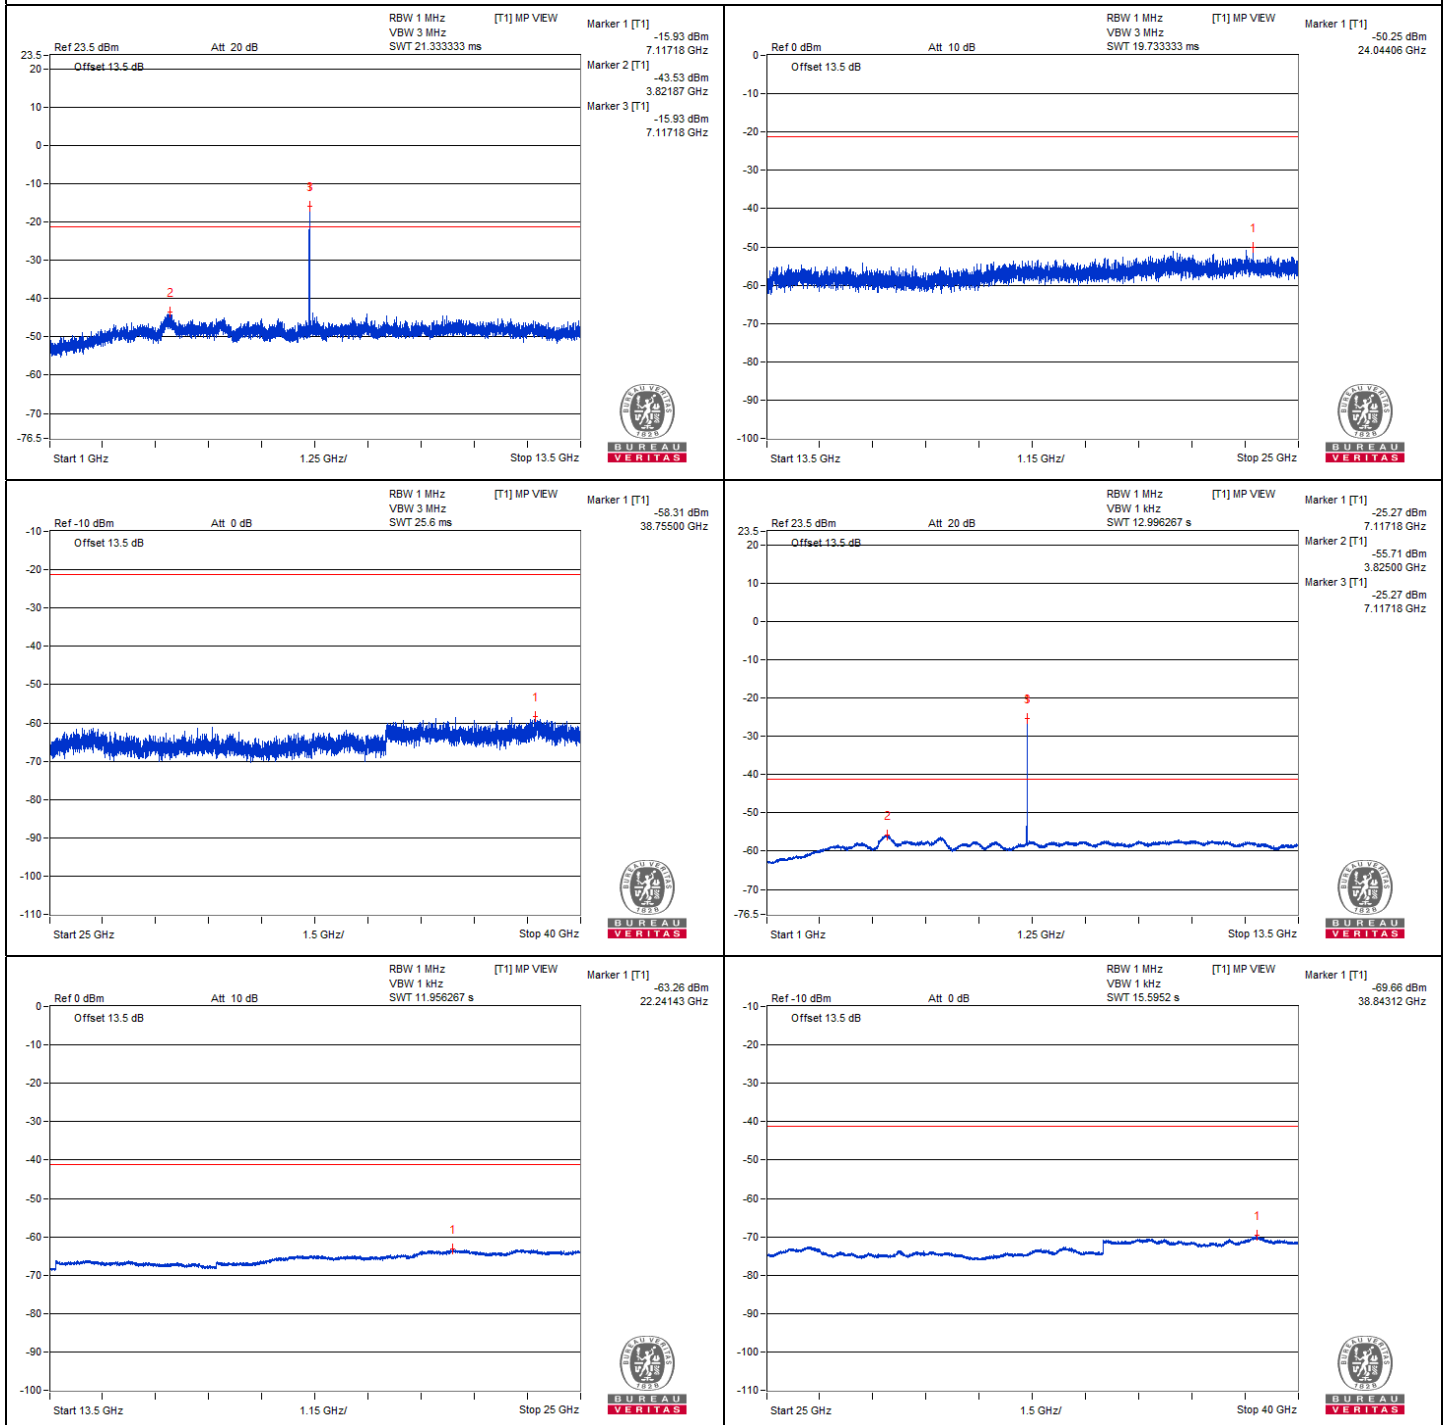

Chain 1

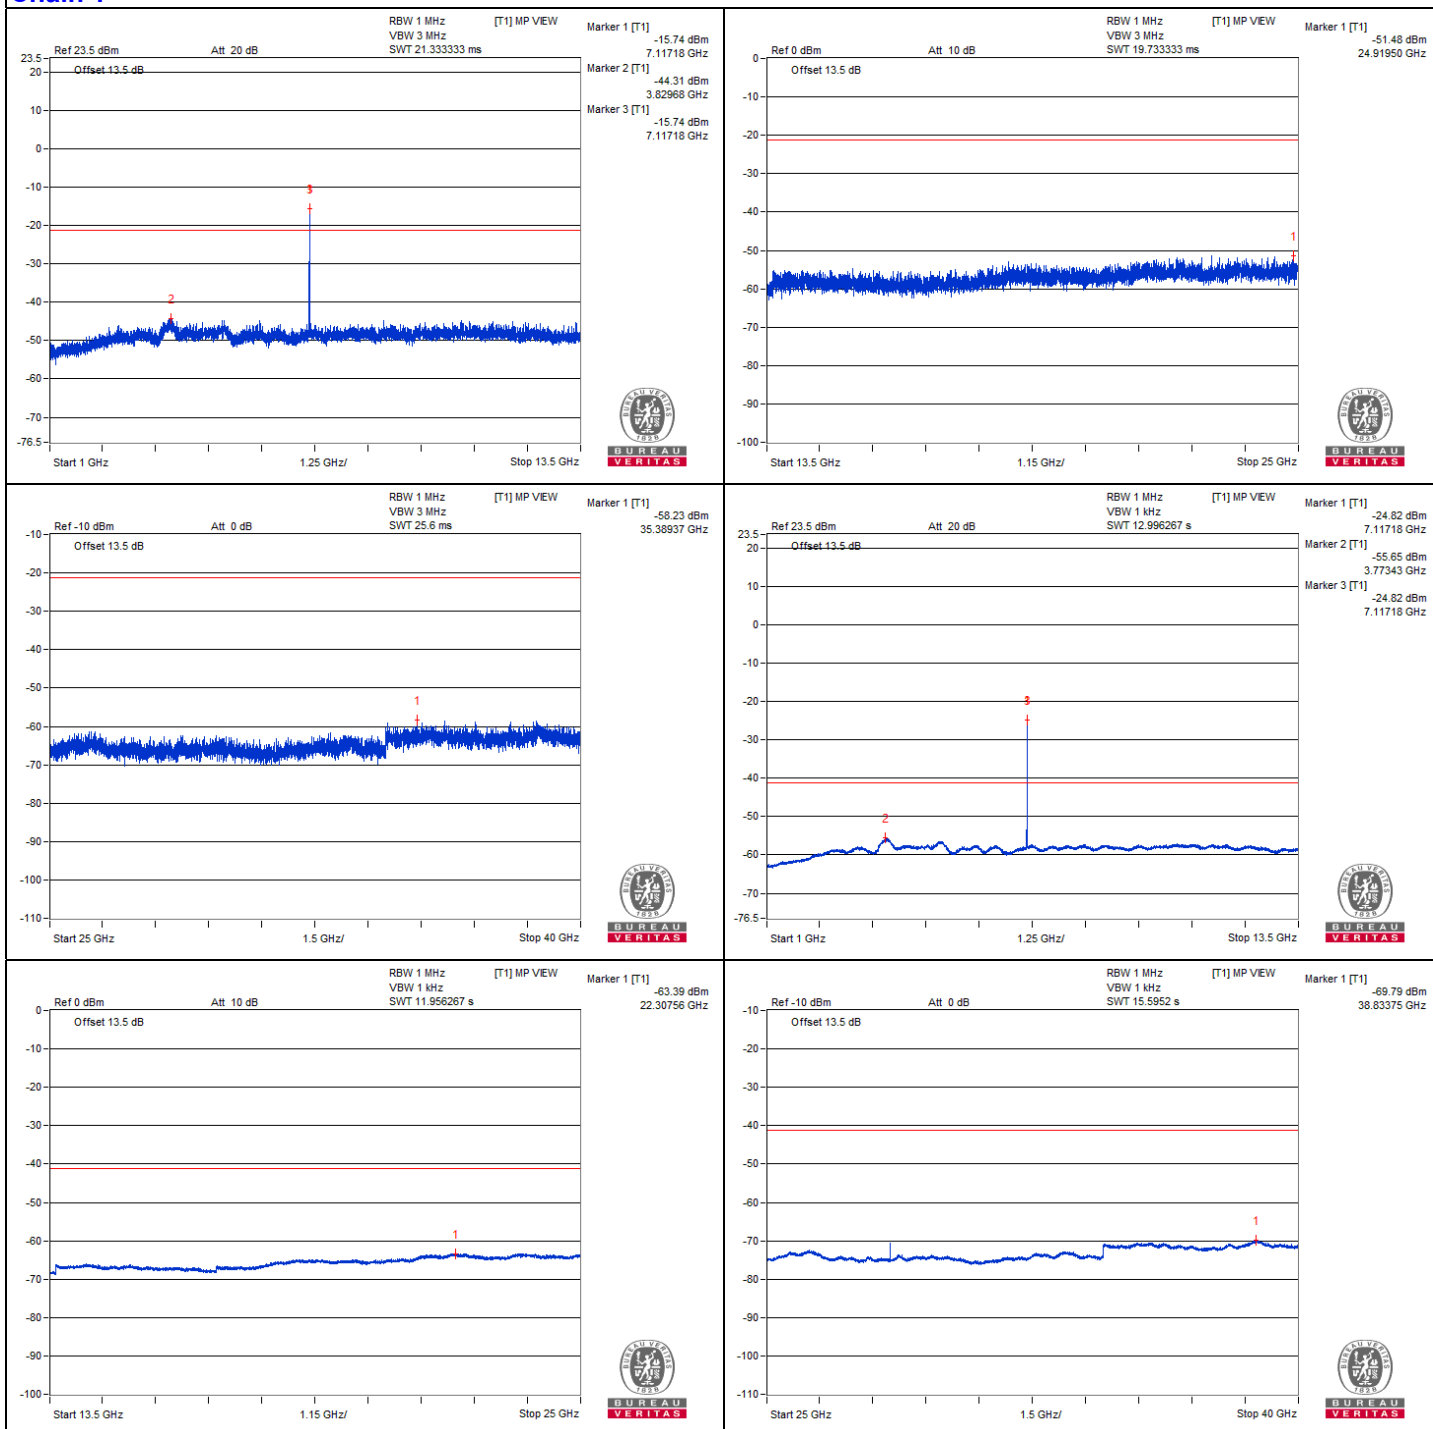


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#7125	79.32 PK	88.2	-8.88	-27.13	-27.04	8.13	-15.94
2	#7125	67.76 AV	68.2	-0.44	-38.89	-38.41	8.13	-27.50


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

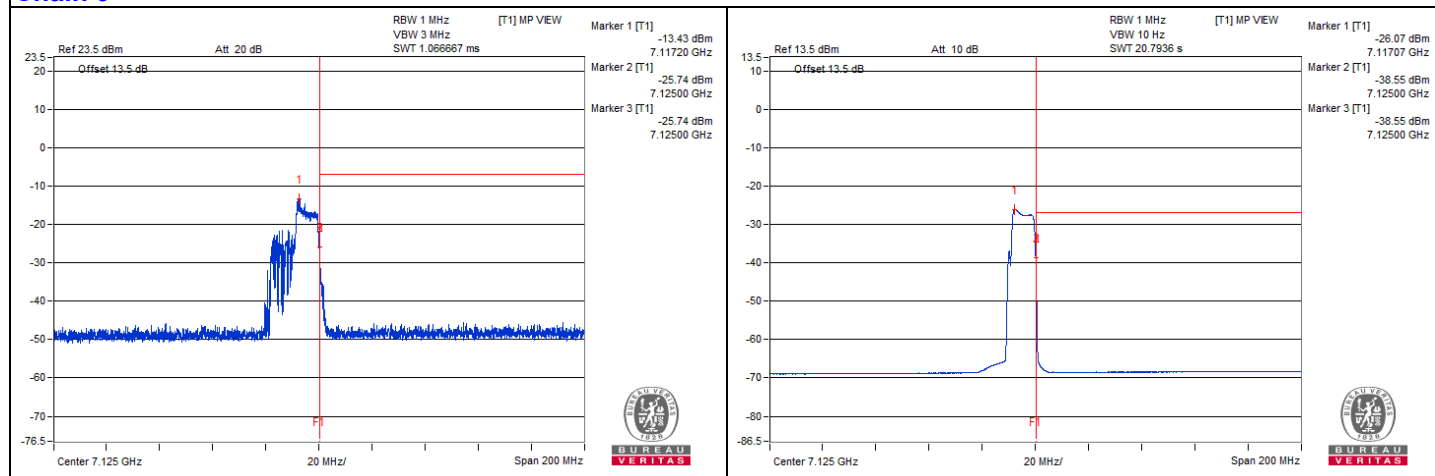

Chain 1

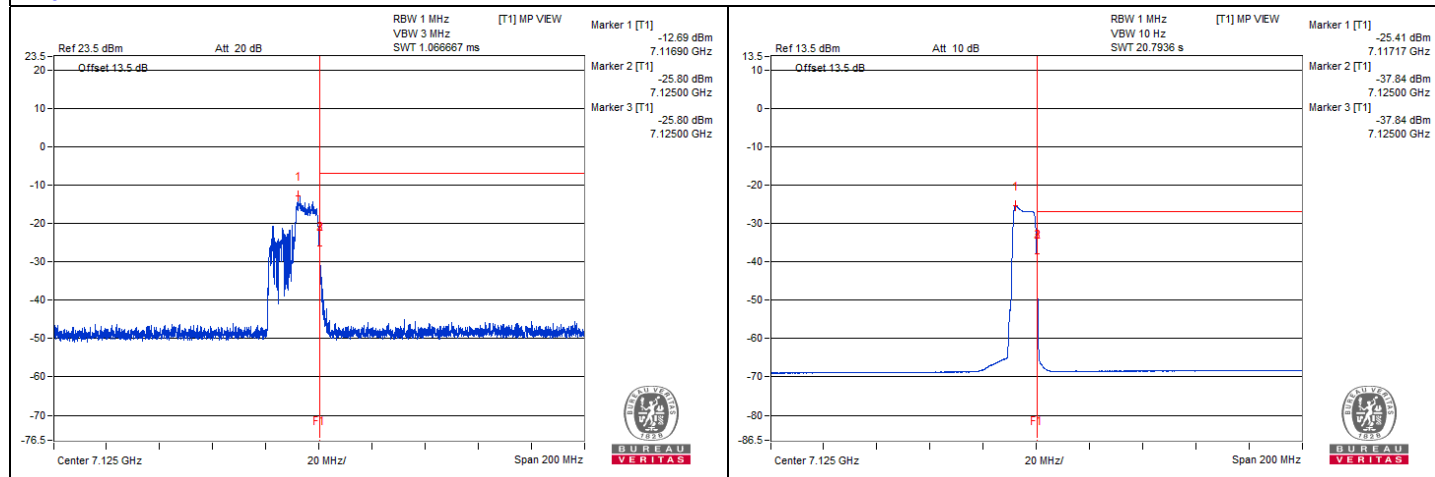


Mode B

RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.5 PK	74.0	-25.5	1.23 H	236	36.0	12.5
2	11920.00	39.7 AV	54.0	-14.3	1.23 H	236	27.2	12.5
3	17880.00	46.0 PK	74.0	-28.0	1.39 H	167	23.2	22.8
4	17880.00	36.1 AV	54.0	-17.9	1.39 H	167	13.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

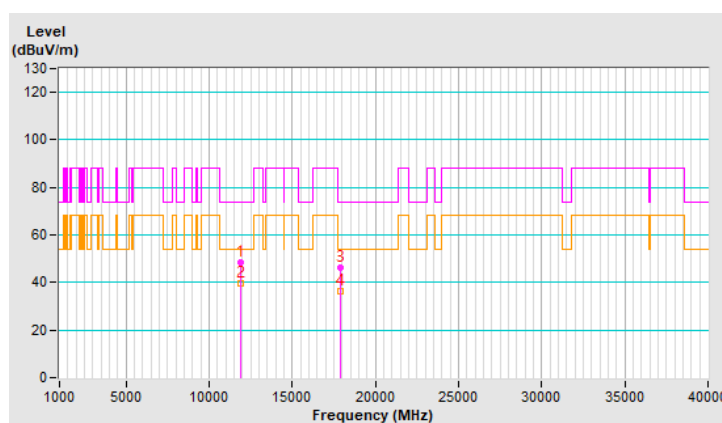


RF Mode	802.11a	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.8 PK	74.0	-25.2	1.13 V	193	36.3	12.5
2	11920.00	37.9 AV	54.0	-16.1	1.13 V	193	25.4	12.5
3	17880.00	46.3 PK	74.0	-27.7	1.16 V	153	23.5	22.8
4	17880.00	37.3 AV	54.0	-16.7	1.16 V	153	14.5	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

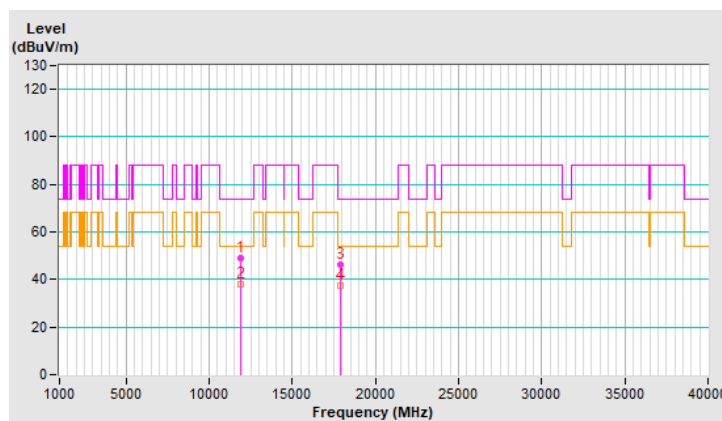


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.4 PK	74.0	-25.6	1.24 H	252	35.9	12.5
2	11910.00	39.9 AV	54.0	-14.1	1.24 H	252	27.4	12.5
3	17865.00	45.5 PK	74.0	-28.5	1.43 H	176	22.9	22.6
4	17865.00	35.6 AV	54.0	-18.4	1.43 H	176	13.0	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

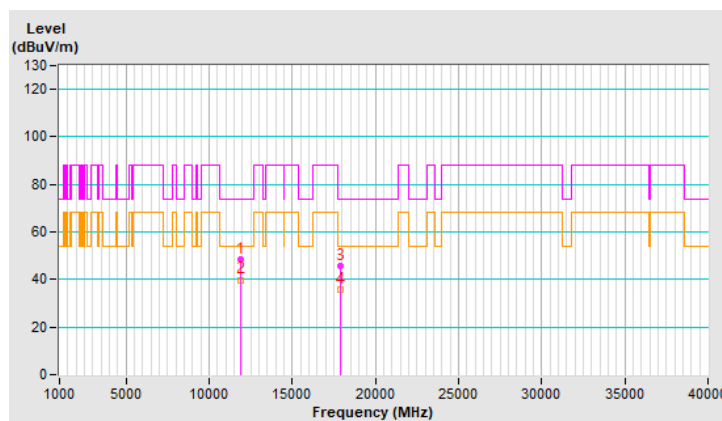


RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.8 PK	74.0	-25.2	1.16 V	198	36.3	12.5
2	11910.00	37.8 AV	54.0	-16.2	1.16 V	198	25.3	12.5
3	17865.00	45.8 PK	74.0	-28.2	1.20 V	163	23.2	22.6
4	17865.00	37.0 AV	54.0	-17.0	1.20 V	163	14.4	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

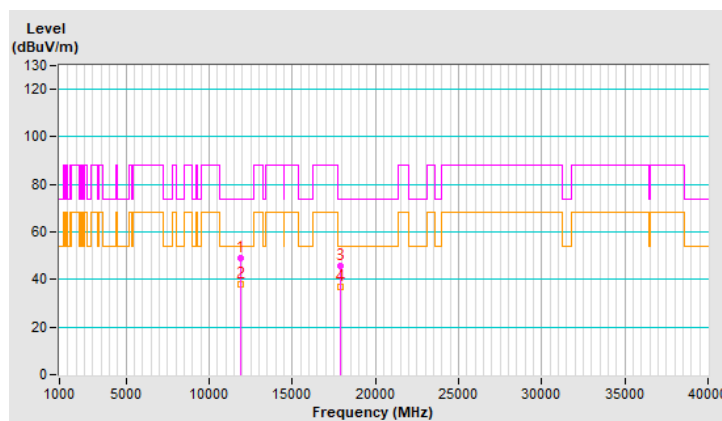


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.3 PK	74.0	-25.7	1.21 H	240	35.8	12.5
2	12350.00	39.7 AV	54.0	-14.3	1.21 H	240	27.2	12.5
3	18525.00	45.7 PK	74.0	-28.3	1.45 H	178	51.8	-6.1
4	18525.00	35.9 AV	54.0	-18.1	1.45 H	178	42.0	-6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

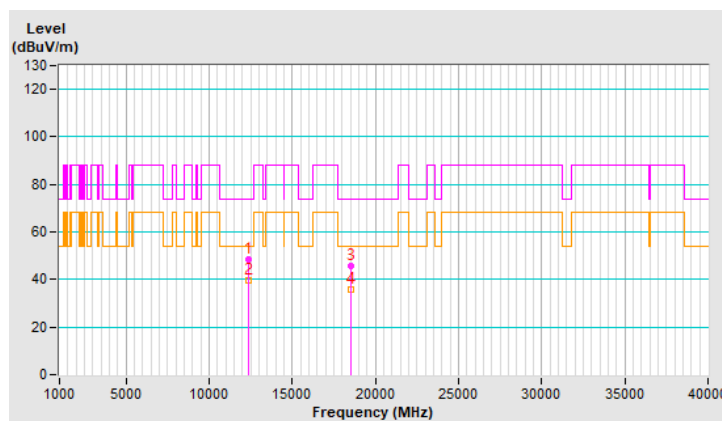


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.7 PK	74.0	-25.3	1.14 V	190	36.2	12.5
2	12350.00	37.9 AV	54.0	-16.1	1.14 V	190	25.4	12.5
3	18525.00	46.8 PK	74.0	-27.2	1.18 V	146	52.9	-6.1
4	18525.00	37.7 AV	54.0	-16.3	1.18 V	146	43.8	-6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

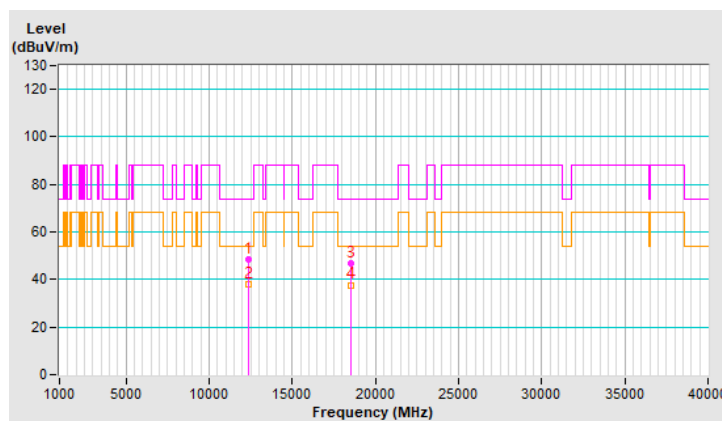


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.0 PK	88.2	-40.2	1.19 H	226	36.4	11.6
2	#12830.00	39.2 AV	68.2	-29.0	1.19 H	226	27.6	11.6
3	19245.00	45.6 PK	74.0	-28.4	1.39 H	181	51.1	-5.5
4	19245.00	35.7 AV	54.0	-18.3	1.39 H	181	41.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

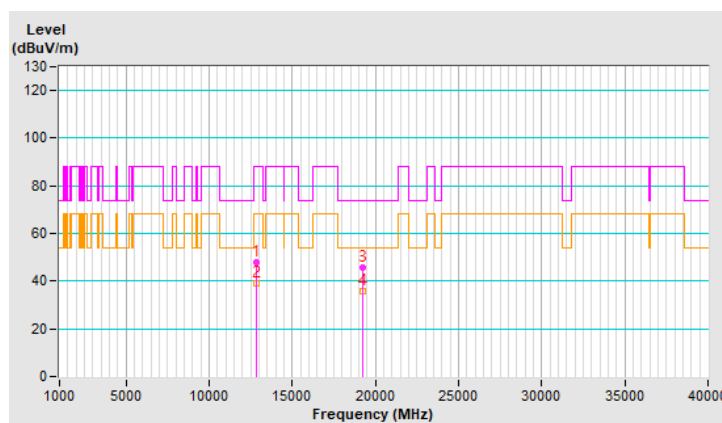


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.9 PK	88.2	-39.3	1.14 V	203	37.3	11.6
2	#12830.00	38.1 AV	68.2	-30.1	1.14 V	203	26.5	11.6
3	19245.00	46.1 PK	74.0	-27.9	1.19 V	148	51.6	-5.5
4	19245.00	36.9 AV	54.0	-17.1	1.19 V	148	42.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

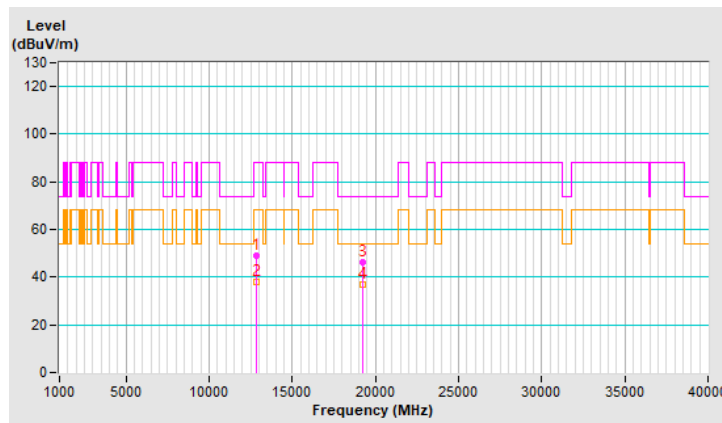


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.7 PK	88.2	-39.5	1.18 H	223	36.8	11.9
2	#12870.00	40.0 AV	68.2	-28.2	1.18 H	223	28.1	11.9
3	19305.00	45.8 PK	74.0	-28.2	1.37 H	156	51.3	-5.5
4	19305.00	35.6 AV	54.0	-18.4	1.37 H	156	41.1	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

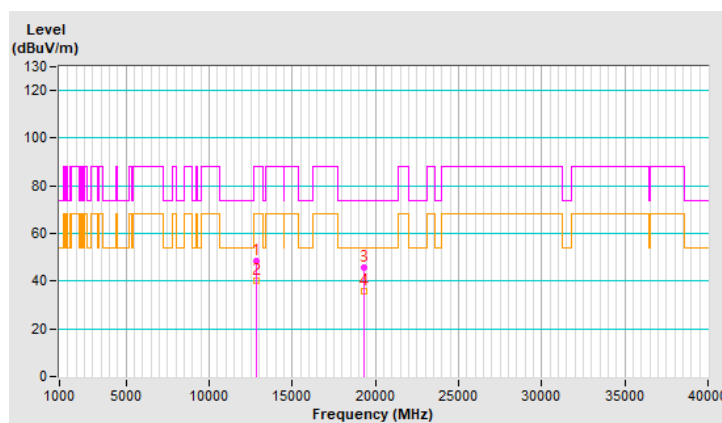


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.1 PK	88.2	-39.1	1.16 V	188	37.2	11.9
2	#12870.00	38.2 AV	68.2	-30.0	1.16 V	188	26.3	11.9
3	19305.00	46.1 PK	74.0	-27.9	1.14 V	167	51.6	-5.5
4	19305.00	37.0 AV	54.0	-17.0	1.14 V	167	42.5	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

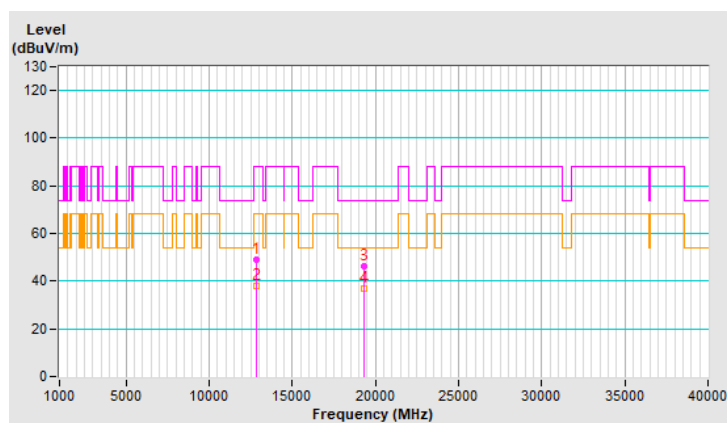


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.4 PK	88.2	-39.8	1.24 H	230	36.1	12.3
2	#12950.00	39.9 AV	68.2	-28.3	1.24 H	230	27.6	12.3
3	19425.00	46.0 PK	74.0	-28.0	1.36 H	179	51.7	-5.7
4	19425.00	36.2 AV	54.0	-17.8	1.36 H	179	41.9	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

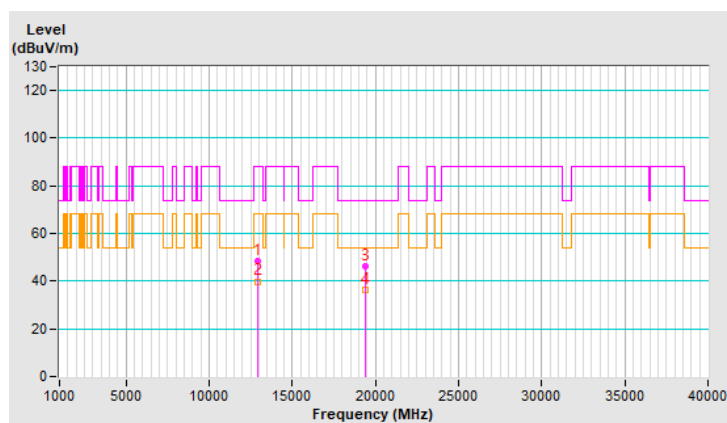


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.3 PK	88.2	-39.9	1.14 V	206	36.0	12.3
2	#12950.00	37.5 AV	68.2	-30.7	1.14 V	206	25.2	12.3
3	19425.00	46.3 PK	74.0	-27.7	1.12 V	158	52.0	-5.7
4	19425.00	37.2 AV	54.0	-16.8	1.12 V	158	42.9	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

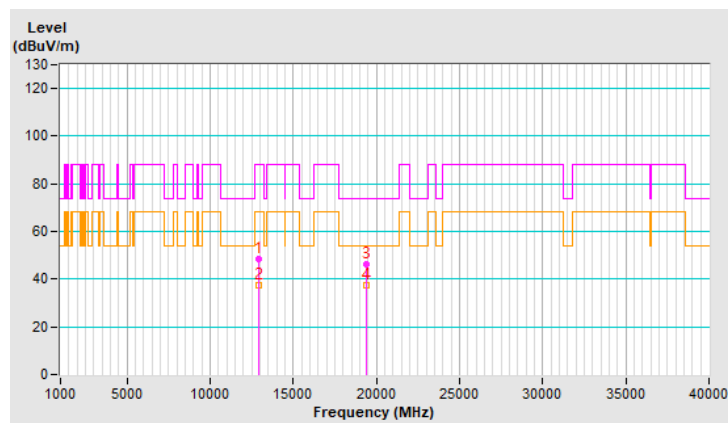


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.4 PK	88.2	-39.8	1.28 H	221	35.9	12.5
2	#13030.00	39.4 AV	68.2	-28.8	1.28 H	221	26.9	12.5
3	19545.00	45.6 PK	74.0	-28.4	1.42 H	167	51.5	-5.9
4	19545.00	35.8 AV	54.0	-18.2	1.42 H	167	41.7	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

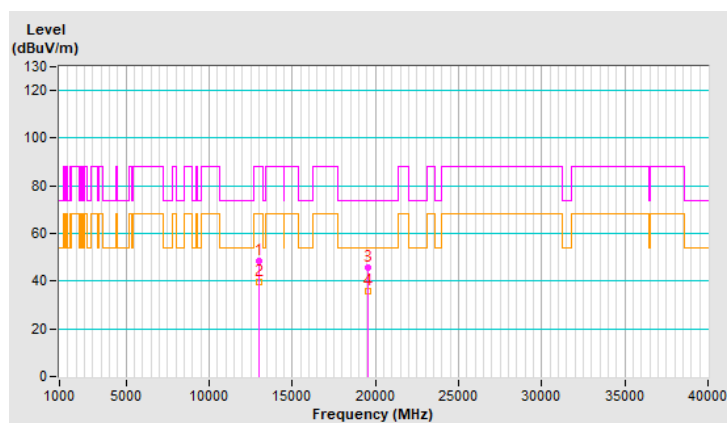


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	49.0 PK	88.2	-39.2	1.17 V	187	36.5	12.5
2	#13030.00	38.2 AV	68.2	-30.0	1.17 V	187	25.7	12.5
3	19545.00	46.4 PK	74.0	-27.6	1.17 V	159	52.3	-5.9
4	19545.00	37.5 AV	54.0	-16.5	1.17 V	159	43.4	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

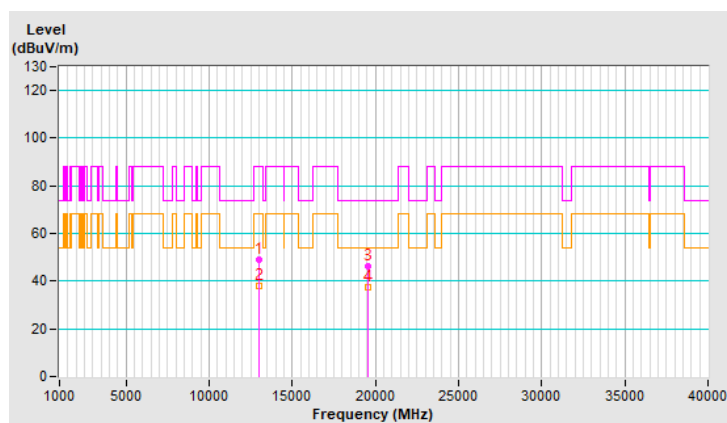


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	47.8 PK	88.2	-40.4	1.28 H	243	35.2	12.6
2	#13070.00	39.2 AV	68.2	-29.0	1.28 H	243	26.6	12.6
3	19605.00	45.9 PK	74.0	-28.1	1.36 H	161	51.8	-5.9
4	19605.00	35.7 AV	54.0	-18.3	1.36 H	161	41.6	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

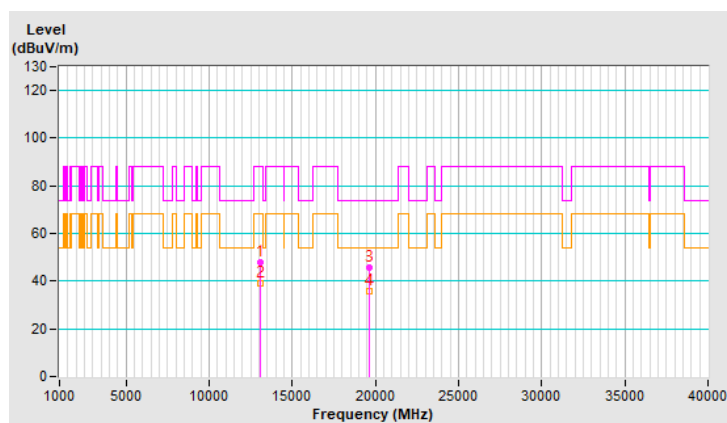


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.7 PK	88.2	-39.5	1.14 V	178	36.1	12.6
2	#13070.00	37.7 AV	68.2	-30.5	1.14 V	178	25.1	12.6
3	19605.00	46.0 PK	74.0	-28.0	1.18 V	142	51.9	-5.9
4	19605.00	37.1 AV	54.0	-16.9	1.18 V	142	43.0	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

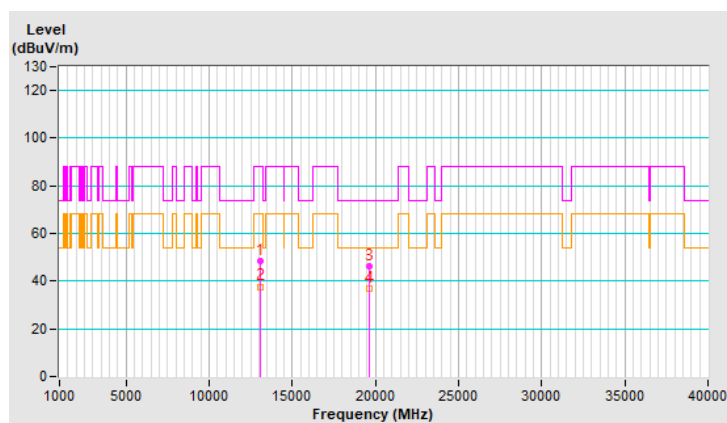


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.8 PK	74.0	-25.2	1.29 H	237	34.8	14.0
2	13390.00	39.9 AV	54.0	-14.1	1.29 H	237	25.9	14.0
3	20085.00	45.6 PK	74.0	-28.4	1.40 H	178	51.2	-5.6
4	20085.00	36.0 AV	54.0	-18.0	1.40 H	178	41.6	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

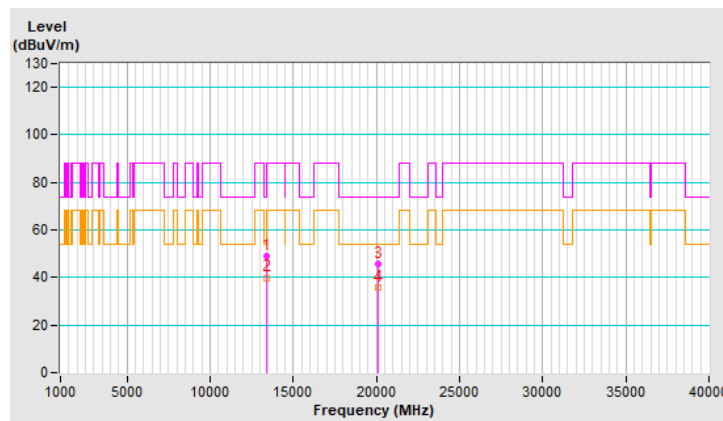


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	48.9 PK	74.0	-25.1	1.11 V	196	34.9	14.0
2	13390.00	38.0 AV	54.0	-16.0	1.11 V	196	24.0	14.0
3	20085.00	46.0 PK	74.0	-28.0	1.20 V	152	51.6	-5.6
4	20085.00	36.9 AV	54.0	-17.1	1.20 V	152	42.5	-5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

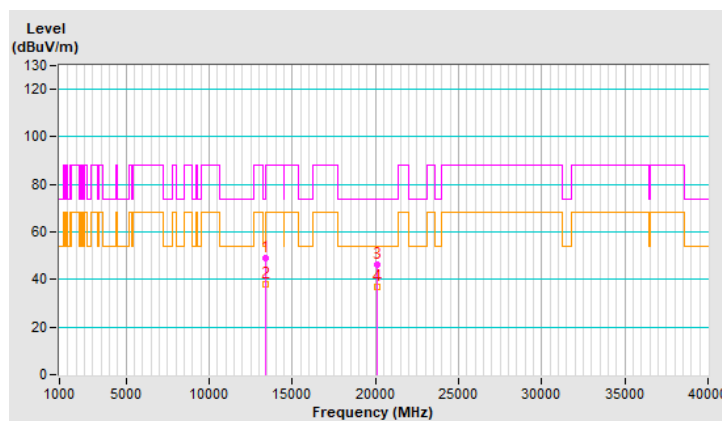


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.6 PK	88.2	-39.6	1.23 H	245	34.3	14.3
2	#13710.00	40.0 AV	68.2	-28.2	1.23 H	245	25.7	14.3
3	20565.00	46.2 PK	74.0	-27.8	1.39 H	169	50.5	-4.3
4	20565.00	36.2 AV	54.0	-17.8	1.39 H	169	40.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

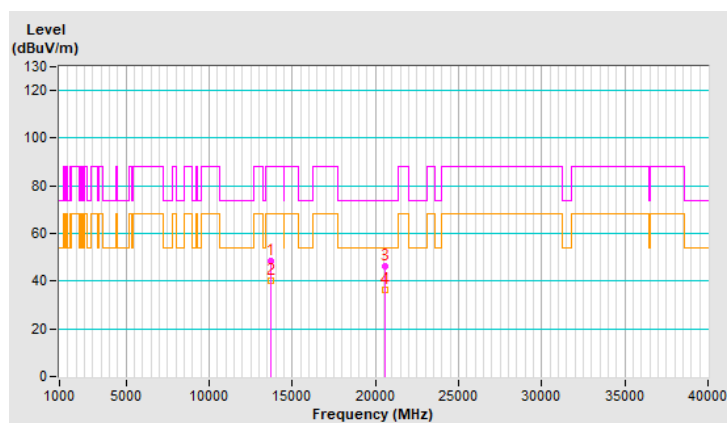


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	48.8 PK	88.2	-39.4	1.07 V	180	34.5	14.3
2	#13710.00	38.0 AV	68.2	-30.2	1.07 V	180	23.7	14.3
3	20565.00	46.1 PK	74.0	-27.9	1.20 V	149	50.4	-4.3
4	20565.00	37.2 AV	54.0	-16.8	1.20 V	149	41.5	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

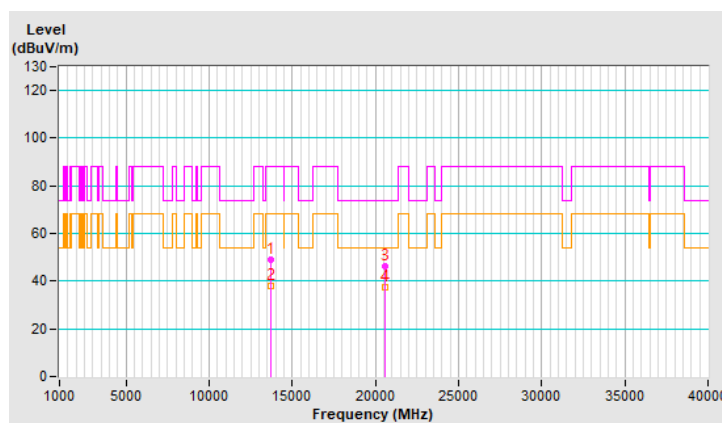


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	48.4 PK	88.2	-39.8	1.18 H	244	34.2	14.2
2	#13750.00	39.4 AV	68.2	-28.8	1.18 H	244	25.2	14.2
3	20625.00	46.0 PK	74.0	-28.0	1.43 H	165	50.4	-4.4
4	20625.00	36.2 AV	54.0	-17.8	1.43 H	165	40.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

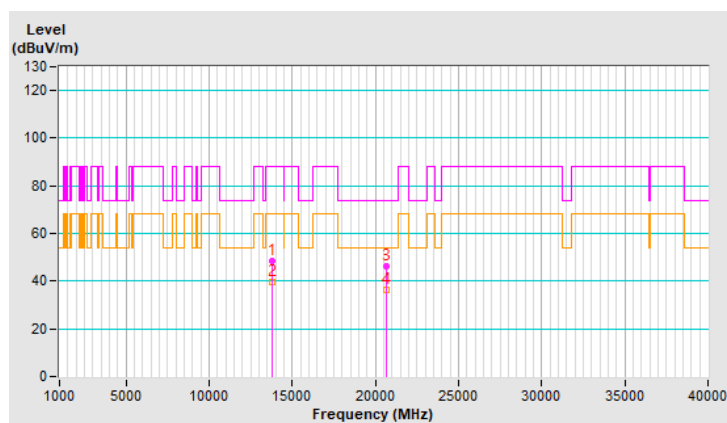


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	49.1 PK	88.2	-39.1	1.18 V	184	34.9	14.2
2	#13750.00	38.3 AV	68.2	-29.9	1.18 V	184	24.1	14.2
3	20625.00	46.6 PK	74.0	-27.4	1.15 V	148	51.0	-4.4
4	20625.00	37.6 AV	54.0	-16.4	1.15 V	148	42.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

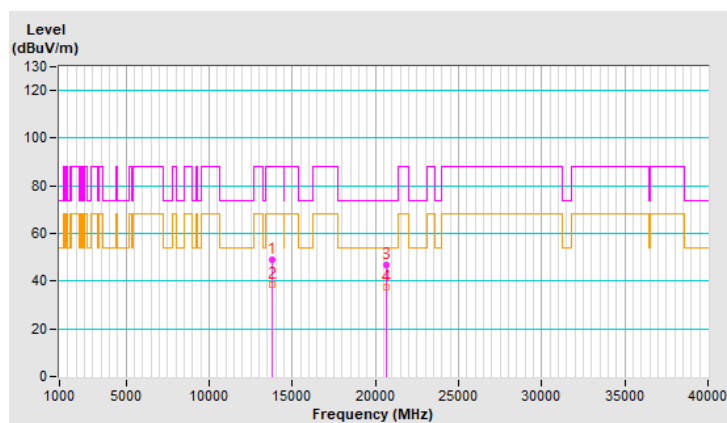


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.0 PK	88.2	-40.2	1.21 H	222	33.5	14.5
2	#13990.00	39.5 AV	68.2	-28.7	1.21 H	222	25.0	14.5
3	20985.00	46.4 PK	74.0	-27.6	1.44 H	155	50.7	-4.3
4	20985.00	36.5 AV	54.0	-17.5	1.44 H	155	40.8	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

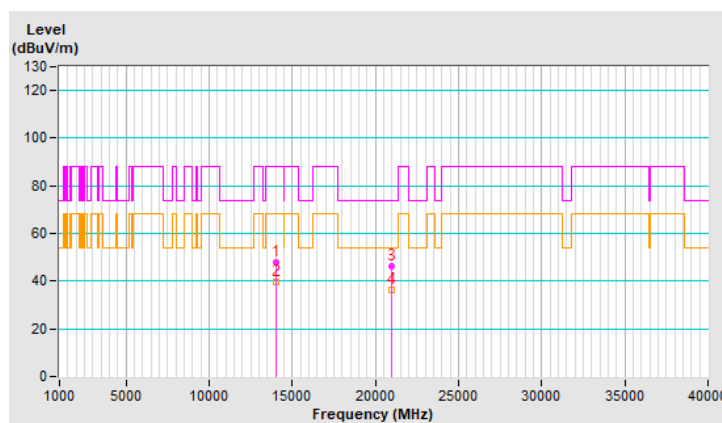


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	48.9 PK	88.2	-39.3	1.17 V	181	34.4	14.5
2	#13990.00	37.9 AV	68.2	-30.3	1.17 V	181	23.4	14.5
3	20985.00	46.7 PK	74.0	-27.3	1.15 V	145	51.0	-4.3
4	20985.00	37.8 AV	54.0	-16.2	1.15 V	145	42.1	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

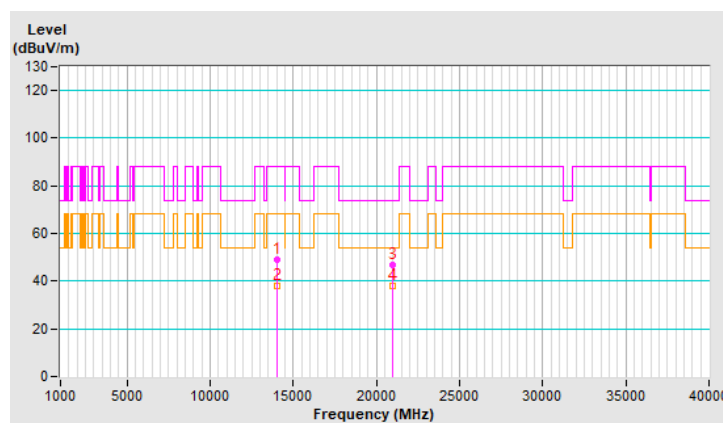


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.6 PK	88.2	-39.6	1.19 H	238	34.3	14.3
2	#14230.00	40.0 AV	68.2	-28.2	1.19 H	238	25.7	14.3
3	21345.00	45.7 PK	74.0	-28.3	1.34 H	157	48.9	-3.2
4	21345.00	35.8 AV	54.0	-18.2	1.34 H	157	39.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

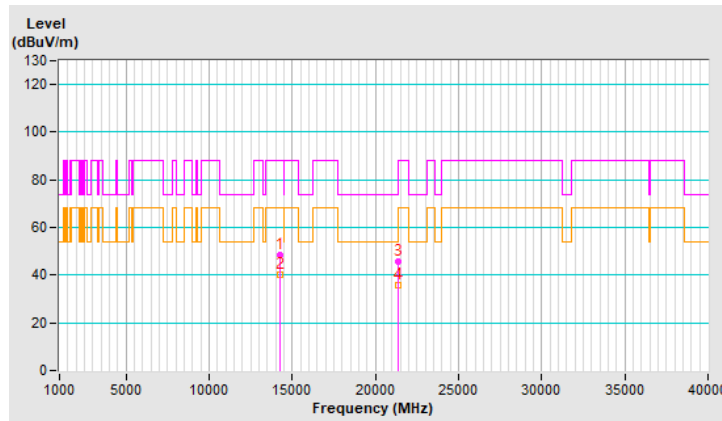


RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	48.8 PK	88.2	-39.4	1.11 V	209	34.5	14.3
2	#14230.00	38.2 AV	68.2	-30.0	1.11 V	209	23.9	14.3
3	21345.00	46.3 PK	74.0	-27.7	1.16 V	165	49.5	-3.2
4	21345.00	37.5 AV	54.0	-16.5	1.16 V	165	40.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

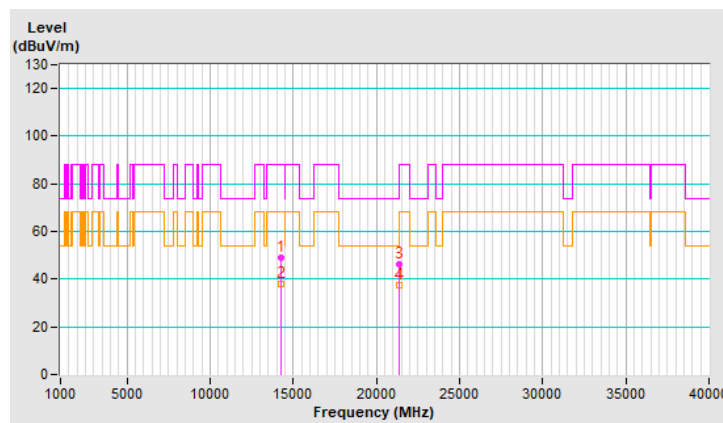


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.7 PK	74.0	-25.3	1.23 H	228	36.2	12.5
2	11920.00	40.0 AV	54.0	-14.0	1.23 H	228	27.5	12.5
3	17880.00	46.2 PK	74.0	-27.8	1.36 H	160	23.4	22.8
4	17880.00	36.1 AV	54.0	-17.9	1.36 H	160	13.3	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

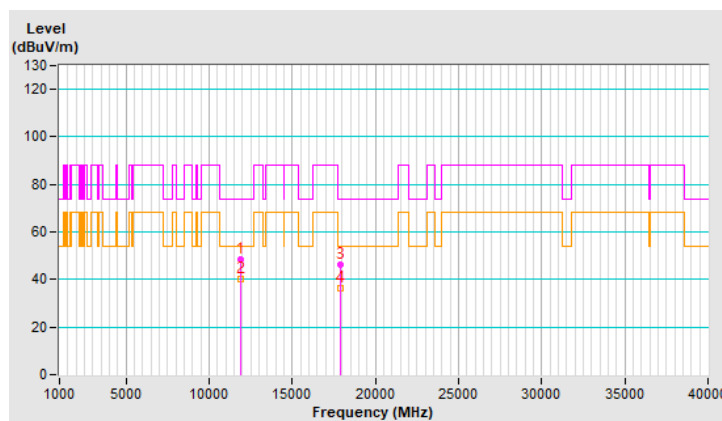


RF Mode	802.11be (EHT20)	Channel	CH 2 : 5935 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11920.00	48.9 PK	74.0	-25.1	1.14 V	195	36.4	12.5
2	11920.00	38.0 AV	54.0	-16.0	1.14 V	195	25.5	12.5
3	17880.00	46.7 PK	74.0	-27.3	1.20 V	145	23.9	22.8
4	17880.00	37.7 AV	54.0	-16.3	1.20 V	145	14.9	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

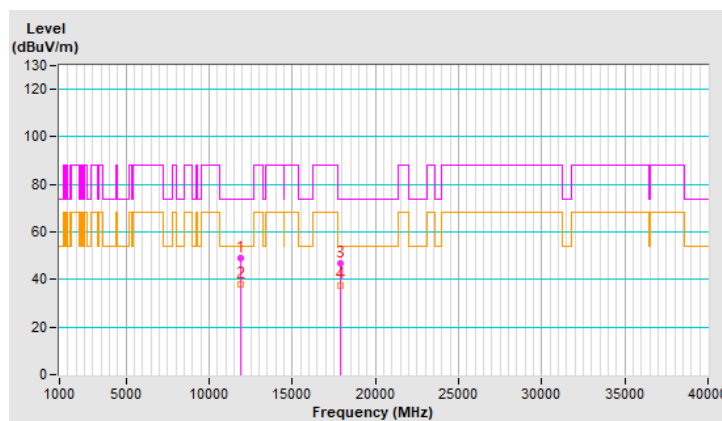


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.3 PK	74.0	-25.7	1.24 H	230	35.8	12.5
2	11910.00	39.3 AV	54.0	-14.7	1.24 H	230	26.8	12.5
3	17865.00	46.6 PK	74.0	-27.4	1.40 H	179	24.0	22.6
4	17865.00	36.5 AV	54.0	-17.5	1.40 H	179	13.9	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

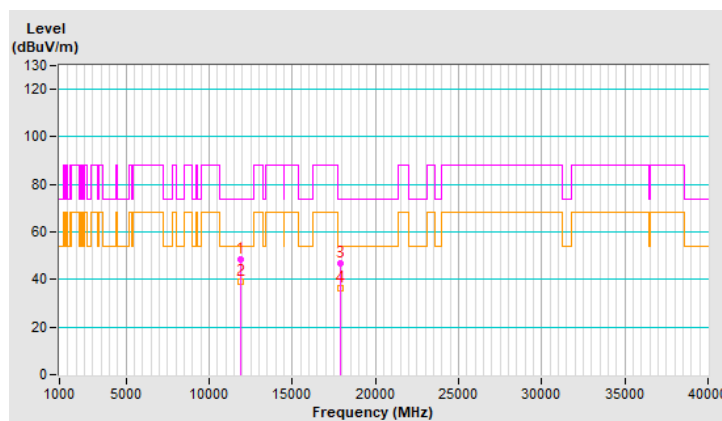


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	48.8 PK	74.0	-25.2	1.10 V	202	36.3	12.5
2	11910.00	37.7 AV	54.0	-16.3	1.10 V	202	25.2	12.5
3	17865.00	46.3 PK	74.0	-27.7	1.19 V	165	23.7	22.6
4	17865.00	37.2 AV	54.0	-16.8	1.19 V	165	14.6	22.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

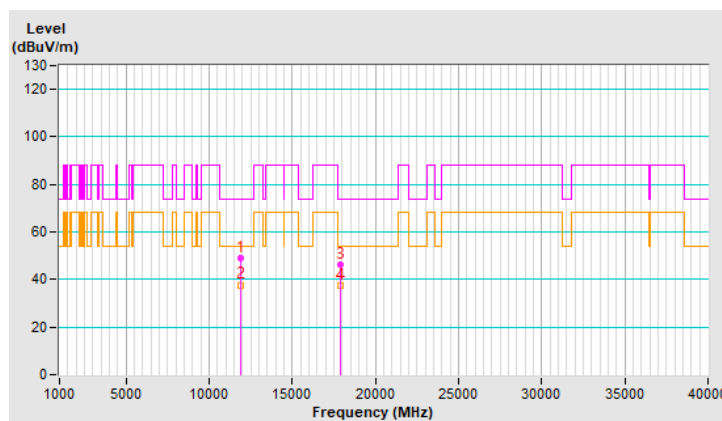


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.1 PK	74.0	-25.9	1.28 H	238	35.6	12.5
2	12350.00	39.6 AV	54.0	-14.4	1.28 H	238	27.1	12.5
3	18525.00	45.6 PK	74.0	-28.4	1.41 H	170	51.7	-6.1
4	18525.00	35.8 AV	54.0	-18.2	1.41 H	170	41.9	-6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

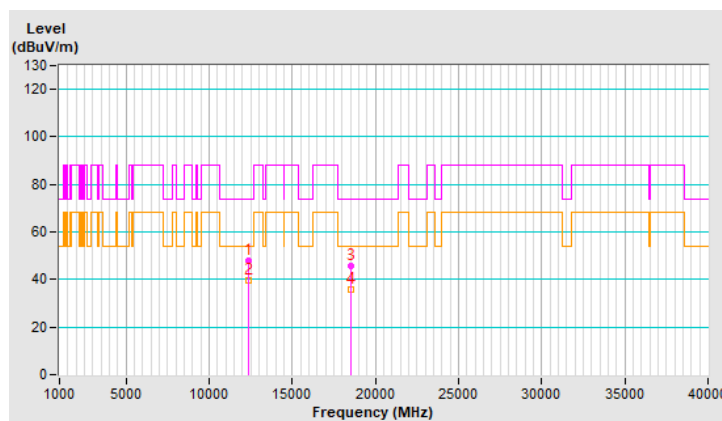


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	48.4 PK	74.0	-25.6	1.08 V	181	35.9	12.5
2	12350.00	37.5 AV	54.0	-16.5	1.08 V	181	25.0	12.5
3	18525.00	46.0 PK	74.0	-28.0	1.11 V	160	52.1	-6.1
4	18525.00	37.2 AV	54.0	-16.8	1.11 V	160	43.3	-6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

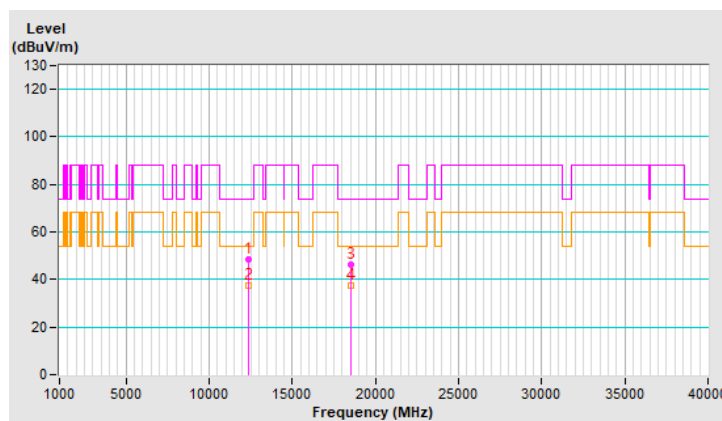


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.6 PK	88.2	-39.6	1.20 H	244	37.0	11.6
2	#12830.00	39.5 AV	68.2	-28.7	1.20 H	244	27.9	11.6
3	19245.00	45.9 PK	74.0	-28.1	1.42 H	175	51.4	-5.5
4	19245.00	35.8 AV	54.0	-18.2	1.42 H	175	41.3	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

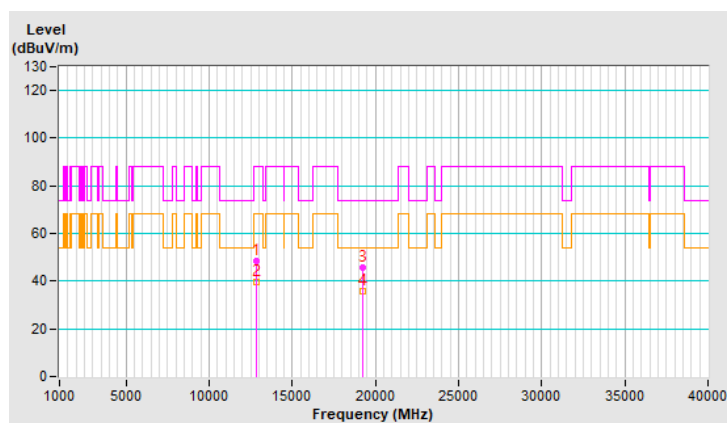


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	48.3 PK	88.2	-39.9	1.09 V	184	36.7	11.6
2	#12830.00	37.5 AV	68.2	-30.7	1.09 V	184	25.9	11.6
3	19245.00	46.7 PK	74.0	-27.3	1.16 V	159	52.2	-5.5
4	19245.00	37.7 AV	54.0	-16.3	1.16 V	159	43.2	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

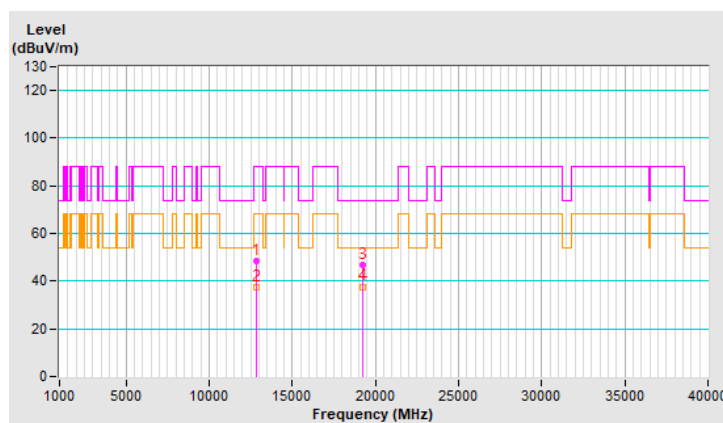


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	49.3 PK	88.2	-38.9	1.28 H	222	37.4	11.9
2	#12870.00	40.2 AV	68.2	-28.0	1.28 H	222	28.3	11.9
3	19305.00	46.1 PK	74.0	-27.9	1.39 H	166	51.6	-5.5
4	19305.00	36.2 AV	54.0	-17.8	1.39 H	166	41.7	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

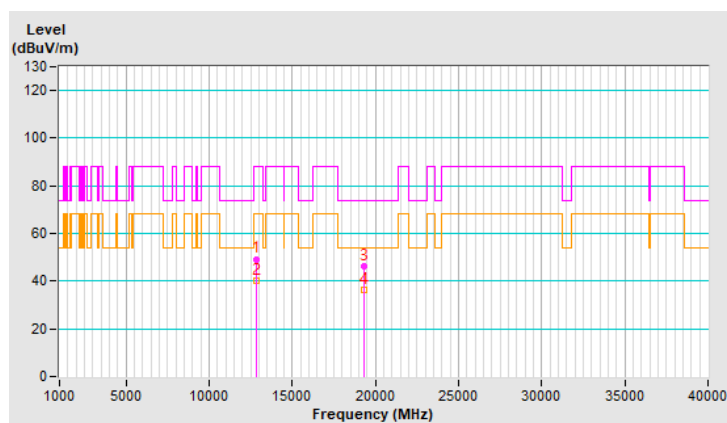


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	48.8 PK	88.2	-39.4	1.13 V	198	36.9	11.9
2	#12870.00	37.8 AV	68.2	-30.4	1.13 V	198	25.9	11.9
3	19305.00	46.1 PK	74.0	-27.9	1.16 V	157	51.6	-5.5
4	19305.00	36.9 AV	54.0	-17.1	1.16 V	157	42.4	-5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

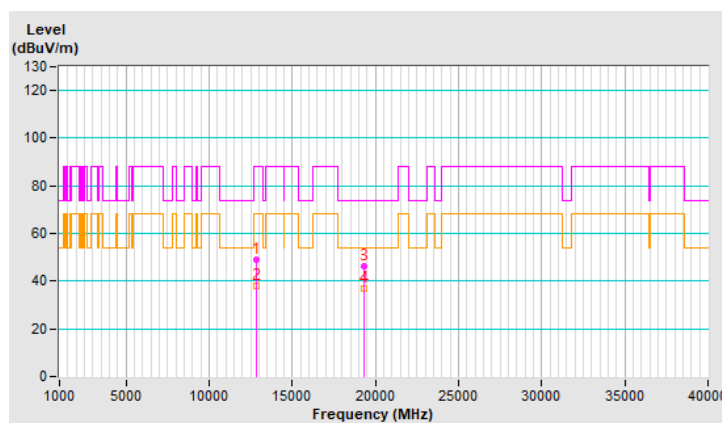


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	48.2 PK	88.2	-40.0	1.22 H	239	35.9	12.3
2	#12950.00	39.2 AV	68.2	-29.0	1.22 H	239	26.9	12.3
3	19425.00	46.2 PK	74.0	-27.8	1.33 H	175	51.9	-5.7
4	19425.00	36.5 AV	54.0	-17.5	1.33 H	175	42.2	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

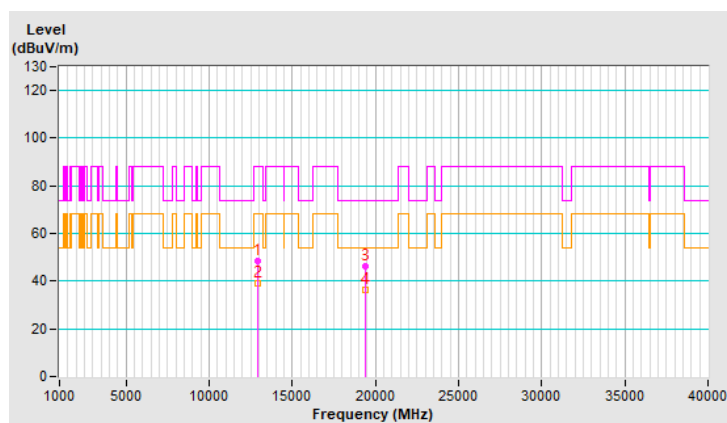


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	49.1 PK	88.2	-39.1	1.12 V	200	36.8	12.3
2	#12950.00	38.3 AV	68.2	-29.9	1.12 V	200	26.0	12.3
3	19425.00	46.1 PK	74.0	-27.9	1.16 V	166	51.8	-5.7
4	19425.00	37.3 AV	54.0	-16.7	1.16 V	166	43.0	-5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

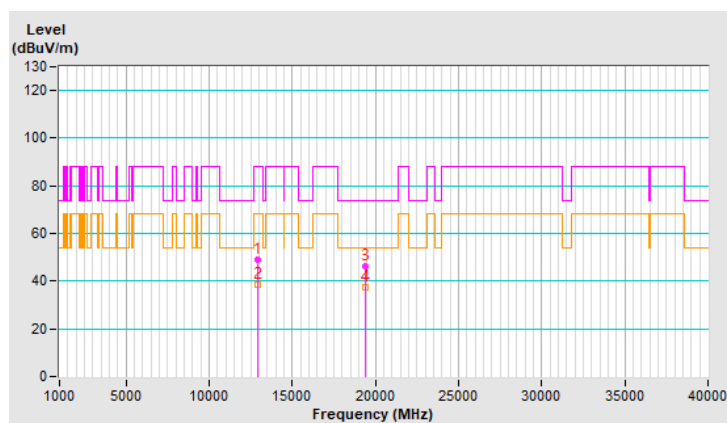


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	1.29 H	222	36.1	12.5
2	#13030.00	39.7 AV	68.2	-28.5	1.29 H	222	27.2	12.5
3	19545.00	45.9 PK	74.0	-28.1	1.43 H	157	51.8	-5.9
4	19545.00	35.7 AV	54.0	-18.3	1.43 H	157	41.6	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

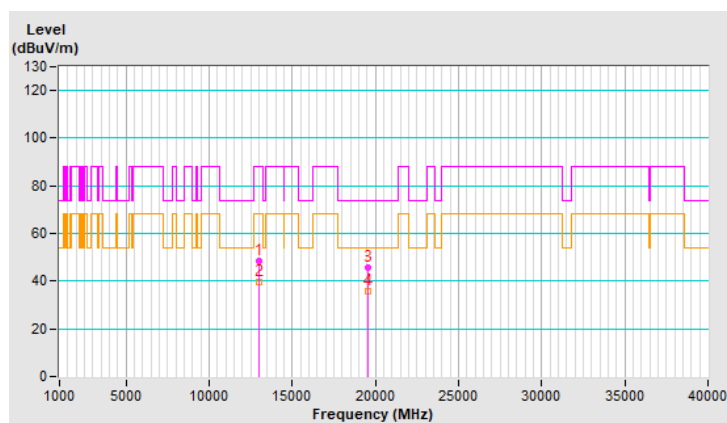


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	48.6 PK	88.2	-39.6	1.12 V	183	36.1	12.5
2	#13030.00	37.7 AV	68.2	-30.5	1.12 V	183	25.2	12.5
3	19545.00	46.3 PK	74.0	-27.7	1.13 V	169	52.2	-5.9
4	19545.00	37.1 AV	54.0	-16.9	1.13 V	169	43.0	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

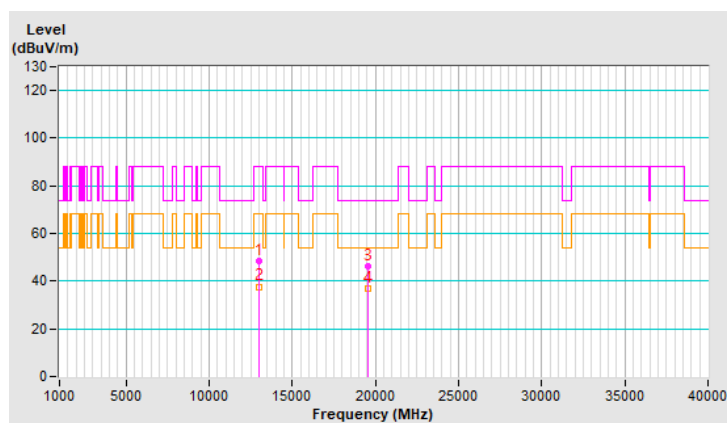

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 68% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	48.1 PK	88.2	-40.1	1.21 H	235	35.5	12.6
2	#13070.00	39.3 AV	68.2	-28.9	1.21 H	235	26.7	12.6
3	19605.00	45.6 PK	74.0	-28.4	1.34 H	172	51.5	-5.9
4	19605.00	35.9 AV	54.0	-18.1	1.34 H	172	41.8	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

