

FCC Test Report

Report No.: AGC10232240609FR01

FCC ID	:	2AEAN-0585
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Microphone System
BRAND NAME	:	RØDE
MODEL NAME	:	Wireless GO 3 Transmitter
APPLICANT	:	Rode Microphones
DATE OF ISSUE	:	Jul. 09, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jul. 09, 2024	Valid	Initial Release	



Table of Contents

1. General Information	5
2. Product Information	
2.1 Product Technical Description	
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	13
5. Description of Test Modes	
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	16
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	
10.1 Provisions Applicable	34



Report No.: AGC10232240609FR01 Page 4 of 70

10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	67
12.4 Final Procedure of Line Conducted Emission Test	67
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	70
Appendix II: Photographs of Test EUT	70



1. General Information

Applicant	Rode Microphones
Address	107 Carnarvon Street, Silverwater 2128, Australia
Manufacturer	Rode Microphones
Address	107 Carnarvon Street, Silverwater 2128, Australia
Factory	Rode Microphones
Address	107 Carnarvon Street, Silverwater 2128, Australia
Product Designation	Wireless Microphone System
Brand Name	RØDE
Test Model	Wireless GO 3 Transmitter
Series Model	N/A
Declaration of Difference	N/A
Date of receipt of test item	Jun. 05, 2024
Date of Test	Jun. 05, 2024 – Jul. 08, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jouk Gai

Jack Gui (Project Engineer)

Jul. 09, 2024

Reviewed By

Talvin Lin

Calvin Liu (Reviewer)

Jul. 09, 2024

Approved By

Max Iran

Max Zhang (Authorized Officer)

Jul. 09, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Modulation Type	GFSK
Number of channels	40
Maximum Transmitter Power	Antenna 1: 1.394dBm Antenna 2: 2.173dBm
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Antenna 1: PCB Antenna Antenna 2: FPC Antenna
Antenna Gain	Antenna 1: -1.32dBi Antenna 2: -2.16dBi
Power Supply	DC 3.8V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AEAN-0585**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is Antenna 1: -1.32dBi Antenna 2: -2.16dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.8V by battery or DC 5V by adapter

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2024-03-05	2026-03-04	
\square	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2024-05-23	2025-05-22	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2024-05-23	2025-05-22	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
\square	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



• Tes	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A		
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0		
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

\boxtimes	Test Accessories Come From	The Laboratory
-------------	----------------------------	----------------

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box		USB-TTL		
2	Adapter	HUAWEI	HW-200440C00		

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass




5. Description of Test Modes

	Summary Table of Test Cases			
Test Item	Data Rate / Modulation			
iest item	2.4G(Ant1 / Ant2) / GFSK			
	Mode 1: 2.4G Tx CH00_2402 MHz_Ant1 (Battery powered or AC/DC adapter)			
	Mode 2: 2.4G Tx CH19_2440 MHz_Ant1 (Battery powered or AC/DC adapter)			
Radiated & Conducted	Mode 3: 2.4G Tx CH39_2480 MHz_Ant1 (Battery powered or AC/DC adapter)			
Test Cases	Mode 4: 2.4G Tx CH00_2402 MHz_Ant2 (Battery powered or AC/DC adapter)			
	Mode 5: 2.4G Tx CH19_2440 MHz_Ant2 (Battery powered or AC/DC adapter)			
	Mode 6: 2.4G Tx CH39_2480 MHz_Ant2 (Battery powered or AC/DC adapter)			
AC Conducted Emission	Mode 1: 2.4G Link + Battery + USB Cable (Charging from AC Adapter)			
Note:				

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

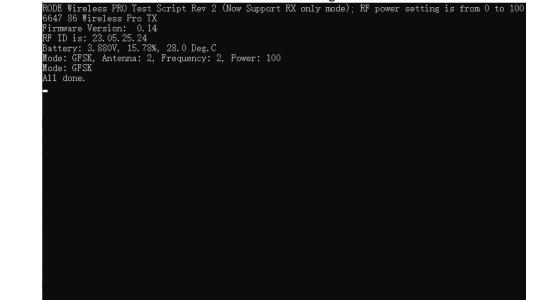



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
2.4G_Ant1	873.2	85.42	0.68	1.15
2.4G_Ant2	873.2	85.42	0.68	1.15

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

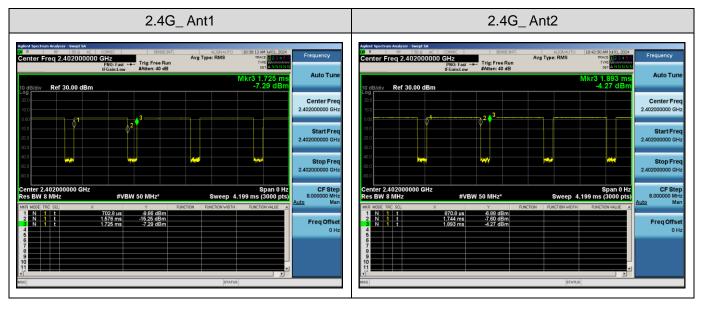

^{1.} Duty Cycle factor = $10 * \log (1/ \text{Duty cycle})$



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW \geq [3 × RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

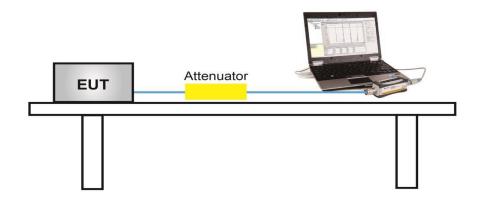




\boxtimes For peak power test setup

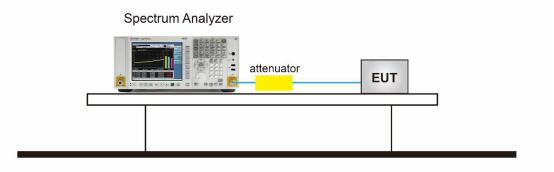


7.4 Measurement Result

Test Data of Conducted Output Power -Ant1						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	1.394	≪30	Pass		
GFSK	2440	1.140	≪30	Pass		
	2480	1.125	≪30	Pass		

Test Data of Conducted Output Power -Ant2						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	2.173	≪30	Pass		
GFSK	2440	0.578	≪30	Pass		
	2480	-0.606	≪30	Pass		






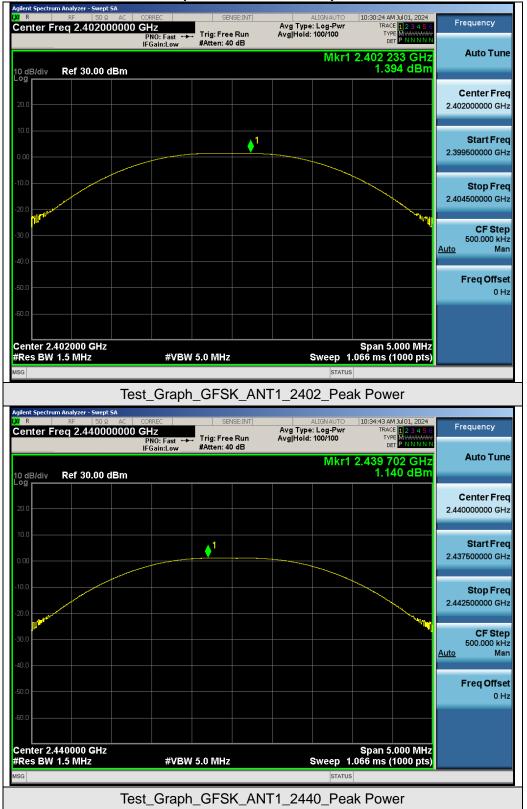


Test Graphs of Conducted Output Power



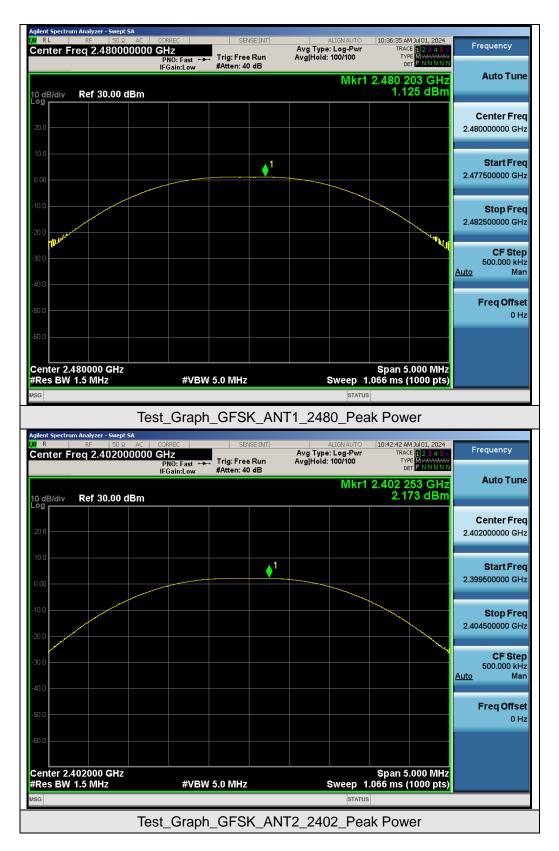



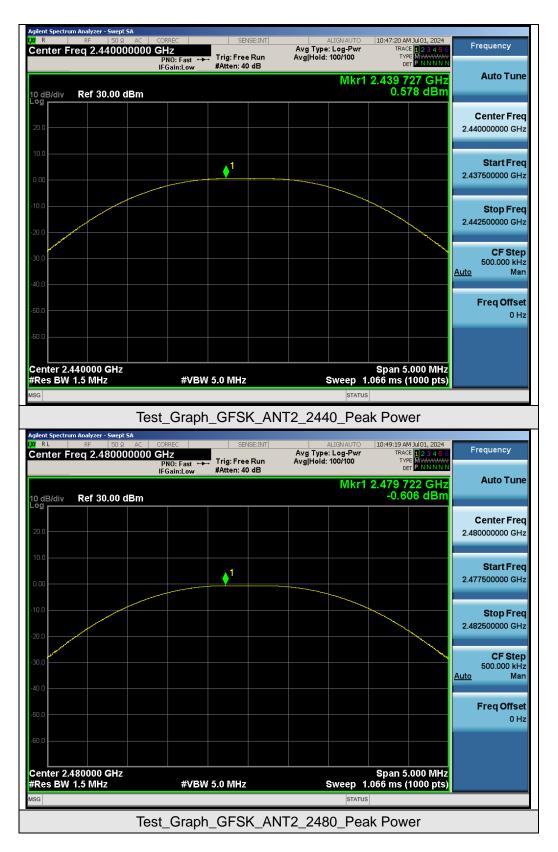



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

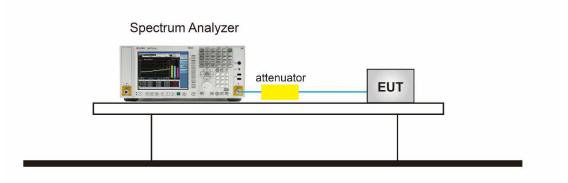




8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth - Ant1						
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail	
GFSK	2402	1.052	0.708	≥0.5	Pass	
	2440	1.056	0.710	≥0.5	Pass	
	2480	1.049	0.706	≥0.5	Pass	

Test Data of Occupied Bandwidth and DTS Bandwidth - Ant2						
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail	
GFSK	2402	1.044	0.702	≥0.5	Pass	
	2440	1.051	0.710	≥0.5	Pass	
	2480	1.052	0.706	≥0.5	Pass	

Test Graphs of Occupied Bandwidth

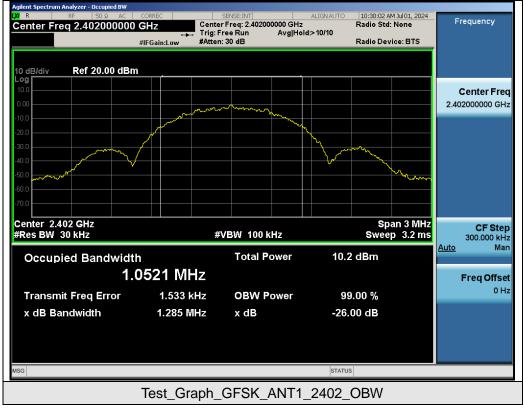














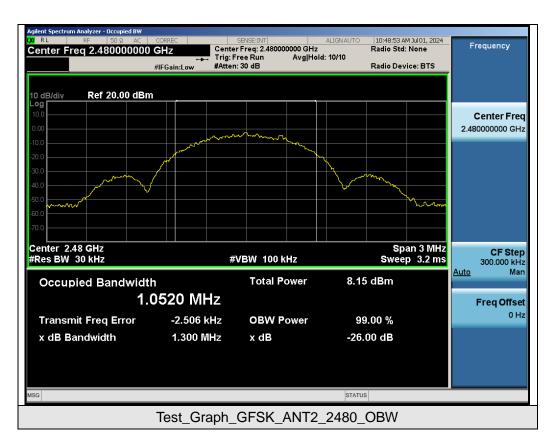


Test Graphs of DTS Bandwidth

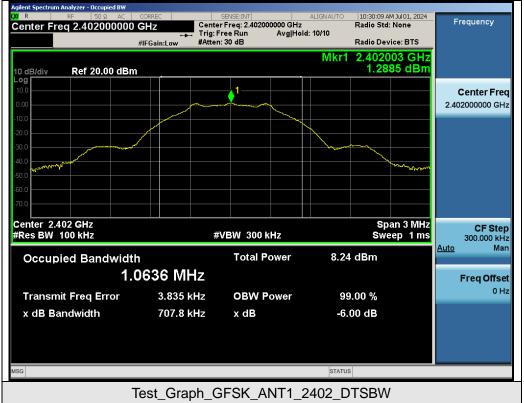




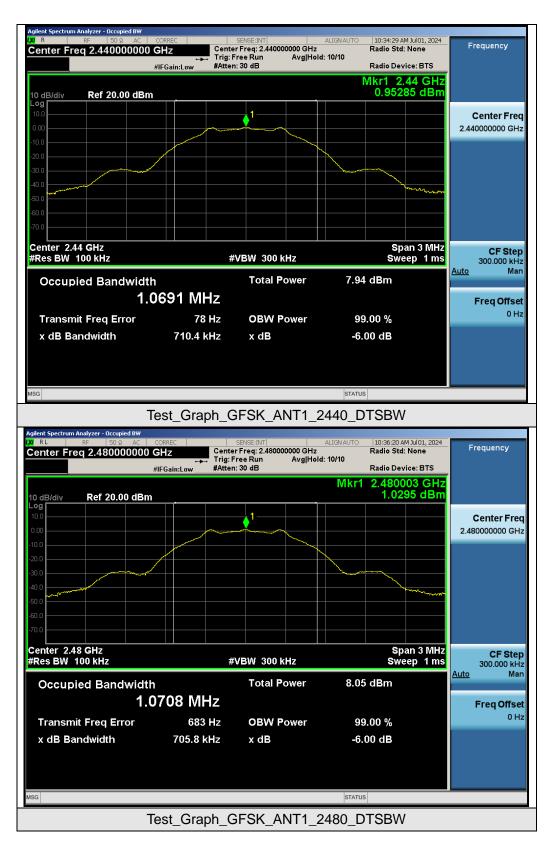



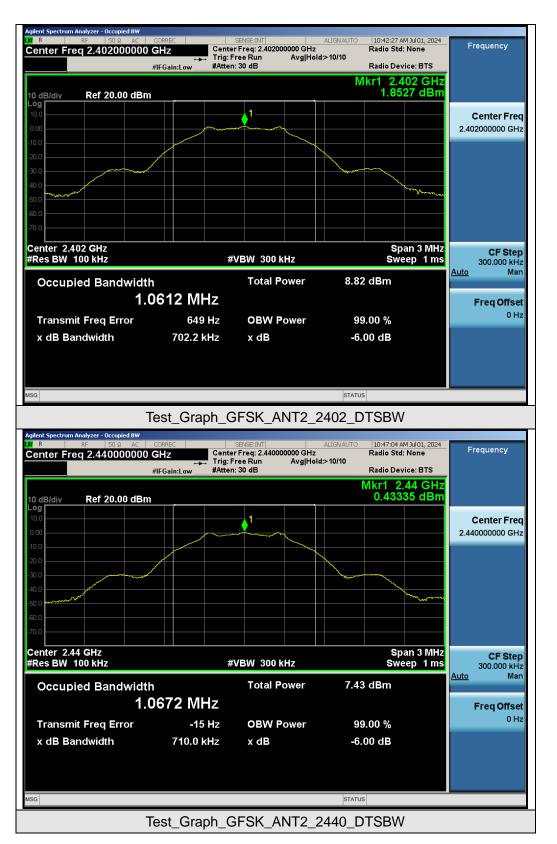



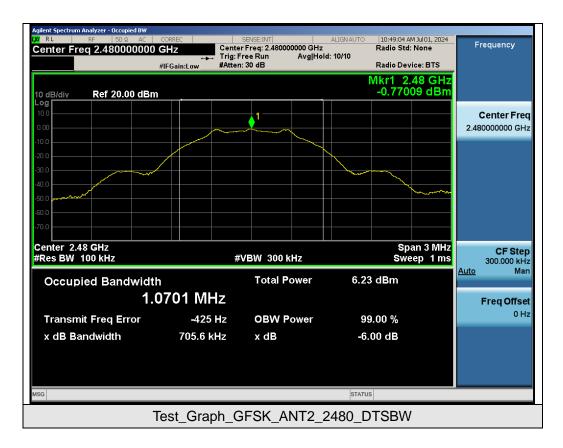



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

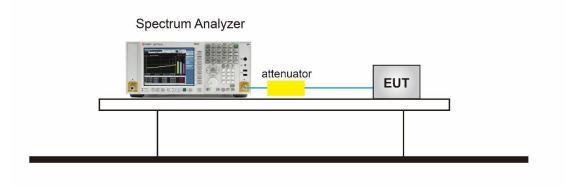



9.4 Measurement Results


Test Data of Conducted Output Power Spectral Density - Ant1					
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-11.107	≪8	Pass	
GFSK	2440	-11.411	≪8	Pass	
	2480	-11.405	≪8	Pass	

Test Data of Conducted Output Power Spectral Density - Ant2					
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-10.051	≪8	Pass	
GFSK	2440	-11.836	≪8	Pass	
	2480	-13.640	≪8	Pass	


Test Graphs of Conducted Output Power Spectral Density

Agilent Spectrum Analyzer - Swept SA IXI R RF 50 Ω AC C Center Freq 2.402000000			ALIGN AUTO	10:30:39 AM Jul 01, 2024 TRACE 12 3 4 5 6	Frequency
10 dB/div Ref 20.00 dBm	PNO: Wide Trig: Fre IFGain:Low #Atten: 3		ioid: 63/100 Mkr1 2.	402 028 2 GHz -11.107 dBm	Auto Tuno
Log					Center Freq 2.402000000 GHz
-10.0		▲ ▲ 1			Start Freq 2.401469000 GHz
-10.0 -20.0 -30.0	hand have a start of the start	^W Work Ind ^{dent} ofenten Acher Hann	Manghilleringhille	t-wayna a magna that the	Stop Freq 2.402531000 GHz
-40.0					CF Step 106.200 kHz <u>Auto</u> Man
-60.0					Freq Offset 0 Hz
-70.0					
Center 2.4020000 GHz #Res BW 3.0 kHz	#VBW 10 kHz		Sweep 1	Span 1.062 MHz I2.0 ms (1000 pts)	
Test_Graph_GFSK_ANT1_2402_PSD					



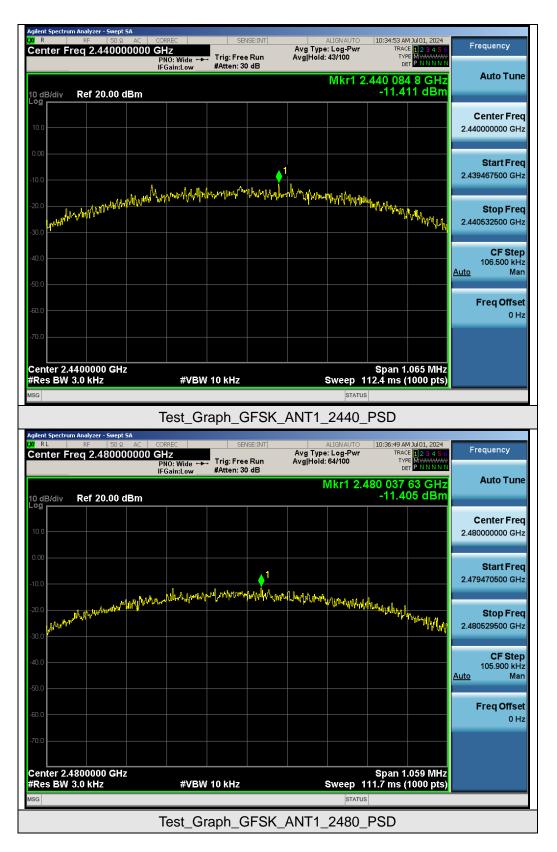



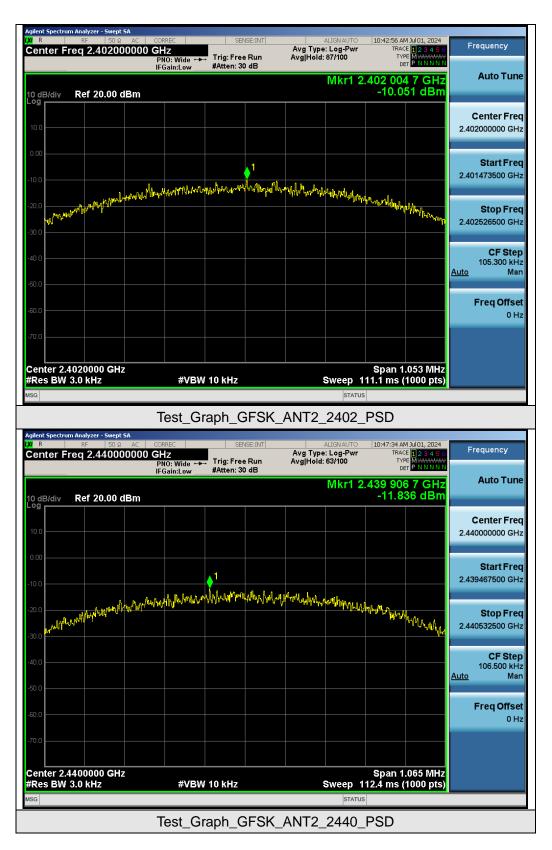



Agilent Spectrum Analyzer - Swept 5A			ALIGN AUTO ype: Log-Pwr old: 64/100	10:49:34 AM Jul 01, 2024 TRACE 1 2 3 4 5 6 TYPE M	Frequency
10 dB/div Ref 20.00 dBm	IFGain:Low #Atten: 30			DET P N N N N 180 004 77 GHz -13.640 dBm	Auto Tune
10.0					Center Freq 2.480000000 GHz
-10.0		1			Start Freq 2.479470500 GHz
-10.0 -20.0 -30.0	all fill and an and a second and	ม แบบแห่งงารณ์ให้(หรือไม่ได้ (A) ได้แห่งได้ได้ 	waland and when the starting of the	htalightan an a	Stop Freq 2.480529500 GHz
-40.0					CF Step 105.900 kHz <u>Auto</u> Man
-60.0					Freq Offset 0 Hz
-70.0 Center 2.4800000 GHz #Res BW 3.0 KHz	#VBW 10 kHz		Sweep_1	Span 1.059 MHz 11.7 ms (1000 pts)	
MSG	Test_Graph_G		STATUS		



10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure


- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

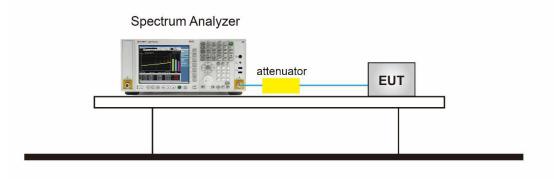




10.4 Measurement Results

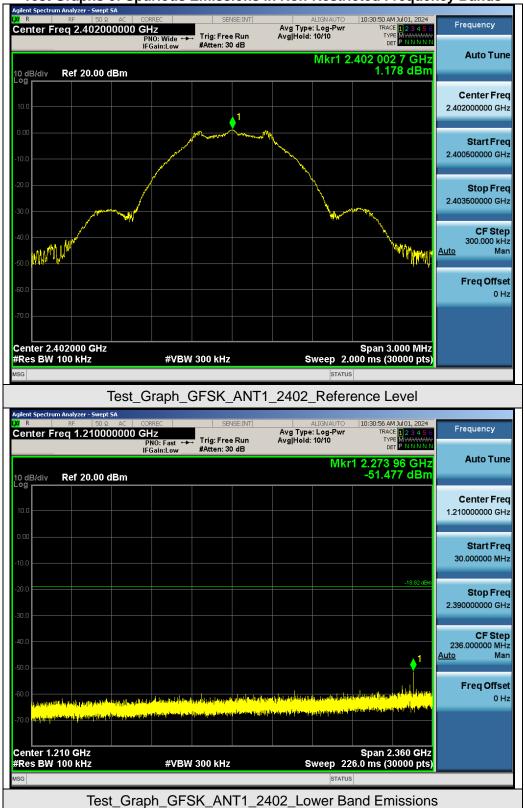


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



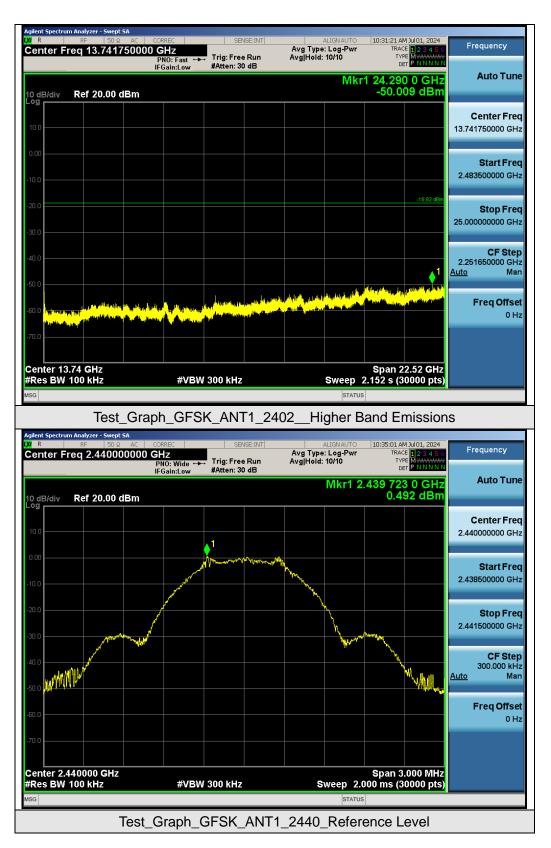




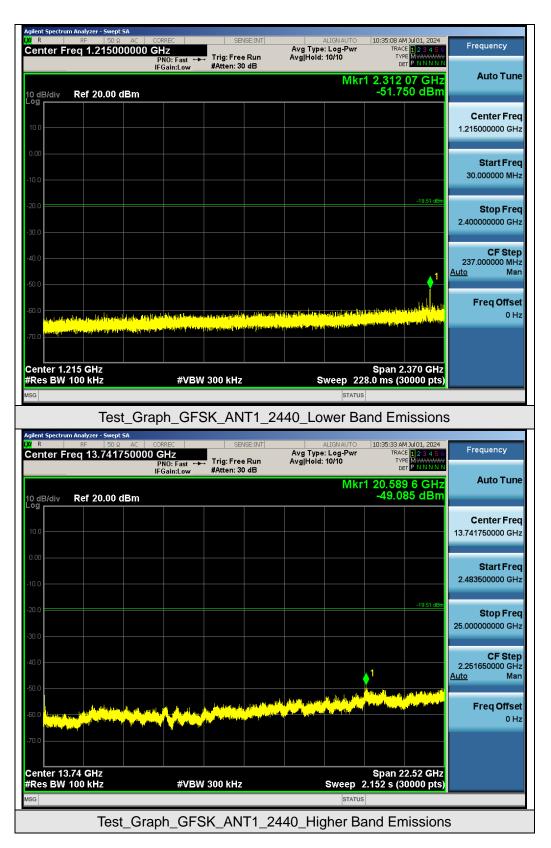








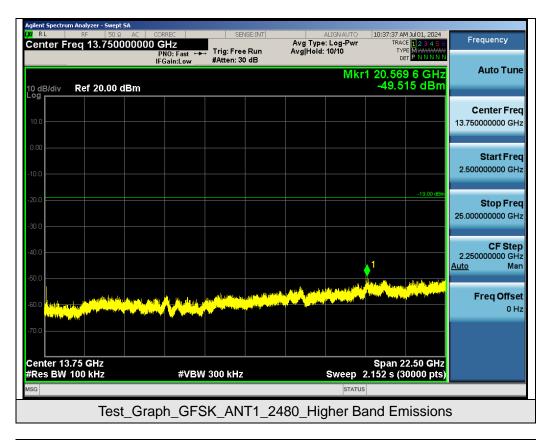






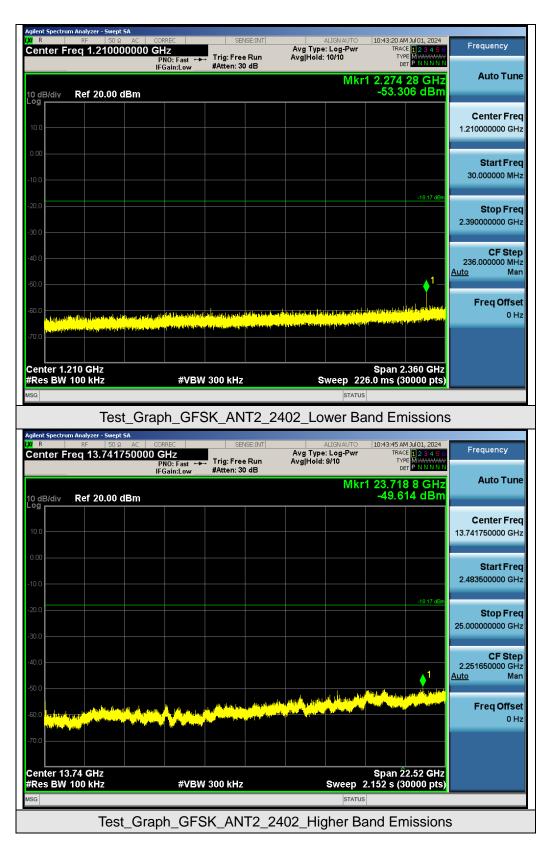









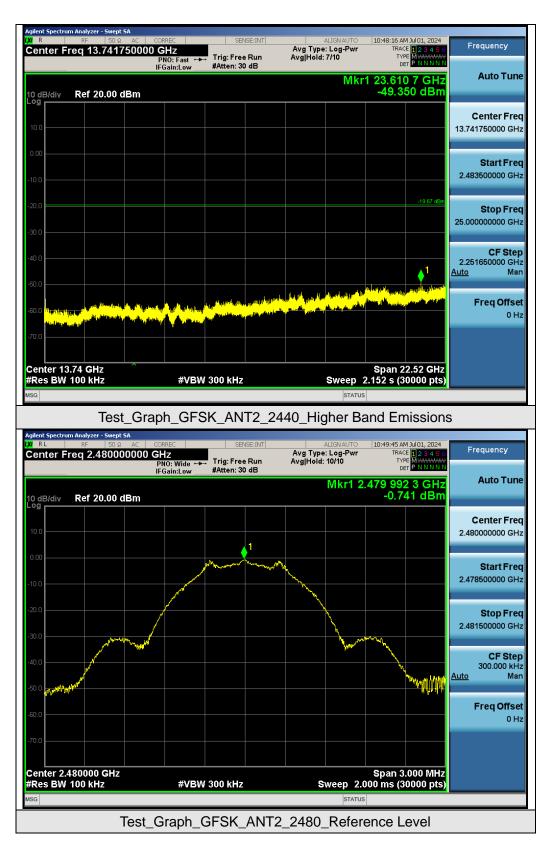



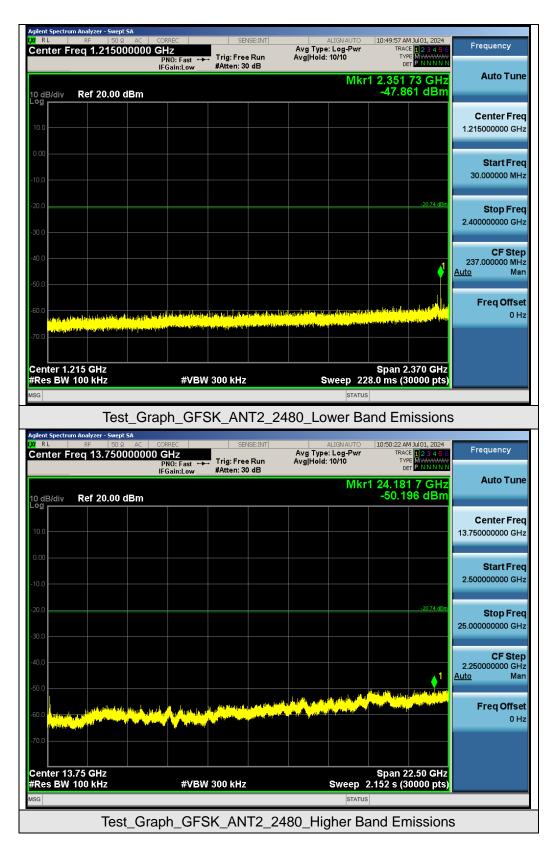




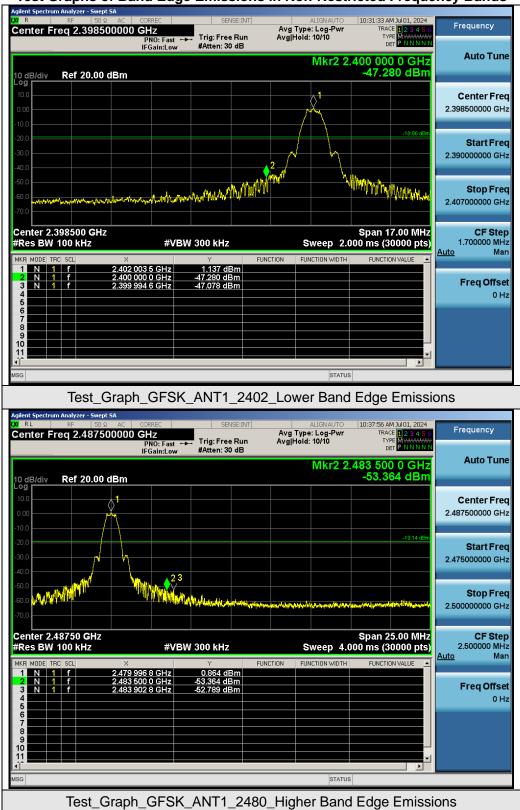

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



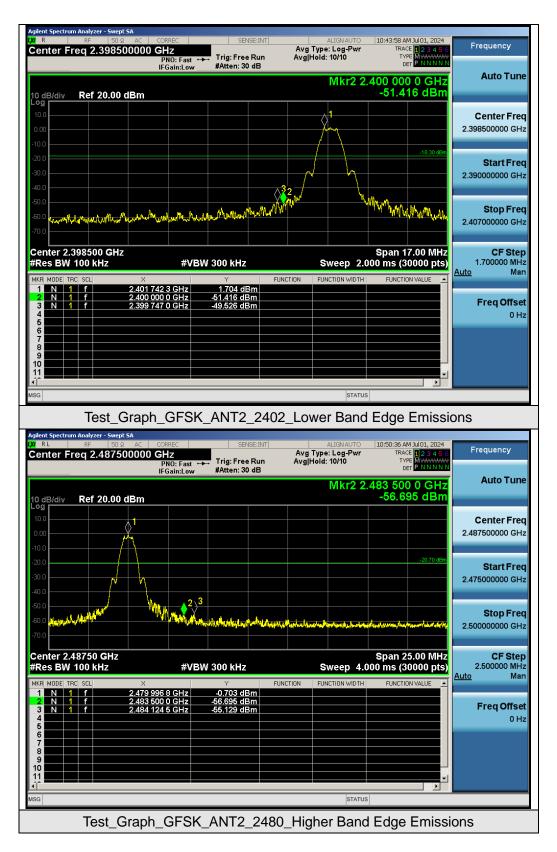



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW \geq [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)

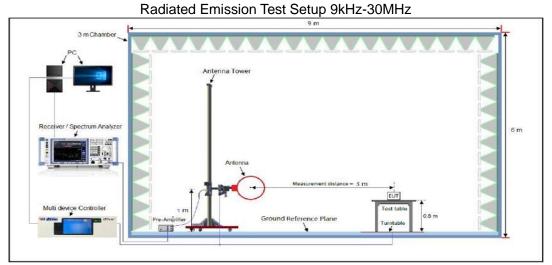

Radiated Emission Test Setup 30MHz-1000MHz

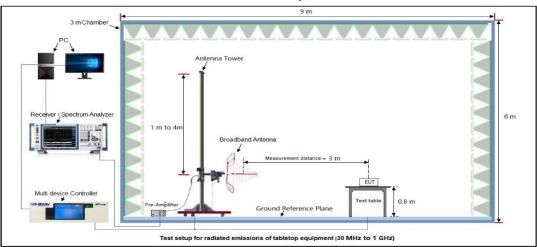

Radiated Emission Test Setup Above 1000MHz

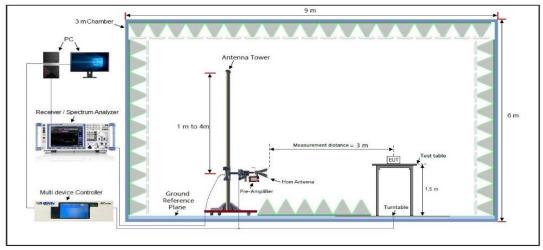

11.4 Measurement Result

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

		Radia	ted Emissi	ion Test Resu	ults at 30MHz	-1GHz		
EUT Nar	me Wire	eless Micropho	ne System		Model Na	me	Wireless G Transmitte	
Tempera	ature 22.8	3 ℃			Relative H	lumidity	58.8%	
Pressur	e 960	hPa			Test Volta	ige	Normal Vo	Itage
Test Mo	de Moo	de 4			Antenna I	Polarity	Horizontal	
	72.0 dBuV/m						imit: —	
	32 -8 30.000 4		2 	(MHz)	anna Walan Japin Manahara an An 300	4 5	2700 1000.00	a
Final Da	ta List_Peal			(100 000 000	100 1000.00	
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.2017	20.32	13.68	40.00	19.68	100	186	Horizontal
2	121.1231	22.96	16.33	43.50	20.54	100	124	Horizontal
3	198.5880	21.65	14.34	43.50	21.85	100	93	Horizontal
-						1		
	443.2943	31.94	24.98	46.00	14.06	100	220	Horizontal
4	443.2943 545.1826	31.94 33.34	24.98 23.98	46.00 46.00	14.06 12.66	100 100	220 180	



			Radia	ted Emiss	ion Test Res	ults at 30MHz	-1GHz			
EUT N	lame	Wire	less Micropho	ne System		Model Na	me	Wireless GO 3 Transmitter		
Tempe	erature	22.8	°C			Relative I	Relative Humidity 58.8%			
Press	ure	960h	960hPa			Test Volta	age	Normal Vo	oltage	
Test M	lode	Mod	e 4			Antenna	Polarity	Vertical		
	72.0	dBu∀/m								
	-8 30.000				(MHz)	300	Mar	imit:	10	
Final I	Data List	_Peal	k							
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	44.900)6	23.64	16.95	40.00	16.36	100	186	Vertical	
2	136.93	91	24.87	18.12	43.50	18.63	100	124	Vertical	
3	324.45	61	27.02	20.14	46.00	18.98	100	93	Vertical	
4	459.114	44	32.01	25.24	46.00	13.99	100	220	Vertical	
5	724.26	11	36.02	28.40	46.00	9.98	100	180	Vertical	
6	942.13	05	37.22	30.91	46.00	8.78	100	130	Vertical	

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been pre-tested. Ant2 The mode 4 are the worst case and recorded in the report.



	JT Name Wireless Microphone System				Model Name Wireless GO 3 Transmitter			
emperatur	re	22.8 ℃			Relat	ive Humidity	58.8%	
Pressure		960hPa			Test V	Voltage	Normal	Voltage
est Mode		Mode 1			Anter	nna Polarity	Horizont	al
								1
Frequer		Meter Reading	Factor	Emissio		Limits	Margin	Value Type
(MHz)	<u> </u>	(dBµV)	(dB)	(dBµ∖	,	(dBµV/m)	(dB)	
4804.0		45.32	0.08	45.		74	-28.6	peak
4804.0				54	-16.46	AVG		
7206.0		41.62	2.21	43.8		74	-30.17	peak
7206.0	00	32.66	2.21	2.21 34.8		54	-19.13	AVG
Remark: Factor = /	Antenn	a Factor + Cable	e Loss – Pre-	amplifier.				
UT Name		Wireless Mid	crophone Sys	stem	Mode	el Name	Wireless Transmit	
UT Name emperatur	re	Wireless Mic 22.8℃	crophone Sys	stem		I Name ive Humidity		
	re		crophone Sys	stem	Relat		Transmit	tter
emperatur	re	22.8°C	crophone Sys	stem	Relat	ive Humidity	Transmit 58.8%	tter
emperatur Pressure		22.8℃ 960hPa	crophone Sys	stem	Relat Test V Anter	ive Humidity Voltage	Transmit 58.8% Normal	voltage
emperatur Pressure est Mode	ncy	22.8℃ 960hPa Mode 1			Relat Test V Anter	ive Humidity Voltage nna Polarity	Transmit 58.8% Normal Vertical	tter
emperatur Pressure est Mode	ncy)	22.8°C 960hPa Mode 1 Meter Reading	Factor	Emissio	Relat Test V Anter n Level //m)	ive Humidity Voltage nna Polarity Limits	Transmit 58.8% Normal Vertical Margin	voltage
Temperatur Pressure Test Mode Frequer (MHz	ncy) 00	22.8°C 960hPa Mode 1 Meter Reading (dBµV)	Factor (dB)	Emission (dBµ\	Relat Test V Anter n Level //m) 4	ive Humidity Voltage nna Polarity Limits (dBµV/m)	Transmit 58.8% Normal Vertical Margin (dB)	Voltage Value Type
remperatur Pressure rest Mode Frequer (MHz 4804.0	ncy ;) 00	22.8°C 960hPa Mode 1 Meter Reading (dBμV) 46.32	Factor (dB) 0.08	Emission (dBµ\ 46.	Relat Test V Anter n Level //m) 4 59	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74	Transmit 58.8% Normal Vertical Margin (dB) -27.6	Voltage Voltage Value Type peak
remperatur Pressure rest Mode Frequer (MHz) 4804.0 4804.0	ncy) 00 00 00	22.8°C 960hPa Mode 1 Meter Reading (dBµV) 46.32 37.61	Factor (dB) 0.08 0.08	Emission (dBµ\ 46. 37.6	Relat Test V Anter n Level //m) 4 39 38	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74 54	Transmit 58.8% Normal Vertical Margin (dB) -27.6 -16.31	Voltage Value Type peak AVG

Radiated Emissions Test Results for Above 1GHz - Ant1

RESULT: Pass



EUT Name		Wireless M	licrophone Sy	stem	Mode	el Name	Wireless (Transmitte	
Temperature		22.8 ℃			Relative Humidity		58.8%	
Pressure		960hPa			Test V	Voltage	Normal Vo	oltage
Test Mode		Mode 2			Anter	nna Polarity	Horizonta	
Frequency	Mete	er Reading	Factor	Emissio	n Level	Limits	Margin	- Value Type
(MHz)		(dBµV)			//m)	(dBµV/m)	(dB)	value Type
4882.000		45.74	0.14	45.8	38	74	-28.12	peak
4882.000		38.25	0.14	38.3	39	54	-15.61	AVG
7323.000		41.56	2.36	43.9	92	74	-30.08	peak
7323.000		34.68	2.36	37.0	04	54	-16.96	AVG
Factor = Anter	ina Fa		e Loss – Pre-a licrophone Sy		Mode	I Name	Wireless 0	
Temperature		22.8 ℃			Relat	ive Humidity	58.8%	31
Pressure		960hPa			Test V	Voltage	Normal Vo	oltage
Test Mode		Mode 2			Anter	nna Polarity	Vertical	
Fraguesey	Mete	er Reading	Factor	Emissio	n Level	Limits	Margin	
Frequency		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	Value Type
(MHz)				, , , , , ,				
		45.66	0.14	45.	8	74	-28.2	peak
(MHz)			0.14	45. 38.0	-	74 54	-28.2 -15.91	peak AVG
(MHz) 4882.000		45.66	-	-)9		-	· ·
(MHz) 4882.000 4882.000		45.66 37.95	0.14	38.0)9 5	54	-15.91	AVG

Radiated Emissions Test Results for Above 1GHz- Ant1

RESULT: Pass



Radiated Emissions	Test Results for	r Above 1GHz- Ant1

EUT Name	EUT Name Wireless Microphone System				Model Name Wireless GO 3 Tra			O 3 Transmitter	
Temperature		22.8 ℃			Relativ	Relative Humidity 58.8%			
Pressure		960hPa		Test Voltage Normal Voltage				tage	
Test Mode		Mode 3			Anten	na Polarity	Horizontal		
Frequency	Me	ter Reading	Factor	Factor Emissio		Limits	Margin		
(MHz)		(dBµV)	(dB)	(dBµ	ıV/m)	(dBµV/m)	(dB)	Value Type	
4960.000		46.75	0.22	46	.97	74	-27.03	peak	
4960.000		38.56	0.22	38	.78	54	-15.22	AVG	
7440.000		41.32	2.64	43	.96	74	-30.04	peak	
7440.000		32.83	2.64	35	.47	54	-18.53	AVG	
Remark: Factor = Anter	na F	actor + Cabl	e Loss – Pre-a	amplifier.					
EUT Name		Wireless M	icrophone Sys	stem	Model	Name	Wireless G	O 3 Transmitter	
Temperature		22.8 ℃			Relative Humidity		58.8%		
Pressure		960hPa			Test Voltage Normal Voltage			tage	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	46.22	0.22	46.44	74	-27.56	peak
4960.000	38.51	0.22	38.73	54	-15.27	AVG
7440.000	40.89	2.64	43.53	74	-30.47	peak
7440.000	31.93	2.64	34.57	54	-19.43	AVG
emark:						

Antenna Polarity

Vertical

RESULT: Pass

Test Mode

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Mode 3



Radiated Emissions	Test Results for	Above 1GHz- Ant2
	Test Results for	

El	EUT Name Wireless Microphone System				Mode	el Name		Wireless GO 3 Transmitter		
Те	emperature	22.8 ℃			Relat	ive Humidity	58.8%			
Pr	essure	960hPa			Test	Voltage	Normal \	/oltage		
Те	est Mode	Mode 4			Anter	nna Polarity	Horizont	al		
								<u> </u>		
	Frequency	Meter Reading	Factor	Emissio		Limits	Margin	Value Type		
	(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	(dB)	value Type		
	4804.000	46.69	0.08	46.7		74	-27.23	peak		
	4804.000 37.46 0.08 37.54			54	-16.46	AVG				
	7206.000 41.34 2.21 43.55			74	-30.45	peak				
ı	7206.000	32.42	2.21	34.6	63	54	-19.37	AVG		
El	Remark: Factor = Anten JT Name	na Factor + Cabl	e Loss – Pre-a		Mode	el Name	Wireless			
Те	mperature	22.8 ℃			Relat	ive Humidity	58.8%			
Pr	essure	960hPa			Test	Voltage	Normal \	/oltage		
Те	est Mode	Mode 4			Antenna Polarity		Vertical			
										
	Frequency	Meter Reading	Factor	Emissio	n Level	Limits	Margin	Value Type		
	(MHz)	(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)	(dB)			
	4804.000	46.43	0.08	46.5	51	74	-27.49	peak		
	4804.000	37.41	0.08	37.4	49	54	-16.51	AVG		
	7206.000	44.27	2.21	46.4	18	74	-27.52	peak		
	7206.000	32.49	2.21	34.	.7	54	-19.3	AVG		
	Remark:									
		na Fastar I Cabl	e Loss – Pre-a	amplifiar						

RESULT: Pass



Topologie Model Model Model Avg Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Model Name Wireless GO 3 Transmitter EUT Name Wireless Microphone System Model Name Wireless GO 3 Transmitter Temperature 22.8 °C Relative Humidity 58.8% Pressure 960hPa Test Voltage Normal Voltage Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dBµV/m) Value Ty 4882.000 37.51 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	EUT Name		Wireless N	licrophone Sys	stem	Mode	el Name	Wireless (Transmitte	
Test Mode Mode 5 Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Ty 4882.000 45.74 0.14 45.88 74 -28.12 peak 7323.000 41.66 2.36 44.02 74 -29.98 peak 7323.000 34.22 2.36 36.58 54 -17.42 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Image: Comparison of the table of t	Temperature		22.8 ℃			Relat	ive Humidity	58.8%	
Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MH2) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Ty 4882.000 45.74 0.14 45.88 74 -28.12 peak 4882.000 38.19 0.14 38.33 54 -15.67 AVG 7323.000 41.66 2.36 44.02 74 -29.98 peak 7323.000 34.22 2.36 36.58 54 -17.42 AVG Remark: Factor Factor + Cable Loss – Pre-amplifier. Image: Case of the transmitter Transmitter Feesure 960hPa Test Voltage Normal Voltage Normal Voltage Test Mode Mode 5 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MH2) (dBµV) (dB) (dBµV/m) (dBµV/m) Vertical	Pressure	Pressure				Test V	Voltage	Normal Vo	oltage
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Iy 4882.000 45.74 0.14 45.88 74 -28.12 peak 4882.000 38.19 0.14 38.33 54 -15.67 AVG 7323.000 41.66 2.36 44.02 74 -29.98 peak 7323.000 34.22 2.36 36.58 54 -17.42 AVG Remark:	Test Mode		Mode 5			Anter	nna Polarity	Horizonta	l
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Iy 4882.000 45.74 0.14 45.88 74 -28.12 peak 4882.000 38.19 0.14 38.33 54 -15.67 AVG 7323.000 41.66 2.36 44.02 74 -29.98 peak 7323.000 34.22 2.36 36.58 54 -17.42 AVG Remark:									
(MH2) (dB)/v) (dB)/vinity (dB	Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin	
4882.000 38.19 0.14 38.33 54 -15.67 AVG 7323.000 41.66 2.36 44.02 74 -29.98 peak 7323.000 34.22 2.36 36.58 54 -17.42 AVG Remark:	(MHz)		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	value Type
Total col Other Other Total col Total	4882.000		45.74	0.14	45.8	88	74	-28.12	peak
T323.000 34.22 2.36 36.58 54 -17.42 AVG Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Model Name Wireless GO 3 Transmitter EUT Name Wireless Microphone System Model Name Wireless GO 3 Transmitter Temperature 22.8°C Relative Humidity 58.8% Pressure 960hPa Test Voltage Normal Voltage Frequency Meter Reading Factor Emission Level Limits Margin Value Ty K882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	4882.000		38.19	0.14	38.3	33	54	-15.67	AVG
Internation Internation <thinternation< th=""> <thinternation< th=""></thinternation<></thinternation<>	7323.000		41.66	2.36	44.0	02	74	-29.98	peak
Factor = Antenna Factor + Cable Loss – Pre-amplifier. Model Name Wireless GO 3 Transmitter EUT Name Wireless Microphone System Model Name Wireless GO 3 Transmitter Temperature 22.8°C Relative Humidity 58.8% Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 5 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Ty 4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	7323.000		34.22	2.36	36.5	58	54	-17.42	AVG
EUT NameWireless Microphone SystemModel NameTransmitterTemperature22.8 °CRelative Humidity58.8%Pressure960hPaTest VoltageNormal VoltageTest ModeMode 5Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMargin(MHz)(dBµV)(dB)(dBµV/m)(dB)Value Ty4882.00045.660.1445.874-28.2peak7323.00040.822.3643.1874-30.82peak7323.00033.742.3636.154-17.9AVG		nna Fa	actor + Cabl	e Loss – Pre-a	amplifier.				
Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 5 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MHz) (dBµV) (dB) (dBµV/m) (dB) Value Ty 4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	EUT Name		Wireless N	licrophone Sys	stem	Mode	el Name		
Test Mode Mode 5 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Ty 4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	Temperature		22.8 ℃			Relat	ive Humidity	58.8%	
Frequency Meter Reading Factor Emission Level Limits Margin Value Ty (MHz) (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) Value Ty 4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	Pressure		960hPa			Test V	Voltage	Normal Vo	oltage
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Ty 4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	Test Mode		Mode 5			Anter	nna Polarity	Vertical	
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value Ty 4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	Frequency	Mete	er Reading	Factor	Emissio	n Level	Limits	Margin	
4882.000 45.66 0.14 45.8 74 -28.2 peak 4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG			-		-			-	- Value Type
4882.000 37.51 0.14 37.65 54 -16.35 AVG 7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG	,			()					peak
7323.000 40.82 2.36 43.18 74 -30.82 peak 7323.000 33.74 2.36 36.1 54 -17.9 AVG									· ·
7323.000 33.74 2.36 36.1 54 -17.9 AVG									
Remark:									
IRemark.									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.	Remark:								

Radiated Emissions Test Results for Above 1GHz- Ant2

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz- Ant2

EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8 ℃	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	46.72	0.22	46.94	74	-27.06	peak
4960.000	38.53	0.22	38.75	54	-15.25	AVG
7440.000	41.36	2.64	44	74	-30	peak
7440.000	32.85	2.64	35.49	54	-18.51	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8 ℃	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	46.18	0.22	46.4	74	-27.6	peak
4960.000	38.56	0.22	38.78	54	-15.22	AVG
7440.000	40.74	2.64	43.38	74	-30.62	peak
7440.000	31.91	2.64	34.55	54	-19.45	AVG
emark:						

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8℃	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

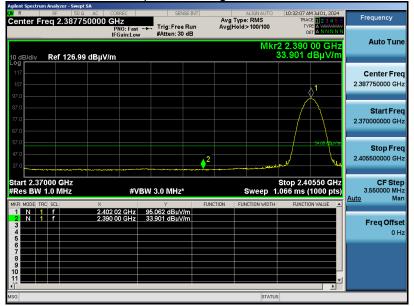

RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8°C	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

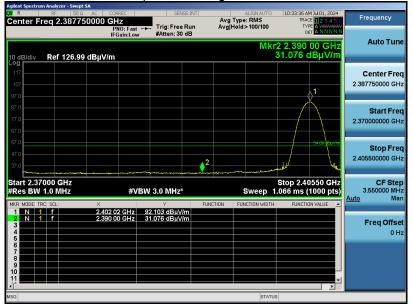

RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8℃	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

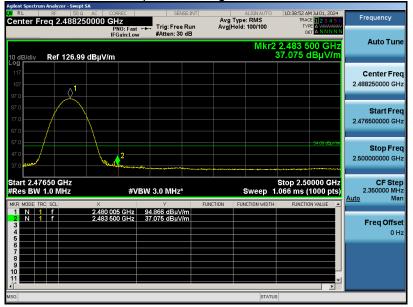

RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8 ℃	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

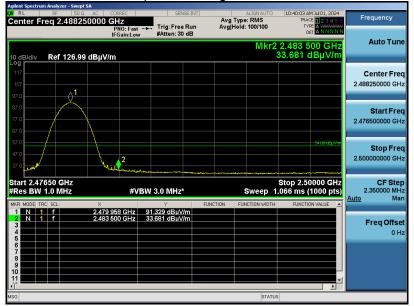


RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8°C	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

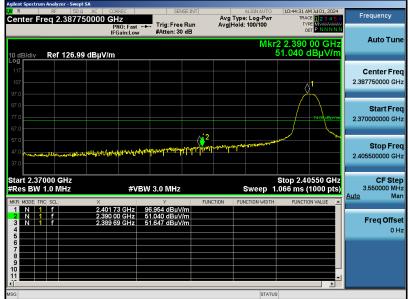

Test Graph for Average Measurement

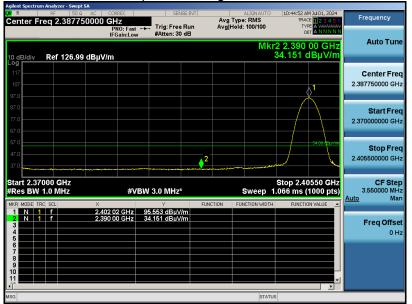


RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8 °C	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

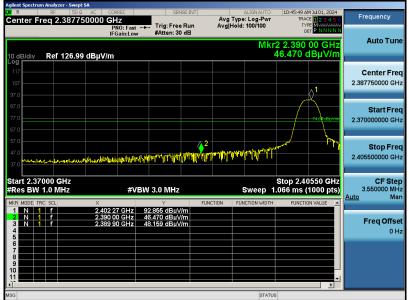

Test Graph for Average Measurement

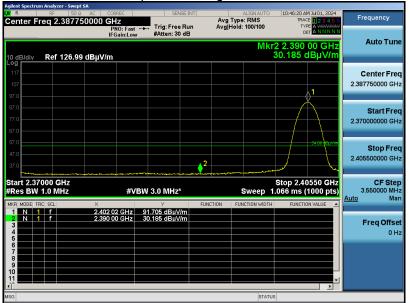


RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8 °C	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

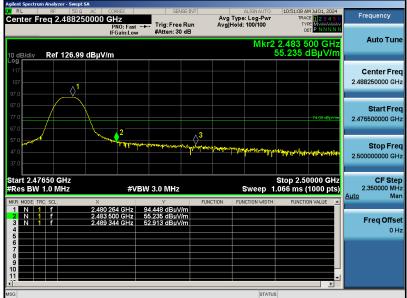

Test Graph for Average Measurement

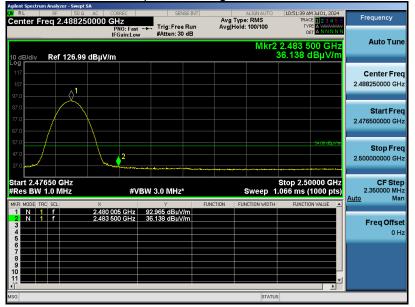


RESULT: Pass




EUT Name	Wireless Microphone System	Model Name	Wireless GO 3 Transmitter
Temperature	22.8℃	Relative Humidity	58.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

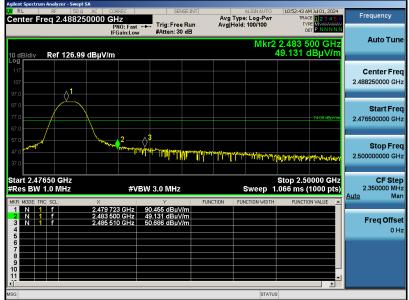

Test Graph for Average Measurement

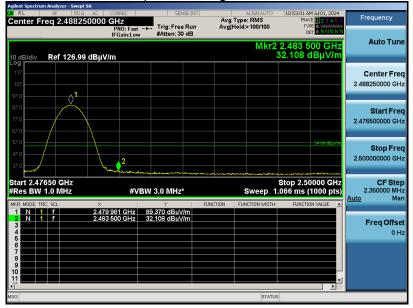

<u>**RESULT: Pass</u>** Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.</u>



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Frequency	Maximum RF	Maximum RF Line Voltage			
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

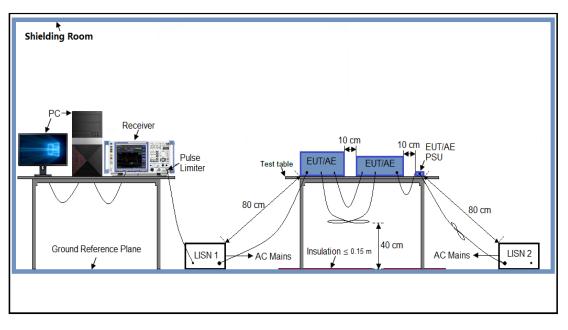



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5 Measurement Results

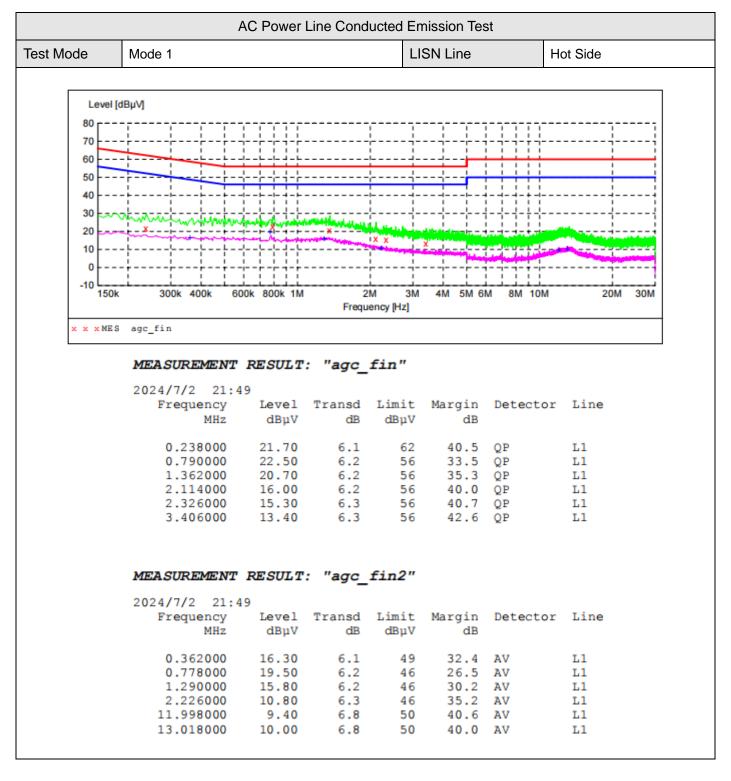



		AC Power	Line Cond	ucted Er	nission Tes	t		
Test Mode	Mode 1			LI	SN Line	Ne	eutral Side	
								-
Level [dl	Βμ√]							
⁸⁰ Г							i	
70		÷					i	
60						++++		
50						+ + + +		
40								
30		la de d adadas						
20	m white the second	,}\$*~~;~\$ X }- \$ \$;\$\$;\$} -1		AN AD A LOUGH			· · · · · · · · · · · · · · · · · · ·	
10	L			X	x		X	
0								
-10								
150k	300k 400k 6	00k 800k 1M	21 Freque	M 3M ency [Hz]	4M 5M 6M	8M 10M	20M 30M	
× × × MES	agc fin							1
	_							
	MEASUREMENT	RESULT	: "agc	fin"				
			: "agc_	fin"				
	2024/7/2 21:4	16	_		Margin	Detector	Line	
		16	: "agc_ Transd dB		Margin dB	Detector	Line	
	2024/7/2 21:4 Frequency MHz	l6 Level dBµV	Transd dB	Limit dBµV	dB			
	2024/7/2 21:4 Frequency MHz 0.338000	16 Level dBμV 20.60	Transd dB 6.1	Limit dBµV 59	dB 38.7	QP	N	
	2024/7/2 21:4 Frequency MHz	16 Level dBμV 20.60 25.70	Transd dB	Limit dBµV	dB	QP QP		
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000	Level dBμV 20.60 25.70 20.90	Transd dB 6.1 6.2	Limit dBµV 59 56	dB 38.7 30.3	QP QP QP	N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000	Level dBμV 20.60 25.70 20.90 15.50	Transd dB 6.1 6.2 6.2 6.3 6.3	Limit dBµV 59 56 56	dB 38.7 30.3 35.1	QP QP QP QP	N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000	Level dBμV 20.60 25.70 20.90 15.50 13.30	Transd dB 6.1 6.2 6.2 6.3	Limit dBµV 59 56 56 56	dB 38.7 30.3 35.1 40.5	QP QP QP QP	N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000	Level dBµV 20.60 25.70 20.90 15.50 13.30 16.30	Transd dB 6.1 6.2 6.2 6.3 6.3 6.3 6.8	Limit dBµV 59 56 56 56 56	dB 38.7 30.3 35.1 40.5 42.7	QP QP QP QP QP	N N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEA SUREMENT	Level dBµV 20.60 25.70 20.90 15.50 13.30 16.30	Transd dB 6.1 6.2 6.2 6.3 6.3 6.3 6.8	Limit dBµV 59 56 56 56 60	dB 38.7 30.3 35.1 40.5 42.7	QP QP QP QP QP	N N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEA SUREMENT 2024/7/2 21:4	Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_	Limit dBµV 59 56 56 56 60 fin2 "	dB 38.7 30.3 35.1 40.5 42.7 43.7	QP QP QP QP QP	N N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEA SUREMENT	Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT	Transd dB 6.1 6.2 6.2 6.3 6.3 6.3 6.8	Limit dBµV 59 56 56 56 60	dB 38.7 30.3 35.1 40.5 42.7 43.7 Margin	QP QP QP QP QP	N N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEA SUREMENT 2024/7/2 21:4 Frequency	Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT 16 Level	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd	Limit dBµV 59 56 56 56 60 fin2" Limit	dB 38.7 30.3 35.1 40.5 42.7 43.7 Margin	QP QP QP QP QP QP	N N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEA SUREMENT 2024/7/2 21:4 Frequency MHz	<pre>16 Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT 16 Level dBμV</pre>	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB	Limit dBµV 59 56 56 56 60 fin2" Limit dBµV	dB 38.7 30.3 35.1 40.5 42.7 43.7 Margin dB	QP QP QP QP QP QP	N N N N Line	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEASUREMENT 2024/7/2 21:4 Frequency MHz 0.338000	<pre>16 Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT 16 Level dBμV 16.60</pre>	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2 6.2	Limit dBµV 59 56 56 56 60 <i>fin2"</i> Limit dBµV 49	dB 38.7 30.3 35.1 40.5 42.7 43.7 Margin dB 32.7 26.0 30.5	QP QP QP QP QP QP AV AV	N N N N Line	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEASUREMENT 2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.142000	<pre>16 Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT 46 Level dBμV 16.60 20.00 15.50 11.40</pre>	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2 6.2 6.2	Limit dBµV 59 56 56 56 60 fin2" Limit dBµV 49 46 46	dB 38.7 30.3 35.1 40.5 42.7 43.7 Margin dB 32.7 26.0 30.5 34.6	QP QP QP QP QP QP AV AV AV AV	N N N N N N N N N N	
	2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000 2.614000 3.550000 13.778000 MEASUREMENT 2024/7/2 21:4 Frequency MHz 0.338000 0.778000 1.118000	<pre>Level dBμV 20.60 25.70 20.90 15.50 13.30 16.30 RESULT Level dBμV 16.60 20.00 15.50</pre>	Transd dB 6.1 6.2 6.3 6.3 6.3 6.8 : "agc_ Transd dB 6.1 6.2 6.2	Limit dBµV 59 56 56 56 60 fin2" Limit dBµV 49 46 46	dB 38.7 30.3 35.1 40.5 42.7 43.7 Margin dB 32.7 26.0 30.5	QP QP QP QP QP QP AV AV AV AV AV	N N N N N N N	



Report No.: AGC10232240609FR01 Page 70 of 70

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC10232240609AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC10232240609AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.