



FCC LISTED, REGISTRATION
NUMBER: 2764.01

ISED LISTED REGISTRATION
NUMBER: 23595-1

Test report No:
3183ERM.003

Partial Test report

USA FCC Part 15.247, 15.209, 15.207
CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and
5725 - 5850 MHz

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-
Exempt Local Area Network (LE-LAN) Devices.

(*) Identification of item tested	Battery Radiofrequency Module
(*) Trademark	Visteon
(*) Model and /or type reference tested	BRFM
Other identification of the product	FCC ID: NT8-BRFM IC: 3043A-BRFM
(*) Features	Wireless Battery Management
Manufacturer	Visteon Corporation One Village Center Drive, Van Buren Township, MI 48111, USA.
Test method requested, standard	USA FCC Part 15.247, 10-1-20 Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz USA FCC Part 15.209, 10-1-20 Edition: Radiated emission limits; general requirements CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (March 2019). 558074 D01 15.247 Meas. Guidance v05r02 (April 2019): Guidance for Compliance Measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under section §15.247 of the FCC Rules ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Domingo Galvez EMC&RF Lab Manager
Date of issue	10-14-2021
Report template No	FDT08_23 (*) "Data provided by the client"

Index

Competences and guarantees.....3

General conditions.....3

Uncertainty3

Data provided by the client4

Usage of samples.....4

Test sample description.....5

Identification of the client6

Testing period and place6

Document history7

Environmental conditions.....7

Remarks and comments.....7

Testing verdicts8

Summary.....8

List of equipment used during the test9

Appendix A: Test results (Proprietary Protocol)10

Competences and guarantees

DEKRA Certification Inc. is a testing laboratory accredited by A2LA (The American Association for Laboratory Accreditation), to perform the tests indicated in the Certificate 2764.01

DEKRA Certification Inc. is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Certification Inc. has a calibration and maintenance program for its measurement equipment.

DEKRA Certification Inc. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Certification at the time of performance of the test.

DEKRA Certification Inc. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Certification Inc.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Certification Inc.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Certification Inc. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Certification internal document PODT000.

Test case	Frequency (MHz)	U(k=2)	Units
RF Power and PSD	2402-2483	0.88	dB
Occupied Bandwidth		1.87	%
Band Edge		0.64	dB
Radiated Spurious Emission	30-180	4.27	dB
	180-1000	3.14	dB
	1000-18000	3.30	dB
	18000-40000	3.49	dB

Data provided by the client

The DUT is a Battery Radiofrequency Module.

DEKRA declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
3183/05	BRFM (MTF Radiated)	7079	1121169P00000110	08/02/2021

Following Accessory items were used with Sample S/01 to perform testing:

Control N°	Description	Model	Serial N°	Date of reception
3183/06	GM BRFM test Board	--	--	08/02/2021
3183/12	isoSPI 2 Wire Serial Interface	--	--	08/02/2021
3183/13	Ethernet Cable	--	--	08/02/2021

1. Sample S/02 has undergone following test(s)

All tests indicated in appendix A.

Test sample description

Ports..... :	Port name and description	Cable								
		Specified length [m]	Attached during test		Shielded					
	Main connector/harness	60 cm	<input type="checkbox"/>		<input type="checkbox"/>					
			<input type="checkbox"/>		<input type="checkbox"/>					
Supplementary information to the ports.....	No Data Provided									
Rated power supply	Voltage and Frequency		Reference poles							
			L1	L2	L3	N PE				
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	<input checked="" type="checkbox"/>	DC: 5.4 V								
	<input type="checkbox"/>	DC:								
Rated Power	Current in normal mode: 0,5 A									
Clock frequencies	40 MHz									
Other parameters.....	No Data Provided									
Software version	1.0									
Hardware version.....	1.0									
Dimensions in mm (W x H x D):	No Data Provided									
Mounting position.....	<input type="checkbox"/>	Tabletop equipment								
	<input type="checkbox"/>	Wall/Ceiling mounted equipment								
	<input type="checkbox"/>	Floor standing equipment								
	<input type="checkbox"/>	Hand-held equipment								
	<input checked="" type="checkbox"/>	Other: Integrated in-side electric vehicle battery pack.								
Modules/parts	Module/parts of test item	Type			Manufacturer					
	No Data Provided									

Accessories (not part of the test item)	Description	Type	Manufacturer
	Harness		
	Main connector		
	V71 board		
	Cheetah		
	CMUr		
Documents as provided by the applicant	Description	File name	Issue date
	Declaration Equipment Data	FDT30_18 Declaration Equipment Data_October 13, 2021.pdf	10/13/2021
Copy of marking plate:			
No Marking plate found.			

Identification of the client

Visteon Corporation
One Village Center Drive, Van Buren Township, MI 48111, USA..

Testing period and place

Test Location	DEKRA Certification Inc.
Date (start)	08-27-2021
Date (finish)	08-27-2021

Document history

Report number	Date	Description
3183ERM.003	10-14-2021	First release

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semi anechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

Remarks and comments

The tests have been performed by the technical personnel: Nasir Khan and Koji Nishimoto.

Testing verdicts

Not applicable :	N/A
Pass :	P
Fail :	F
Not measured :	N/M

Summary

FCC PART 15 PARAGRAPH (Proprietary protocol)					
Section	FCC Spec Clause	RSS Spec Clause	Test Description	Verdict	Remark
-	§ 2.1049	RSS-GEN 6.7	99% Occupied Bandwidth	N/A	Refer 1
-	§15.247 (a) (2)	RSS-247 5.2 (a)	6dB Bandwidth	N/A	Refer 1
-	§ 15.247 (b) (3)	RSS-247 5.4 (d)	Maximum Output Power and antenna gain	N/A	Refer 1
-	§ 15.247 (d)	RSS-247 5.5	Band-edge conducted emissions compliance (Transmitter)	N/A	Refer 1
-	§ 15.247 (e)	RSS-247 5.2 (b)	Power Spectral Density	N/A	Refer 1
-	§15.247 (d)	RSS-247 5.5	Emission limitations Conducted (Transmitter)	N/A	Refer 1
A.1	§15.247 (d)	RSS-247 5.5	Emission limitations Radiated (Transmitter)	P	N/A
<u>Supplementary information and remarks:</u> 1. Only multi-transmitter radiated spurious emission test was requested.					

List of equipment used during the test

Radiated Measurements

CONTROL NUMBER	DESCRIPTION	MANUFACTURER	MODEL	LAST CALIBRATION	NEXT CALIBRATION
0981	RF pre-amplifier	Bonn Elektronik	BLMA0118-2A	2020/11	2022/11
1012	EMI TEST RECEIVER	Rohde & Schwarz	ESR 26	2019/12	2021/12
1014	Spectrum analyzer	Rohde & Schwarz	FSV40	2021/05	2023/05
1056	Double-ridge Waveguide Horn antenna 18-40 GHz	ETS LINDGREN	3116C	2020/01	2023/01
1057	Double-ridge Waveguide Horn antenna 1-18 GHz	ETS LINDGREN	3115	2020/06	2023/06
1065	Biconical Log antenna	ETS LINDGREN	3142E	2020/08	2023/08
1111	ETHERNET SNMP THERMOMETER	HW GROUP	HWg-STE Plain	2020/08	2022/08
1179	Semi anechoic Absorber Lined Chamber	Frankonia	SAC 3 plus "L"	N/A	N/A
1314	WIRELESS MEASUREMENT SOFTWARE R&S EMC32	Rohde & Schwarz	N/A	N/A	N/A

Appendix A: Test results (Multi-transmitter)

Appendix A Content

PRODUCT INFORMATION..... 12

DESCRIPTION OF TEST CONDITIONS..... 13

TEST A.1: EMISSION LIMITATIONS RADIATED (TRANSMITTER) 14

PRODUCT INFORMATION

The following information is provided by the client

Information	Description
Modulation	GFSK
Adaptive	Non-adaptive equipment
Operation mode	
- Operating Frequency Range	2400 – 2480 MHz
- Nominal Channel Bandwidth	2 MHz
- RF Output Power	10 dBm
Antenna type	Integrated chip antenna
Antenna gain	2.6 dBi
Nominal Voltage	
- Supply Voltage	5.4 V nominal
- Type of power source	DC Power supply
Equipment type	Wireless Battery Management
Geo-location capability	No

DESCRIPTION OF TEST CONDITIONS

TEST CONDITIONS	DESCRIPTION
TC#01	<p><u>Power supply (V):</u> $V_{\text{nominal}} = 5.4 \text{ V dc}$</p> <p>Bandwidth: 2 MHz</p> <p><u>Test Frequencies for Radiated test for port V1:</u> Middle channel: 2445 MHz</p> <p><u>Test Frequencies for Radiated test for port V2:</u> Highest channel: 2480 MHz</p>

TEST A.1: EMISSION LIMITATIONS RADIATED (TRANSMITTER)

LIMITS:	Product standard:	Part 15 Subpart C §15.247 and RSS-247
	Test standard:	Part 15 Subpart C §15.247 (d) and RSS-Gen 8.9 and 8.10

LIMITS

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c) / RSS-Gen):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

TEST SETUP

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at 3 m for the frequency range 30-1000 MHz (Bilog antenna) and 1-18 GHz Double ridge horn antennas, and 1m for the frequency range 18 GHz- 26 GHz Double ridge horn antenna.

For radiated emissions in the range 18 - 26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

TEST SETUP (CONT.)


Radiated measurements Setup $f < 1$ GHz

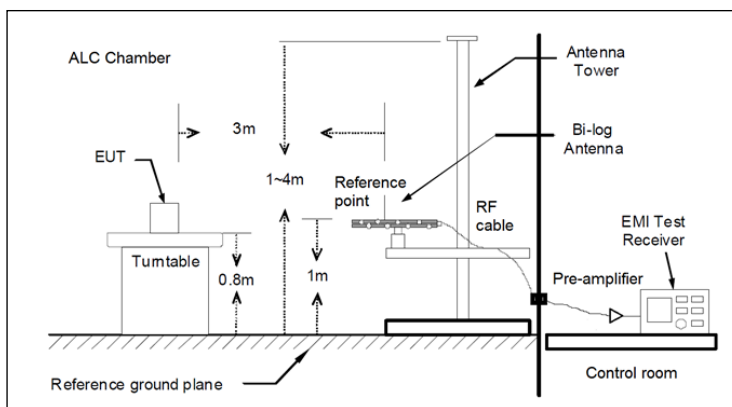

Radiated measurements setup $f > 1-18$ GHz

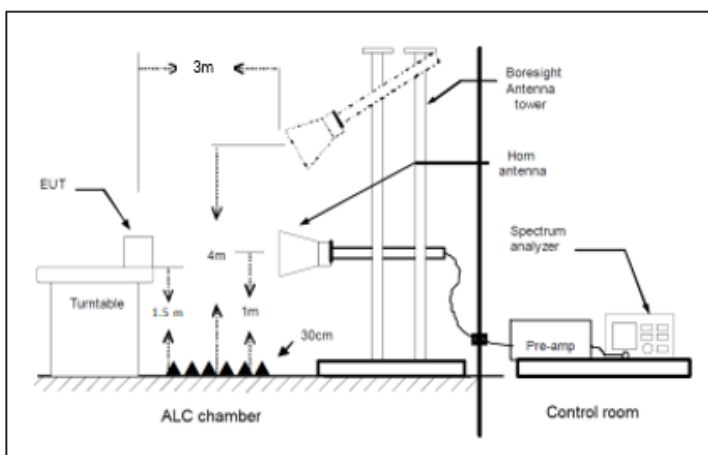

Radiated measurements setup $f > 18$ GHz

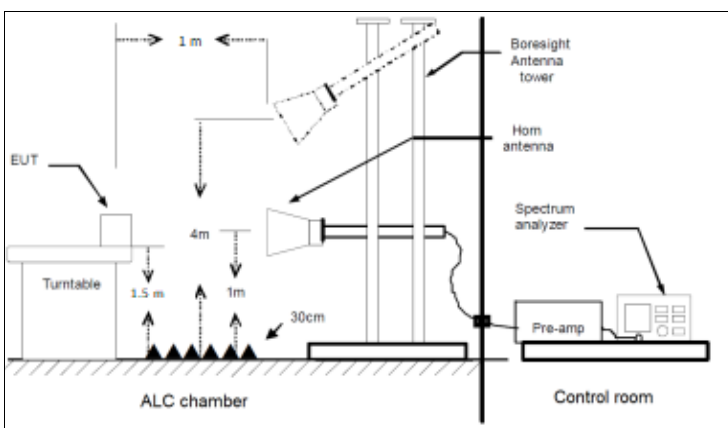

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

Multi-transmitter test

The test was performed with 2.4 GHz proprietary protocol radios transmitting the two different fundamental frequencies simultaneously to check from the impact of the multi-transmitter configuration.

The preliminary test was performed in three different DUT orientations (X, Y and Z) to determine the worst case. The worst case results were shown in the following test results.

Frequency range 30 MHz – 1000 MHz

The spurious emissions below 1 GHz do not depend on the operating channel selected in the DUT.


Frequency range 1 GHz – 26 GHz

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz (see next plots).

TEST RESULTS (Cont.):

30-1000 MHz

RF_FCC_15.247_E Field_30MHz_1GHz

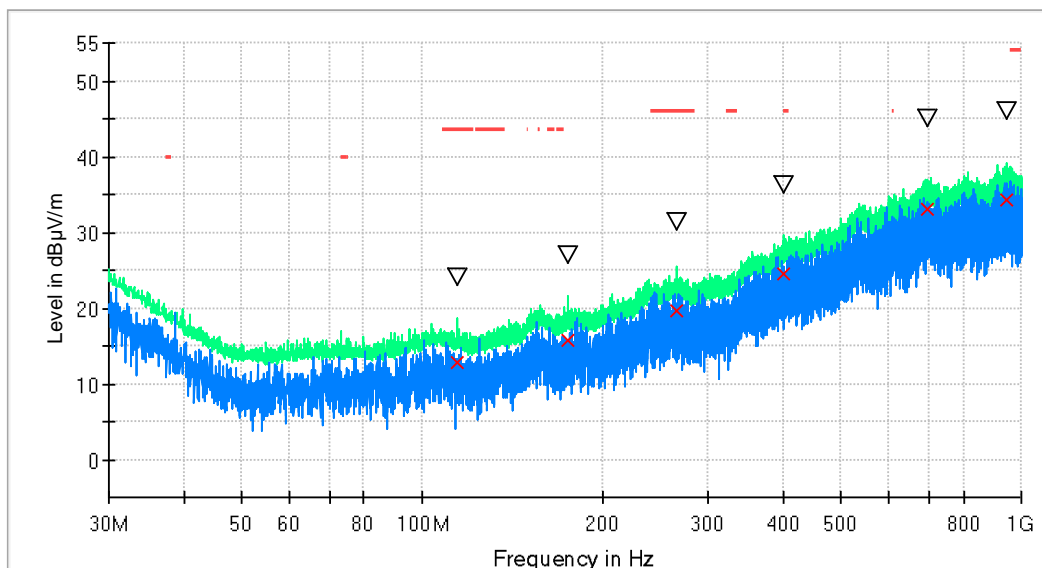


PK+ _MAXH
 PK+ _CLRWR
 TX limits to Spurious Emission FCC15.247 (30MHz to 1GHz) Restricted Bands QPK Limit
 ▽ MaxPeak-PK+ (Single)
 X QuasiPeak-QPK (Single)

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Pol	Margin - QPK (dB)	Limit - QPK (dBμV/m)
114.341500	24.1	12.8	H	30.7	43.5
175.597000	27.1	15.8	V	---	---
265.031000	31.3	19.6	V	26.4	46.0
401.995000	36.2	24.5	H	21.5	46.0
695.517000	44.9	33.0	V	---	---
948.008000	45.9	34.4	H	---	---

TEST RESULTS (Cont.):

1-18 GHz

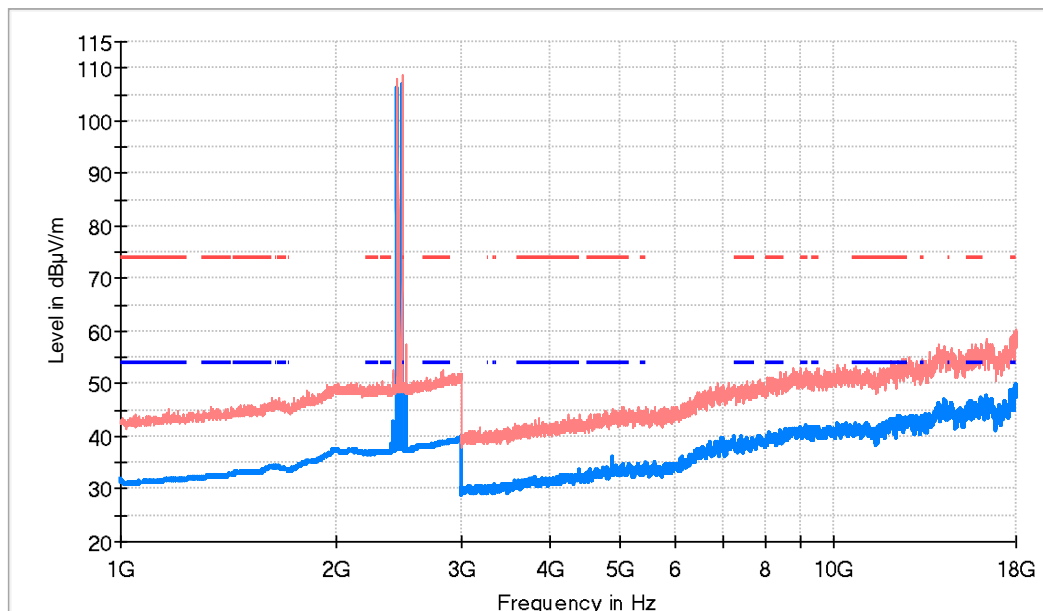


— AVG_MAXH
 — PK+_MAXH
 — TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
 — TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBμV/m)	AVG_MAXH (dBμV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBμV/m)	Comment
2445.000000	107.8	106.2	H	---	---	Fundamental 1
2480.000000	108.6	106.9	H	---	---	Fundamental 2
4889.000000	44.8	35.7	H	18.3	54.0	

TEST RESULTS (Cont.):

18 – 26 GHz

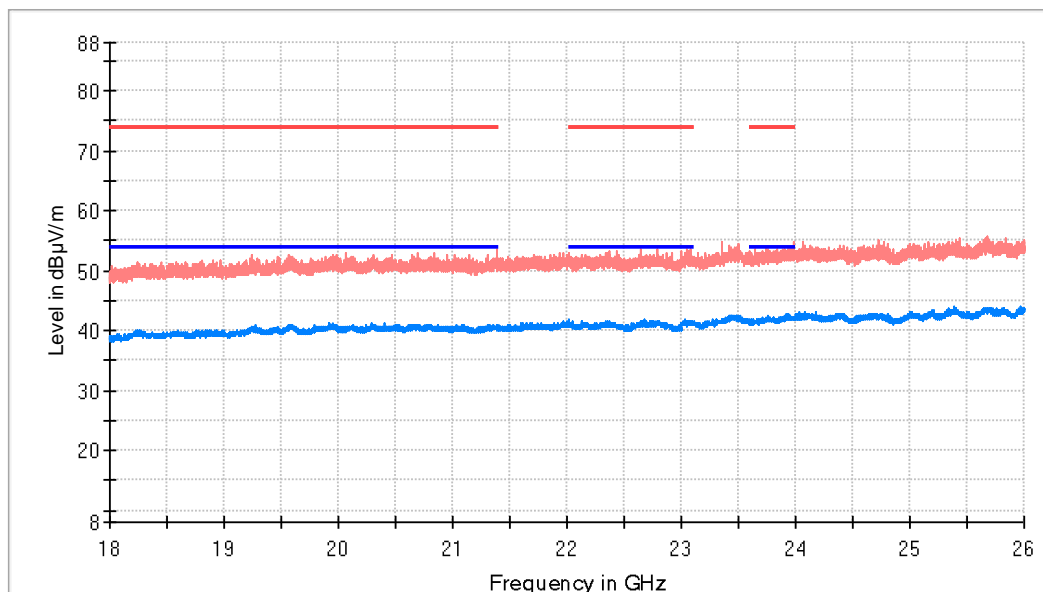


- AVG_MAXH
- PK+_MAXH
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit
- TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
24308.500000	53.0	43.6	H	---	---

TEST RESULTS (Cont.):

Restricted Bands (2.31 GHz – 2.5 GHz)

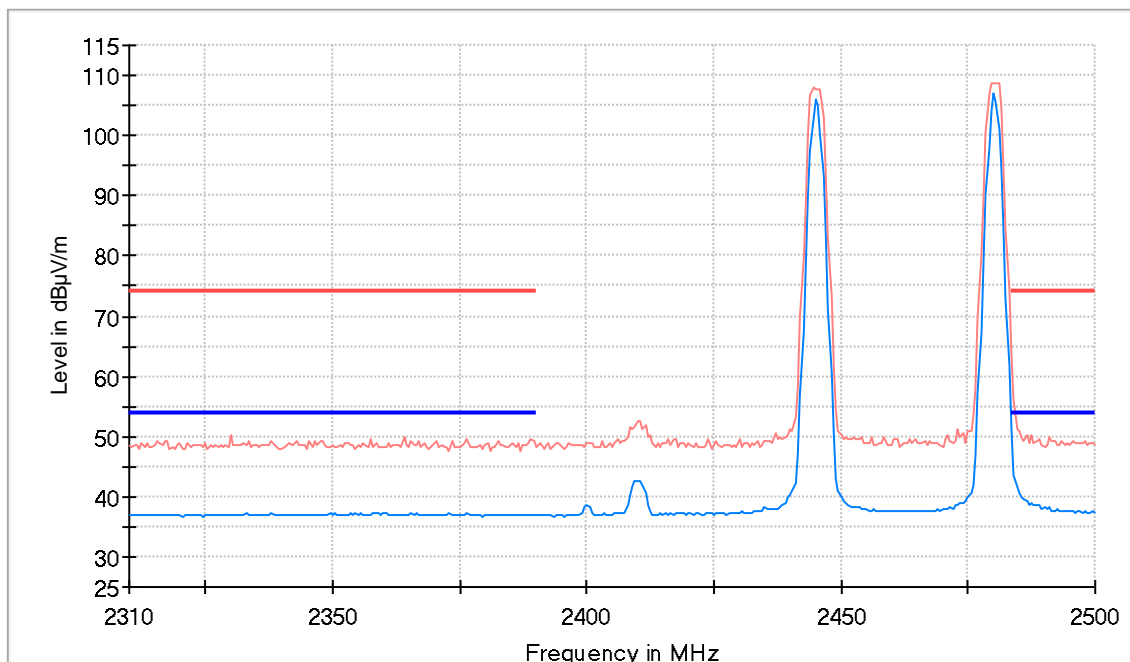

— AVG_MAXH
 — PK+_MAXH
 — TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands PK Limit
 — TX limits to Spurious Emission FCC15.247 (1-26 GHz) Restricted Bands AVG Limit

Frequency (MHz)	PK+_MAXH (dBµV/m)	AVG_MAXH (dBµV/m)	Pol	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
2445.000000	107.8	106.2	H	---	---	Fundamental 1
2480.000000	108.6	106.9	H	---	---	Fundamental 2
2483.500000	63.8	51.7	H	2.3	54.0	