

# MEASUREMENT REPORT

## FCC PART 15 Subpart C WLAN 802.11b/g/n/VHT/ax

---

**FCC ID:** 2ABLK-BLASTU4X

**Applicant:** Calix Inc.

**Application Type:** Certification

**Product:** GigaSpire BLAST u4, GigaSpire Mesh BLAST u4m

**Model No.:** GigaSpire BLAST u4, GigaSpire Mesh BLAST u4m

**Brand Name:** 


**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v05r02,  
KDB 662911 D01v02r01

**Test Date:** July 01 ~ August 18, 2020

**Reviewed By:**   
( Kevin Guo )

**Approved By:**   
( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 2006RSU066-U1 | Rev. 01 | Initial report | 08-21-2020 | Valid |
|               |         |                |            |       |

## CONTENTS

| Description                                                | Page      |
|------------------------------------------------------------|-----------|
| <b>1. INTRODUCTION .....</b>                               | <b>6</b>  |
| 1.1. Scope .....                                           | 6         |
| 1.2. MRT Test Location .....                               | 6         |
| <b>2. PRODUCT INFORMATION .....</b>                        | <b>7</b>  |
| 2.1. Equipment Description .....                           | 7         |
| 2.2. Models Difference .....                               | 7         |
| 2.3. Product Specification Subjective to this Report ..... | 7         |
| 2.4. Working Frequencies for this report.....              | 8         |
| 2.5. Description of Available Antennas.....                | 8         |
| 2.6. Description of Antenna RF Port.....                   | 9         |
| 2.7. Test Mode .....                                       | 9         |
| 2.8. Configuration of Test System .....                    | 10        |
| 2.9. Test System Details .....                             | 11        |
| 2.10. Description of Test Software.....                    | 11        |
| 2.11. Test Environment Condition.....                      | 11        |
| 2.12. Duty Cycle.....                                      | 12        |
| 2.13. EMI Suppression Device(s)/Modifications.....         | 13        |
| 2.14. Labeling Requirements.....                           | 13        |
| <b>3. ANTENNA REQUIREMENTS.....</b>                        | <b>14</b> |
| <b>4. TEST EQUIPMENT CALIBRATION DATE.....</b>             | <b>15</b> |
| <b>5. MEASUREMENT UNCERTAINTY .....</b>                    | <b>17</b> |
| <b>6. TEST RESULT .....</b>                                | <b>18</b> |
| 6.1. Summary.....                                          | 18        |
| 6.2. 6dB Bandwidth Measurement.....                        | 19        |
| 6.2.1. Test Limit .....                                    | 19        |
| 6.2.2. Test Procedure used.....                            | 19        |
| 6.2.3. Test Setting.....                                   | 19        |
| 6.2.4. Test Setup .....                                    | 19        |
| 6.2.5. Test Result.....                                    | 20        |
| 6.3. Output Power Measurement.....                         | 27        |
| 6.3.1. Test Limit .....                                    | 27        |
| 6.3.2. Test Procedure Used .....                           | 27        |
| 6.3.3. Test Setting.....                                   | 27        |
| 6.3.4. Test Setup .....                                    | 27        |

|           |                                                     |            |
|-----------|-----------------------------------------------------|------------|
| 6.3.5.    | Test Result.....                                    | 28         |
| 6.4.      | Power Spectral Density Measurement.....             | 29         |
| 6.4.1.    | Test Limit .....                                    | 29         |
| 6.4.2.    | Test Procedure Used .....                           | 29         |
| 6.4.3.    | Test Setting.....                                   | 29         |
| 6.4.4.    | Test Setup .....                                    | 30         |
| 6.4.5.    | Test Result.....                                    | 31         |
| 6.5.      | Conducted Band Edge and Out-of-Band Emissions ..... | 44         |
| 6.5.1.    | Test Limit .....                                    | 44         |
| 6.5.2.    | Test Procedure Used .....                           | 44         |
| 6.5.3.    | Test Setting.....                                   | 44         |
| 6.5.4.    | Test Setup .....                                    | 45         |
| 6.5.5.    | Test Result.....                                    | 46         |
| 6.6.      | Radiated Spurious Emission Measurement .....        | 71         |
| 6.6.1.    | Test Limit .....                                    | 71         |
| 6.6.2.    | Test Procedure Used .....                           | 71         |
| 6.6.3.    | Test Setting.....                                   | 71         |
| 6.6.4.    | Test Setup .....                                    | 73         |
| 6.6.5.    | Test Result.....                                    | 74         |
| 6.7.      | Radiated Restricted Band Edge Measurement.....      | 101        |
| 6.7.1.    | Test Limit .....                                    | 101        |
| 6.7.2.    | Test Procedure Used .....                           | 102        |
| 6.7.3.    | Test Setting.....                                   | 102        |
| 6.7.4.    | Test Setup .....                                    | 103        |
| 6.7.5.    | Test Result.....                                    | 104        |
| 6.8.      | AC Conducted Emissions Measurement .....            | 168        |
| 6.8.1.    | Test Limit .....                                    | 168        |
| 6.8.2.    | Test Setup .....                                    | 168        |
| 6.8.3.    | Test Result.....                                    | 169        |
| <b>7.</b> | <b>CONCLUSION .....</b>                             | <b>171</b> |
|           | <b>Appendix A - Test Setup Photograph .....</b>     | <b>172</b> |
|           | <b>Appendix B - EUT Photograph.....</b>             | <b>173</b> |

## General Information

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>Applicant:</b>            | Calix Inc.                                                                         |
| <b>Applicant Address:</b>    | 1035 N. McDowell Blvd Petaluma, CA94954 U.S.A                                      |
| <b>Manufacturer:</b>         | Calix Inc.                                                                         |
| <b>Manufacturer Address:</b> | 1035 N. McDowell Blvd Petaluma, CA94954 U.S.A                                      |
| <b>Test Site:</b>            | MRT Technology (Suzhou) Co., Ltd                                                   |
| <b>Test Site Address:</b>    | D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China |

## Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is an FCC accredited testing laboratory (MRT Designation No. CN1166) on the FCC website.
- MRT facility is an ISED recognized testing laboratory (MRT Reg. No. CN0001) on the ISED website.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the A2LA under the A2LA Program (Cert. No. 3628.01) and CNAS under the CNAS Program (Cert. No. L10551) in EMC, Safety, Radio, Telecommunications and SAR testing.

## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

|                               |                                                                                           |
|-------------------------------|-------------------------------------------------------------------------------------------|
| Product Name:                 | GigaSpire BLAST u4, GigaSpire Mesh BLAST u4m                                              |
| Model No.:                    | GigaSpire BLAST u4, GigaSpire Mesh BLAST u4m                                              |
| Brand Name:                   |          |
| Wi-Fi Specification:          | 802.11a/b/g/n/ac/ax/VHT                                                                   |
| Serial No.:                   | 262007039756 (Radiated Emission & AC Line Conducted Emission)<br>262007039695 (Conducted) |
| Accessory                     |                                                                                           |
| Switching Mode Power Adapter: | MODEL: F24L9-120200SPAU<br>INPUT: 100-240V~50/60Hz 0.6A<br>OUTPUT: 12V=2A                 |

Note: Between the models, there are the same schematics design, same PCB layout and the same RF parameters except the difference as below (Section 2.2), and GigaSpire BLAST u4 was selected for all RF test.

### 2.2. Models Difference

| Model name               | Difference                                                  |
|--------------------------|-------------------------------------------------------------|
| GigaSpire BLAST u4       | 2 LAN ports, 1 WAN port, 1 USB, 2.4G/5G Wi-Fi, external PSU |
| GigaSpire Mesh BLAST u4m | 1 WAN port, 2.4G/5G Wi-Fi, external PSU                     |

### 2.3. Product Specification Subjective to this Report

|                     |                                                                                                                                          |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range:    | 802.11b/g/n-HT20/VHT20/ax-HE20: 2412 ~ 2462MHz<br>802.11n-HT40/VHT40/ax-HE40: 2422 ~ 2452MHz                                             |
| Channel Number:     | 802.11b/g/n-HT20/VHT20/ax-HE20: 11<br>802.11n-HT40/VHT40/ax-HE40: 7                                                                      |
| Type of Modulation: | 802.11b: DSSS<br>802.11g/n/VHT: OFDM<br>802.11ax: OFDMA                                                                                  |
| Data Rate:          | 802.11b: 1/2/5.5/11Mbps<br>802.11g: 6/9/12/18/24/36/48/54Mbps<br>802.11n: up to 300Mbps<br>VHT: up to 400Mbps<br>802.11ax: up to 591Mbps |

Note: For other features of this EUT, test report will be issued separately.

## 2.4. Working Frequencies for this report

802.11b/g/n-HT20/VHT20/ax-HE20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 01      | 2412 MHz  | 02      | 2417 MHz  | 03      | 2422 MHz  |
| 04      | 2427 MHz  | 05      | 2432 MHz  | 06      | 2437 MHz  |
| 07      | 2442 MHz  | 08      | 2447 MHz  | 09      | 2452 MHz  |
| 10      | 2457 MHz  | 11      | 2462 MHz  | --      | --        |

802.11n-HT40/VHT40/ax-HE40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 03      | 2422 MHz  | 04      | 2427 MHz  | 05      | 2432 MHz  |
| 06      | 2437 MHz  | 07      | 2442 MHz  | 08      | 2447 MHz  |
| 09      | 2452 MHz  | --      | --        | --      | --        |

## 2.5. Description of Available Antennas


| Model name          | Manufacturer                                           | Tx Port    | Frequency Band (MHz) | Cable length (mm) |
|---------------------|--------------------------------------------------------|------------|----------------------|-------------------|
| 2.4G-2_PCB-LY70FC1  | CHANGSHU HONGBO TELECOMMUNICATION TECHNOLOGY CO., LTD. | 2.4G Ant 0 | 2412~2462            | 70                |
| 2.4G-1_PCB-LE160FC3 |                                                        | 2.4G Ant 1 | 2412~2462            | 160               |
| RFPCA252302IM5B301  | WALSIN TECHNOLOGY CORPORATION                          | 5G Ant 0   | 5150~5850            | 30                |
| RFPCA252312IM5B301  |                                                        | 5G Ant 1   | 5150~5850            | 125               |

| Antenna Type | Frequency Band (MHz) | Tx Paths | Directional Gain (dBi) |
|--------------|----------------------|----------|------------------------|
|              |                      |          | CDD & Beamforming      |
| PCB Antenna  | 2412 ~ 2462          | 2        | 5.84                   |
|              | 5150 ~ 5350          | 2        | 5.81                   |
|              | 5470 ~ 5725          | 2        | 5.93                   |
|              | 5725 ~ 5850          | 2        | 5.95                   |

Note 1: The EUT supports Cyclic Delay Diversity (CDD) and Beamforming technology, and the Beamforming mode support 802.11ac/ax, not include 802.11a/b/g. It transmits signals that are correlated, then Directional gain =  $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$  dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.

Note 2: All the messages as above are provided by manufacturer.

## 2.6. Description of Antenna RF Port
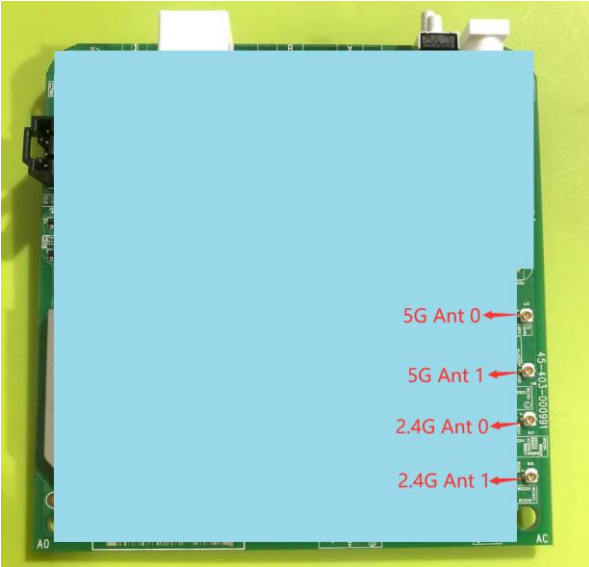
| Antenna RF Port                                                                     |                |       |              |       |
|-------------------------------------------------------------------------------------|----------------|-------|--------------|-------|
| Software Control Port                                                               | 2.4GHz RF Port |       | 5GHz RF Port |       |
|                                                                                     | Ant 0          | Ant 1 | Ant 0        | Ant 1 |
|  |                |       |              |       |

## 2.7. Test Mode


|           |                                                             |
|-----------|-------------------------------------------------------------|
| Test Mode | Mode 1: Transmit by 802.11b (1Mbps) (CDD Mode)              |
|           | Mode 2: Transmit by 802.11g (6Mbps) (CDD Mode)              |
|           | Mode 3: Transmit by 802.11n-HT20 (MCS0) (CDD Mode)          |
|           | Mode 4: Transmit by 802.11n-HT40 (MCS0) (CDD Mode)          |
|           | Mode 5: Transmit by 802.11ax-HE20 (MCS0) (CDD Mode)         |
|           | Mode 6: Transmit by 802.11ax-HE40 (MCS0) (CDD Mode)         |
|           | Mode 7: Transmit by 802.11ax-HE20 (MCS0) (Beamforming Mode) |
|           | Mode 8: Transmit by 802.11ax-HE40 (MCS0) (Beamforming Mode) |

Note: Due to the same modulation between 802.11n and VHT, so VHT mode is covered by 802.11n in this report, meanwhile, power setting for VHT mode will not be greater than 802.11n.


## 2.8. Configuration of Test System

The measurement procedures and appropriate EUT setup described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement.

Connection Diagram – Radiated Emission testing (CDD mode) & AC Conducted Emissions

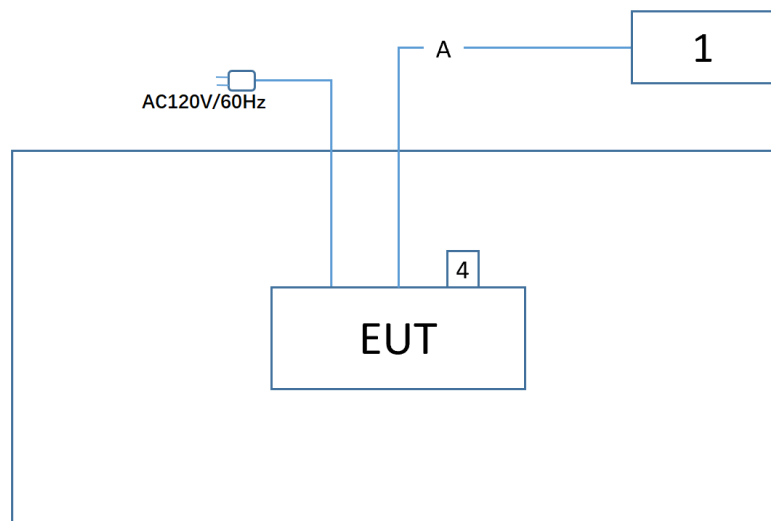

Connection Diagram – Radiated Emission testing (Beamforming mode)

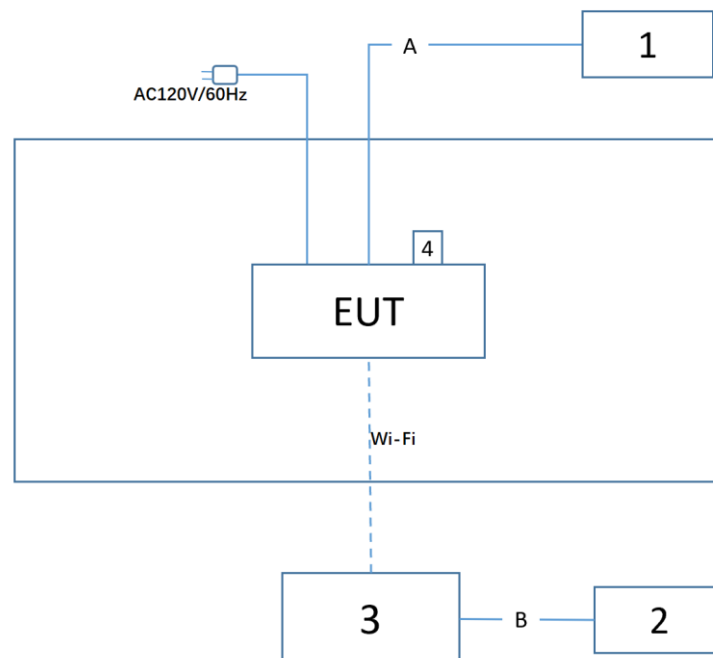

| Signal Cable Type |           | Signal Cable Description |
|-------------------|-----------|--------------------------|
| A                 | LAN Cable | Non shielded, > 10m      |
| B                 | LAN Cable | Non shielded, 3.0m       |

## 2.9. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product          | Manufacturer | Model No.             | Serial No.     | Power Cord         |
|------------------|--------------|-----------------------|----------------|--------------------|
| 1 Notebook       | Lenovo       | E431                  | PF-10ZRN 13/12 | Non-Shielded, 1.8m |
| 2 Notebook       | Lenovo       | X230i                 | N/A            | Non-Shielded, 1.8m |
| 3 Station Device | Calix        | GigaSpire<br>BLAST u4 | N/A            | N/A                |
| 4 USB flash disk | SanDisk      | CZ48                  | N/A            | N/A                |

## 2.10. Description of Test Software

For CDD mode:

The test utility software used during testing was “Qualcomm Radio Control Tool”, and the version was “4.0.00132.0”.

For Beamforming mode:

Conducted measurement

The test utility software used during testing was “Qualcomm Radio Control Tool”, and the version was “4.0.00132.0”.

Radiated measurement

- 1) Configure EUT and station device to under the normal operation.
- 2) Set and fix EUT’s mode, channel, and power by telnet.
- 3) Connect EUT with station device, run “*lperf.exe*” to transmit and receive packet continuously by station device.

Note: Final power setting please refer to operational description.

## 2.11. Test Environment Condition

|                     |              |
|---------------------|--------------|
| Ambient Temperature | 15°C~35°C    |
| Relative Humidity   | 20%RH ~75%RH |


## 2.12. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


| Test Mode     | Duty Cycle |
|---------------|------------|
| 802.11b       | 62.58%     |
| 802.11g       | 93.25%     |
| 802.11n-HT20  | 91.78%     |
| 802.11n-HT40  | 85.94%     |
| 802.11ax-HE20 | 94.53%     |
| 802.11ax-HE40 | 92.05%     |

### Duty Cycle (T = Transmission Duration)


#### 802.11b (T = 1.322ms)

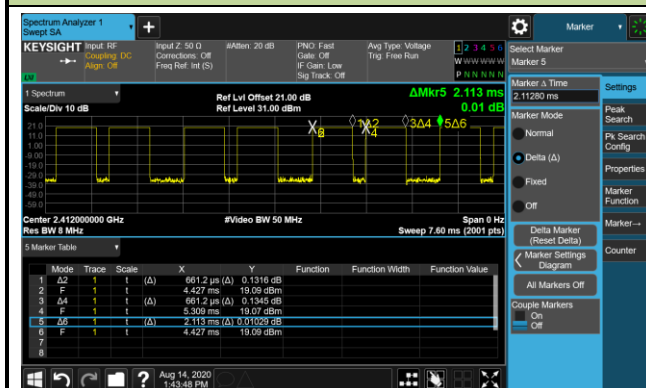


#### 802.11g (T = 1.974ms)

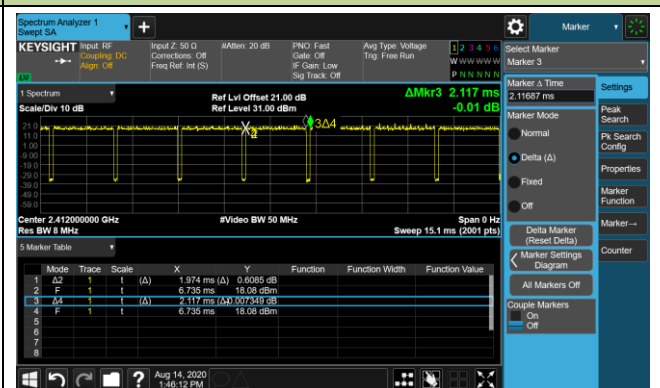


#### 802.11n-HT20 (T = 16.200ms)

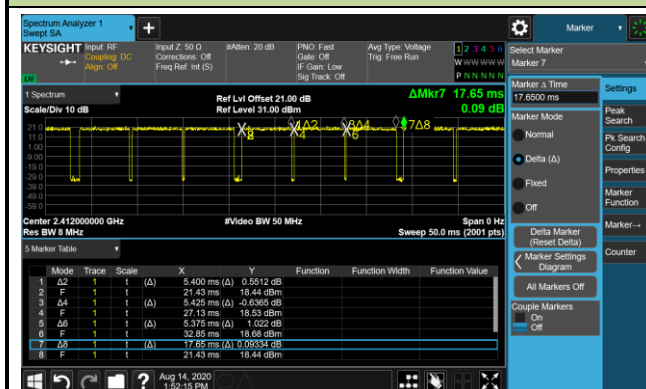

#### 802.11n-HT40 (T = 10.700ms)

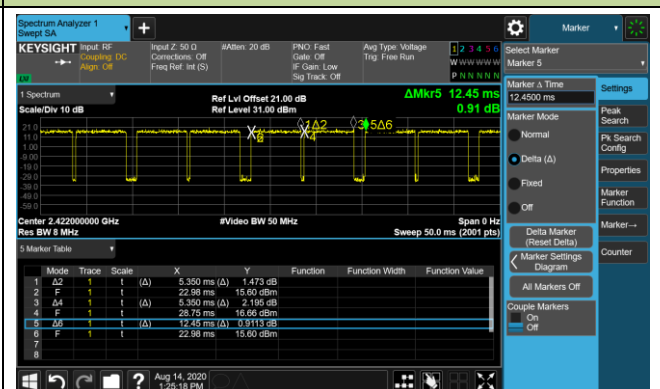

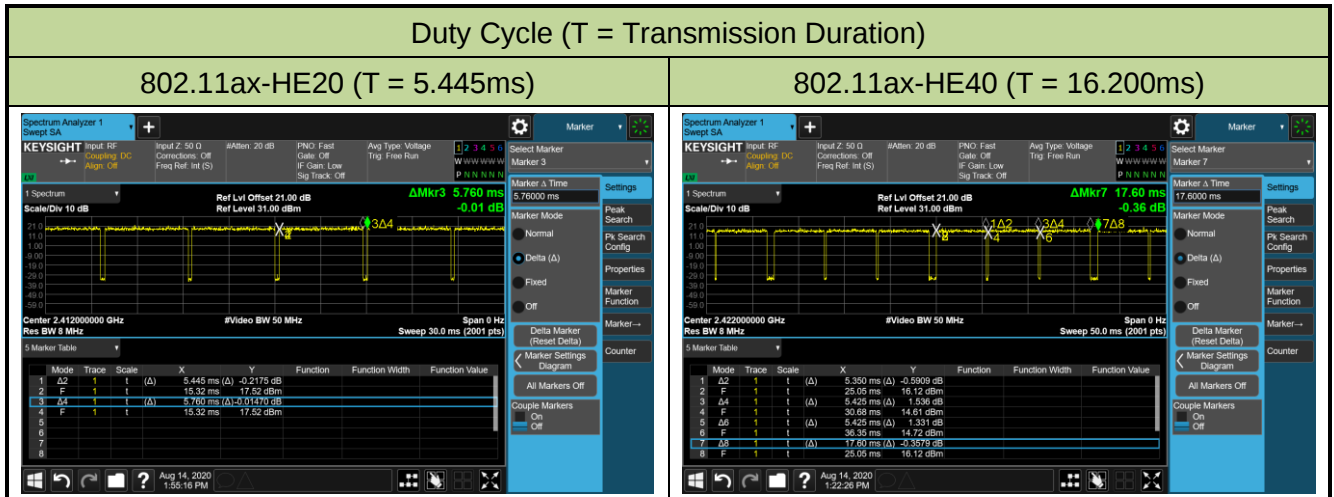

## 2.13. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.14. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. ANTENNA REQUIREMENTS

#### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

#### **Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. TEST EQUIPMENT CALIBRATION DATE

##### Conducted Emissions - SR2

| Instrument         | Manufacturer | Type No. | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------|--------------|----------|-------------|----------------|----------------|
| EMI Test Receiver  | R&S          | ESR3     | MRTSUE06185 | 1 year         | 2021/01/18     |
| Two-Line V-Network | R&S          | ENV 216  | MRTSUE06002 | 1 year         | 2021/06/11     |
| Two-Line V-Network | R&S          | ENV 216  | MRTSUE06003 | 1 year         | 2021/06/11     |
| Thermohygrometer   | Testo        | 608-H1   | MRTSUE06404 | 1 year         | 2021/07/26     |

##### Radiated Emissions - AC2

| Instrument                 | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR7        | MRTSUE06001 | 1 year         | 2021/01/18     |
| PXA Signal Analyzer        | Keysight     | 9030B       | MRTSUE06395 | 1 year         | 2020/09/03     |
| Loop Antenna               | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2020/11/13     |
| Bilog Period Antenna       | Schwarzbeck  | VULB 9168   | MRTSUE06172 | 1 year         | 2021/04/03     |
| Broad Band Horn Antenna    | Schwarzbeck  | BBHA 9120D  | MRTSUE06023 | 1 year         | 2020/10/13     |
| Broad Band Horn Antenna    | Schwarzbeck  | BBHA 9170   | MRTSUE06597 | 1 year         | 2020/12/17     |
| Microwave System Amplifier | Agilent      | 83017A      | MRTSUE06076 | 1 year         | 2020/11/15     |
| Preamplifier               | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2021/06/11     |
| Thermohygrometer           | Testo        | 608-H1      | MRTSUE06403 | 1 year         | 2021/07/26     |
| Anechoic Chamber           | TDK          | Chamber-AC2 | MRTSUE06212 | 1 year         | 2021/04/30     |

##### Radiated Emission - AC2

| Instrument                     | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------------------|--------------|-------------|-------------|----------------|----------------|
| Spectrum Analyzer              | Keysight     | N9038A      | MRTSUE06125 | 1 year         | 2021/07/02     |
| Loop Antenna                   | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2020/11/13     |
| Bilog Period Antenna           | Schwarzbeck  | VULB 9162   | MRTSUE06022 | 1 year         | 2020/10/13     |
| Horn Antenna                   | Schwarzbeck  | BBHA9120D   | MRTSUE06171 | 1 year         | 2020/10/27     |
| Broad Band Horn Antenna        | Schwarzbeck  | BBHA 9170   | MRTSUE06597 | 1 year         | 2020/12/17     |
| Broadband Coaxial Preamplifier | Schwarzbeck  | BBV 9718    | MRTSUE06176 | 1 year         | 2020/11/15     |
| Preamplifier                   | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2021/06/11     |
| Temperature/Humidity Meter     | Minggao      | ETH529      | MRTSUE06170 | 1 year         | 2020/12/15     |
| Anechoic Chamber               | RIKEN        | Chamber-AC2 | MRTSUE06213 | 1 year         | 2021/04/30     |

## Conducted Test Equipment - TR3

| Instrument                             | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------------------|--------------|-------------|-------------|----------------|----------------|
| EXA Signal Analyzer                    | Agilent      | N9020A      | MRTSUE06106 | 1 year         | 2021/04/14     |
| EXA Signal Analyzer                    | Keysight     | N9010B      | MRTSUE06452 | 1 year         | 2021/01/08     |
| Signal Analyzer                        | R&S          | FSV40       | MRTSUE06218 | 1 year         | 2021/04/14     |
| Power Meter                            | Agilent      | U2021XA     | MRTSUE06030 | 1 year         | 2020/11/18     |
| USB wideband power sensor              | Keysight     | U2021XA     | MRTSUE06446 | 1 year         | 2021/06/11     |
| USB wideband power sensor              | Keysight     | U2021XA     | MRTSUE06447 | 1 year         | 2021/06/11     |
| Bluetooth Test Set                     | Anritsu      | MT8852B-042 | MRTSUE06389 | 1 year         | 2021/06/11     |
| Audio Analyzer                         | Agilent      | U8903B      | MRTSUE06143 | 1 year         | 2021/06/11     |
| Modulation Analyzer                    | HP           | 8901A       | MRTSUE06098 | 1 year         | 2020/10/10     |
| Wideband Radio<br>Communication Tester | R&S          | CMW 500     | MRTSUE06243 | 1 year         | 2020/11/07     |
| DC Power Supply                        | GWINSTEK     | DPS-3303C   | MRTSUE06064 | N/A            | N/A            |
| Attenuator                             | MVE          | 6dB         | MRTSUE06534 | 1 year         | 2020/12/12     |
| Attenuator                             | MVE          | 10dB        | MRTSUE06543 | 1 year         | 2020/12/12     |
| Temperature & Humidity<br>Chamber      | BAOYT        | BYH-150CL   | MRTSUE06051 | 1 year         | 2020/11/07     |
| Thermohygrometer                       | testo        | 608-H1      | MRTSUE06401 | 1 year         | 2021/07/26     |

| Software     | Version | Function          |
|--------------|---------|-------------------|
| EMI Software | V3      | EMI Test Software |

## 5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Conducted Emission Measurement</b>                                                                                                                                                                                                  |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>9kHz~150kHz: 3.74dB<br>150kHz~30MHz: 3.44dB                                                                                                               |
| <b>Radiated Disturbance</b>                                                                                                                                                                                                            |
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>Horizontal: 9KHz~300MHz: 5.04dB<br>300MHz~1GHz: 4.95dB<br>1GHz~6GHz: 6.40dB<br>Vertical: 9KHz~300MHz: 5.24dB<br>300MHz~1GHz: 6.03dB<br>1GHz~40GHz: 6.40dB |
| <b>Spurious Emissions, Conducted</b>                                                                                                                                                                                                   |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ): 0.78dB                                                                                                                                                         |
| <b>Output Power</b>                                                                                                                                                                                                                    |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ): 1.13dB                                                                                                                                                         |
| <b>Power Spectrum Density</b>                                                                                                                                                                                                          |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ): 1.15dB                                                                                                                                                         |
| <b>Occupied Bandwidth</b>                                                                                                                                                                                                              |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ): 0.28%                                                                                                                                                          |

## 6. TEST RESULT

### 6.1. Summary

| FCC Section(s)   | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference         |
|------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(a)(2)     | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           | Conducted      | Pass        | Section 6.2       |
| 15.247(b)(3)     | Output Power                                                                  | $\leq 30\text{dBm}$                                                            |                | Pass        | Section 6.3       |
| 15.247(e)        | Power Spectral Density                                                        | $\leq 8\text{dBm}/3\text{kHz}$                                                 |                | Pass        | Section 6.4       |
| 15.247(d)        | Band Edge / Out-of-Band Emissions                                             | $\geq 30\text{dBc(Average)}$                                                   |                | Pass        | Section 6.5       |
| 15.205<br>15.209 | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | Pass        | Section 7.6 & 7.7 |
| 15.207           | AC Conducted Emissions<br>150kHz - 30MHz                                      | < FCC 15.207 limits                                                            | Line Conducted | Pass        | Section 6.8       |

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for the final test of each channel.
- 3) For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- 4) Test Items "6dB Bandwidth" showed the worst test data in this report.
- 5) EUT supports one configuration only in 802.11ax full RU mode, i.e. 242 tone in 11ax-HE20 and 484 tone in 11ax-HE40.

## 6.2. 6dB Bandwidth Measurement

### 6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 6.2.2. Test Procedure used

ANSI C63.10 Section 11.8

### 6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 6.2.4. Test Setup

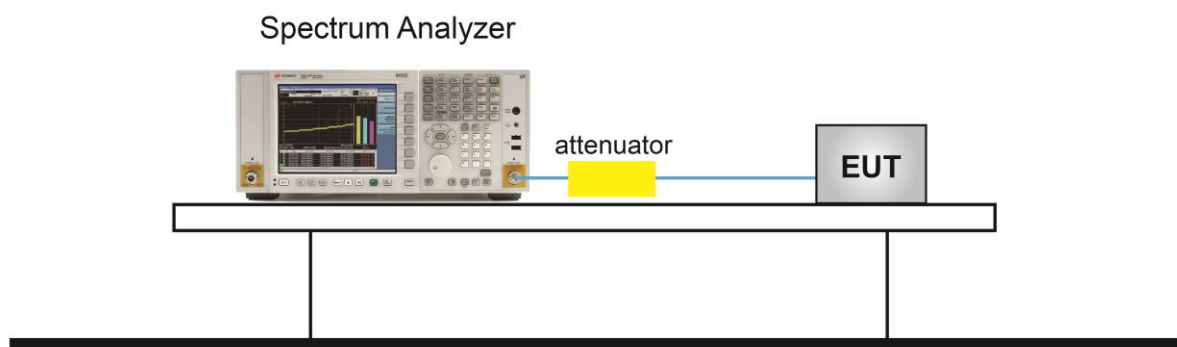


### 6.2.5.Test Result

|           |                    |               |           |
|-----------|--------------------|---------------|-----------|
| Product   | GigaSpire BLAST u4 | Test Engineer | Amy Zhang |
| Test Date | 2020/07/09         | Test Site     | TR3       |

| Test Mode         | Data Rate / MCS | Channel No. | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) | Result |
|-------------------|-----------------|-------------|-----------------|---------------------|-------------|--------|
| Ant 0 / Ant 0 + 1 |                 |             |                 |                     |             |        |
| 802.11b           | 1Mbps           | 01          | 2412            | 8.07                | $\geq 0.5$  | Pass   |
| 802.11b           | 1Mbps           | 06          | 2437            | 8.06                | $\geq 0.5$  | Pass   |
| 802.11b           | 1Mbps           | 11          | 2462            | 7.59                | $\geq 0.5$  | Pass   |
| 802.11g           | 6Mbps           | 01          | 2412            | 16.34               | $\geq 0.5$  | Pass   |
| 802.11g           | 6Mbps           | 06          | 2437            | 15.64               | $\geq 0.5$  | Pass   |
| 802.11g           | 6Mbps           | 11          | 2462            | 16.03               | $\geq 0.5$  | Pass   |
| 802.11n-HT20      | MCS0            | 01          | 2412            | 16.30               | $\geq 0.5$  | Pass   |
| 802.11n-HT20      | MCS0            | 06          | 2437            | 17.54               | $\geq 0.5$  | Pass   |
| 802.11n-HT20      | MCS0            | 11          | 2462            | 17.32               | $\geq 0.5$  | Pass   |
| 802.11n-HT40      | MCS0            | 03          | 2422            | 36.34               | $\geq 0.5$  | Pass   |
| 802.11n-HT40      | MCS0            | 06          | 2437            | 36.32               | $\geq 0.5$  | Pass   |
| 802.11n-HT40      | MCS0            | 09          | 2452            | 36.30               | $\geq 0.5$  | Pass   |
| 802.11ax-HE20     | MCS0            | 01          | 2412            | 17.95               | $\geq 0.5$  | Pass   |
| 802.11ax-HE20     | MCS0            | 06          | 2437            | 18.02               | $\geq 0.5$  | Pass   |
| 802.11ax-HE20     | MCS0            | 11          | 2462            | 18.57               | $\geq 0.5$  | Pass   |
| 802.11ax-HE40     | MCS0            | 03          | 2422            | 37.88               | $\geq 0.5$  | Pass   |
| 802.11ax-HE40     | MCS0            | 06          | 2437            | 37.92               | $\geq 0.5$  | Pass   |
| 802.11ax-HE40     | MCS0            | 09          | 2452            | 37.72               | $\geq 0.5$  | Pass   |

## 802.11b 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 01 (2412MHz)

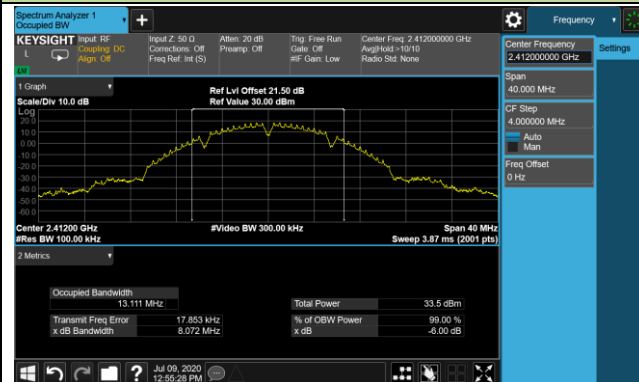

## Channel 06 (2437MHz)




## Channel 11 (2462MHz)



## 802.11g 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 01 (2412MHz)

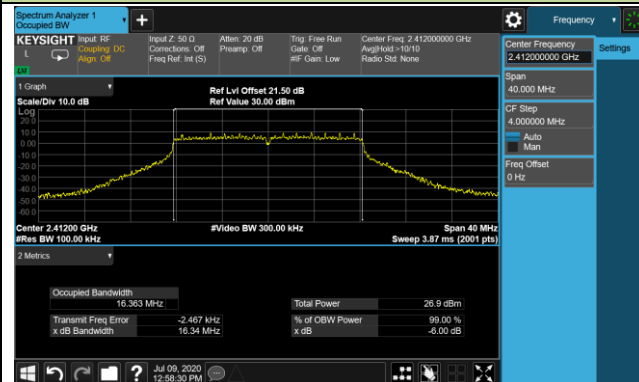

## Channel 06 (2437MHz)




## Channel 11 (2462MHz)

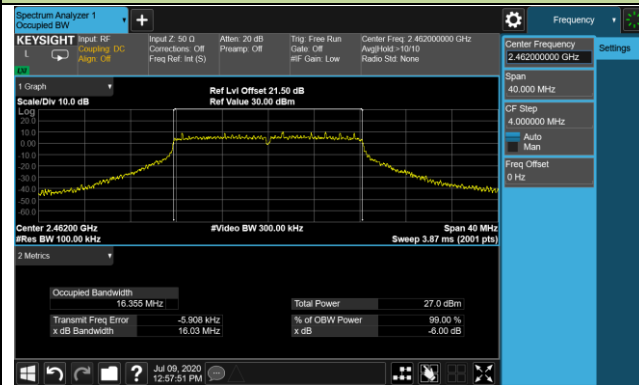


## 802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 01 (2412MHz)

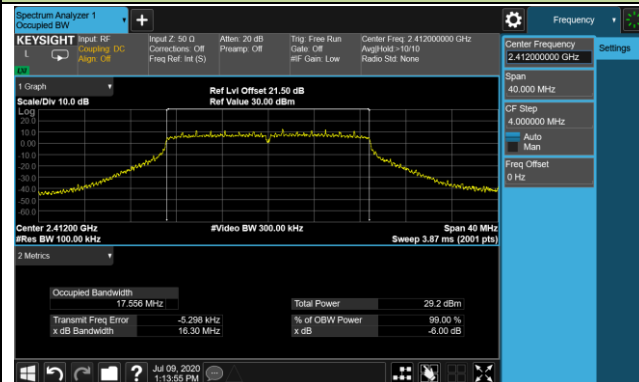

## Channel 06 (2437MHz)

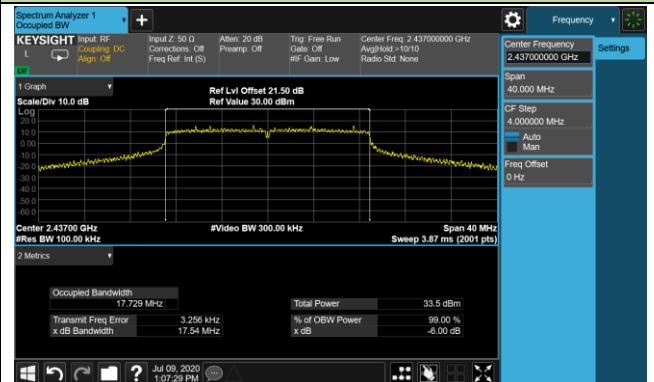


## Channel 11 (2462MHz)

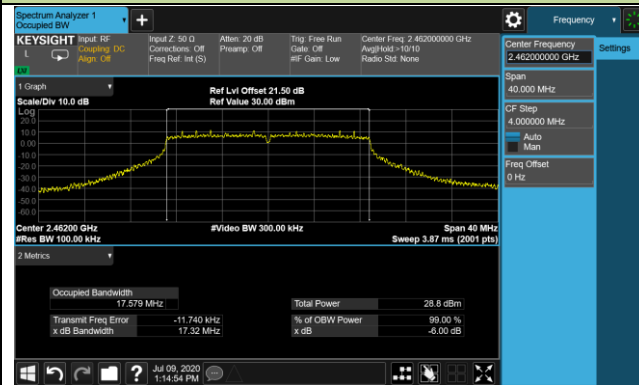


## 802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 03 (2422MHz)

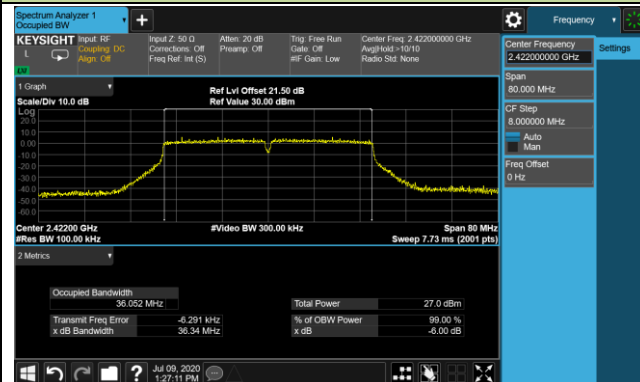

## Channel 06 (2437MHz)

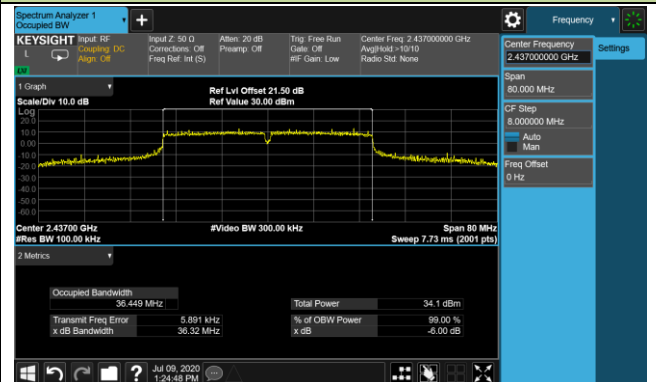


## Channel 09 (2452MHz)

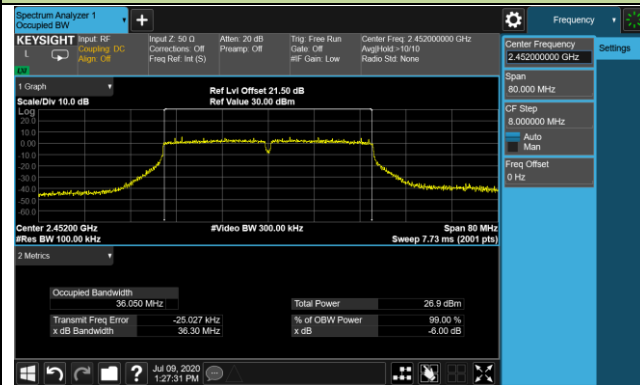


## 802.11ax-HE20 6dB Bandwidth - Ant 0 / Ant 0 + 1



## Channel 01 (2412MHz)

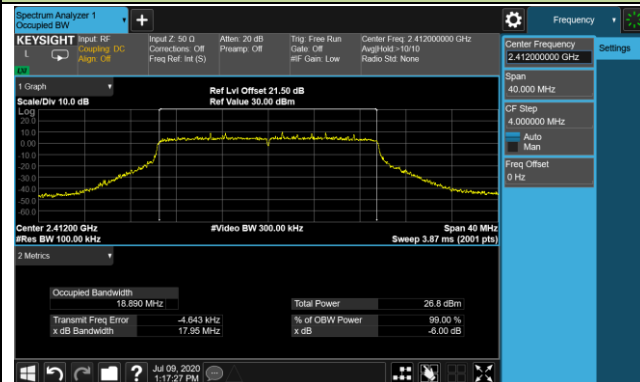

## Channel 06 (2437MHz)

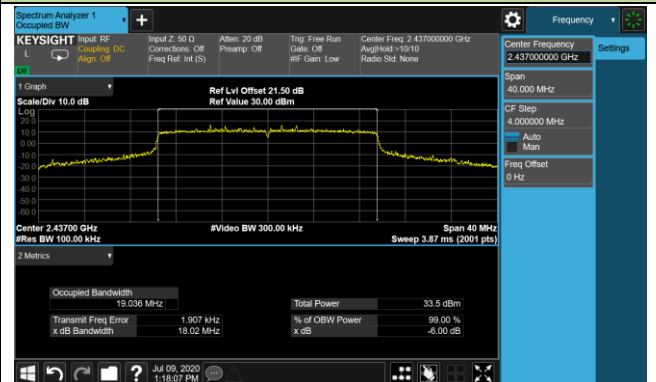


## Channel 11 (2462MHz)

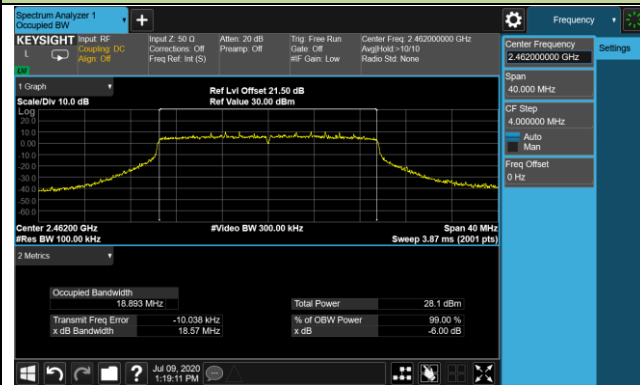


## 802.11ax-HE40 6dB Bandwidth - Ant 0 / Ant 0 + 1


## Channel 03 (2422MHz)

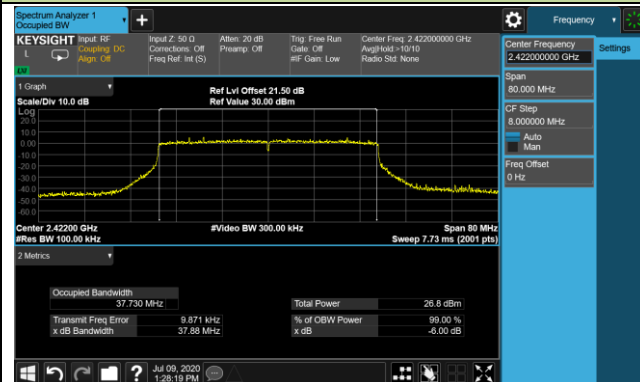

## Channel 06 (2437MHz)

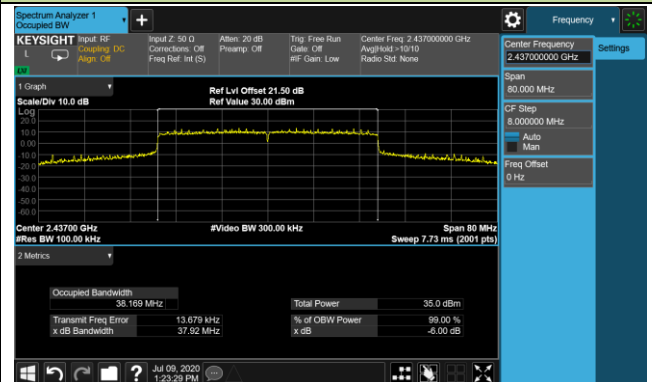

## Channel 09 (2452MHz)

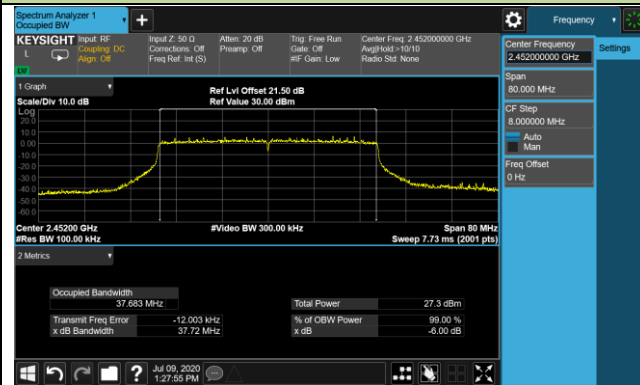

### **6.3. Output Power Measurement**

#### **6.3.1. Test Limit**

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **6.3.2. Test Procedure Used**


ANSI C63.10 Section 11.9.2.3.2

#### **6.3.3. Test Setting**

##### **Average Power Measurement**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

#### **6.3.4. Test Setup**

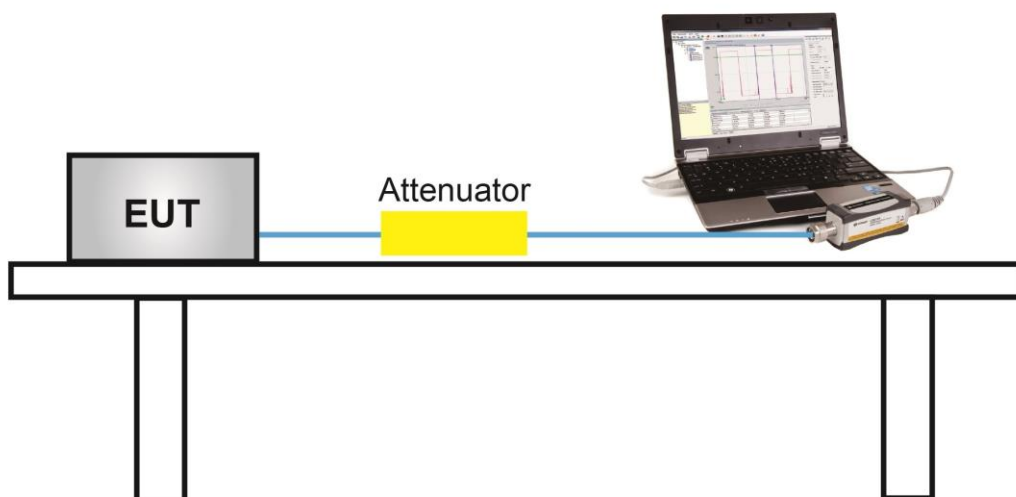

### 6.3.5.Test Result

|           |                    |               |           |
|-----------|--------------------|---------------|-----------|
| Product   | GigaSpire BLAST u4 | Test Engineer | Amy Zhang |
| Test Date | 2020/08/01         | Test Site     | TR3       |

| Test Mode        | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0<br>Average<br>Power (dBm) | Ant 1<br>Average<br>Power (dBm) | Total<br>Average<br>Power (dBm) | Limit<br>(dBm) | Result |
|------------------|-------------------|----------------|----------------|---------------------------------|---------------------------------|---------------------------------|----------------|--------|
| CDD Mode         |                   |                |                |                                 |                                 |                                 |                |        |
| 802.11b          | 1Mbps             | 01             | 2412           | 26.87                           | 26.82                           | 29.86                           | ≤ 30.00        | Pass   |
| 802.11b          | 1Mbps             | 06             | 2437           | 26.04                           | 26.16                           | 29.11                           | ≤ 30.00        | Pass   |
| 802.11b          | 1Mbps             | 11             | 2462           | 25.37                           | 25.68                           | 28.54                           | ≤ 30.00        | Pass   |
| 802.11g          | 6Mbps             | 01             | 2412           | 23.34                           | 23.26                           | 26.31                           | ≤ 30.00        | Pass   |
| 802.11g          | 6Mbps             | 06             | 2437           | 26.47                           | 26.63                           | 29.56                           | ≤ 30.00        | Pass   |
| 802.11g          | 6Mbps             | 11             | 2462           | 22.48                           | 22.13                           | 25.32                           | ≤ 30.00        | Pass   |
| 802.11n-HT20     | MCS0              | 01             | 2412           | 22.34                           | 22.10                           | 25.23                           | ≤ 30.00        | Pass   |
| 802.11n-HT20     | MCS0              | 06             | 2437           | 26.68                           | 26.79                           | 29.75                           | ≤ 30.00        | Pass   |
| 802.11n-HT20     | MCS0              | 11             | 2462           | 22.21                           | 22.26                           | 25.25                           | ≤ 30.00        | Pass   |
| 802.11n-HT40     | MCS0              | 03             | 2422           | 21.42                           | 21.21                           | 24.33                           | ≤ 30.00        | Pass   |
| 802.11n-HT40     | MCS0              | 06             | 2437           | 26.16                           | 26.08                           | 29.13                           | ≤ 30.00        | Pass   |
| 802.11n-HT40     | MCS0              | 09             | 2452           | 20.38                           | 20.27                           | 23.34                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20    | MCS0              | 01             | 2412           | 22.35                           | 22.13                           | 25.25                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20    | MCS0              | 06             | 2437           | 26.71                           | 26.62                           | 29.68                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20    | MCS0              | 11             | 2462           | 22.38                           | 22.11                           | 25.26                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40    | MCS0              | 03             | 2422           | 21.14                           | 20.88                           | 24.02                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40    | MCS0              | 06             | 2437           | 26.99                           | 26.77                           | 29.89                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40    | MCS0              | 09             | 2452           | 19.03                           | 18.92                           | 21.99                           | ≤ 30.00        | Pass   |
| Beamforming Mode |                   |                |                |                                 |                                 |                                 |                |        |
| 802.11ax-HE20    | MCS0              | 01             | 2412           | 21.22                           | 21.05                           | 24.15                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20    | MCS0              | 06             | 2437           | 26.71                           | 26.62                           | 29.68                           | ≤ 30.00        | Pass   |
| 802.11ax-HE20    | MCS0              | 11             | 2462           | 20.42                           | 20.01                           | 23.23                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40    | MCS0              | 03             | 2422           | 20.04                           | 20.01                           | 23.04                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40    | MCS0              | 06             | 2437           | 26.99                           | 26.77                           | 29.89                           | ≤ 30.00        | Pass   |
| 802.11ax-HE40    | MCS0              | 09             | 2452           | 17.96                           | 18.03                           | 21.01                           | ≤ 30.00        | Pass   |

Note: Total Average Power (dBm) =  $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$

## **6.4. Power Spectral Density Measurement**

### **6.4.1. Test Limit**

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### **6.4.2. Test Procedure Used**

ANSI C63.10 Section 11.10.5

### **6.4.3. Test Setting**

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

#### 6.4.4. Test Setup

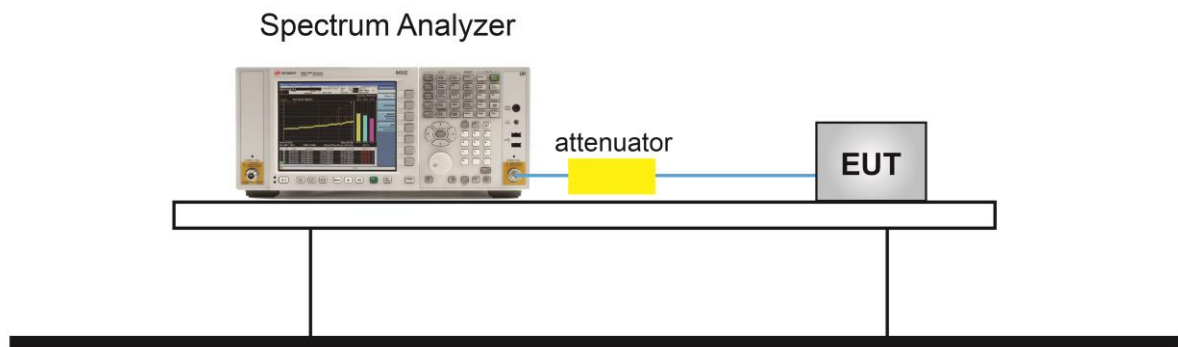

### 6.4.5. Test Result

|           |                    |               |           |
|-----------|--------------------|---------------|-----------|
| Product   | GigaSpire BLAST u4 | Test Engineer | Amy Zhang |
| Test Date | 2020/07/01         | Test Site     | TR3       |

| Test Mode     | Data Rate/<br>MCS | Channel<br>No. | Freq.<br>(MHz) | Ant 0 PSD<br>(dBm/<br>10kHz) | Ant 1 PSD<br>(dBm/<br>10kHz) | Duty<br>Cycle<br>(%) | Total PSD<br>(dBm/<br>10kHz) | Limit<br>(dBm/<br>3kHz) | Result |
|---------------|-------------------|----------------|----------------|------------------------------|------------------------------|----------------------|------------------------------|-------------------------|--------|
| CDD Mode      |                   |                |                |                              |                              |                      |                              |                         |        |
| 802.11b       | 1Mbps             | 01             | 2412           | -1.49                        | -1.81                        | 62.58                | 3.40                         | ≤ 8.00                  | Pass   |
| 802.11b       | 1Mbps             | 06             | 2437           | -0.81                        | -2.28                        | 62.58                | 3.56                         | ≤ 8.00                  | Pass   |
| 802.11b       | 1Mbps             | 11             | 2462           | -0.99                        | -1.77                        | 62.58                | 3.68                         | ≤ 8.00                  | Pass   |
| 802.11g       | 6Mbps             | 01             | 2412           | -10.54                       | -11.24                       | 93.25                | -7.56                        | ≤ 8.00                  | Pass   |
| 802.11g       | 6Mbps             | 06             | 2437           | -3.18                        | -3.45                        | 93.25                | 0.00                         | ≤ 8.00                  | Pass   |
| 802.11g       | 6Mbps             | 11             | 2462           | -10.17                       | -10.11                       | 93.25                | -6.83                        | ≤ 8.00                  | Pass   |
| 802.11n-HT20  | MCS0              | 01             | 2412           | -8.93                        | -8.78                        | 91.78                | -5.47                        | ≤ 8.00                  | Pass   |
| 802.11n-HT20  | MCS0              | 06             | 2437           | -3.90                        | -4.20                        | 91.78                | -0.66                        | ≤ 8.00                  | Pass   |
| 802.11n-HT20  | MCS0              | 11             | 2462           | -9.83                        | -9.54                        | 91.78                | -6.30                        | ≤ 8.00                  | Pass   |
| 802.11n-HT40  | MCS0              | 03             | 2422           | -13.32                       | -13.62                       | 85.94                | -9.80                        | ≤ 8.00                  | Pass   |
| 802.11n-HT40  | MCS0              | 06             | 2437           | -7.72                        | -7.73                        | 85.94                | -4.06                        | ≤ 8.00                  | Pass   |
| 802.11n-HT40  | MCS0              | 09             | 2452           | -16.14                       | -15.74                       | 85.94                | -12.27                       | ≤ 8.00                  | Pass   |
| 802.11ax-HE20 | MCS0              | 01             | 2412           | -10.72                       | -10.99                       | 94.53                | -7.60                        | ≤ 8.00                  | Pass   |
| 802.11ax-HE20 | MCS0              | 06             | 2437           | -5.45                        | -5.66                        | 94.53                | -2.30                        | ≤ 8.00                  | Pass   |
| 802.11ax-HE20 | MCS0              | 11             | 2462           | -12.55                       | -12.66                       | 94.53                | -9.35                        | ≤ 8.00                  | Pass   |
| 802.11ax-HE40 | MCS0              | 03             | 2422           | -14.74                       | -15.15                       | 92.05                | -11.57                       | ≤ 8.00                  | Pass   |
| 802.11ax-HE40 | MCS0              | 06             | 2437           | -8.19                        | -8.33                        | 92.05                | -4.89                        | ≤ 8.00                  | Pass   |
| 802.11ax-HE40 | MCS0              | 09             | 2452           | -17.72                       | -17.03                       | 92.05                | -13.99                       | ≤ 8.00                  | Pass   |


Note 1: When EUT duty cycle ≥ 98%, Total AVGPDS =  $10 \cdot \log \{10^{(\text{Ant 0 AVGPDS}/10)} + 10^{(\text{Ant 1 AVGPDS}/10)}\}$ .

Note 2: When EUT duty cycle ≤ 98%, Total AVGPDS =  $10 \cdot \log \{10^{(\text{Ant 0 AVGPDS}/10)} + 10^{(\text{Ant 1 AVGPDS}/10)}\} + 10 \cdot \log(1/\text{duty cycle})$ .


Note 3: Due to the power setting of beamforming mode is less than CDD mode, so beamforming mode result is not reported.

## 802.11b AVGPDS - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

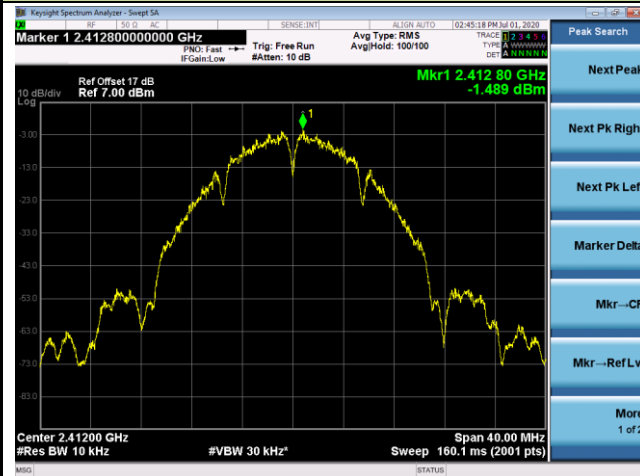

## Channel 06 (2437MHz)

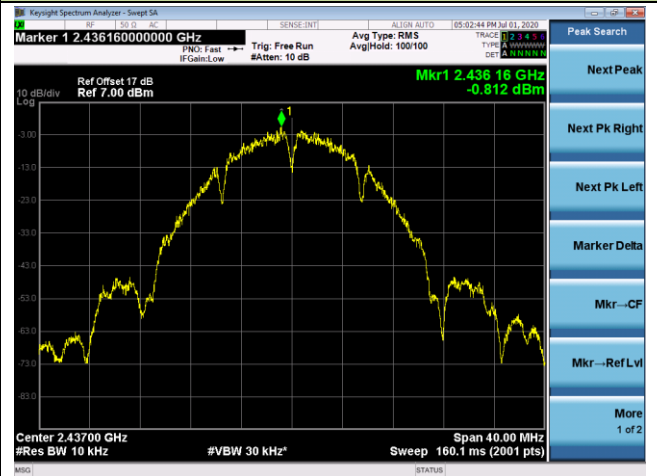


## Channel 11 (2462MHz)

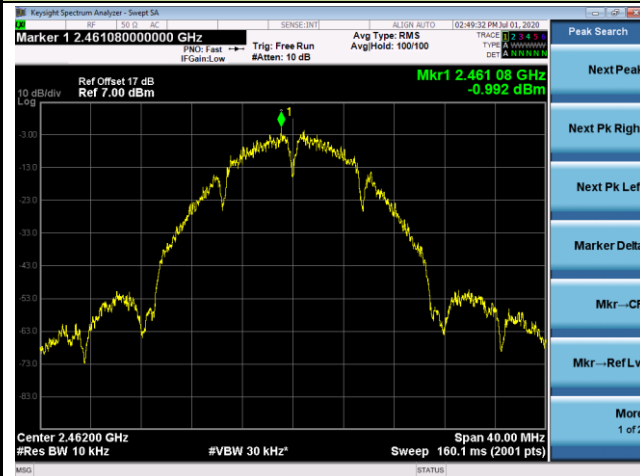


## 802.11g AVGPSD - Ant 0 / Ant 0 + 1 (CDD Mode)


Channel 01 (2412MHz)

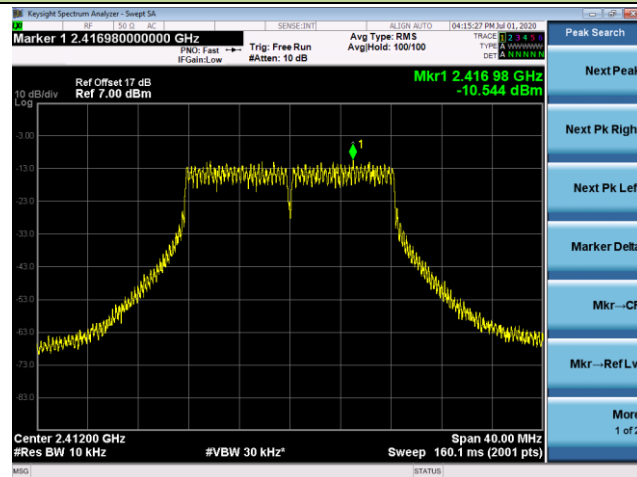

Channel 06 (2437MHz)

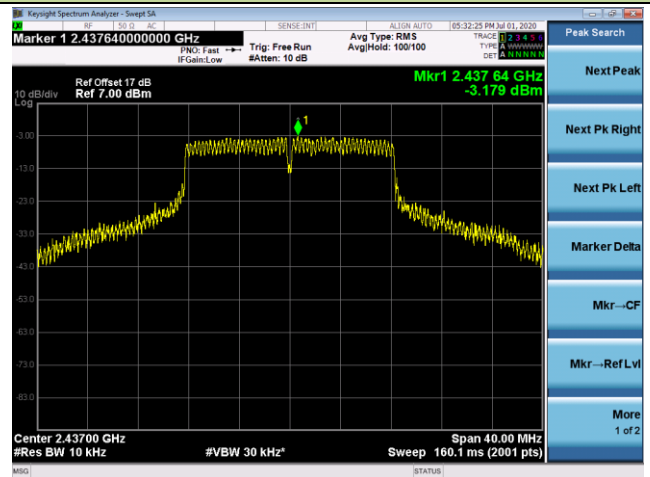


## Channel 11 (2462MHz)

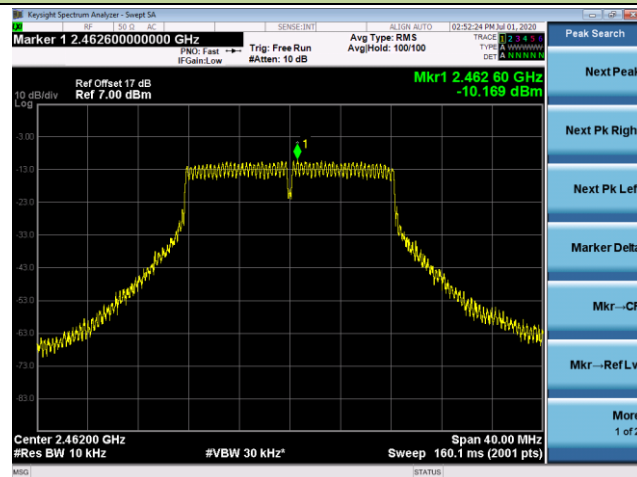


## 802.11n-HT20 AVGPSPD - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

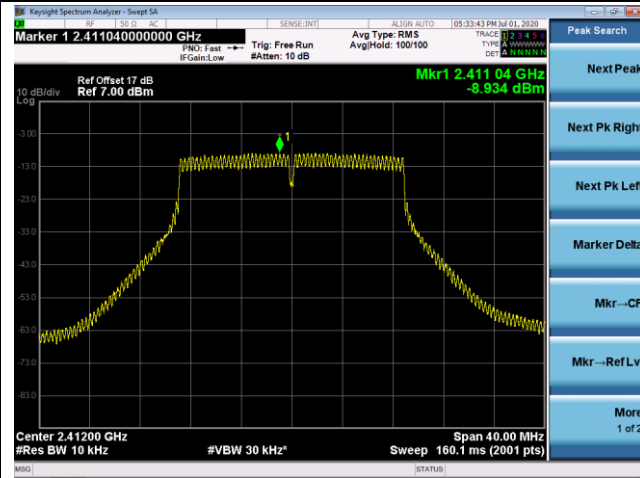

## Channel 06 (2437MHz)

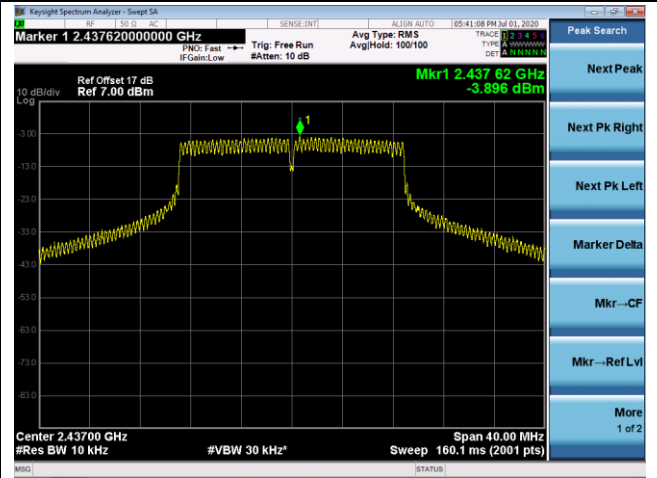


## Channel 11 (2462MHz)

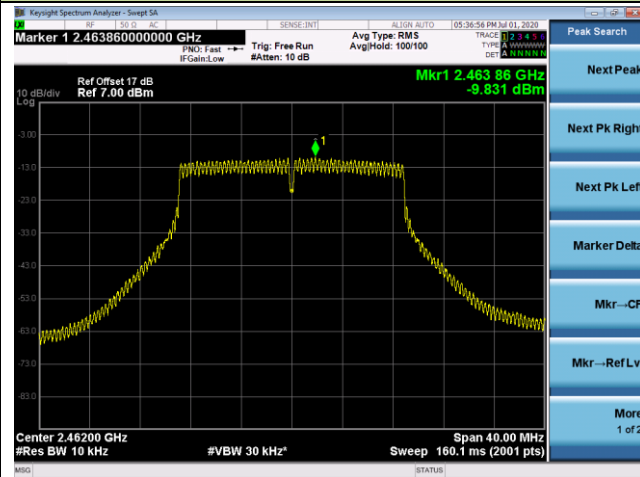


## 802.11n-HT40 AVGPSSD - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 03 (2422MHz)

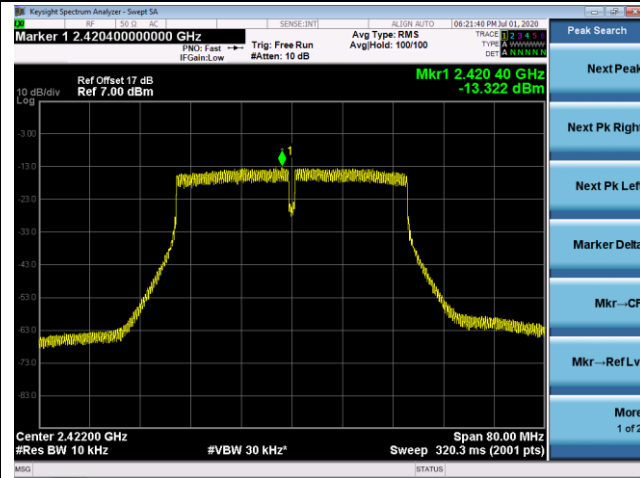

## Channel 06 (2437MHz)

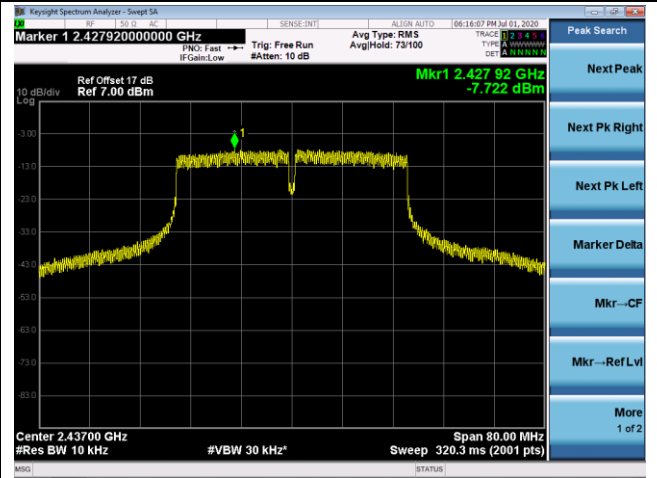


## Channel 09 (2452MHz)

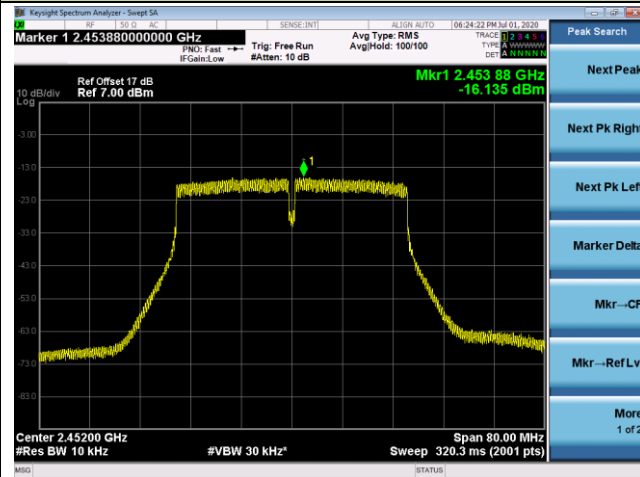

## 802.11ax-HE20 AVGPDS - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

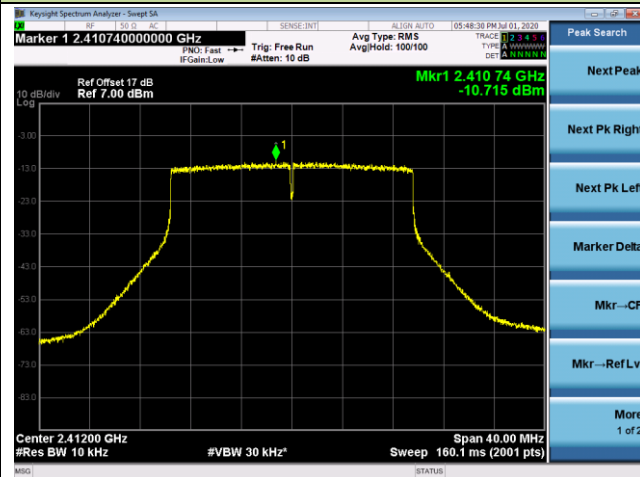

## Channel 06 (2437MHz)




## Channel 11 (2462MHz)

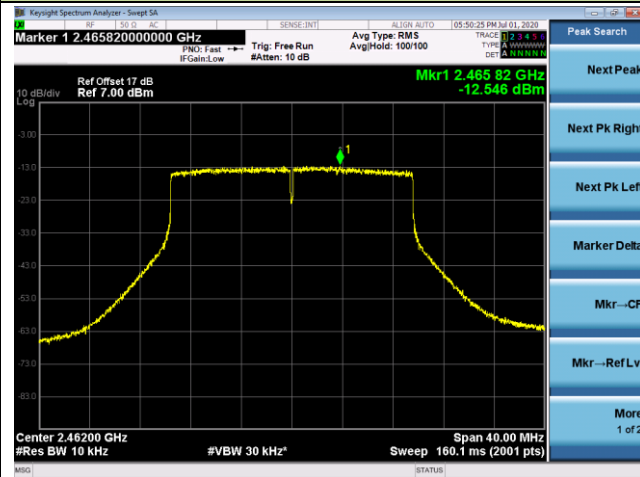


## 802.11ax-HE40 AVGPDS - Ant 0 / Ant 0 + 1 (CDD Mode)


## Channel 03 (2422MHz)

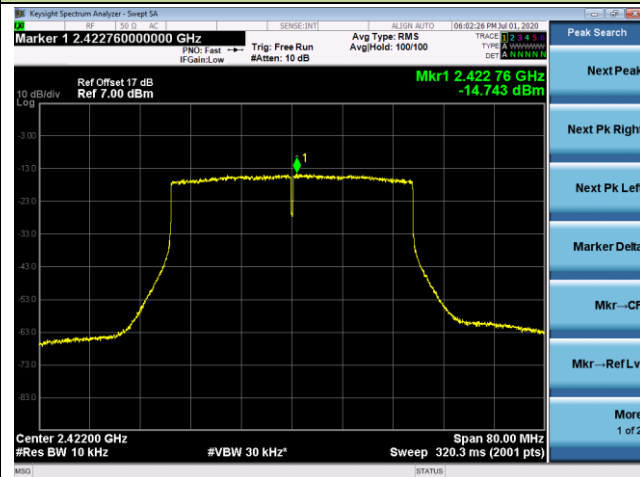

## Channel 06 (2437MHz)

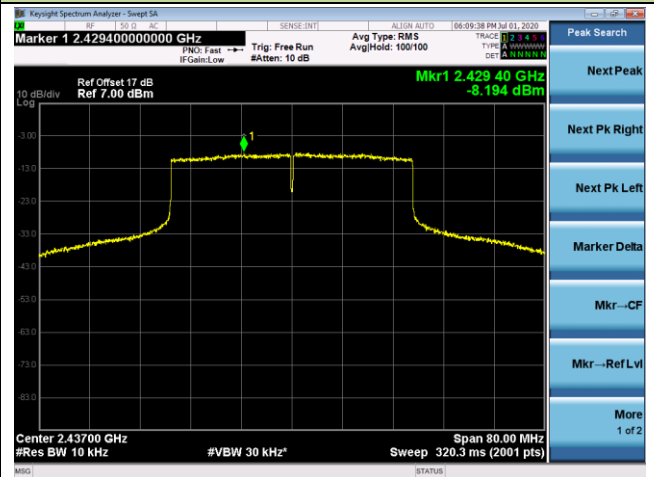


## Channel 09 (2452MHz)

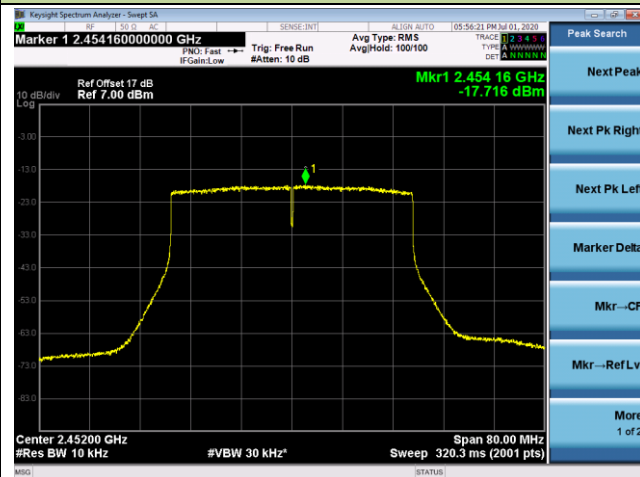


## 802.11b AVGPSD - Ant 1 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

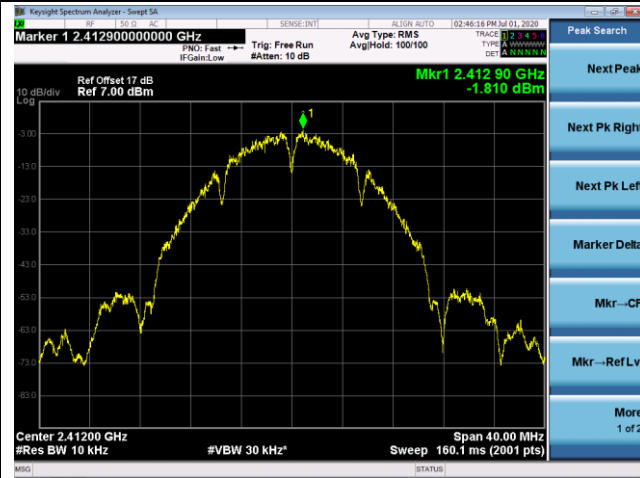

## Channel 06 (2437MHz)

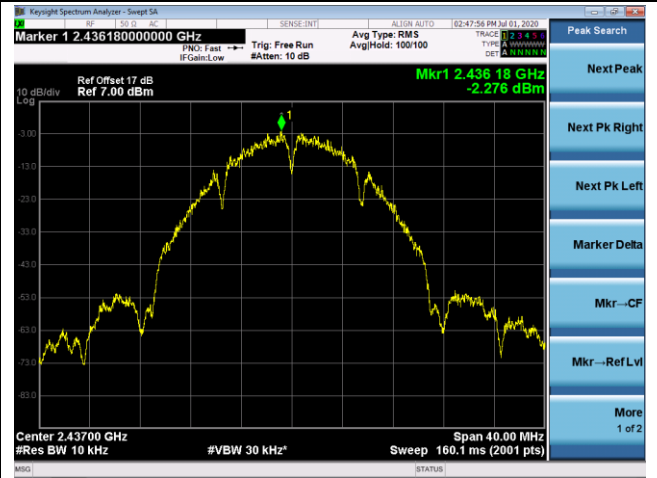


## Channel 11 (2462MHz)

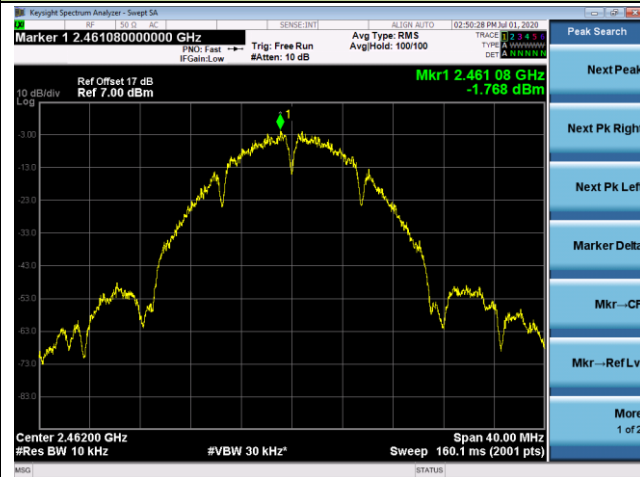


## 802.11g AVGPSD - Ant 1 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

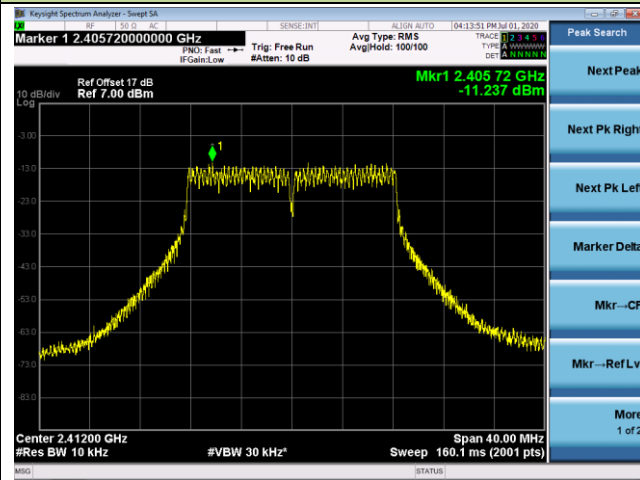

## Channel 06 (2437MHz)

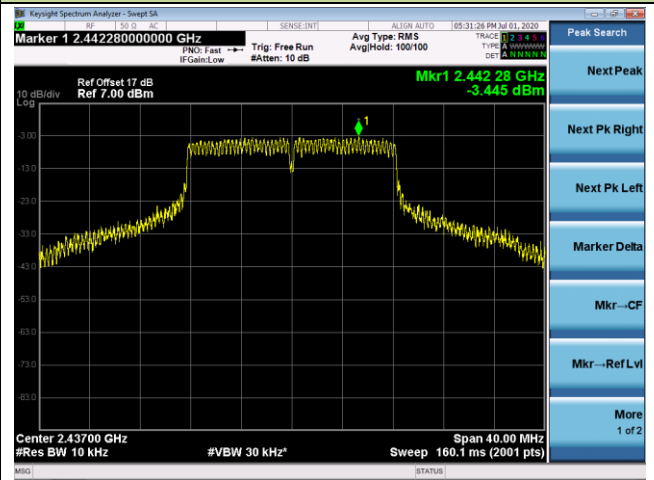


## Channel 11 (2462MHz)

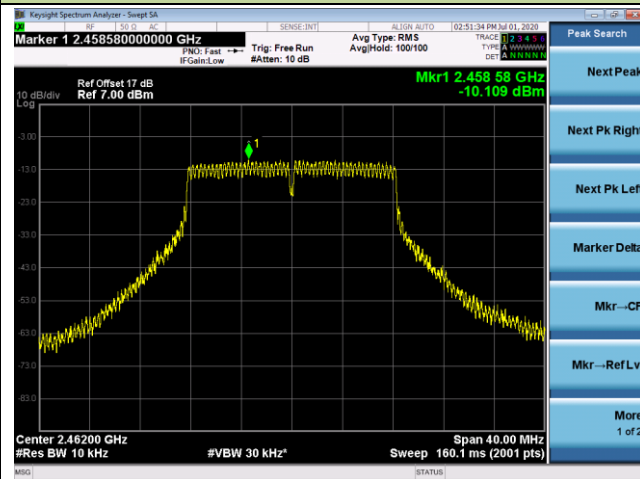


## 802.11n-HT20 AVGPSPD - Ant 1 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

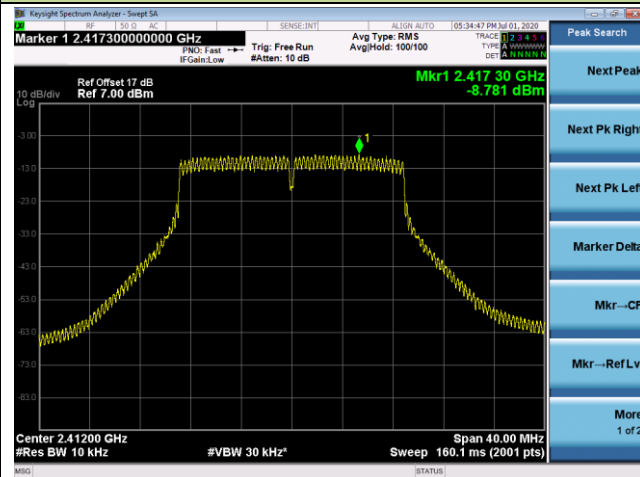

## Channel 06 (2437MHz)

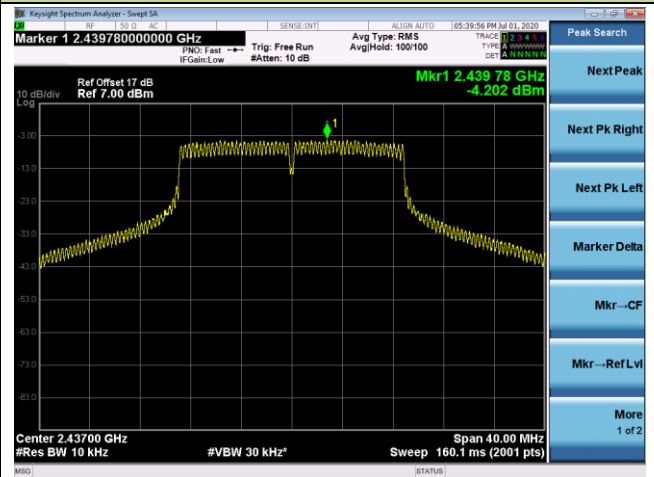


## Channel 11 (2462MHz)

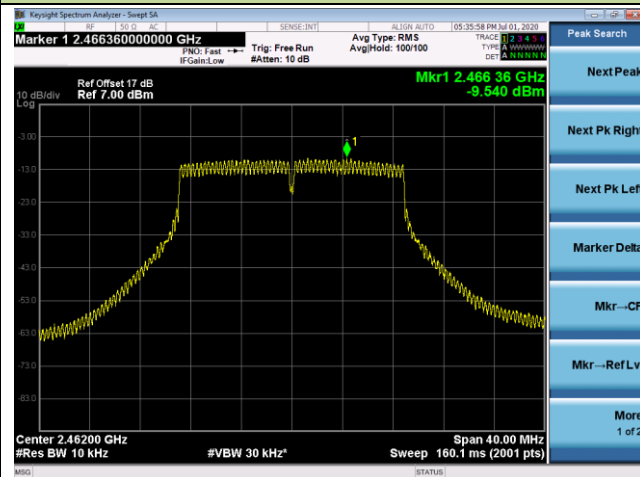


## 802.11n-HT40 AVGPSPD - Ant 1 / Ant 0 + 1 (CDD Mode)


## Channel 03 (2422MHz)

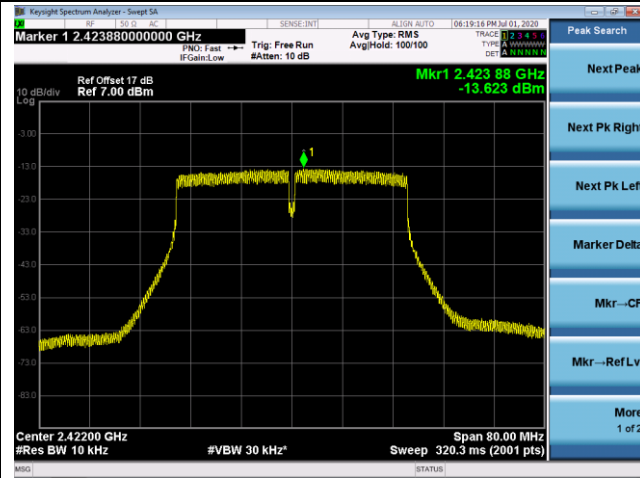

## Channel 06 (2437MHz)

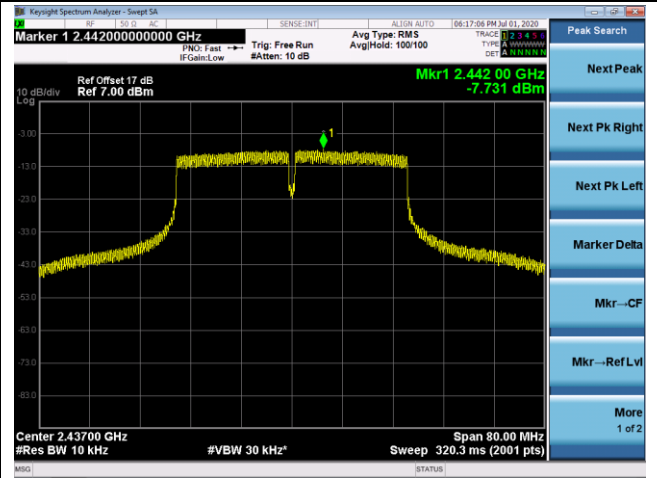


## Channel 09 (2452MHz)

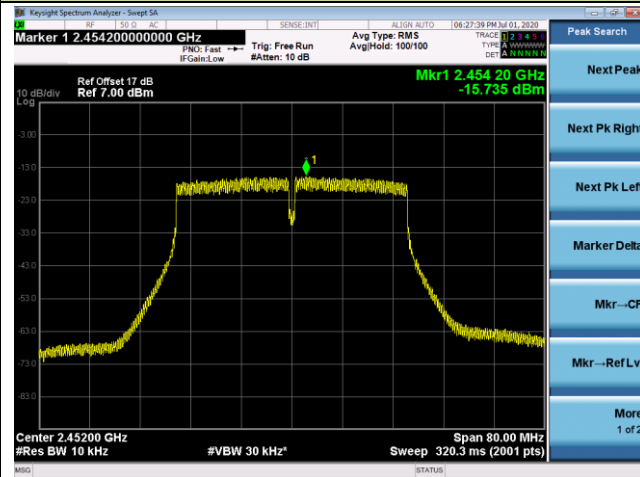

## 802.11ax-HE20 AVGPSPD - Ant 1 / Ant 0 + 1 (CDD Mode)


## Channel 01 (2412MHz)

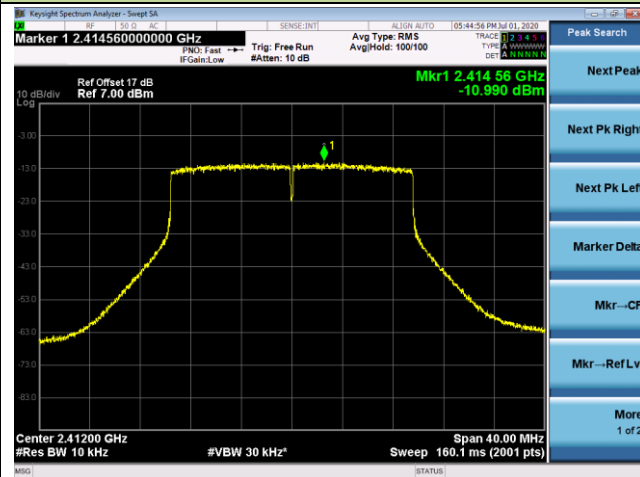

## Channel 06 (2437MHz)




## Channel 11 (2462MHz)

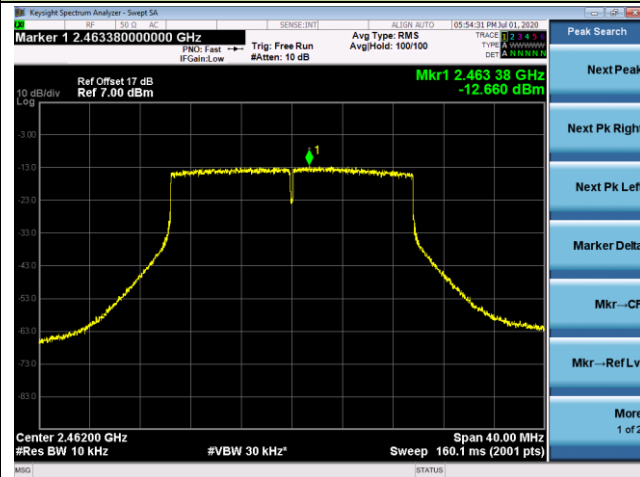


## 802.11ax-HE40 AVGPDS - Ant 1 / Ant 0 + 1 (CDD Mode)


## Channel 03 (2422MHz)

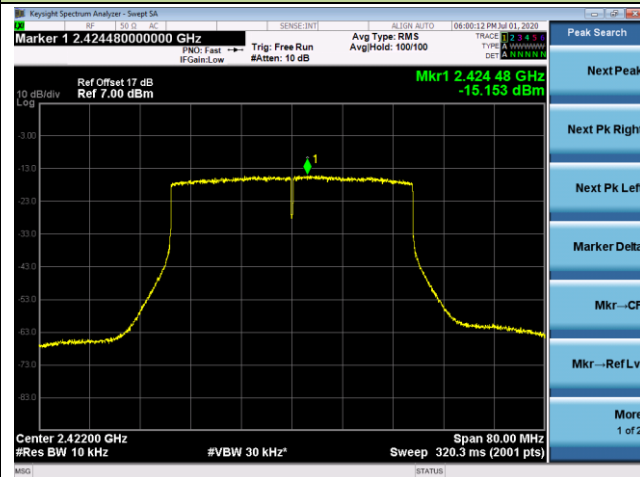

## Channel 06 (2437MHz)

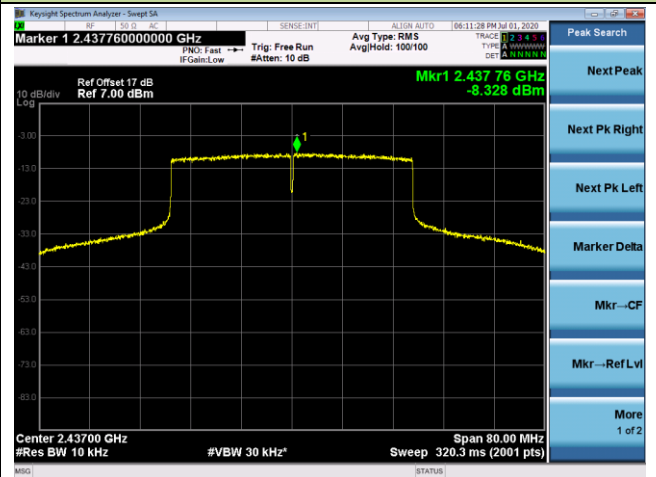

## Channel 09 (2452MHz)

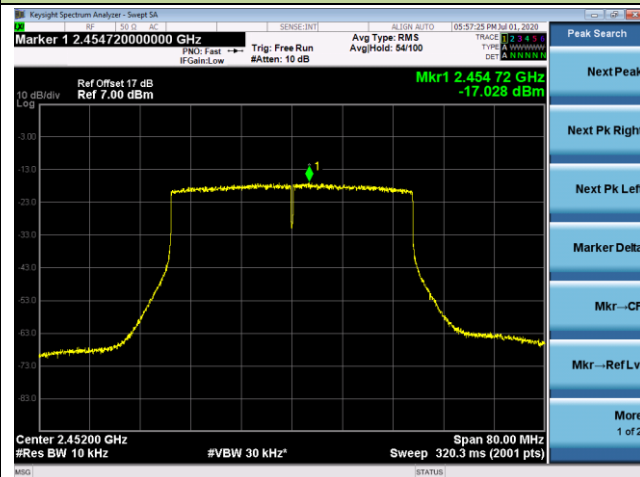

## **6.5. Conducted Band Edge and Out-of-Band Emissions**

### **6.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **6.5.2. Test Procedure Used**

ANSI C63.10 Section 11.11

### **6.5.3. Test Setting**


#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100KHz
3. VBW = 300KHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

#### 6.5.4. Test Setup

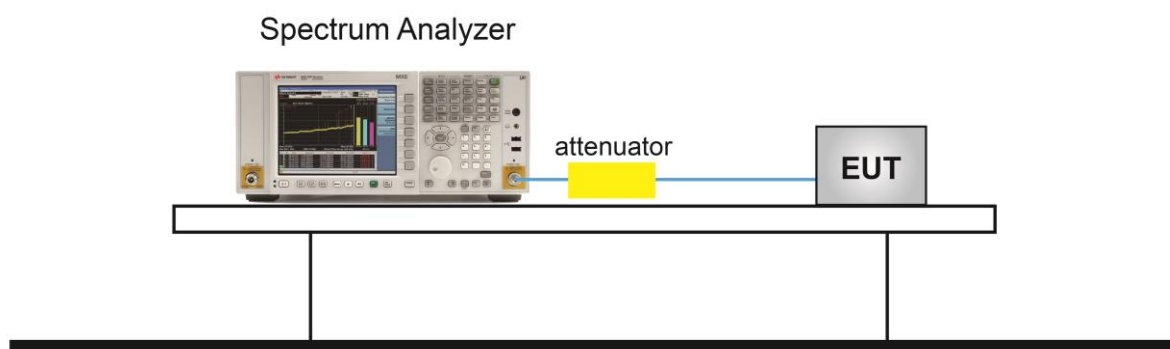

### 6.5.5.Test Result

|           |                         |               |           |
|-----------|-------------------------|---------------|-----------|
| Product   | GigaSpire BLAST u4      | Test Engineer | Amy Zhang |
| Test Date | 2020/07/09 ~ 2020/08/14 | Test Site     | TR3       |

| Test Mode     | Data Rate<br>/ MCS | Channel No. | Frequency<br>(MHz) | Limit<br>(dBc) | Result |
|---------------|--------------------|-------------|--------------------|----------------|--------|
| CDD mode      |                    |             |                    |                |        |
| 802.11b       | 1Mbps              | 01          | 2412               | 30             | Pass   |
| 802.11b       | 1Mbps              | 06          | 2437               | 30             | Pass   |
| 802.11b       | 1Mbps              | 11          | 2462               | 30             | Pass   |
| 802.11g       | 6Mbps              | 01          | 2412               | 30             | Pass   |
| 802.11g       | 6Mbps              | 06          | 2437               | 30             | Pass   |
| 802.11g       | 6Mbps              | 11          | 2462               | 30             | Pass   |
| 802.11n-HT20  | MCS0               | 01          | 2412               | 30             | Pass   |
| 802.11n-HT20  | MCS0               | 06          | 2437               | 30             | Pass   |
| 802.11n-HT20  | MCS0               | 11          | 2462               | 30             | Pass   |
| 802.11n-HT40  | MCS0               | 03          | 2422               | 30             | Pass   |
| 802.11n-HT40  | MCS0               | 06          | 2437               | 30             | Pass   |
| 802.11n-HT40  | MCS0               | 09          | 2452               | 30             | Pass   |
| 802.11ax-HE20 | MCS0               | 01          | 2412               | 30             | Pass   |
| 802.11ax-HE20 | MCS0               | 06          | 2437               | 30             | Pass   |
| 802.11ax-HE20 | MCS0               | 11          | 2462               | 30             | Pass   |
| 802.11ax-HE40 | MCS0               | 03          | 2422               | 30             | Pass   |
| 802.11ax-HE40 | MCS0               | 06          | 2437               | 30             | Pass   |
| 802.11ax-HE40 | MCS0               | 09          | 2452               | 30             | Pass   |

Note: Due to the power setting of beamforming mode is less than CDD mode, so beamforming mode result is not reported.