

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Guangzhou Panyu Juda Car Audio Equipment Co., Ltd.

Insignia 2.0 Mini Soundbar with Digital Amplifier

Model Number: NS-HMSB20

FCC ID: ESX-HMSB20

Prepared for:	Guangzhou Panyu Juda Car Audio Equipment Co., Ltd.
	Vtrek Industrial Park, Shibei Industrial Road, Dashi Street, Panyu Borough,
	Guangzhou City, Guangdong Province, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808



Report Number:	ESTE-R1906060
Date of Test:	Jun. 04~14, 2019
Date of Report:	Jun. 20, 2019

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram	8
2.6. Test mode	9
2.7. Channel List	10
2.8. Test Equipment.....	11
3. MAXIMUM PEAK OUTPUT POWER	12
3.1. Limit	12
3.2. Test Setup.....	12
3.3. Spectrum Analyzer Setting.....	12
3.4. Test Procedure.....	12
3.5. Test Result.....	13
4. 20 DB BANDWIDTH.....	20
4.1. Limit	20
4.2. Test Setup.....	20
4.3. Spectrum Analyzer Setting.....	20
4.4. Test Procedure.....	20
4.5. Test Result.....	21
5. CARRIER FREQUENCY SEPARATION	28
5.1. Limit	28
5.2. Test Setup.....	28
5.3. Spectrum Analyzer Setting.....	28
5.4. Test Procedure.....	28
5.5. Test Result.....	29
6. NUMBER OF HOPPING CHANNEL	36
6.1. Limit	36
6.2. Test Setup.....	36
6.3. Spectrum Analyzer Setting.....	36
6.4. Test Procedure.....	36
6.5. Test Result.....	37
7. DWELL TIME	40
7.1. Limit	40
7.2. Test Setup.....	40
7.3. Spectrum Analyzer Setting.....	40
7.4. Test Procedure.....	40
7.5. Test Result.....	41
8. CONDUCTED BAND EDGE	48

8.1.	Limit	48
8.2.	Test Setup	48
8.3.	Spectrum Analyzer Setting	48
8.4.	Test Procedure	48
8.5.	Test Result	49
9.	CONDUCTED SPURIOUS EMISSIONS	55
9.1.	Limit	55
9.2.	Test Setup	55
9.3.	Spectrum Analyzer Setting	55
9.4.	Test Procedure	55
9.5.	Test Result	56
10.	RADIATED SPURIOUS EMISSIONS AND BAND EDGE	62
10.1.	Limit	62
10.2.	Test Setup	63
10.3.	Spectrum Analyzer Setting	64
10.4.	Test Procedure	65
10.5.	Test Result	66
11.	AC POWER LINE CONDUCTED EMISSIONS	98
11.1.	Limit	98
11.2.	Test Setup	98
11.3.	Spectrum Analyzer Setting	98
11.4.	Test Procedure	98
11.5.	Test Result	99
12.	ANTENNA REQUIREMENTS	103
12.1.	Limit	103
12.2.	Test Result	103

EST Technology Co., Ltd.

Applicant:	Guangzhou Panyu Juda Car Audio Equipment Co., Ltd.		
Address:	Vtrek Industrial Park, Shibe Industrial Road, Dashi Street, Panyu Borough, Guangzhou City, Guangdong Province, China		
Manufacturer:	Guangzhou Panyu Juda Car Audio Equipment Co., Ltd.		
Address:	Vtrek Industrial Park, Shibe Industrial Road, Dashi Street, Panyu Borough, Guangzhou City, Guangdong Province, China		
E.U.T:	Insignia 2.0 Mini Soundbar with Digital Amplifier		
Model Number:	NS-HMSB20		
Power Supply:	DC 12V From Adapter Input AC 100-240V, 50/60Hz		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Jun. 04, 2019	Date of Test:	Jun. 04~14, 2019
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
		Date: Jun 20, 2019	
Prepared by:	Reviewed by:	Approved by:	
 Ring / Assistant	 Tony / Engineer	 Iceman Hu / Manager	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Insignia 2.0 Mini Soundbar with Digital Amplifier
Model Number	:	NS-HMSB20
Software Version	:	V14
Hardware Version	:	VER:0.0
Operation frequency	:	2402MHz~2480MHz
Number of channel	:	79
Max Output Power (PEAK)	:	8-DPSK: 6.62 dBm
Modulation Type	:	BT BDR(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Sample Type	:	Prototype production

Note:

1. The antenna information for EUT.

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	0

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Peak Output Power	15.247(a)(1)	PASS
4	20dB Bandwidth	15.247(a)(1)	PASS
5	Carrier Frequency Separation	15.247(a)(1)	PASS
6	Number Of Hopping Channel	15.247(a)(1)(iii)	PASS
7	Dwell Time	15.247(a)(1)(iii)	PASS
8	Conducted Band Edge	15.247(d)	PASS
9	Conducted Spurious Emissions	15.247(d)	PASS
10	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
11	AC Power Line Conducted Emissions	15.207	PASS
12	Antenna requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
Date of registration: November 13, 2017

Certificated by FCC, USA
Designation Number: CN1215
Test Firm Registration Number: 722932
Date of registration: November 21, 2017

Certificated by A2LA, USA
Registration No.: 4366.01
Date of registration: November 07, 2017

Certificated by Industry Canada
CAB identifier No.: CN0035
Date of registration: January 04, 2019

Certificated by VCCI, Japan
Registration No.: R-13663; C-14103
Date of registration: July 25, 2017
This Certificate is valid until: July 24, 2020

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by TUV/PS, Shenzhen
Registration No.: SCN1017
Date of registration: January 27, 2011

Certificated by Intertek ETL SEMKO
Registration No.: 2011-RTL-L2-64
Date of registration: April 28, 2011

Certificated by Nemko, Hong Kong
Registration No.: 175193
Date of registration: May 4, 2011

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 18GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	Adapter	-	YN-24WA120200US	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: Insignia 2.0 Mini Soundbar with Digital Amplifier)

2.6. Test mode

Combining all the rates, modulations, and packet types, the Pre-scans had been carried out. The worst case test mode was selected for the final test as listed below.

Test Item	Modulation Type	Operating Mode	Packet Type	Test Channel
Maximum Peak Output Power	GFSK&8-DPSK	Non Hopping TX	DH5	Low/Middle/High
20dB Bandwidth	GFSK&8-DPSK	Non Hopping TX	DH5	Low/Middle/High
Carrier Frequency Separation	GFSK&8-DPSK	Hopping	DH5	Low/Middle/High
Number Of Hopping Channel	GFSK&8-DPSK	Hopping	DH5	All Channel Hopping
Dwell Time	GFSK&8-DPSK	Hopping	DH1/DH3/DH5	Middle(All Channel Hopping)
Conducted Band Edge	GFSK&8-DPSK	Non Hopping TX &Hopping	DH5	Low/ High& All Channel Hopping
Conducted Spurious Emissions	GFSK&8-DPSK	Non Hopping TX	DH5	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	GFSK&8-DPSK	Non Hopping TX	DH5	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	GFSK&8-DPSK	Non Hopping TX	DH5	Low/Middle/High
Radiated Band Edge	GFSK&8-DPSK	Non Hopping TX	DH5	Low/High
AC Power Line Conducted Emissions	GFSK&8-DPSK	Non Hopping TX	DH5	Low/Middle/High

Note:

1. In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	CEPREI	June 15,18	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	CEPREI	June 15,18	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	1519B-088	N/A	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Bilog Antenna	Teseq	CBL 6111D	37062	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	BBHA9120 D1002	CEPREI	June 15,18	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	BBHA9170 242	CEPREI	June 15,18	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	MY501800 31	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.8.5. For connect EUT antenna terminal test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

3.2. Test Setup



3.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3MHz
VBW	3MHz
Span	7.5MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


3.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


3.5. Test Result

Temperature	25℃	Relative Humidity	55%	Test Voltage		120V/60Hz
Mode	Freq (MHz)	Peak Output Power		Limit		Result
		dBm	W	dBm	W	
GFSK	2402	4.6	0.0029	20.97	0.1250	PASS
	2441	2.96	0.0020	20.97	0.1250	PASS
	2480	1.38	0.0014	20.97	0.1250	PASS
π 4DQPSK	2402	6.5	0.0045	20.97	0.1250	PASS
	2441	4.99	0.0032	20.97	0.1250	PASS
	2480	3.65	0.0023	20.97	0.1250	PASS
8-DPSK	2402	6.62	0.0046	20.97	0.1250	PASS
	2441	5.22	0.0033	20.97	0.1250	PASS
	2480	4.05	0.0025	20.97	0.1250	PASS


GFSK 2402 MHz

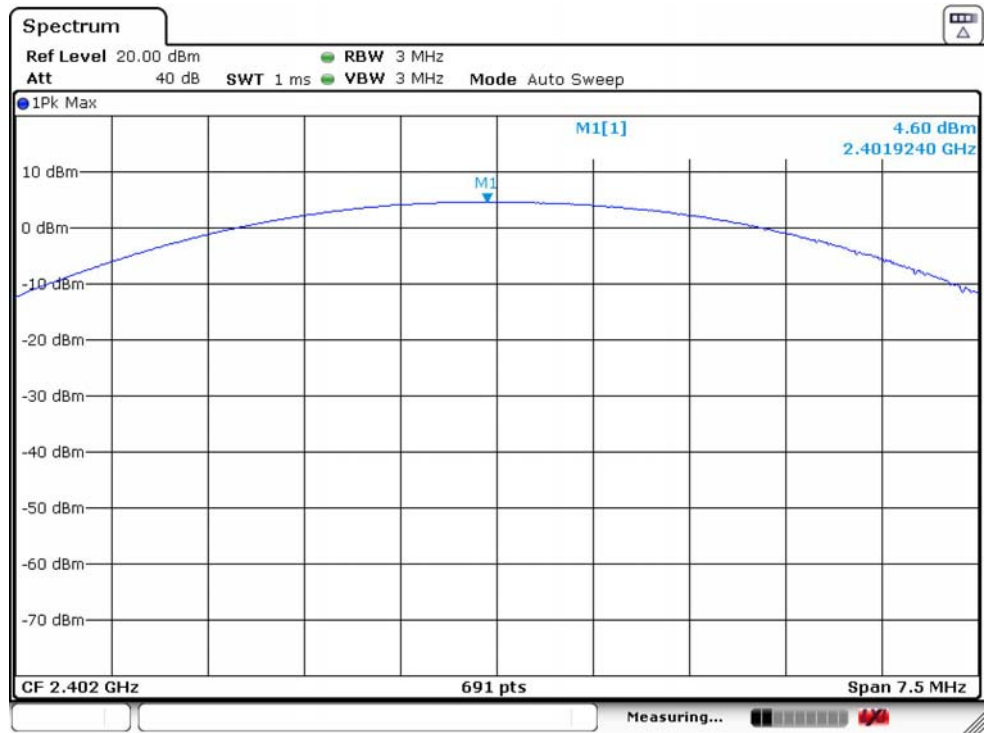


GFSK 2441 MHz

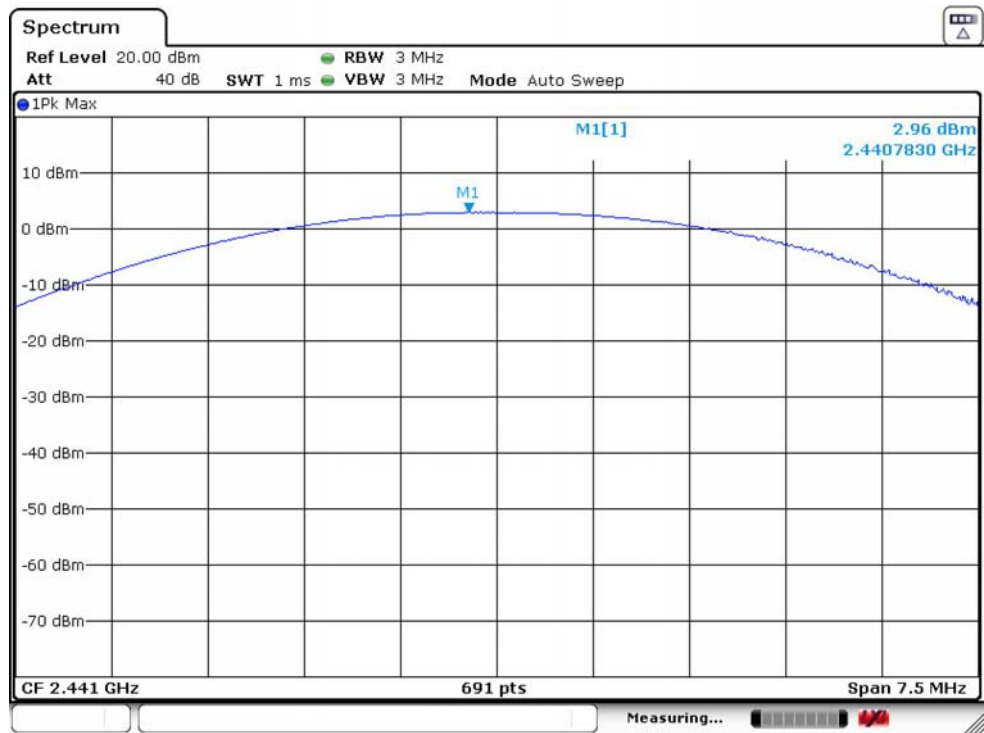


GFSK 2480 MHz

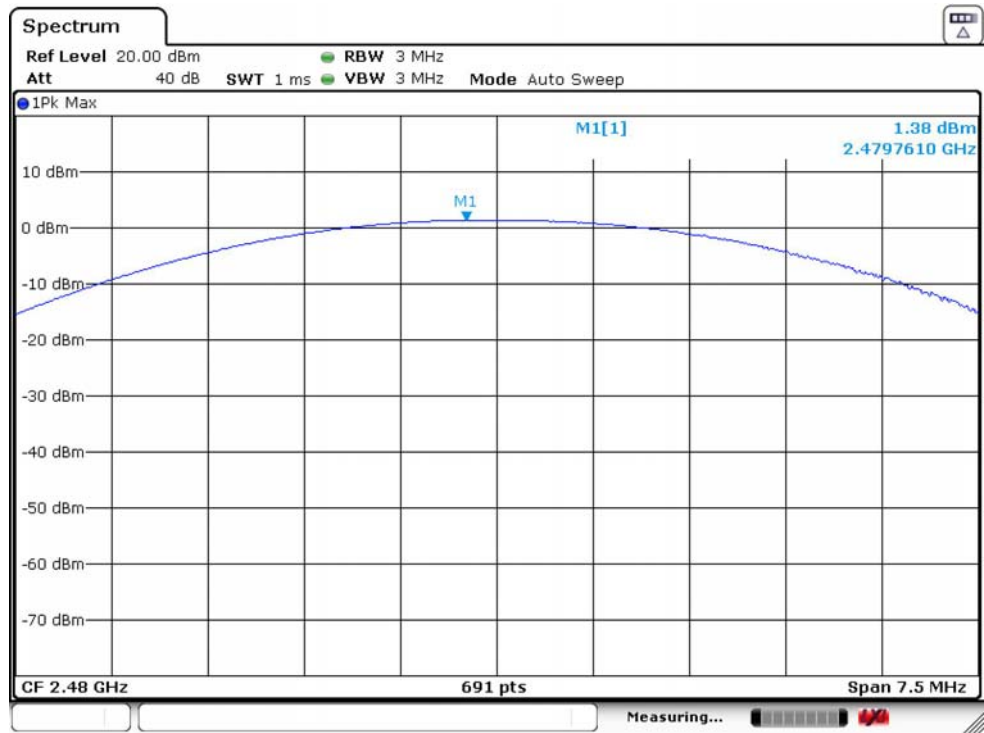


π 4DQPSK 2402 MHz

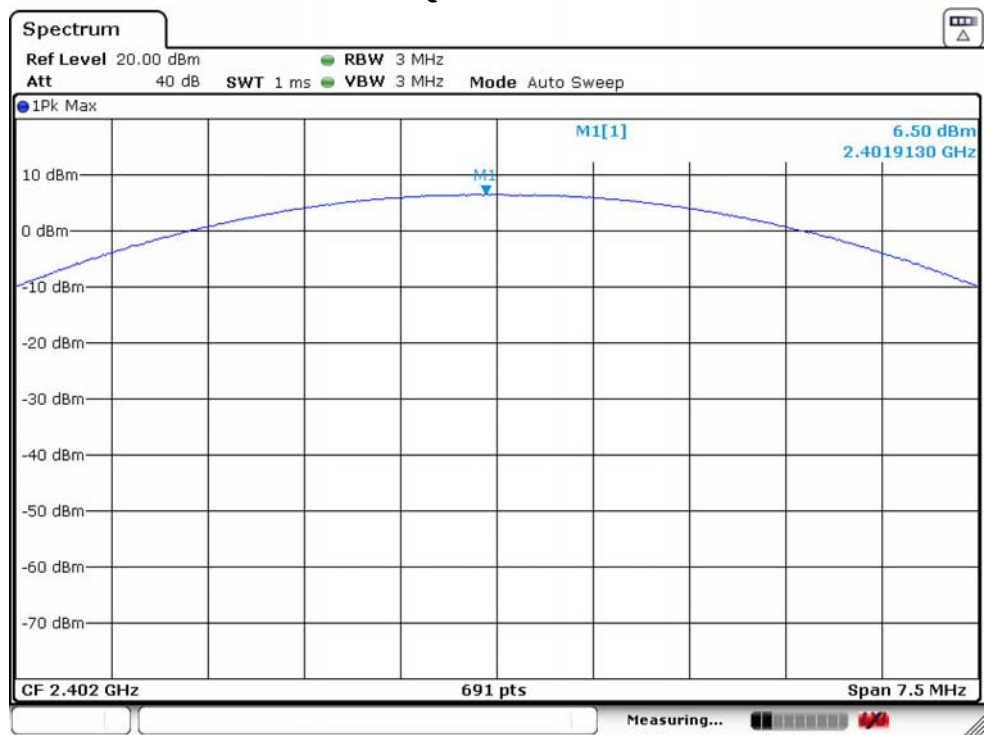


π 4DQPSK 2441 MHz

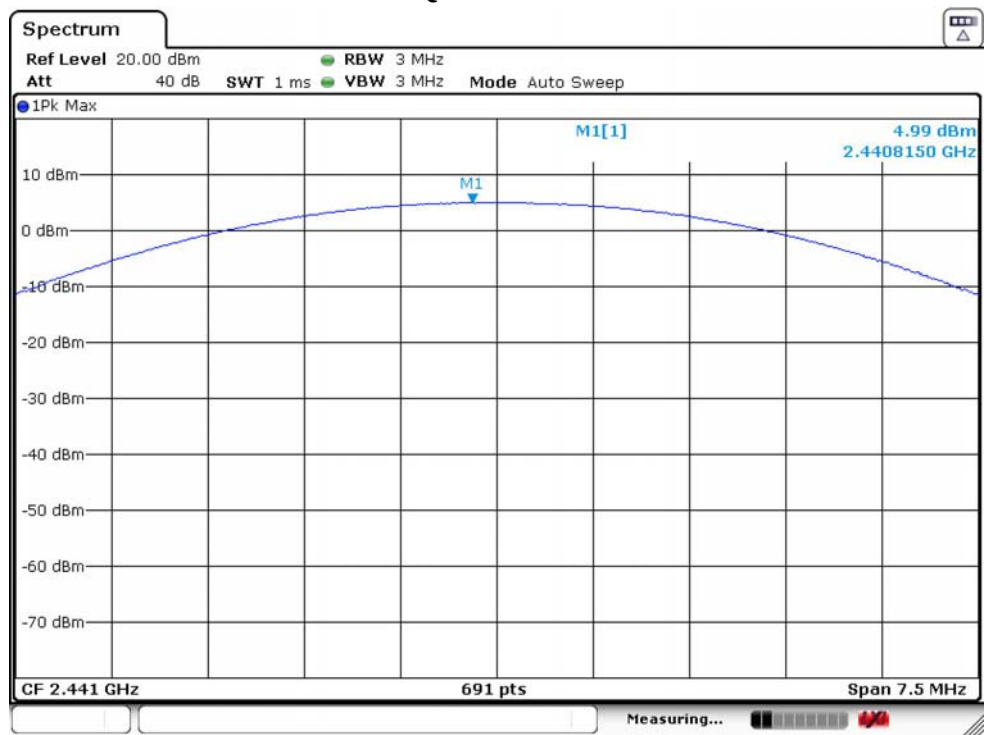


π 4DQPSK 2480 MHz

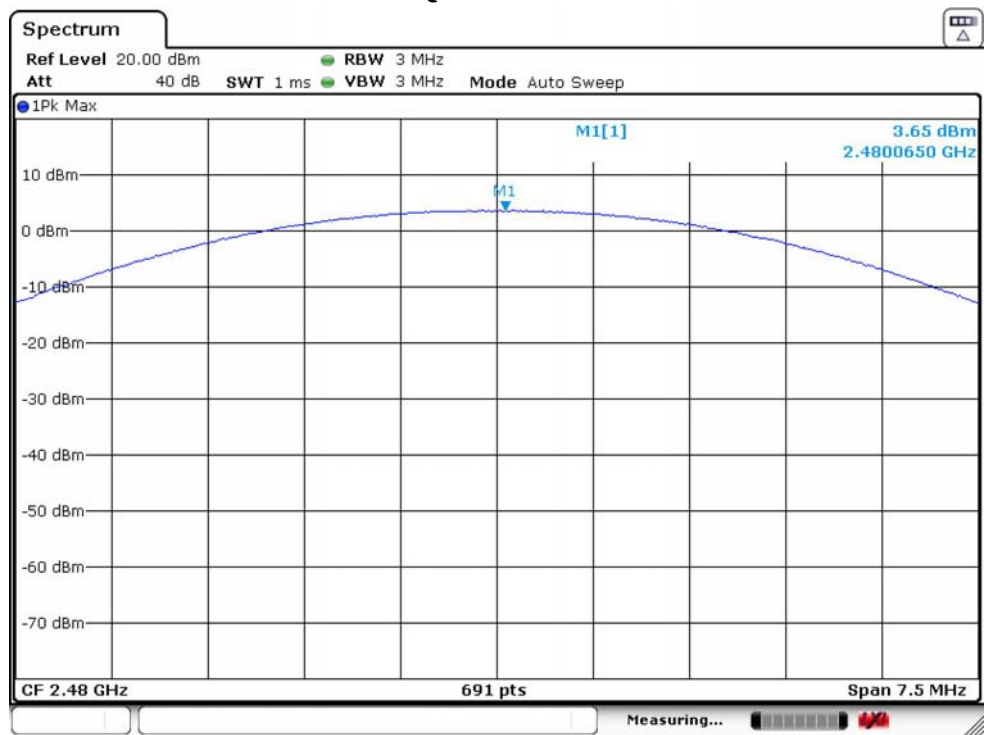


8-DPSK 2402 MHz

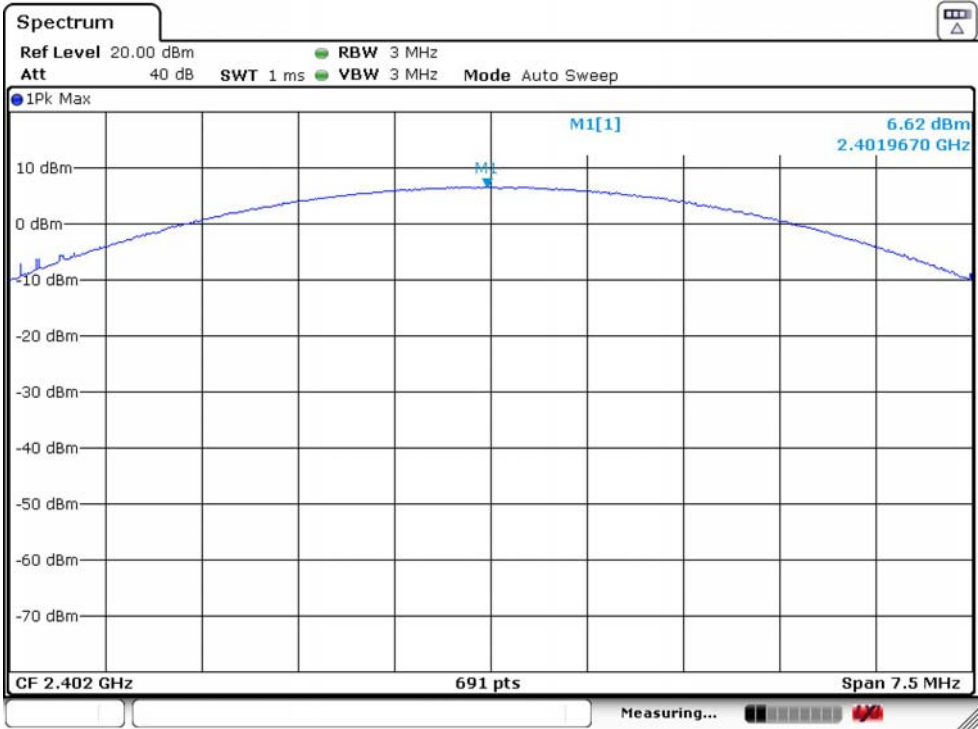

8-DPSK 2441 MHz

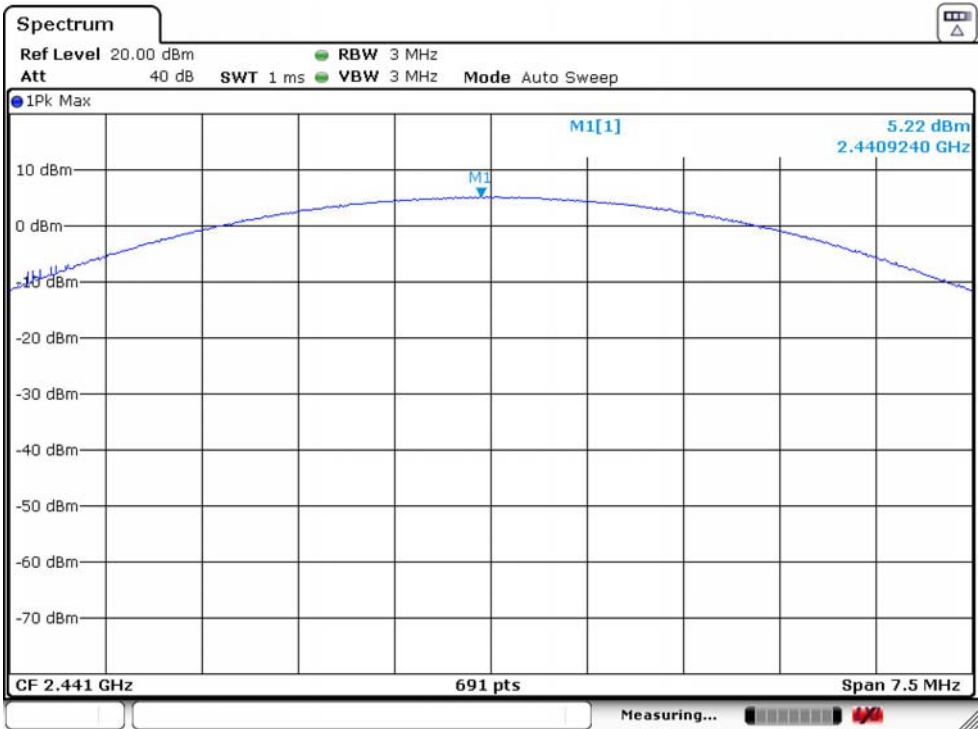

8-DPSK 2480 MHz

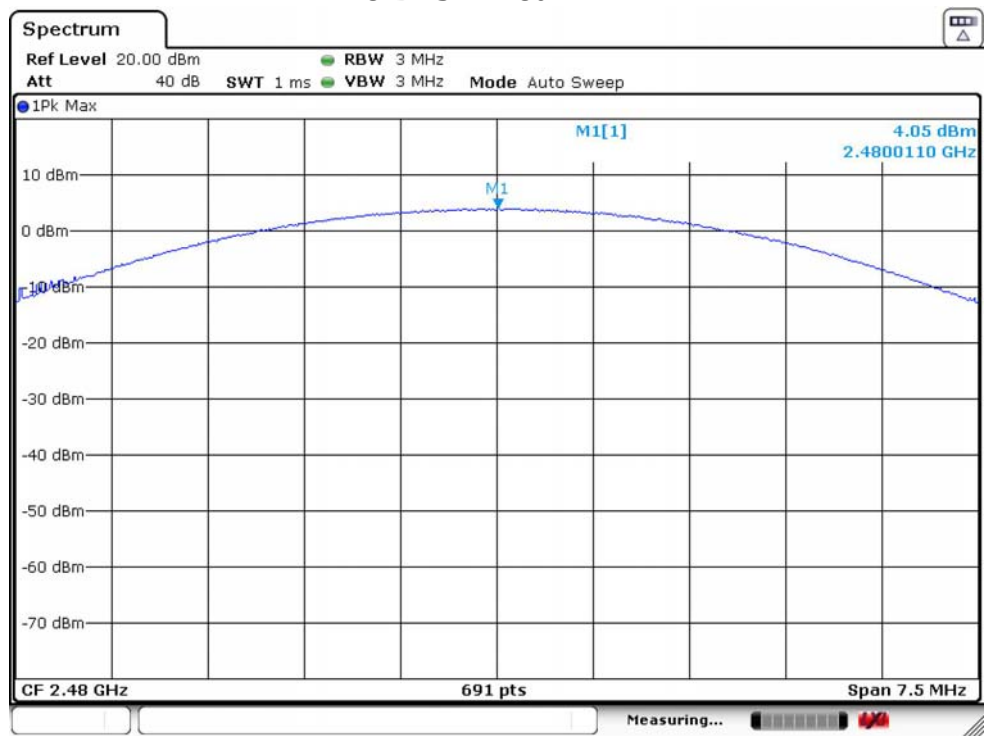


4. 20 DB BANDWIDTH

4.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

4.2. Test Setup

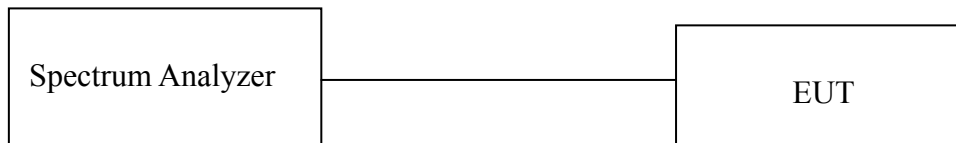

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	30KHz
VBW	100KHz
Span	3MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


4.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the ndB down function to measure 20dB Bandwidth.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


4.5. Test Result

Temperature	25℃	Relative Humidity	55%	
Test Voltage	120V/60Hz			
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	2402	0.8119	/	PASS
	2441	0.8119	/	PASS
	2480	0.8119	/	PASS
π 4DQPSK	2402	1.2721	/	PASS
	2441	1.2764	/	PASS
	2480	1.2764	/	PASS
8-DPSK	2402	1.2634	/	
	2441	1.2677	/	
	2480	1.2808	/	

GFSK 2402MHz

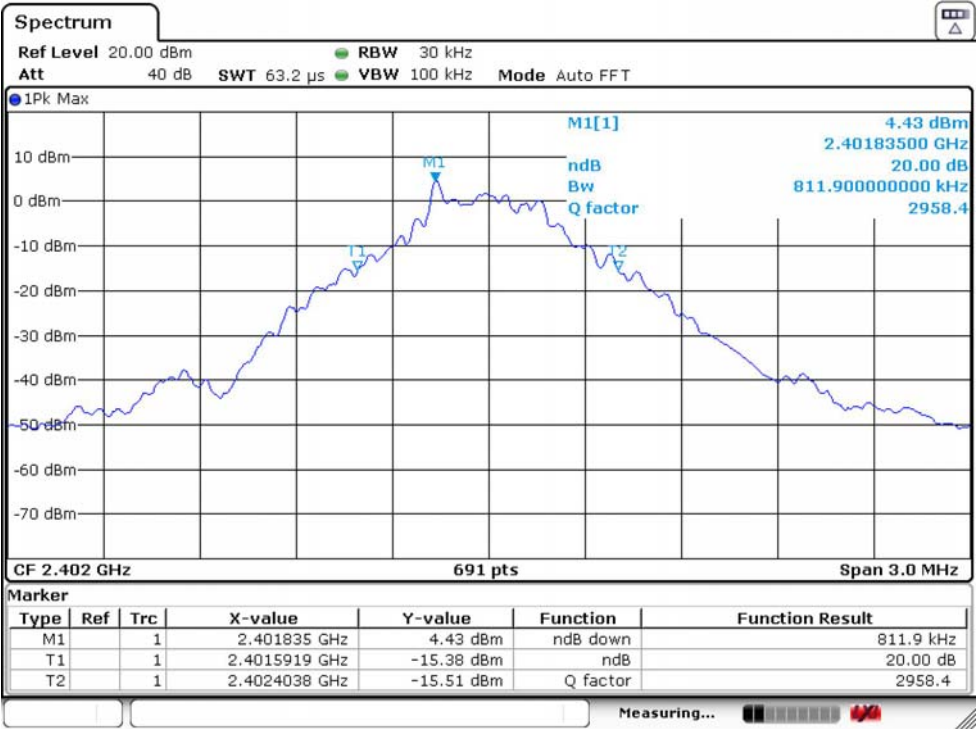


GFSK 2441MHz

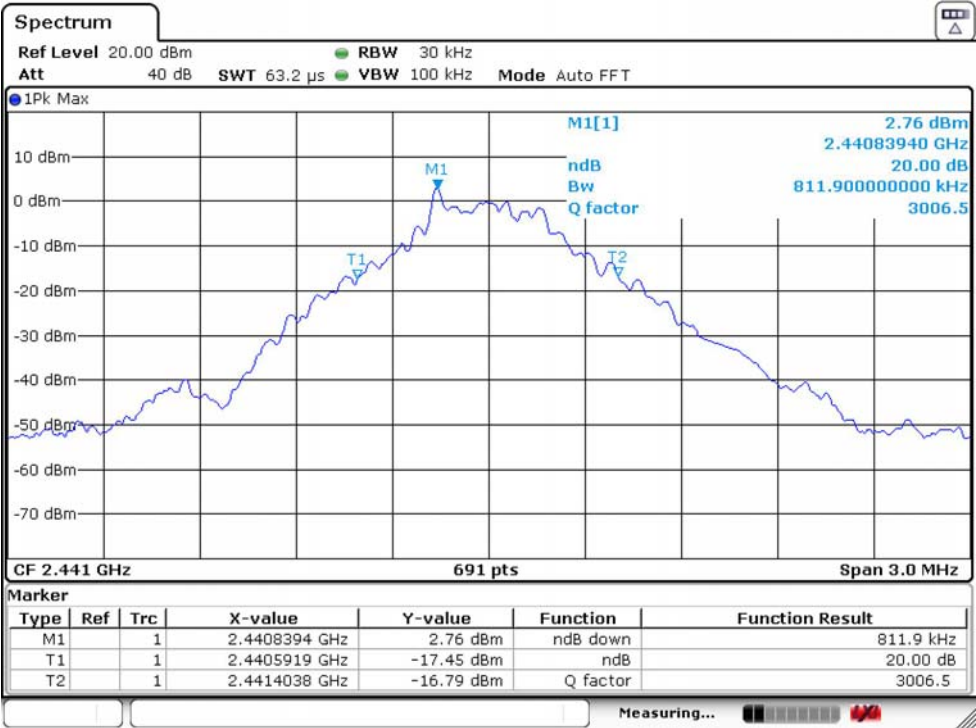


GFSK 2480MHz




π 4DQPSK 2402MHz

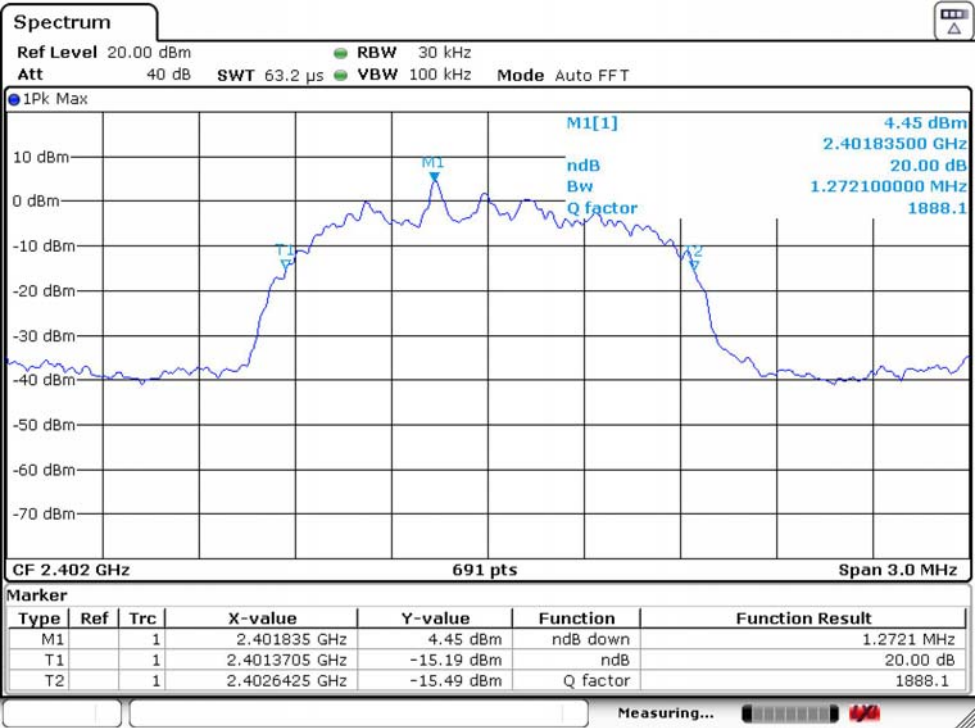

π 4DQPSK 2441MHz

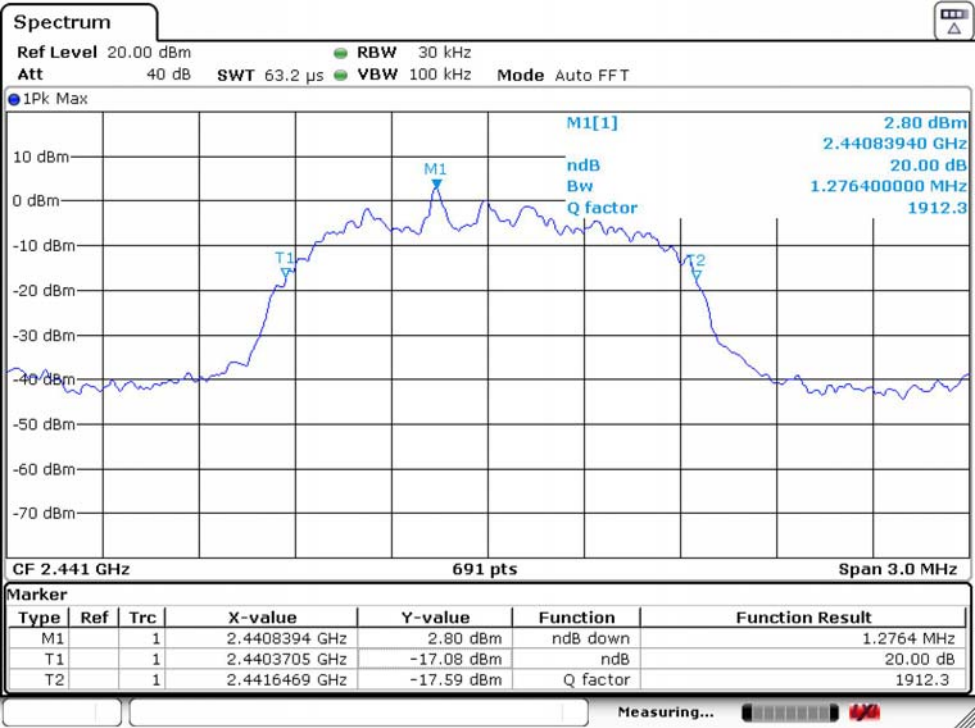


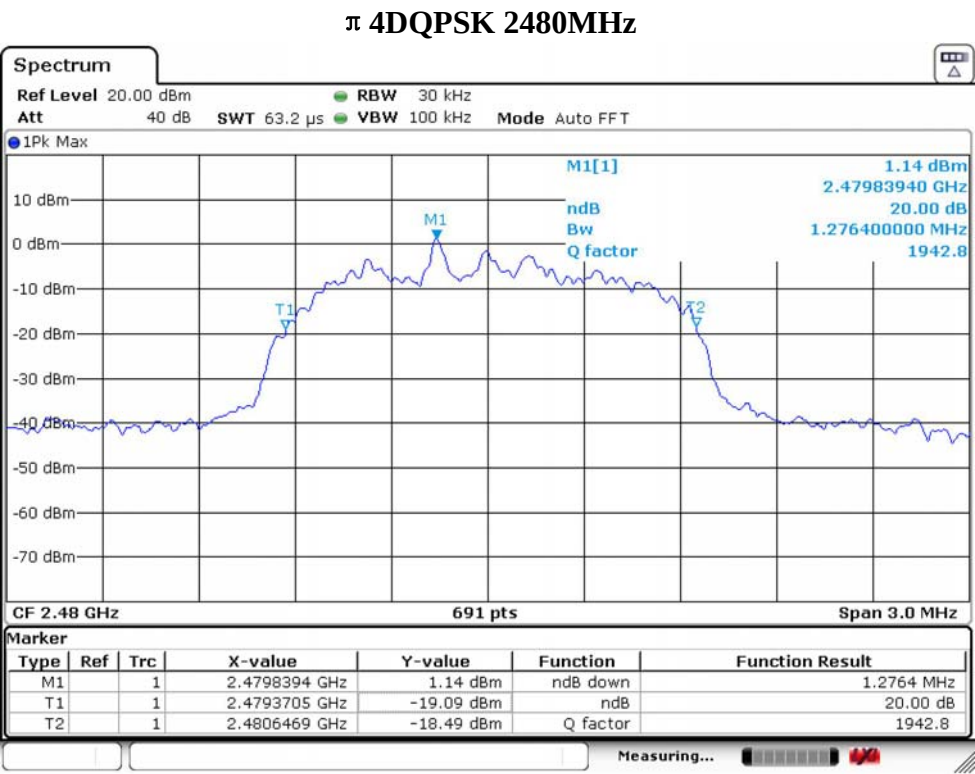


8-DPSK 2402MHz



8-DPSK 2441MHz

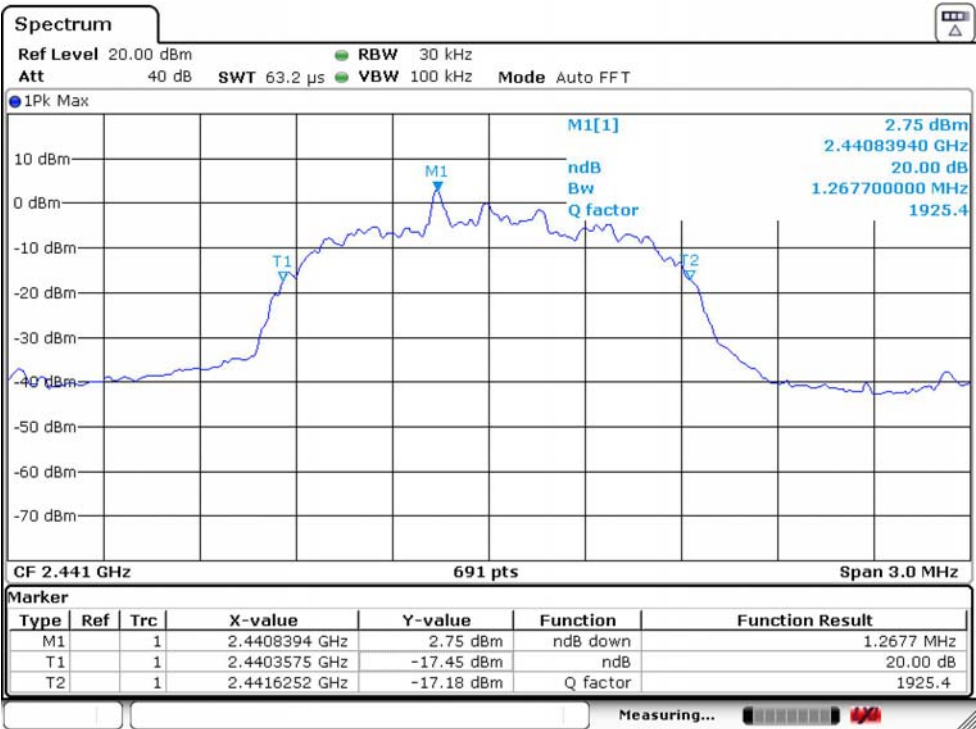

8-DPSK 2480MHz

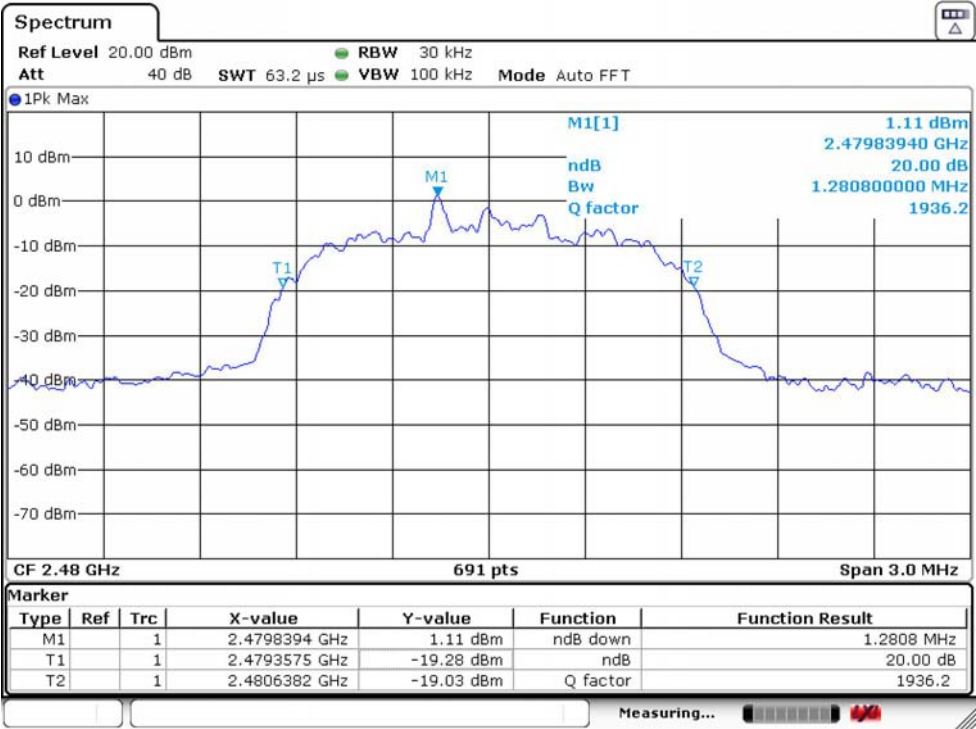


5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2. Test Setup

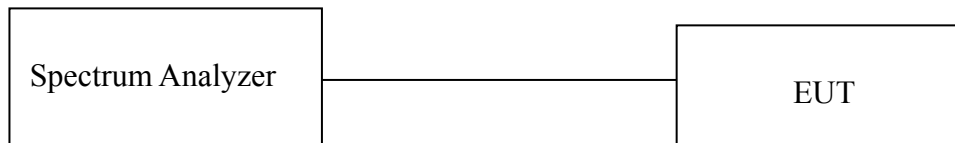

5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	30KHz
VBW	100KHz
Span	3MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power in all channel hopping mode.
- Allow trace to stabilize, use the marker-delta function to measure channel separation between two adjacent channels.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


5.5. Test Result

Temperature	25℃	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Channel	Channel Separation (MHz)	2/3 of 20dB Bandwidth Limit (MHz)		Result
GFSK	Low CH	1.0000	0.5413		PASS
	Mid CH	1.0000	0.5413		PASS
	High CH	1.0000	0.5413		PASS
π 4DQPSK	Low CH	1.0000	0.8481		PASS
	Mid CH	1.0000	0.8509		PASS
	High CH	1.0000	0.8509		PASS
8-DPSK	Low CH	1.0000	0.8423		PASS
	Mid CH	1.0000	0.8451		PASS
	High CH	1.0000	0.8539		PASS


GFSK Low Channel

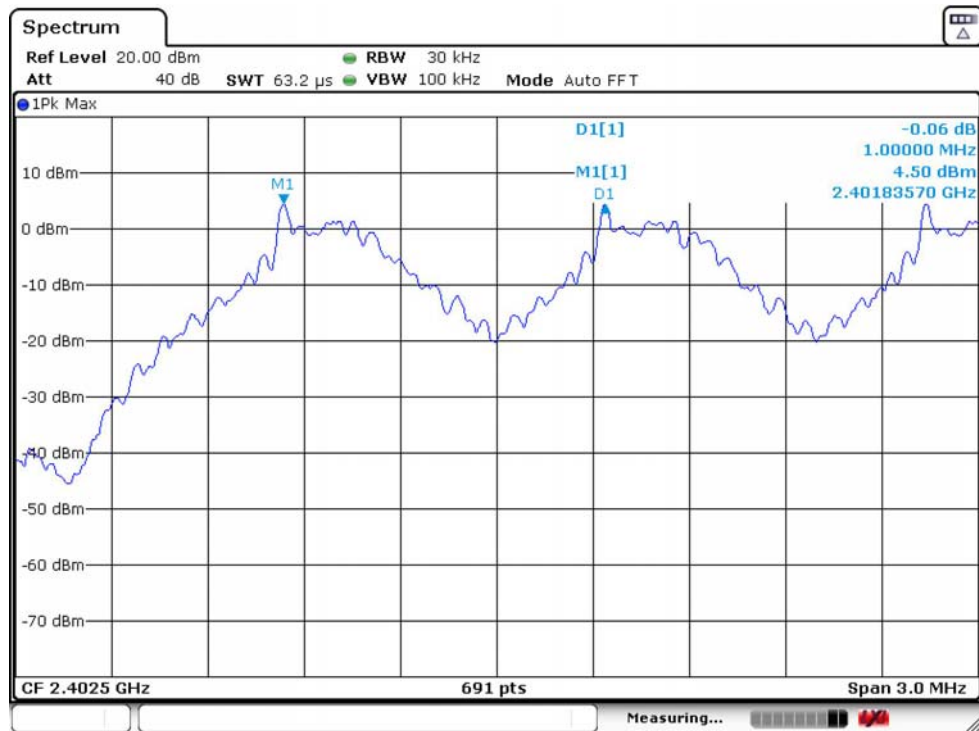


GFSK Mid Channel

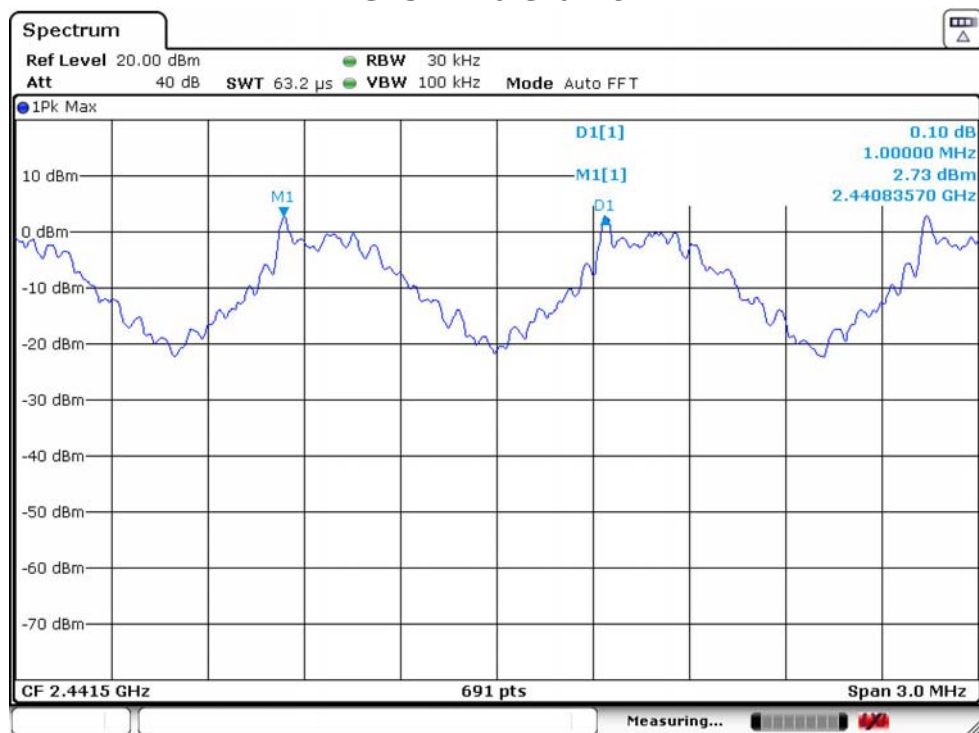


GFSK High Channel

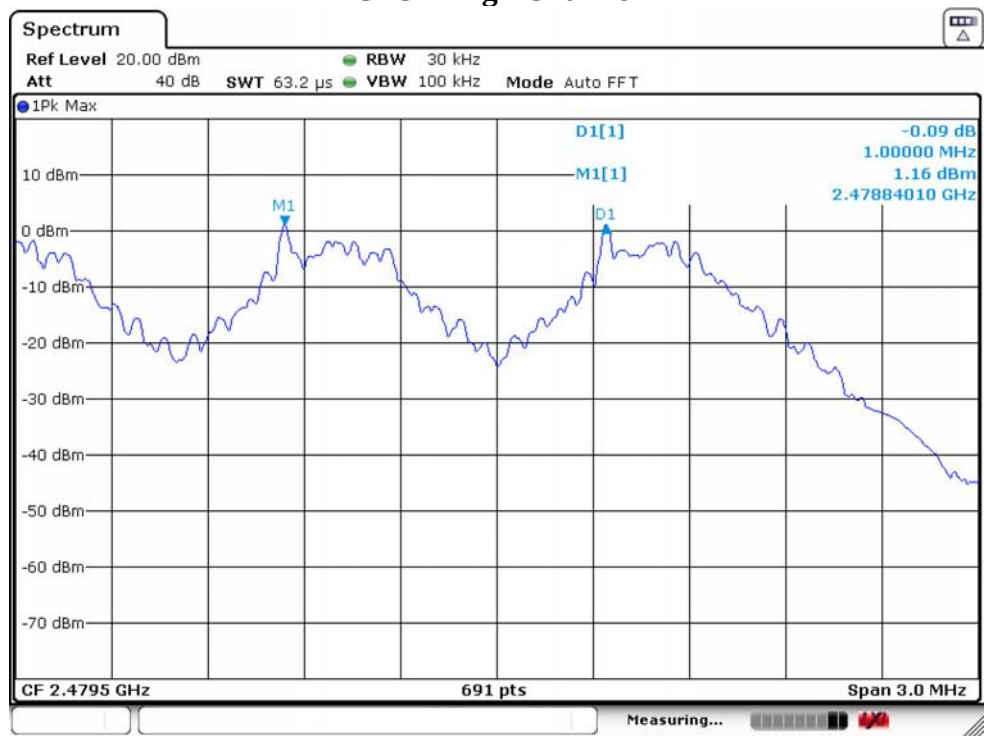


π 4DQPSK Low Channel

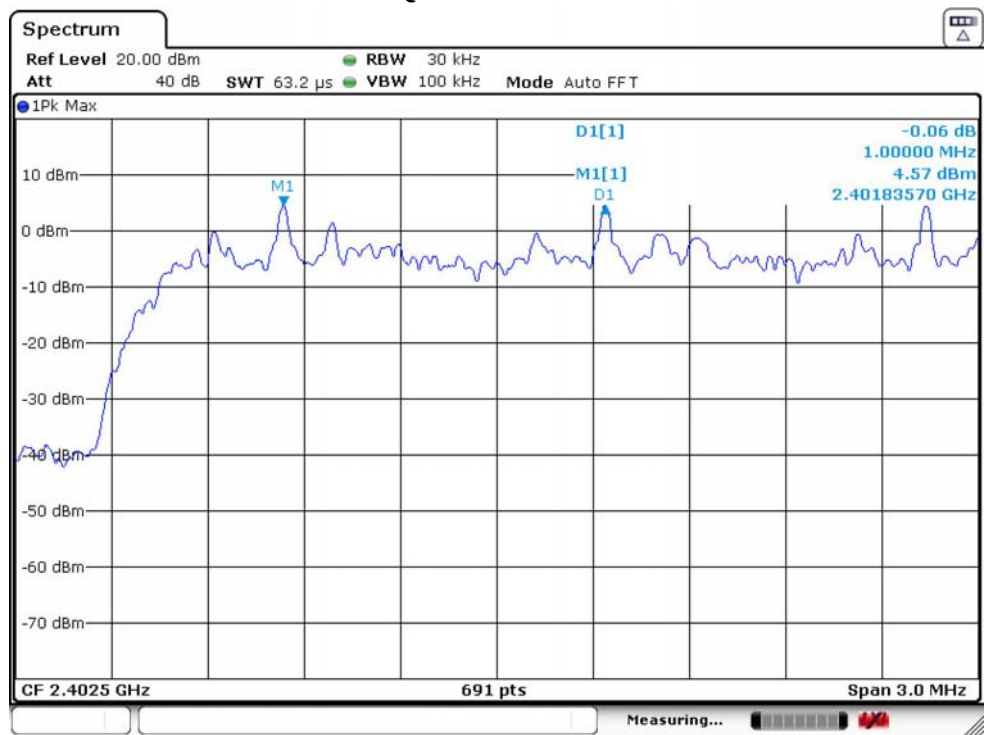


π 4DQPSK Mid Channel

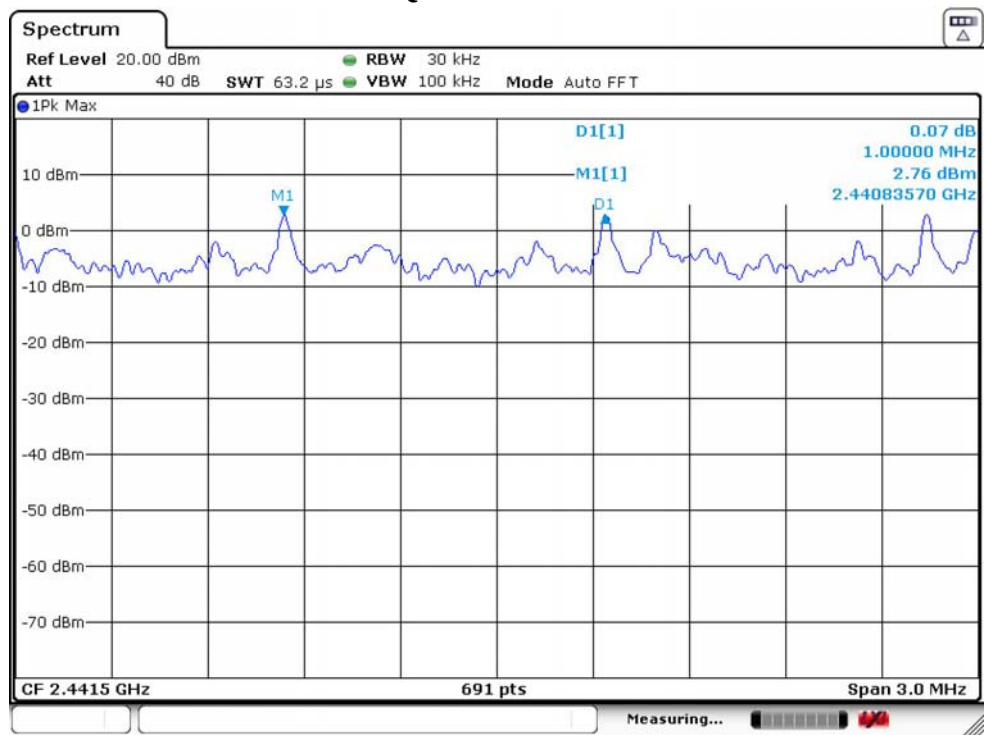


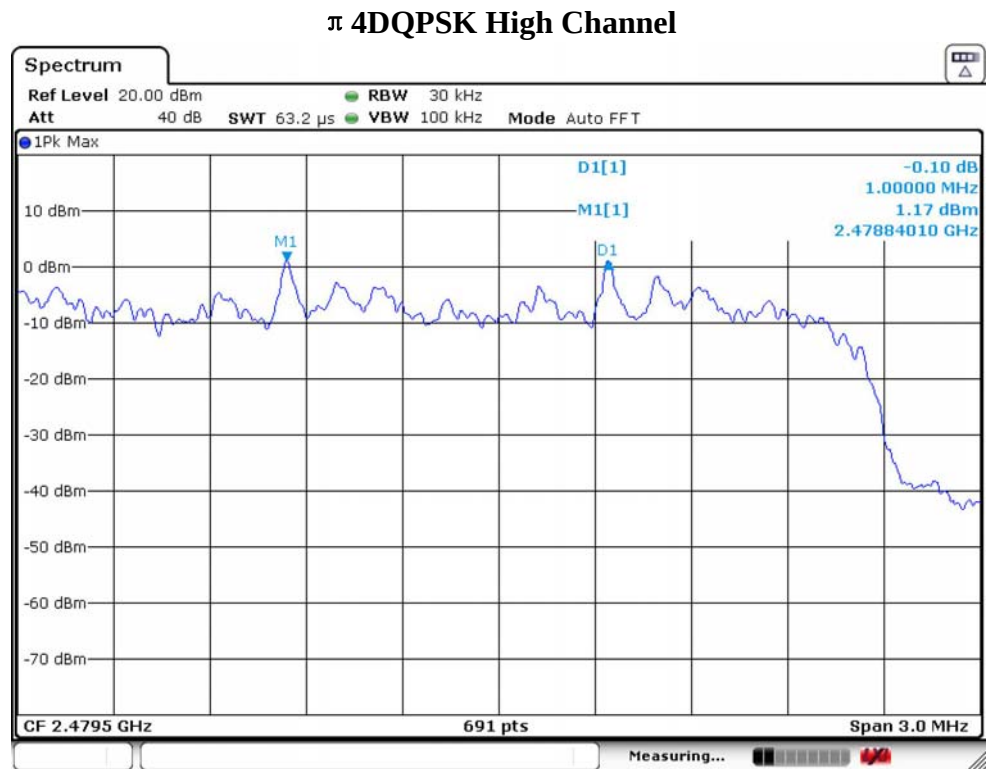


8-DPSK Low Channel

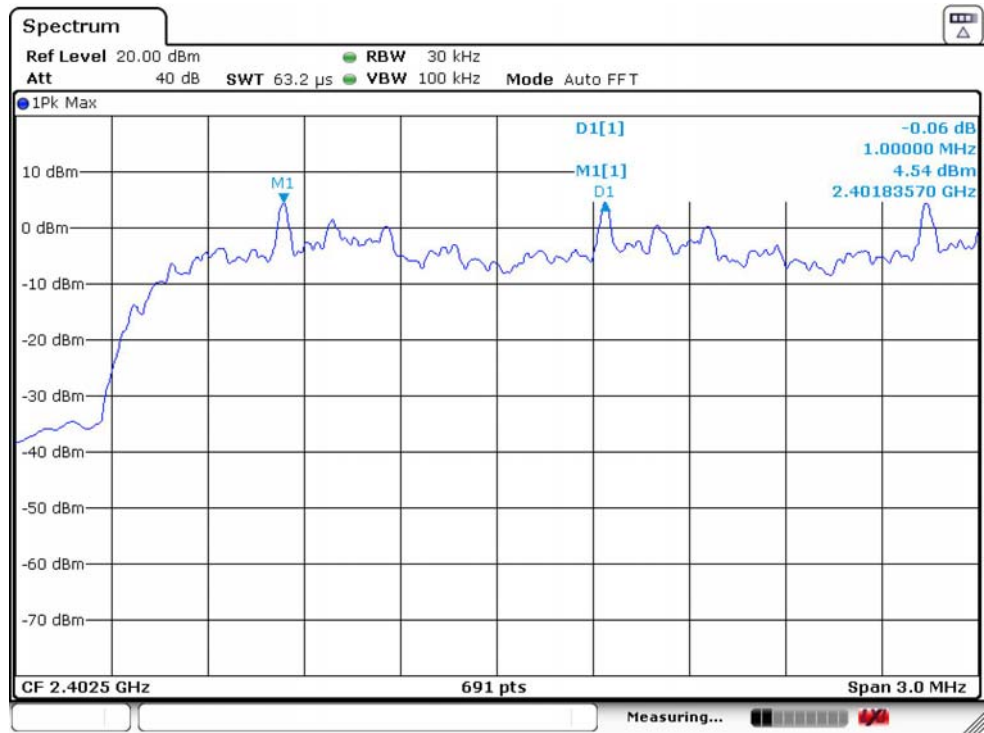

8-DPSK Mid Channel

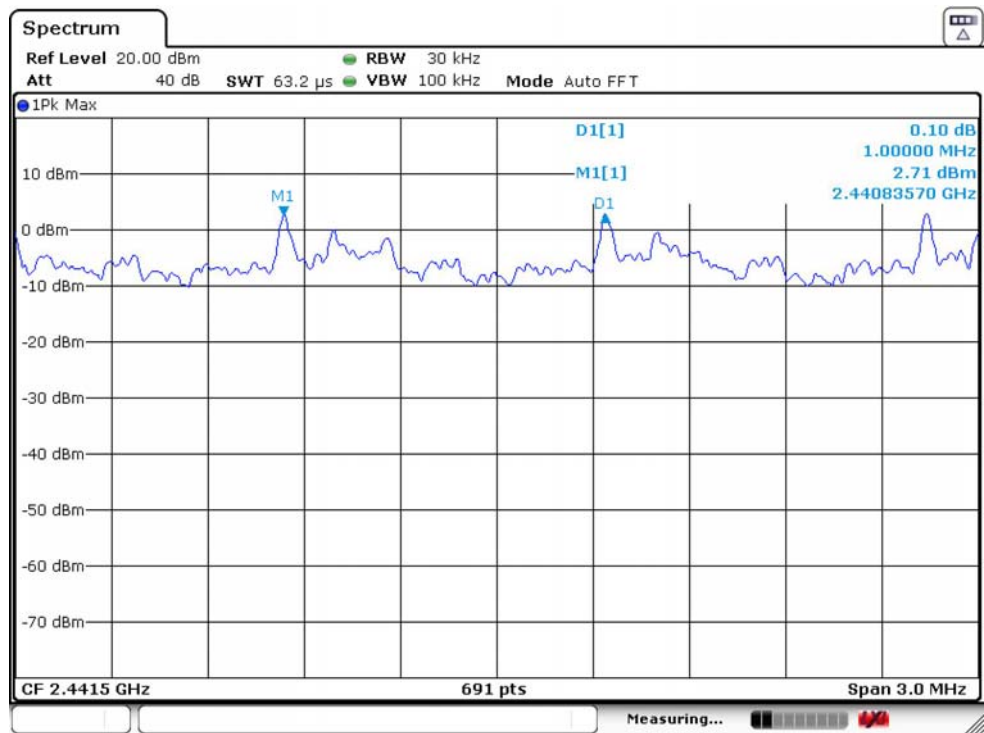

8-DPSK High Channel

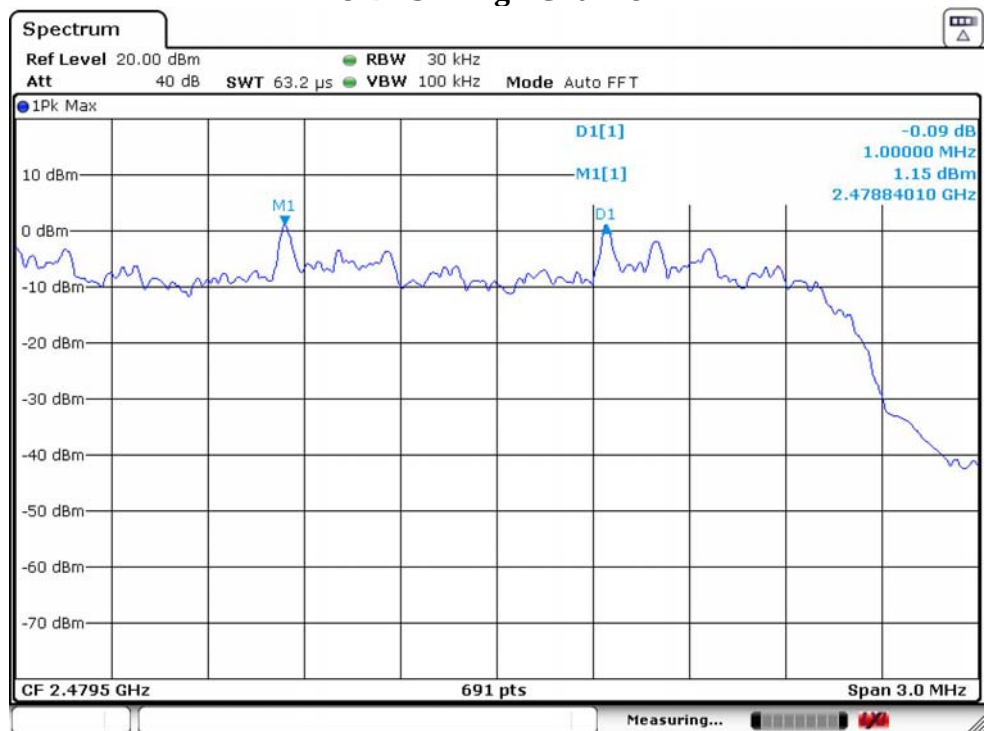


6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Setup

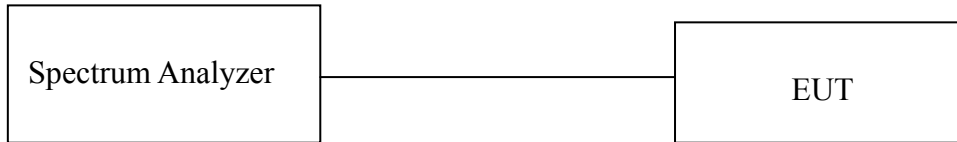

6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	300KHz
VBW	300KHz
Start frequency	2400MHz
Stop frequency	2483.5MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


6.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- Set the EUT transmit continuously with maximum output power in all channel hopping mode.
- Allow trace to stabilize, use the marker-peak function to mark the first and last frequency hopping channel.
- Repeat above procedures until all test modes were measured.
- Record the results in the test report.


6.5. Test Result

Temperature	25℃	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Number of Hopping Channel			Limit	Result
GFSK	79			≥ 15	PASS
π 4DQPSK	79			≥ 15	PASS
8-DPSK	79			≥ 15	PASS


GFSK Hopping On

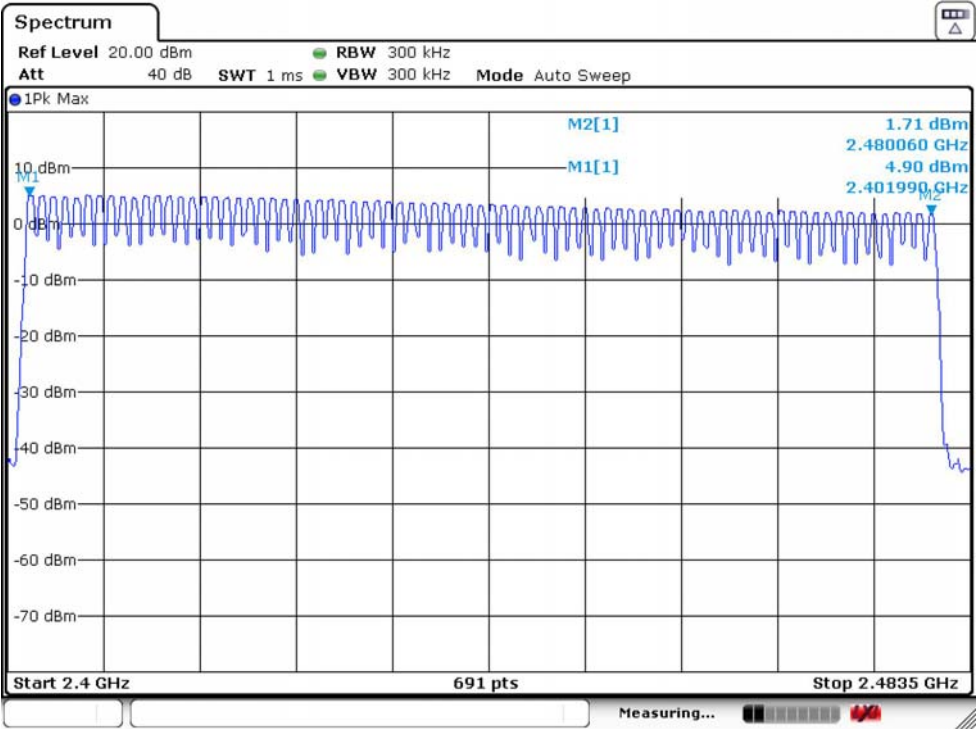

π 4DQPSK Hopping On

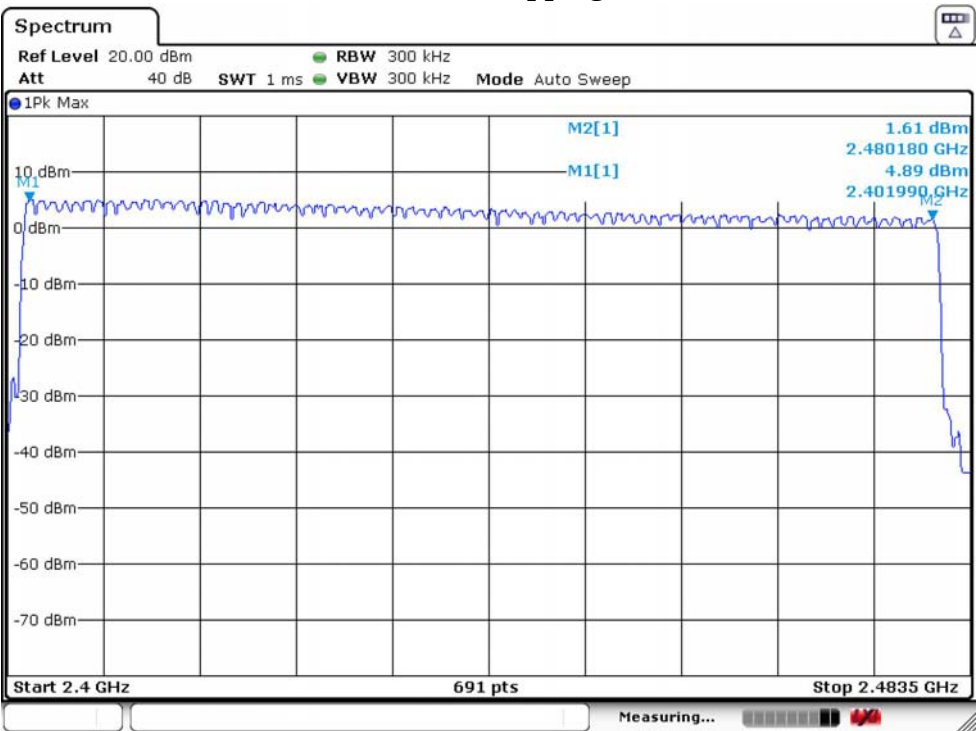

8-DPSK Hopping On

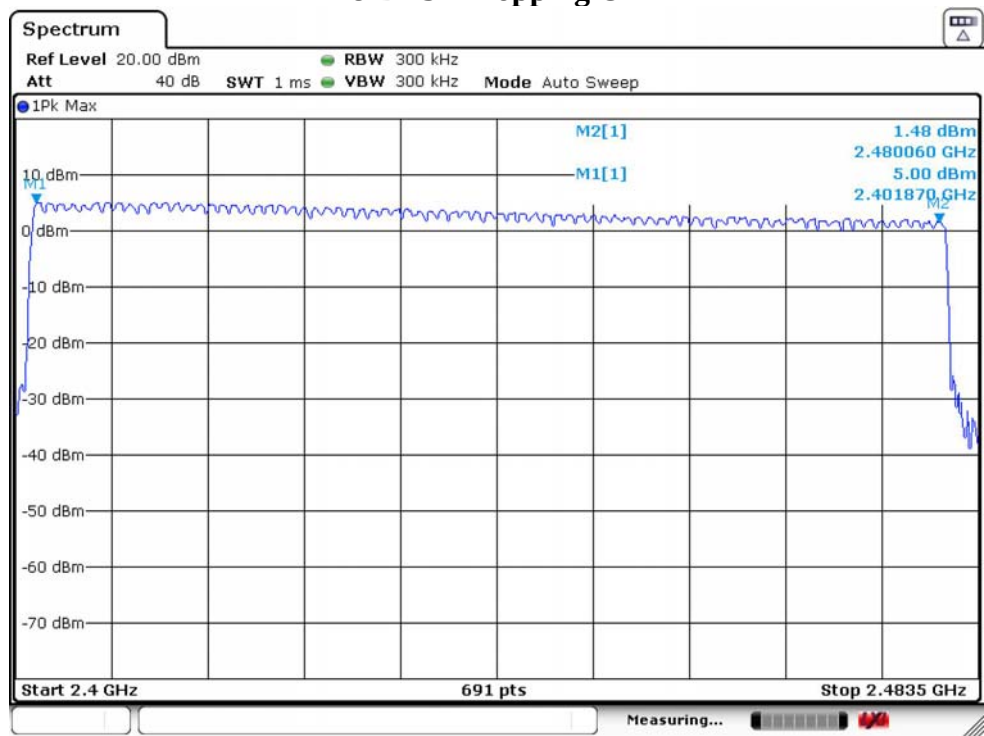


7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Setup

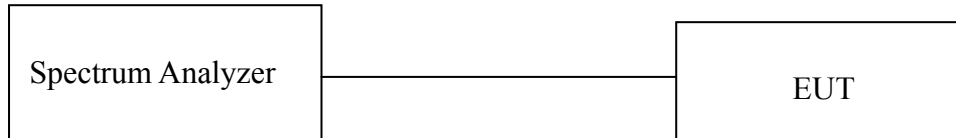

7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	1MHz
Span	Zero
Detector	Peak
Sweep Time	2.5ms(DH1)/10ms(DH3)/20ms(DH5)
Sweep Mode	Single Sweep


7.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 7.3.
- Set the EUT transmit continuously with maximum output power in all channel hopping mode.
- Allow trace to stabilize, use the marker-delta function to measure single pulse duration.
- Repeat above procedures until all test modes were measured.
- Record the results in the test report.


7.5. Test Result

Temperature	25℃	Relative Humidity		55%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	Hops in Observation Period(hops)	Pulse Duration (ms)	Dwell time (ms)	Limit	Result
GFSK DH1	2441	320	0.4275	136.80	<400ms	PASS
GFSK DH3	2441	160	1.6957	271.31	<400ms	PASS
GFSK DH5	2441	106.67	2.9855	318.45	<400ms	PASS
π 4DQPSK DH1	2441	320	0.4384	140.29	<400ms	PASS
π 4DQPSK DH3	2441	160	1.7101	273.62	<400ms	PASS
π 4DQPSK DH5	2441	106.67	2.9855	318.45	<400ms	PASS
8-DPSK 3DH1	2441	320	0.4275	136.80	<400ms	PASS
8-DPSK 3DH3	2441	160	1.7101	273.62	<400ms	PASS
8-DPSK 3DH5	2441	106.67	2.9855	318.45	<400ms	PASS
1. DH1 Packet permit maximum 1600 hops/s with 2 timeslot in 79 channels (1 timeslot TX, 1 timeslot RX), So the hops in Observation Period($0.4s \times 79$ channel) = $(1600/79/2) \text{hops/s} \times 0.4s \times 79 = 320$ hops. 2. DH3 Packet permit maximum 1600 hops/s with 4 timeslot in 79 channels (3 timeslot TX, 1 timeslot RX), So the hops in Observation Period($0.4s \times 79$ channel) = $(1600/79/4) \text{hops/s} \times 0.4s \times 79 = 160$ hops. 3. DH5 Packet permit maximum 1600 hops/s with 6 timeslot in 79 channels (5 timeslot TX, 1 timeslot RX), So the hops in Observation Period($0.4s \times 79$ channel) = $(1600/79/5) \text{hops/s} \times 0.4s \times 79 = 106.67$ hops. 4. Dwell Time = Hops in Observation Period $\times$ Pulse Duration.						


GFSK DH1

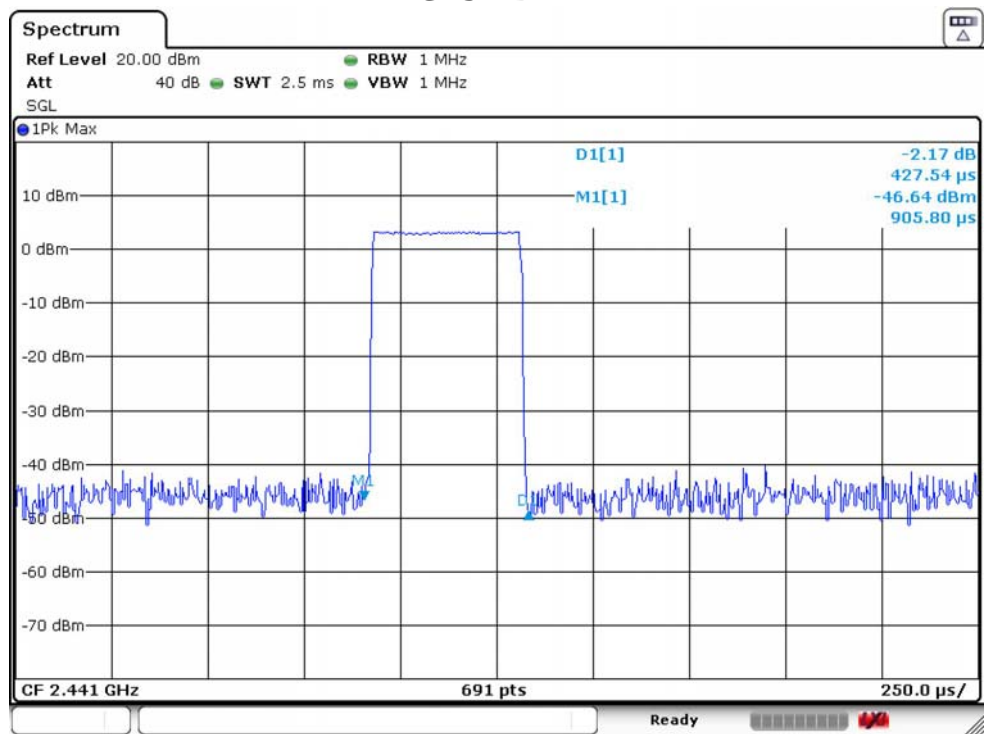


GFSK DH3

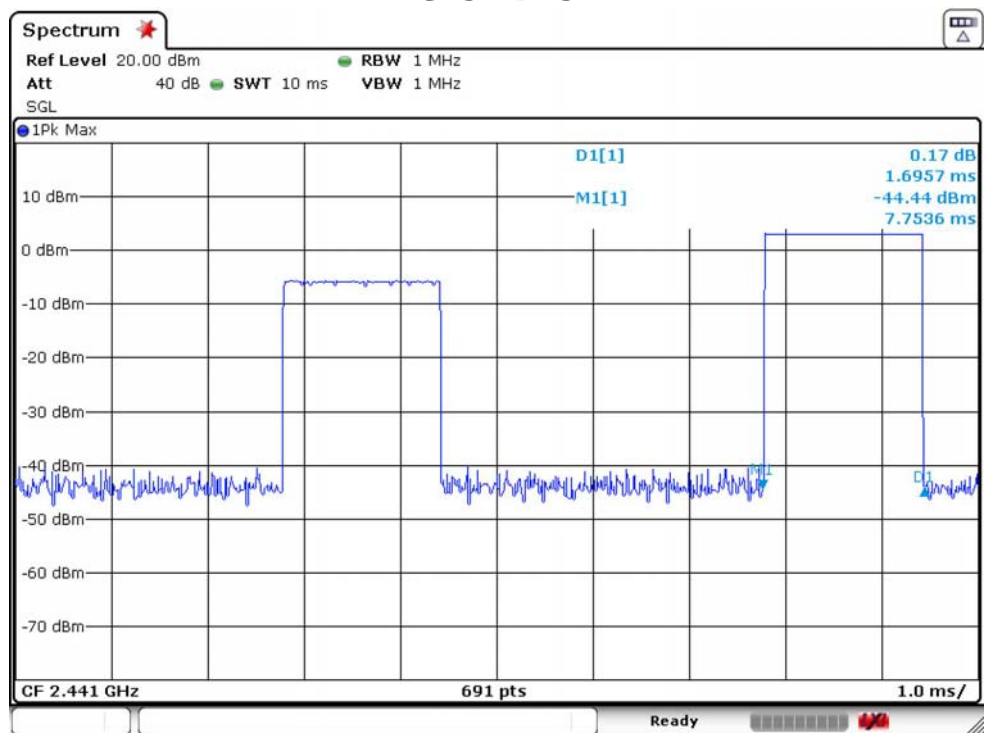


GSFK DH5

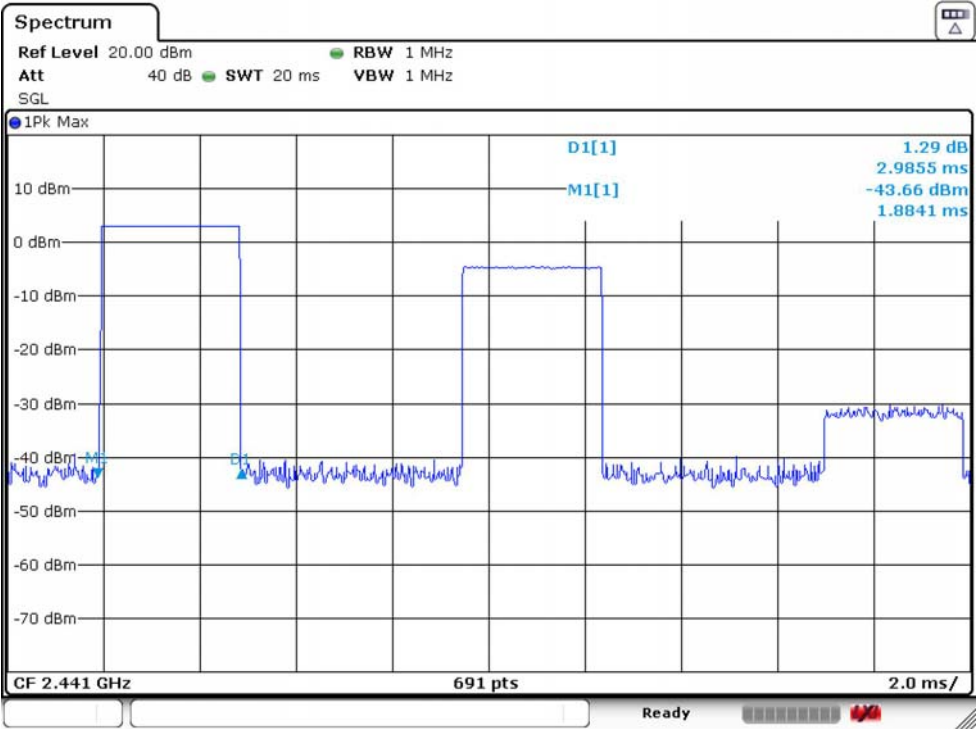


π 4DQPSK 3DH1

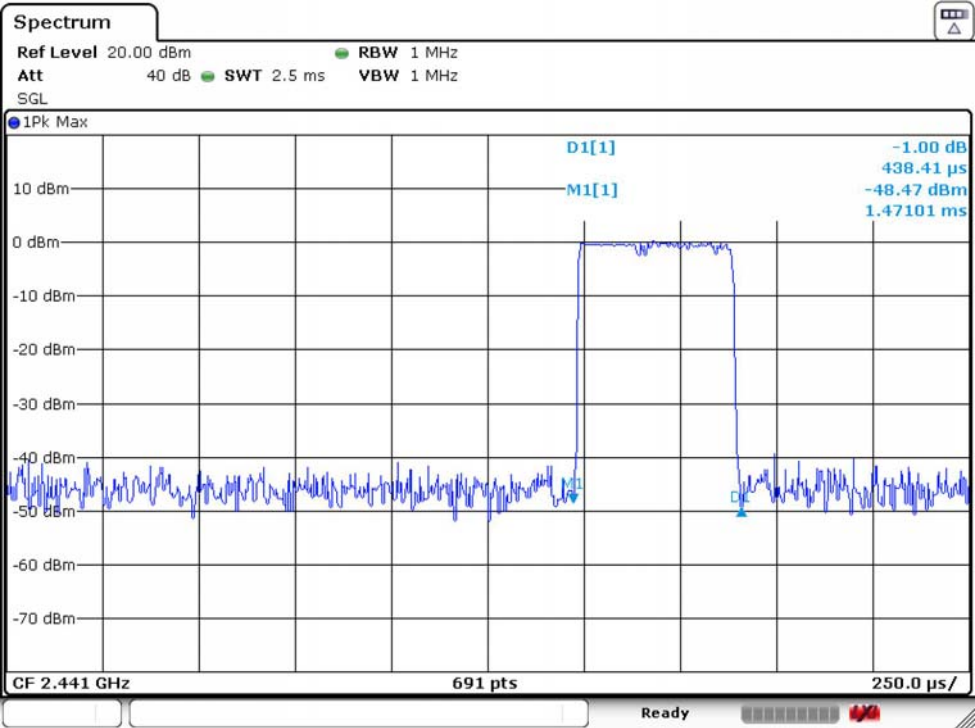


π 4DQPSK 3DH3

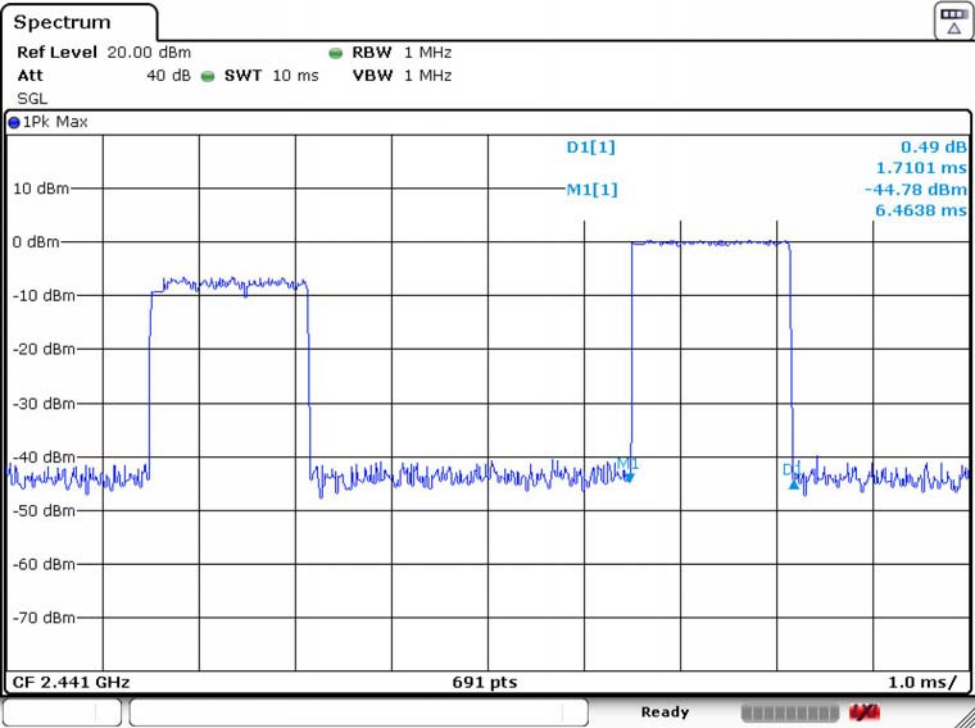


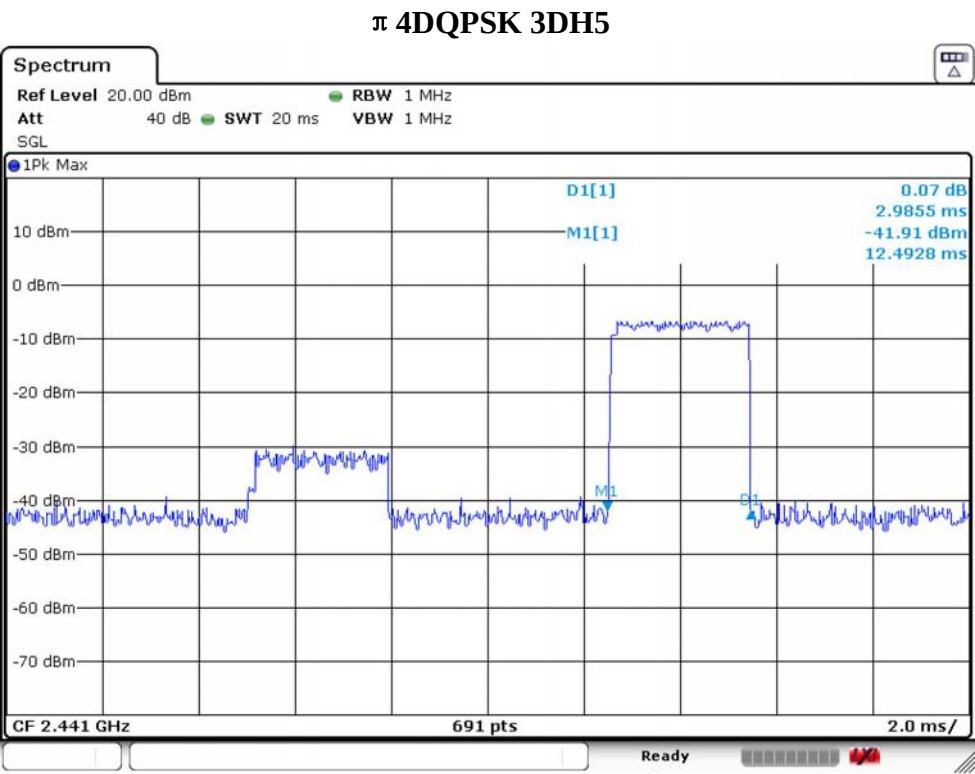


8-DPSK 3DH1

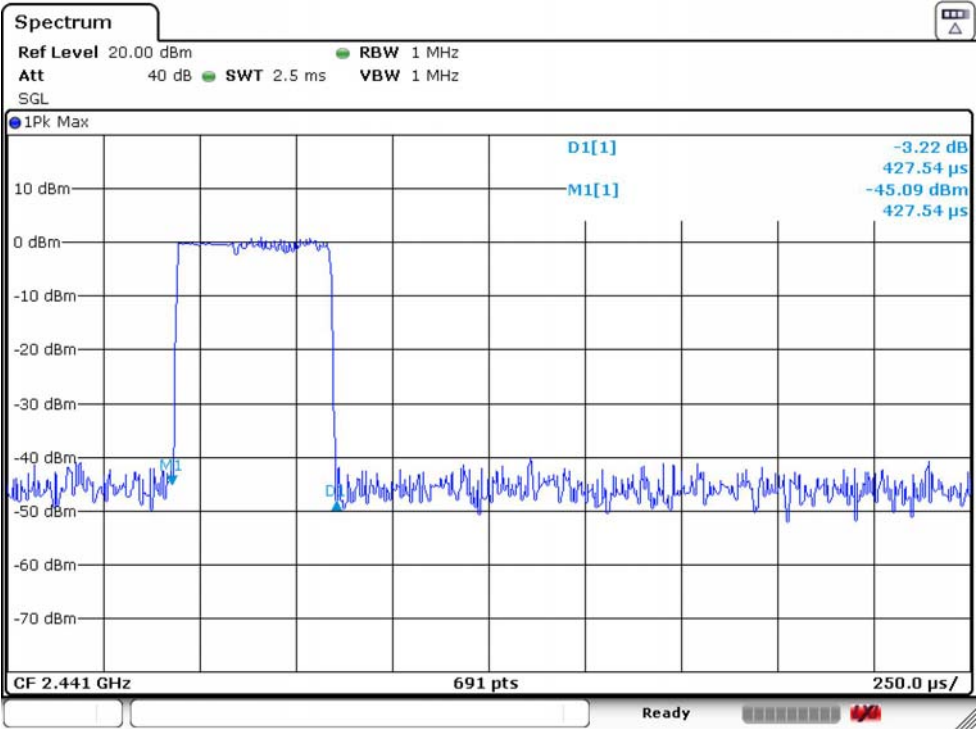

8-DPSK 3DH3

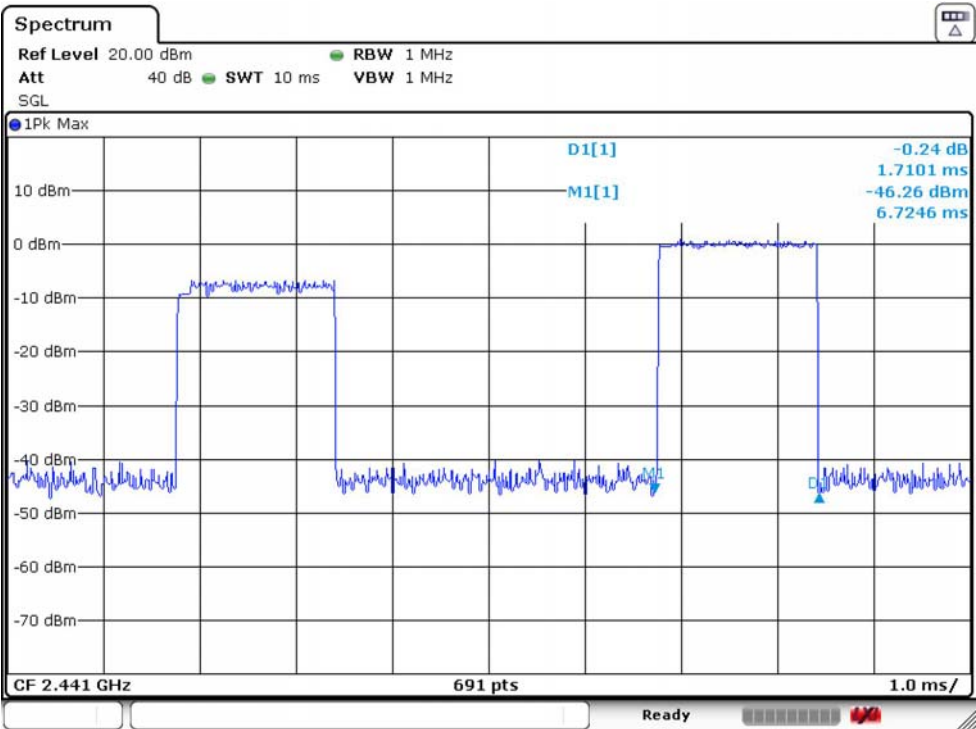

8-DPSK 3DH5

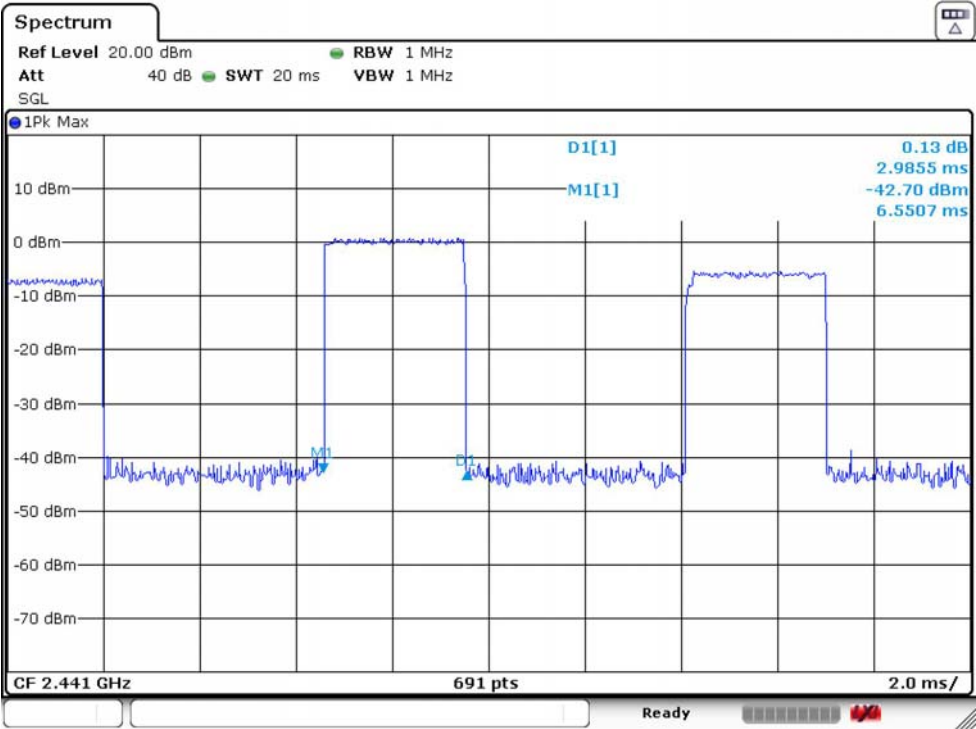


8. CONDUCTED BAND EDGE

8.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2. Test Setup

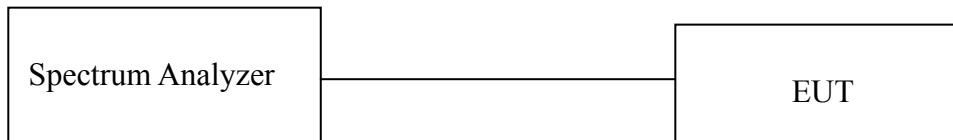

8.3. Spectrum Analyzer Setting



Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

8.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 8.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all channels and test modes were measured(including frequency hopping off and frequency hopping on).
- Record the results in the test report.

8.5. Test Result


Temperature	25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Result	PASS				

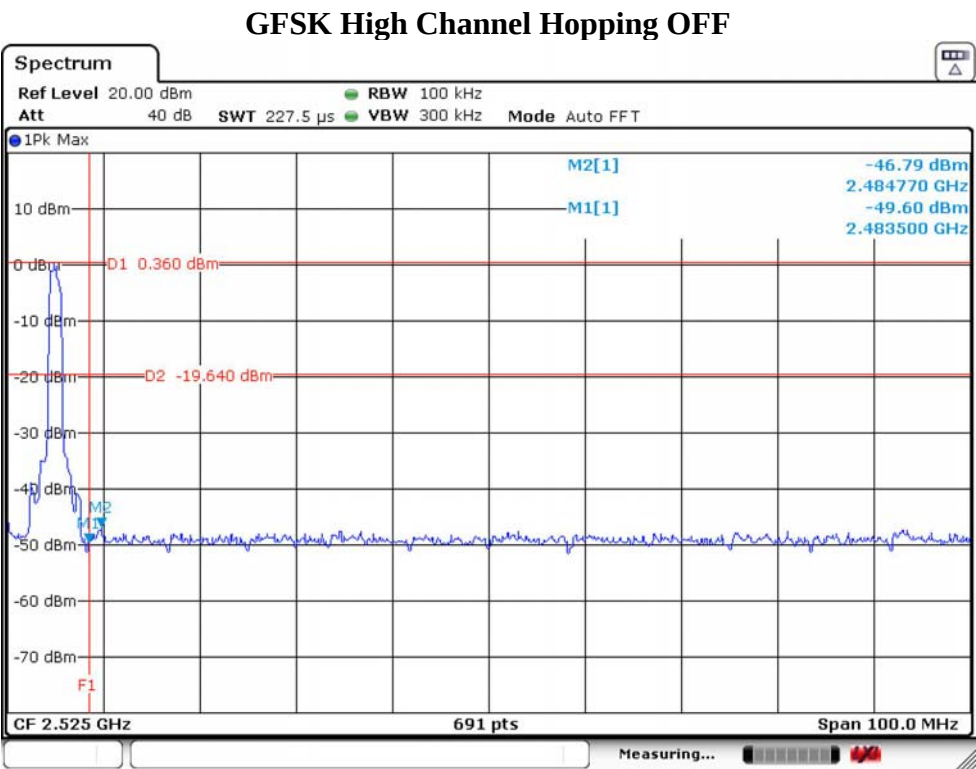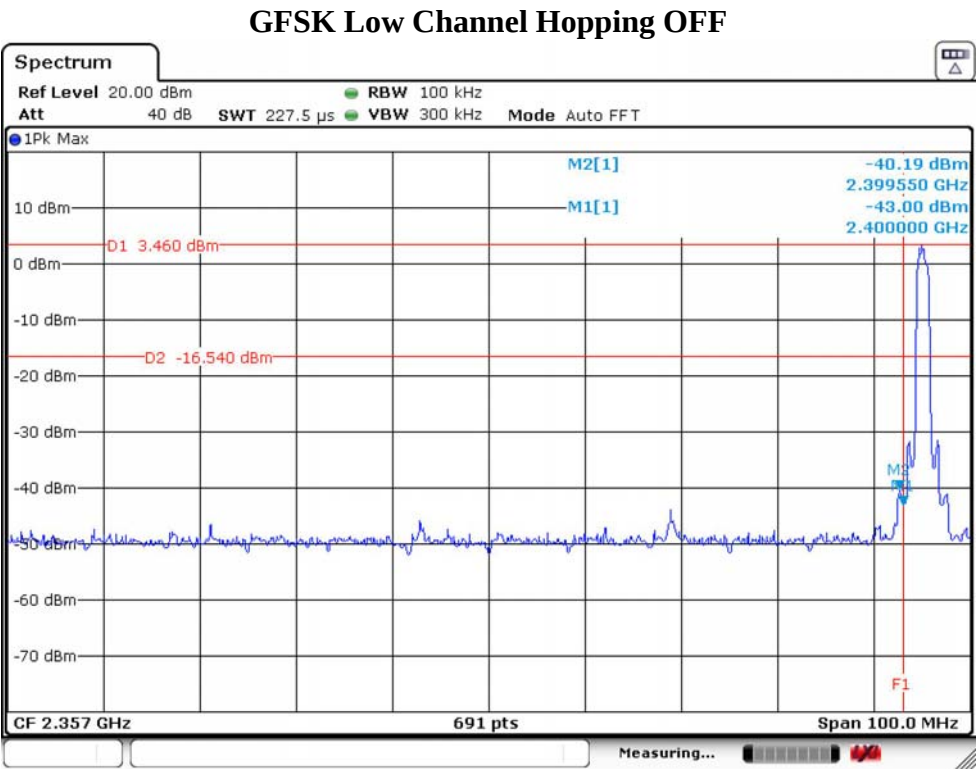


GFSK Low Channel Hopping ON

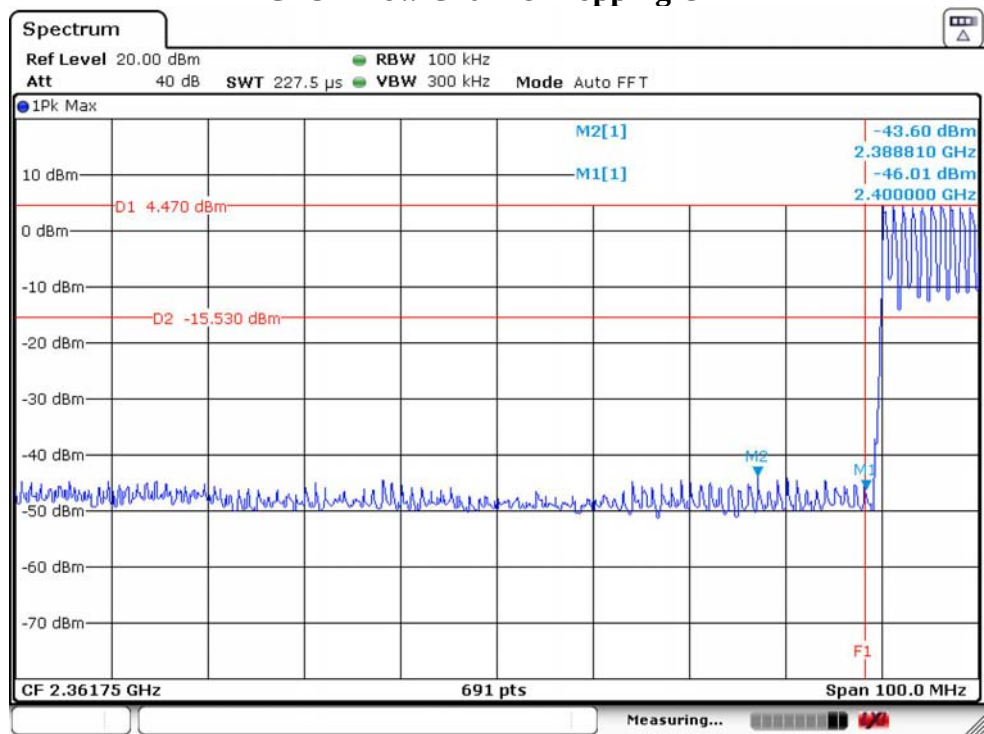


GFSK High Channel Hopping ON

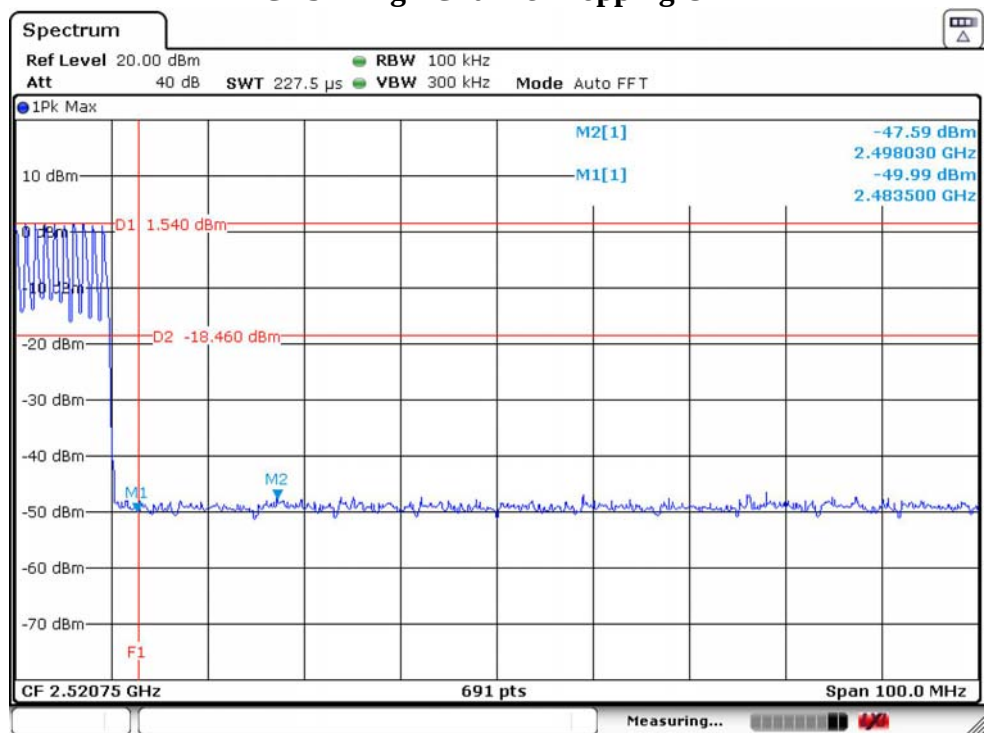


π /4DQPSK Low Channel Hopping OFF

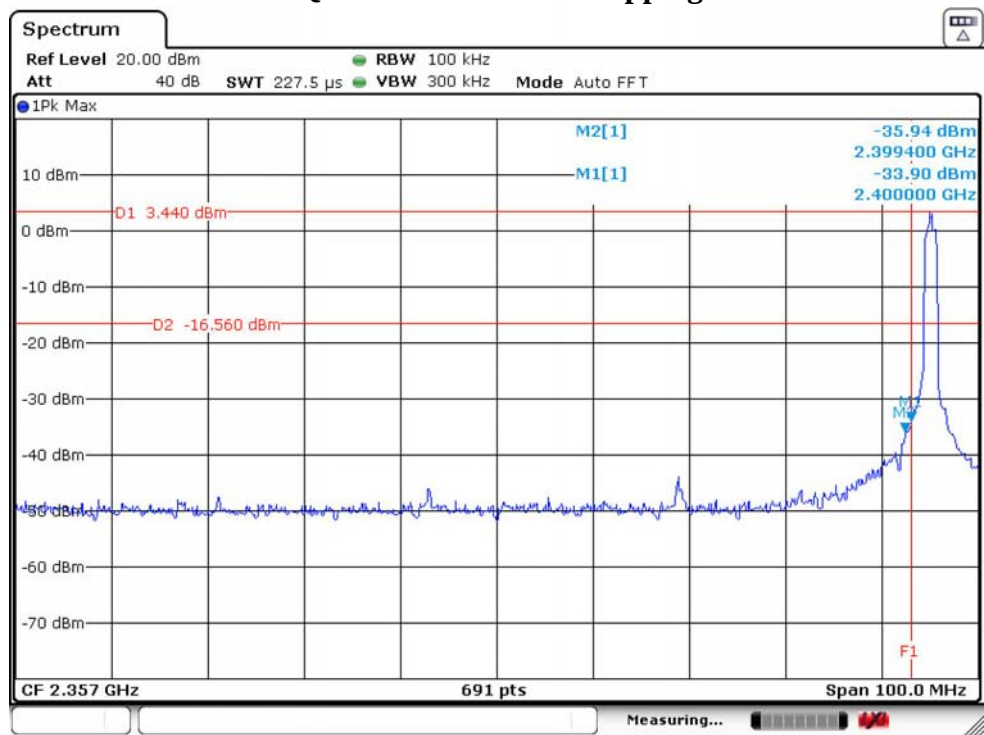


π /4DQPSK High Channel Hopping OFF

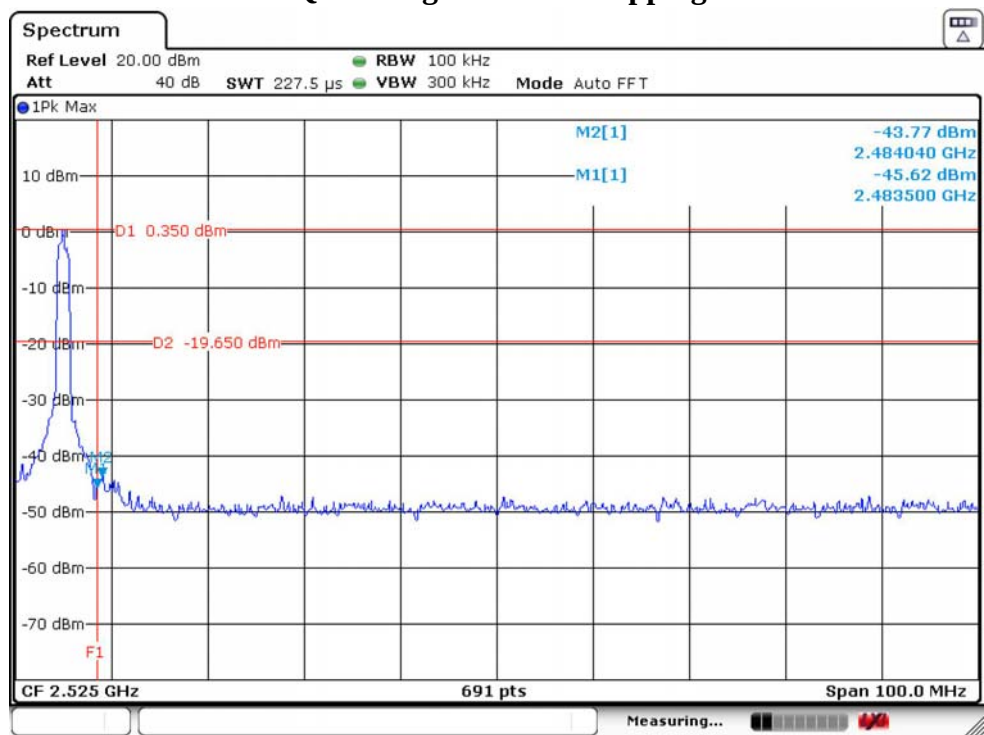


π /4DQPSK Low Channel Hopping ON

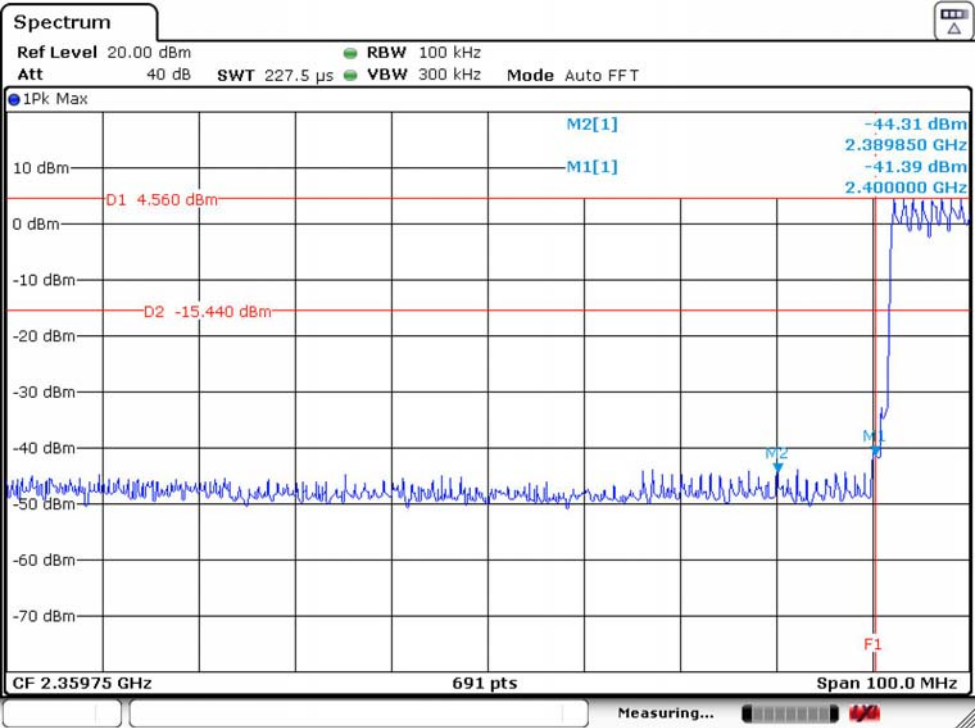


π /4DQPSK High Channel Hopping ON

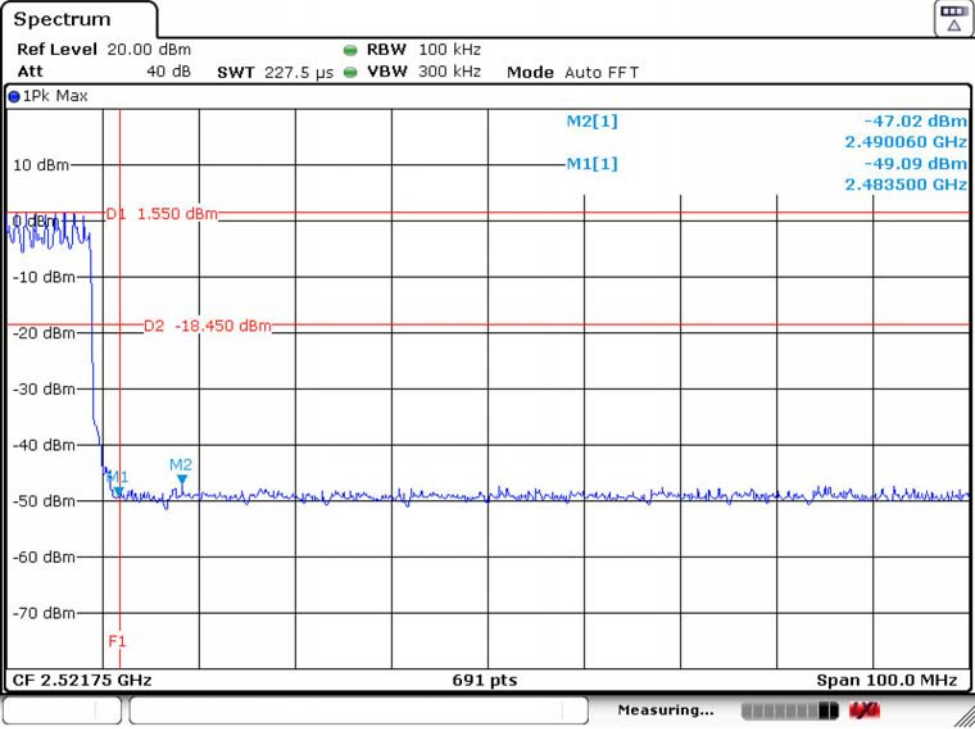


8-DPSK Low Channel Hopping OFF

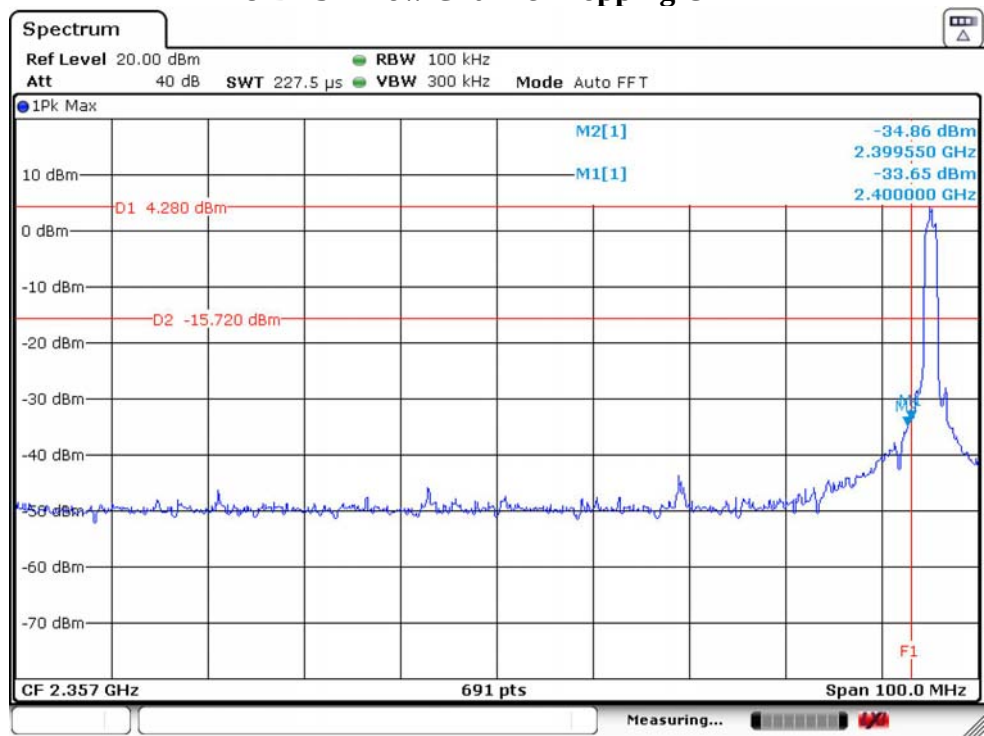


8-DPSK High Channel Hopping OFF

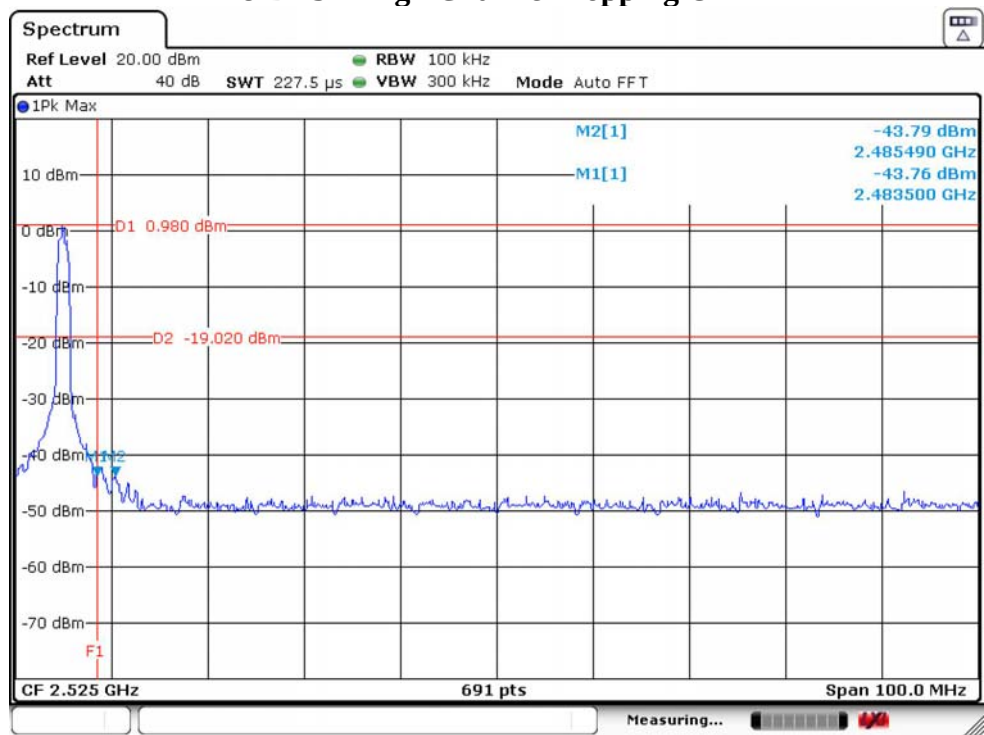

8-DPSK Low Channel Hopping ON

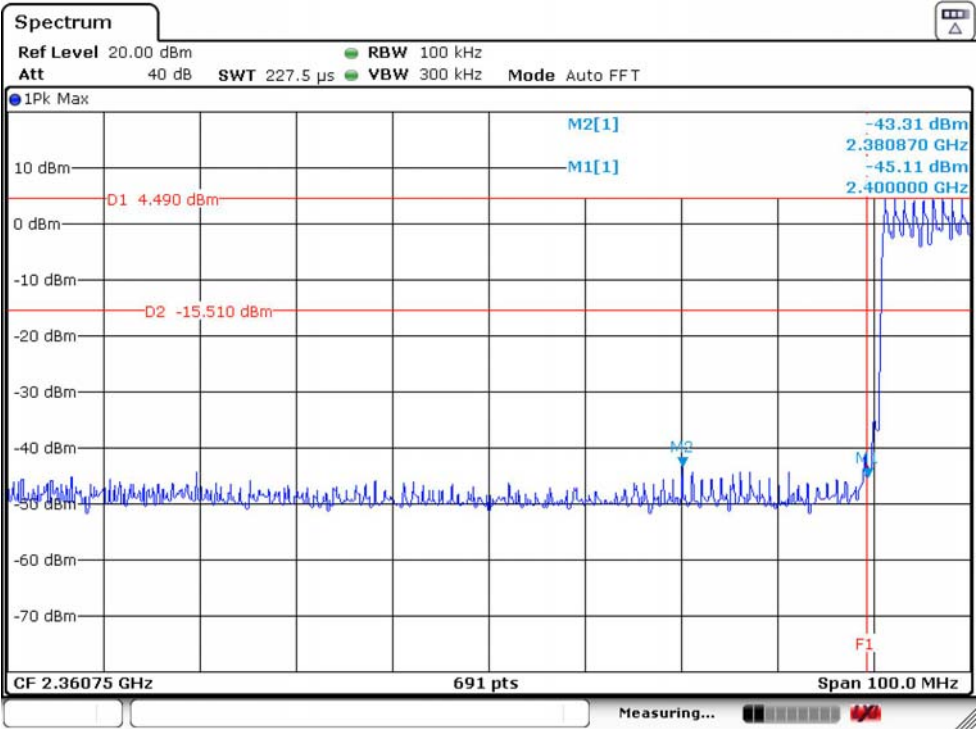

8-DPSK High Channel Hopping ON

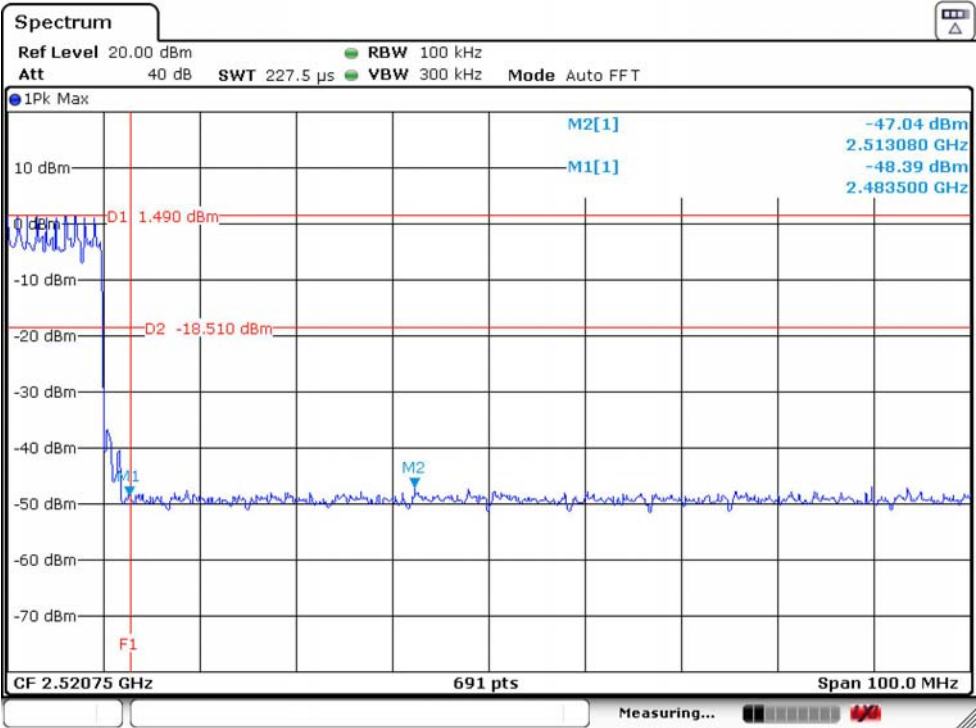


9. CONDUCTED SPURIOUS EMISSIONS

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.2. Test Setup

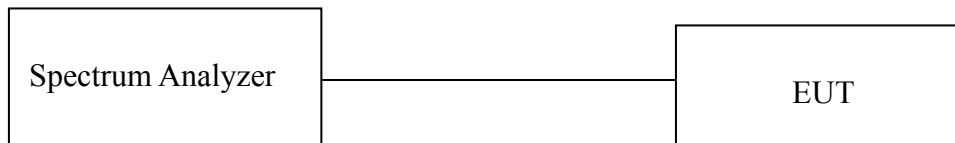

9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


9.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 8.3.
- Set the EUT transmit continuously with maximum output power over fixed single hopping channel.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all channels and test modes were measured.
- Record the results in the test report.


9.5. Test Result

Temperature	25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Result	PASS				


GFSK 2402 MHz

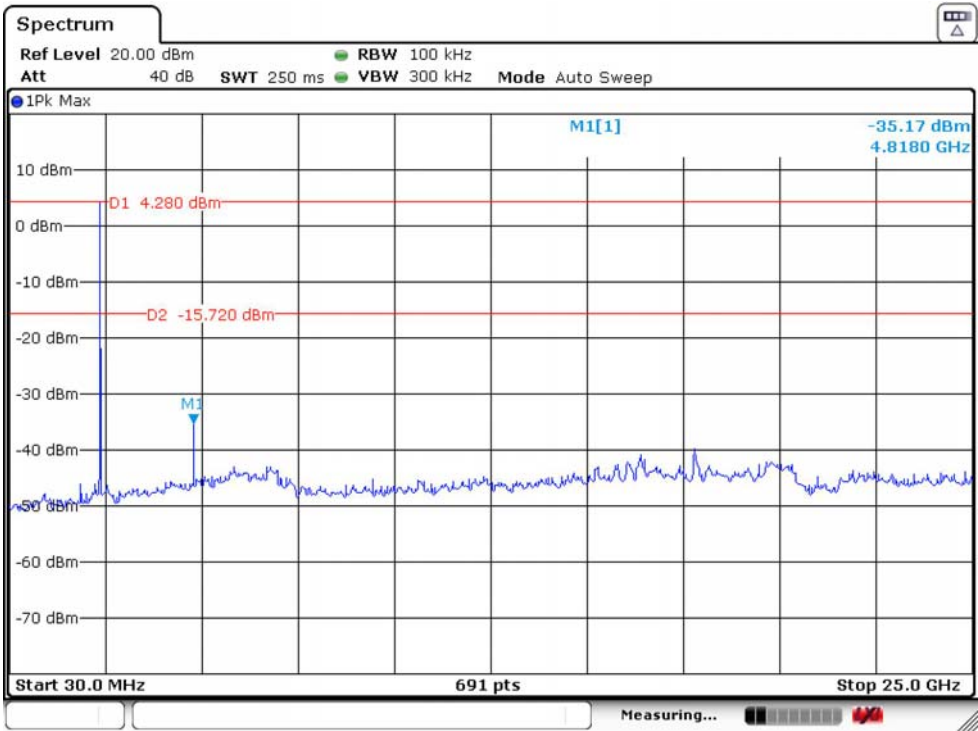


GFSK 2441 MHz

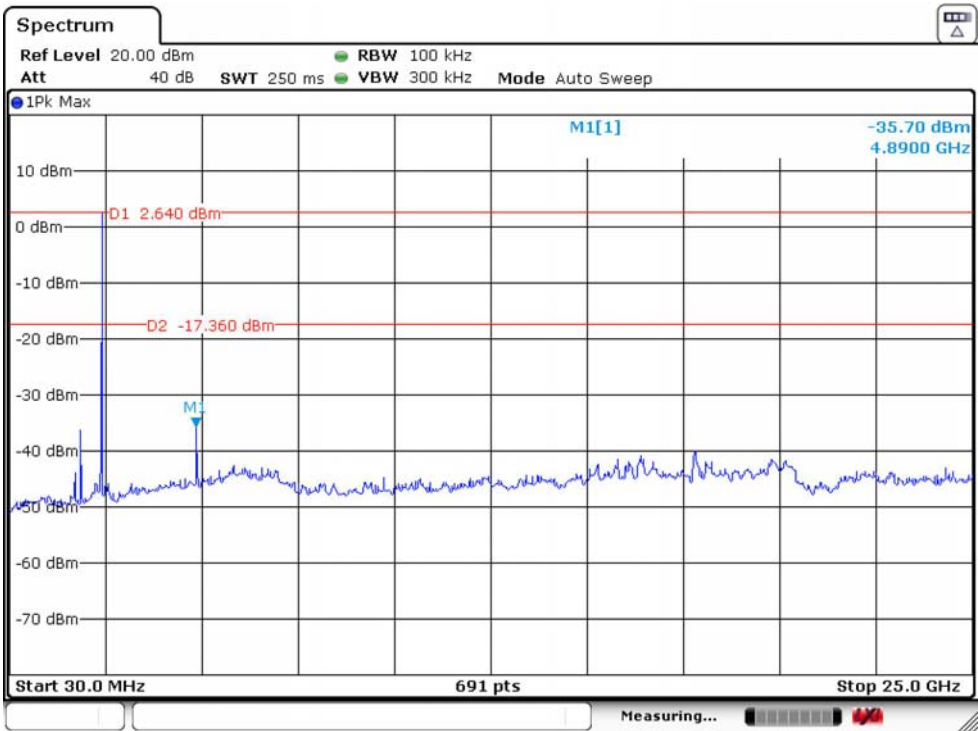


GFSK 2480 MHz

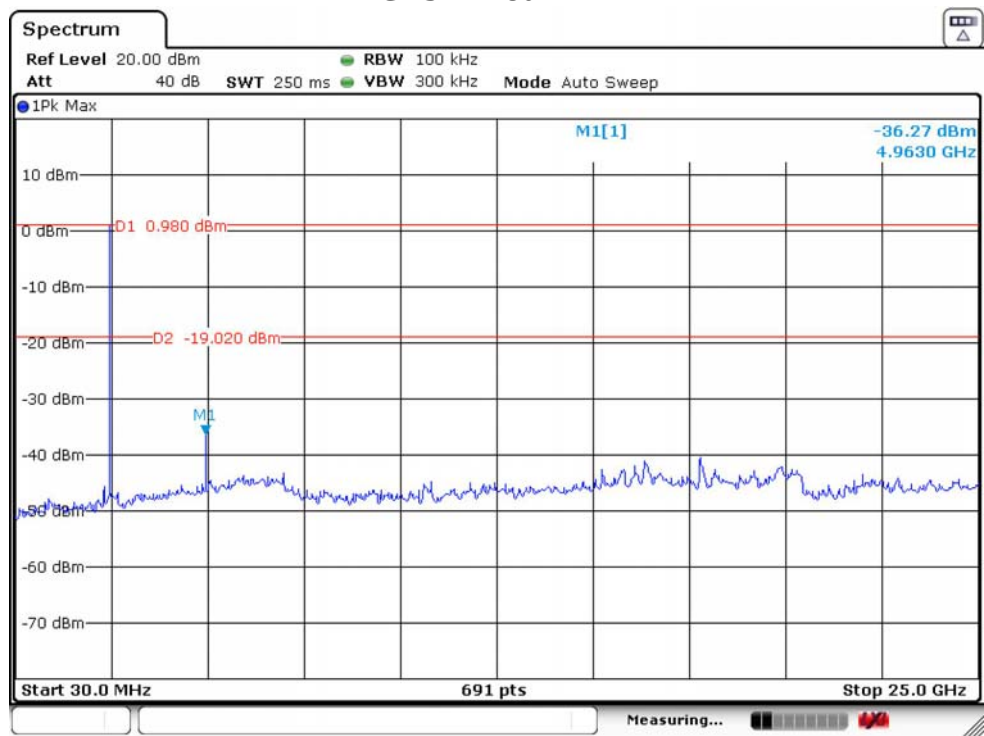


π /4DQPSK 2402MHz

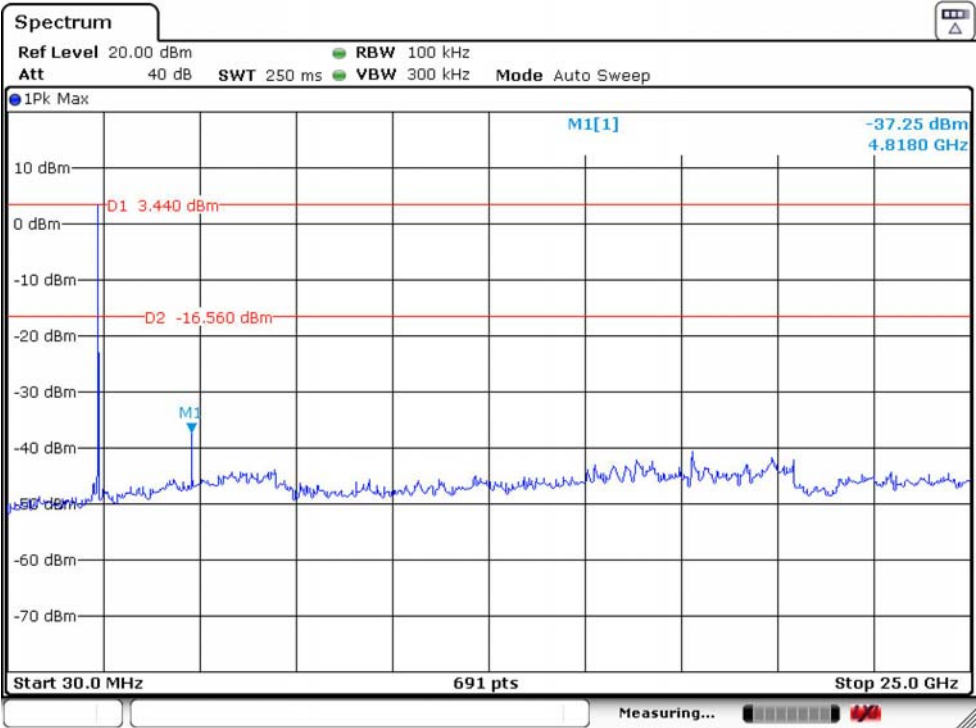


π /4DQPSK 2441MHz

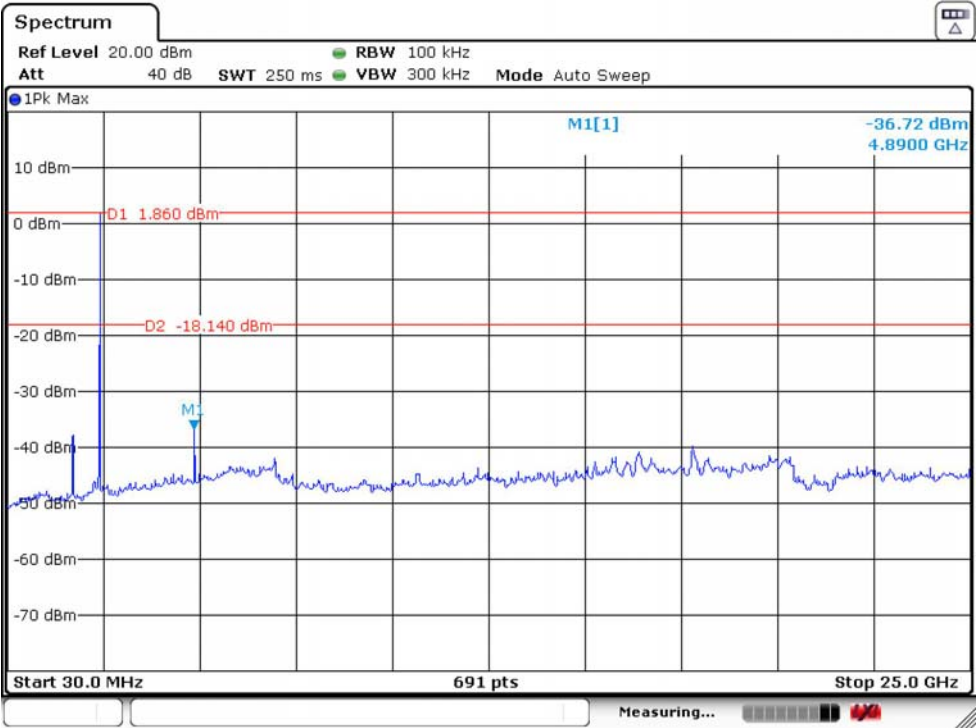


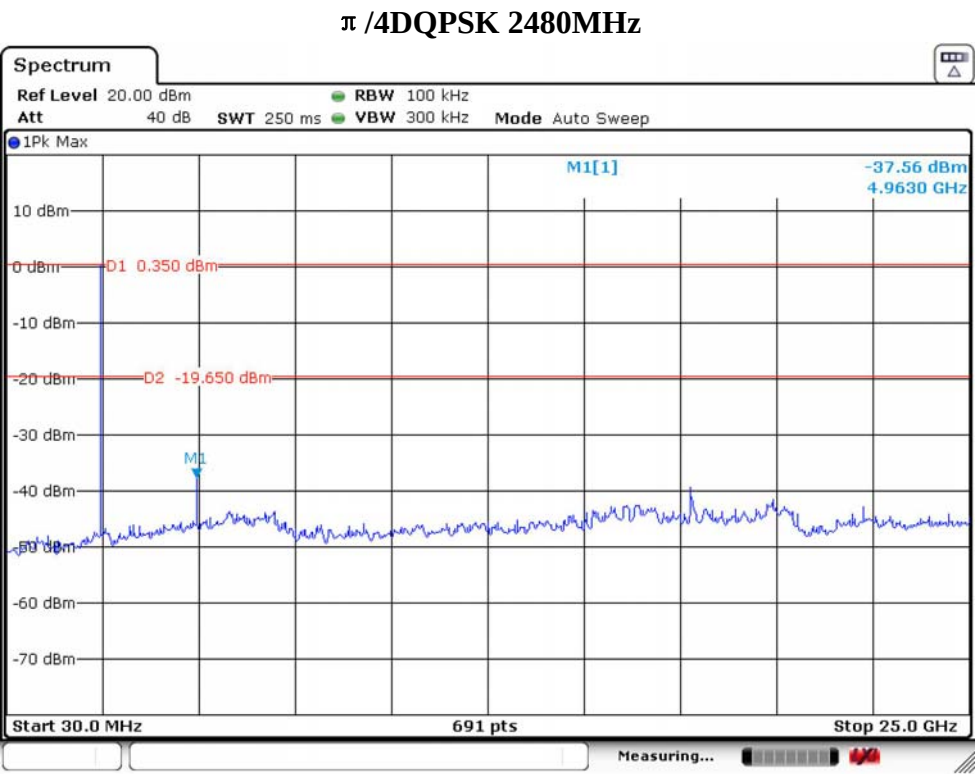


8-DPSK 2402MHz

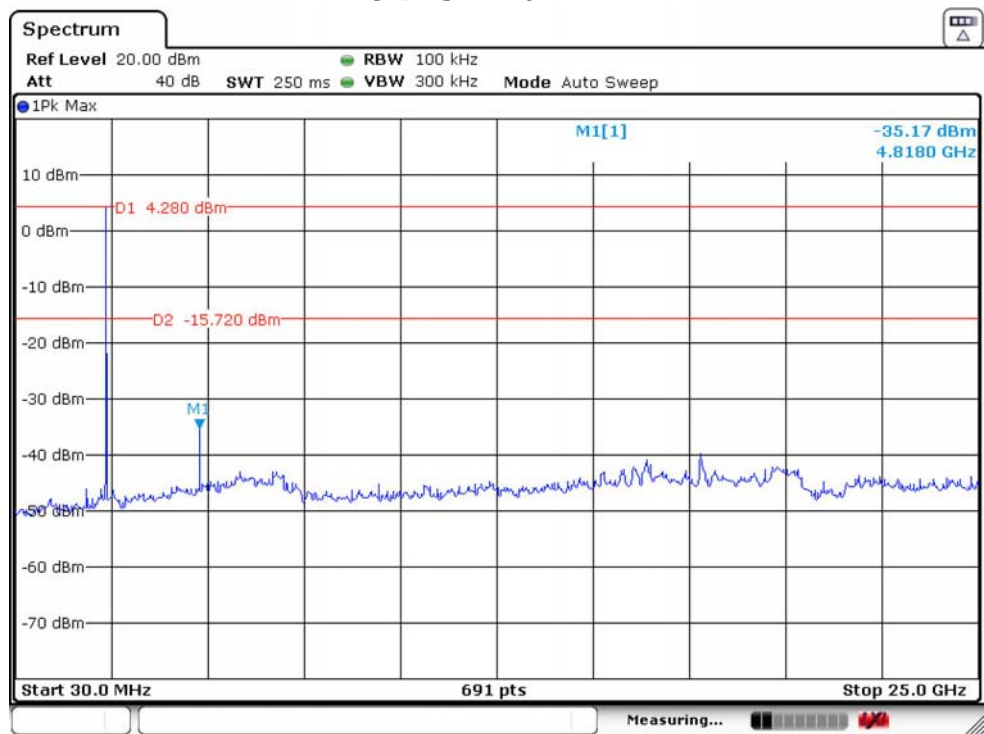

8-DPSK 2441MHz

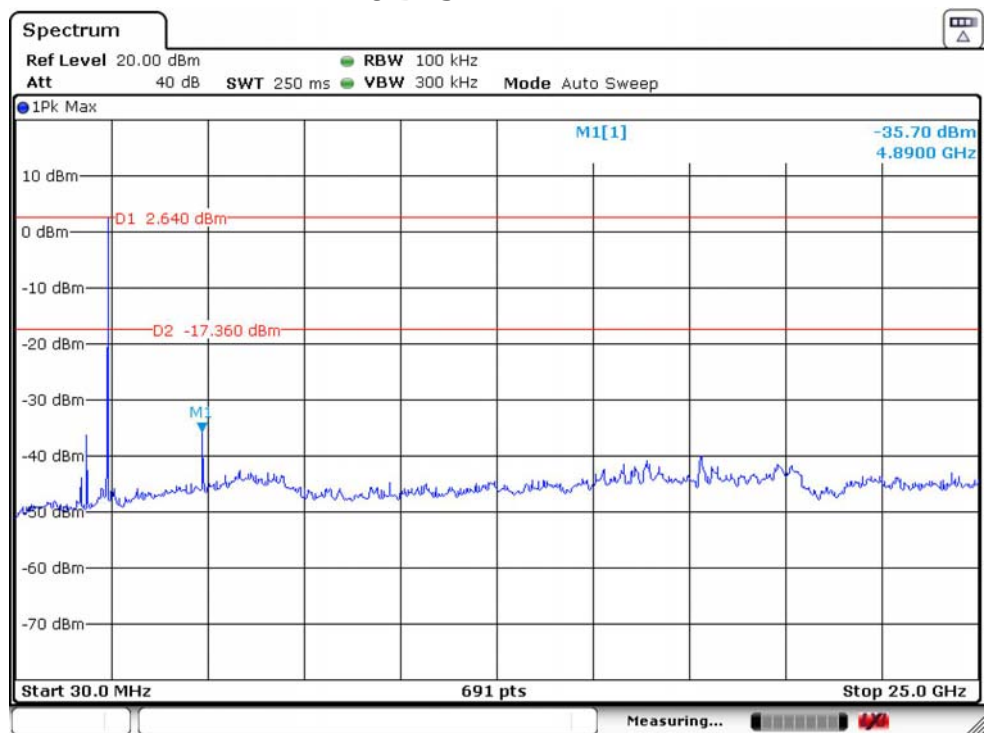

8-DPSK 2480MHz

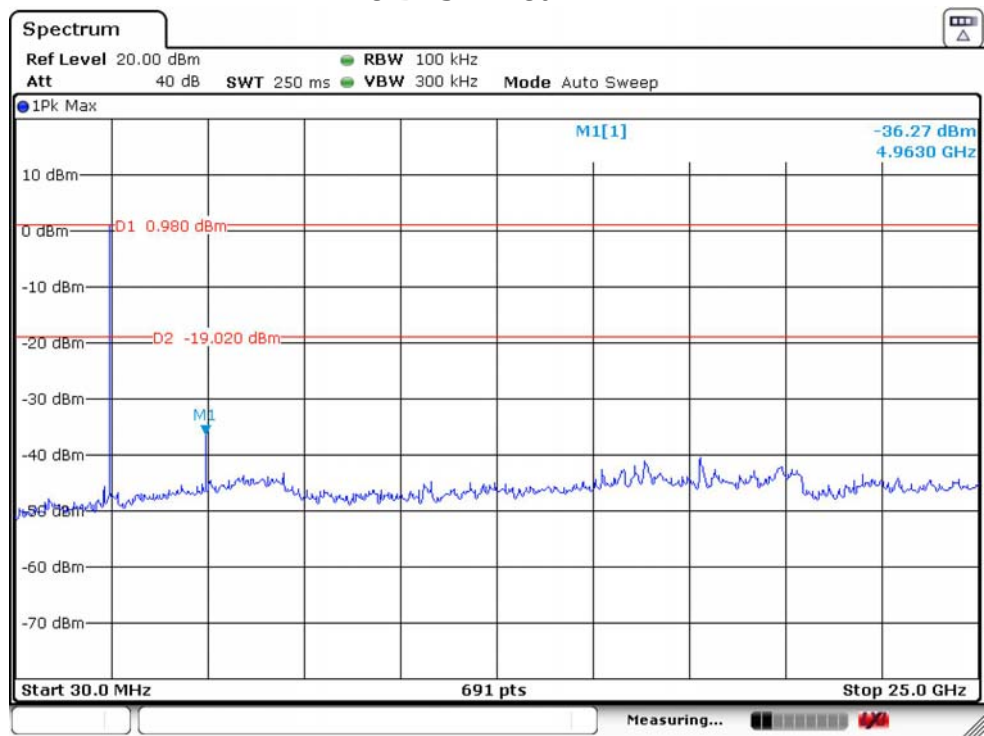

10. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

10.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

10.2. Test Setup

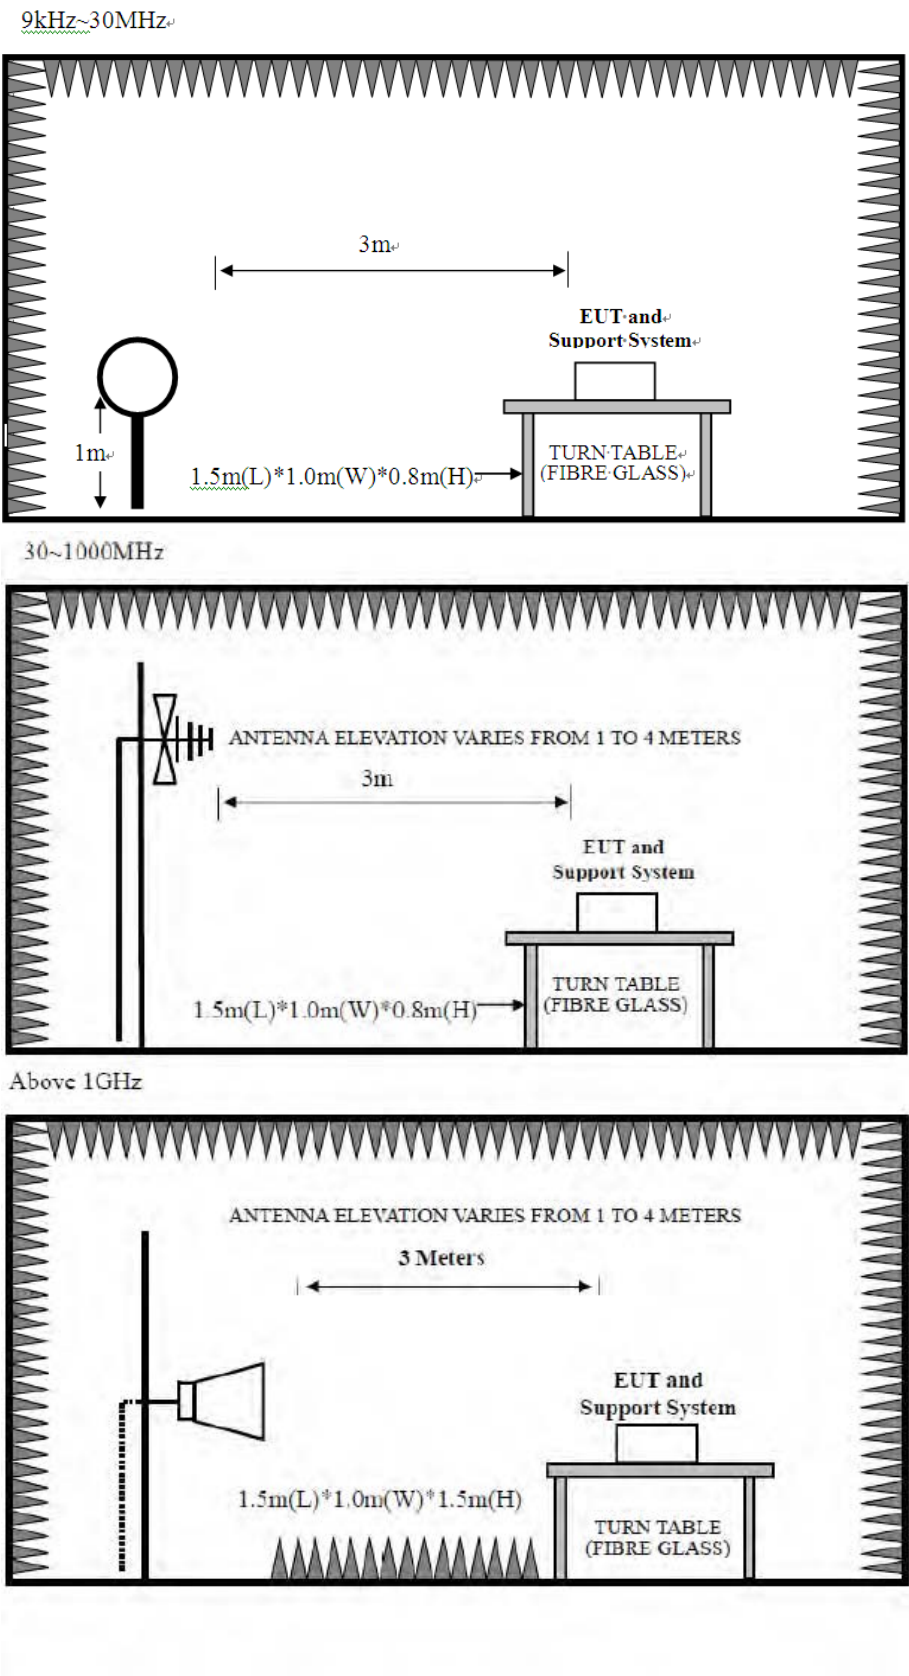

10.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz
		Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

10.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 10.3.
- g. Repeat above procedures until all channels and test modes were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2402MHz ,2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

10.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

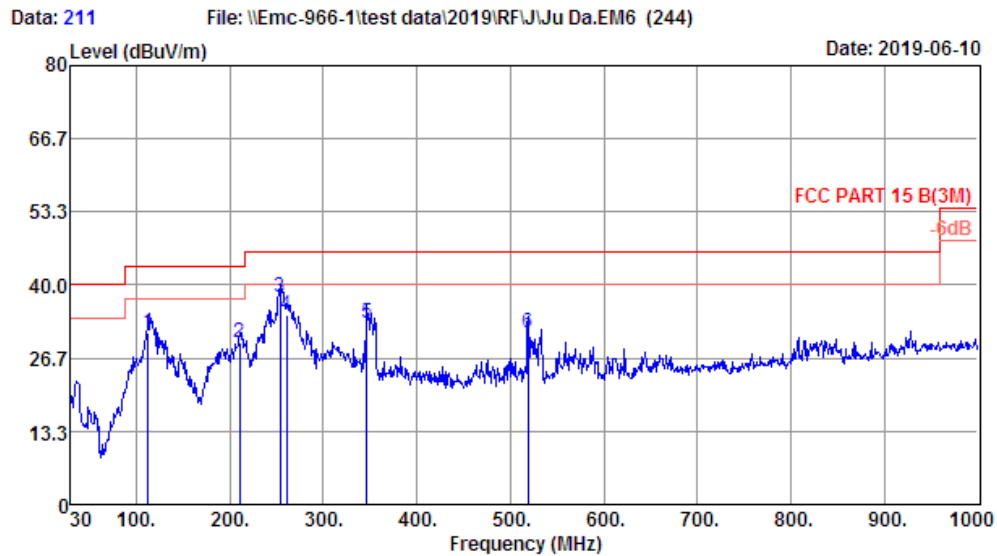


Site no. : 1# 966 Chamber Data no. : 211
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	112.45	10.95	0.95	19.41	31.31	43.50	12.19	QP
2	210.42	8.80	1.36	19.24	29.40	43.50	14.10	QP
3	254.07	13.00	1.65	23.14	37.79	46.00	8.21	QP
4	260.86	13.66	1.70	19.31	34.67	46.00	11.33	QP
5	346.22	15.02	2.08	16.10	33.20	46.00	12.80	QP
6	518.88	18.58	2.73	9.99	31.30	46.00	14.70	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

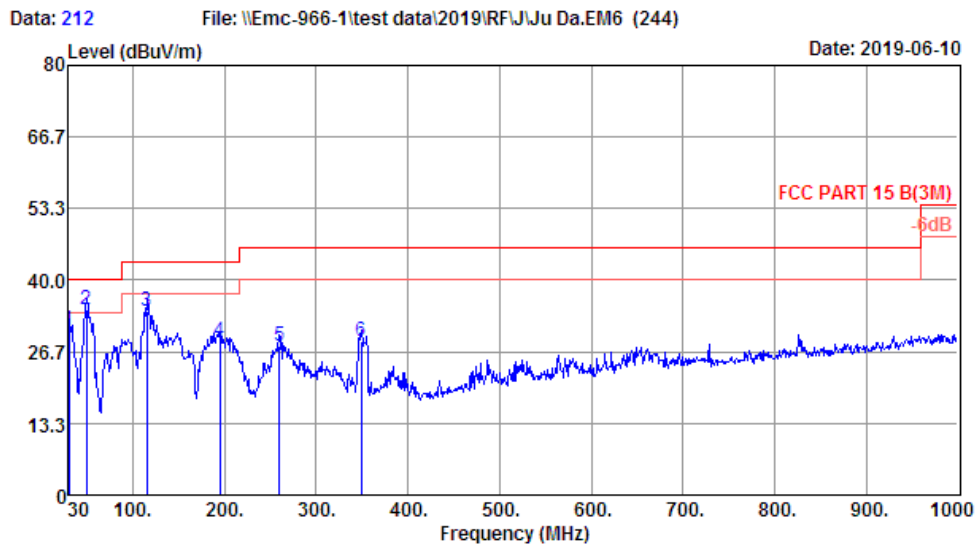

Site no. : 1# 966 Chamber Data no. : 212
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.50	0.14	11.99	30.63	40.00	9.37	QP
2	49.40	8.70	0.28	25.65	34.63	40.00	5.37	QP
3	115.36	11.20	0.93	22.18	34.31	43.50	9.19	QP
4	194.90	8.60	1.25	18.64	28.49	43.50	15.01	QP
5	259.89	13.70	1.69	12.34	27.73	46.00	18.27	QP
6	349.13	15.23	2.10	11.38	28.71	46.00	17.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only the worst case was reported.

Radiated Emissions Above 1G


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 215

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

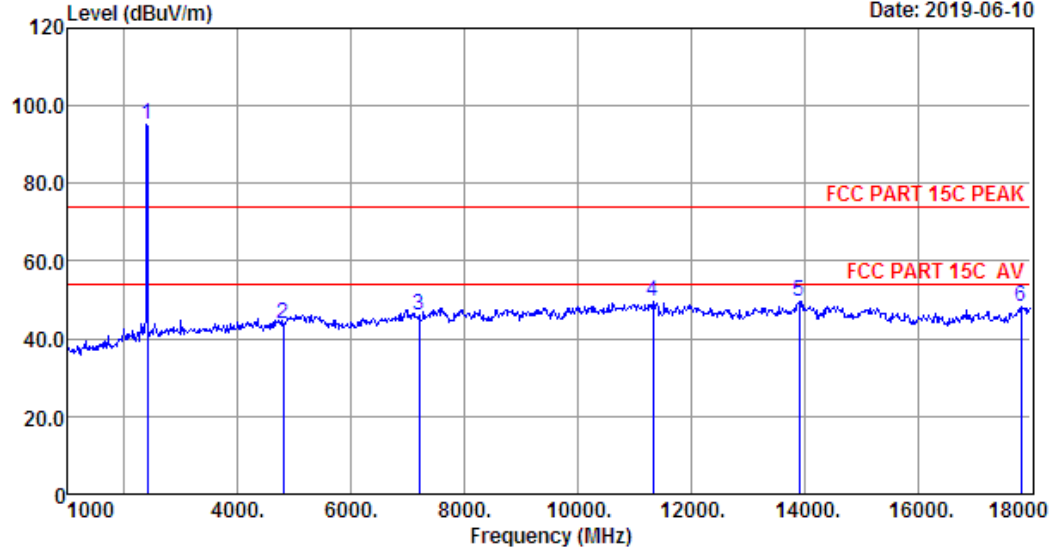

Site no. : 1# 966 Chamber Data no. : 215
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	4.03	33.23	97.04	95.10	74.00	-21.10	Peak
2	4804.00	31.16	6.02	33.38	40.15	43.95	74.00	30.05	Peak
3	7206.00	36.05	7.37	31.47	34.03	45.98	74.00	28.02	Peak
4	11336.00	39.76	9.97	30.65	30.54	49.62	74.00	24.38	Peak
5	13903.00	40.93	11.79	30.94	27.80	49.58	74.00	24.42	Peak
6	17830.00	46.95	13.43	30.21	17.97	48.14	74.00	25.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 216

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

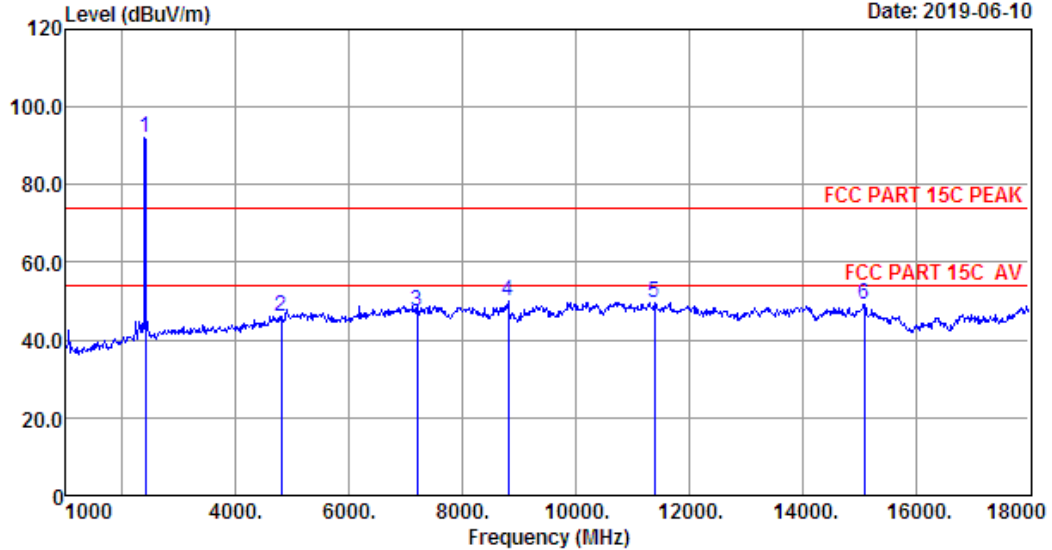

Site no. : 1# 966 Chamber Data no. : 216
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	4.03	33.23	93.99	92.05	74.00	-18.05	Peak
2	4804.00	31.16	6.02	33.38	42.10	45.90	74.00	28.10	Peak
3	7206.00	36.05	7.37	31.47	35.33	47.28	74.00	26.72	Peak
4	8803.00	36.50	8.73	30.58	35.47	50.12	74.00	23.88	Peak
5	11387.00	39.73	9.92	30.64	30.67	49.68	74.00	24.32	Peak
6	15093.00	40.71	12.18	31.10	27.51	49.30	74.00	24.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 217

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

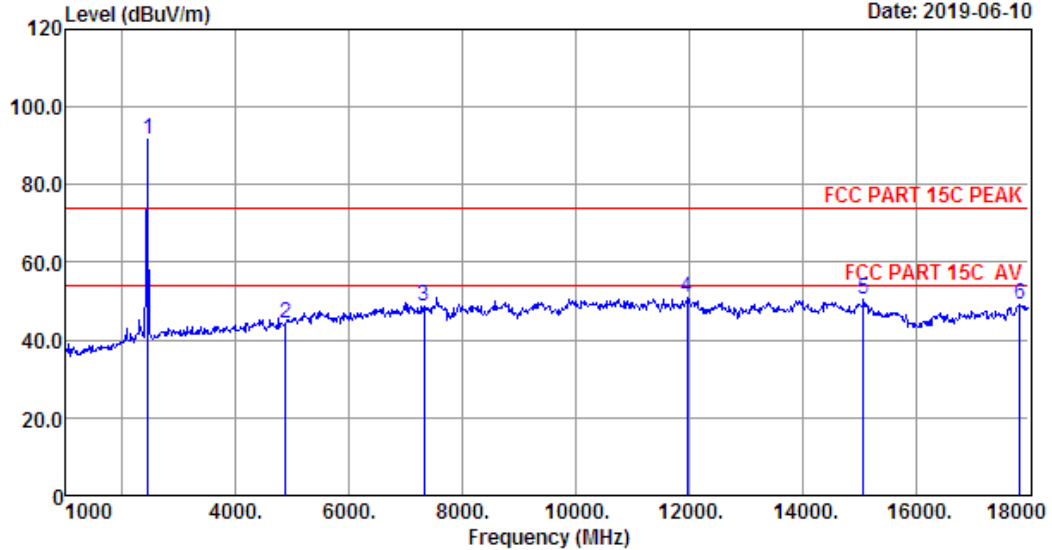

Site no. : 1# 966 Chamber Data no. : 217
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	4.03	33.39	93.87	91.84	74.00	-17.84	Peak
2	4882.00	31.39	6.10	33.02	39.78	44.25	74.00	29.75	Peak
3	7323.00	36.19	7.62	31.20	35.96	48.57	74.00	25.43	Peak
4	11965.00	39.32	10.72	30.30	31.01	50.75	74.00	23.25	Peak
5	15076.00	40.77	12.16	31.09	28.72	50.56	74.00	23.44	Peak
6	17847.00	47.06	13.48	30.23	18.97	49.28	74.00	24.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 218

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

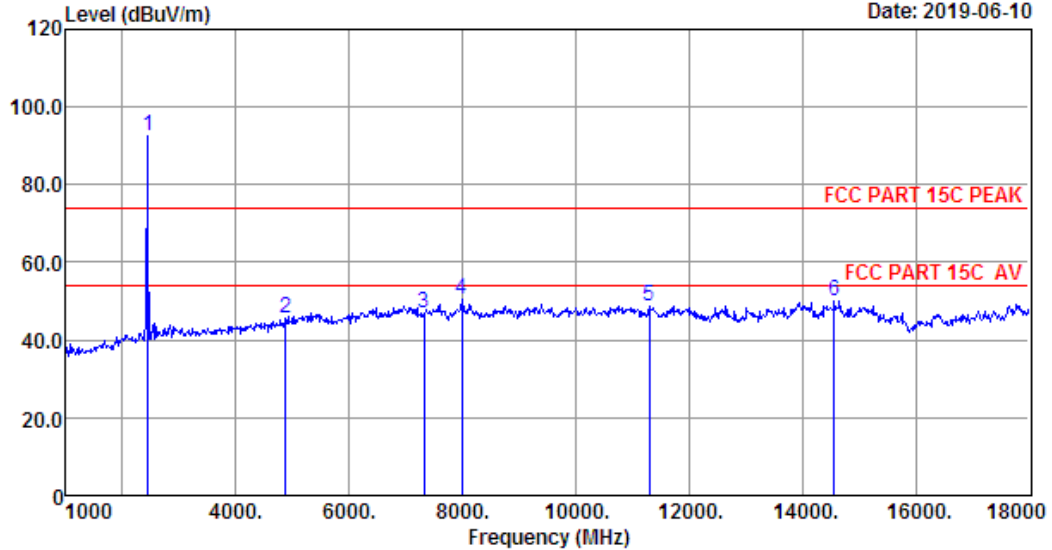

Site no. : 1# 966 Chamber Data no. : 218
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	4.03	33.39	94.68	92.65	74.00	-18.65	Peak
2	4882.00	31.39	6.10	33.02	41.06	45.53	74.00	28.47	Peak
3	7323.00	36.19	7.62	31.20	34.29	46.90	74.00	27.10	Peak
4	7987.00	36.50	8.07	32.22	38.00	50.35	74.00	23.65	Peak
5	11302.00	39.79	10.00	30.65	29.71	48.85	74.00	25.15	Peak
6	14566.00	41.04	12.19	31.39	28.14	49.98	74.00	24.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 219

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

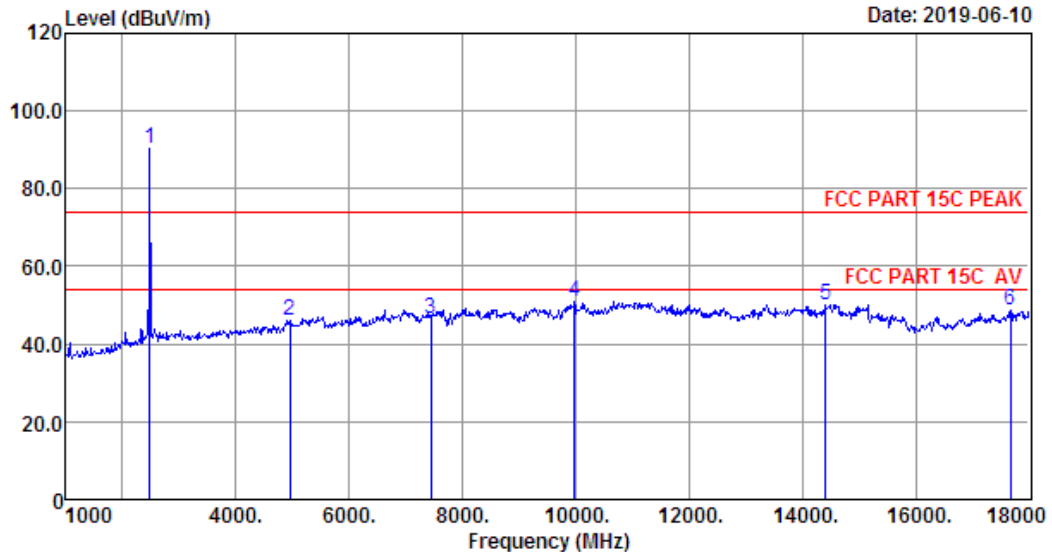

Site no. : 1# 966 Chamber Data no. : 219
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	4.03	33.56	92.62	90.47	74.00	-16.47	Peak
2	4960.00	31.68	6.10	33.40	41.79	46.17	74.00	27.83	Peak
3	7440.00	36.34	7.66	31.10	33.48	46.38	74.00	27.62	Peak
4	9976.00	38.47	9.36	32.85	35.84	50.82	74.00	23.18	Peak
5	14413.00	41.06	12.17	30.74	27.67	50.16	74.00	23.84	Peak
6	17677.00	45.91	13.52	30.21	19.71	48.93	74.00	25.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 220

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

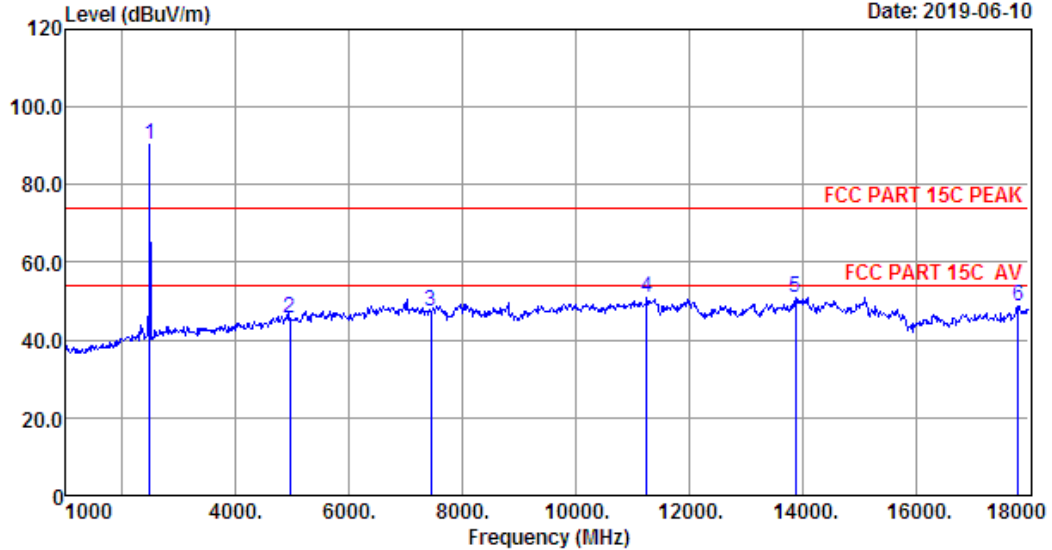

Site no. : 1# 966 Chamber Data no. : 220
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	4.03	33.56	92.35	90.20	74.00	-16.20	Peak
2	4960.00	31.68	6.10	33.40	41.15	45.53	74.00	28.47	Peak
3	7440.00	36.34	7.66	31.10	34.31	47.21	74.00	26.79	Peak
4	11251.00	39.82	10.02	30.67	31.63	50.80	74.00	23.20	Peak
5	13886.00	40.90	11.78	30.91	29.09	50.86	74.00	23.14	Peak
6	17813.00	46.83	13.38	30.18	18.85	48.88	74.00	25.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 221

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

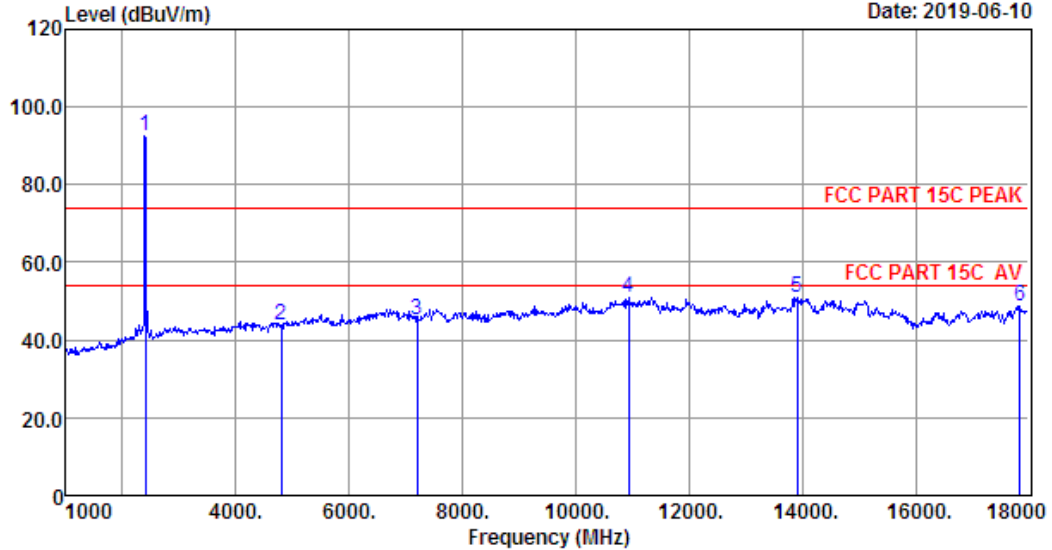

Site no. : 1# 966 Chamber Data no. : 221
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	4.03	33.23	94.50	92.56	74.00	-18.56	Peak
2	4804.00	31.16	6.02	33.38	39.84	43.64	74.00	30.36	Peak
3	7206.00	36.05	7.37	31.47	33.09	45.04	74.00	28.96	Peak
4	10928.00	39.90	9.86	31.80	32.97	50.93	74.00	23.07	Peak
5	13903.00	40.93	11.79	30.94	29.10	50.88	74.00	23.12	Peak
6	17847.00	47.06	13.48	30.23	18.23	48.54	74.00	25.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 222

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

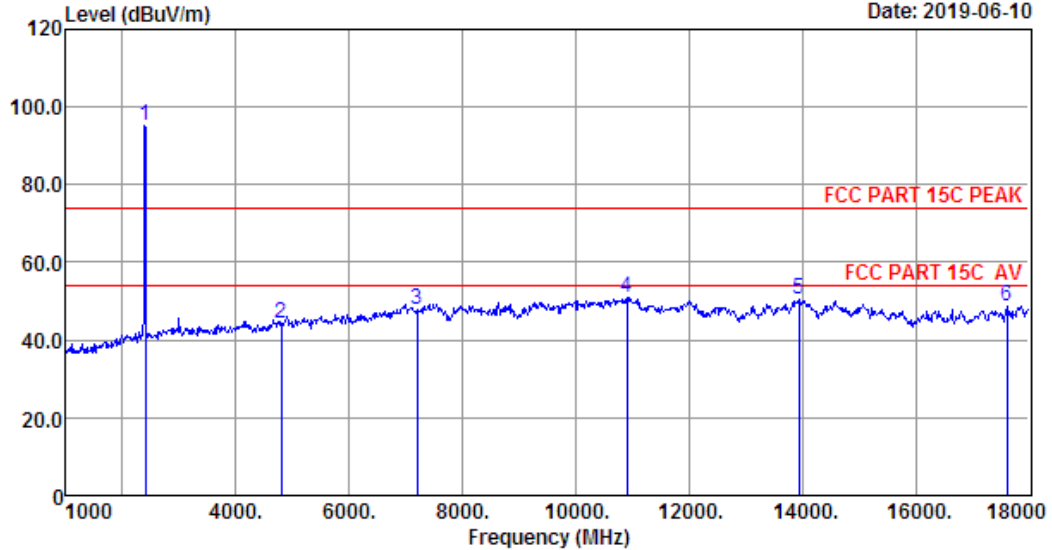

Site no. : 1# 966 Chamber Data no. : 222
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	4.03	33.23	97.14	95.20	74.00	-21.20	Peak
2	4804.00	31.16	6.02	33.38	40.65	44.45	74.00	29.55	Peak
3	7206.00	36.05	7.37	31.47	35.66	47.61	74.00	26.39	Peak
4	10911.00	39.87	9.77	31.87	33.32	51.09	74.00	22.91	Peak
5	13937.00	40.98	11.84	31.02	28.87	50.67	74.00	23.33	Peak
6	17609.00	45.45	13.62	30.20	19.93	48.80	74.00	25.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 223

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

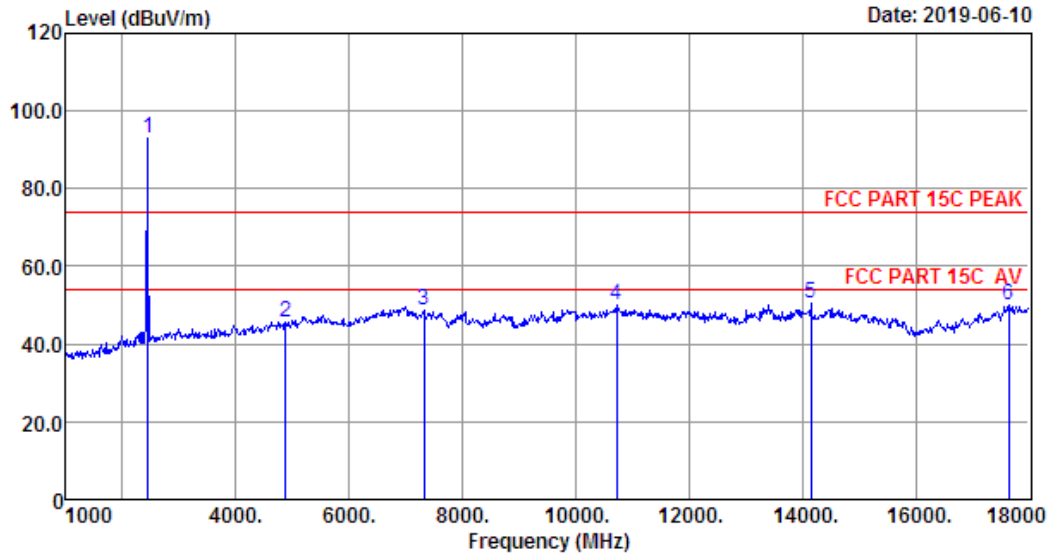

Site no. : 1# 966 Chamber Data no. : 223
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	4.03	33.39	94.95	92.92	74.00	-18.92	Peak
2	4882.00	31.39	6.10	33.02	40.94	45.41	74.00	28.59	Peak
3	7323.00	36.19	7.62	31.20	36.28	48.89	74.00	25.11	Peak
4	10724.00	39.59	9.83	32.08	32.67	50.01	74.00	23.99	Peak
5	14158.00	41.08	12.20	31.06	28.04	50.26	74.00	23.74	Peak
6	17643.00	45.68	13.57	30.20	21.18	50.23	74.00	23.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 224

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

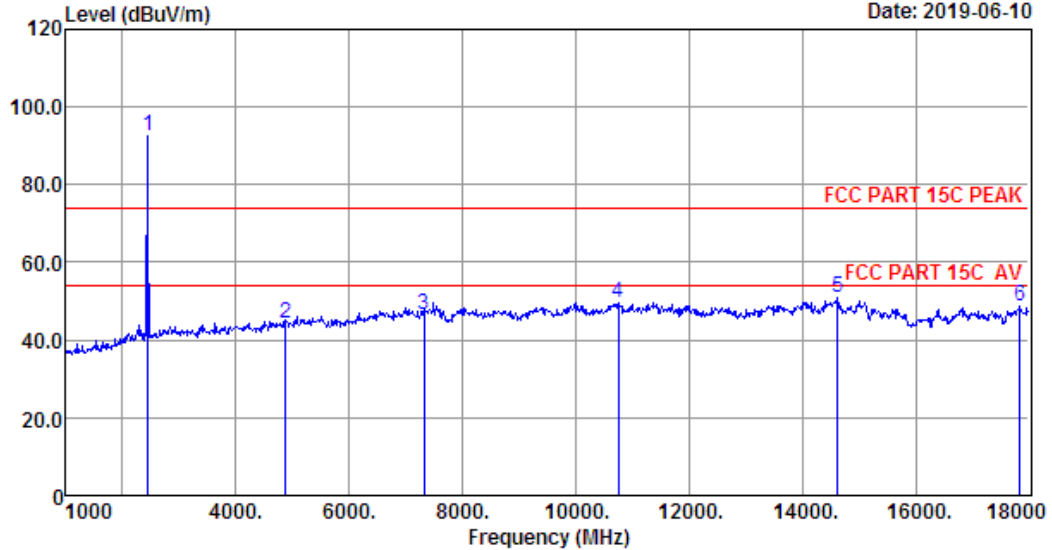

Site no. : 1# 966 Chamber Data no. : 224
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	4.03	33.39	94.38	92.35	74.00	-18.35	Peak
2	4882.00	31.39	6.10	33.02	39.94	44.41	74.00	29.59	Peak
3	7323.00	36.19	7.62	31.20	33.92	46.53	74.00	27.47	Peak
4	10758.00	39.64	9.84	31.95	32.23	49.76	74.00	24.24	Peak
5	14617.00	41.04	12.31	31.45	29.11	51.01	74.00	22.99	Peak
6	17847.00	47.06	13.48	30.23	18.46	48.77	74.00	25.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 225

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

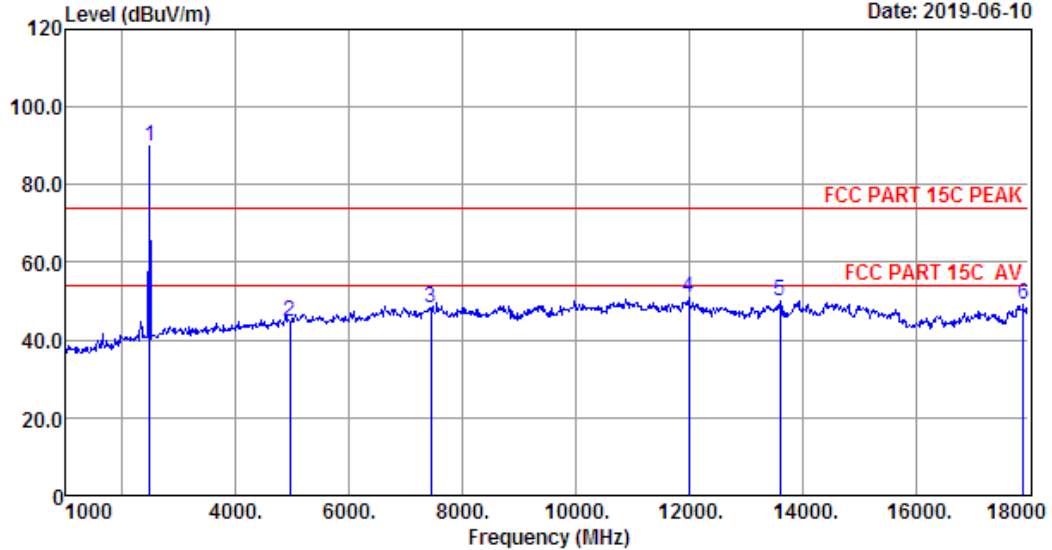

Site no. : 1# 966 Chamber Data no. : 225
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	4.03	33.56	92.05	89.90	74.00	-15.90	Peak
2	4960.00	31.68	6.10	33.40	40.13	44.51	74.00	29.49	Peak
3	7440.00	36.34	7.66	31.10	35.22	48.12	74.00	25.88	Peak
4	11999.00	39.30	10.80	30.20	31.01	50.91	74.00	23.09	Peak
5	13614.00	40.44	11.57	30.60	28.52	49.93	74.00	24.07	Peak
6	17898.00	47.41	13.63	30.31	18.21	48.94	74.00	25.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 226

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

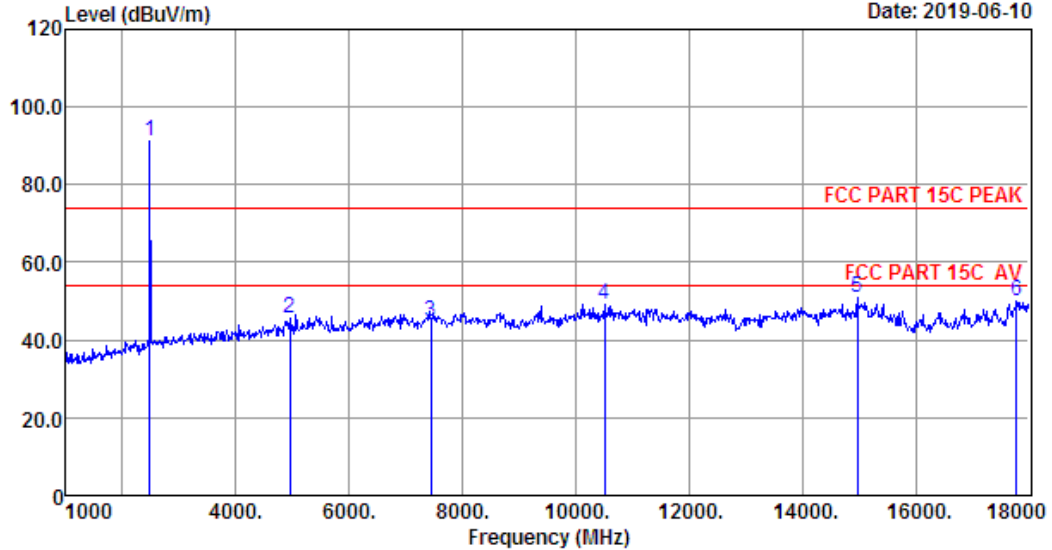

Site no. : 1# 966 Chamber Data no. : 226
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	4.03	33.56	93.58	91.43	74.00	-17.43	Peak
2	4960.00	31.68	6.10	33.40	41.01	45.39	74.00	28.61	Peak
3	7440.00	36.34	7.66	31.10	31.63	44.53	74.00	29.47	Peak
4	10503.00	39.26	9.50	32.27	32.65	49.14	74.00	24.86	Peak
5	14974.00	41.00	12.07	31.10	29.13	51.10	74.00	22.90	Peak
6	17779.00	46.60	13.42	30.19	20.23	50.06	74.00	23.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 227

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

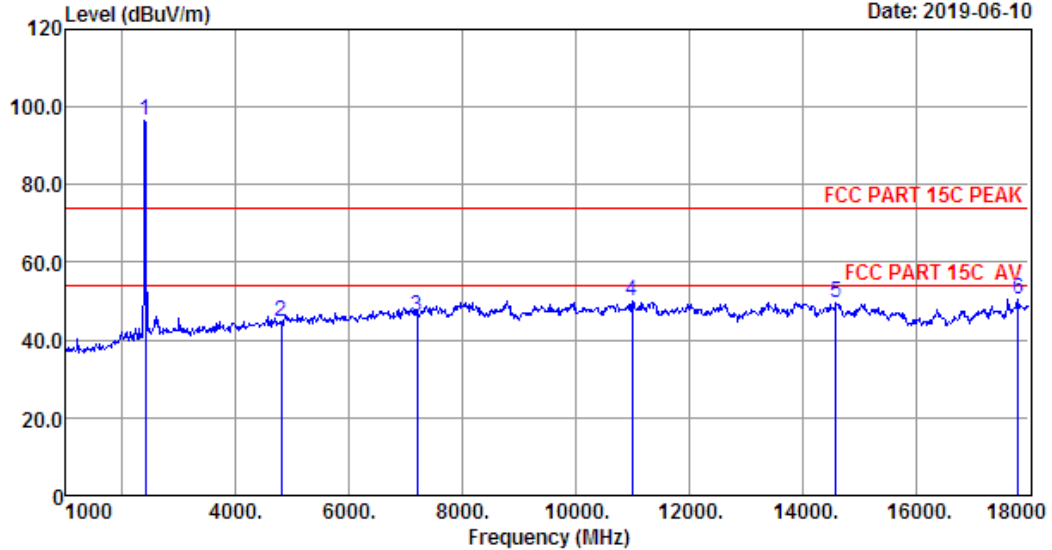

Site no. : 1# 966 Chamber Data no. : 227
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	4.03	33.23	98.34	96.40	74.00	-22.40	Peak
2	4804.00	31.16	6.02	33.38	40.77	44.57	74.00	29.43	Peak
3	7206.00	36.05	7.37	31.47	34.30	46.25	74.00	27.75	Peak
4	10996.00	40.00	10.20	31.51	31.13	49.82	74.00	24.18	Peak
5	14600.00	41.04	12.36	31.49	27.76	49.67	74.00	24.33	Peak
6	17813.00	46.83	13.38	30.18	20.40	50.43	74.00	23.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 228

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

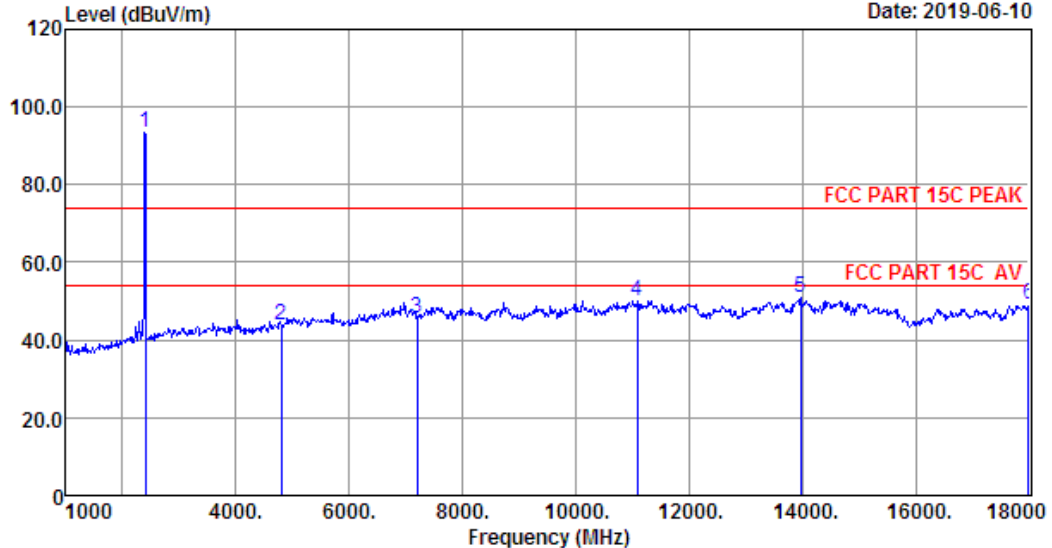

Site no. : 1# 966 Chamber Data no. : 228
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	4.03	33.23	95.23	93.29	74.00	-19.29	Peak
2	4804.00	31.16	6.02	33.38	40.12	43.92	74.00	30.08	Peak
3	7206.00	36.05	7.37	31.47	33.80	45.75	74.00	28.25	Peak
4	11081.00	39.94	9.97	31.16	31.37	50.12	74.00	23.88	Peak
5	13971.00	41.04	11.89	31.10	29.02	50.85	74.00	23.15	Peak
6	18000.00	48.10	13.45	30.31	17.84	49.08	74.00	24.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 229

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

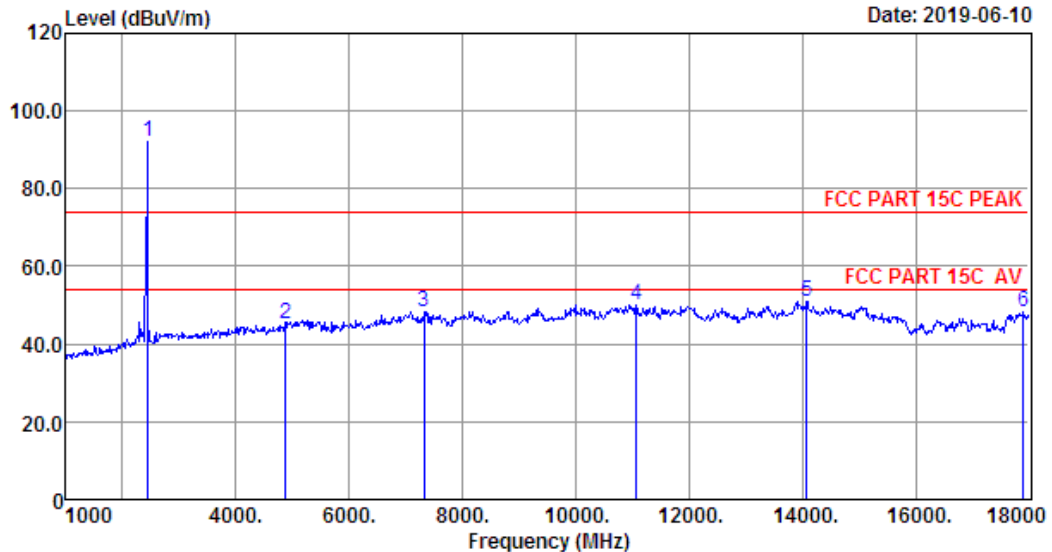

Site no. : 1# 966 Chamber Data no. : 229
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	4.03	33.39	94.04	92.01	74.00	-18.01	Peak
2	4882.00	31.39	6.10	33.02	40.70	45.17	74.00	28.83	Peak
3	7323.00	36.19	7.62	31.20	35.52	48.13	74.00	25.87	Peak
4	11064.00	39.95	10.01	31.23	31.50	50.23	74.00	23.77	Peak
5	14073.00	41.09	12.24	31.06	28.74	51.01	74.00	22.99	Peak
6	17898.00	47.41	13.63	30.31	17.47	48.20	74.00	25.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 230

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

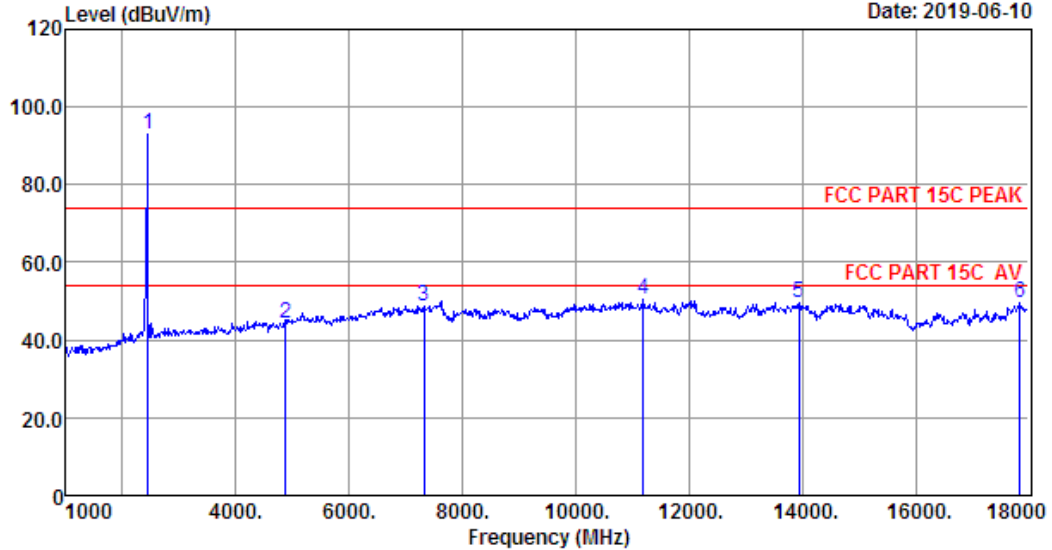

Site no. : 1# 966 Chamber Data no. : 230
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	4.03	33.39	94.85	92.82	74.00	-18.82	Peak
2	4882.00	31.39	6.10	33.02	39.88	44.35	74.00	29.65	Peak
3	7323.00	36.19	7.62	31.20	36.13	48.74	74.00	25.26	Peak
4	11200.00	39.86	10.04	30.70	31.15	50.35	74.00	23.65	Peak
5	13937.00	40.98	11.84	31.02	27.86	49.66	74.00	24.34	Peak
6	17847.00	47.06	13.48	30.23	19.27	49.58	74.00	24.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 231

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

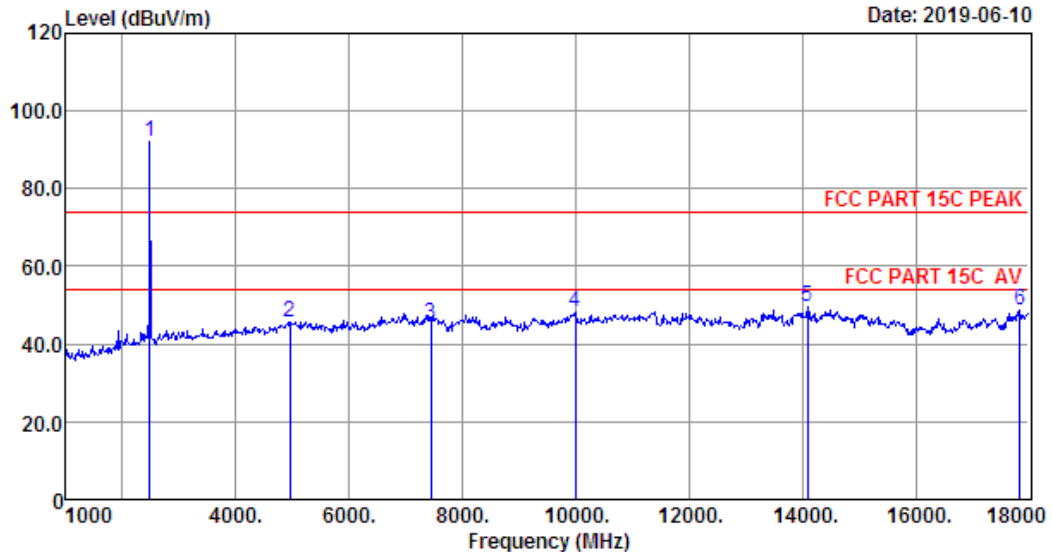


Site no. : 1# 966 Chamber Data no. : 231
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	4.03	33.56	94.03	91.88	74.00	-17.88	Peak
2	4960.00	31.68	6.10	33.40	41.03	45.41	74.00	28.59	Peak
3	7440.00	36.34	7.66	31.10	32.36	45.26	74.00	28.74	Peak
4	9993.00	38.50	9.36	32.78	33.23	48.31	74.00	25.69	Peak
5	14090.00	41.09	12.30	31.05	27.06	49.40	74.00	24.60	Peak
6	17847.00	47.06	13.48	30.23	18.20	48.51	74.00	25.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

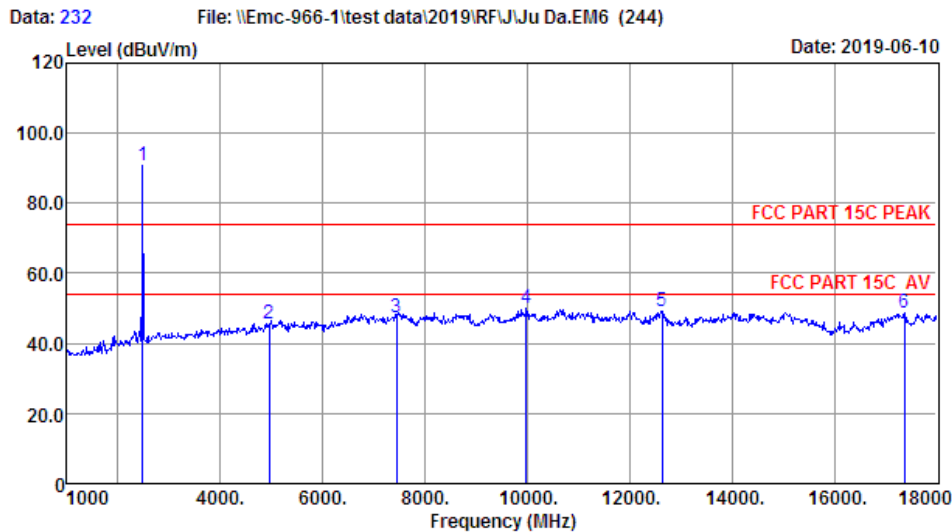

Site no. : 1# 966 Chamber Data no. : 232
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	4.03	33.56	93.11	90.96	74.00	-16.96	Peak
2	4960.00	31.68	6.10	33.40	41.03	45.41	74.00	28.59	Peak
3	7440.00	36.34	7.66	31.10	34.33	47.23	74.00	26.77	Peak
4	9976.00	38.47	9.36	32.85	35.10	50.08	74.00	23.92	Peak
5	12628.00	39.36	10.85	31.08	30.02	49.15	74.00	24.85	Peak
6	17371.00	43.84	13.34	29.74	21.05	48.49	74.00	25.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only Low/Middle/High Channel of the worst case modulation mode was reported.

Radiated Band Edge


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 233

File: \\Emc-966-1\\test data\\2019\\RF\\J\\Ju Da.EM6 (244)

Date: 2019-06-10

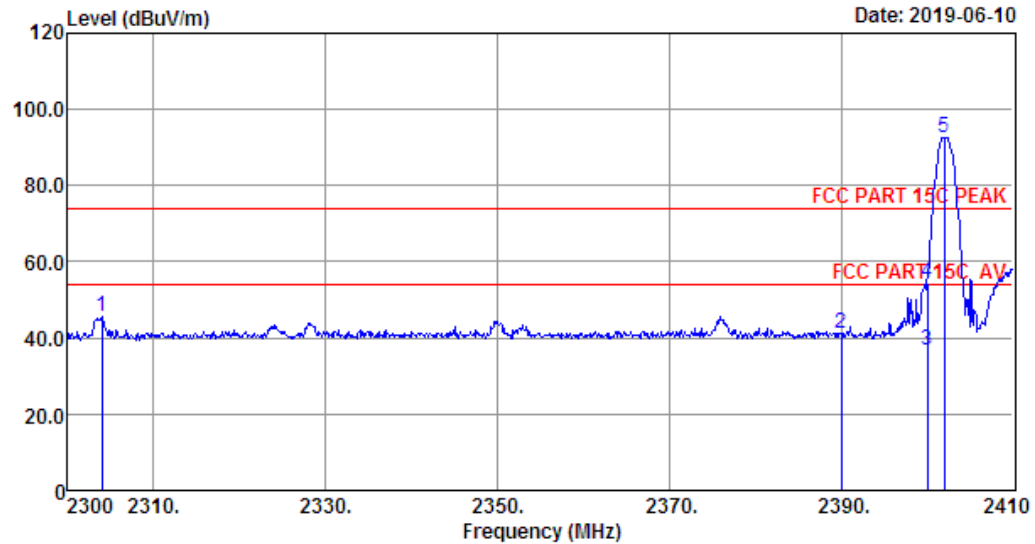

Site no. : 1# 966 Chamber Data no. : 233
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2303.96	27.13	3.84	33.29	47.96	45.64	74.00	28.36	Peak
2	2390.00	27.26	4.00	33.24	43.07	41.09	74.00	32.91	Peak
3	2400.00	27.26	4.03	33.23	38.83	36.89	54.00	17.11	Average
4	2400.00	27.26	4.03	33.23	56.35	54.41	74.00	19.59	Peak
5	2401.97	27.26	4.03	33.23	94.67	92.73	74.00	-18.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 234

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

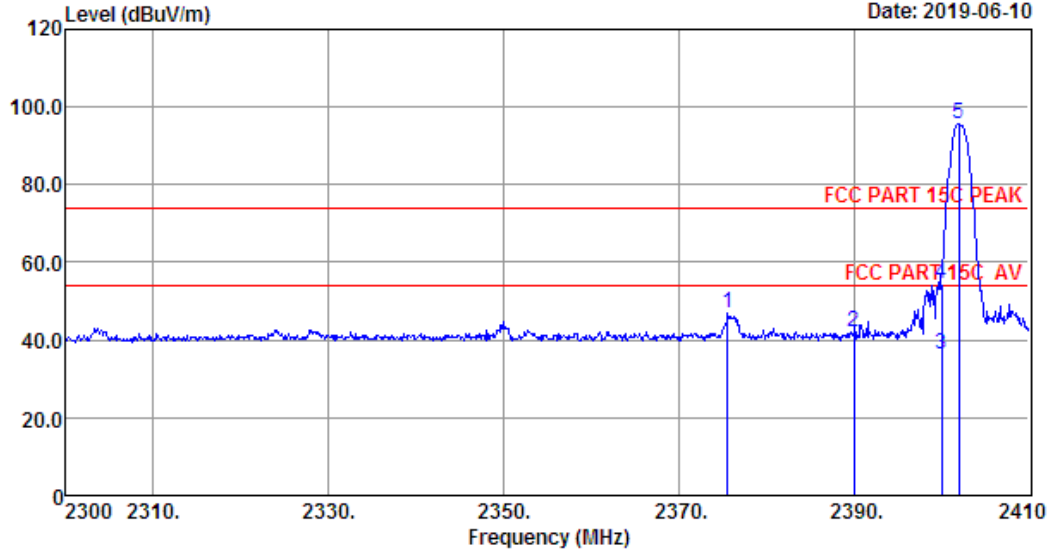

Site no. : 1# 966 Chamber Data no. : 234
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.57	27.23	3.97	33.25	48.94	46.89	74.00	27.11	Peak
2	2390.00	27.26	4.00	33.24	43.84	41.86	74.00	32.14	Peak
3	2400.00	27.26	4.03	33.23	38.23	36.29	54.00	17.71	Average
4	2400.00	27.26	4.03	33.23	56.31	54.37	74.00	19.63	Peak
5	2401.97	27.26	4.03	33.23	97.44	95.50	74.00	-21.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 235

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

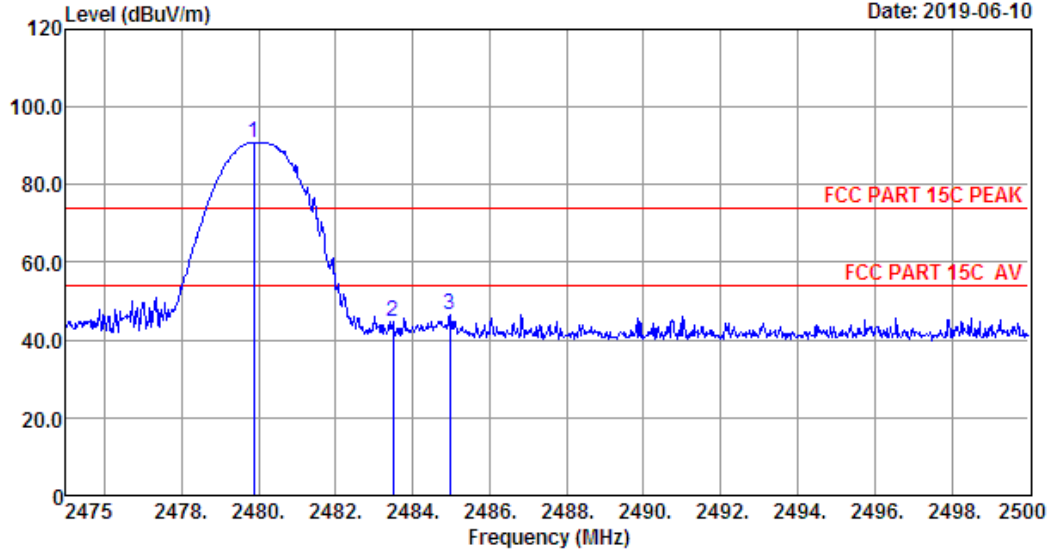

Site no. : 1# 966 Chamber Data no. : 235
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.38	4.03	33.56	92.99	90.84	74.00	-16.84	Peak
2	2483.50	27.38	4.03	33.56	46.66	44.51	74.00	29.49	Peak
3	2484.98	27.38	4.03	33.56	48.63	46.48	74.00	27.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 236

File: \\Emc-966-1\\test data\\2019\\RF\\J\\Ju Da.EM6 (244)

Date: 2019-06-10

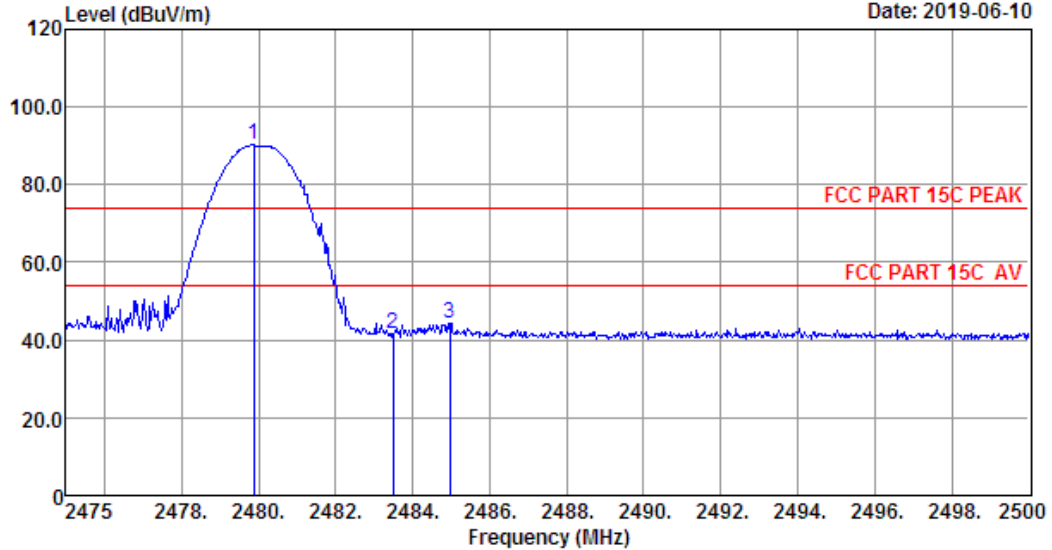

Site no. : 1# 966 Chamber Data no. : 236
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.38	4.03	33.56	92.31	90.16	74.00	-16.16	Peak
2	2483.50	27.38	4.03	33.56	43.91	41.76	74.00	32.24	Peak
3	2484.98	27.38	4.03	33.56	46.41	44.26	74.00	29.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 237

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

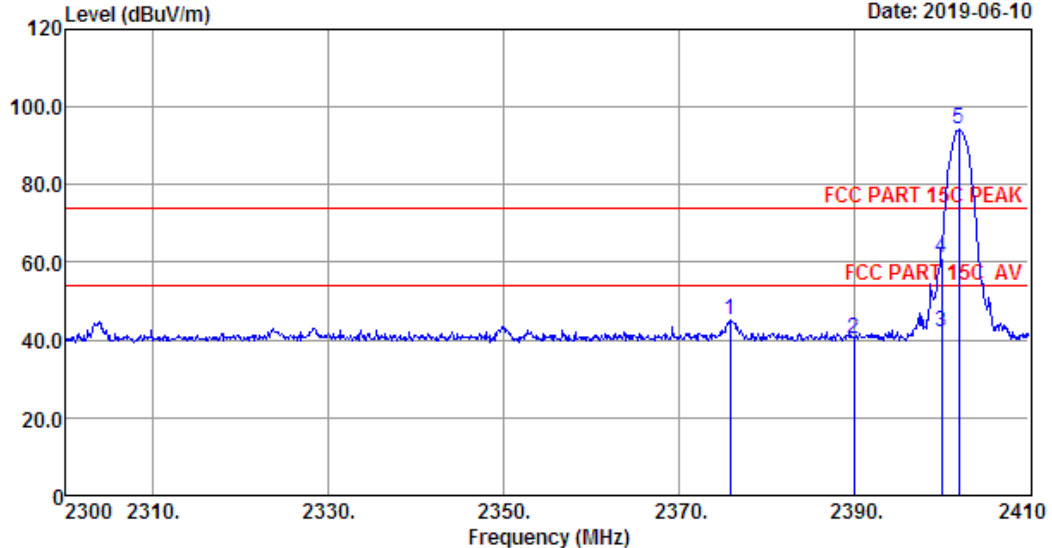

Site no. : 1# 966 Chamber Data no. : 237
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.90	27.23	3.97	33.25	47.33	45.28	74.00	28.72	Peak
2	2390.00	27.26	4.00	33.24	42.49	40.51	74.00	33.49	Peak
3	2400.00	27.26	4.03	33.23	43.81	41.87	54.00	12.13	Average
4	2400.00	27.26	4.03	33.23	62.99	61.05	74.00	12.95	Peak
5	2401.97	27.26	4.03	33.23	96.19	94.25	74.00	-20.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 238

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

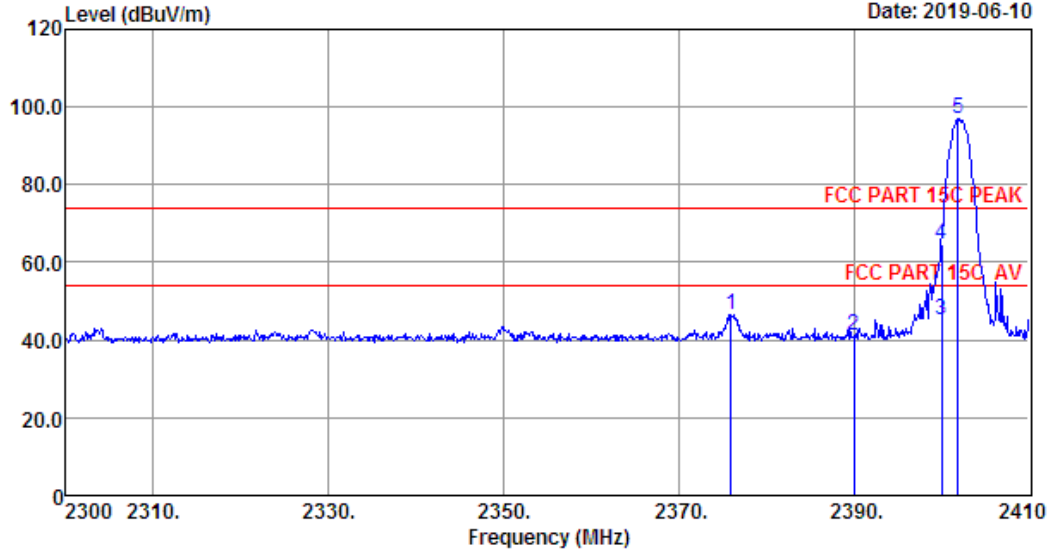

Site no. : 1# 966 Chamber Data no. : 238
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2376.01	27.23	3.97	33.25	48.63	46.58	74.00	27.42	Peak
2	2390.00	27.26	4.00	33.24	43.07	41.09	74.00	32.91	Peak
3	2400.00	27.26	4.03	33.23	47.12	45.18	54.00	8.82	Average
4	2400.00	27.26	4.03	33.23	66.78	64.84	74.00	9.16	Peak
5	2401.86	27.26	4.03	33.23	98.75	96.81	74.00	-22.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 239

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

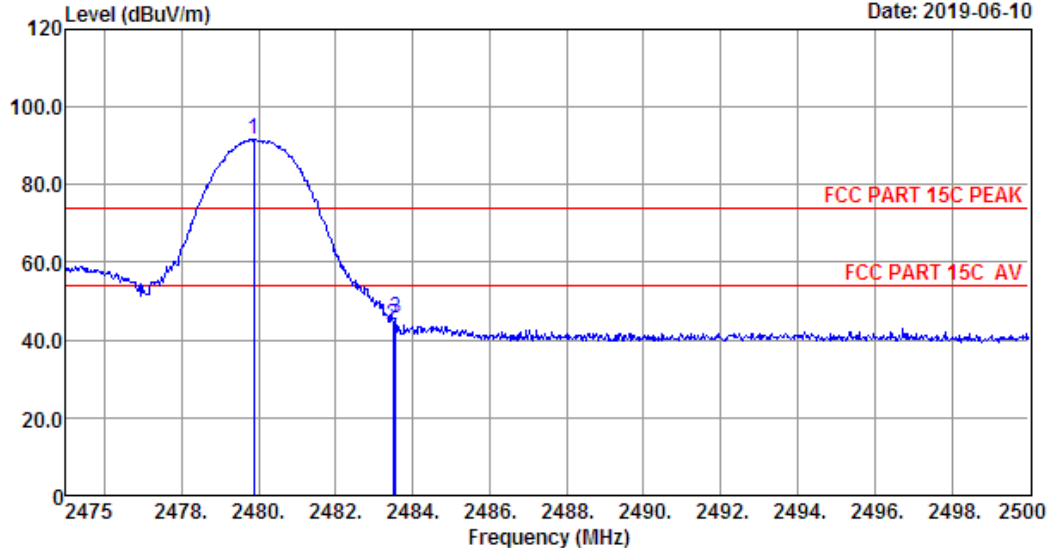

Site no. : 1# 966 Chamber Data no. : 239
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.38	4.03	33.56	93.91	91.76	74.00	-17.76	Peak
2	2483.50	27.38	4.03	33.56	46.04	43.89	74.00	30.11	Peak
3	2483.55	27.38	4.03	33.56	47.96	45.81	74.00	28.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 240

File: \\Emc-966-1\\test data\\2019\\RF\\J\\Ju Da.EM6 (244)

Date: 2019-06-10

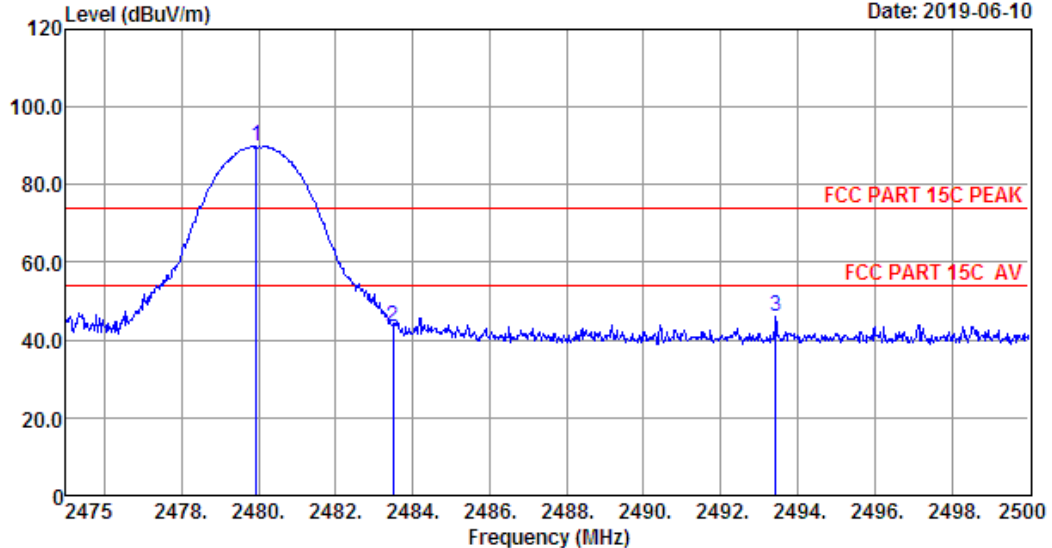

Site no. : 1# 966 Chamber Data no. : 240
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : n/4 DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.95	27.38	4.03	33.56	91.94	89.79	74.00	-15.79	Peak
2	2483.50	27.38	4.03	33.56	45.60	43.45	74.00	30.55	Peak
3	2493.43	27.40	4.03	33.64	48.32	46.11	74.00	27.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 241

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

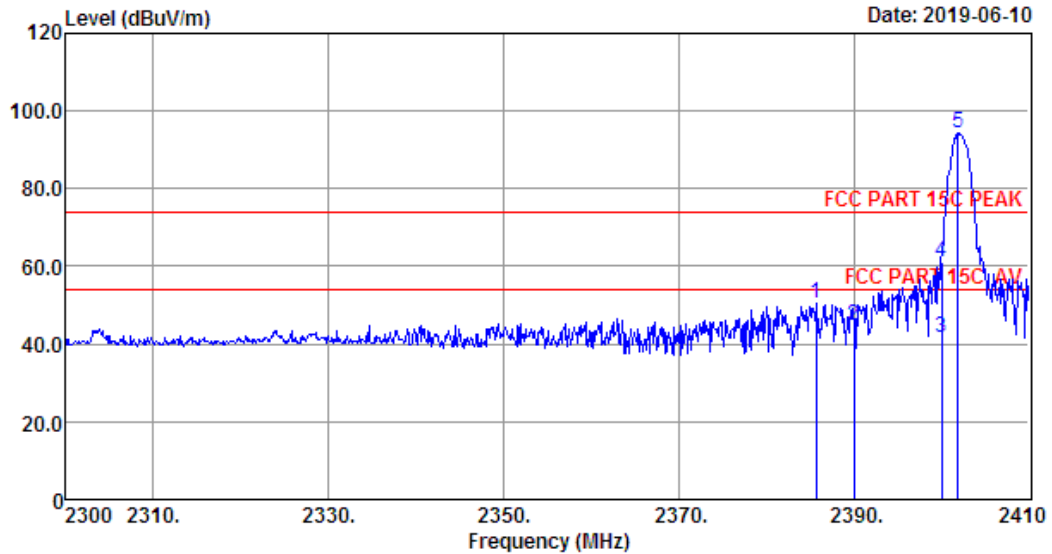

Site no. : 1# 966 Chamber Data no. : 241
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.69	27.26	4.00	33.24	52.45	50.47	74.00	23.53	Peak
2	2390.00	27.26	4.00	33.24	46.87	44.89	74.00	29.11	Peak
3	2400.00	27.26	4.03	33.23	43.63	41.69	54.00	12.31	Average
4	2400.00	27.26	4.03	33.23	63.11	61.17	74.00	12.83	Peak
5	2401.86	27.26	4.03	33.23	96.10	94.16	74.00	-20.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 242

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

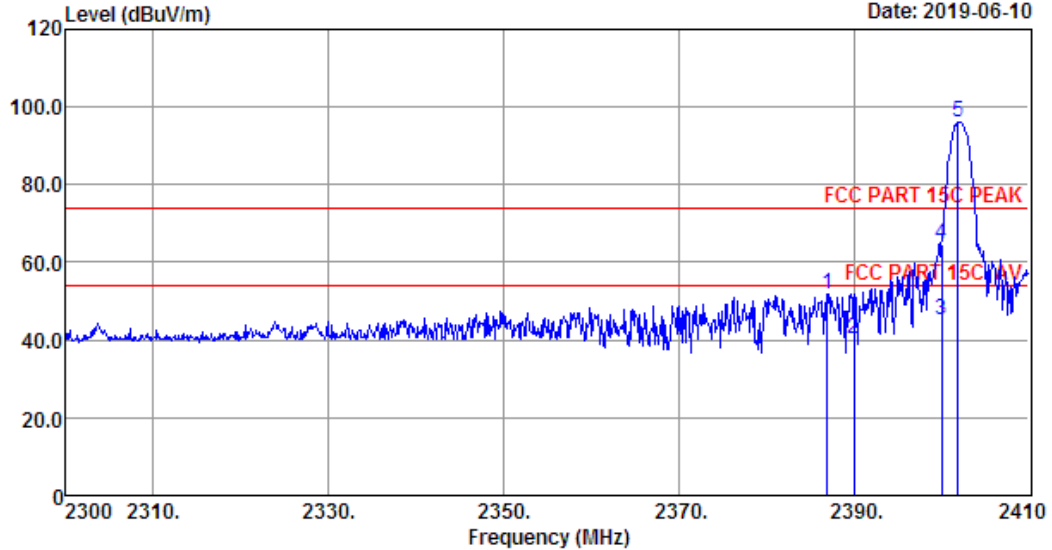

Site no. : 1# 966 Chamber Data no. : 242
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.01	27.26	4.00	33.24	53.97	51.99	74.00	22.01	Peak
2	2390.00	27.26	4.00	33.24	42.27	40.29	74.00	33.71	Peak
3	2400.00	27.26	4.03	33.23	47.17	45.23	54.00	8.77	Average
4	2400.00	27.26	4.03	33.23	66.79	64.85	74.00	9.15	Peak
5	2401.86	27.26	4.03	33.23	98.03	96.09	74.00	-22.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 243

File: \\Emc-966-1\\test data\\2019\\RF\\J\\Ju Da.EM6 (244)

Date: 2019-06-10

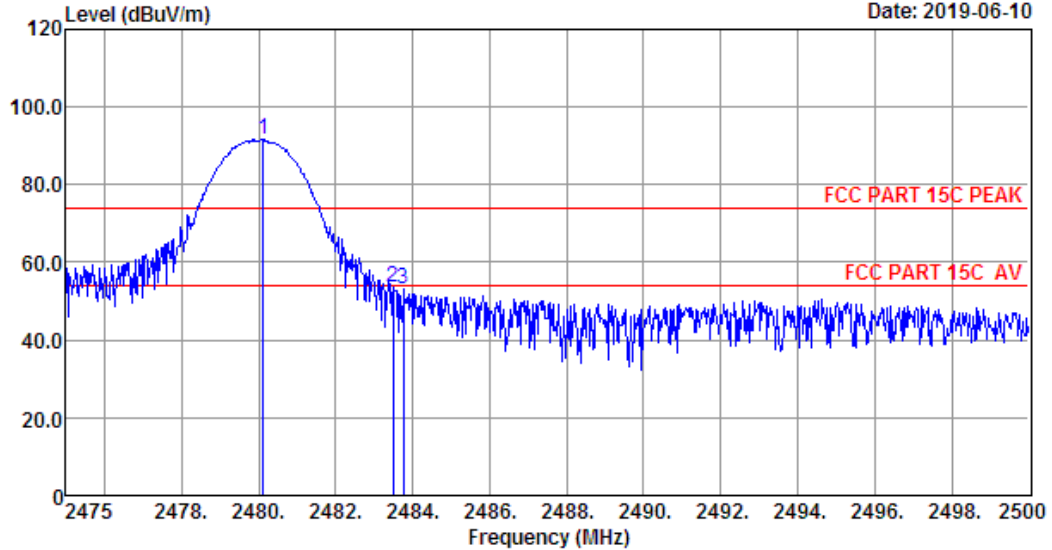

Site no. : 1# 966 Chamber Data no. : 243
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.13	27.38	4.03	33.56	93.87	91.72	74.00	-17.72	Peak
2	2483.50	27.38	4.03	33.56	55.68	53.53	74.00	20.47	Peak
3	2483.75	27.38	4.03	33.56	55.14	52.99	74.00	21.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 244

File: \\Emc-966-1\test data\2019\RF\J\Ju Da.EM6 (244)

Date: 2019-06-10

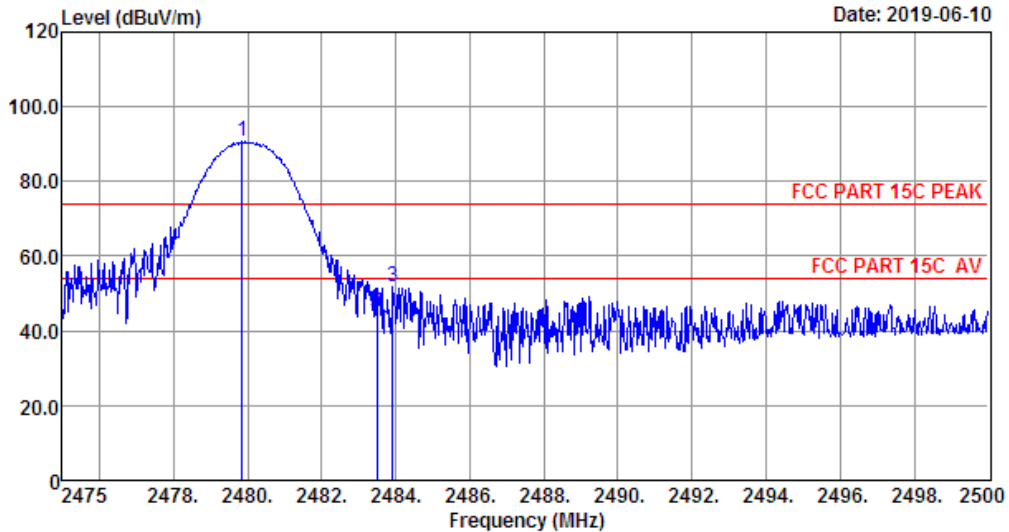

Site no. : 1# 966 Chamber Data no. : 244
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:24.6'; Humi:53%; Press:101.52kPa
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.85	27.38	4.03	33.56	92.82	90.67	74.00	-16.67	Peak
2	2483.50	27.38	4.03	33.56	47.16	45.01	74.00	28.99	Peak
3	2483.93	27.38	4.03	33.56	54.10	51.95	74.00	22.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All test mode had been pre-test, only Low/High Channel of the worst case modulation mode was reported.

11. AC POWER LINE CONDUCTED EMISSIONS


11.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

11.2. Test Setup

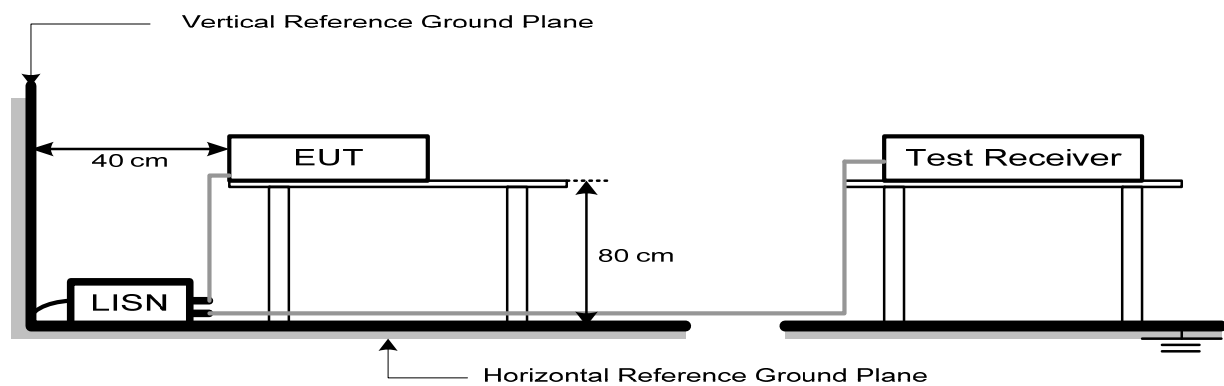

11.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


11.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 11.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

11.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

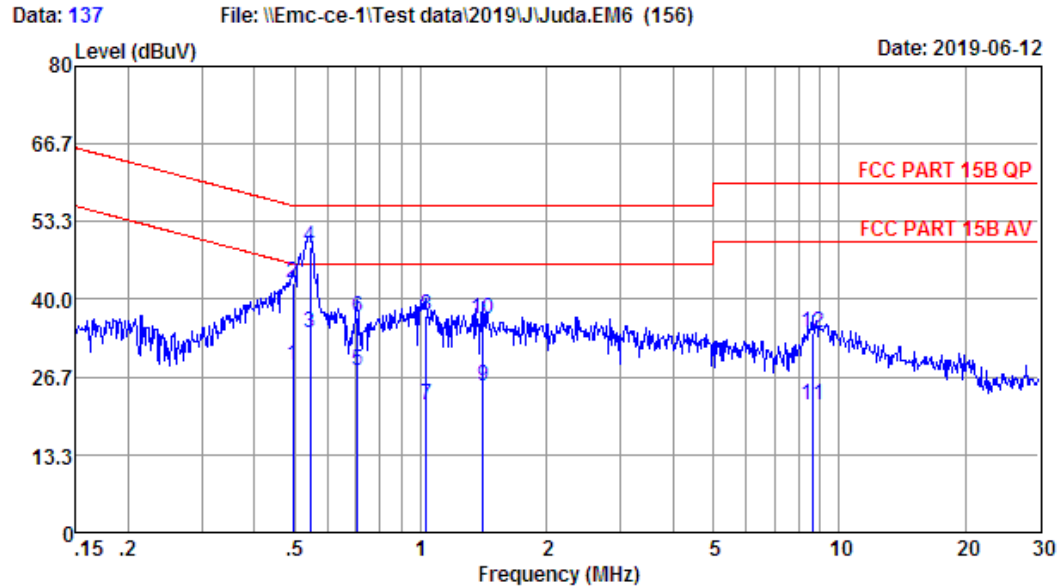

Site no : 844 Shield Room Data no. : 137
 Env. / Ins. : Temp:23.6'C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.49	9.63	9.92	9.07	28.62	46.10	17.48	Average
2	0.49	9.63	9.92	23.33	42.88	56.10	13.22	QP
3	0.54	9.63	9.92	14.80	34.35	46.00	11.65	Average
4	0.54	9.63	9.92	29.40	48.95	56.00	7.05	QP
5	0.70	9.63	9.93	8.33	27.89	46.00	18.11	Average
6	0.70	9.63	9.93	17.29	36.85	56.00	19.15	QP
7	1.03	9.64	9.94	2.27	21.85	46.00	24.15	Average
8	1.03	9.64	9.94	17.55	37.13	56.00	18.87	QP
9	1.41	9.64	9.95	5.65	25.24	46.00	20.76	Average
10	1.41	9.64	9.95	17.01	36.60	56.00	19.40	QP
11	8.64	9.74	10.06	2.10	21.90	50.00	28.10	Average
12	8.64	9.74	10.06	14.41	34.21	60.00	25.79	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 139

File: \\Emc-ce-1\Test data\2019\J\Juda.EM6 (156)

Date: 2019-06-12

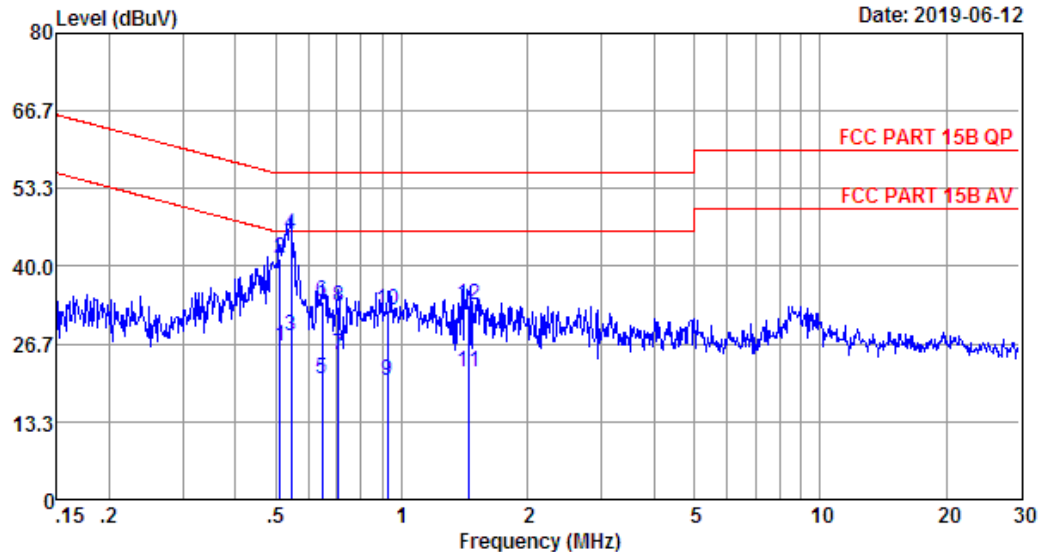

Site no : 844 Shield Room Data no. : 139
 Env. / Ins. : Temp:23.6'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NS-HMSB20
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.51	9.55	9.92	6.79	26.26	46.00	19.74	Average
2	0.51	9.55	9.92	21.88	41.35	56.00	14.65	QP
3	0.54	9.55	9.92	8.52	27.99	46.00	18.01	Average
4	0.54	9.55	9.92	25.96	45.43	56.00	10.57	QP
5	0.64	9.56	9.92	1.23	20.71	46.00	25.29	Average
6	0.64	9.56	9.92	14.41	33.89	56.00	22.11	QP
7	0.70	9.56	9.93	5.33	24.82	46.00	21.18	Average
8	0.70	9.56	9.93	13.52	33.01	56.00	22.99	QP
9	0.92	9.56	9.94	0.90	20.40	46.00	25.60	Average
10	0.92	9.56	9.94	13.09	32.59	56.00	23.41	QP
11	1.45	9.56	9.95	2.45	21.96	46.00	24.04	Average
12	1.45	9.56	9.95	13.71	33.22	56.00	22.78	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 145

File: \\Emc-ce-1\Test data\2019\J\Juda.EM6 (156)

Date: 2019-06-12

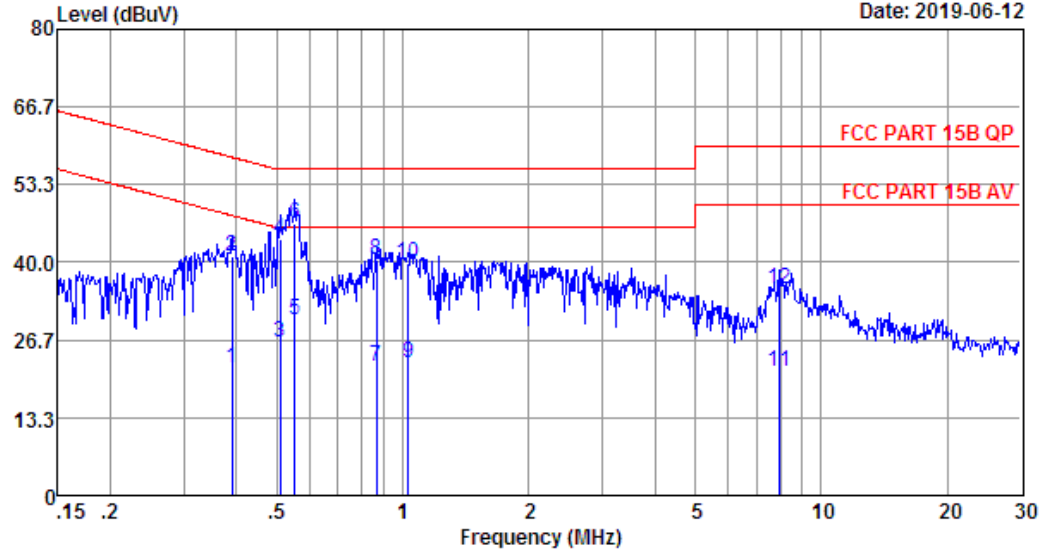

Site no : 844 Shield Room Data no. : 145
 Env. / Ins. : Temp:23.6'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 240V/60Hz
 M/N : NS-HMSB20
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.39	9.56	9.92	2.33	21.81	48.03	26.22	Average
2	0.39	9.56	9.92	21.68	41.16	58.03	16.87	QP
3	0.51	9.55	9.92	6.79	26.26	46.00	19.74	Average
4	0.51	9.55	9.92	24.62	44.09	56.00	11.91	QP
5	0.55	9.55	9.92	10.52	29.99	46.00	16.01	Average
6	0.55	9.55	9.92	27.30	46.77	56.00	9.23	QP
7	0.87	9.56	9.93	2.56	22.05	46.00	23.95	Average
8	0.87	9.56	9.93	20.98	40.47	56.00	15.53	QP
9	1.03	9.56	9.94	3.33	22.83	46.00	23.17	Average
10	1.03	9.56	9.94	20.21	39.71	56.00	16.29	QP
11	7.98	9.64	10.04	1.58	21.26	50.00	28.74	Average
12	7.98	9.64	10.04	15.88	35.56	60.00	24.44	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 147

File: \\Emc-ce-1\Test data\2019\J\Juda.EM6 (156)

Date: 2019-06-12

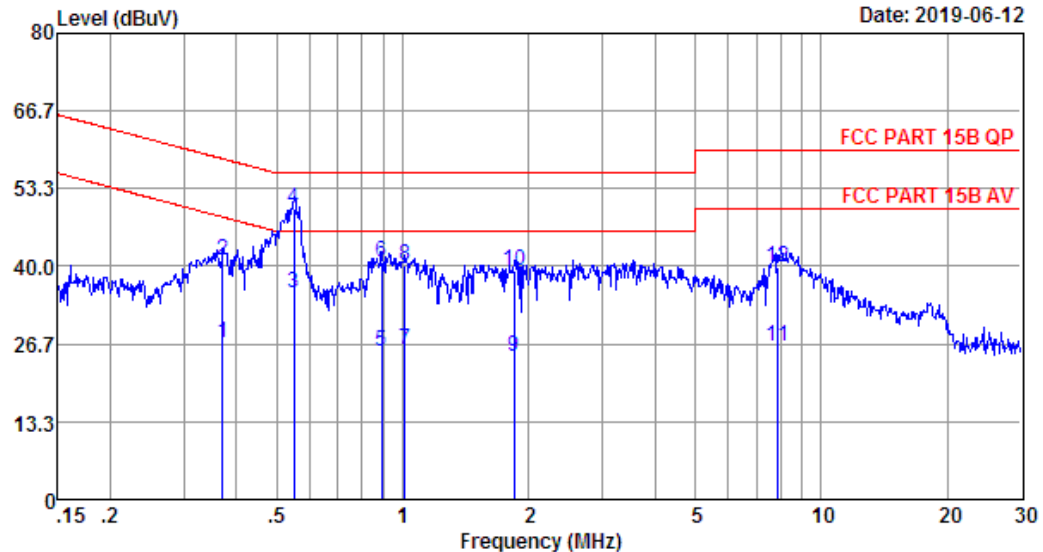

Site no : 844 Shield Room Data no. : 147
 Env. / Ins. : Temp:23.6'C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Insignia 2.0 Mini Soundbar with Digital Amplifier
 Power : DC 12V From Adapter Input AC 240V/60Hz
 M/N : NS-HMSB20
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.37	9.63	9.92	7.43	26.98	48.47	21.49	Average
2	0.37	9.63	9.92	21.49	41.04	58.47	17.43	QP
3	0.55	9.63	9.92	15.80	35.35	46.00	10.65	Average
4	0.55	9.63	9.92	30.26	49.81	56.00	6.19	QP
5	0.89	9.64	9.93	5.95	25.52	46.00	20.48	Average
6	0.89	9.64	9.93	21.04	40.61	56.00	15.39	QP
7	1.01	9.64	9.94	6.20	25.78	46.00	20.22	Average
8	1.01	9.64	9.94	20.45	40.03	56.00	15.97	QP
9	1.85	9.65	9.95	4.80	24.40	46.00	21.60	Average
10	1.85	9.65	9.95	19.52	39.12	56.00	16.88	QP
11	7.89	9.73	10.04	6.57	26.34	50.00	23.66	Average
12	7.89	9.73	10.04	20.04	39.81	60.00	20.19	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

12. ANTENNA REQUIREMENTS

12.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

12.2. Test Result

The antennas used for this product is PCB antenna ,so compliance with antenna requirements.
(Please refer to the EUT photo for details)