

FCC PART 15 SUBPART C / IC RSS-247 TEST REPORT

for

GEM Radio Board

Model No.: GEMSRB01

FCC ID: PADWF111

IC: 10563A-WF111

of

Applicant: Wahoo Fitness LLC

Address: 90 W Wieuca Road #110 Atlanta, GA 30342 United States

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600


Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01



Report No.: W6M21507-15115-C-1


6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	Location	3
1.2.2	Details of accreditation status	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS.....	4
1.5	GENERAL INFORMATION OF TEST ITEM.....	4
1.6	TEST STANDARDS	5
2	TECHNICAL TEST.....	6
2.1	SUMMARY OF TEST RESULTS.....	6
2.2	TEST ENVIRONMENT	6
2.3	TEST EQUIPMENT LIST.....	7
2.4	GENERAL TEST PROCEDURE	9
3	TEST RESULTS (ENCLOSURE)	11
3.1	PEAK OUTPUT POWER (TRANSMITTER).....	12
3.2	EQUIVALENT ISOTROPIC RADIATED POWER	15
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS	15
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	17
3.5	SPURIOUS EMISSIONS (TX).....	18
3.6	RADIATED EMISSION ON THE BAND EDGE	20
3.7	MINIMUM 6 DB BANDWIDTH	23
3.8	PEAK POWER SPECTRAL DENSITY	26
3.9	RADIATED EMISSION FROM RECEIVER PART	29
3.10	POWER LINE CONDUCTED EMISSION	30
	APPENDIX.....	32



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

Tester:

August 07, 2015

Mark Cheng

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

August 07, 2015


Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,

Wanli Dist., New Taipei City 207,

Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: Wahoo Fitness LLC


Street: 90 W Wieuca Road #110

Town: Atlanta, GA 30342

Country: United States

Telephone: 1-877-978-1112

Fax: 678-279-7444



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

1.4 Application details


Date of receipt of test item: July 14, 2015
Date of test: from July 14, 2015 to August 07, 2015

1.5 General information of Test item

Type of test item: GEM Radio Board
Model Number: GEMSRB01
Brand Name: Wahoo Fitness LLC
Multi-listing model number: ./.
Photos: see Appendix

Technical data

Frequency band: 2400 MHz – 2483.5 MHz
BLE
Frequency (ch 0 or A): 2402 MHz
Frequency (ch 19 or B): 2440 MHz
Frequency (ch 39 or C): 2480 MHz
ANT+
Frequency: 2457 MHz
Number of Channels: 40 (BLE) / 1 (ANT+)
Operation modes: Duplex
Modulation Type: GFSK
Fixed point-to-point operation: ☐ Yes / ☒ No
Type of Antenna: Chip antenna
Antenna gain: 3.45 dBi
Power supply: 3 VDC
Emission designator (BLE): 1M62G1D
Emission designator (ANT+): 1M01G1D



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

Host device: none

Classification :

Fixed Device	☐
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☐
Modular Radio Device	☒

Transmitter

Unom

BLE

Power (ch 0 or A): Conducted: -1.93 dBm
Power (ch 19 or B): Conducted: -2.43 dBm
Power (ch 39 or C): Conducted: -2.40 dBm

ANT+

Power Conducted: -3.15 dBm


Manufacturer: (if applicable)

Name: Zentan Technology Co., Ltd.
Street: 100F-3, No.260, Sec. 2, New Taipei Blvd., Sanchong Dist.,
Town: New Taipei City 24158,
Country: Taiwan (R.O.C.)

Additional information: ./.

1.6 Test standards

Technical standard : FCC RULES SUBPART C § 15.247 (2014-10)
CANADA RSS-247 Issue 1: May 2015
CANADA RSS-Gen Issue 4: November 2014



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature: 23 °C

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Power supply: 3 VDC

Extreme conditions parameters: ./.



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2014/9/2	2015/9/1
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2015/6/30	2016/6/29
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2014/10/13	2015/10/12
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2014/9/2	2015/9/1
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2014/9/2	2015/9/1
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2015/6/22	2016/6/21
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2015/6/16	2016/6/15
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2015/3/17	2016/3/16
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2015/3/19	2016/3/18
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2015/3/2	2016/3/1
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2015/3/2	2016/3/1
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2015/3/2	2016/3/1
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2015/6/8	2016/6/7
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2015/3/2	2016/3/1
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2014/11/26	2015/11/25
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2014/10/9	2015/10/8
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2014/9/22	2015/9/21
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2015/3/2	2016/3/1
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2014/11/7	2015/11/6
ETSTW-RE 111	TRILOG Super Broadband test Antenna	VULB 9160	9160-3309	Schwarz beck	2014/12/5	2015/12/4
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2015/1/7	2016/1/6
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2015/6/8	2016/6/7
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2014/8/12	2015/8/11




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2014/8/12	2015/8/11
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2015/3/2	2016/3/1
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2014/8/12	2015/8/11
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2014/8/12	2015/8/11
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2014/10/20	2015/10/19
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2015/3/5	2016/3/4
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2015/1/7	2016/1/6
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2015/1/7	2016/1/6
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2015/1/7	2016/1/6
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2015/1/7	2016/1/6
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2014/9/17	2015/9/16
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2014/10/15	2015/10/14
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2014/10/15	2015/10/14
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2015/2/25	2016/2/24
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2015/2/25	2016/2/24
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2015/2/25	2016/2/24
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2015/2/25	2016/2/24
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2015/4/23	2016/4/22
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2015/3/19	2016/3/18
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2015/3/2	2016/3/1
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2015/5/14	2016/5/13
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2015/1/16	2016/1/15
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2014/9/22	2015/9/21
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2015/3/2	2016/3/1
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2014/11/26	2015/11/25
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2014/11/26	2015/11/25
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2014/11/26	2015/11/25
ETSTW-Cable 053	N TYPE To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2015/3/19	2016/3/18
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2015/3/19	2016/3/18
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m


The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1


FCC ID: PADWF111

IC: 10563A-WF111

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(d) IC RSS-247 5.1 & 5.2	☒	☒	☐
Equivalent isotropically radiated Power	15.247(b) IC RSS-247 5.4	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(d) : 15.209 IC RSS-247 5.5	☒	☒	☐
Band Edge Measurement	15.247(d) IC RSS-247 5.1 & 5.5	☒	☒	☐
Minimum 6 dB Bandwidth	15.247(a)(2) IC RSS-247 5.2	☒	☒	☐
Peak Power Spectral Density	15.247(e) IC RSS-247 5.2	☒	☒	☐
Radiated Emission from Receiver Part	15.109 IC RSS-247 5.5 IC RSS-Gen Table 2	☒	☒	☐
Power Line Conducted Emission	15.207(a) IC RSS-Gen	☐	☐	☐

The following is intentionally left blank.



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111


IC: 10563A-WF111

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(d)(3)


This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

BLE

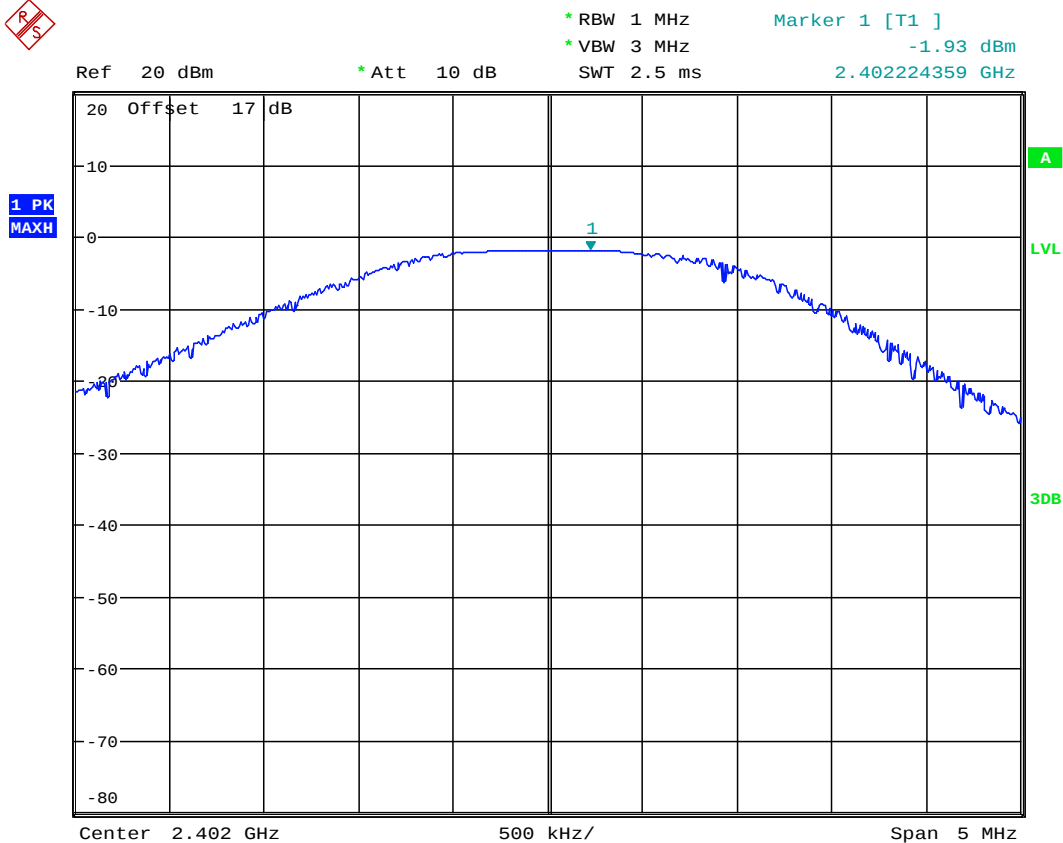

MAX OUTPUT POWER BT4.0 CH00

Date: 17.JUL.2015 13:37:28




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1


FCC ID: PADWF111

IC: 10563A-WF111

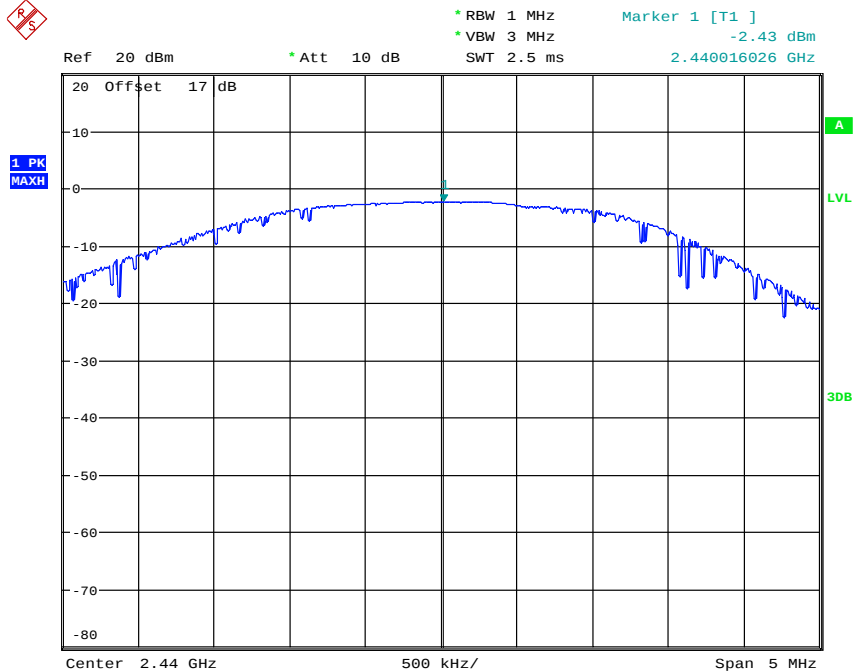


MAX OUTPUT POWER BT4.0 CH19

Date: 17.JUL.2015 13:38:18

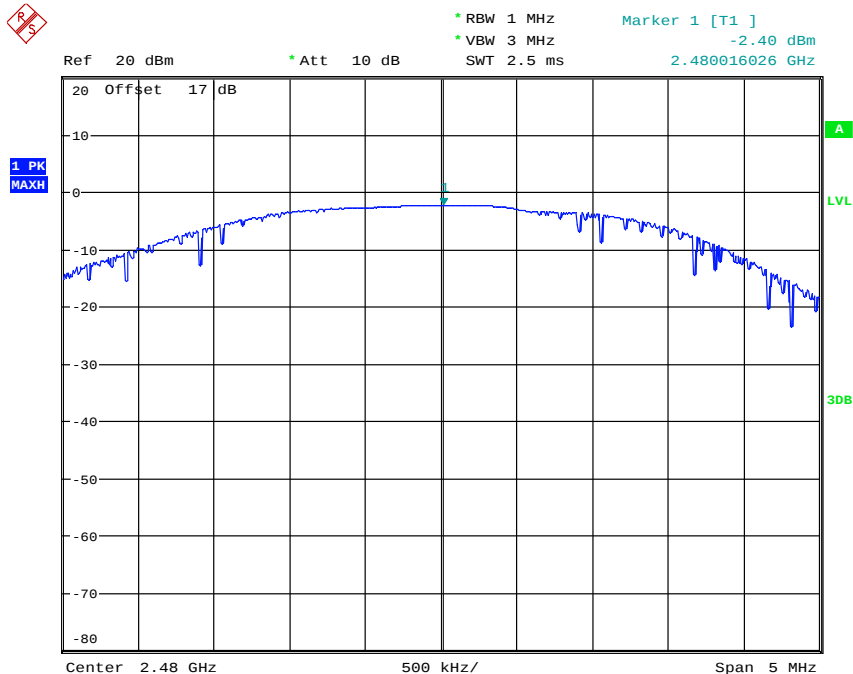


MAX OUTPUT POWER BT4.0 CH39

Date: 17.JUL.2015 13:39:42



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

ANT+

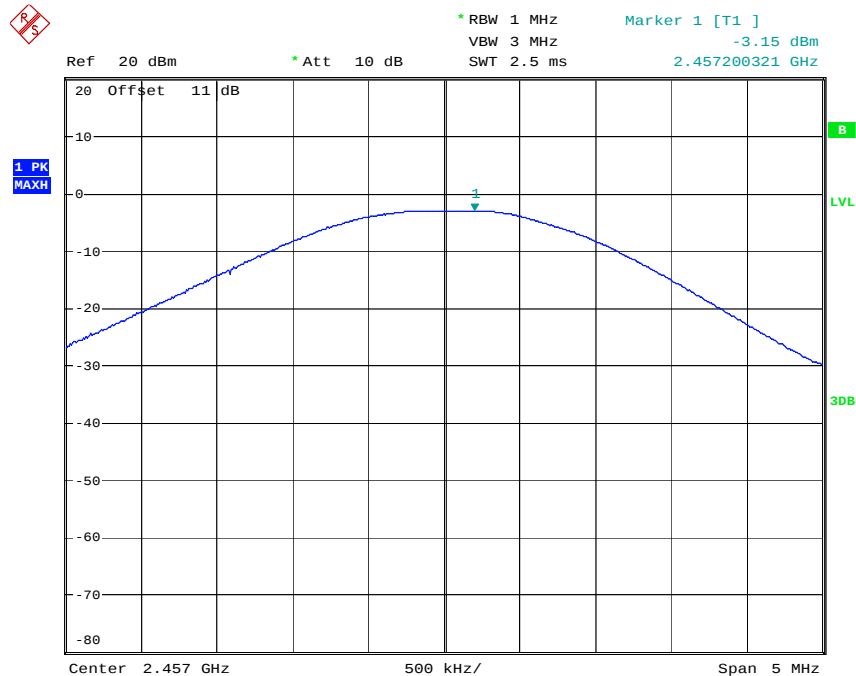


MAX OUTPUT POWER 2457MHz
Date: 7.AUG.2015 11:46:34

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

BLE

Test exclusion = max. conducted output power + adjusted for tune-up tolerance

Test exclusion = -1.93 dBm

ANT+

Test exclusion = max. conducted output power + adjusted for tune-up tolerance

Test exclusion = -3.15 dBm

Test equipment used: ETSTW-RE 055

3.3 RF Exposure Compliance Requirements

RESULT:

Test standard : FCC KDB Publication
447498 D01 General RF Exposure Guidance v05r02

According to 447498 D01 General RF Exposure Guidance v05r02:

SAR evaluation, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The enclosure of the device provides ≥ 0.5 cm separation from the antenna elements to significant metal parts of the enclosure to minimize potential perturbations.

Frequency Band: 2400-2483.5 MHz

Maximum Power fed to Antenna (BLE): 0.64 mW

Maximum Power fed to Antenna (ANT+): 0.48 mW

Separation distances:


Radiator to user: > 5 mm

Distance prescribed in user manual: > 5 mm

MHz	5	10	15	20	25	mm
2450	10	19	29	38	48	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
2450	57	67	77	86	96	SAR Test Exclusion Threshold (mW)

MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
2450	96	196	296	396	496	596	696	796	896	996	1096	1196	1296	1396	1496	mW



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

RESULT:

Test standard : RSS-247

According to [Notice 2015-DRS0001](#)

2.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 0.5 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
698	29.45 mW	44.23 mW	58.37 mW	73.15 mW	86.93 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
2457	3.99 mW	6.99 mW	15.01 mW	30.01 mW	52.02 mW
2480	3.94 mW	6.97 mW	15.03 mW	30.06 mW	52.09 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW

BLE

Test exclusion = max. conducted output power + adjusted for tune-up tolerance

Test exclusion = -1.93 dBm + 3.45 dBi= 1.52 dBm

ANT+

Test exclusion = max. conducted output power + adjusted for tune-up tolerance

Test exclusion = -3.15 dBm + 3.45 dBi= 0.3 dBm


Frequency Band:2400-2483.5 MHz

Maximum Power fed to Antenna (BLE): 1.42 mW

Maximum Power fed to Antenna (ANT+): 1.07 mW

This product does not need to do SAR test because e.i.r.p. is smaller than 3.94 mW (BLE).

This product does not need to do SAR test because e.i.r.p. is smaller than 3.99 mW (ANT+).



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

3.4 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (d), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(d), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB


Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

Note: No duty cycle correction was added to the reading of EUT.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1

FCC ID: PADWF111

IC: 10563A-WF111

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Summary table with radiated data of the test plots

Model: GEMSRB01

Date: --

Mode: --

Temperature: -- °C Engineer: --

Polarization: --

Humidity: --

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (m)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note

1. **Correction Factor = Antenna factor + Cable loss - Preamplifier**
2. **The formula of measured value as: Test Result = Reading + Correction Factor**
3. **Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
4. **All not in the table noted test results are more than 20 dB below the relevant limits.**
5. **Measurement uncertainty for 3m measurement: 30-1000 MHz = ± 4.32 dB, 1-18 GHz = ± 4.95 dB, 18-40 GHz = ± 2.94 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
6. **Please see attached diagrams in Appendix.**

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111


IC: 10563A-WF111

3.6 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.


In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

BLE

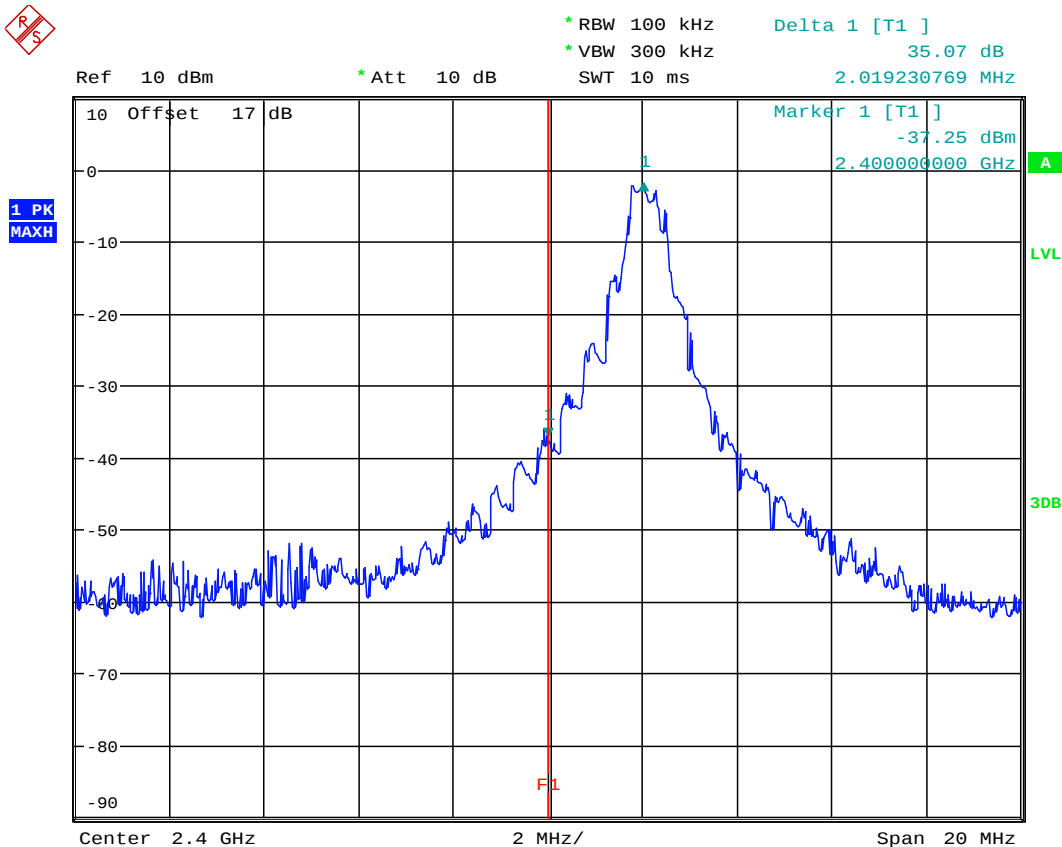

BANDEGE BT4.0 CH00


Date: 17.JUL.2015 13:38:00



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111


IC: 10563A-WF111

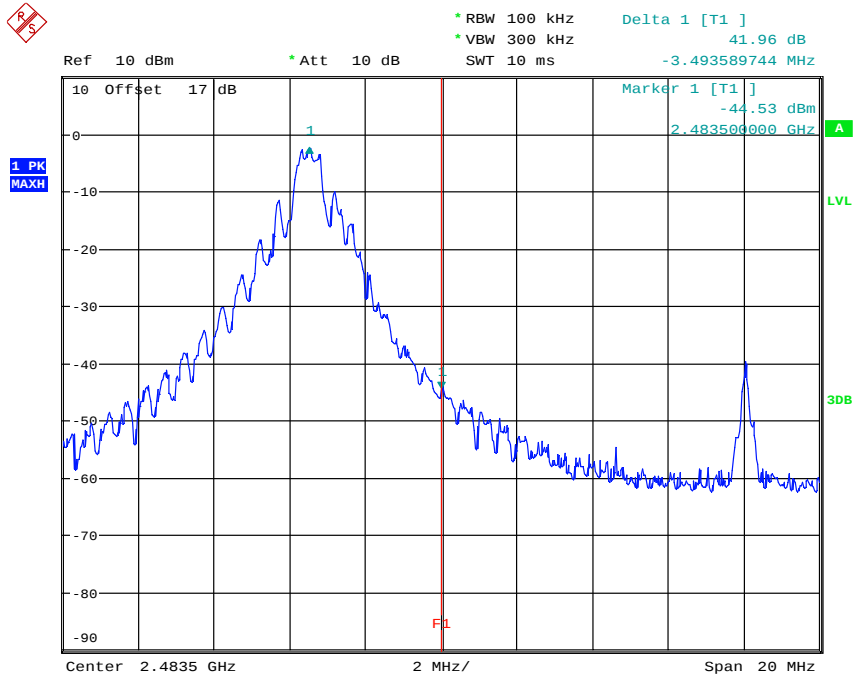

BANDEDGE BT4.0 CH39


Date: 17.JUL.2015 13:40:14

ANT+

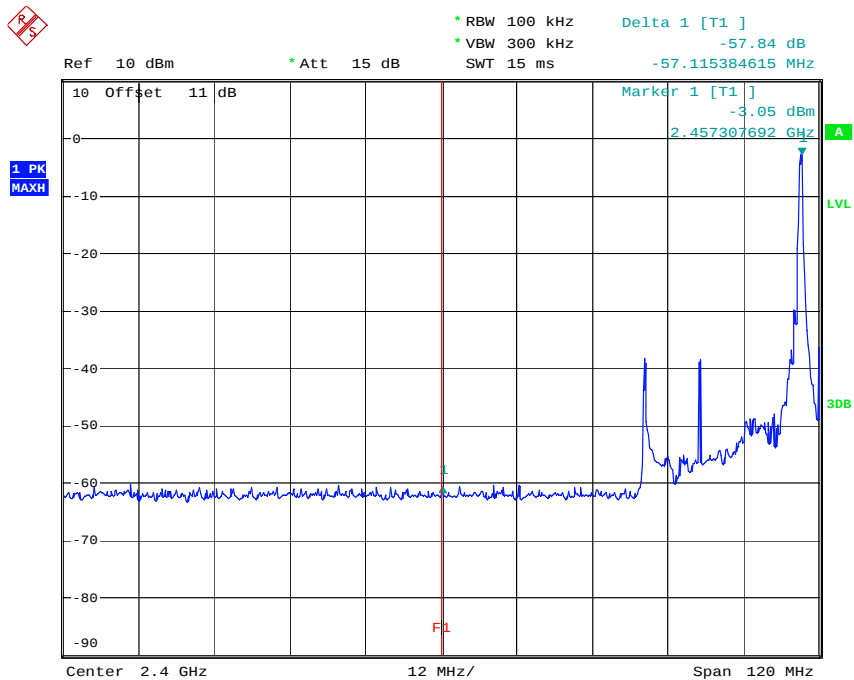


BANDEDGE 2457MHz

Date: 7.AUG.2015 14:38:21



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

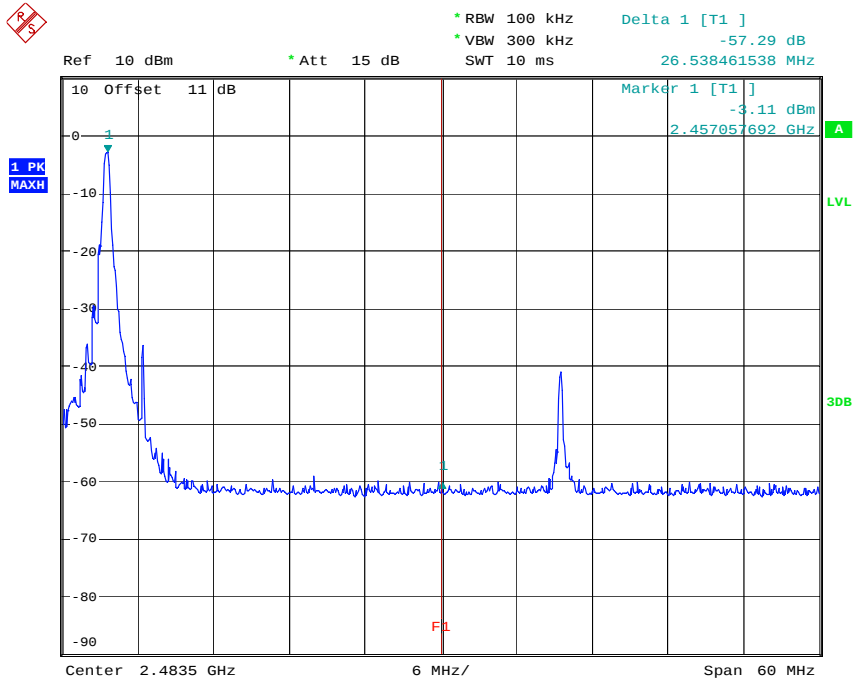


BANDEDGE 2457MHz
Date: 7.AUG.2015 11:43:46

Limit:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111


IC: 10563A-WF111

3.7 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission.


The 6 dB bandwidth is the frequency difference between the two markers.

BLE

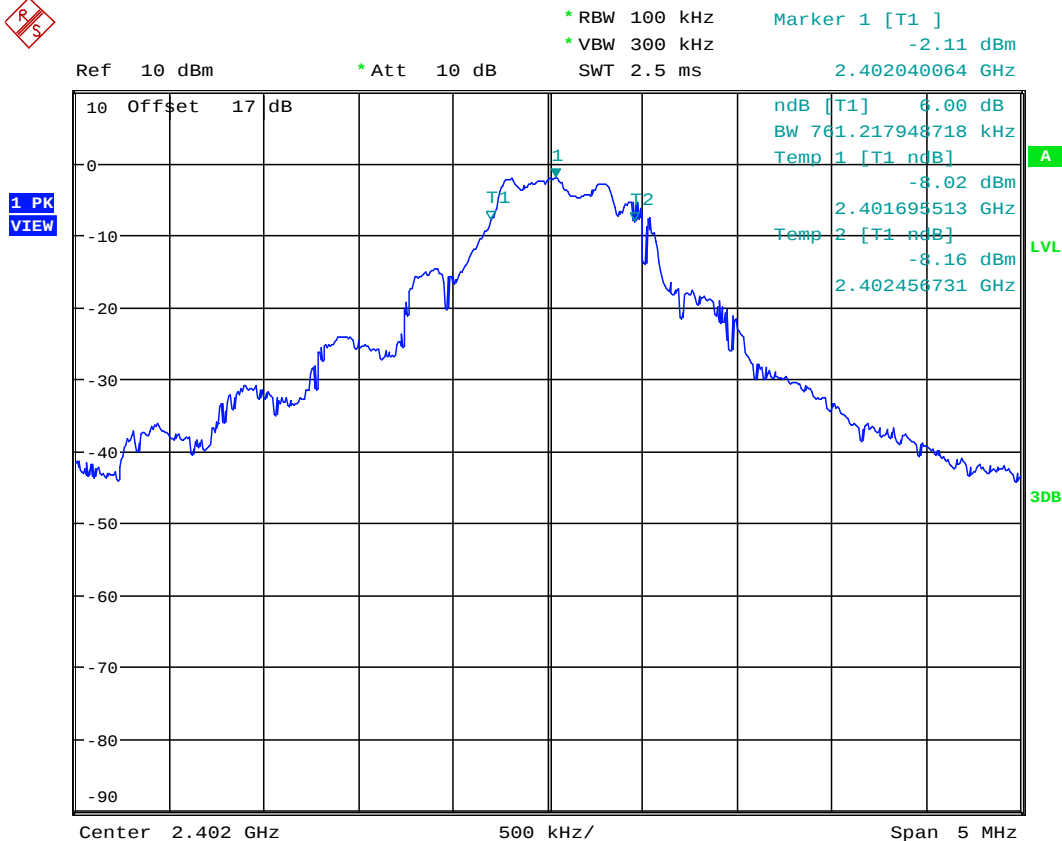

6DB BANDWIDTH BT4.0 CH00

Date: 17.JUL.2015 13:37:40




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21507-15115-C-1

FCC ID: PADWF111


IC: 10563A-WF111

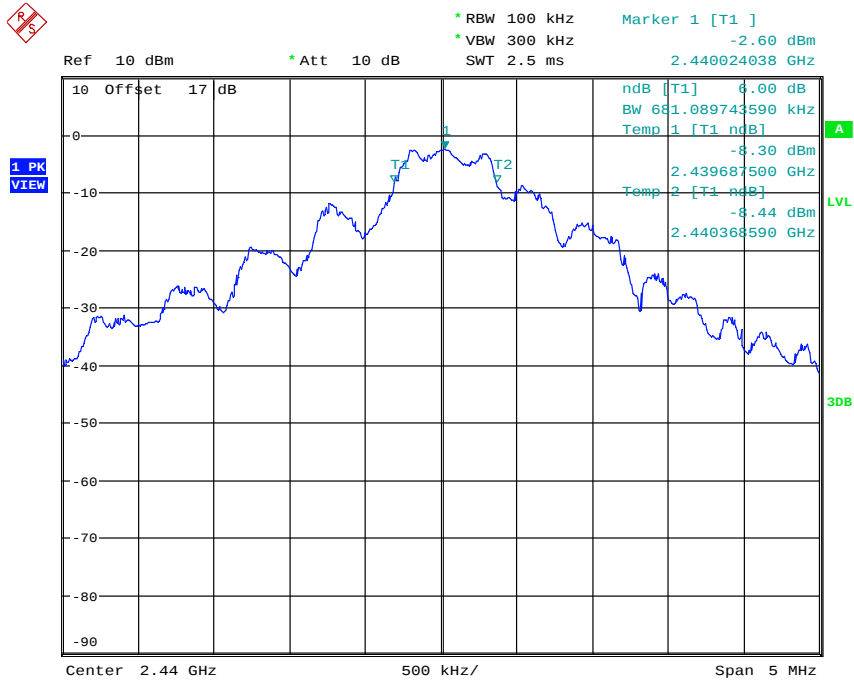

6DB BANDWIDTH BT4.0 CH19
Date: 17.JUL.2015 13:38:28

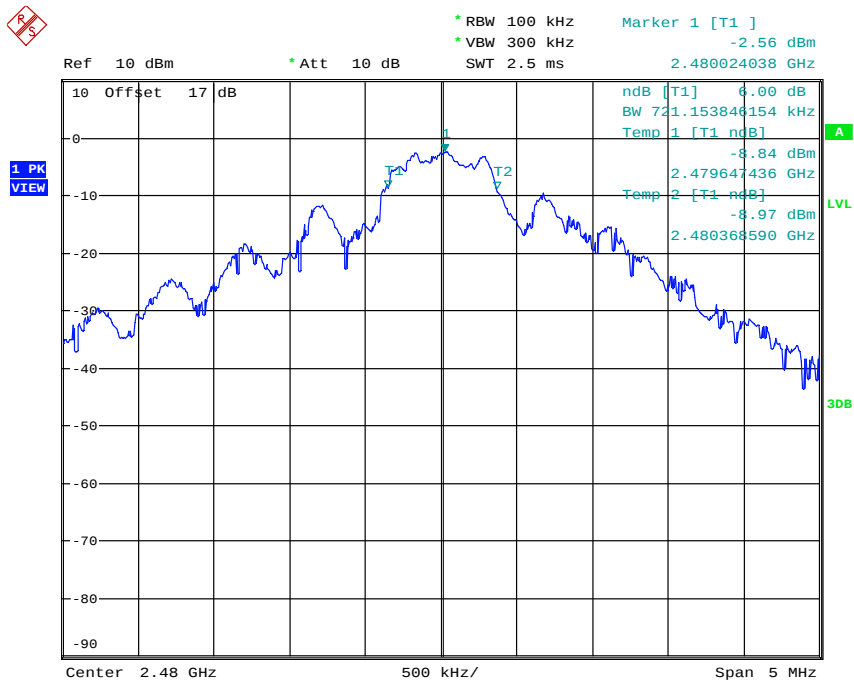


6DB BANDWIDTH BT4.0 CH39
Date: 17.JUL.2015 13:39:54



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

ANT+

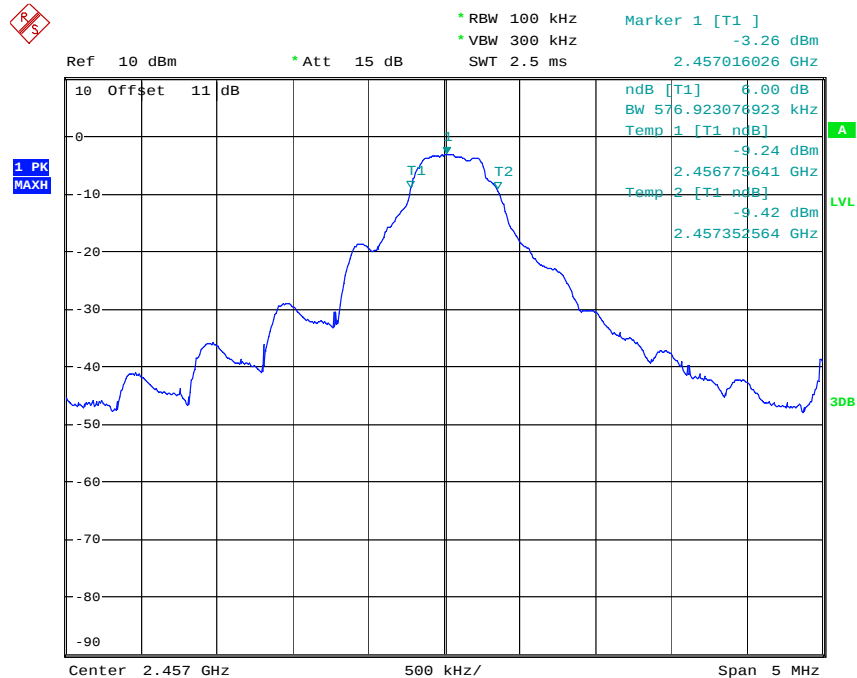


6DB BANDWIDTH 2457MHz
Date: 7.AUG.2015 11:40:49

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M21507-15115-C-1

FCC ID: PADWF111


IC: 10563A-WF111

3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.


The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

BLE

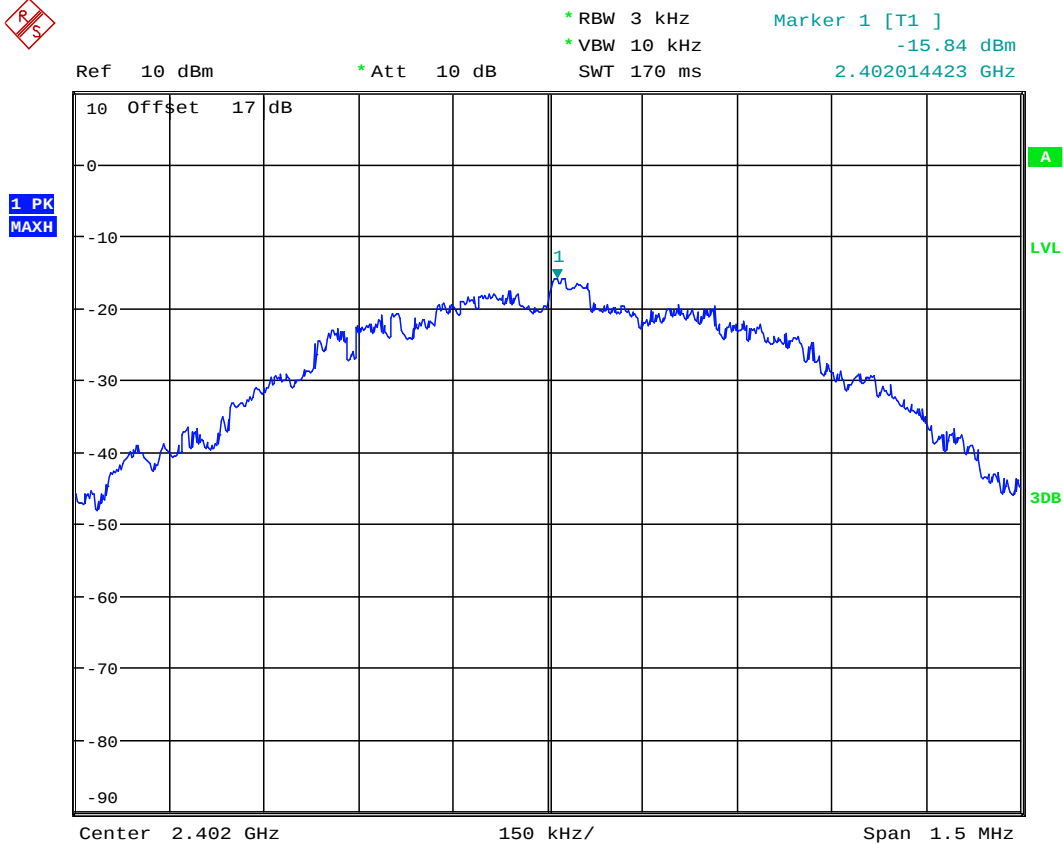

POWER DENSITY BT4.0 CH00

Date: 17.JUL.2015 13:37:52




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1


FCC ID: PADWF111

IC: 10563A-WF111

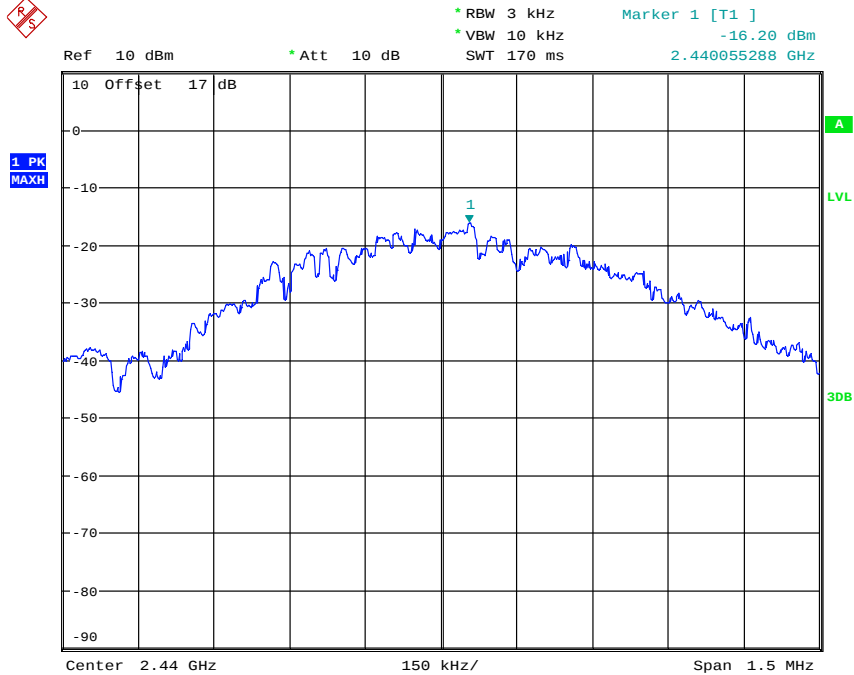


POWER DENSITY BT4.0 CH19

Date: 17.JUL.2015 13:38:40

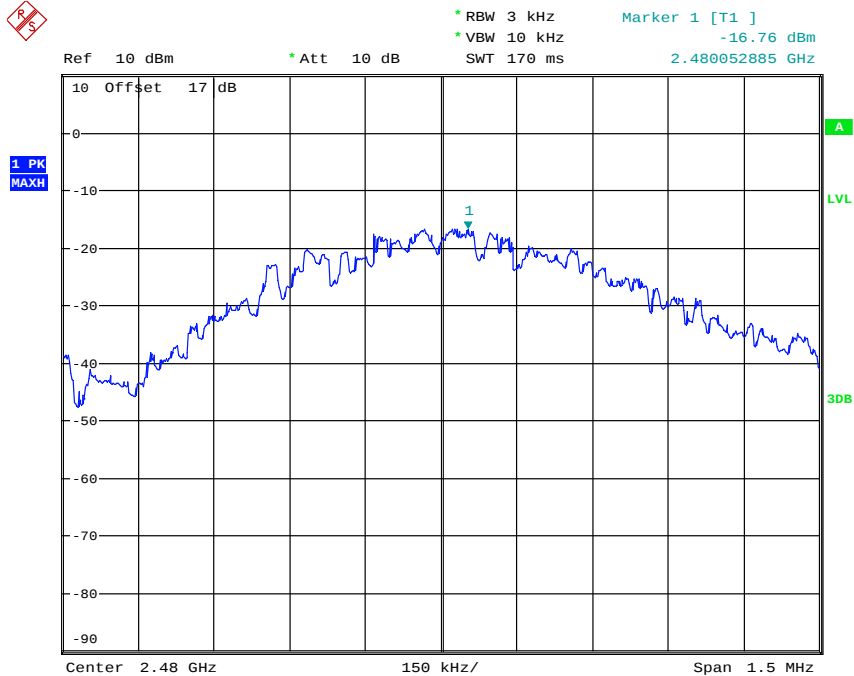

POWER DENSITY BT4.0 CH39


Date: 17.JUL.2015 13:40:06



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

ANT+

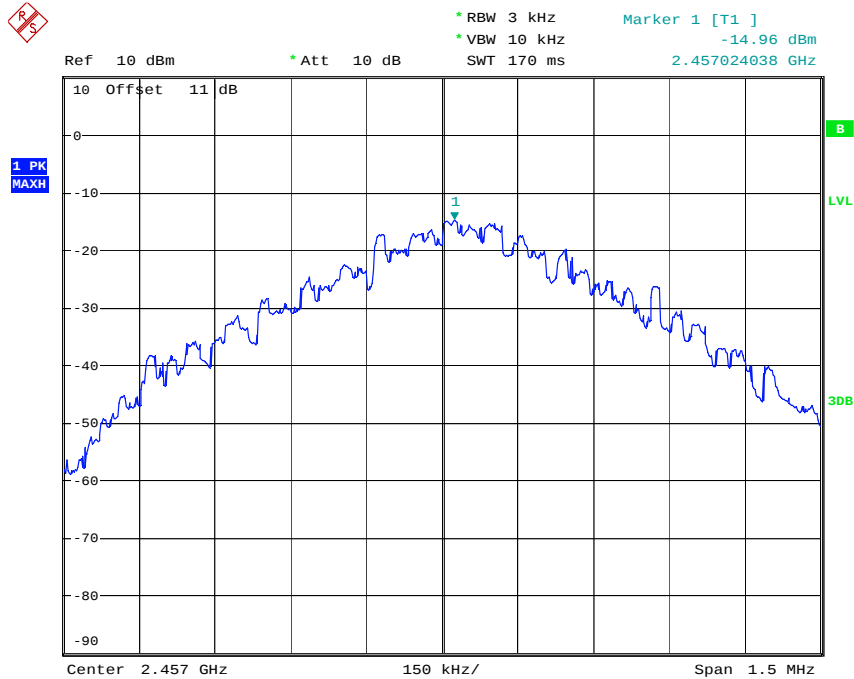


POWER DENSITY 2457MHZ
Date: 7.AUG.2015 11:48:25

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

3.9 Radiated Emission from Receiver Part

FCC Rule: 15.109

Summary table with radiated data of the test plots

Model: GEMSRB01

Date: --

Mode: --

Temperature: -- °C Engineer: --

Polarization: --

Humidity: --

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (m)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note


1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty for 3m measurement: 30-1000 MHz = ± 4.32 dB, 1-18 GHz = ± 4.95 dB, 18-40 GHz = ± 2.94 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
6. Please see attached diagrams in Appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111,
ETSTW-RE 088, ETSTW-RE 018

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111

3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Model: GEMSRB01 Date: --
Mode: -- Temperature: -- °C Engineer: --
Polarization: N Humidity: -- %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Polarization: L1


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)
	QP	Ave.		QP	Ave.	QP	Ave.	
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

- Note:** 1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty = $\pm 1.67\text{dB}$; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.
6. This test is not required because the EUT is DC power supply .

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-CE 006, ETSTW-RE 045



Registration number: W6M21507-15115-C-1
FCC ID: PADWF111
IC: 10563A-WF111


Appendix

A Photos

1. EUT Photos
2. Set Up Photo of Radiated Emission

B Measurement diagrams

Spurious Emissions radiated



Worldwide Testing Services(Taiwan) Co., Ltd.

TX_Bluetooth



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:08:37

Humidity:60 %

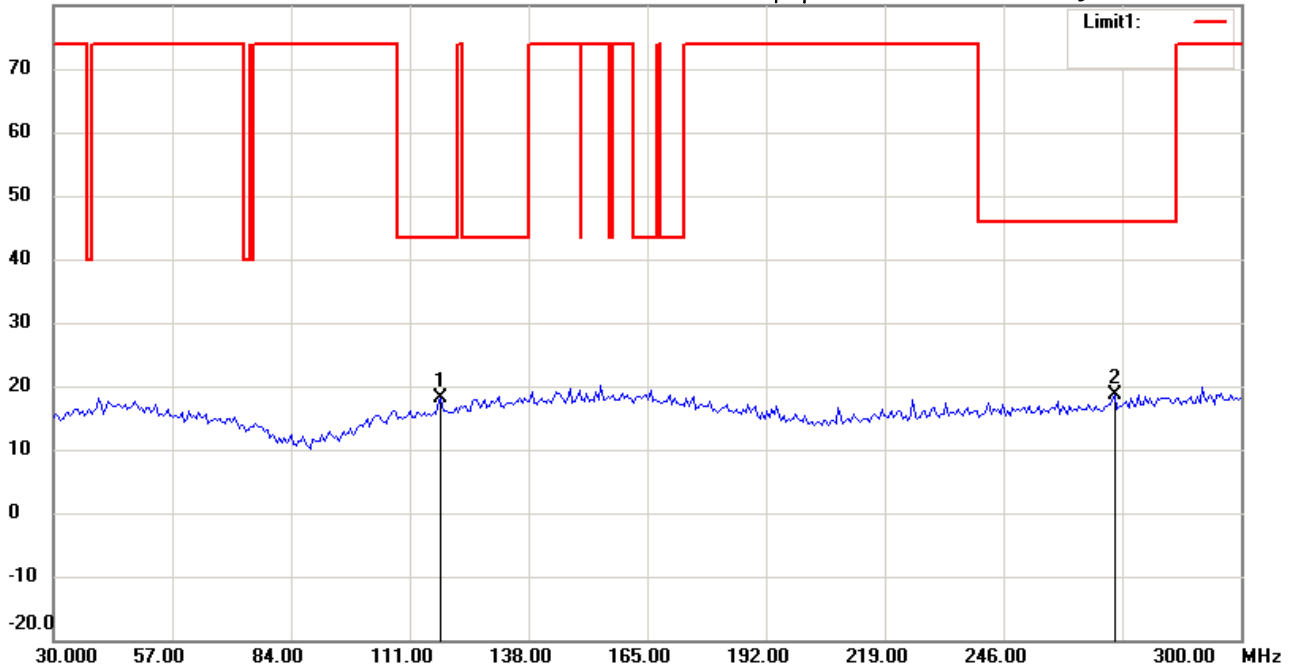

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	118.1963	4.34	peak	13.85	18.19	43.50	100	275	-25.31	
	271.3226	3.60	peak	15.15	18.75	46.00	100	80	-27.25	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:09:24

Humidity:60 %

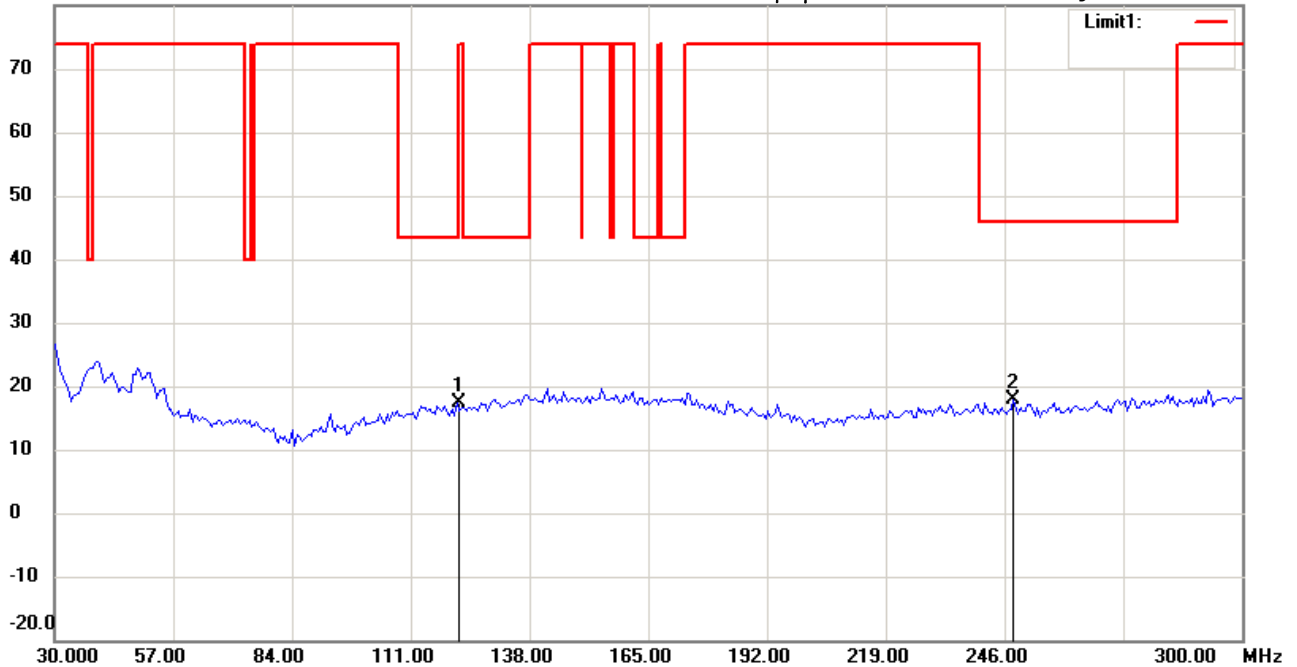

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	121.4430	3.34	peak	14.10	17.44	43.50	100	250	-26.06	
	248.0561	3.36	peak	14.40	17.76	46.00	100	190	-28.24	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :2

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:10:46

Humidity:60 %

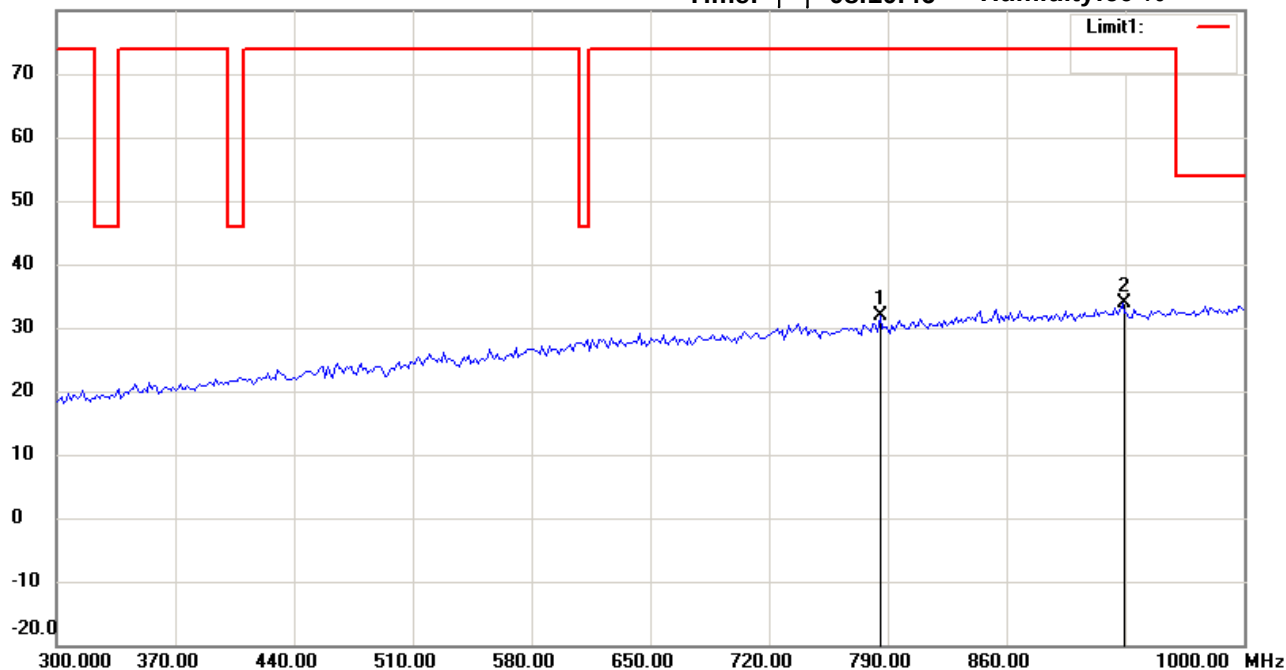

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	785.3706	5.39	peak	26.40	31.79	74.00	100	95	-42.21	
*	928.4570	5.39	peak	28.39	33.78	74.00	100	25	-40.22	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :2

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:11:31

Humidity:60 %

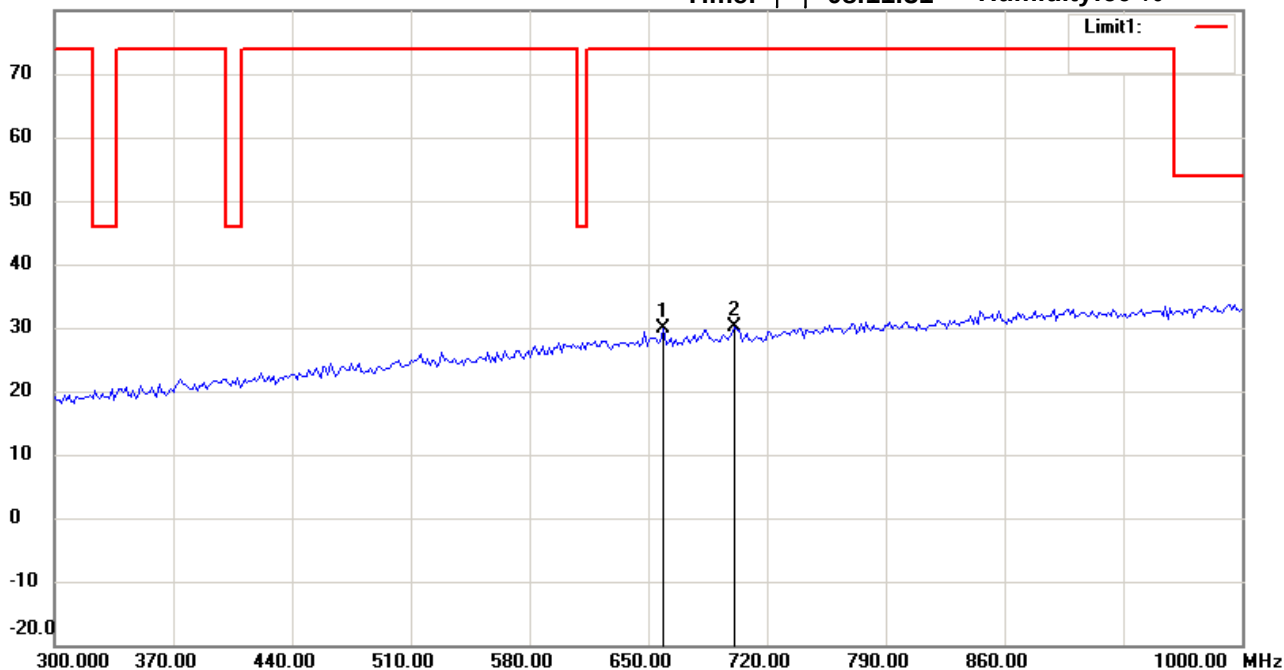

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	659.1182	5.12	peak	24.68	29.80	74.00	100	250	-44.20	
*	701.2024	4.98	peak	25.24	30.22	74.00	100	180	-43.78	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:36:45

Humidity:60 %

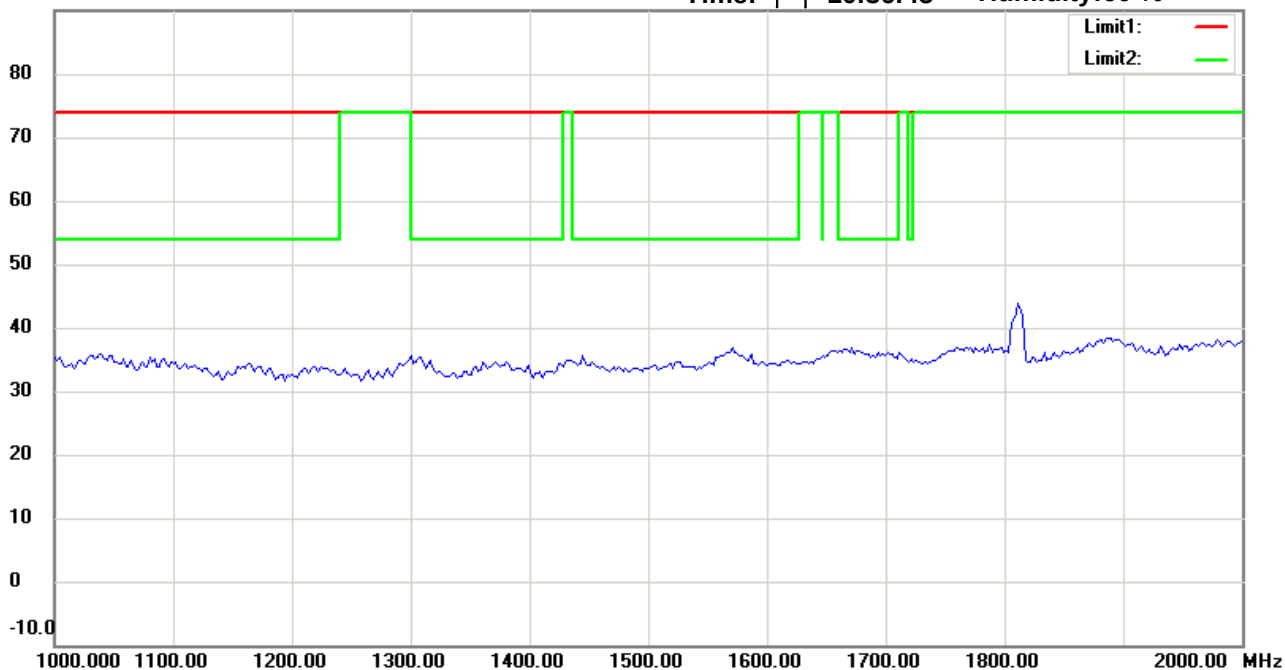

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:40:10

Humidity:60 %

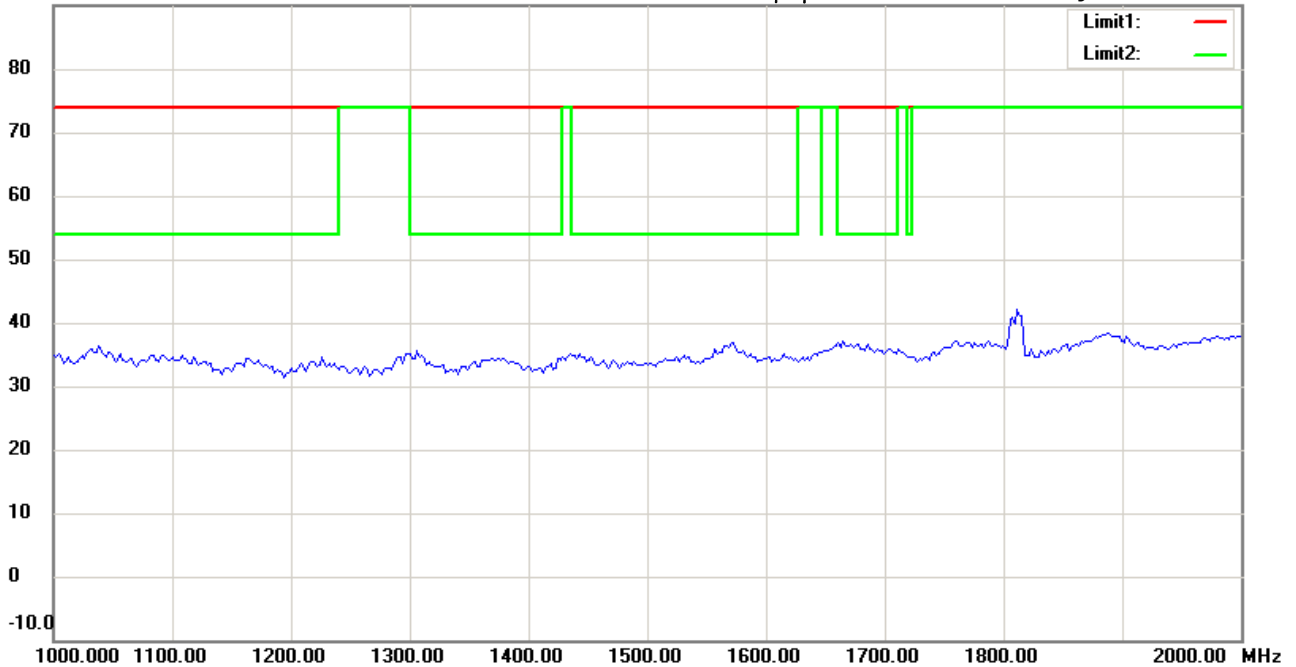

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:37:31

Humidity:60 %

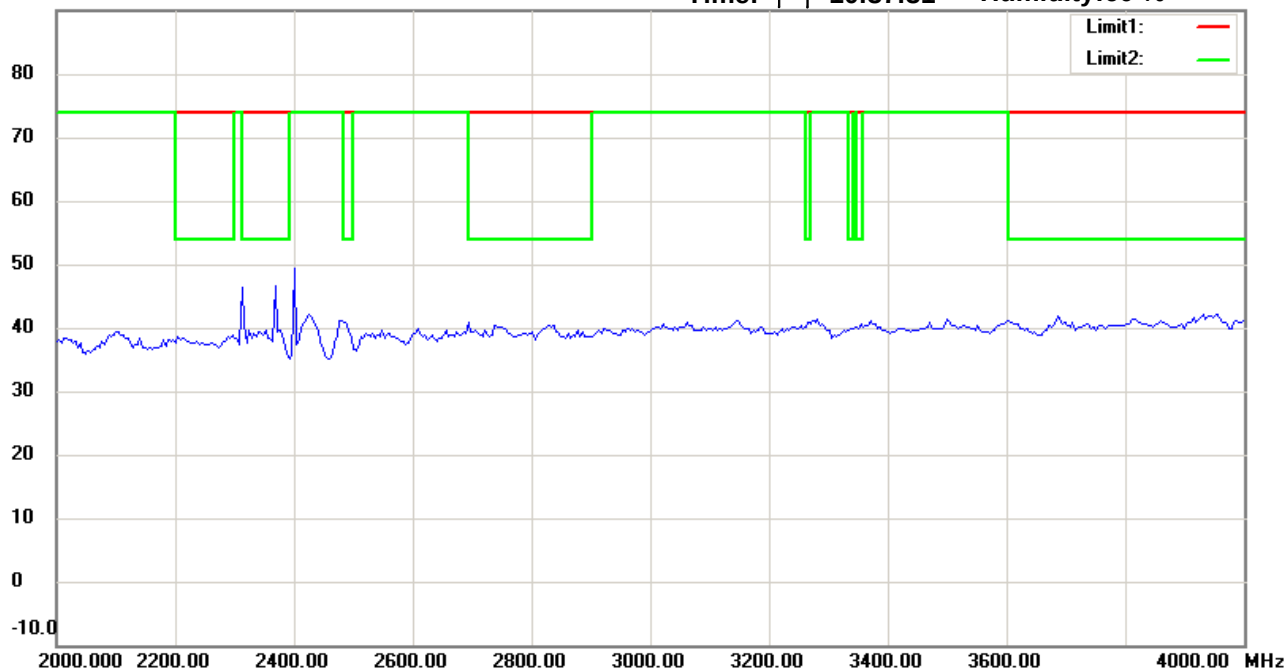

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:40:55

Humidity:60 %

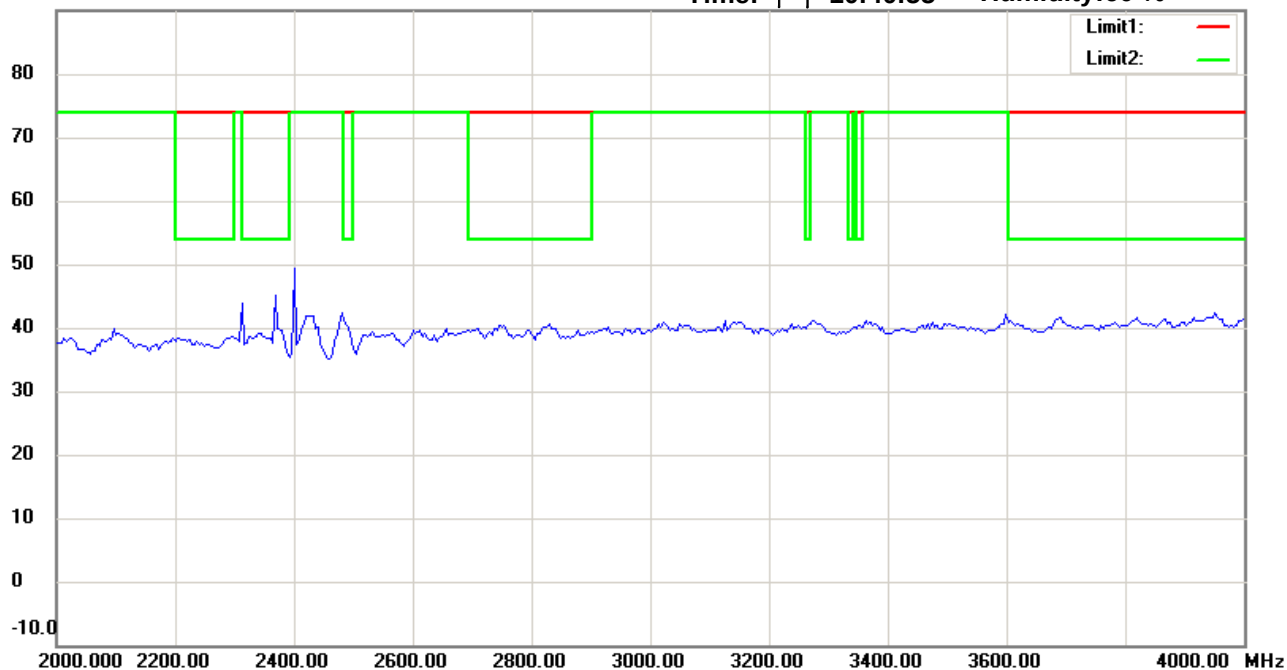

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:38:16

Humidity:60 %

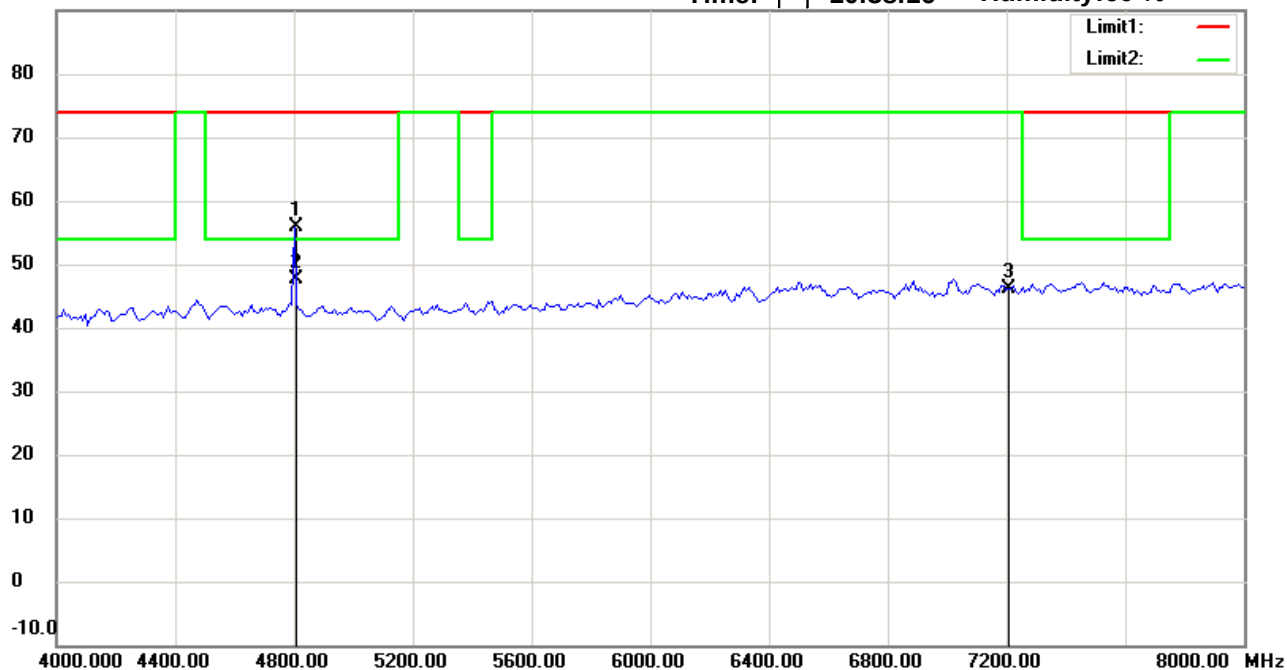

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.142	54.71	peak	1.14	55.85	74.00	100	145	-18.15	
*	4804.142	46.61	AVG	1.14	47.75	54.00	100	145	-6.25	
	7206.000	41.51	peak	4.73	46.24	74.00	100	125	-27.76	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:41:41

Humidity:60 %

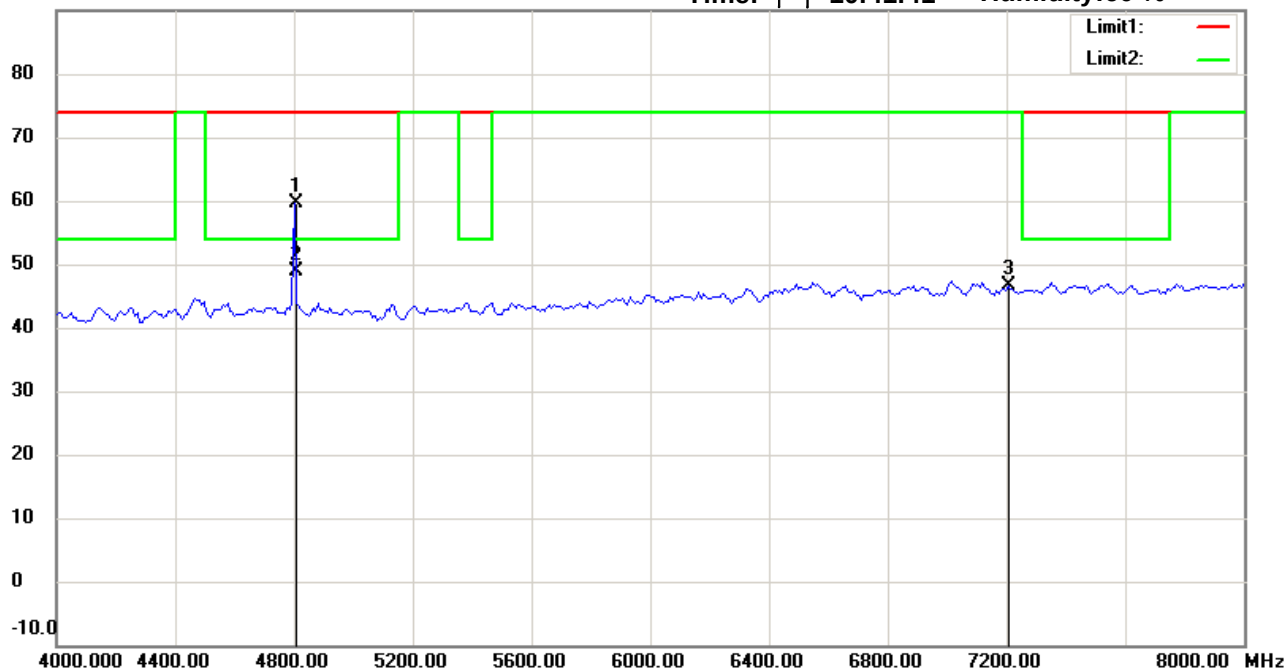

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c..

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.102	58.55	peak	1.14	59.69	74.00	100	190	-14.31	
*	4804.102	47.85	AVG	1.14	48.99	54.00	100	190	-5.01	
	7206.000	41.80	peak	4.73	46.53	74.00	100	120	-27.47	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:39:01

Humidity:60 %

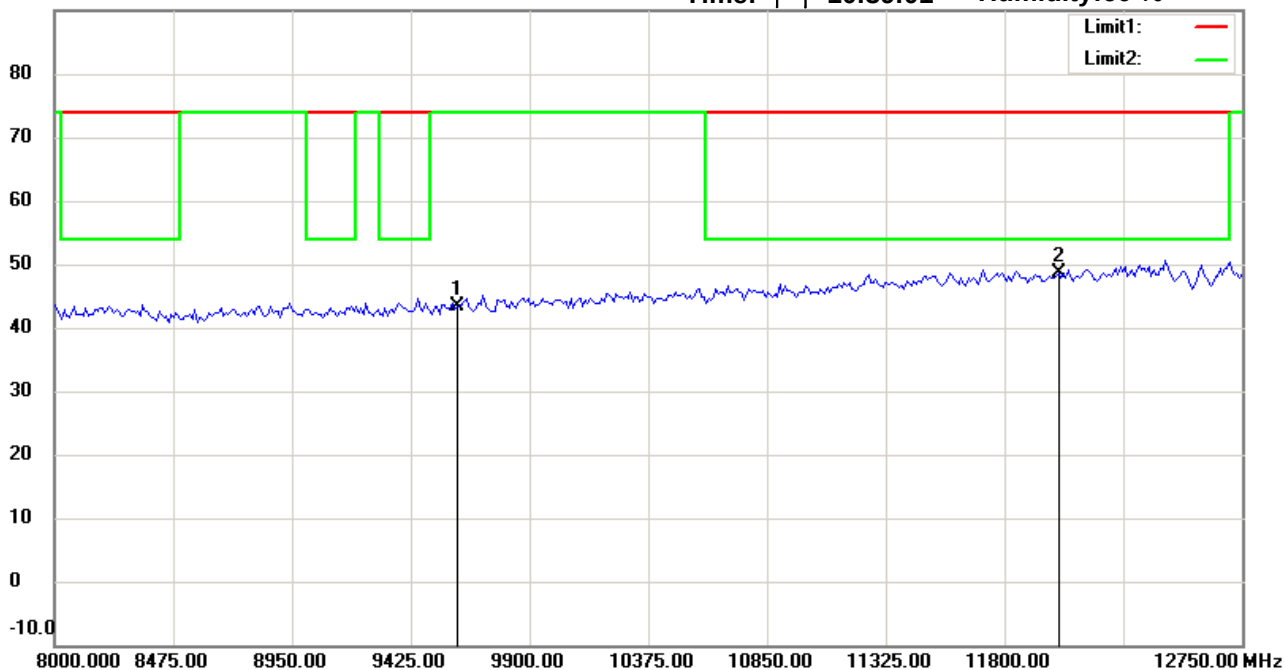

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.59	peak	7.77	43.36	74.00	100	230	-30.64	
*	12010.000	35.11	peak	13.58	48.69	74.00	100	70	-25.31	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:42:25

Humidity:60 %

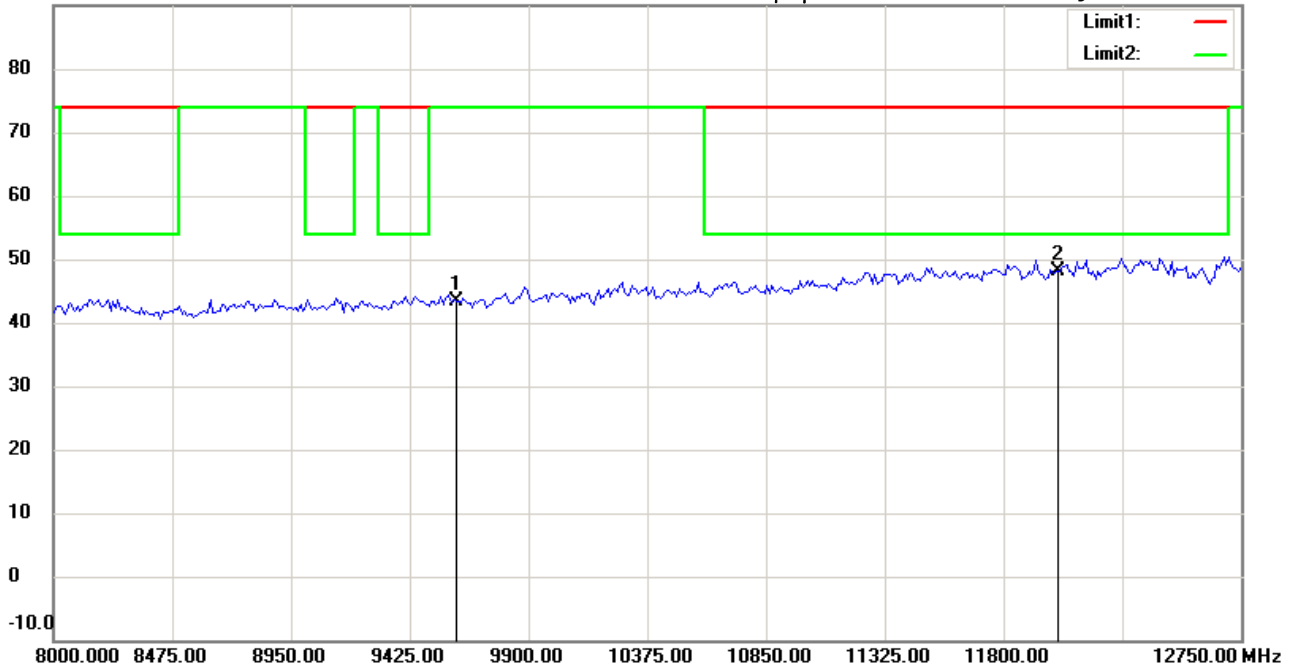

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.58	peak	7.77	43.35	74.00	100	225	-30.65	
*	12010.000	34.44	peak	13.58	48.02	74.00	100	80	-25.98	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File : 3

Data : #5


Date: 2015/7/14

Temperature: 24 °C

90.0 dBuV/m

Time: 下午 10:39:15

Humidity: 60 %

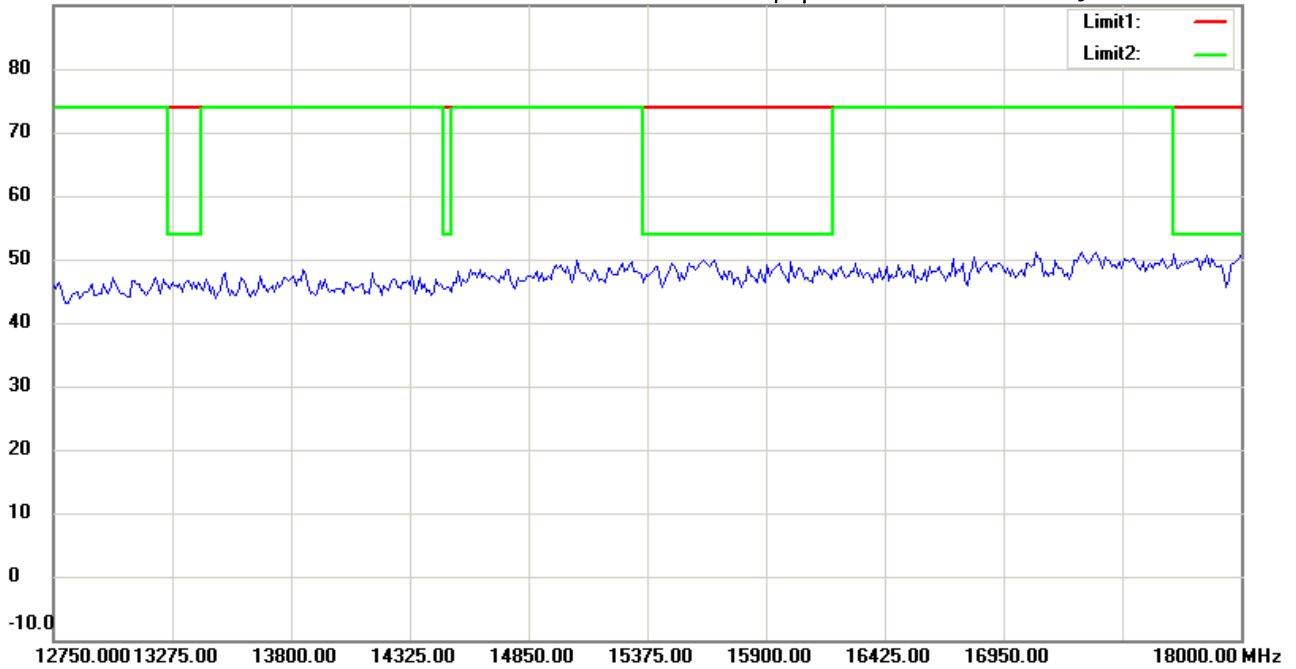

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#11


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:42:39

Humidity:60 %

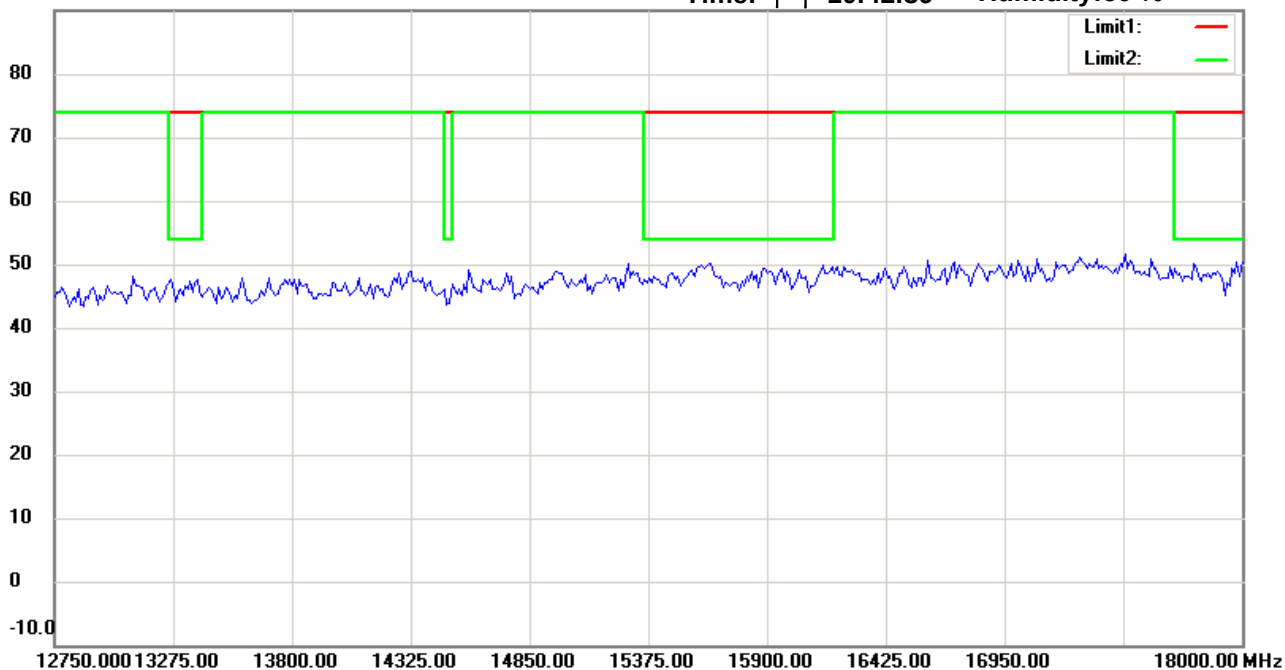

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:39:24

Humidity:60 %

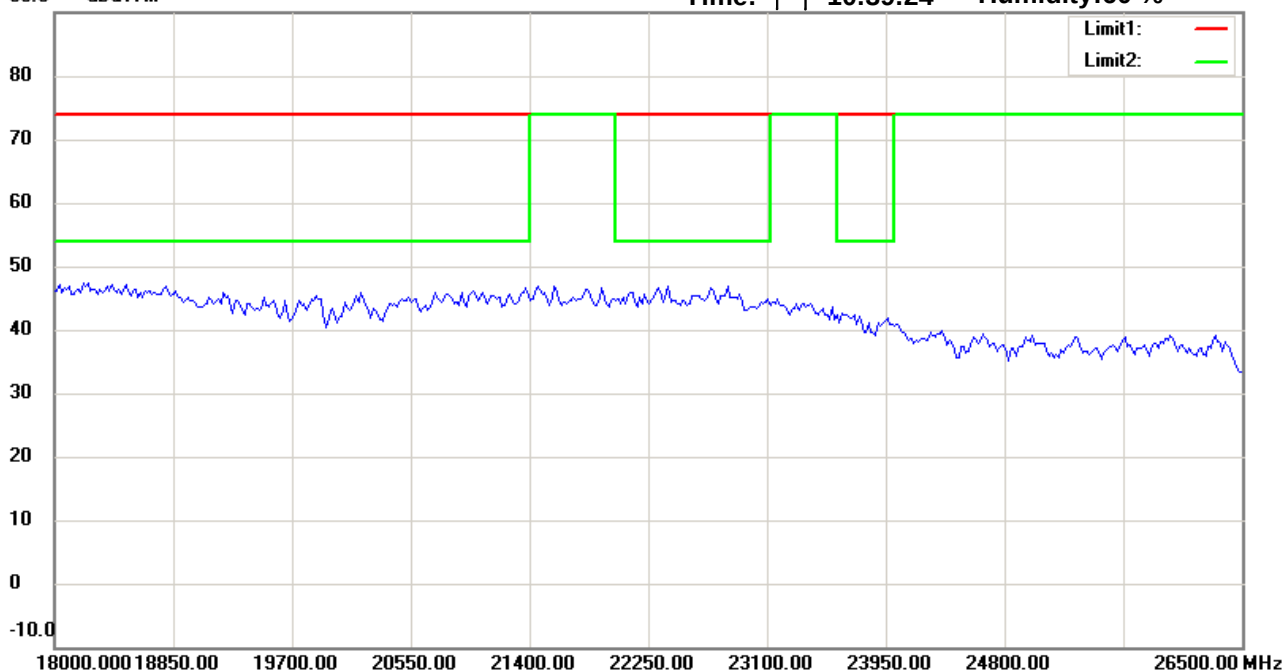

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#12


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:42:48

Humidity:60 %

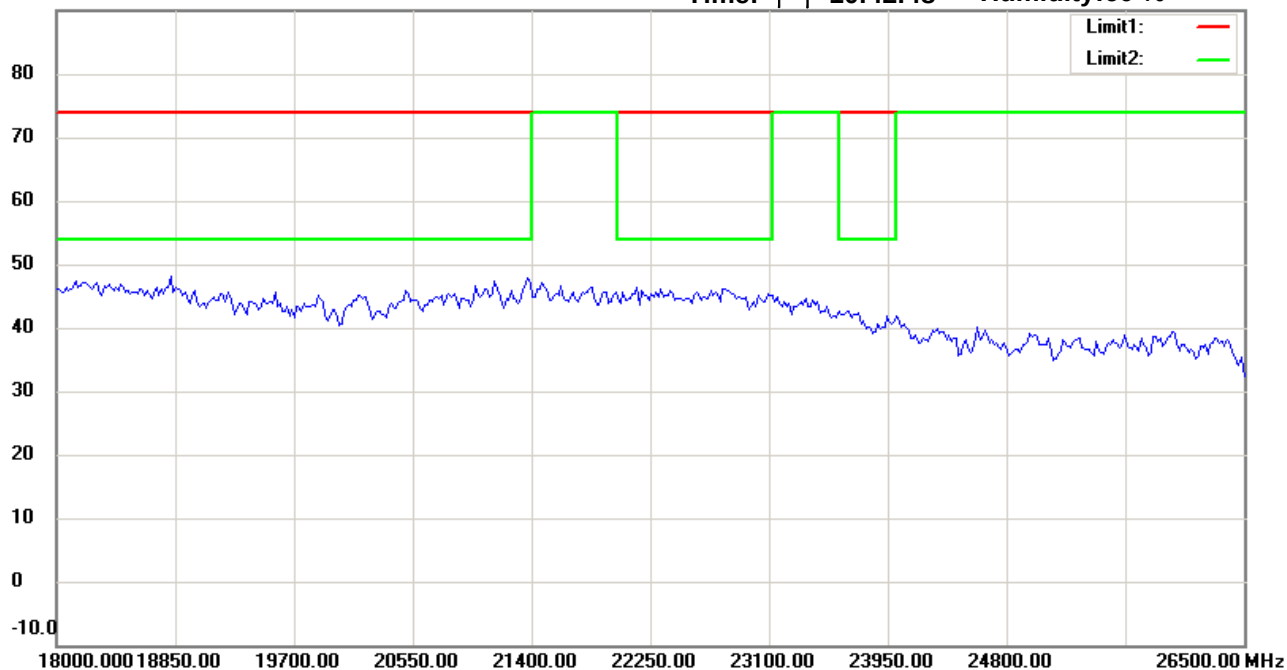

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:06:13

Humidity:60 %

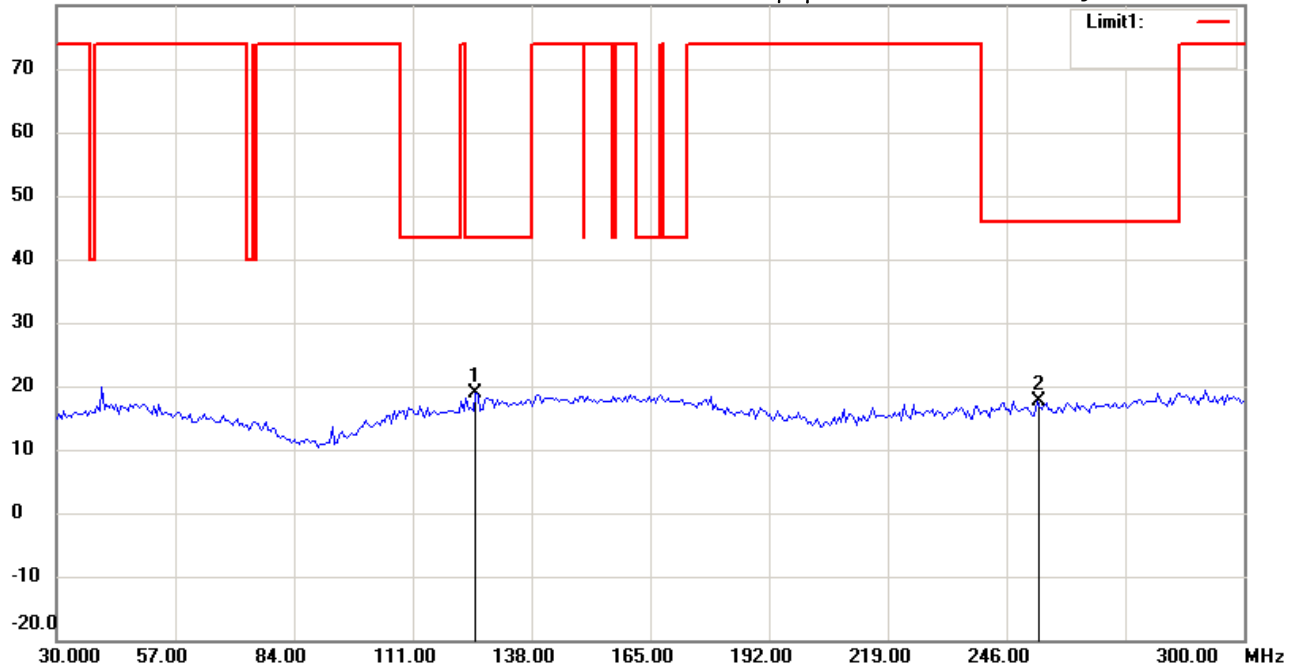

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.2305	4.36	peak	14.40	18.76	43.50	100	160	-24.74	
	252.9260	3.13	peak	14.49	17.62	46.00	100	75	-28.38	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:06:59

Humidity:60 %

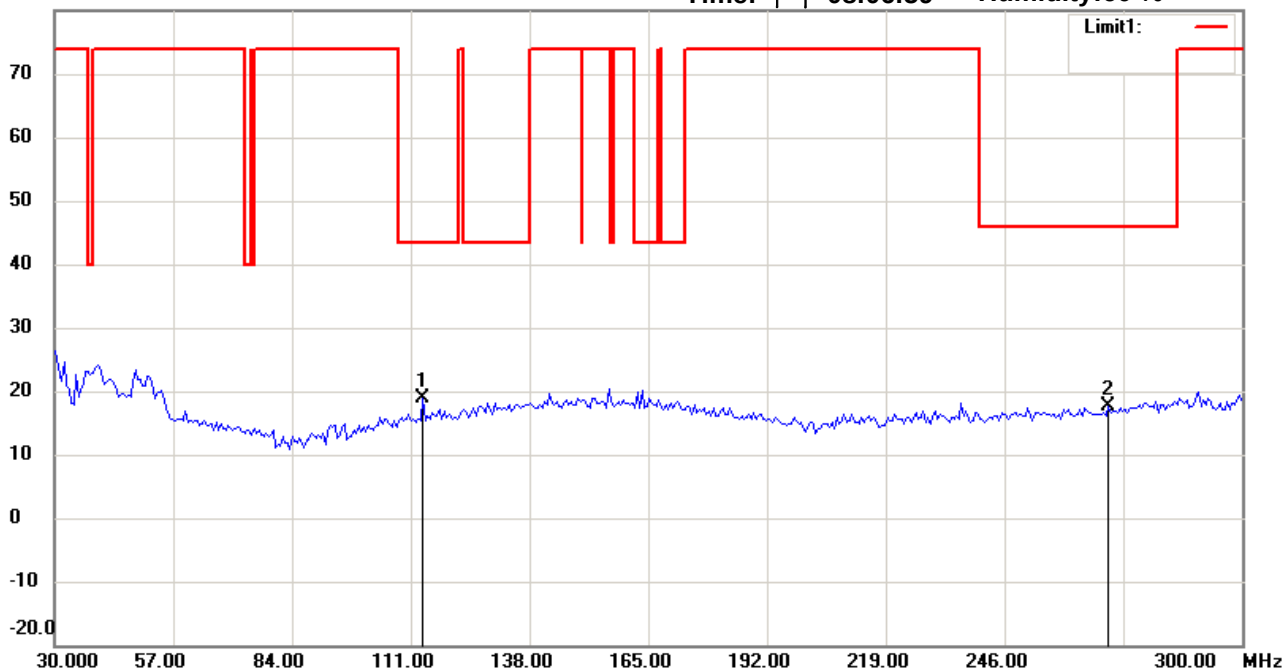

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	113.8677	5.45	peak	13.54	18.99	43.50	100	240	-24.51	
	269.6994	2.45	peak	15.06	17.51	46.00	100	150	-28.49	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :2

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:03:04

Humidity:60 %

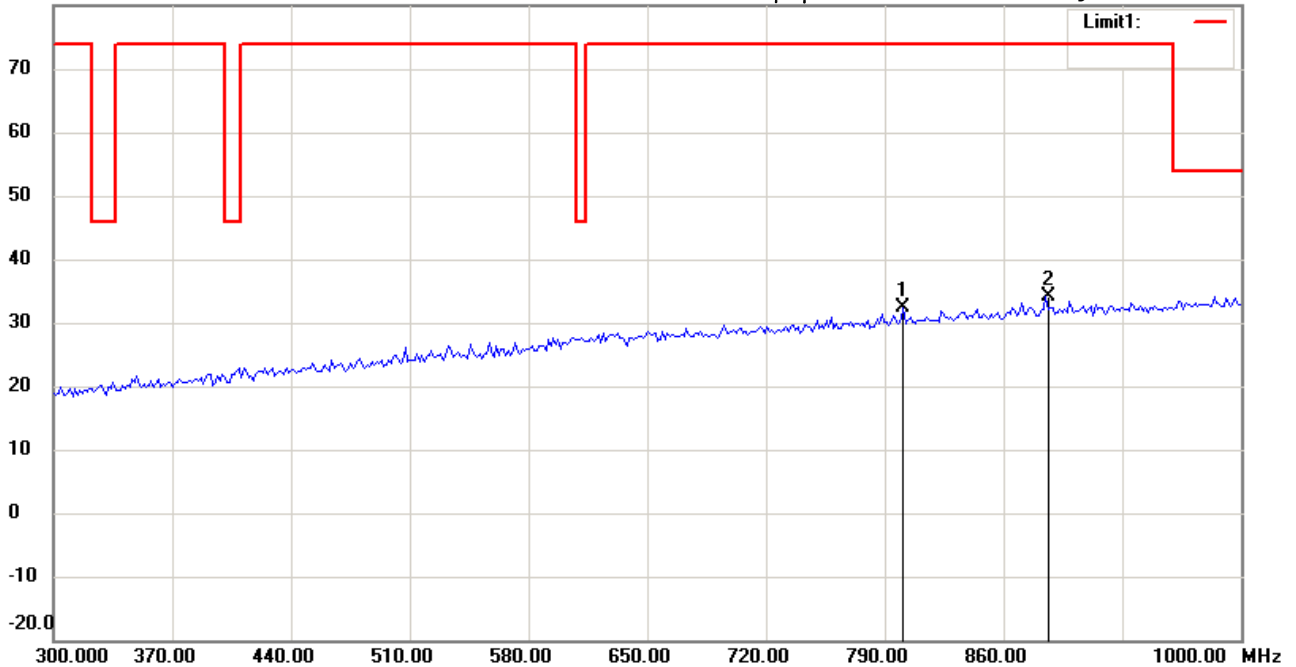

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	800.8016	5.70	peak	26.62	32.32	74.00	100	70	-41.68	
*	884.9700	5.97	peak	28.13	34.10	74.00	100	305	-39.90	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :2

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:03:49

Humidity:60 %

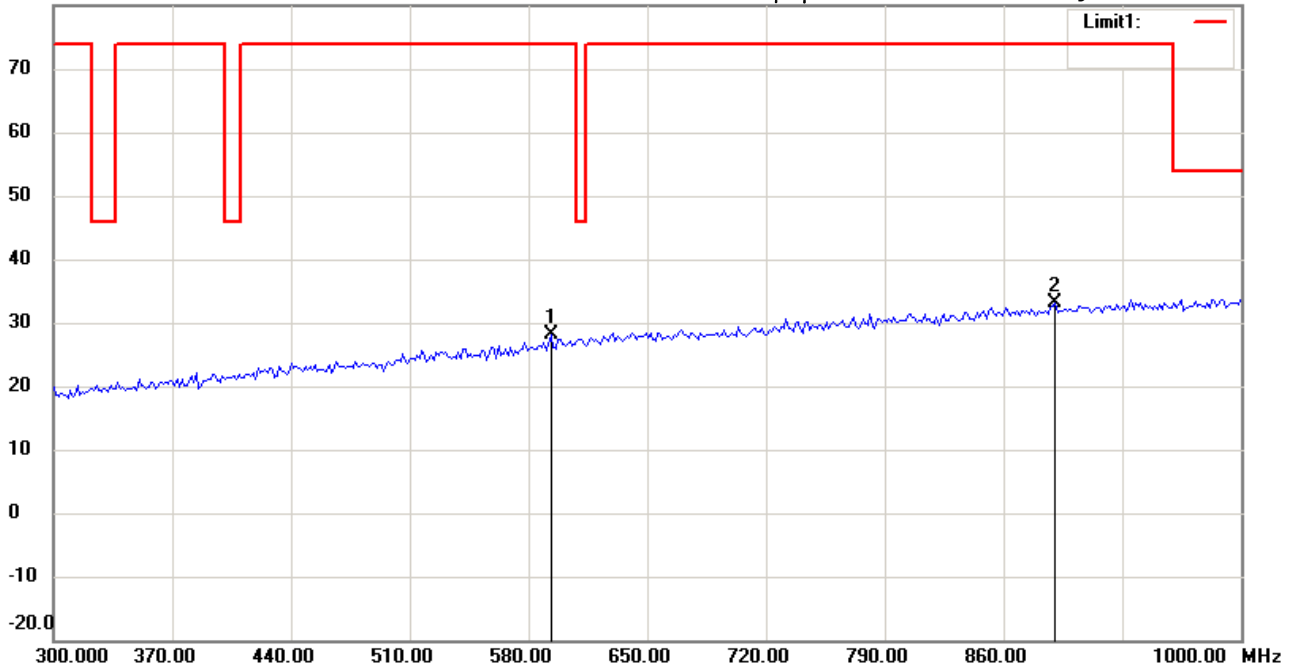

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	593.1864	4.96	peak	23.16	28.12	74.00	100	125	-45.88	
*	890.5812	4.82	peak	28.22	33.04	74.00	100	190	-40.96	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:49:10

Humidity:60 %

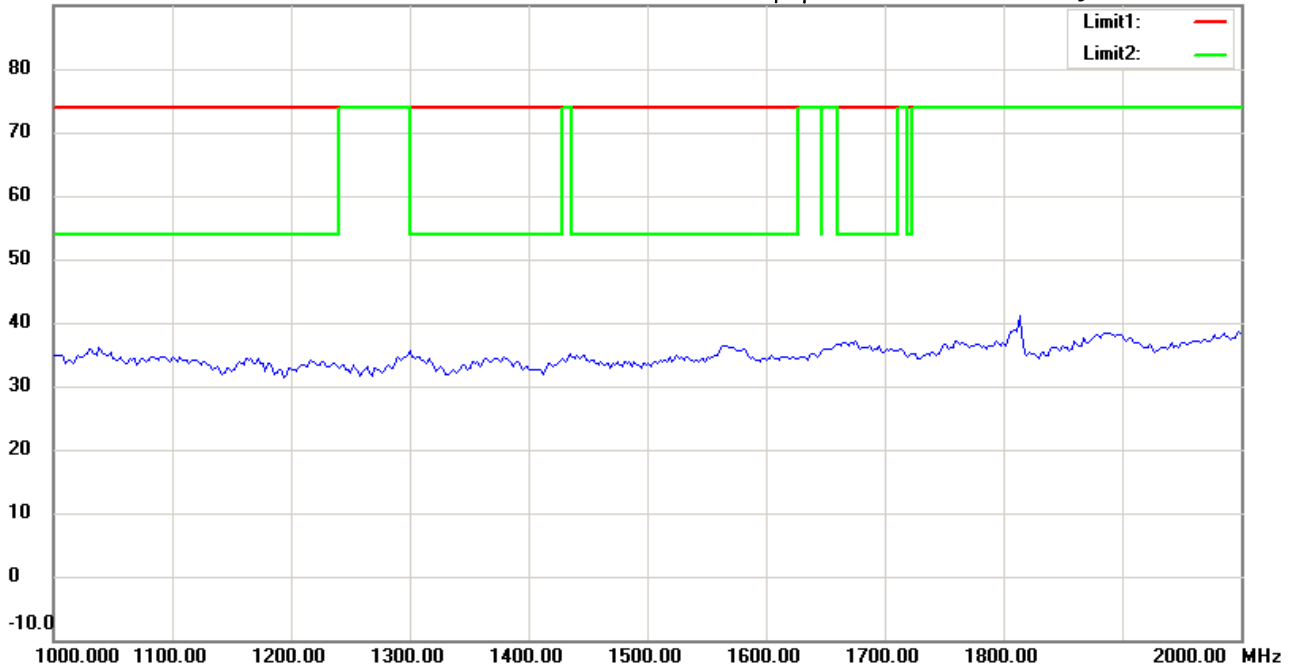

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:52:34

Humidity:60 %

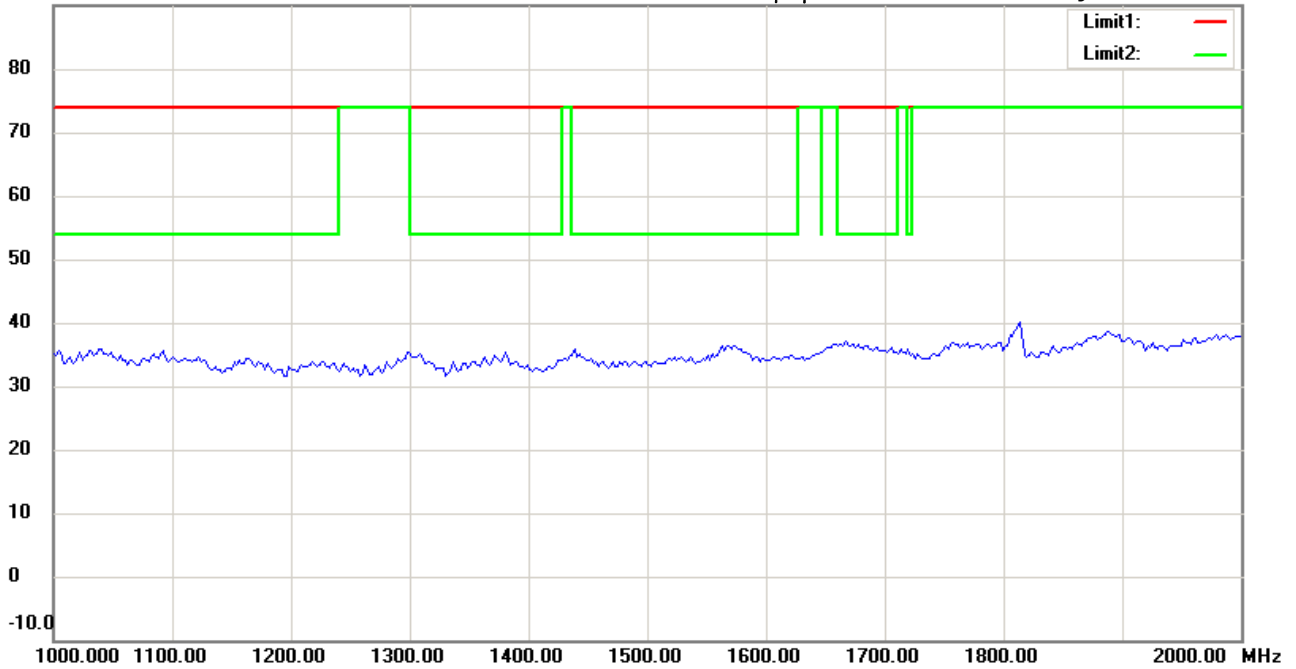

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:49:55

Humidity:60 %

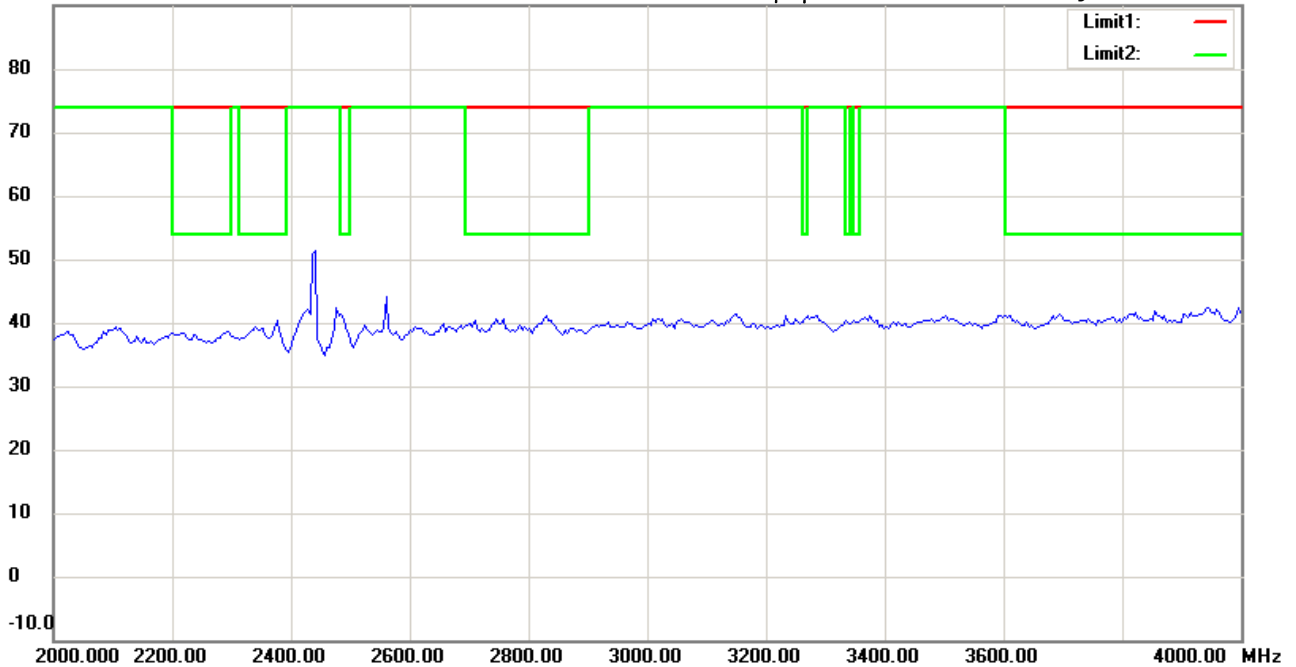

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:53:19

Humidity:60 %

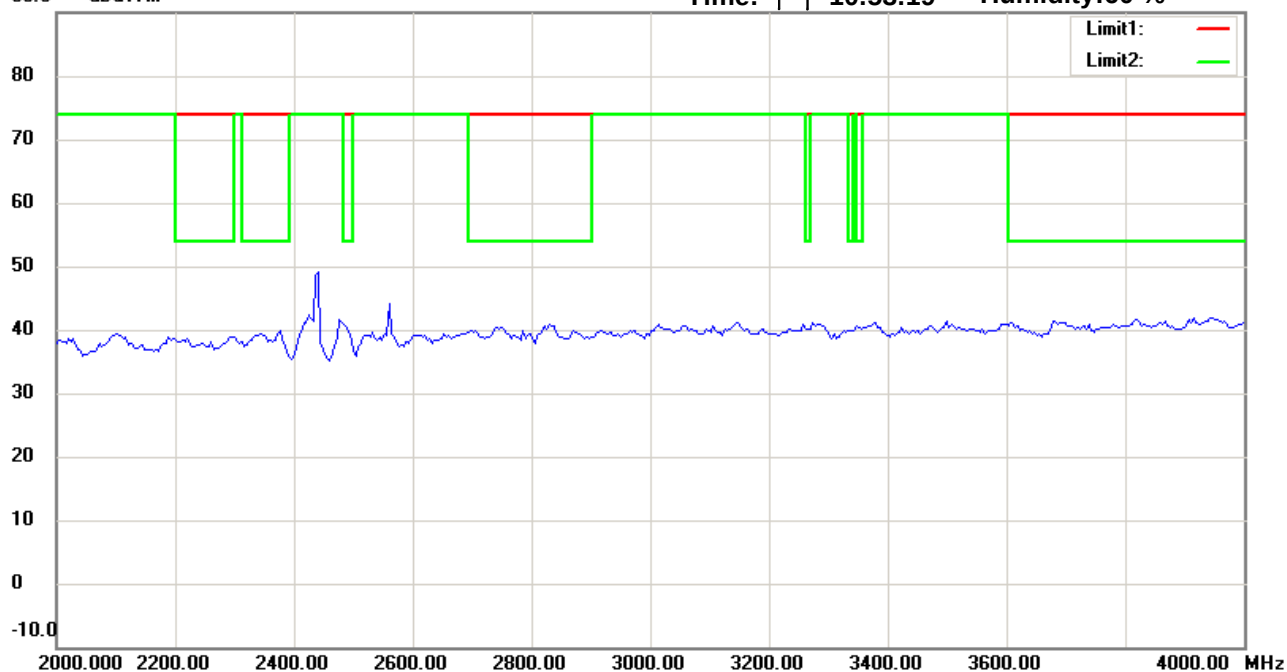

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:50:40

Humidity:60 %

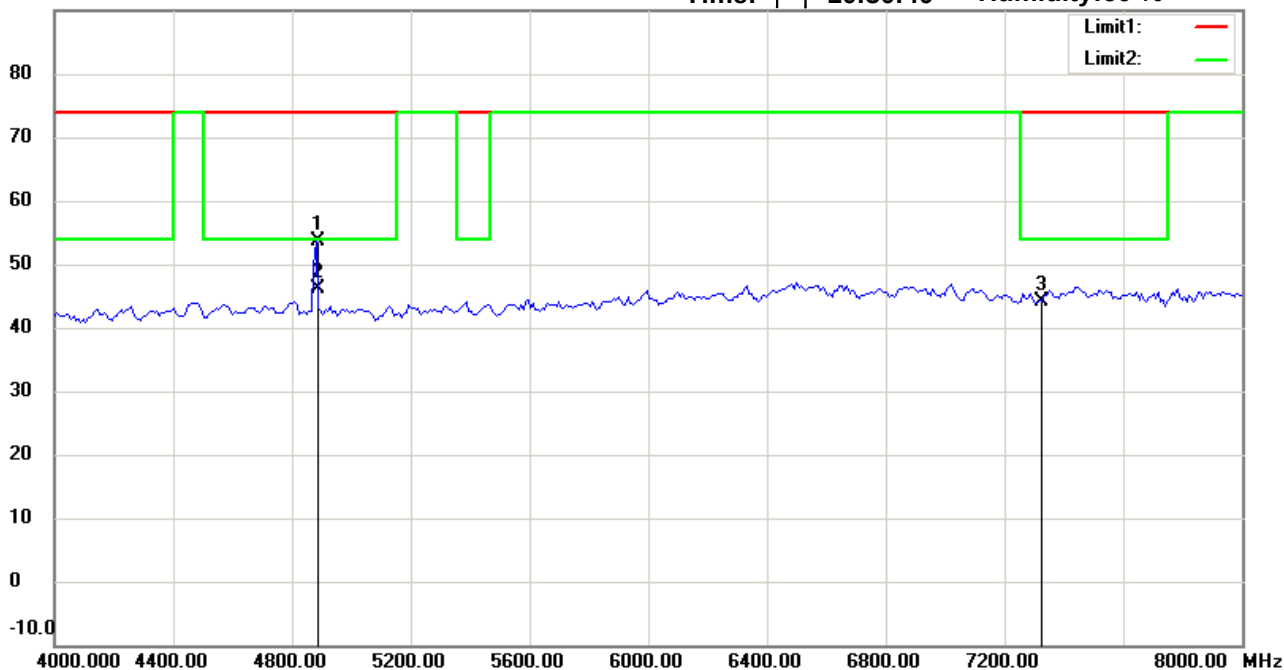

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	52.34	peak	1.19	53.53	74.00	100	120	-20.47	
*	4881.764	44.84	AVG	1.19	46.03	54.00	100	120	-7.97	
	7320.000	39.01	peak	5.01	44.02	74.00	100	235	-29.98	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:54:05

Humidity:60 %

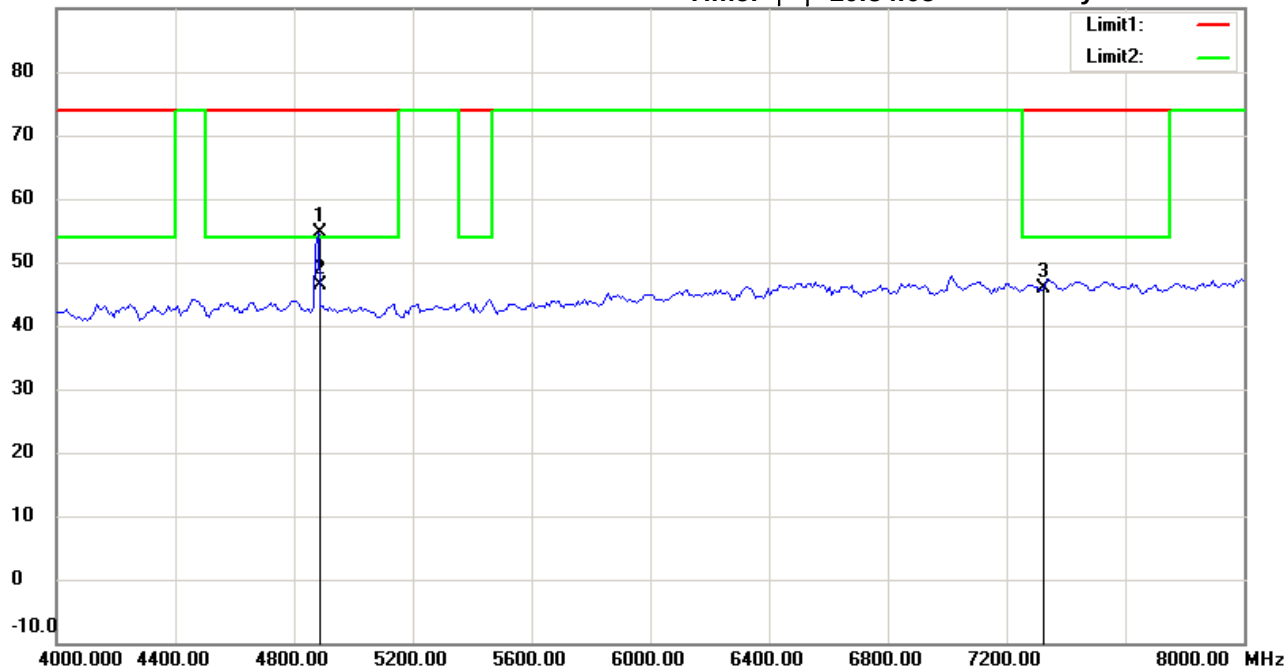

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	53.34	peak	1.19	54.53	74.00	100	150	-19.47	
*	4881.764	45.28	AVG	1.19	46.47	54.00	100	150	-7.53	
	7320.000	40.89	peak	5.01	45.90	74.00	100	215	-28.10	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:25

Humidity:60 %

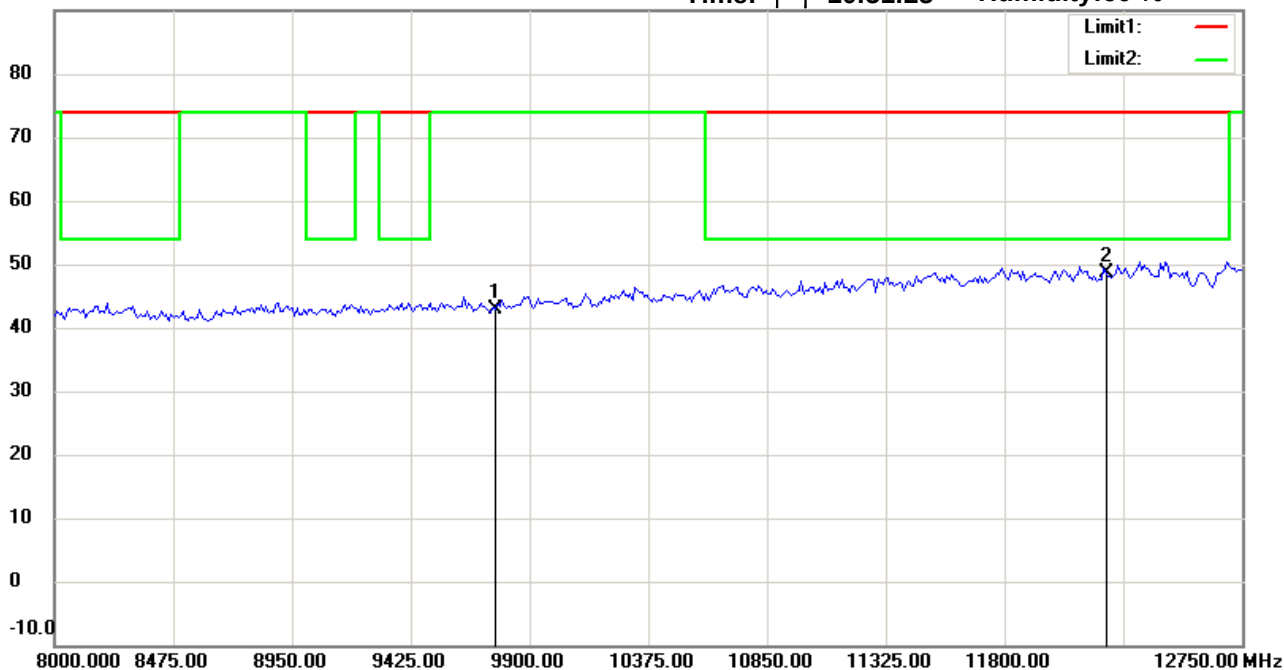

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.80	peak	8.00	42.80	74.00	100	115	-31.20	
*	12200.000	34.27	peak	14.44	48.71	74.00	100	35	-25.29	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:54:49

Humidity:60 %

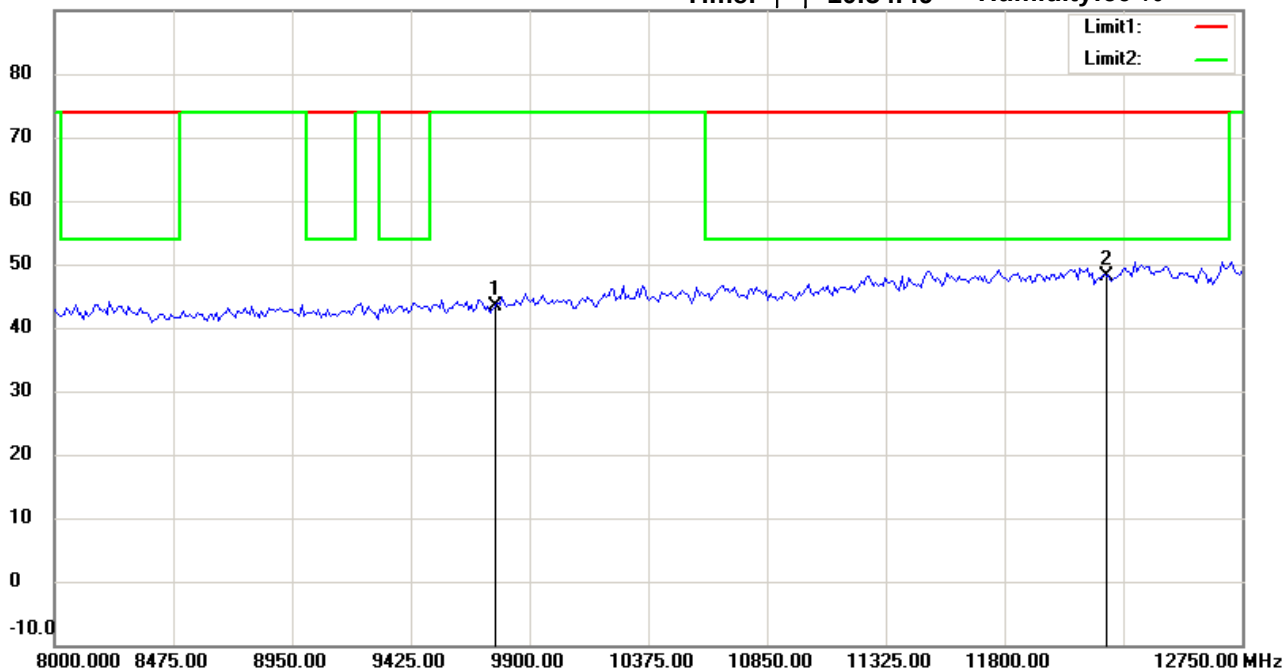

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	35.28	peak	8.00	43.28	74.00	100	240	-30.72	
*	12200.000	33.81	peak	14.44	48.25	74.00	100	155	-25.75	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:39

Humidity:60 %

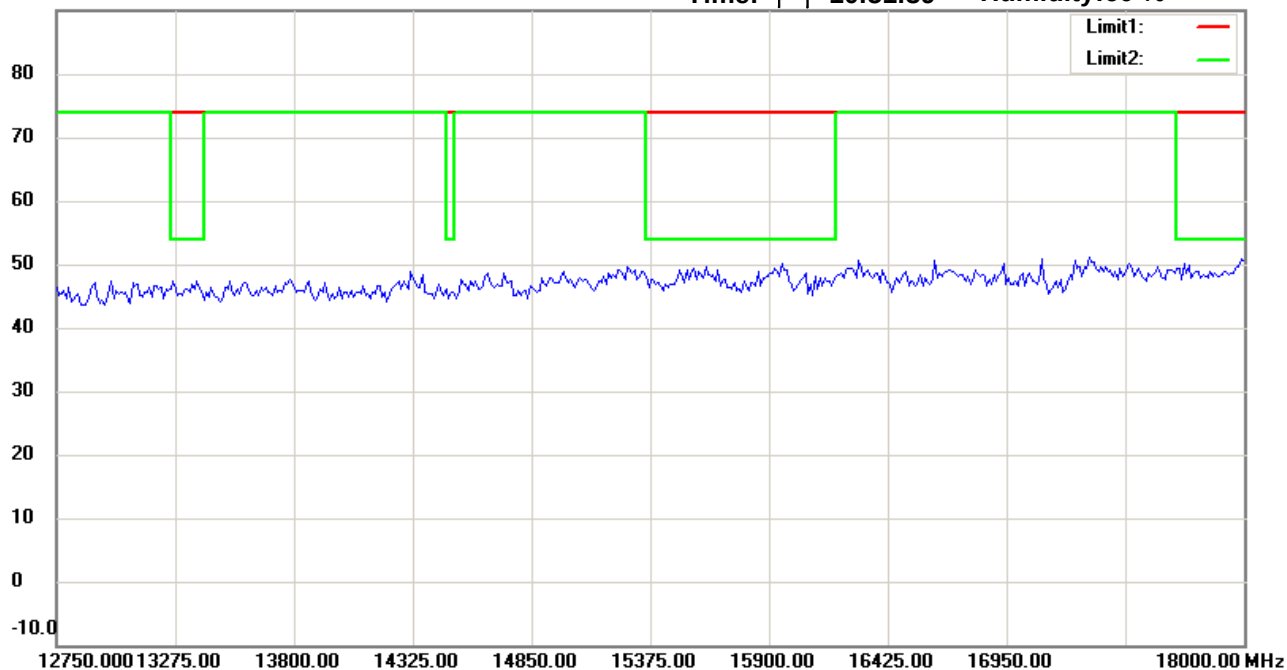

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#11


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:55:03

Humidity:60 %

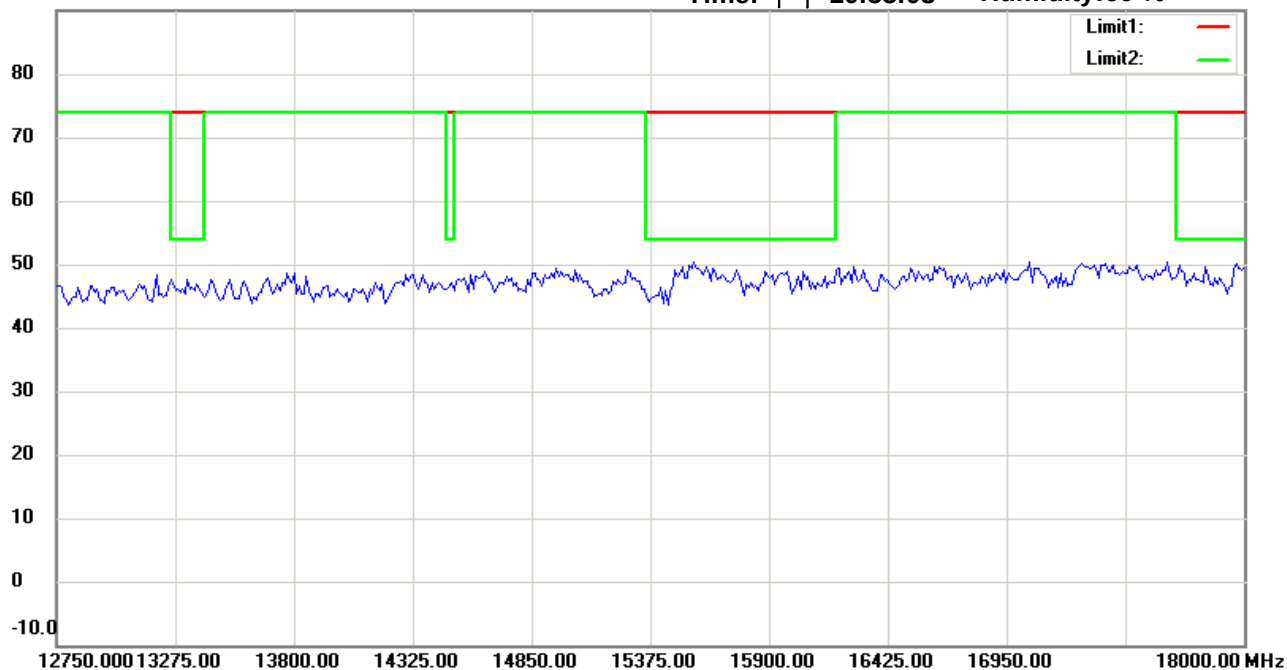

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:49

Humidity:60 %

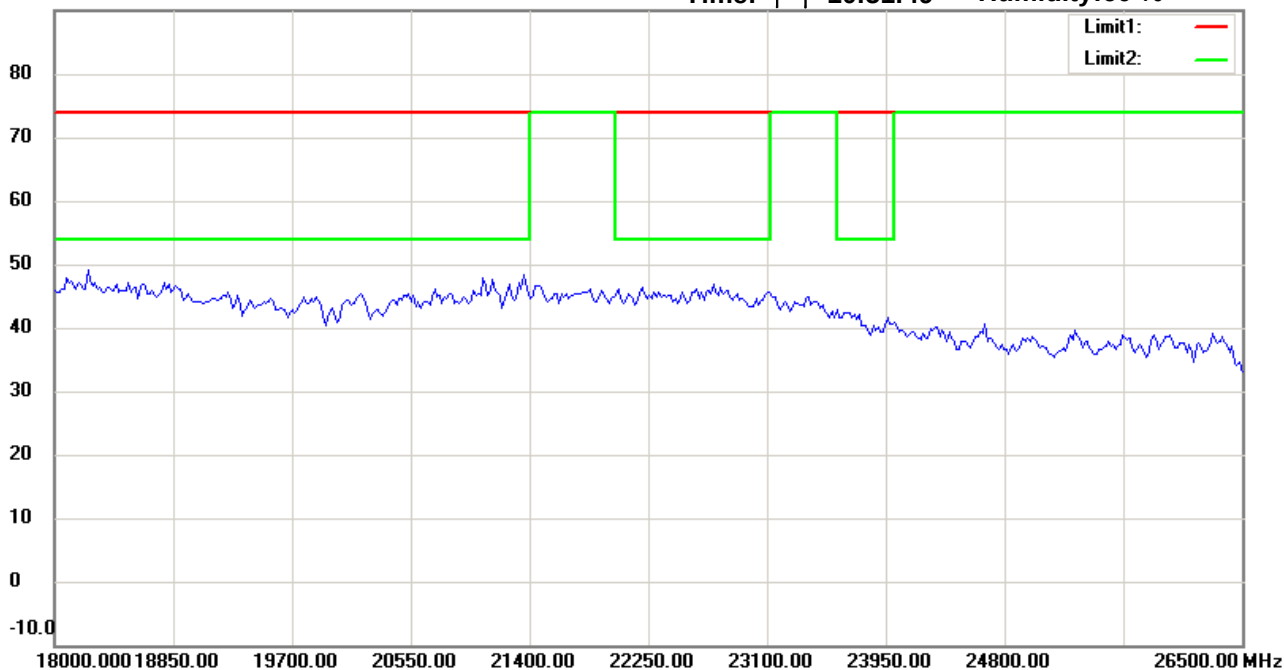

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21507-15115

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#12


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:55:13

Humidity:60 %

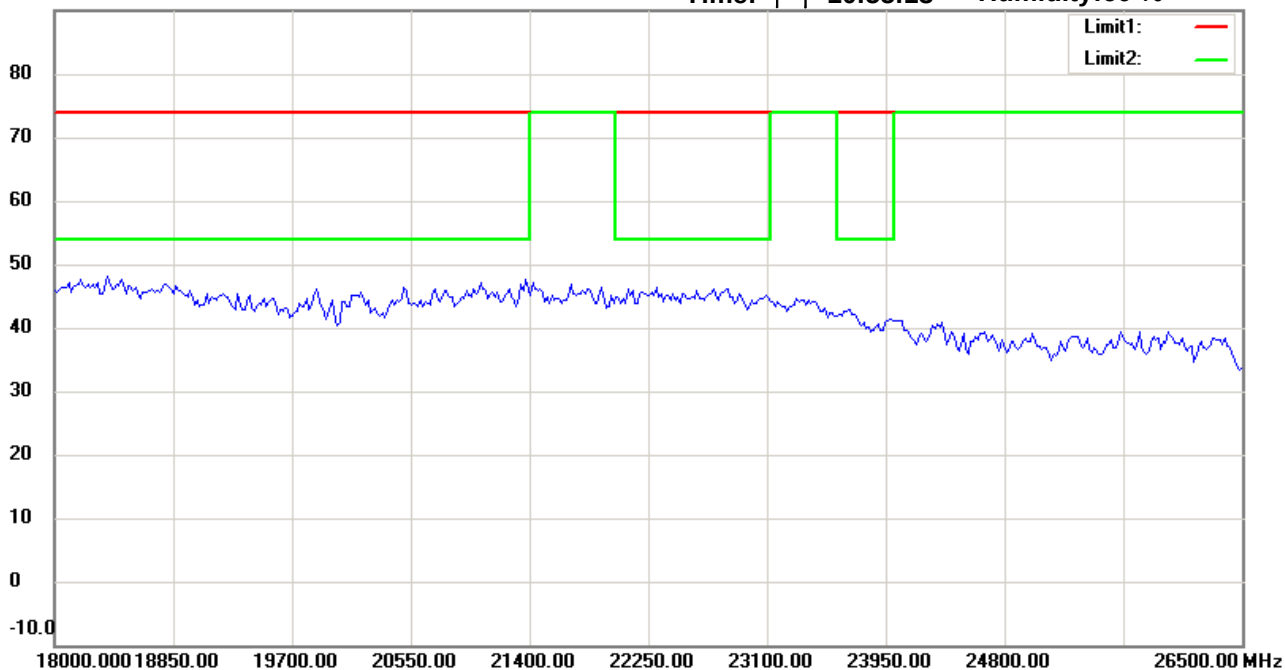

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:58:44

Humidity:60 %

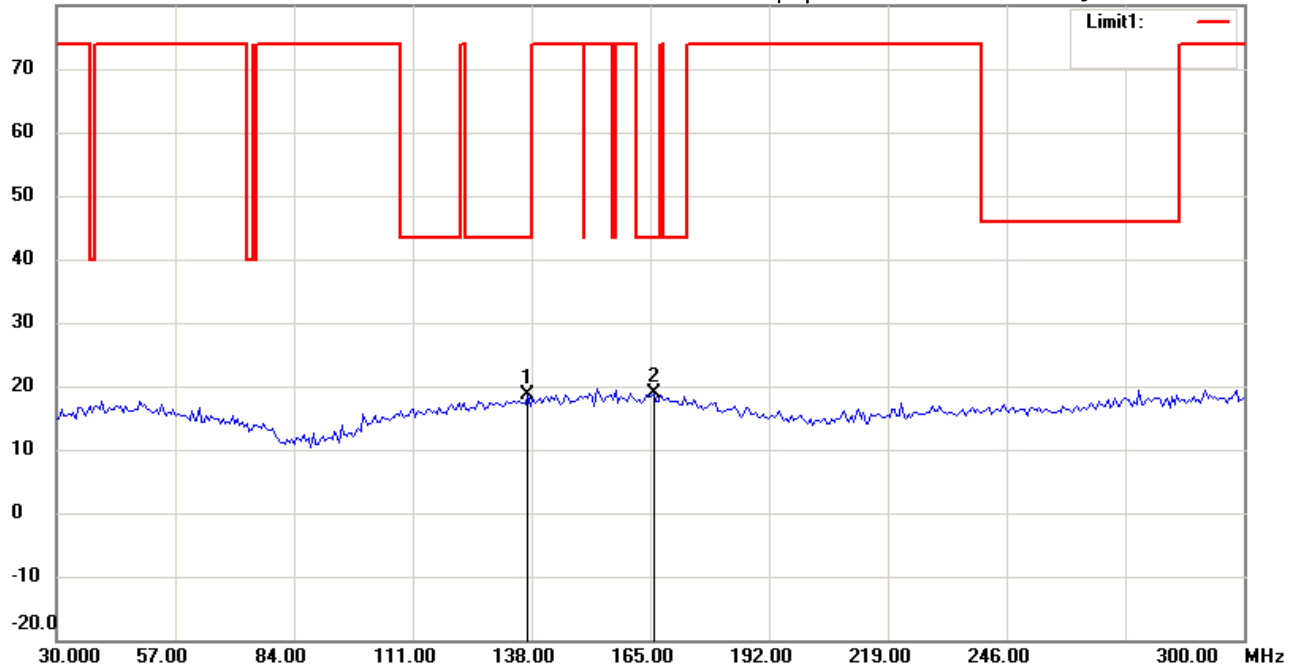

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	137.1342	3.38	peak	15.23	18.61	43.50	100	260	-24.89	
*	165.8115	3.67	peak	15.26	18.93	43.50	100	210	-24.57	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:59:30

Humidity:60 %

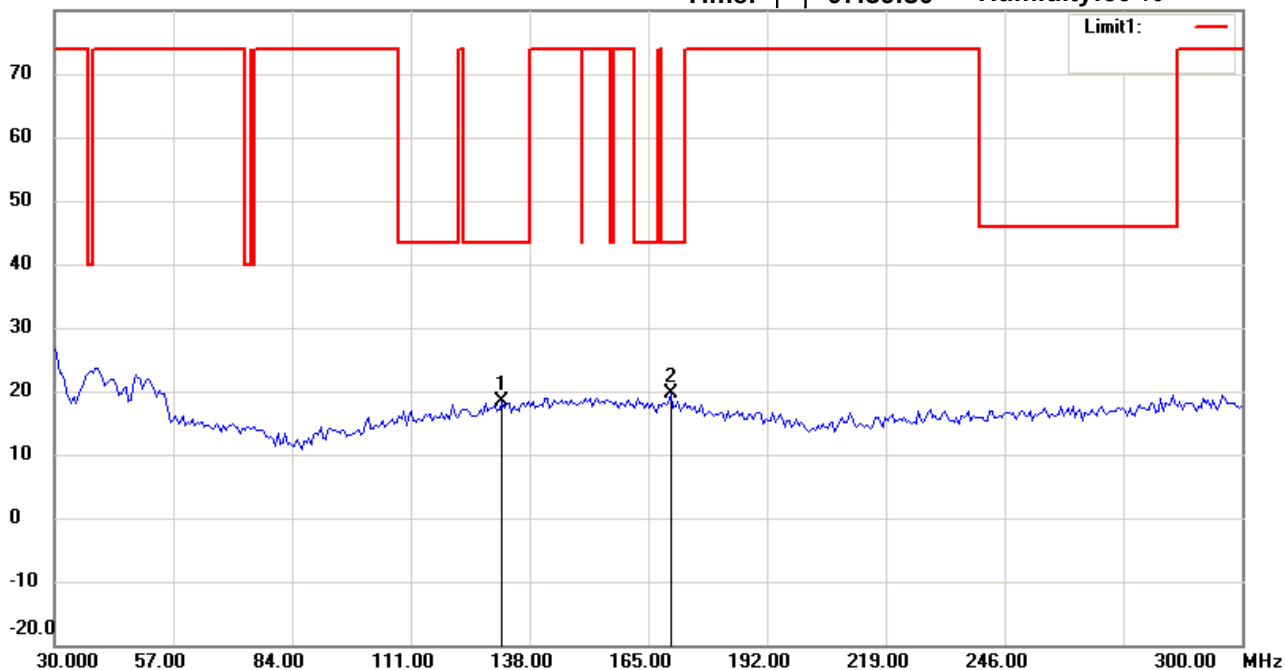

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	131.7234	3.51	peak	14.90	18.41	43.50	100	145	-25.09	
*	170.1402	4.62	peak	15.07	19.69	43.50	100	60	-23.81	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :2

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:00:54

Humidity:60 %

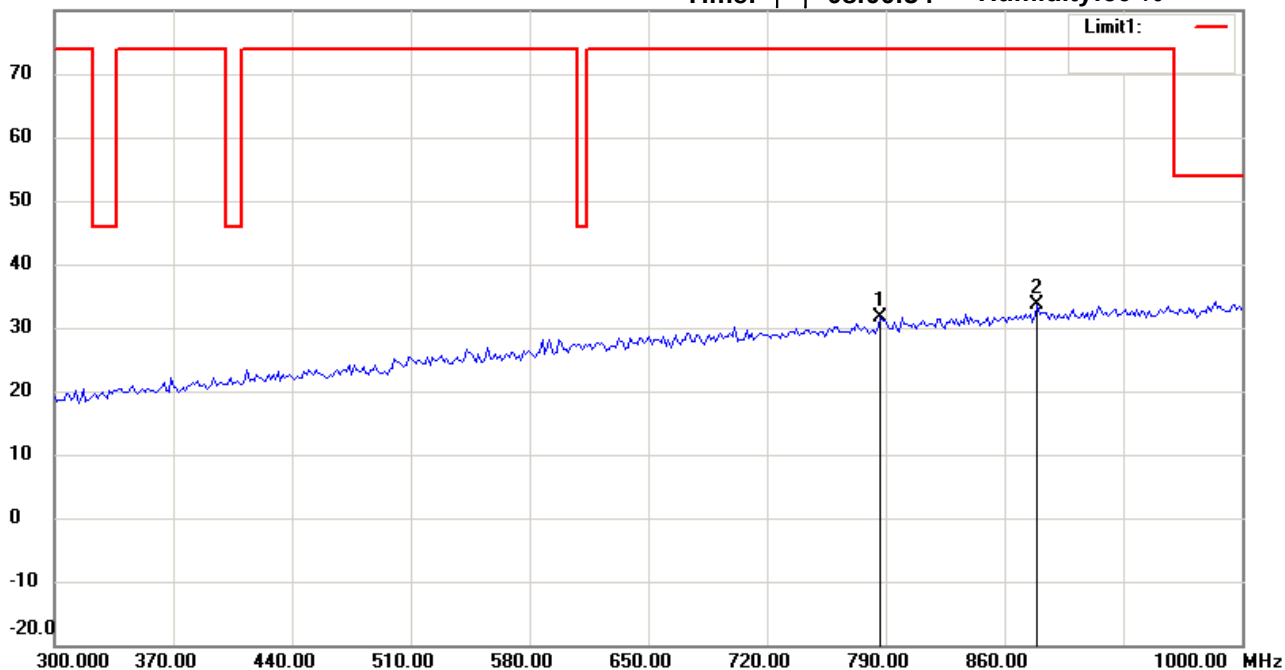

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	786.7735	5.24	peak	26.42	31.66	74.00	100	40	-42.34	
*	879.3586	5.55	peak	28.03	33.58	74.00	100	100	-40.42	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :2

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:01:39

Humidity:60 %

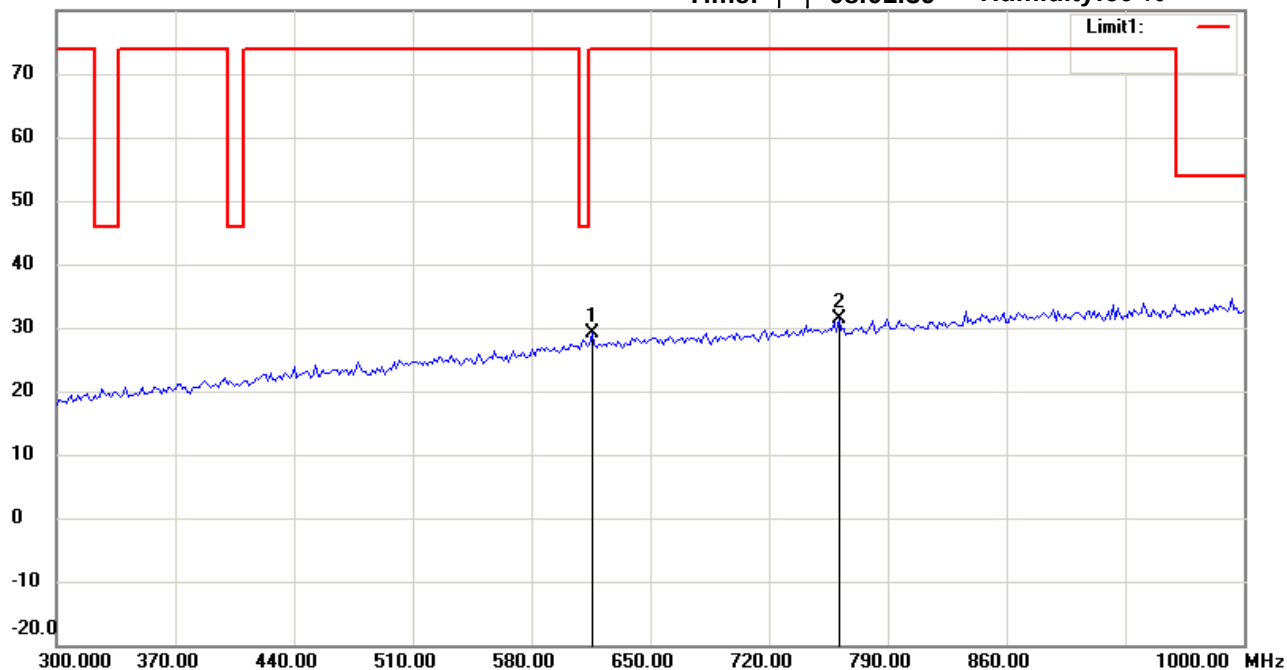

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	615.6312	5.25	peak	23.76	29.01	74.00	100	55	-44.99	
*	761.5230	5.32	peak	26.08	31.40	74.00	100	120	-42.60	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:59:05

Humidity:60 %

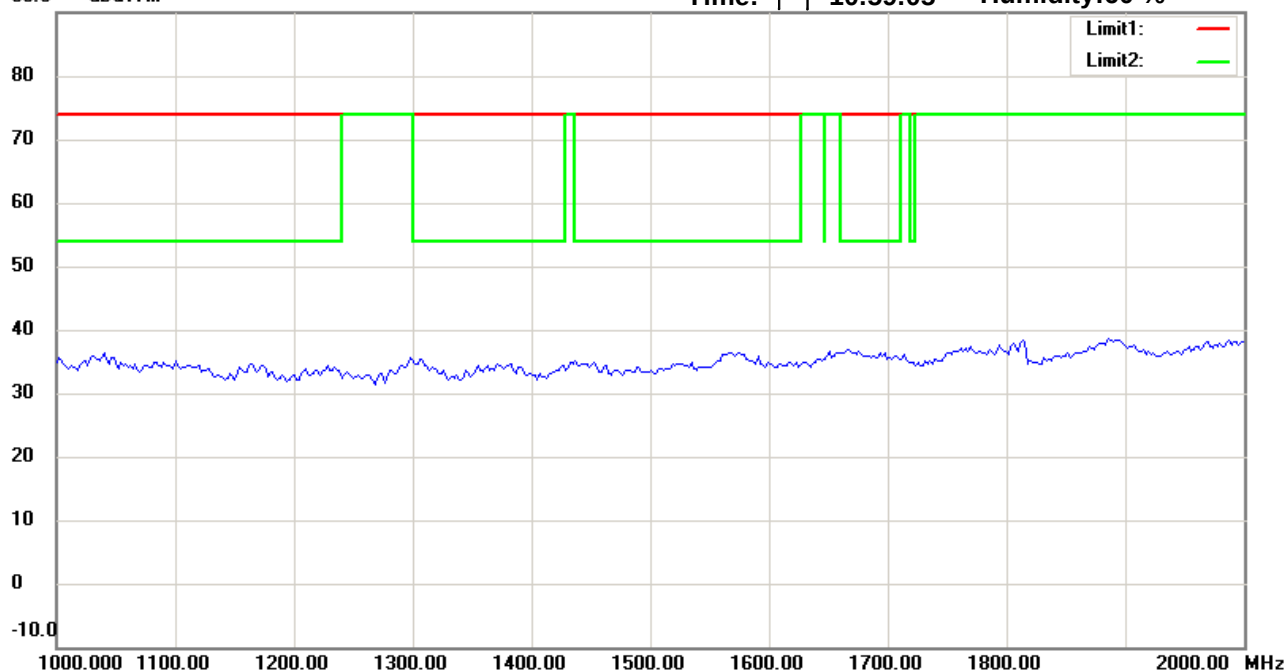

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:02:30

Humidity:60 %

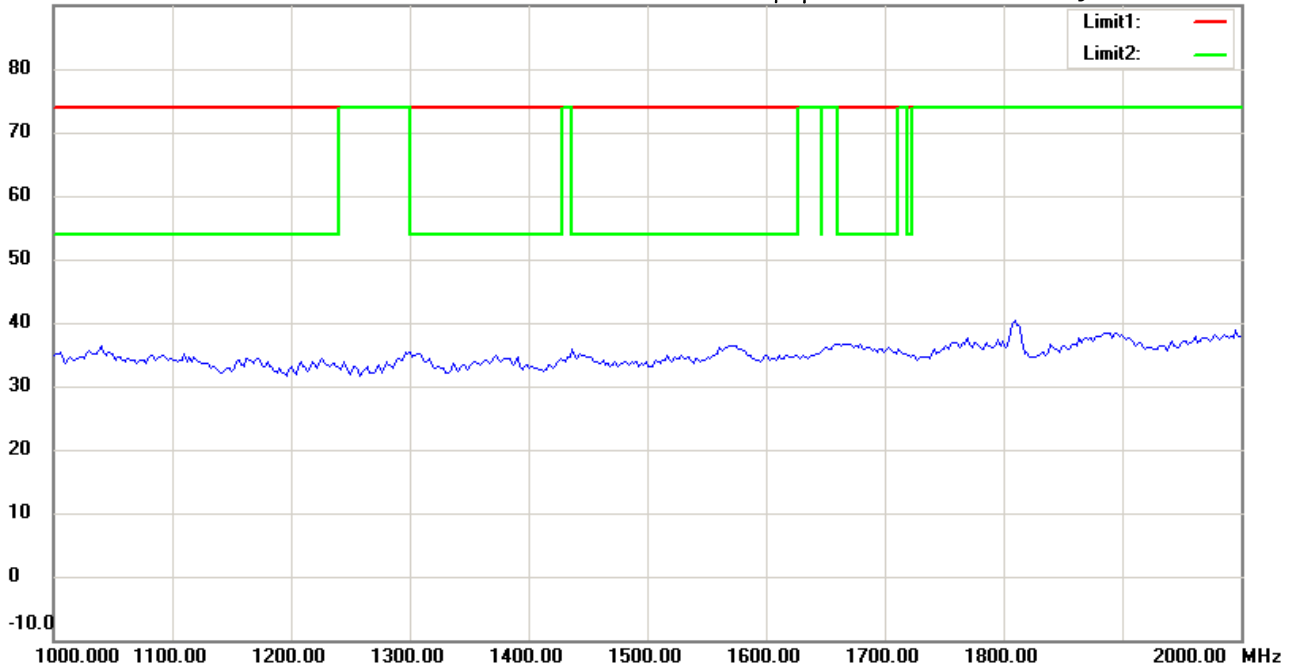

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:59:51

Humidity:60 %

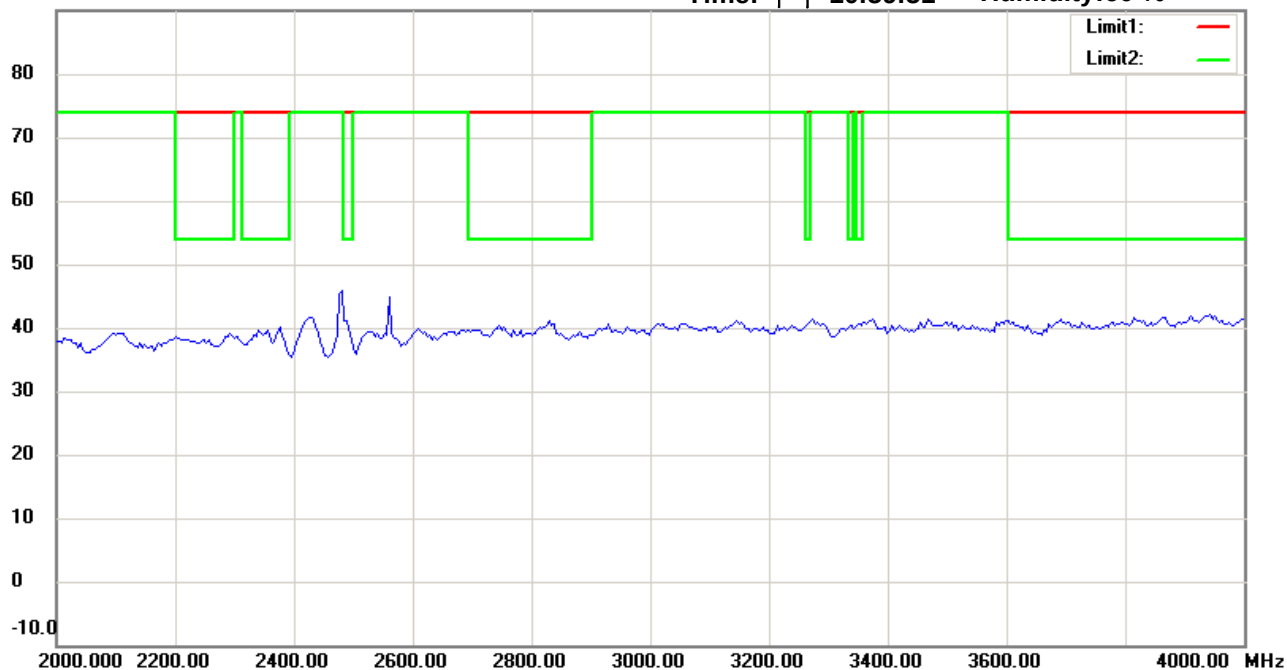

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:03:15

Humidity:60 %

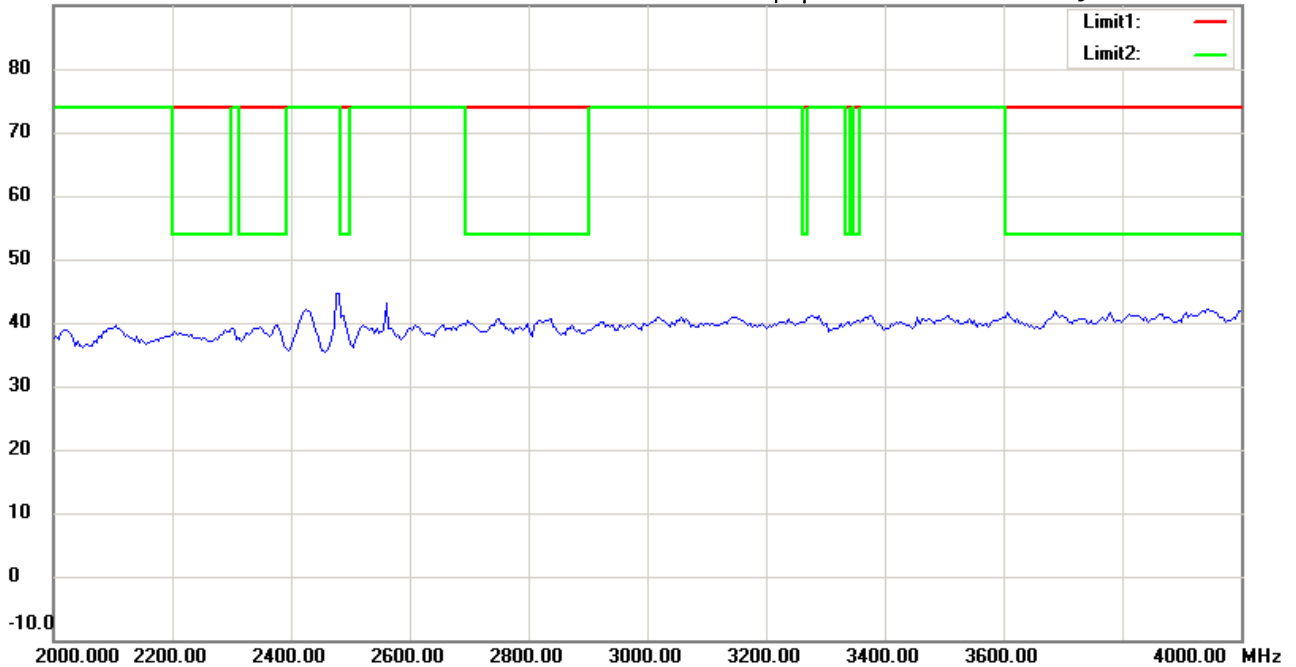

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:00:36

Humidity:60 %

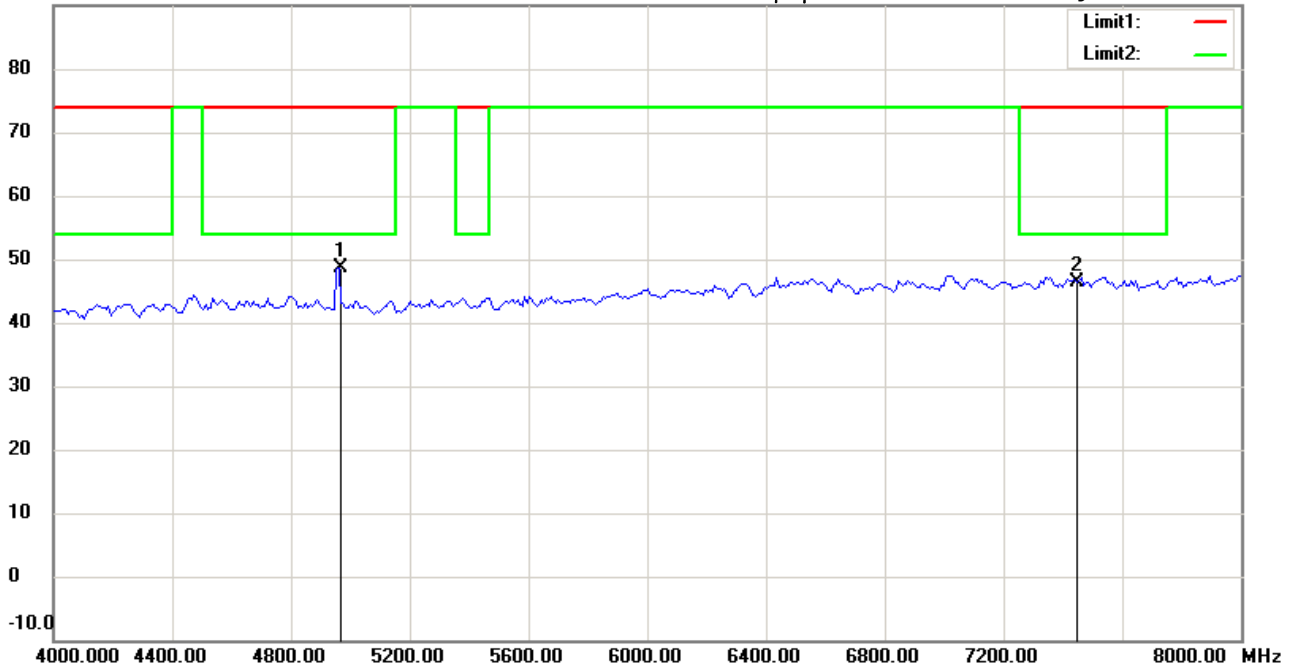

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4961.924	47.42	peak	1.30	48.72	74.00	100	150	-25.28	
	7440.000	41.07	peak	5.42	46.49	74.00	100	305	-27.51	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:04:01

Humidity:60 %

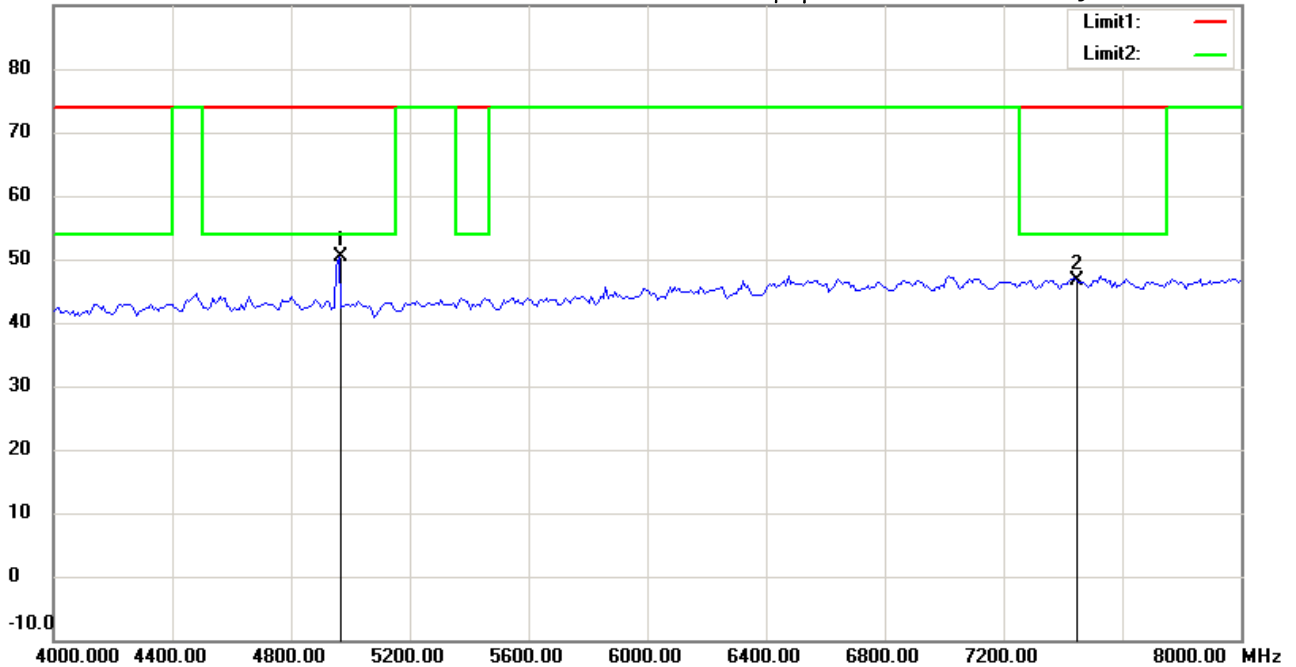

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4961.924	49.08	peak	1.30	50.38	74.00	100	145	-23.62	
	7440.000	41.20	peak	5.42	46.62	74.00	100	245	-27.38	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:01:21

Humidity:60 %

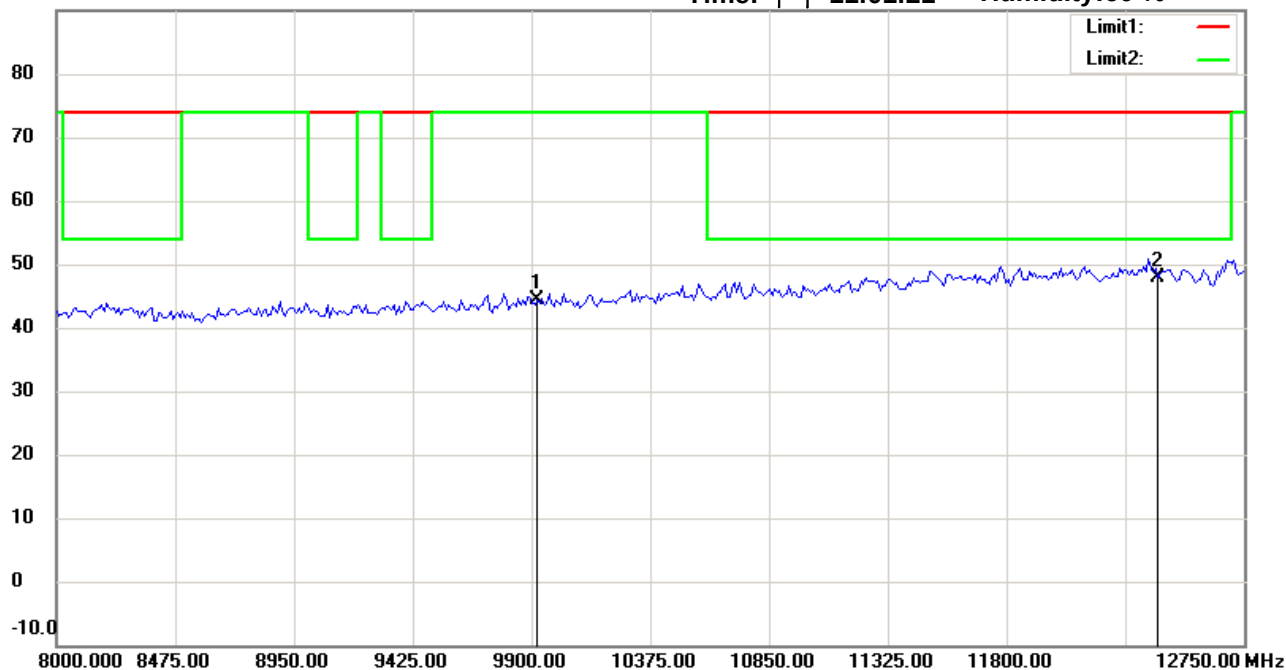

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.99	peak	8.43	44.42	74.00	100	250	-29.58	
*	12400.000	33.12	peak	14.81	47.93	74.00	100	80	-26.07	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:04:45

Humidity:60 %

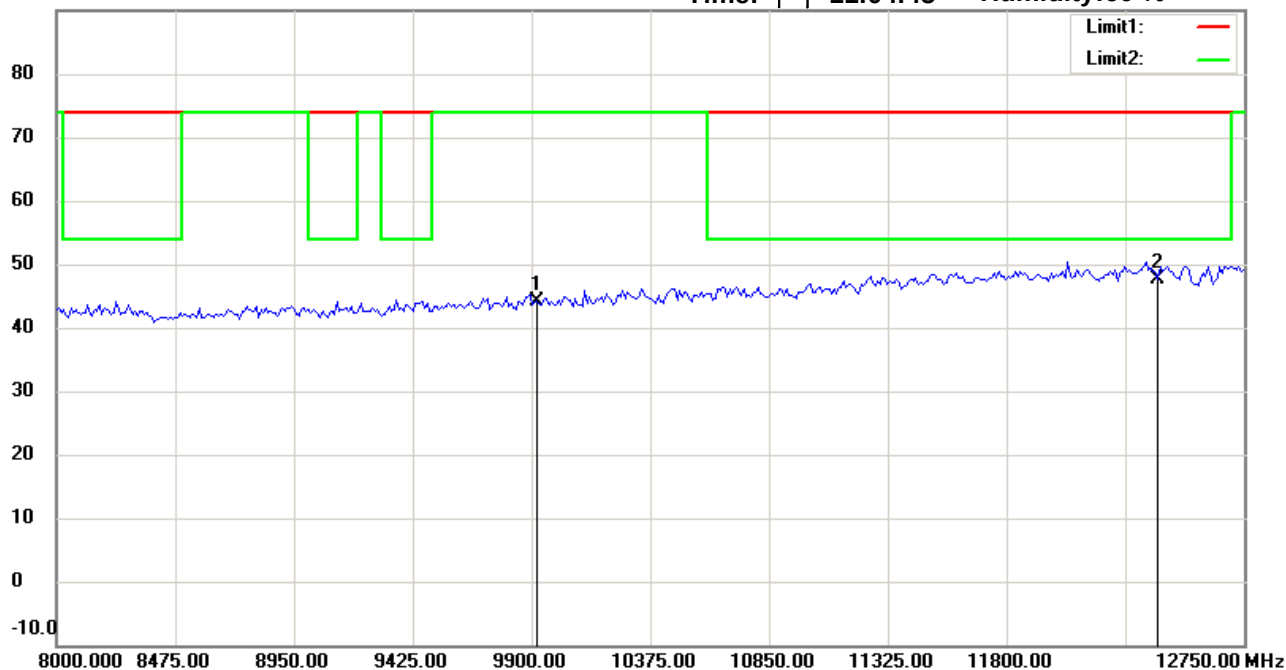

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.59	peak	8.43	44.02	74.00	100	205	-29.98	
*	12400.000	32.94	peak	14.81	47.75	74.00	100	300	-26.25	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:01:35

Humidity:60 %

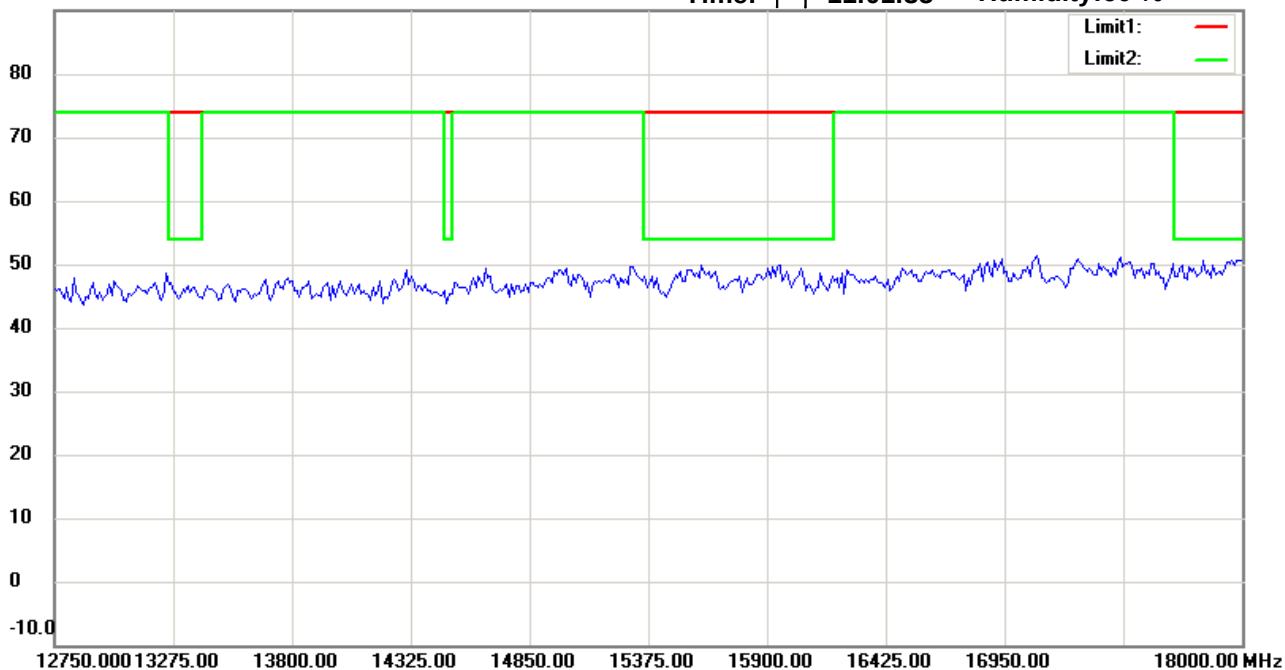

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#11


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:04:59

Humidity:60 %

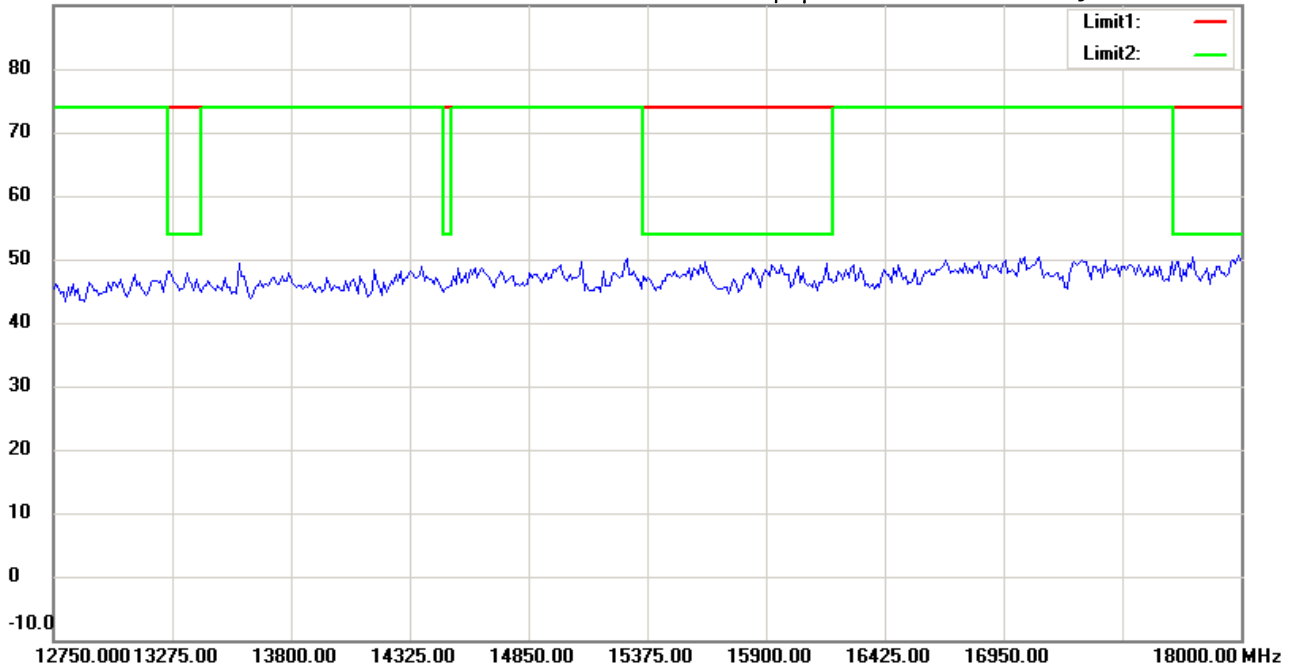

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:01:44

Humidity:60 %

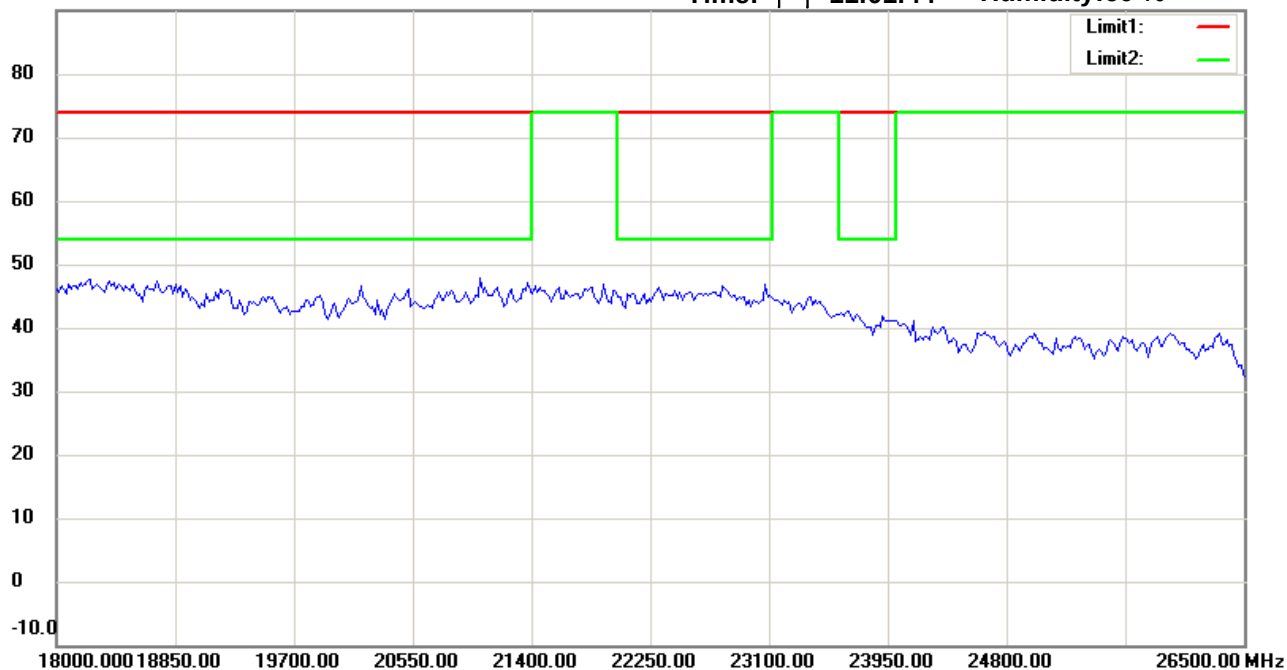

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

Polarization: Horizontal

EUT : W6M21507-15115

Power : 3 Vd.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#12


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:05:09

Humidity:60 %

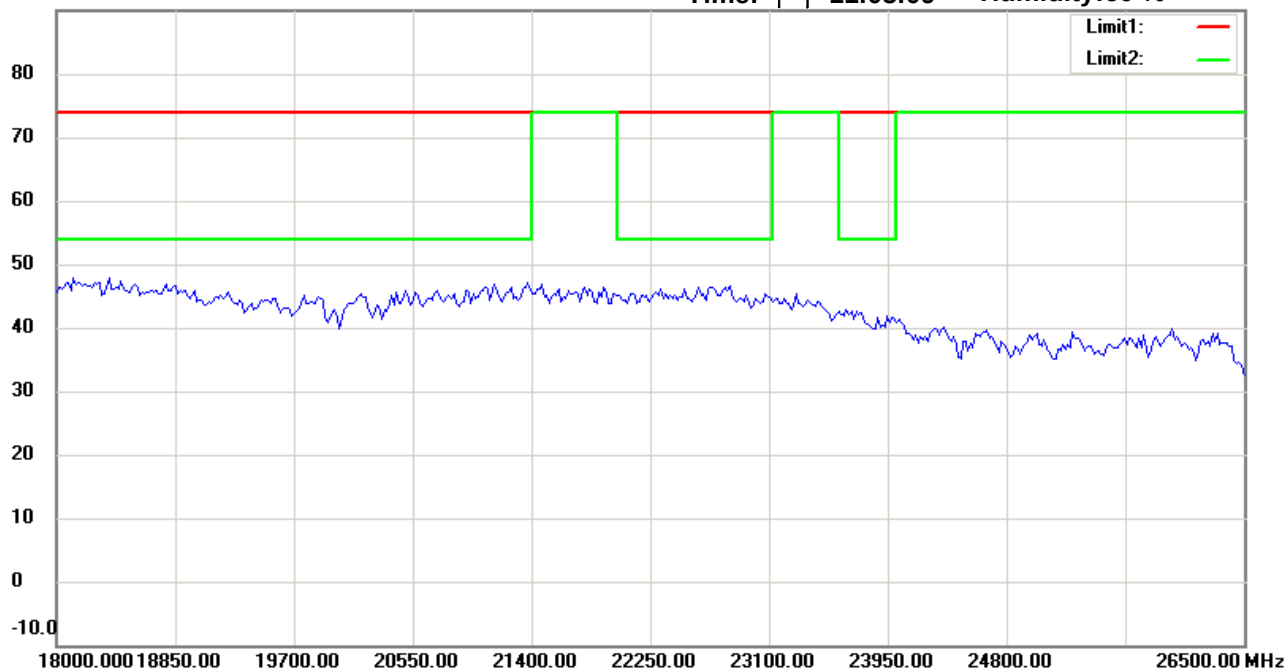

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2480MHz

Note :


Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Worldwide Testing Services(Taiwan) Co., Ltd.

TX_ANT+



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:15:22

Humidity:60 %

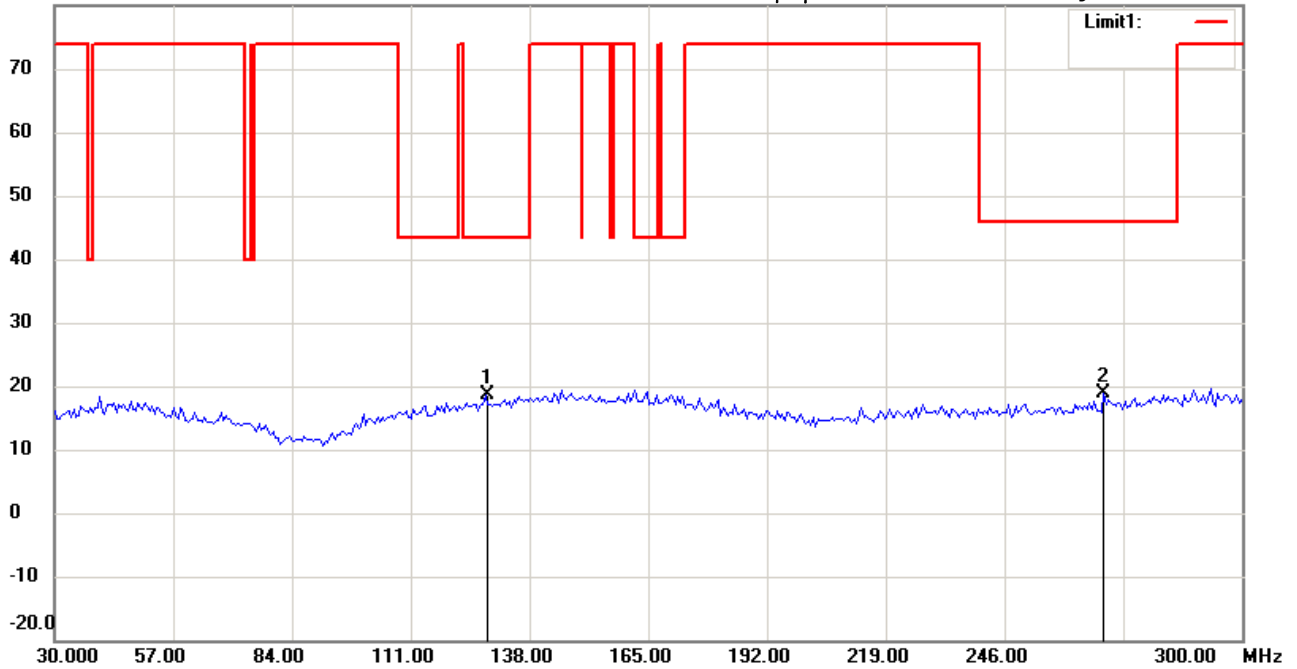

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: **Horizontal**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	127.9360	4.10	peak	14.62	18.72	43.50	100	90	-24.78	
	268.6172	3.98	peak	15.01	18.99	46.00	100	140	-27.01	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:16:08

Humidity:60 %

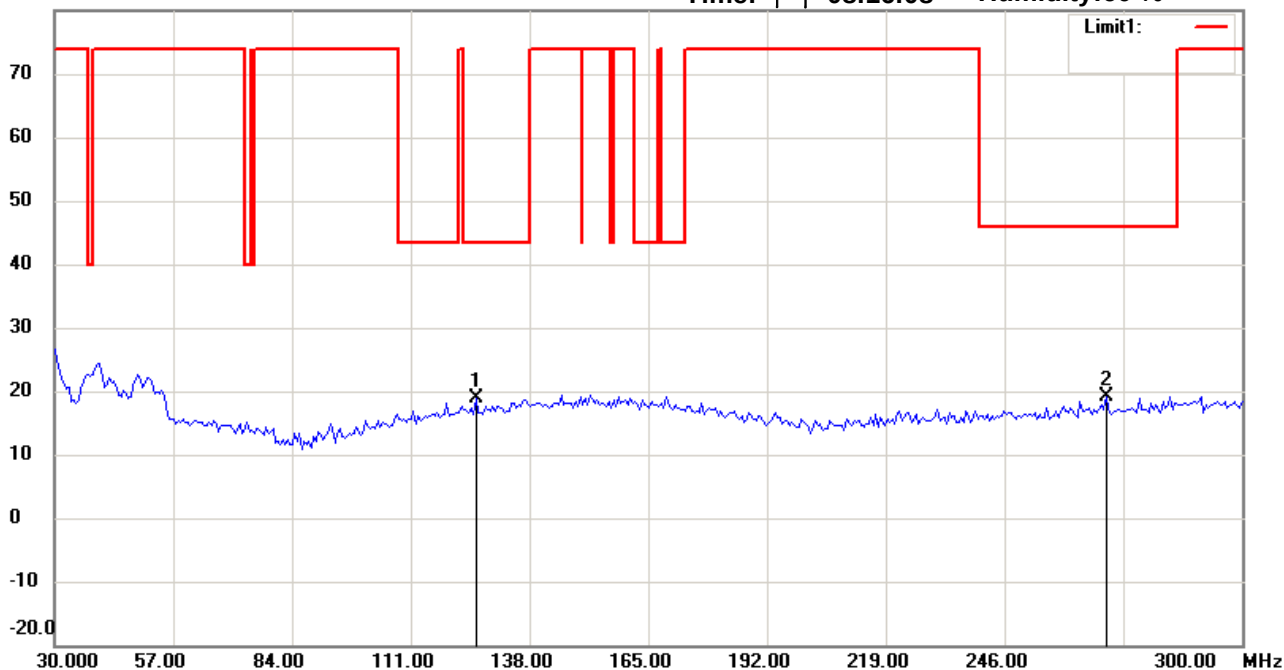

Site : Chamber

Condition : FCC Restriction Band 30-300

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	125.7715	4.49	peak	14.45	18.94	43.50	100	60	-24.56	
	269.1583	4.11	peak	15.03	19.14	46.00	100	155	-26.86	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :2

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:13:10

Humidity:60 %

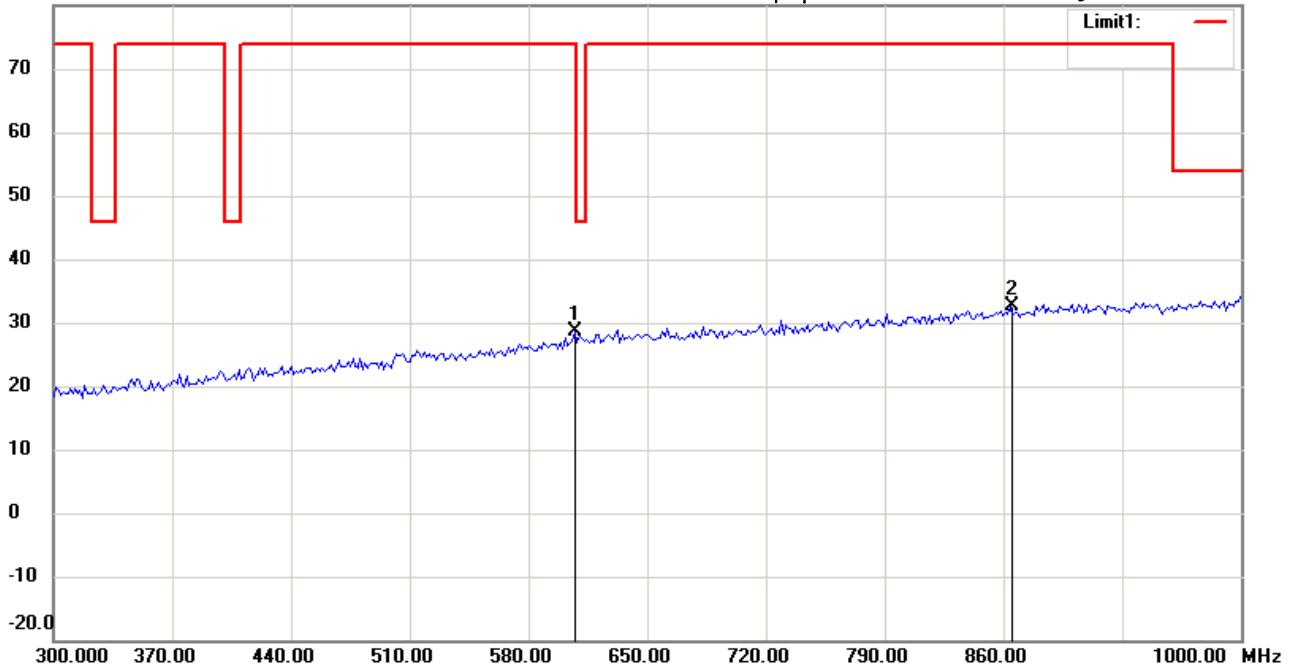

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	607.2143	5.12	peak	23.57	28.69	74.00	100	125	-45.31	
*	863.9280	4.74	peak	27.77	32.51	74.00	100	185	-41.49	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File : 2

Data : #2


Date: 2015/7/14

Temperature: 24 °C

80.0 dBuV/m

Time: 下午 08:13:55

Humidity: 60 %

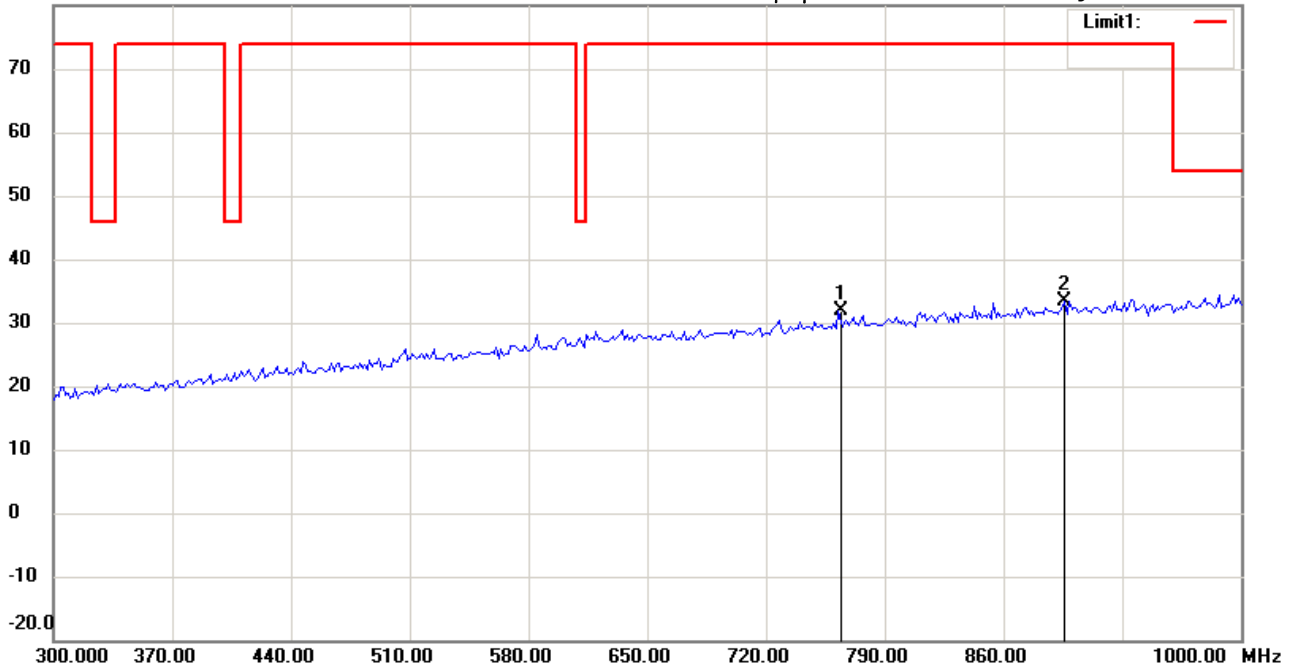

Site : Chamber

Condition : FCC Restriction Band 300-1000

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	762.9260	5.70	peak	26.10	31.80	74.00	100	310	-42.20	
*	896.1924	5.12	peak	28.32	33.44	74.00	100	260	-40.56	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#1


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:51:30

Humidity:60 %

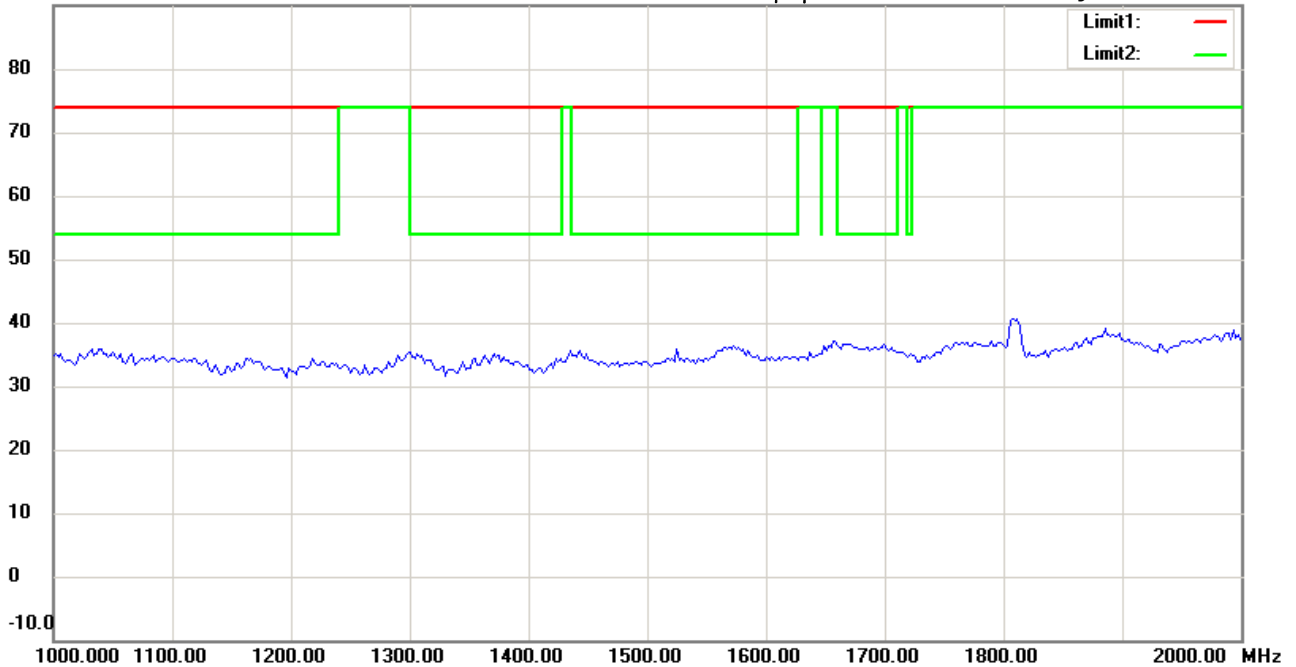

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#7


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:54:54

Humidity:60 %

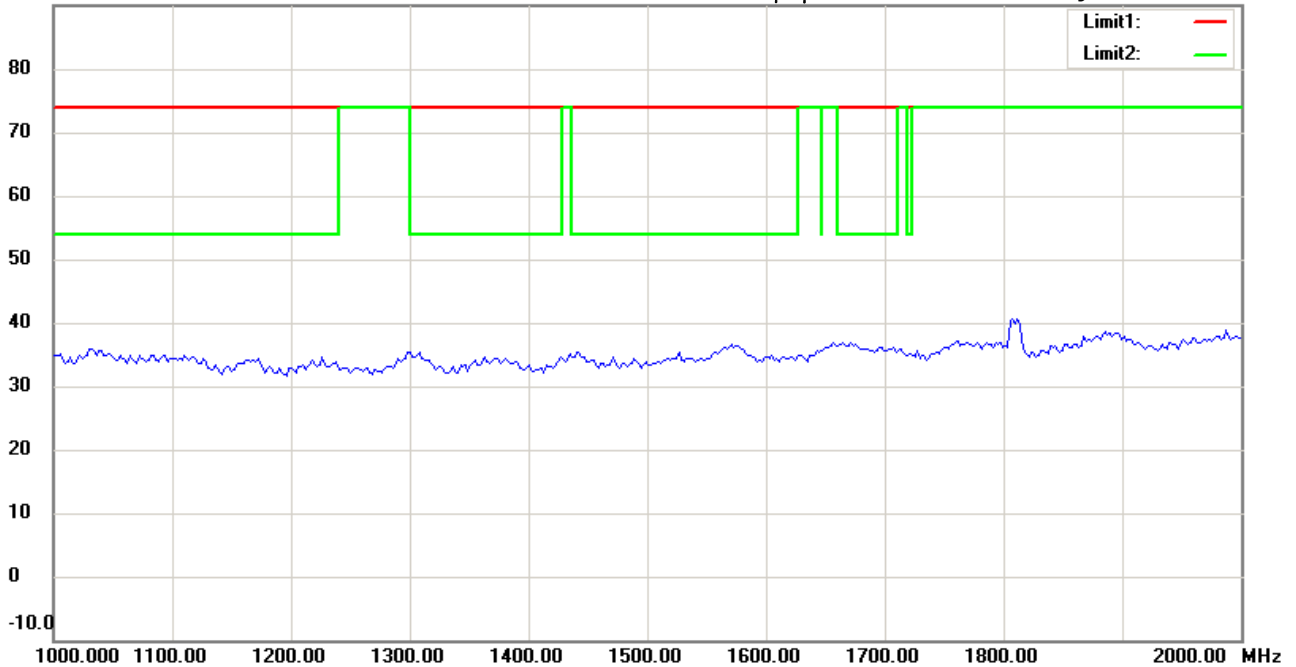

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Leon

File :3

Data :#2


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:52:15

Humidity:60 %

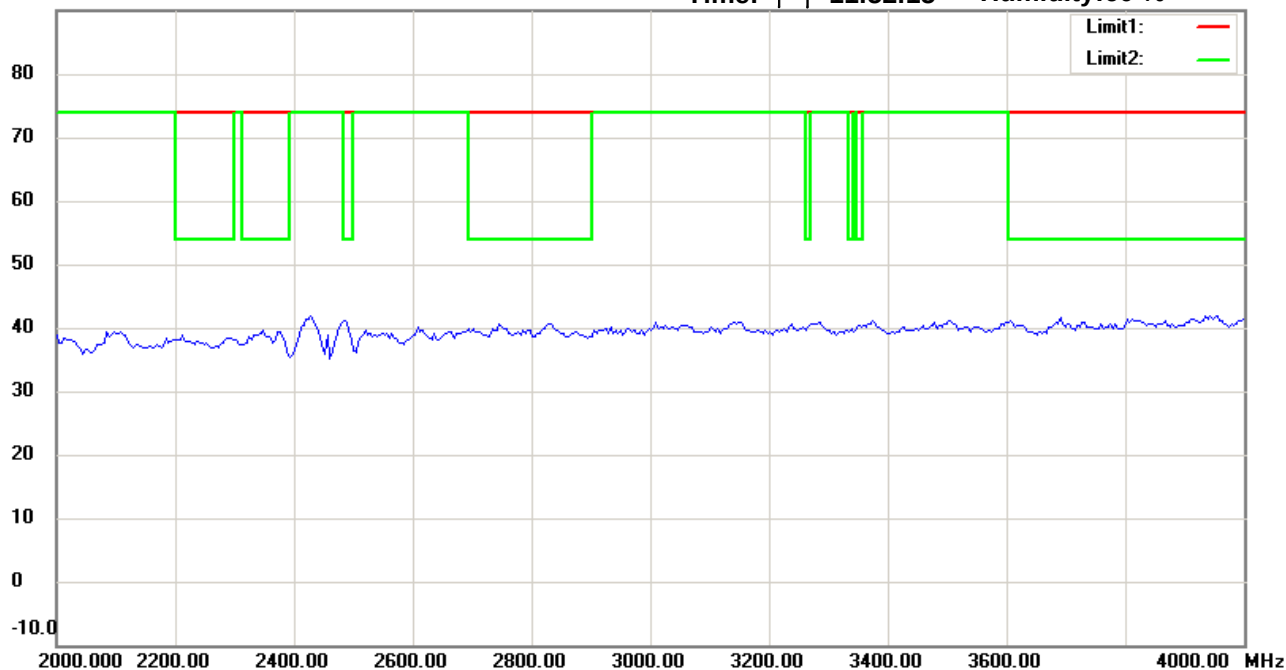

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Leon

File :3

Data :#8


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:55:39

Humidity:60 %

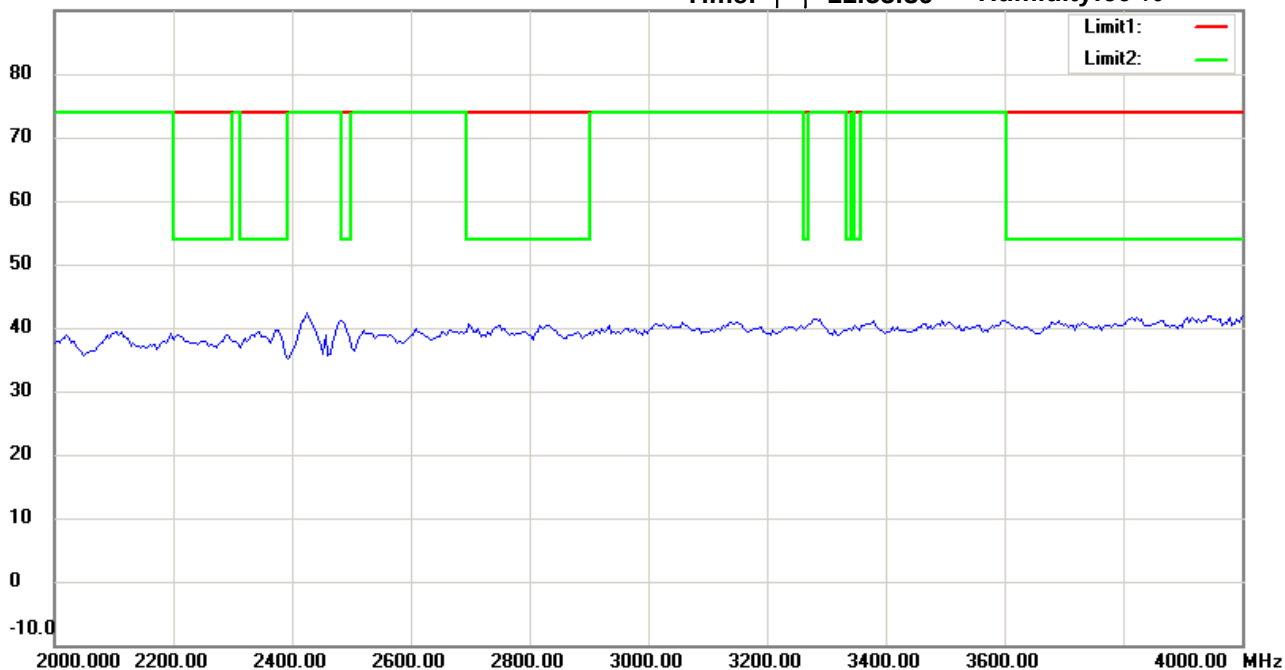

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#3


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:53:00

Humidity:60 %

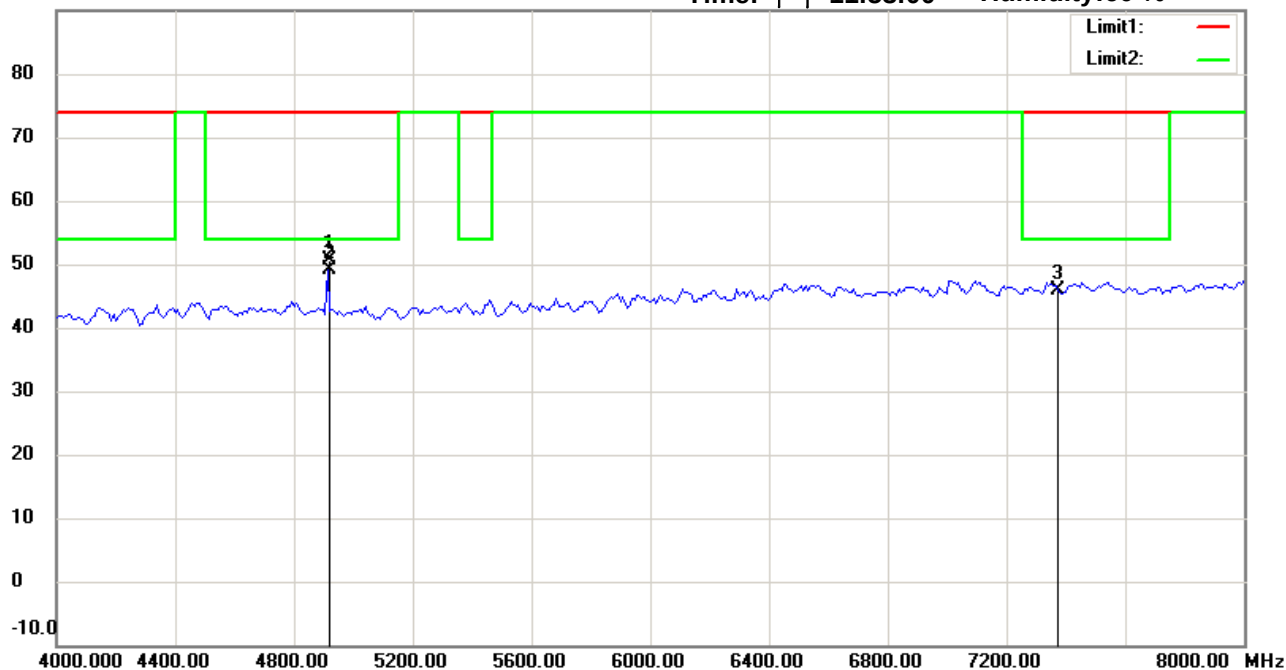

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4913.828	49.53	peak	1.22	50.75	74.00	100	155	-23.25	
*	4913.828	47.80	AVG	1.22	49.02	54.00	100	155	-4.98	
	7371.000	40.56	peak	5.35	45.91	74.00	100	90	-28.09	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#9


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:56:24

Humidity:60 %

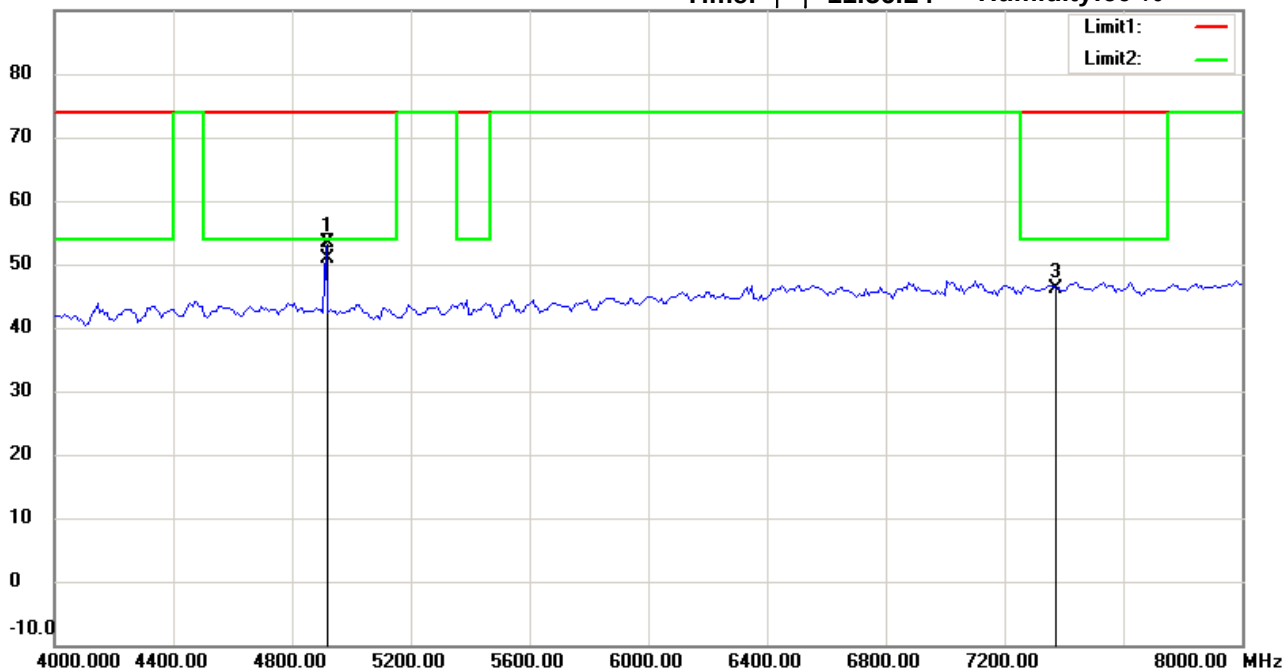

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4913.828	52.16	peak	1.22	53.38	74.00	100	95	-20.62	
*	4913.828	49.73	AVG	1.22	50.95	54.00	100	95	-3.05	
	7371.000	40.75	peak	5.35	46.10	74.00	100	125	-27.90	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#4


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:53:45

Humidity:60 %

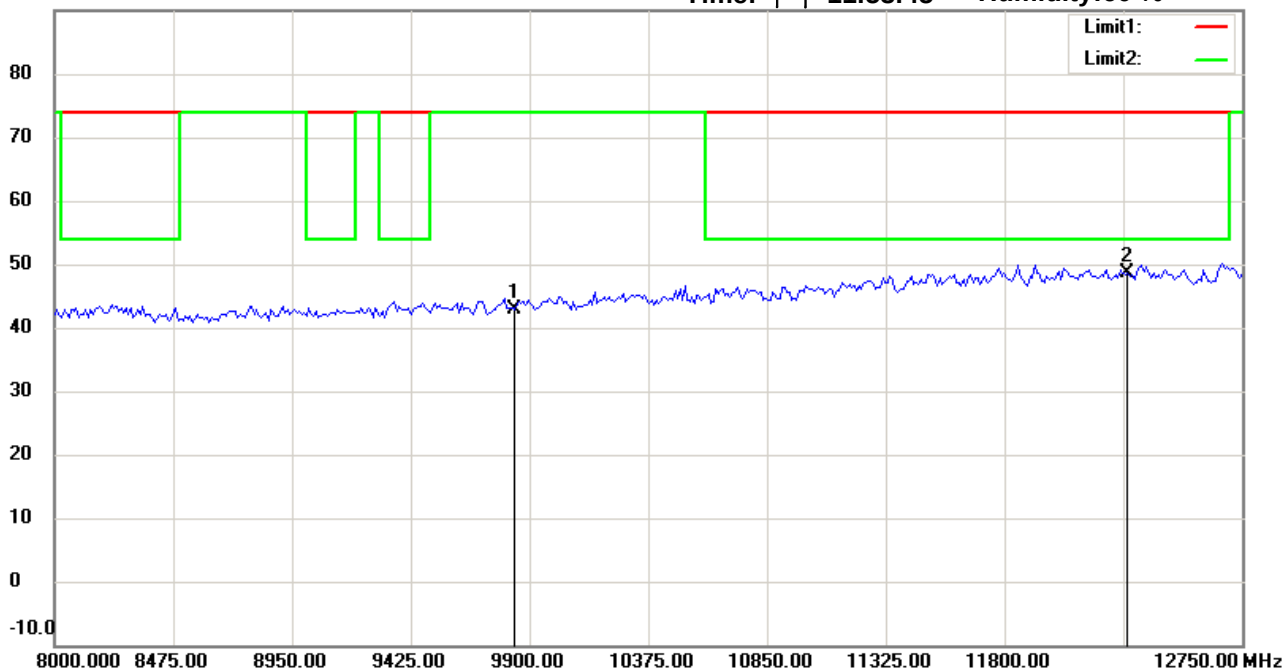

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9828.000	34.59	peak	8.28	42.87	74.00	100	50	-31.13	
*	12285.000	34.29	peak	14.22	48.51	74.00	100	130	-25.49	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#10


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:57:09

Humidity:60 %

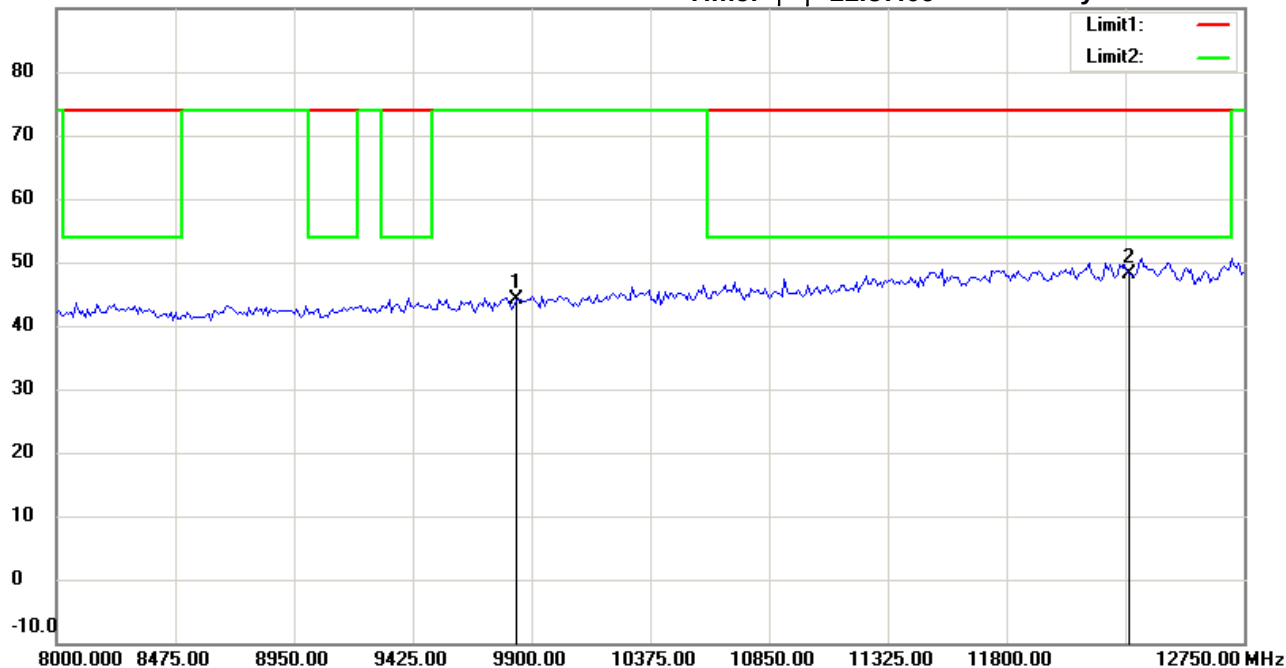

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9828.000	35.73	peak	8.28	44.01	74.00	100	45	-29.99	
*	12285.000	33.79	peak	14.22	48.01	74.00	100	20	-25.99	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#5


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:53:59

Humidity:60 %

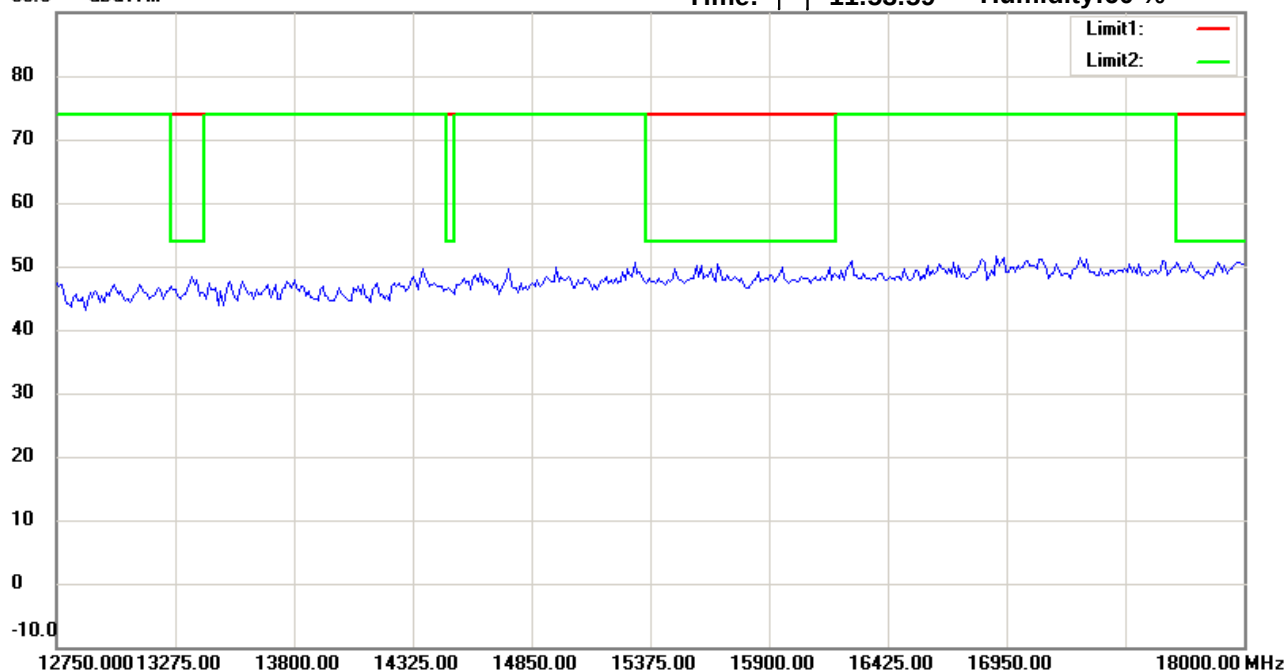

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#11


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:57:23

Humidity:60 %

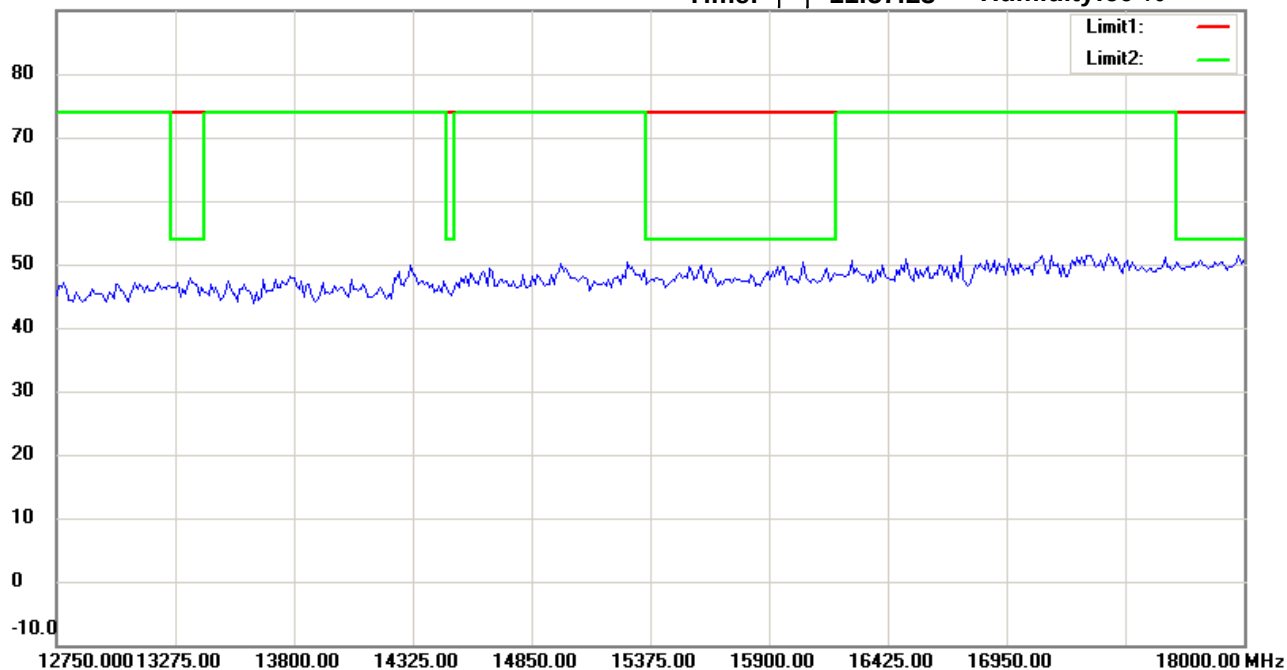

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#6


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:54:08

Humidity:60 %

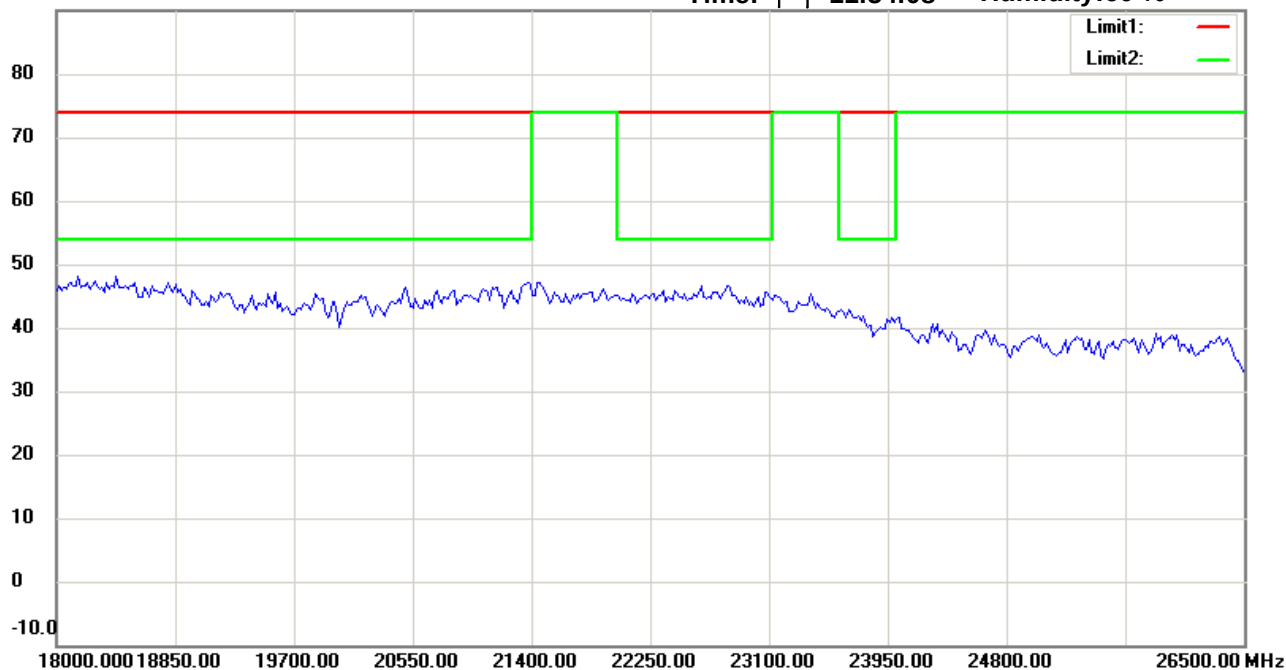

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Leon

File :3

Data :#12


Date: 2015/8/5

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:57:32

Humidity:60 %

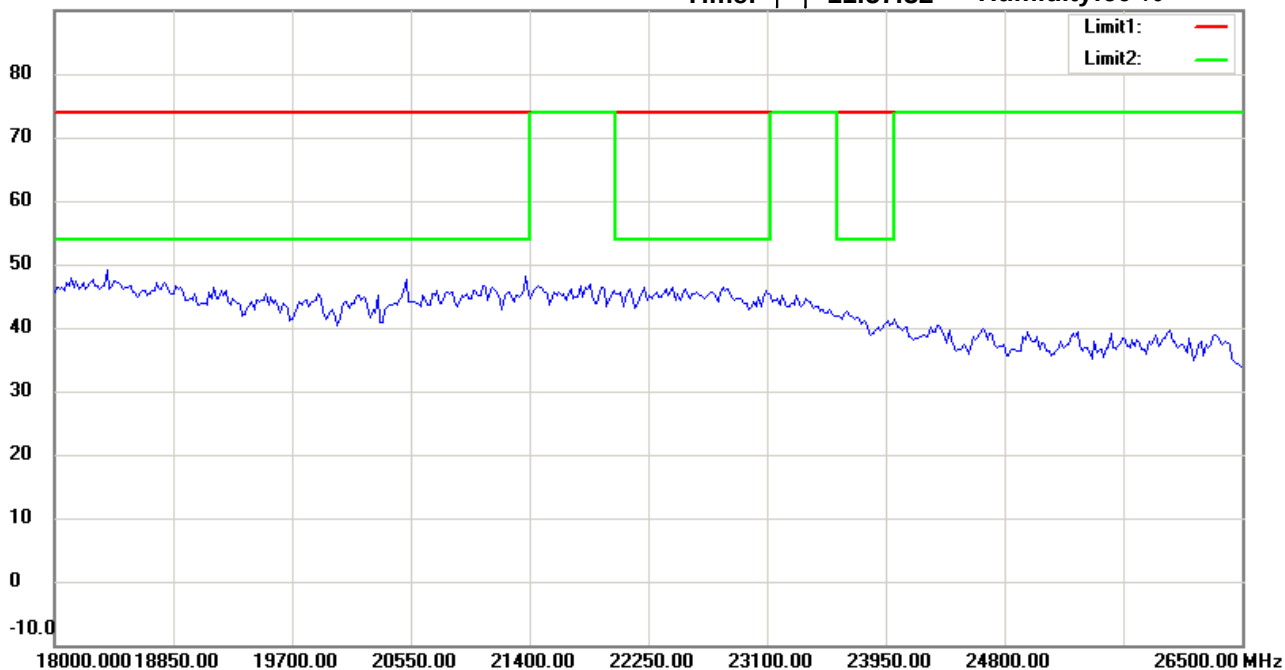

Site : Chamber

Condition : FCC Restriction Band_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : TX 2457MHz

Note :


Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Worldwide Testing Services(Taiwan) Co., Ltd.

RX_Bluetooth



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:50:57

Humidity:60 %

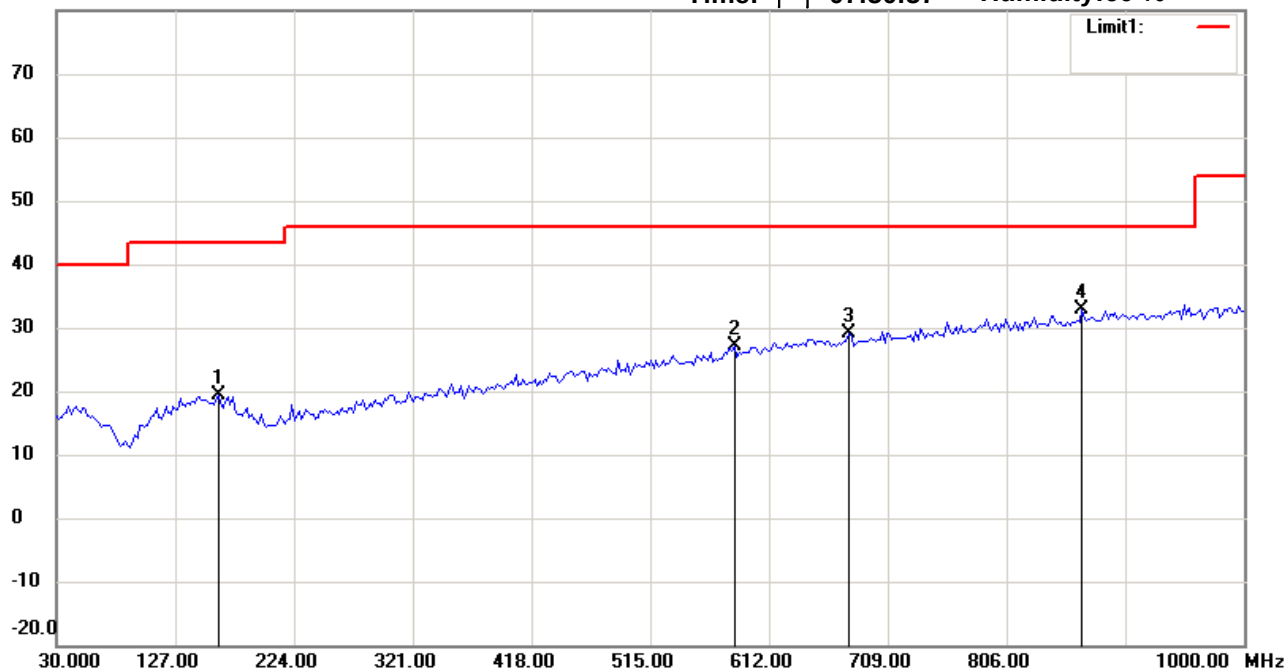

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	162.1844	4.05	peak	15.40	19.45	43.50	100	250	-24.05	
	584.0080	4.23	peak	22.84	27.07	46.00	100	55	-18.93	
	677.3146	4.12	peak	24.92	29.04	46.00	100	130	-16.96	
*	867.8156	5.05	peak	27.84	32.89	46.00	100	185	-13.11	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:51:42

Humidity:60 %

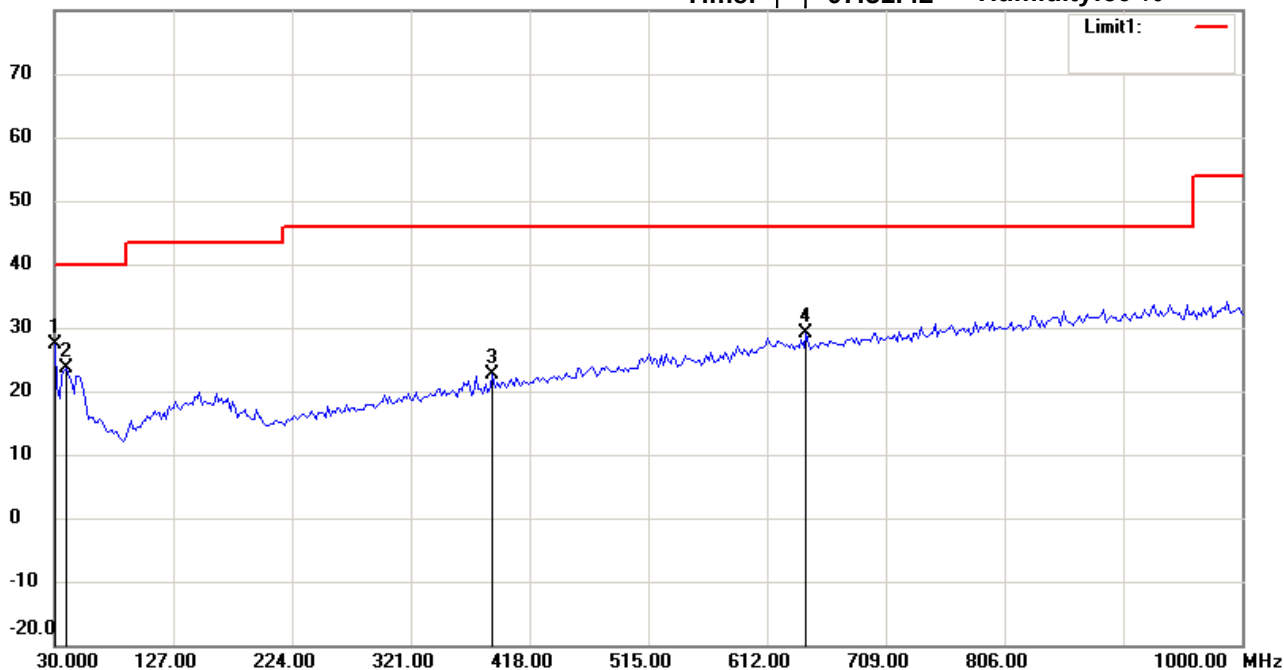

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	30.0000	13.63	peak	13.74	27.37	40.00	100	140	-12.63	
	39.7194	9.03	peak	14.56	23.59	40.00	100	45	-16.41	
	387.6754	4.28	peak	18.39	22.67	46.00	100	95	-23.33	
	644.2685	4.82	peak	24.43	29.25	46.00	100	230	-16.75	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:23:24

Humidity:60 %

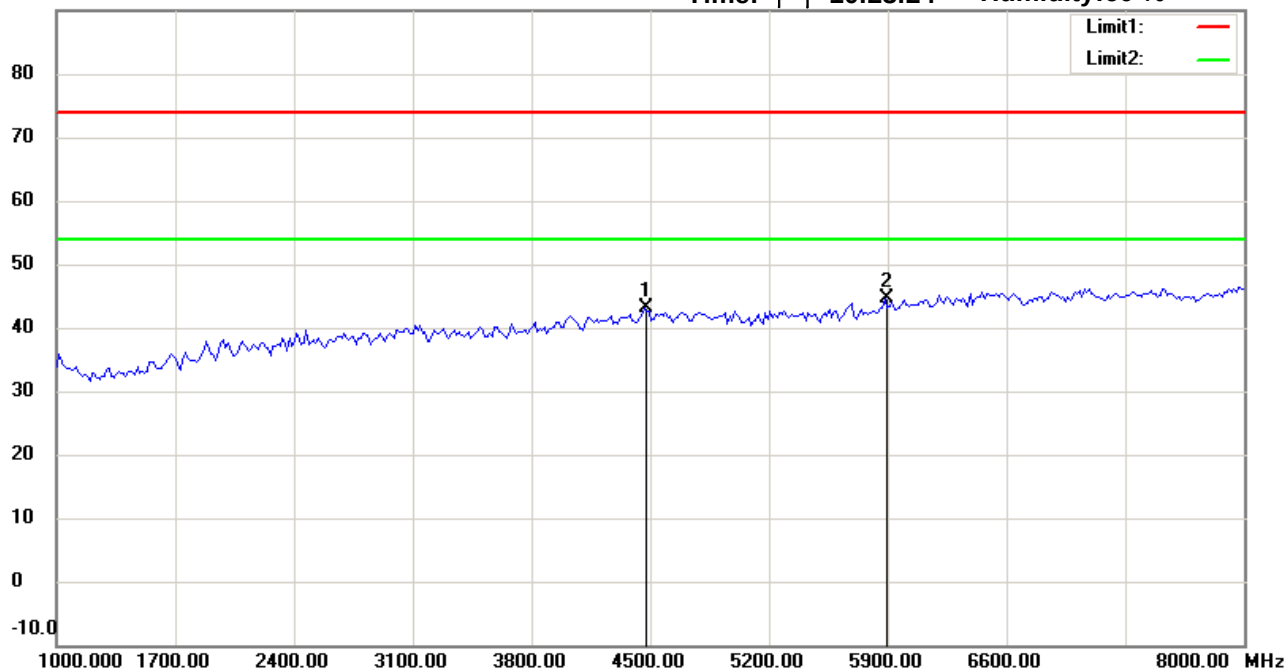

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4464.930	42.26	peak	0.75	43.01	74.00	100	40	-30.99	
*	5881.764	41.23	peak	3.35	44.58	74.00	100	115	-29.42	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:24:18

Humidity:60 %

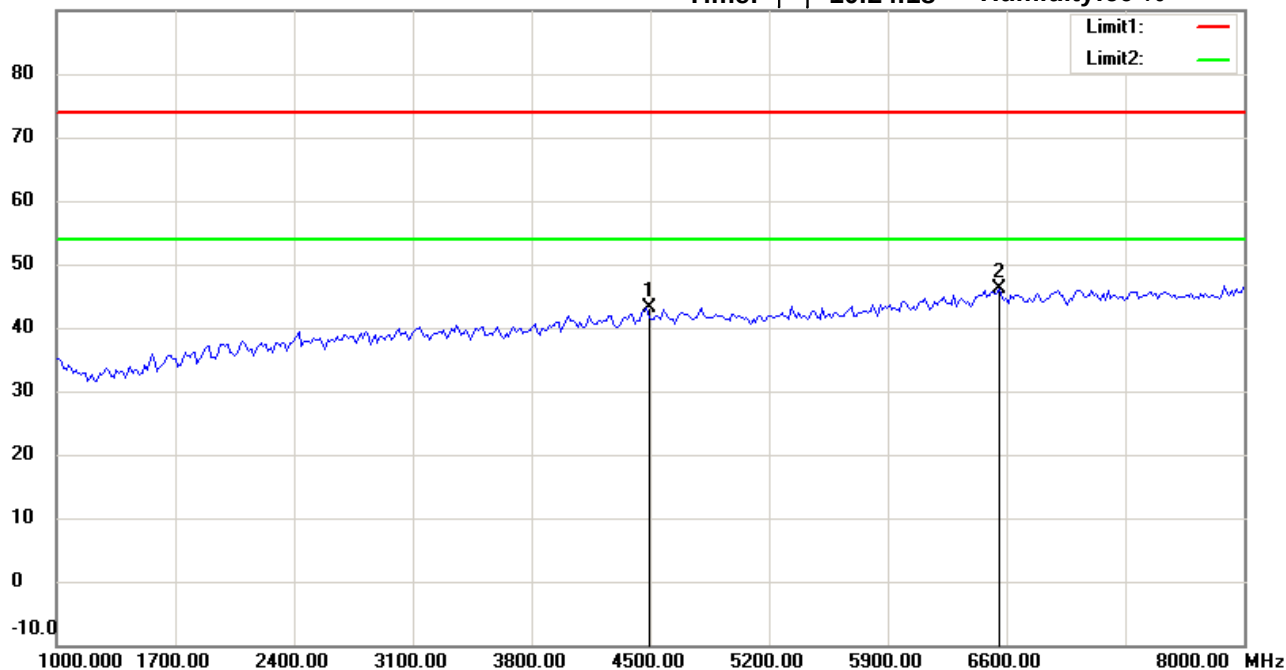

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4478.958	42.14	peak	0.92	43.06	74.00	100	135	-30.94	
*	6555.110	40.13	peak	5.88	46.01	74.00	100	80	-27.99	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:23:36

Humidity:60 %

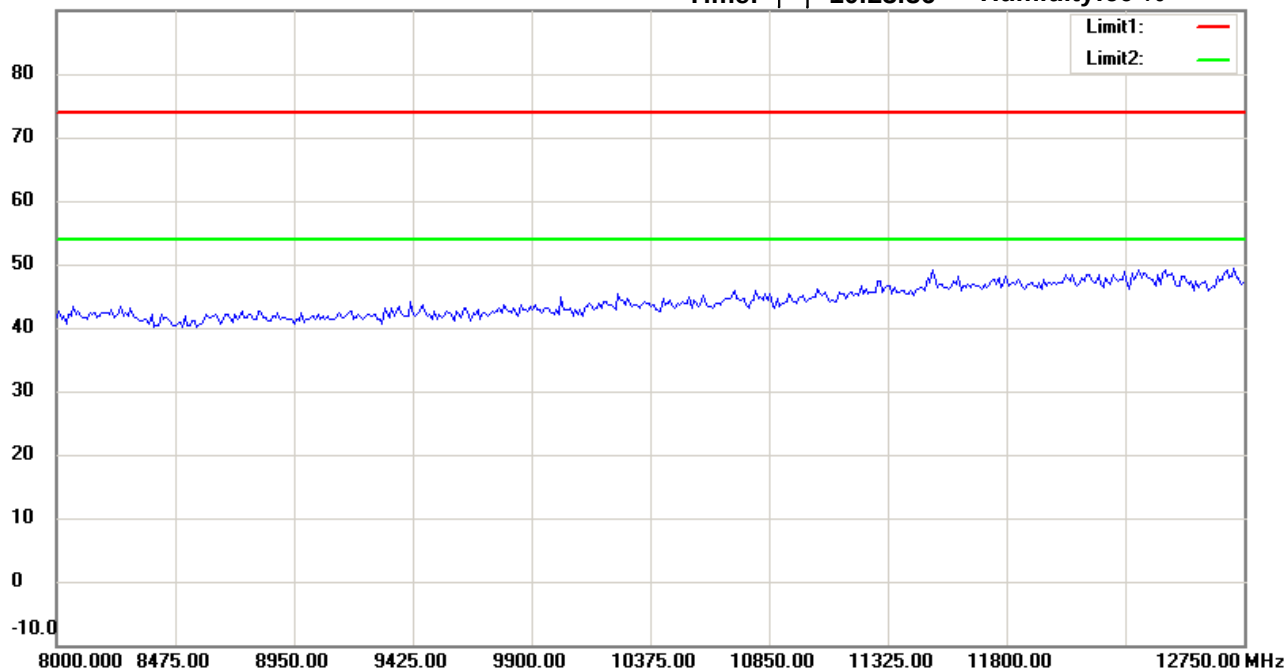

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:24:30

Humidity:60 %

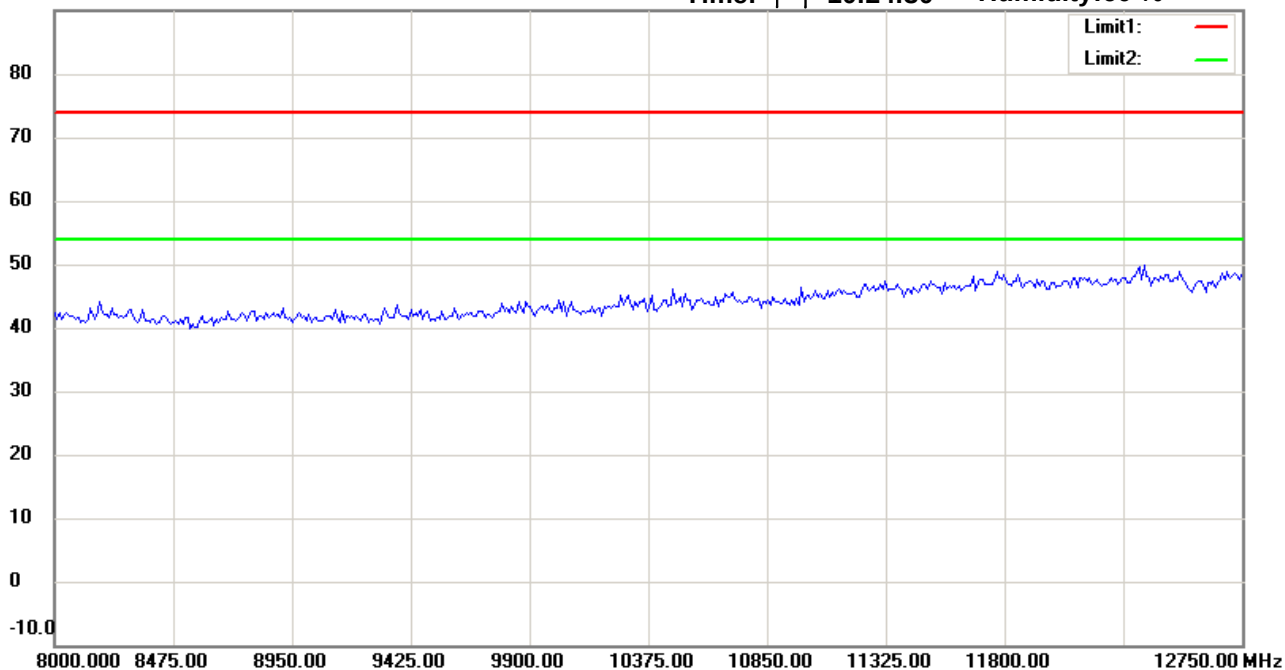

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:24:00

Humidity:60 %

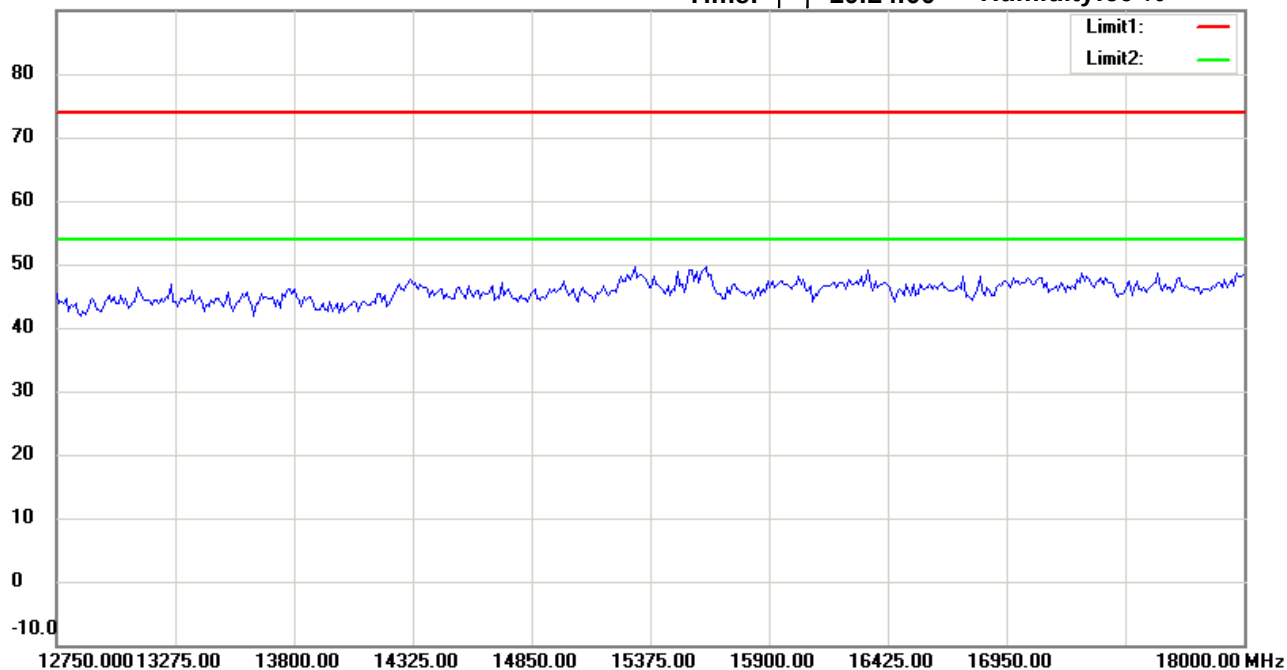

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:24:54

Humidity:60 %

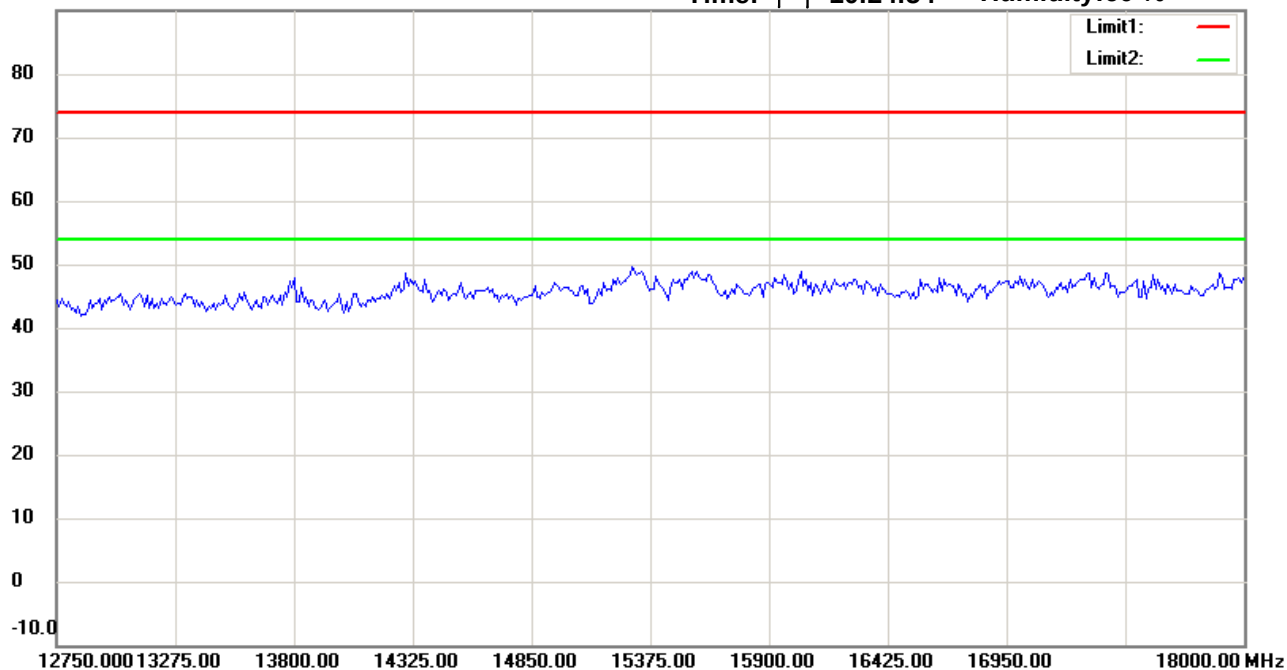

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:24:10

Humidity:60 %

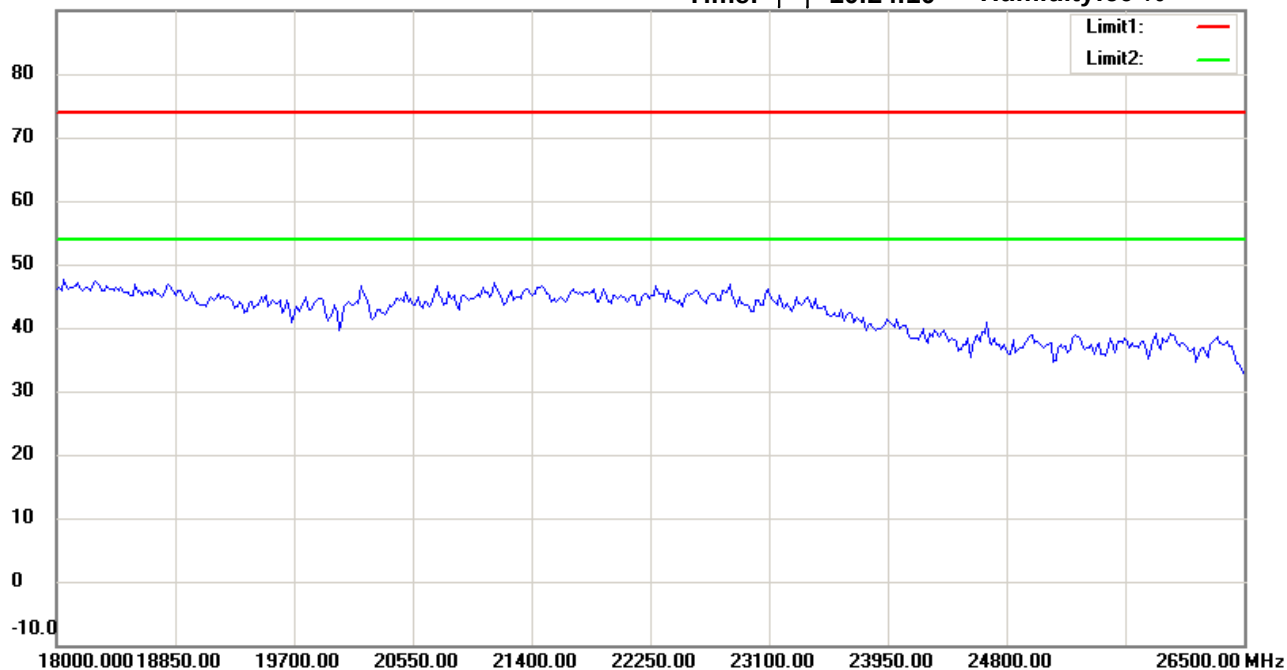

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:25:03

Humidity:60 %

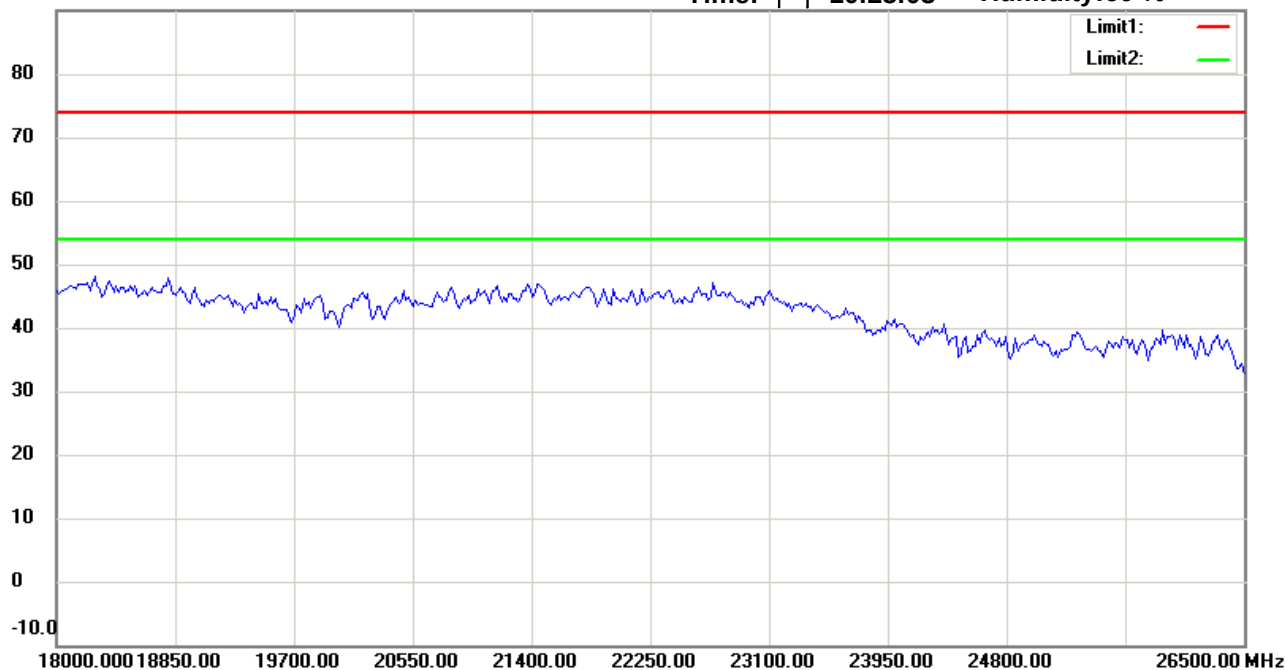

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2402MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:53:16

Humidity:60 %

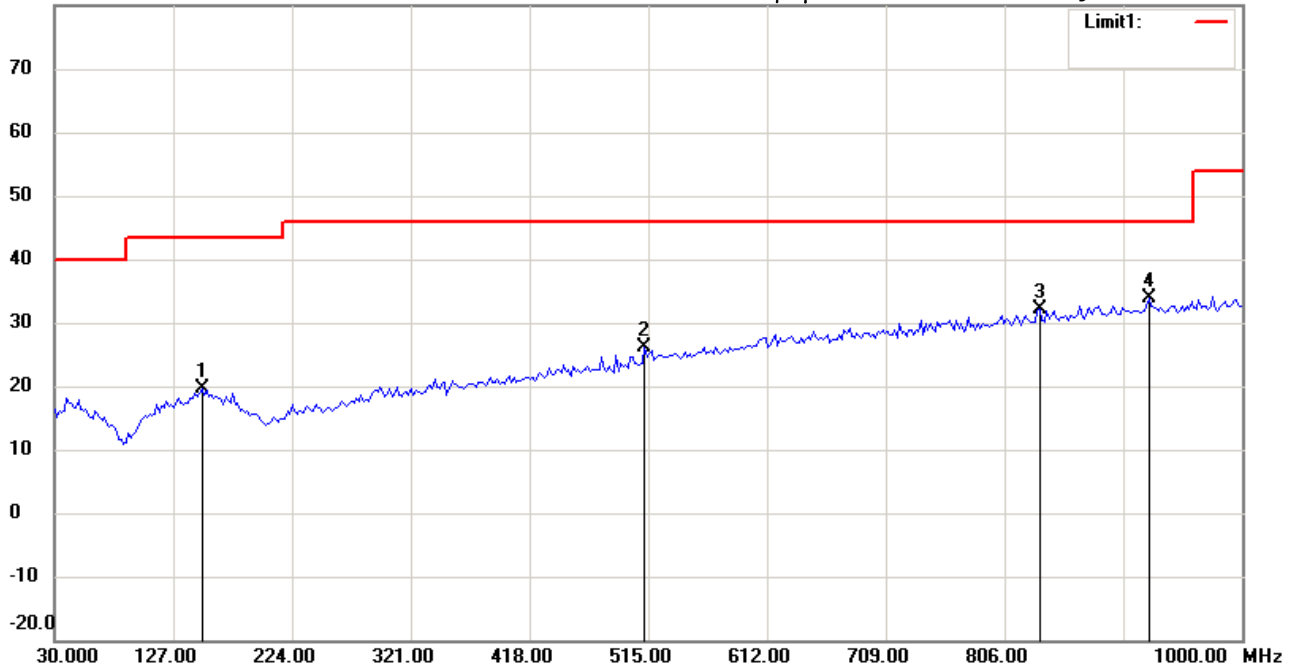

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	150.5210	4.24	peak	15.50	19.74	43.50	100	220	-23.76	
	512.0842	4.99	peak	21.08	26.07	46.00	100	30	-19.93	
	834.7693	4.98	peak	27.25	32.23	46.00	100	105	-13.77	
*	924.1884	5.41	peak	28.39	33.80	46.00	100	185	-12.20	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:54:01

Humidity:60 %

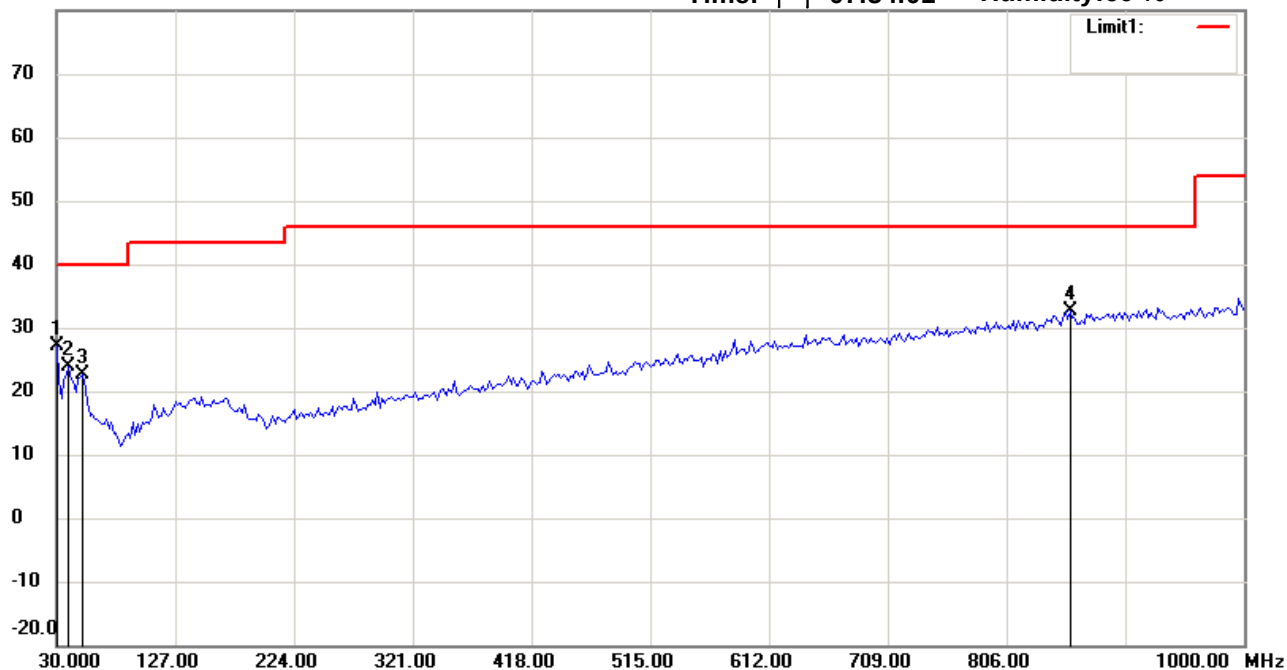

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	30.0000	13.27	peak	13.74	27.01	40.00	100	170	-12.99	
	39.7194	9.29	peak	14.56	23.85	40.00	100	120	-16.15	
	51.3828	8.27	peak	14.41	22.68	40.00	100	65	-17.32	
	858.0962	5.04	peak	27.68	32.72	46.00	100	275	-13.28	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:25:42

Humidity:60 %

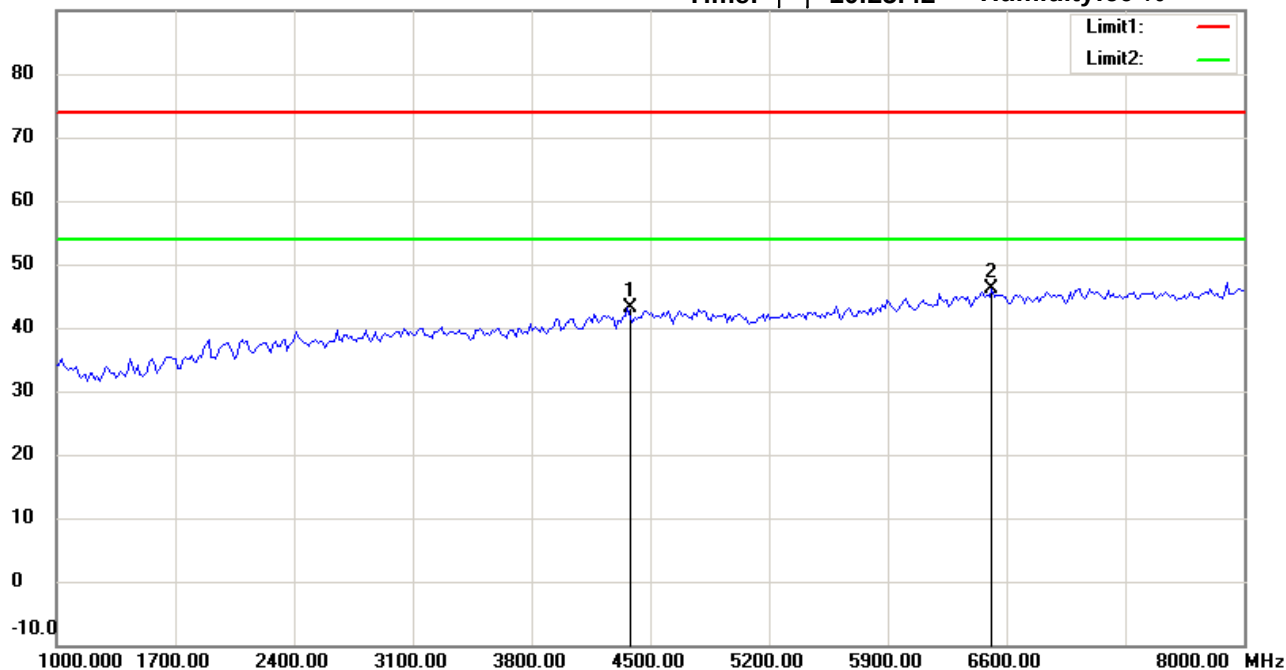

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4366.734	43.02	peak	0.10	43.12	74.00	100	150	-30.88	
*	6513.026	40.22	peak	5.93	46.15	74.00	100	280	-27.85	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:26:35

Humidity:60 %

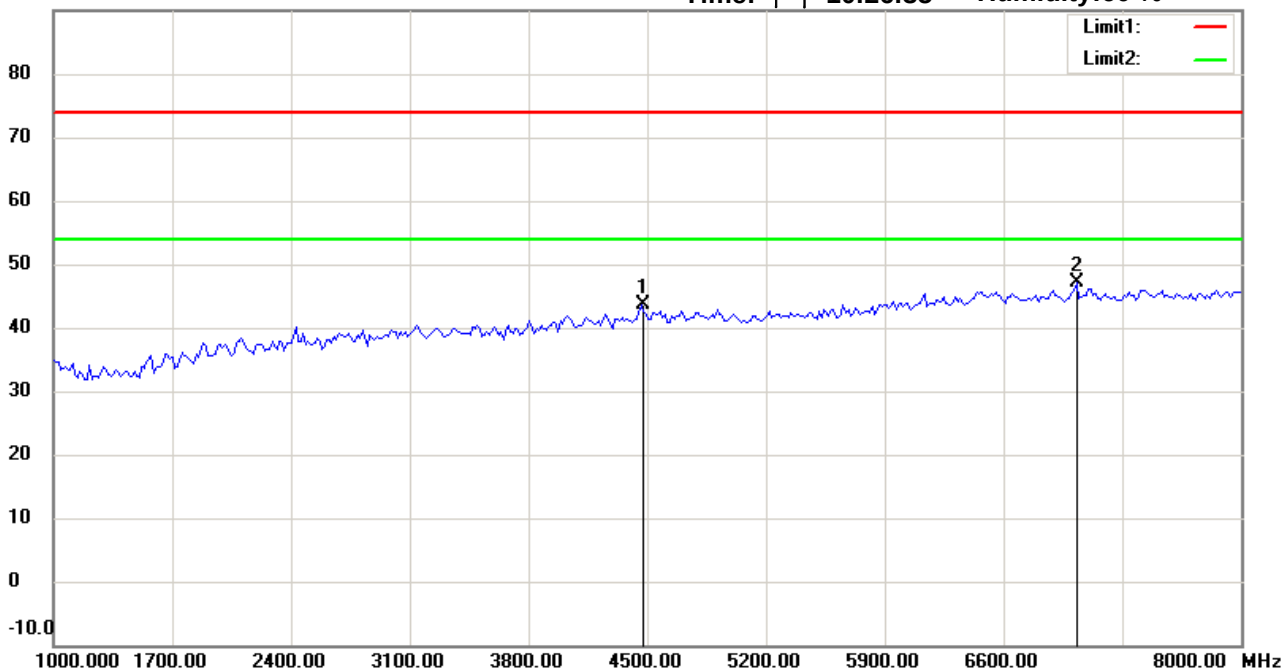

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4464.930	42.93	peak	0.75	43.68	74.00	100	30	-30.32	
*	7032.064	41.60	peak	5.42	47.02	74.00	100	100	-26.98	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:25:53

Humidity:60 %

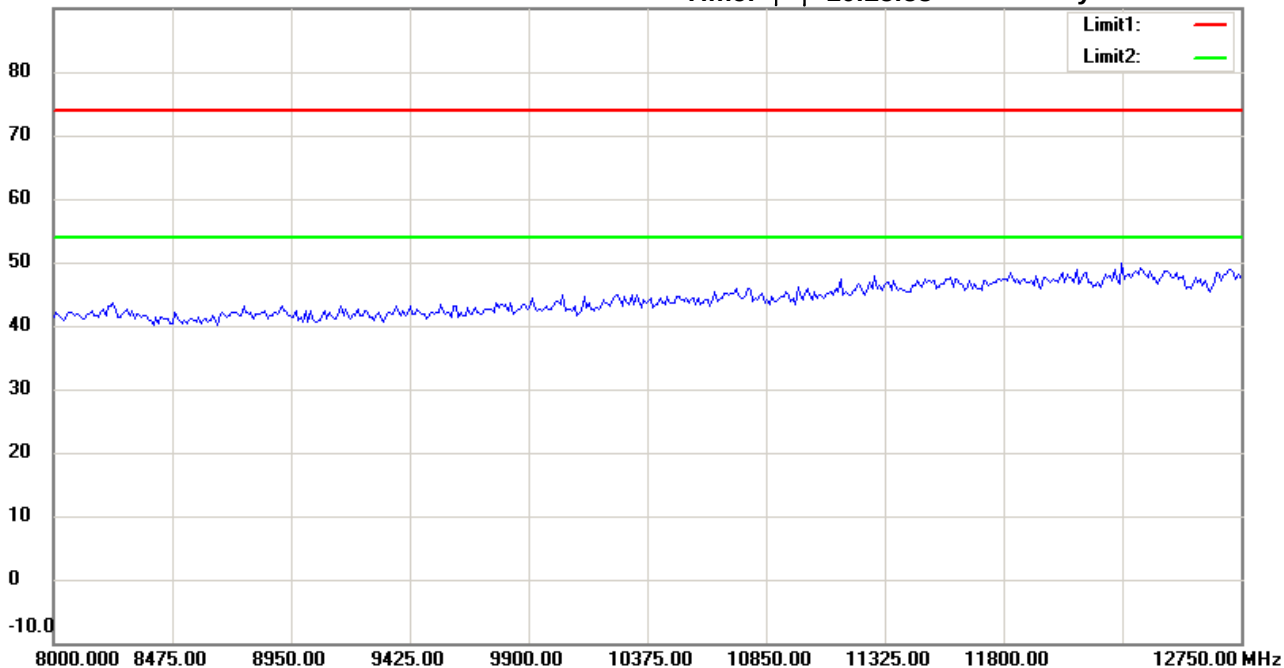

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:26:47

Humidity:60 %

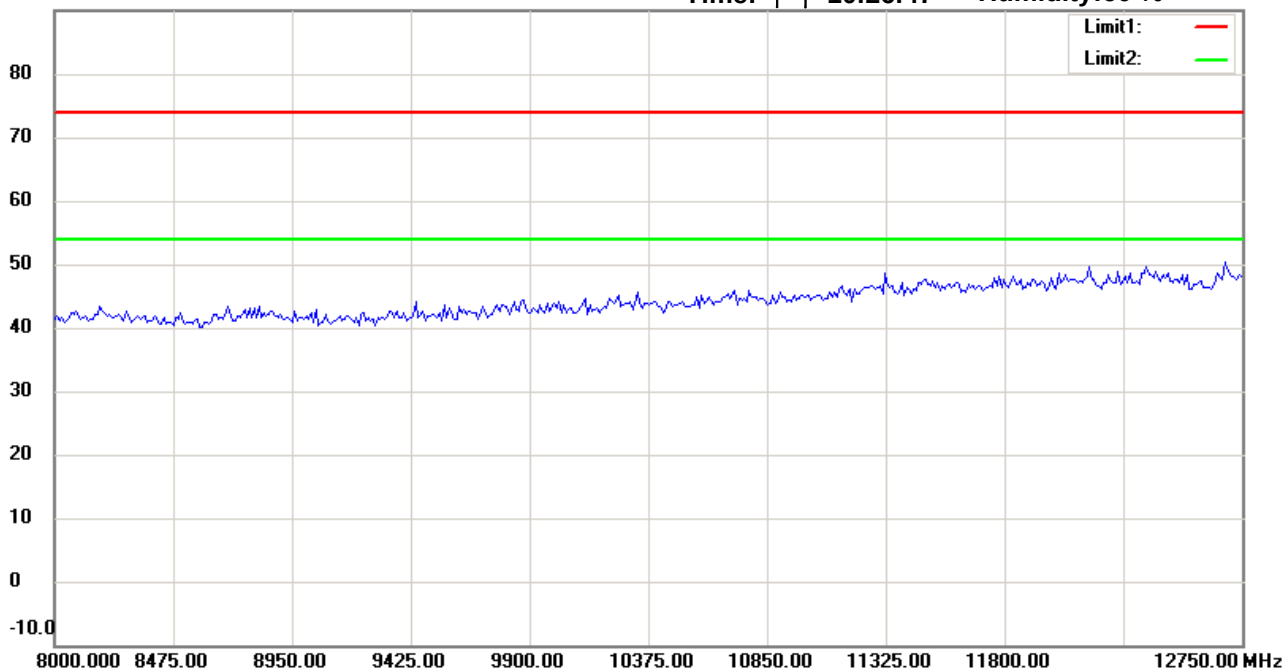

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:26:18

Humidity:60 %

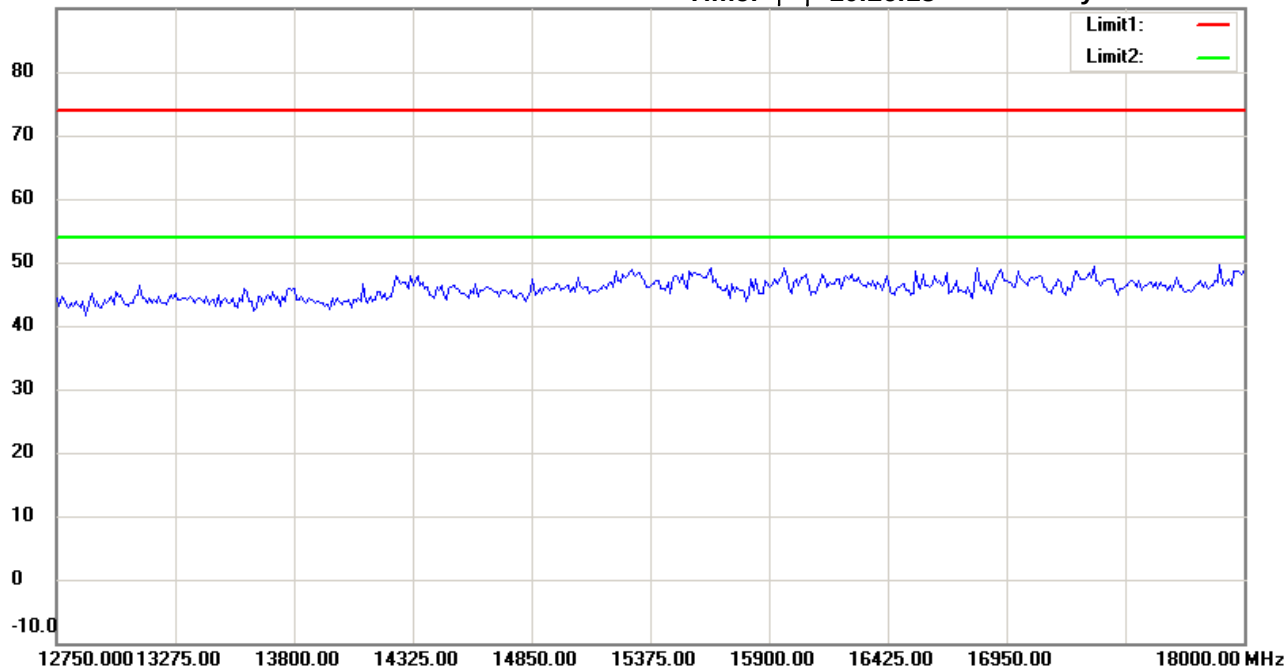

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:27:11

Humidity:60 %

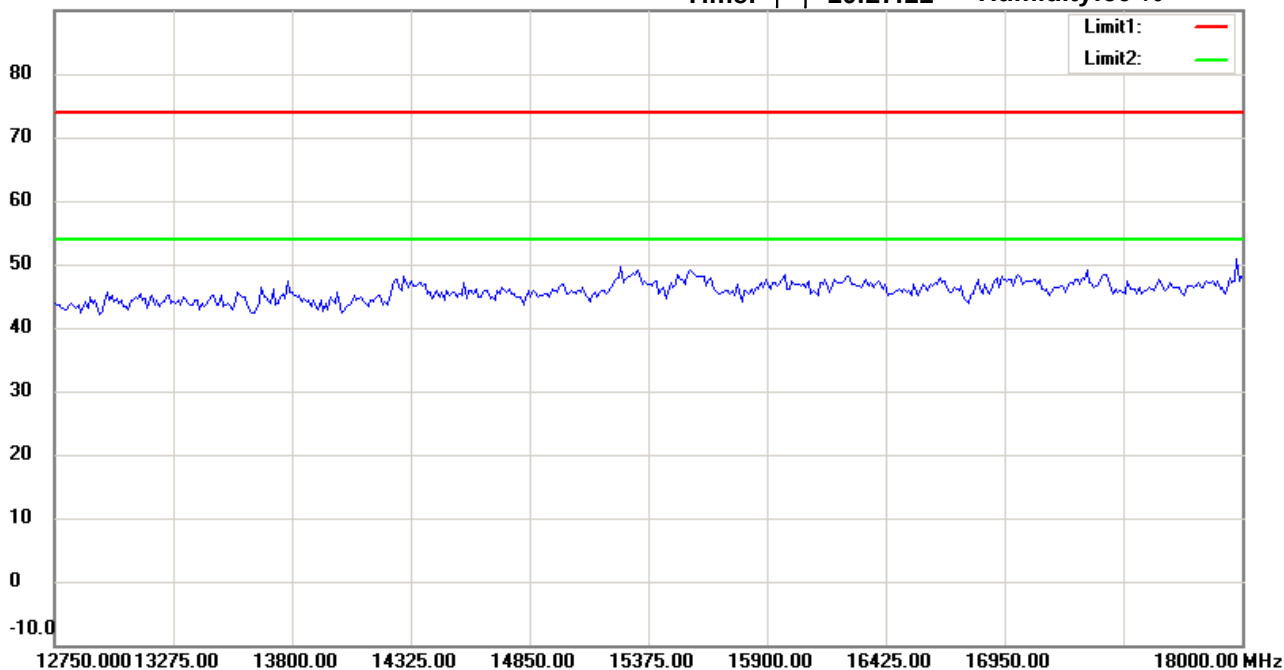

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:26:28

Humidity:60 %

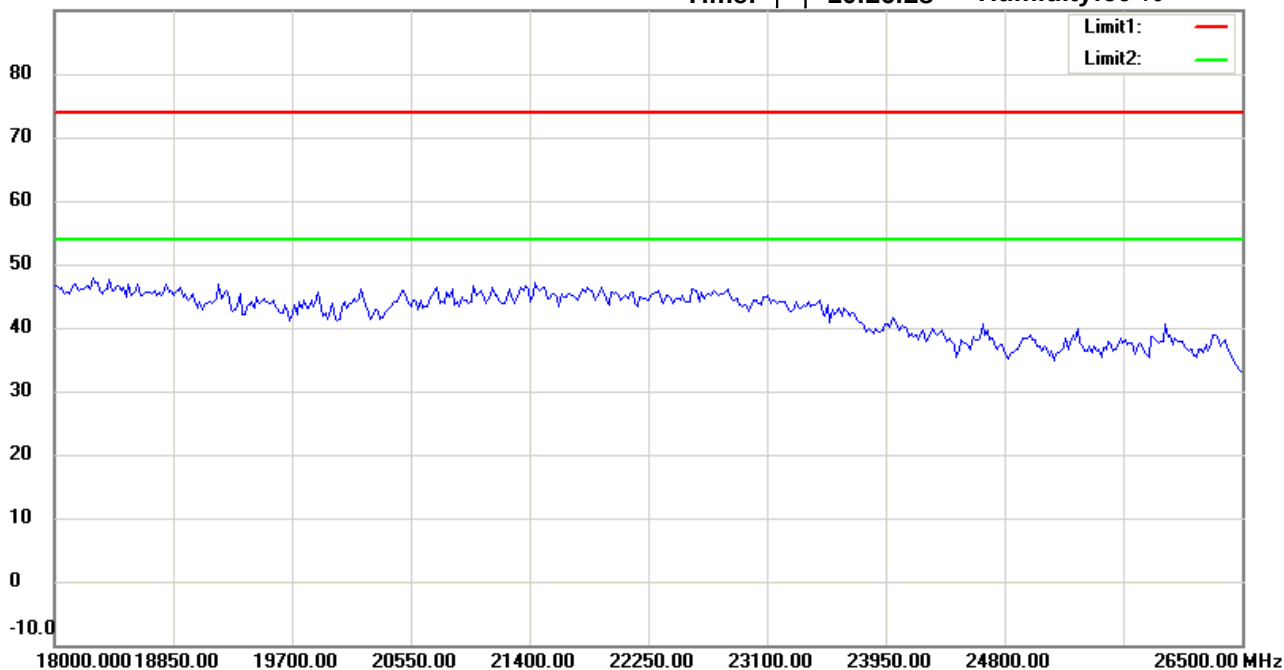

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:27:21

Humidity:60 %

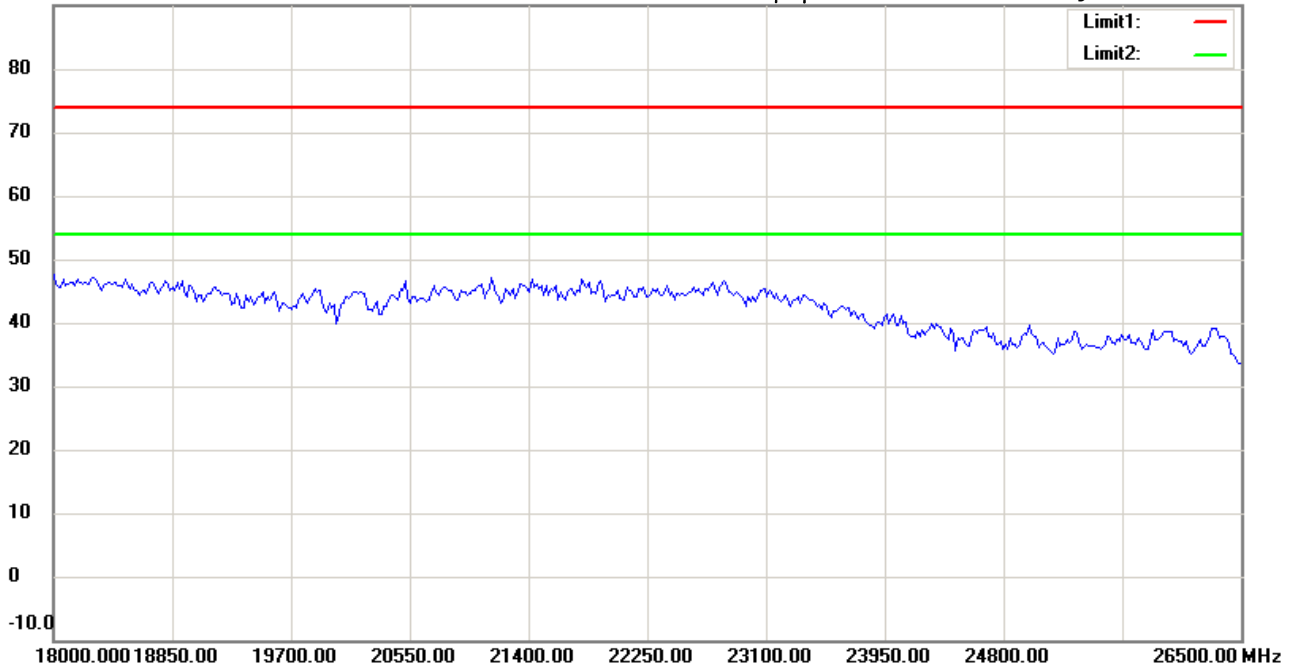

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2440MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1

Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:56:05

Humidity:60 %



Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	4.50	peak	17.27	21.77	46.00	100	325	-24.23	
	618.9980	4.45	peak	23.84	28.29	46.00	100	80	-17.71	
	834.7693	4.90	peak	27.25	32.15	46.00	100	215	-13.85	
*	957.2345	5.27	peak	28.49	33.76	46.00	100	260	-12.24	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:56:50

Humidity:60 %

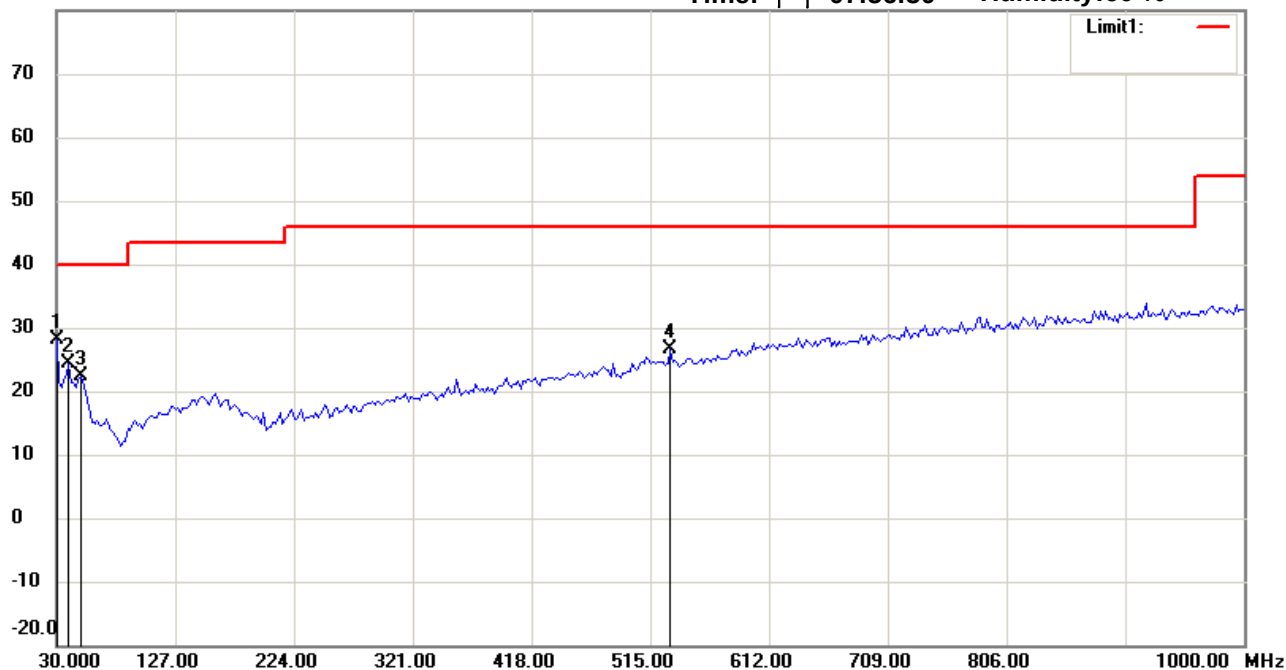

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	30.0000	14.35	peak	13.74	28.09	40.00	100	115	-11.91	
	39.7194	9.81	peak	14.56	24.37	40.00	100	250	-15.63	
	49.4388	7.63	peak	14.65	22.28	40.00	100	160	-17.72	
	531.5230	4.98	peak	21.54	26.52	46.00	100	335	-19.48	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:28:07

Humidity:60 %

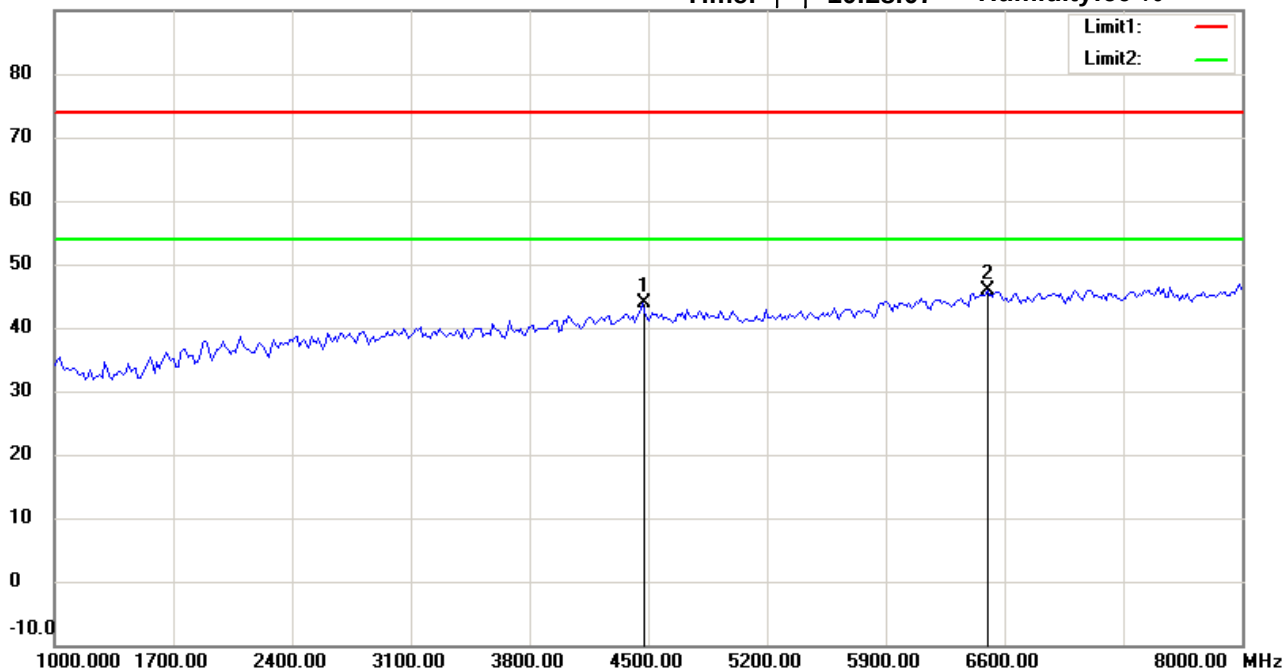

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4464.930	43.16	peak	0.75	43.91	74.00	100	225	-30.09	
*	6498.998	39.87	peak	5.93	45.80	74.00	100	90	-28.20	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:29:01

Humidity:60 %

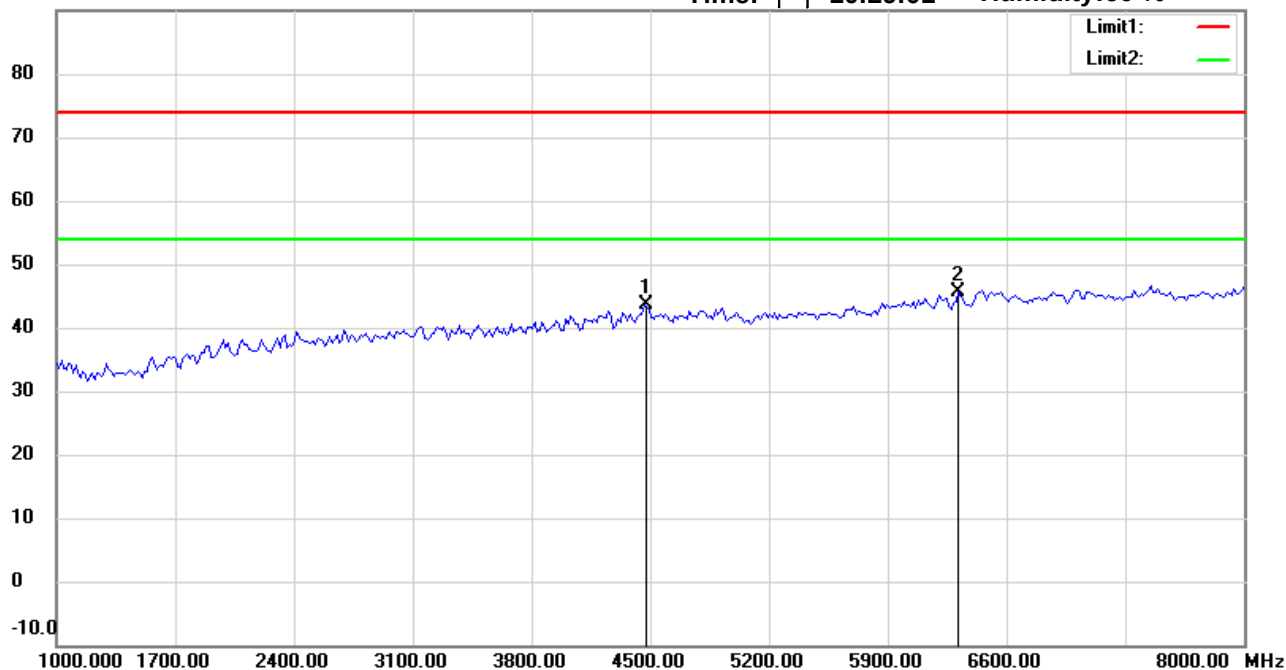

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4464.930	42.80	peak	0.75	43.55	74.00	100	120	-30.45	
*	6316.633	40.73	peak	4.79	45.52	74.00	100	175	-28.48	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:28:19

Humidity:60 %

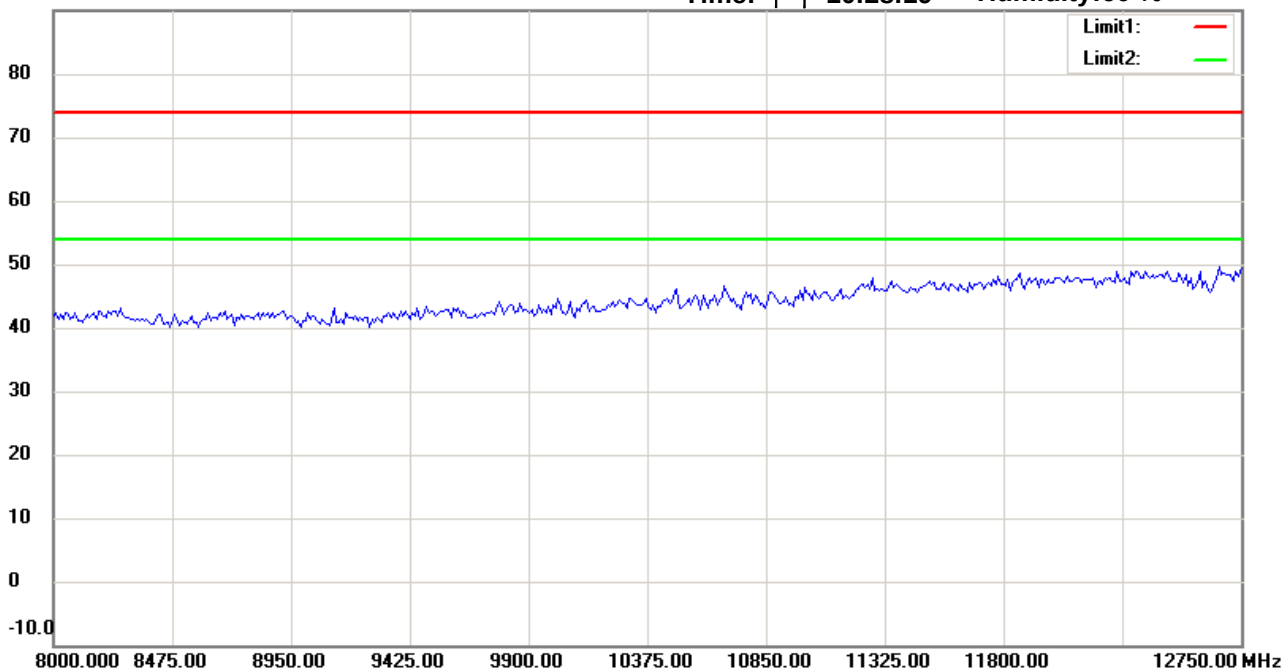

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:29:13

Humidity:60 %

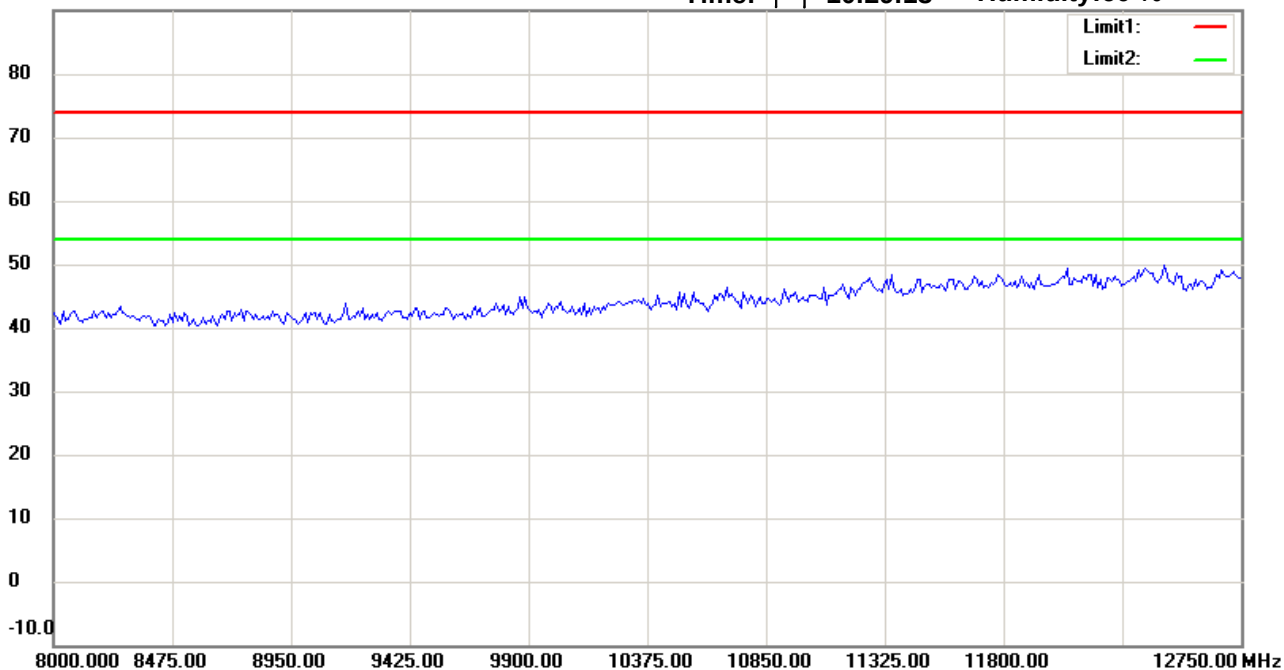

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:28:43

Humidity:60 %

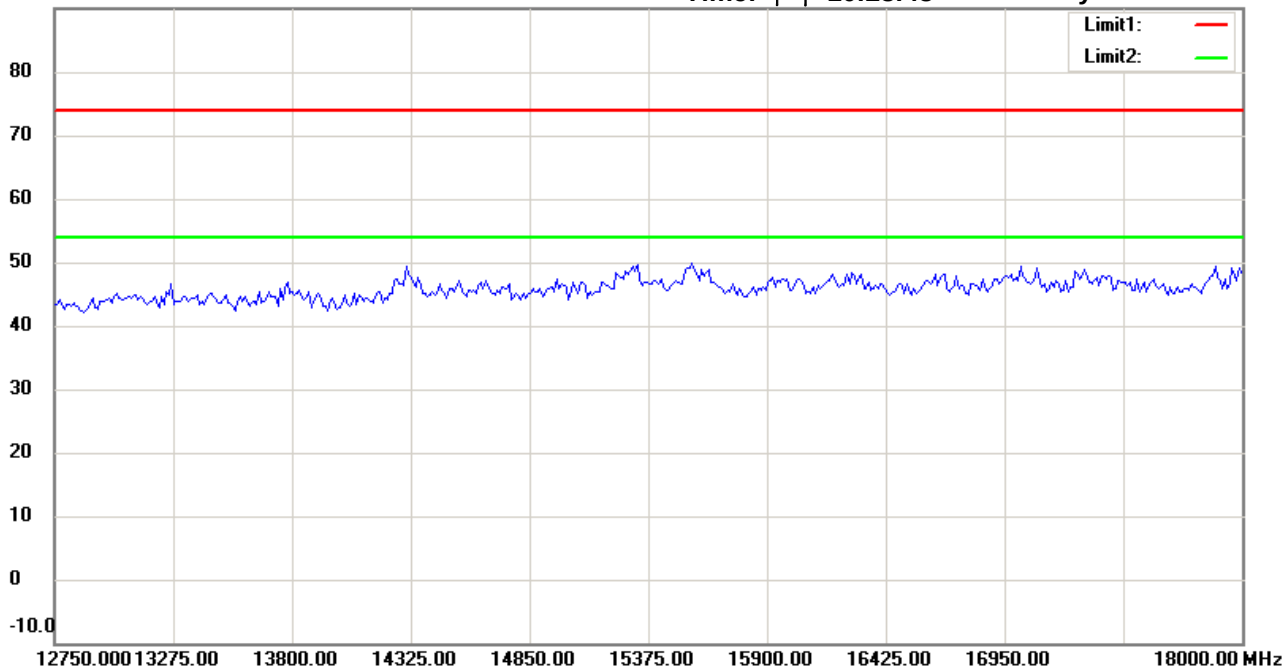

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:29:37

Humidity:60 %

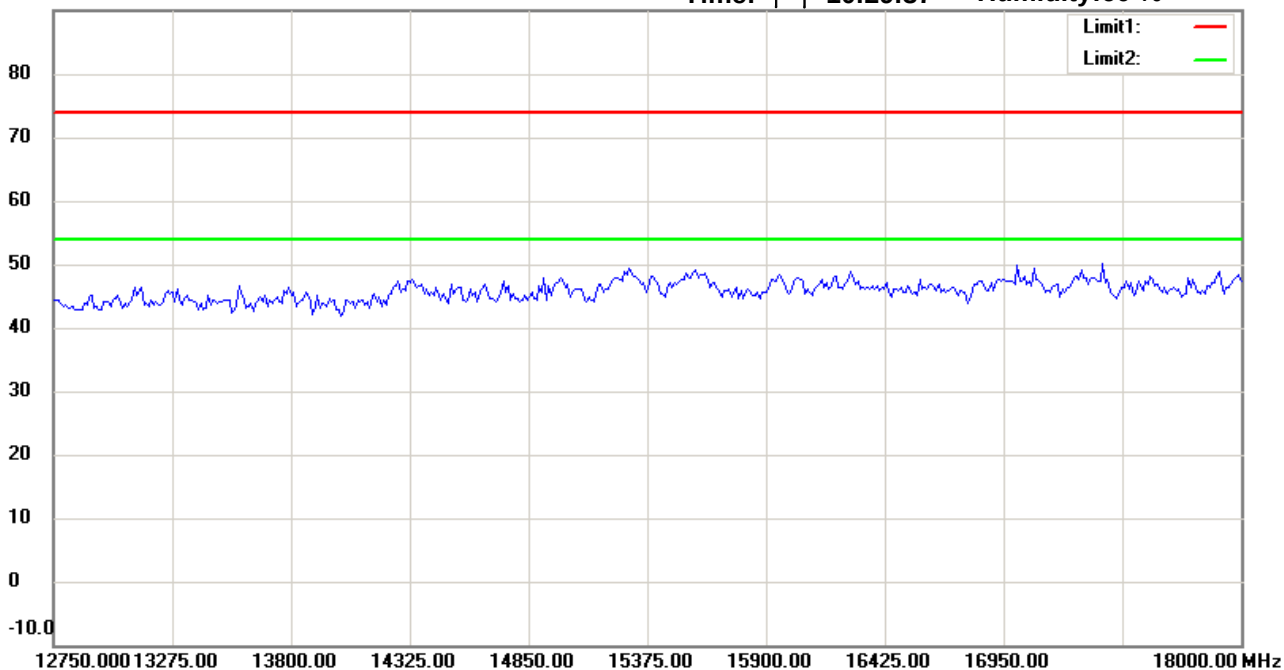

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File : 3

Data : #4


Date: 2015/7/14

Temperature: 24 °C

90.0 dBuV/m

Time: 下午 10:28:54

Humidity: 60 %

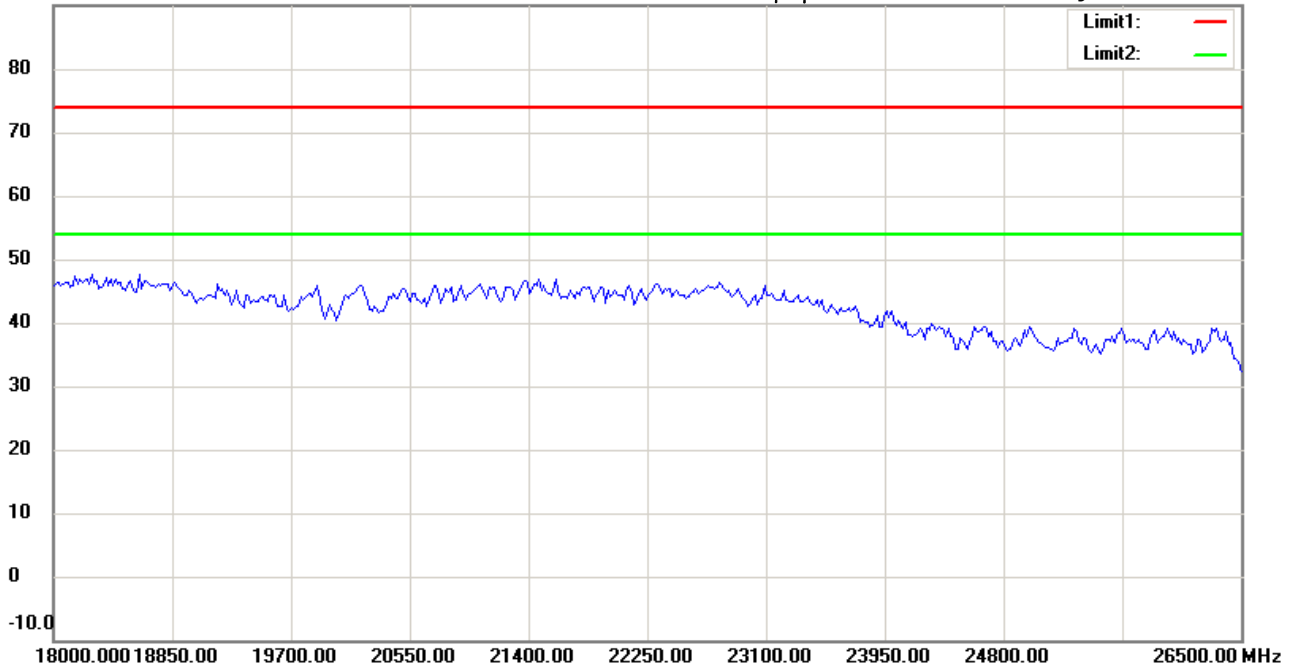

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:29:46

Humidity:60 %

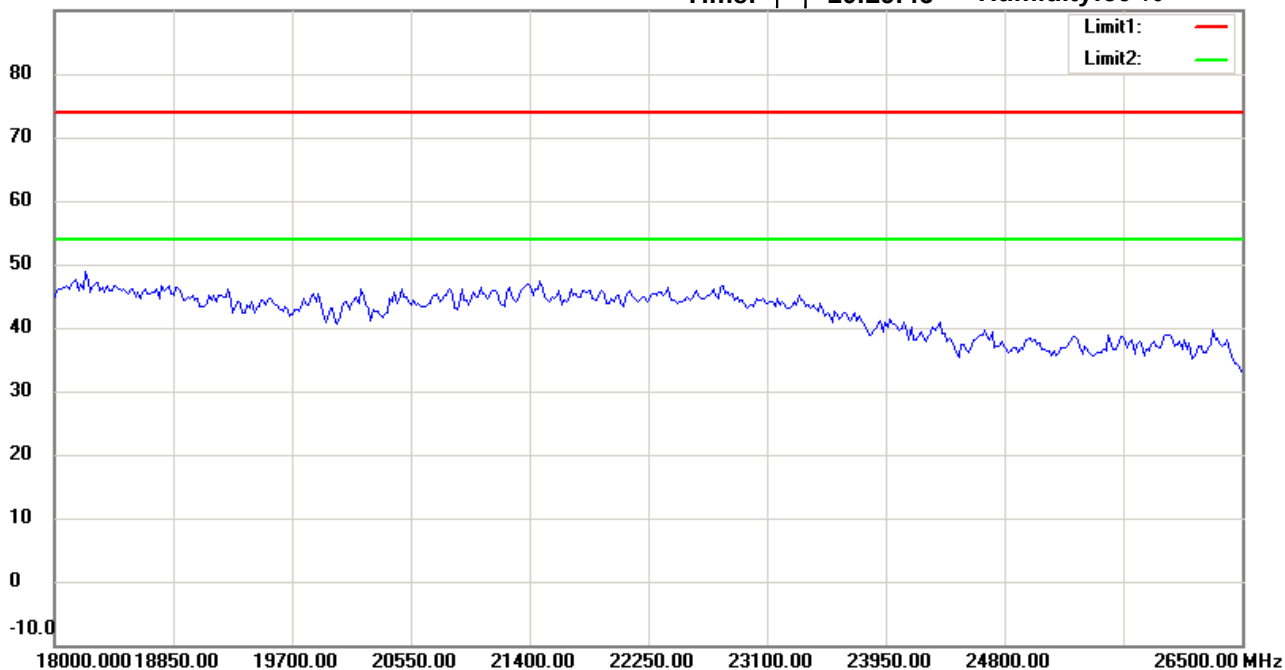

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2480MHz

Note :


Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Worldwide Testing Services(Taiwan) Co., Ltd.

RX_ANT+



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:47:53

Humidity:60 %

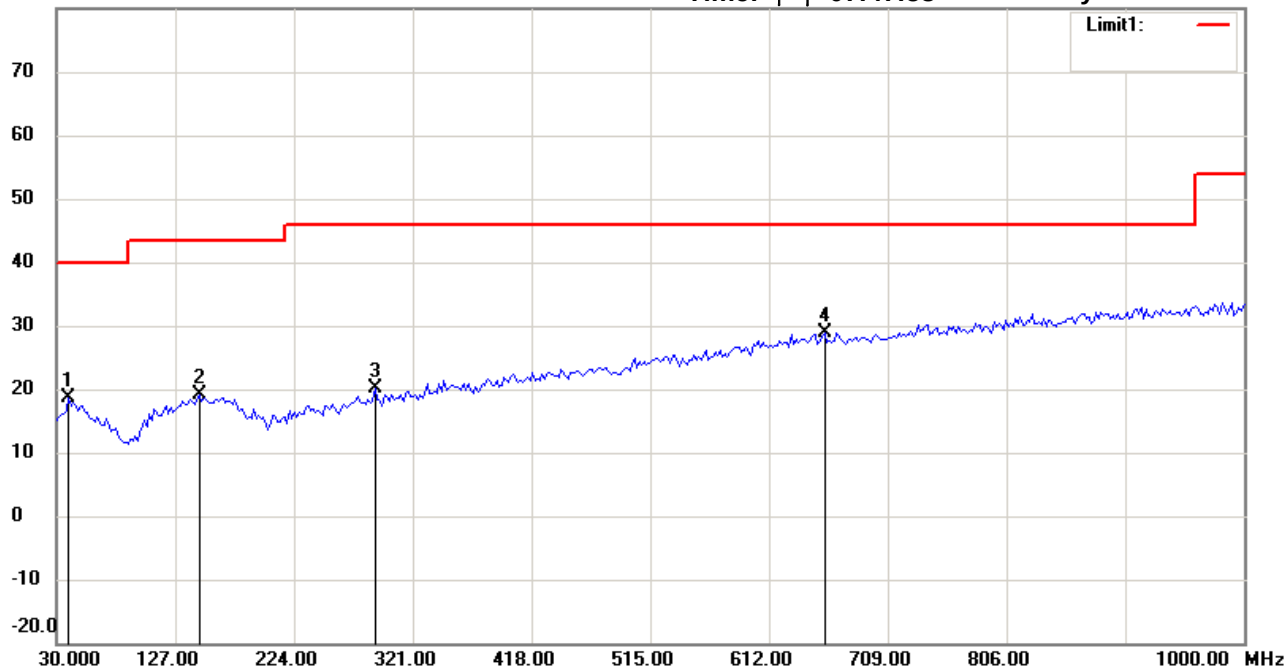

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	4.14	peak	14.56	18.70	40.00	100	170	-21.30	
	146.6332	3.56	peak	15.47	19.03	43.50	100	100	-24.47	
	290.4810	4.24	peak	15.84	20.08	46.00	100	30	-25.92	
*	657.8758	4.12	peak	24.66	28.78	46.00	100	225	-17.22	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2015/7/14

Temperature:24 °C

80.0 dBuV/m

Time: 下午 07:48:39

Humidity:60 %

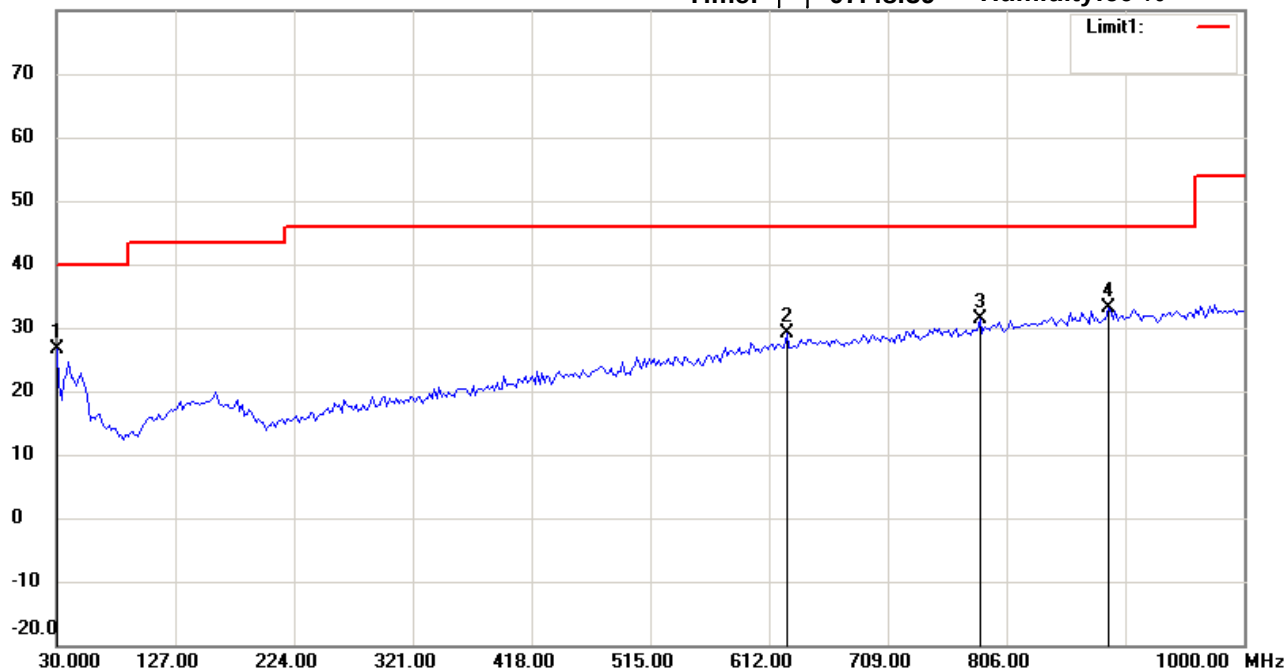

Site : Chamber

Condition : FCC_part 15 RE-Class B_30-1000MHz

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: **Vertical**

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	30.0000	12.86	peak	13.74	26.60	40.00	100	245	-13.40	
	626.7735	5.14	peak	24.02	29.16	46.00	100	160	-16.84	
	784.2285	4.89	peak	26.39	31.28	46.00	100	110	-14.72	
*	889.1984	4.90	peak	28.20	33.10	46.00	100	50	-12.90	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:30:50

Humidity:60 %

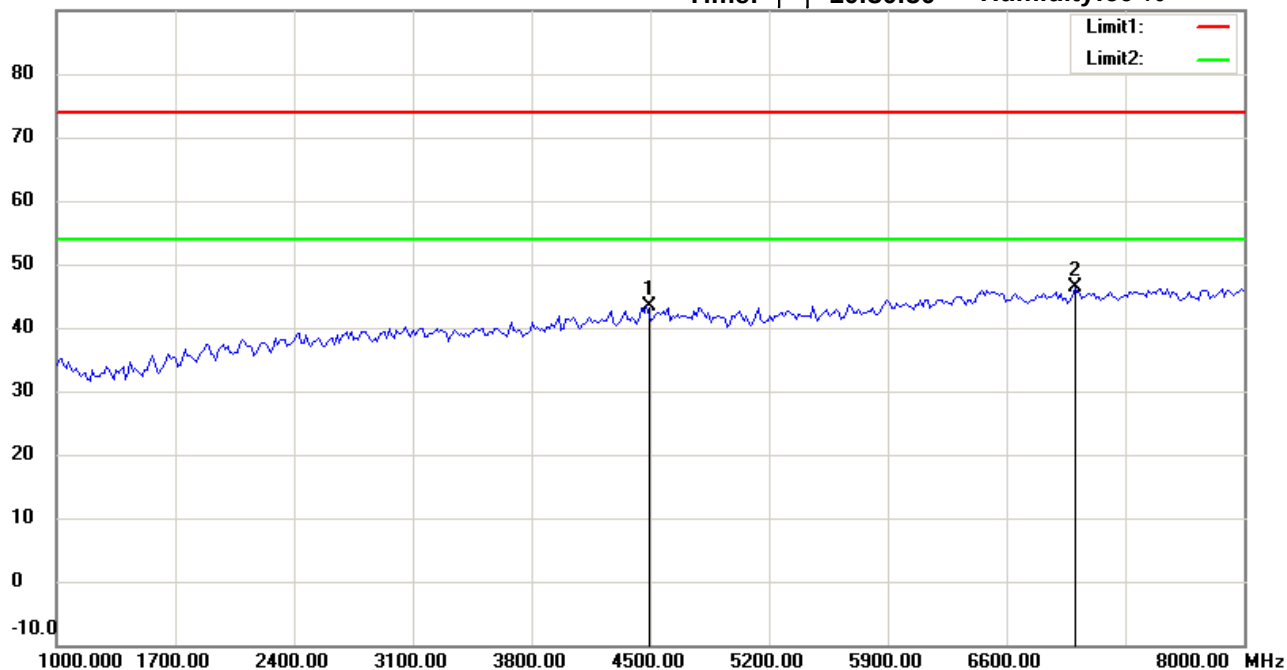

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4478.958	42.46	peak	0.92	43.38	74.00	100	85	-30.62	
*	7004.008	40.89	peak	5.53	46.42	74.00	100	200	-27.58	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File : 3

Data : #5


Date: 2015/7/14

Temperature: 24 °C

90.0 dBuV/m

Time: 下午 10:31:43

Humidity: 60 %

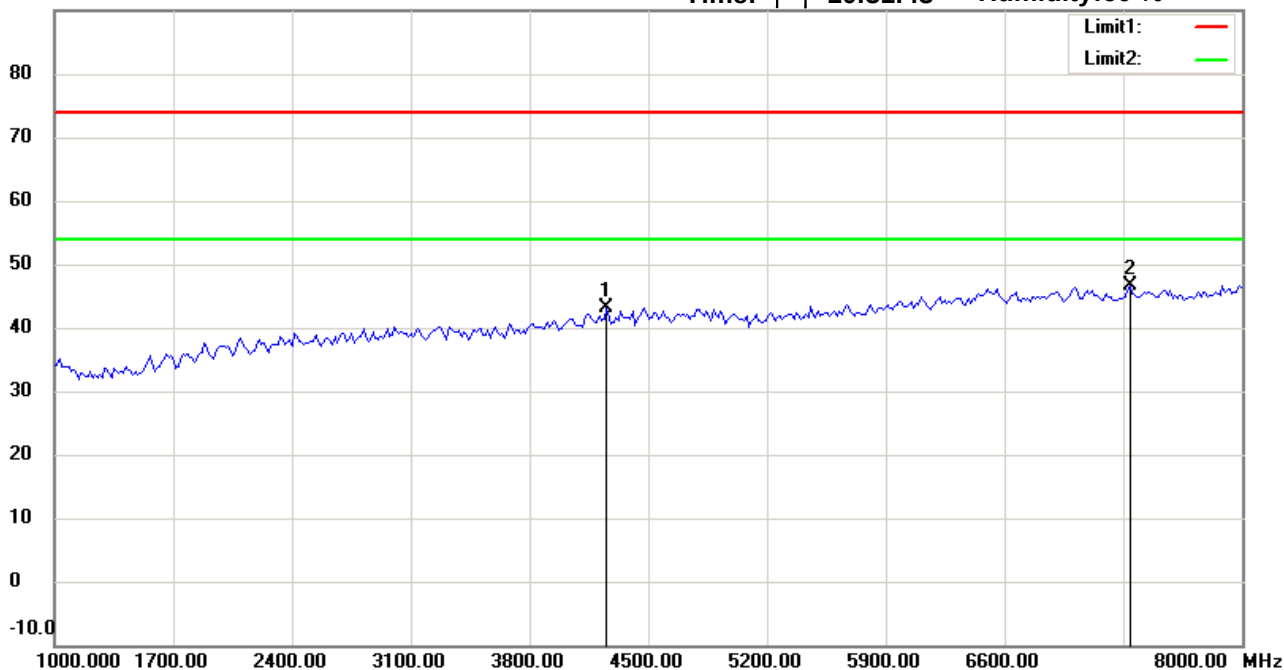

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4254.509	42.62	peak	0.45	43.07	74.00	100	35	-30.93	
*	7340.681	41.51	peak	5.15	46.66	74.00	100	110	-27.34	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:31:01

Humidity:60 %

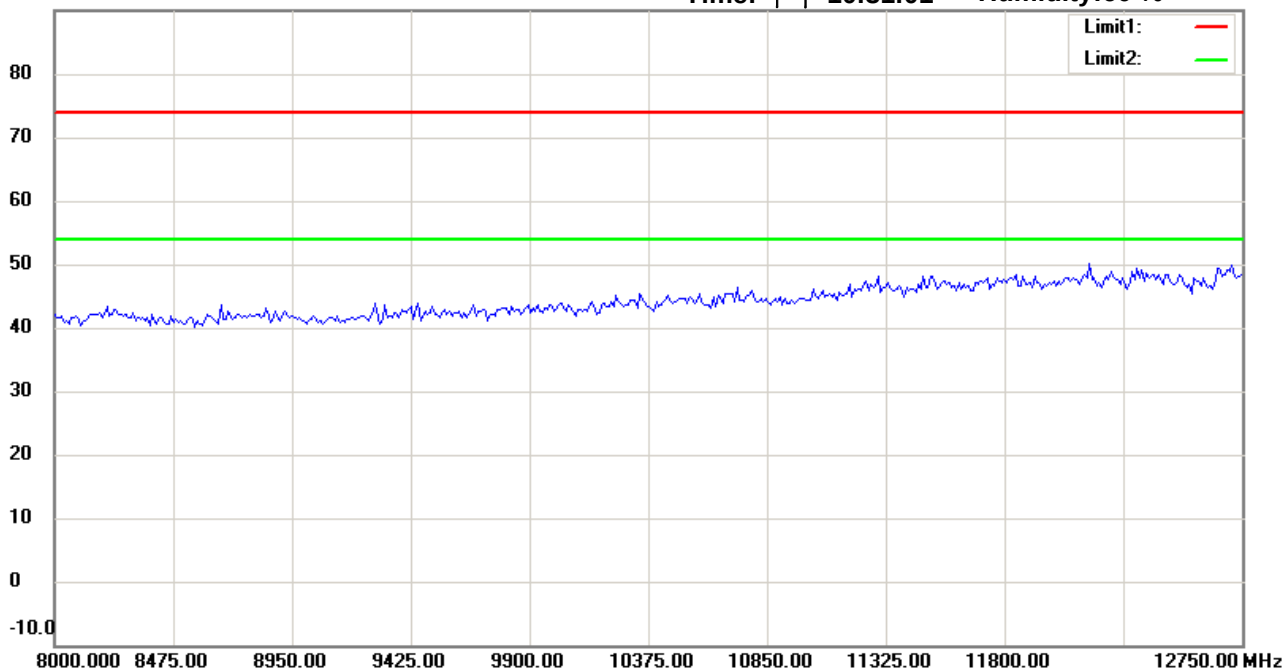

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:31:55

Humidity:60 %

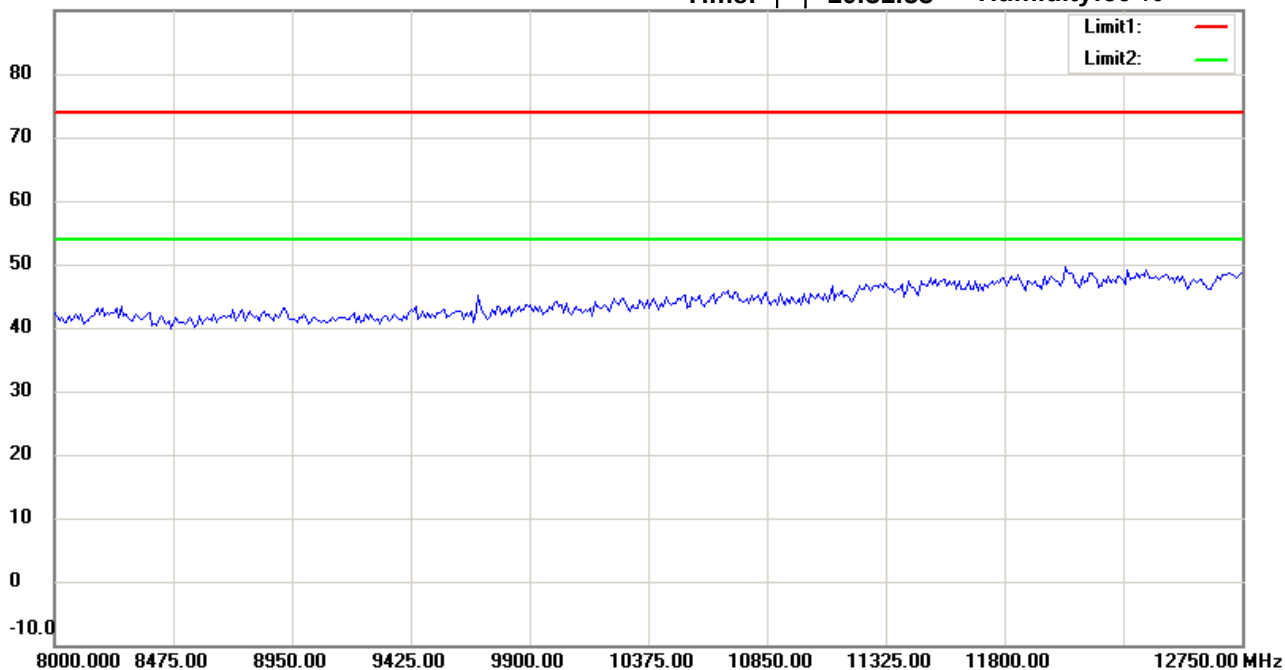

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:31:25

Humidity:60 %

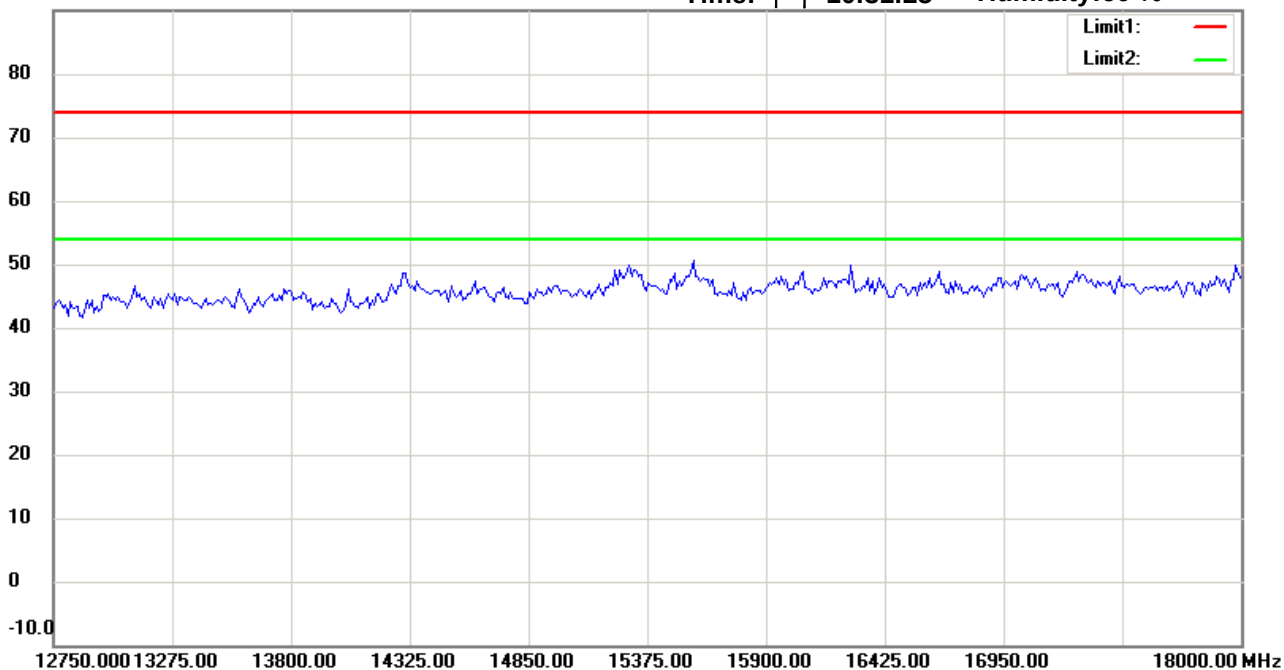

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: Horizontal

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:32:19

Humidity:60 %

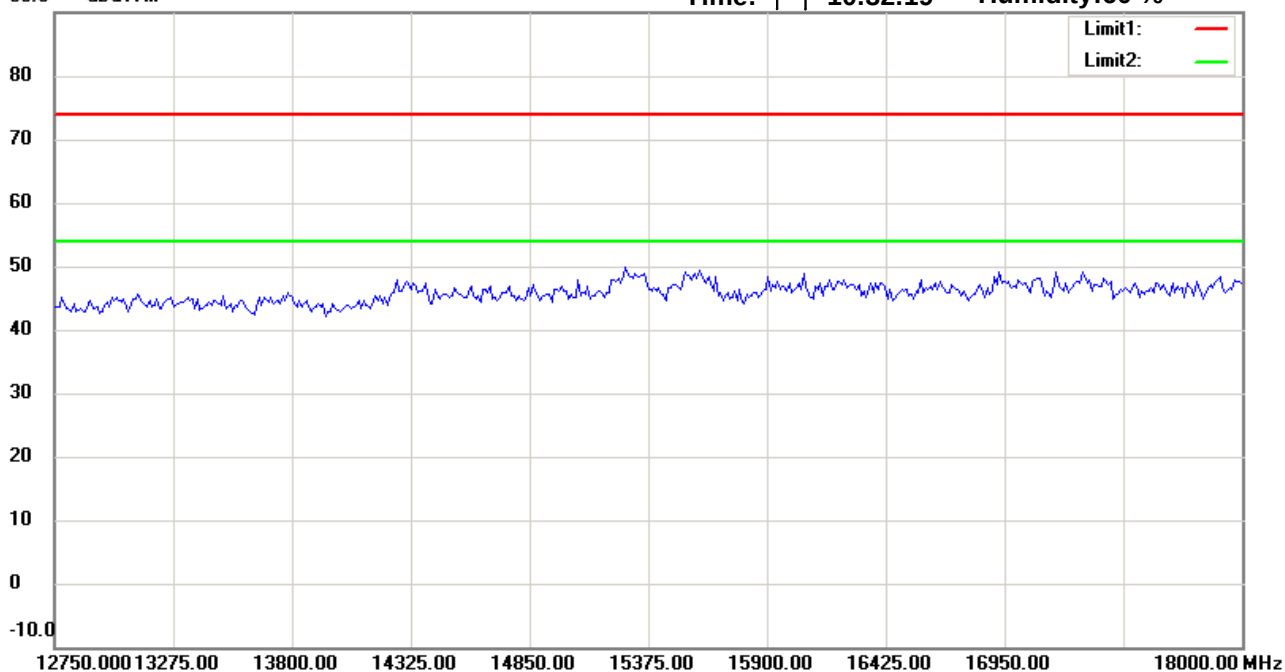

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:31:36

Humidity:60 %

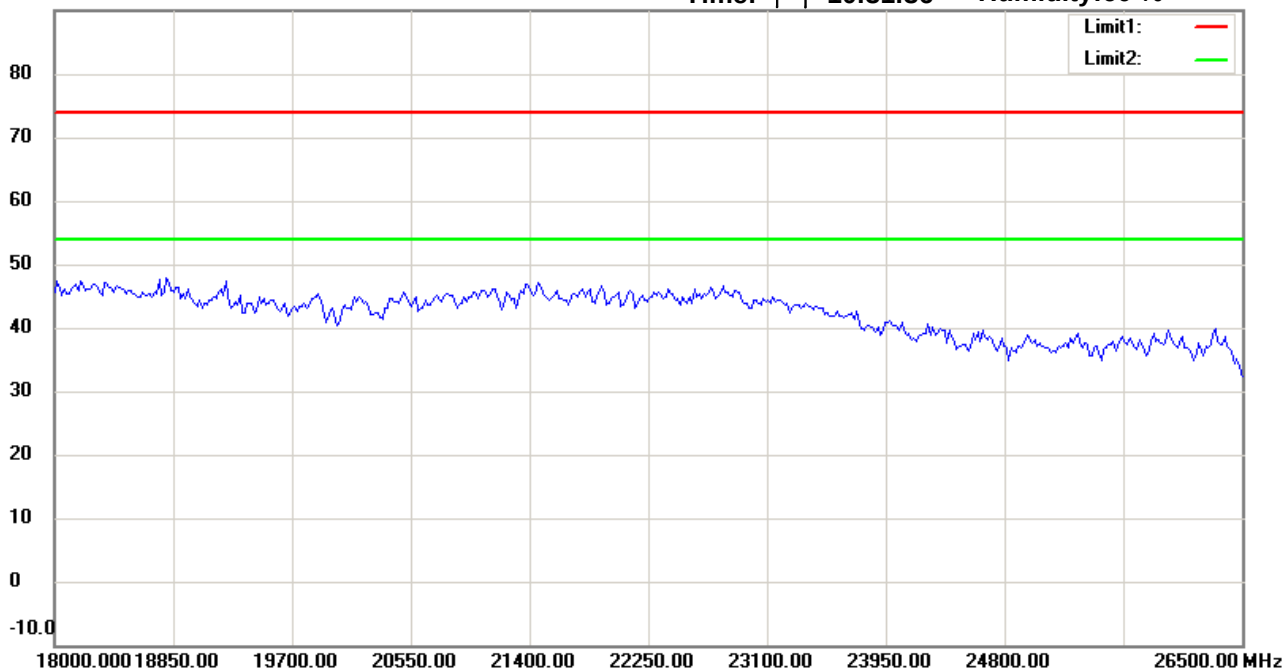

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: *Horizontal*

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2015/7/14

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:32:29

Humidity:60 %

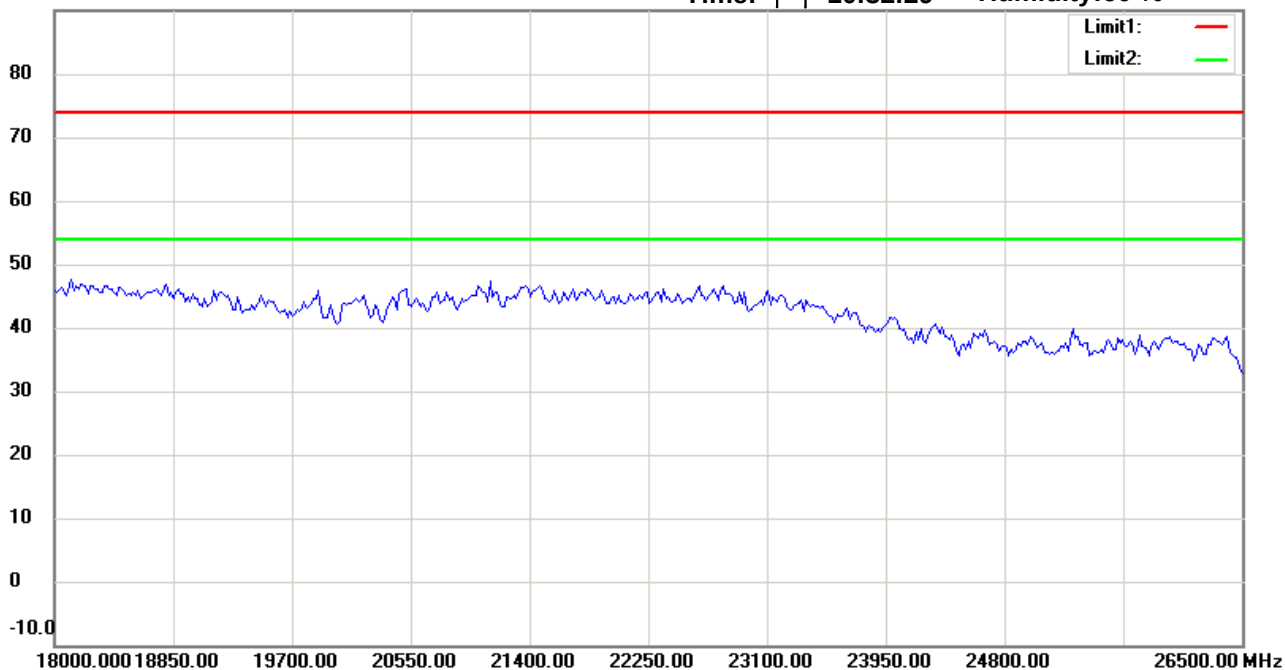

Site : Chamber

Condition : FCC_part 15 RE-Class B_Above 1GHz_PK

EUT : W6M21507-15115

M/N:

Test Mode : RX 2457MHz

Note :

Polarization: Vertical

Power : 3 Vd.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin