



REPORT No. : SZ14090074S01

RF EXPOSURE EVALUATION REPORT

APPLICANT : Motic China Group Co., Ltd

PRODUCT NAME : Moticom S2 Smart Camera

MODEL NAME : Moticom S2

TRADE NAME : Motic

BRAND NAME : Motic

FCC ID : PVEMOTICAMS2

STANDARD(S) : 47CFR 2.1091
KDB 447498 D01 General RF Exposure
Guidance v05r02

ISSUE DATE : 2014-10-21



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.com E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	3
1. TECHNICAL INFORMATION	4
1.1. IDENTIFICATION OF APPLICANT	4
1.2. IDENTIFICATION OF MANUFACTURER	4
1.3. EQUIPMENT UNDER TEST (EUT)	4
1.3.1. PHOTOGRAPHS OF THE EUT	5
1.3.2. IDENTIFICATION OF ALL USED EUT	6
1.4. APPLIED REFERENCE DOCUMENTS	6
2. DEVICE CATEGORY AND RF EXPOSURE LIMIT	7
3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER	8
4. RF EXPOSURE EVALUATION	9
ANNEX A GENERAL INFORMATION	10

Change History		
Issue	Date	Reason for change
1.0	2014-10-21	First edition



REPORT No. : SZ14090074S01

TEST REPORT DECLARATION

Applicant	Motic China Group Co., Ltd
Applicant Address	MOTIC BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE XIAMEN FUJIAN; 361006;CN
Manufacturer	Motic China Group Co., Ltd
Manufacturer Address	MOTIC BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE XIAMEN FUJIAN; 361006;CN
Product Name	Moticam S2 Smart Camera
Model Name	Moticam S2
Brand Name	Motic
HW Version	1.0.0.0
SW Version	4.2.2.0
Test Standards	47CFR 2.1091; KDB 447498 D01 General RF Exposure Guidance v05r02
Test Date	2014-09-28
SAR Evaluation	Not Required

Tested by : Zou Jian
Zou Jian

Reviewed by : Peng Huarui
Peng Huarui

Approved by : Zeng Dexin
Zeng Dexin



1. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

1.1. Identification of Applicant

Company Name:	Motic China Group Co., Ltd
Address:	MOTIC BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE XIAMEN FUJIAN; 361006;CN

1.2. Identification of Manufacturer

Company Name:	Motic China Group Co., Ltd
Address:	MOTIC BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE XIAMEN FUJIAN; 361006;CN

1.3. Equipment Under Test (EUT)


Model Name:	Moticam S2
Trade Name:	Motic
Brand Name:	Motic
Hardware Version:	1.0.0.0
Software Version:	4.2.2.0
Frequency Bands:	Wifi802.11b/g/n20/n40:2412-2462MHz; Bluetooth;
Modulation Mode:	Wifi802.11b: DSSS; Wifi802.11g/n20/n40: OFDM; Bluetooth: GFSK/ π /4-DQPSK/8-DPSK;
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype



REPORT No. : SZ14090074S01

1.3.1. Photographs of the EUT

1. EUT front view

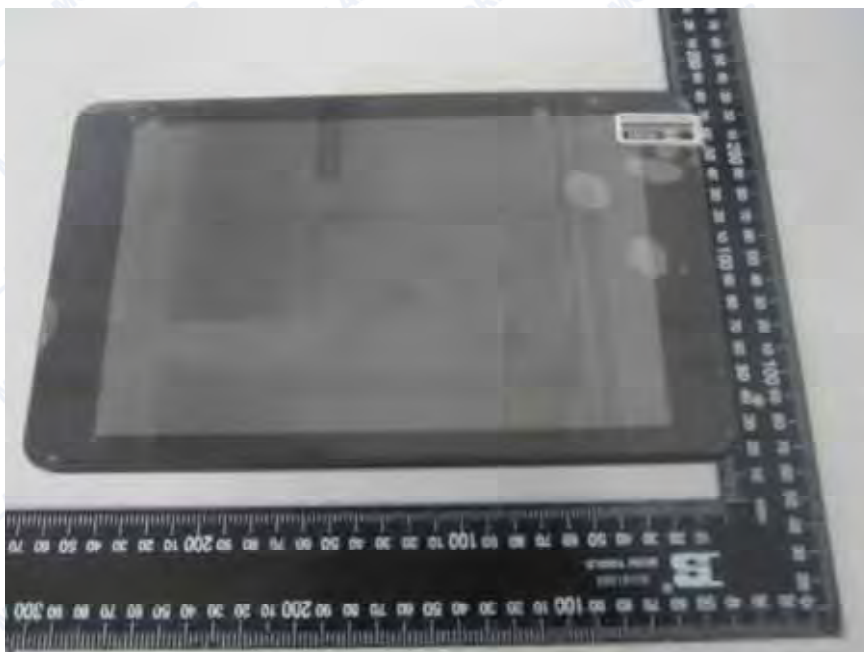

2. EUT rear view





1.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	1.0.0.0	4.2.2.0

1.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1091	Radiofrequency Radiation Exposure Evaluation: mobile devices
2	KDB 447498 D01v05r02	General RF Exposure Guidance



2. DEVICE CATEGORY AND RF EXPOSURE LIMIT

Per user manual, this device is a Moticam S2 Smart Camera. Based on 47CFR 2.1091, this device belongs to mobile device category with General Population/Uncontrolled exposure.

Mobile Devices:

47CFR 2.1091(b)

For purposes of this section, a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons. In this context, the term "fixed location" means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimeter separation requirement.

GENERAL POPULATION / UNCONTROLLED EXPOSURE

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm ²)	Averaging time(minutes)
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density



3. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

1. Wifi Conducted Output Power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11b (DSSS)	802.11g (OFDM)	802.11n20 (OFDM)
WiFi	1	2412	13.36	15.76	15.90
	6	2437	13.01	15.49	15.95
	11	2462	12.62	15.00	14.94

Band	Channel	Frequency (MHz)	Output Power(dBm)
			802.11n40 (OFDM)
Wifi	3	2422	16.20
	6	2437	15.92
	9	2452	15.67

2. BT3.1+EDR Conducted Output Power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT	0	2402	9.255	10.540	2.565
	39	2441	9.354	10.560	1.806
	78	2480	8.434	9.862	0.866



4. RF EXPOSURE EVALUATION

Standalone transmission MPE evaluation

Bands	Frequency (MHz)	Antenna Gain (dBi)	Conducted Peak Power (dBm)	Time-averaging EIRP (mW)	Power density (mW/cm ²)	Limit for MPE (mW/cm ²)
802.11n40	2422	1.21	16.20	55.08	0.011	1.0
Bluetooth	2441	1.21	10.56	15.03	0.003	

Note:

1. MPE calculation method

$$\text{Power Density} = \text{EIRP} / 4\pi R^2$$

Where: $\text{EIRP} = P \cdot G$

P = Peak out power

G = Antenna gain

R = Separation distance (20cm)

2. According to section 3, we know the limit for MPE of wifi 802.11b/g/n and BT is 1.0mW/cm²

Simultaneous transmission MPE evaluation

There is only one transmitter incorporated in this Moticam S2 Smart Camera, wifi 802.11b/g/n20/n40 and Bluetooth can not simultaneous transmission, so simultaneous transmission is not required.



REPORT No. : SZ14090074S01

ANNEX A GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory: CNAS No. L3572
(Shenzhen Morlab Communications Technology Co., Ltd.)

***** END OF REPORT *****