



FCC RADIO TEST REPORT

FCC ID : HD5-CT30PL1N
Equipment : Mobile computer
Brand Name : Honeywell
Model Name : CT30PL1N
Applicant : Honeywell International Inc.
9680 Old Bailes Road, Fort Mill, SC 29707 USA
Manufacturer : Honeywell International Inc.
9680 Old Bailes Road, Fort Mill, SC 29707 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 14, 2022 and testing was performed from Feb. 22, 2022 to Apr. 14, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel.....	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup.....	10
2.6 Measurement Results Explanation Example	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement	20
3.3 Power Spectral Density Measurement	21
3.4 Conducted Band Edges and Spurious Emission Measurement	30
3.5 Radiated Band Edges and Spurious Emission Measurement	41
3.6 AC Conducted Emission Measurement.....	46
3.7 Antenna Requirements	48
4 List of Measuring Equipment.....	49
5 Uncertainty of Evaluation.....	51
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1N0508B	01	Initial issue of report	Apr. 18, 2022
FR1N0508B	02	1. Revise Appendix A 2. Revise description in section 1.1, 2.5 and 3.5.3	Apr. 28, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	2.52 dB under the limit at 2378.250 MHz
3.6	15.207	AC Conducted Emission	Pass	11.97 dB under the limit at 0.173 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Kaye Yang

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS.

Product Feature	
HW version	v1.0
SW version	OS.11.003-HON.11.003
Sample	Scanner S0703
Antenna Type	WWAN <Ant 1>: Loop Antenna <Ant 2>: PIFA Antenna <Ant 3>: Monopole Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna

Antenna information			
1 st BLE	2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	2.5
2 nd BLE	2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	2.5

Remark:

1. The above EUT's information is declared by manufacturer. Please refer to Comments and Explanations in report summary.
2. Internal tracking board version is DVT1 and SW PN is 311.C0.00.0838-G-DEBUG.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY; 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane for 1st BLE; Z plane for 2nd BLE as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link + USB Cable (Charging from AC Adapter)

2.3 Connection Diagram of Test System

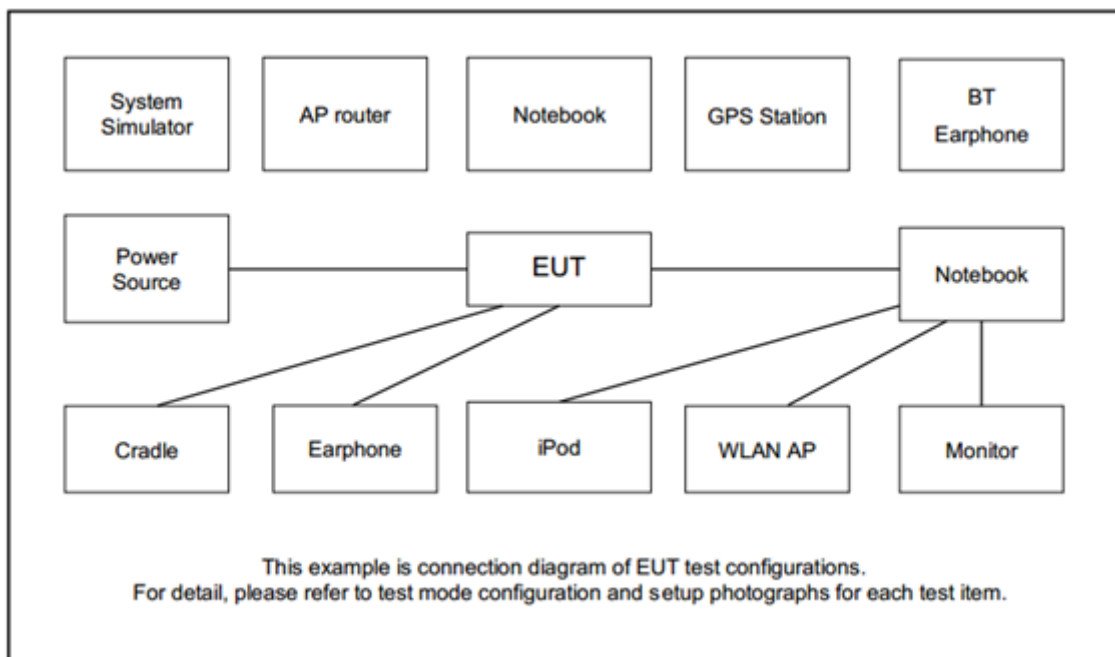

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	Acer	N18Q13	PD9AX201NG	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	USB Cable	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

<WCN3988>

The RF test items, utility "CMD ver.10.0.18362.1256" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

<NRF52840>

The RF test items, utility "Direct Test Mode tool V.0.10.2" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

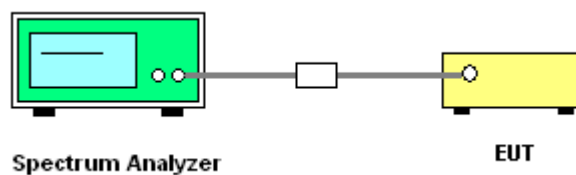




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<1st BLE>

<1Mbps>

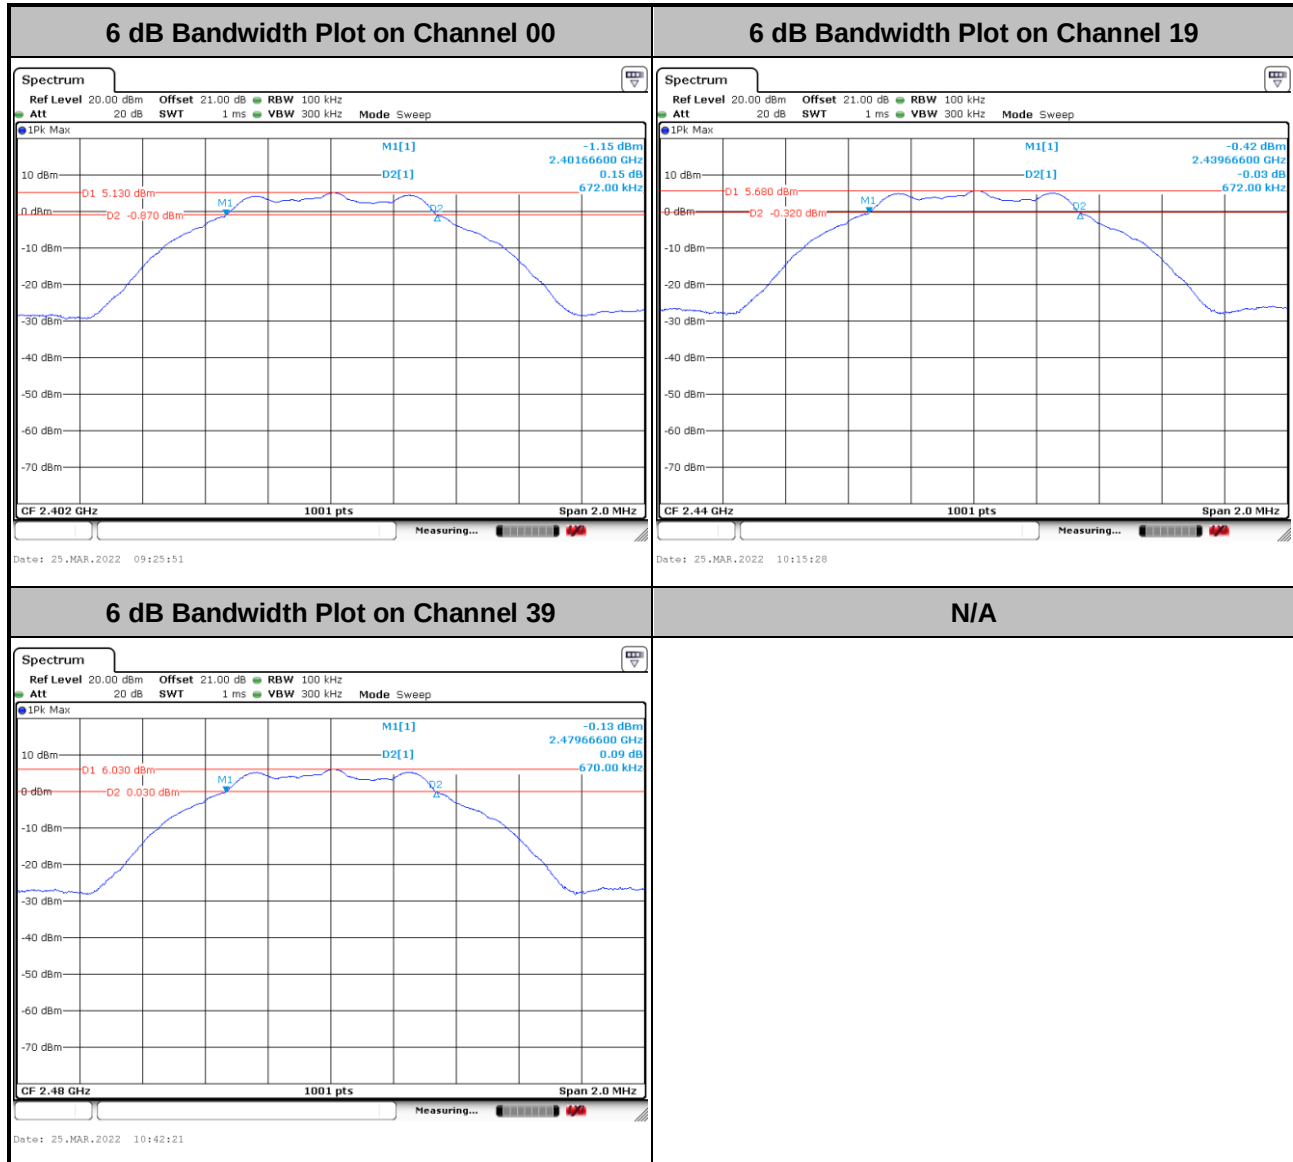




<2Mbps>

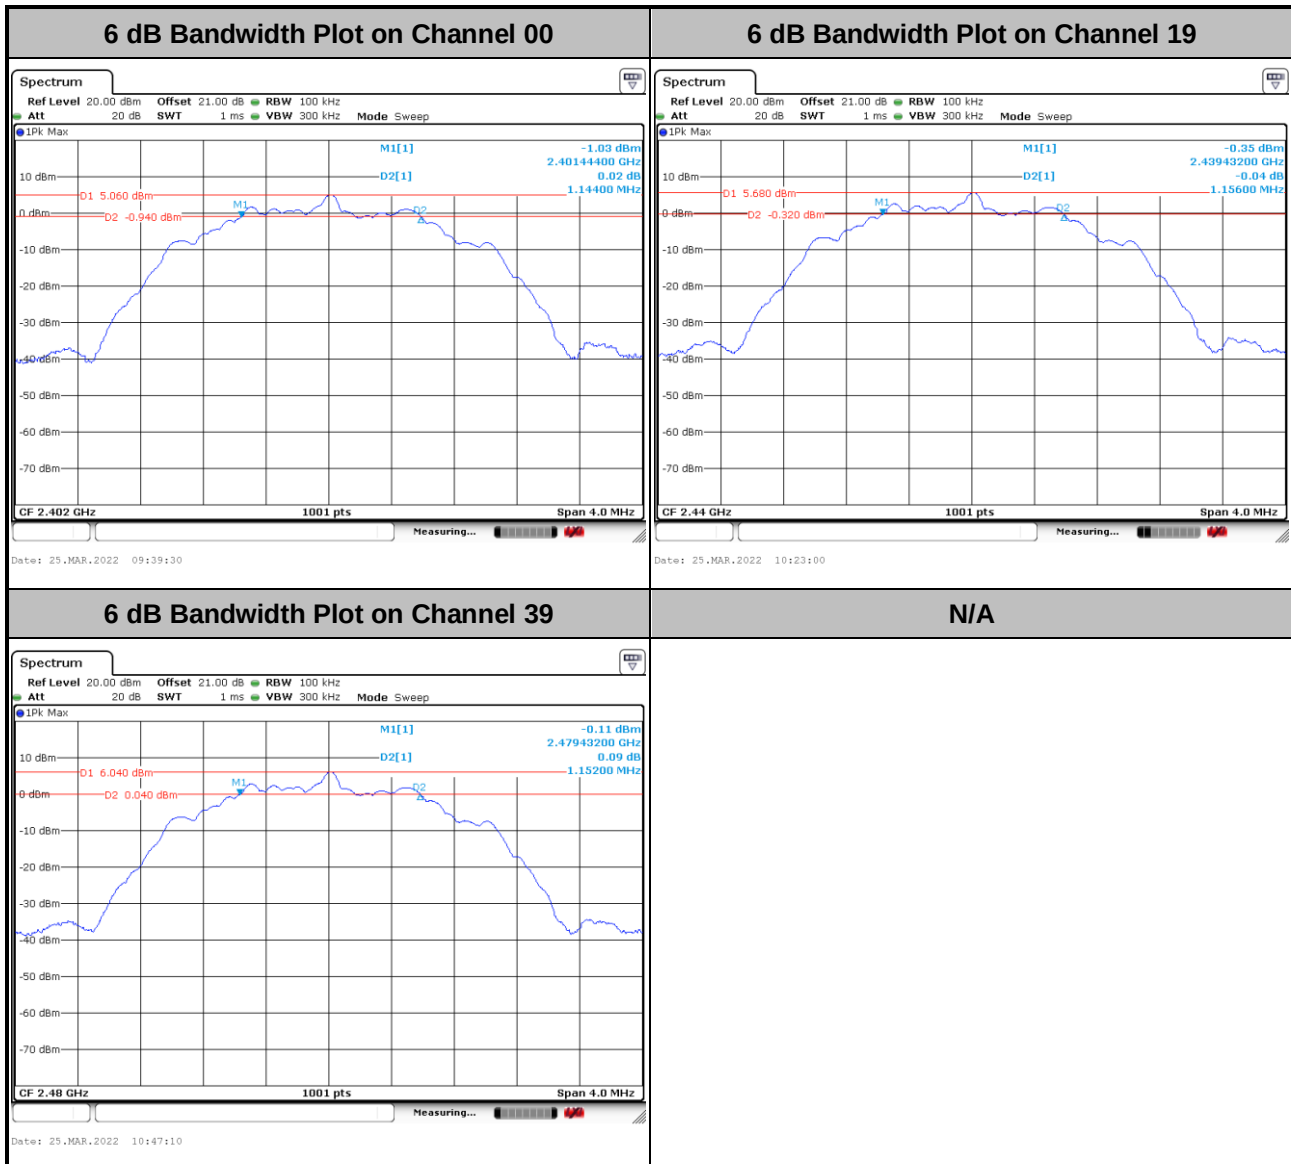


<2nd BLE>

<1Mbps>


6 dB Bandwidth Plot on Channel 00

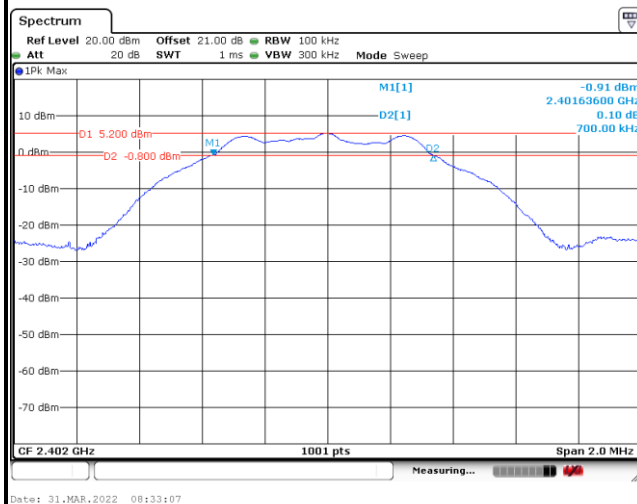

6 dB Bandwidth Plot on Channel 19

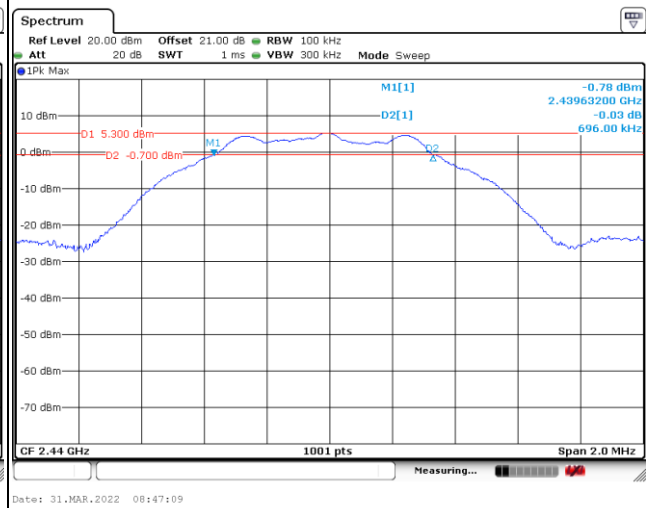


6 dB Bandwidth Plot on Channel 39

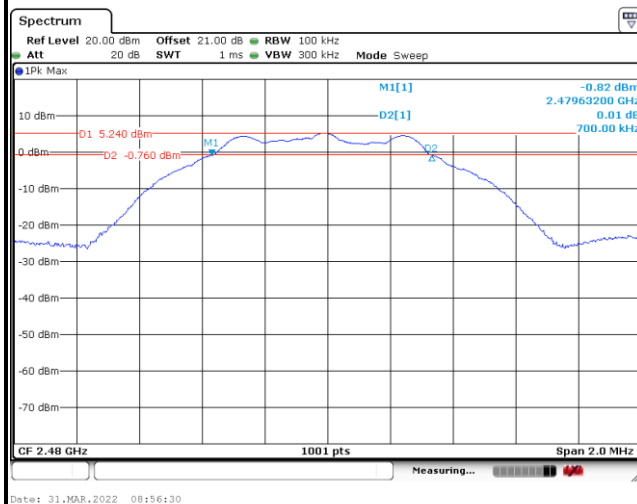

N/A



<2Mbps>

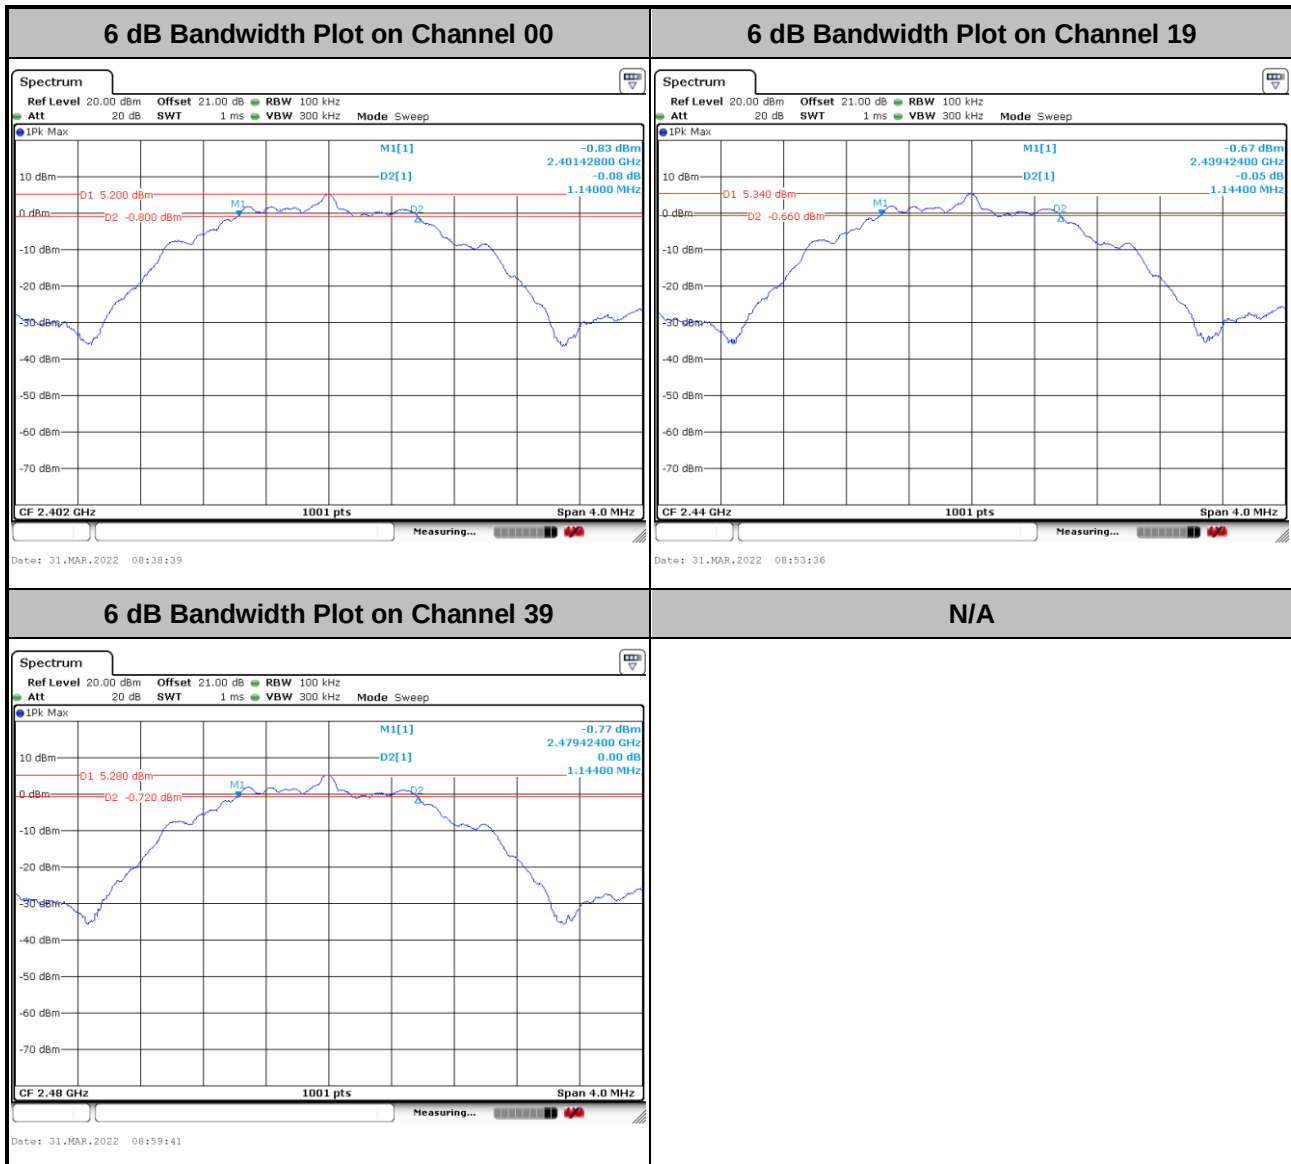




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1st BLE>


<1Mbps>

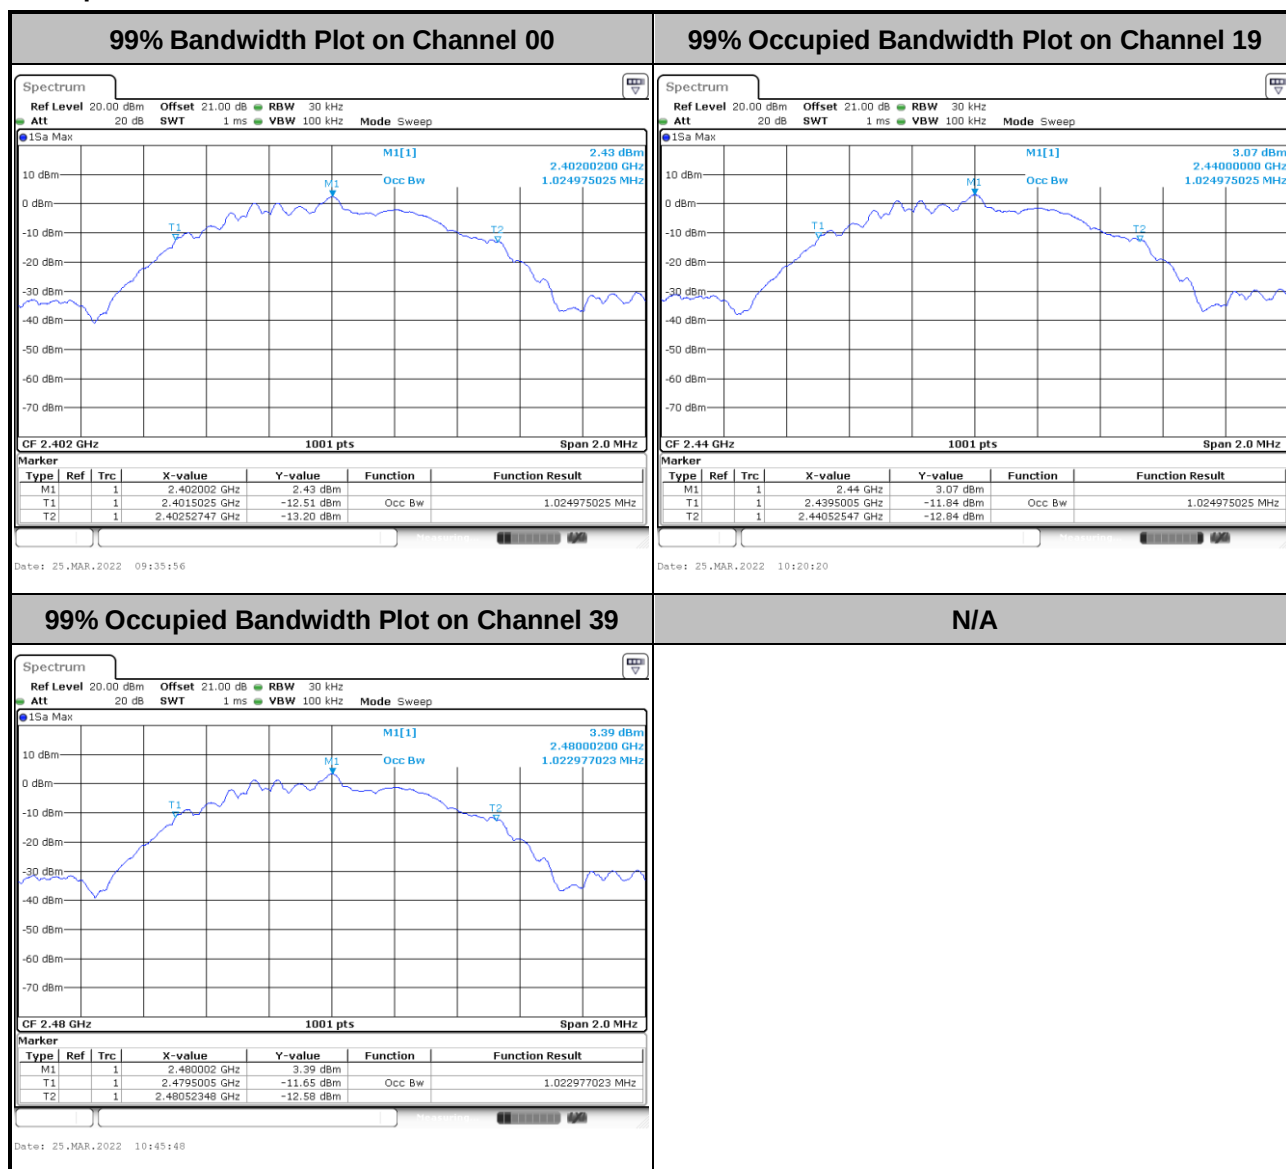

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<2Mbps>

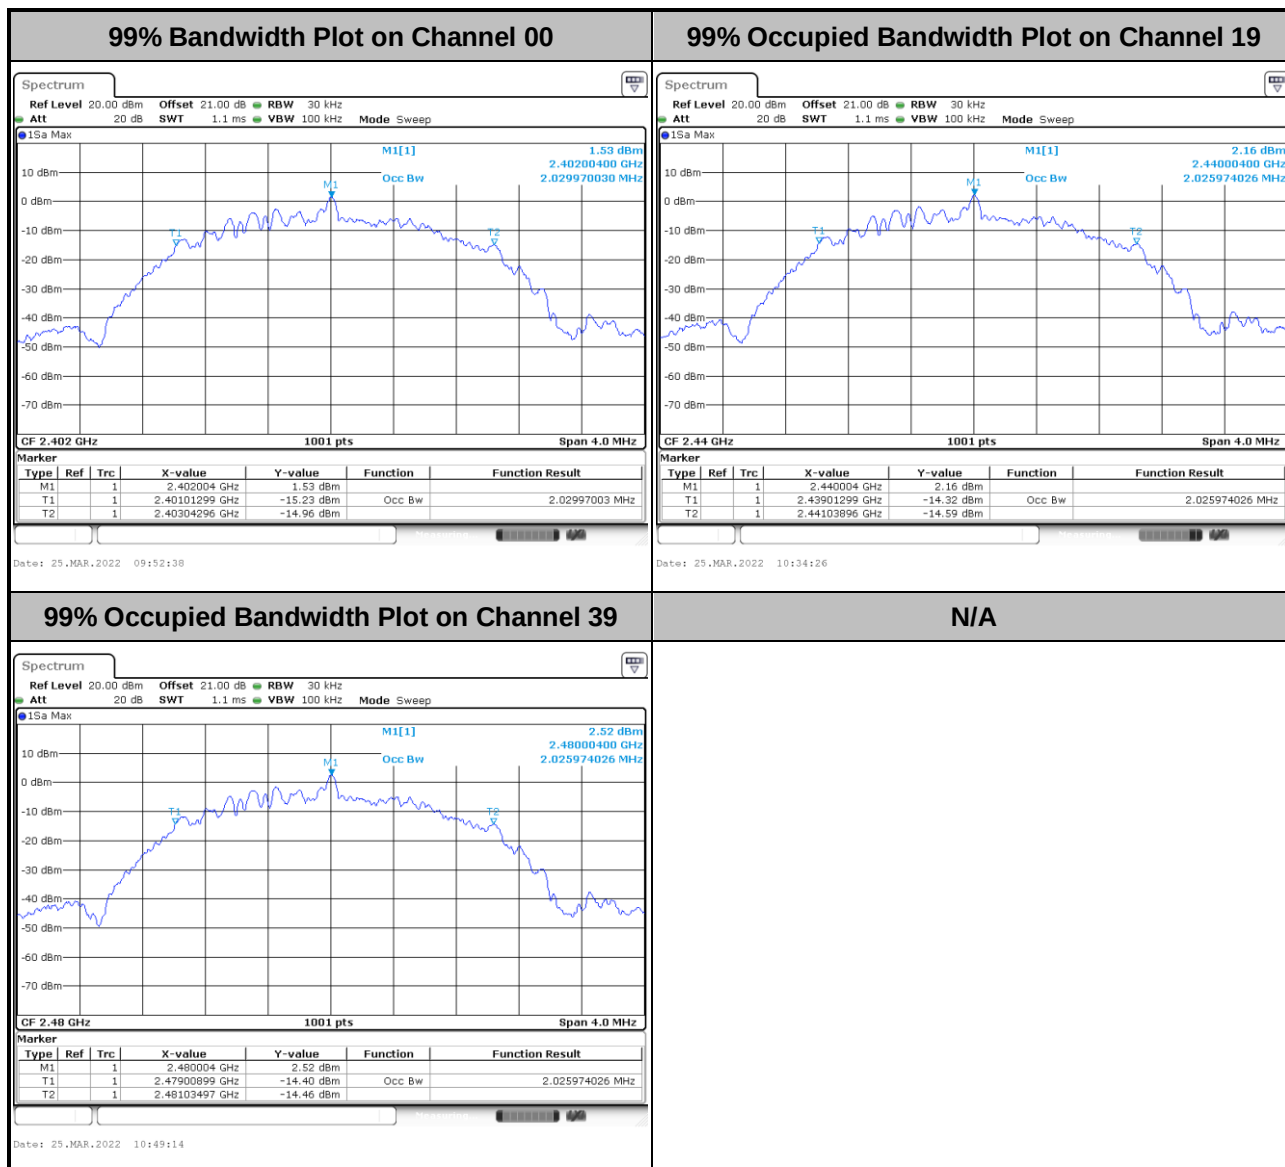

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<2nd BLE>


<1Mbps>

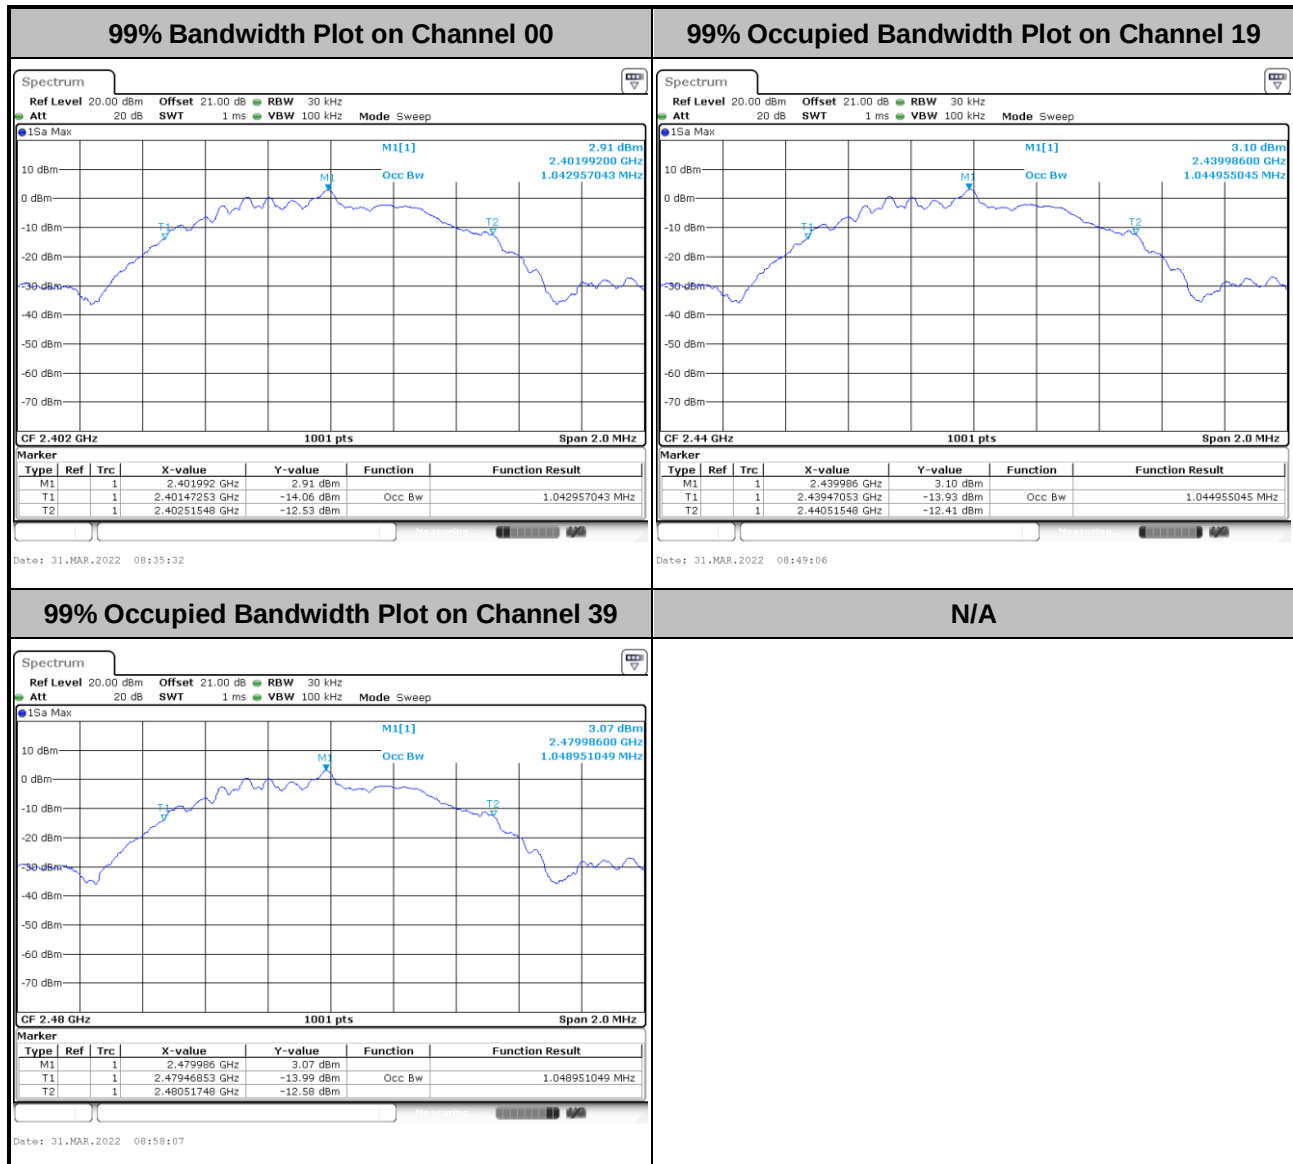

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

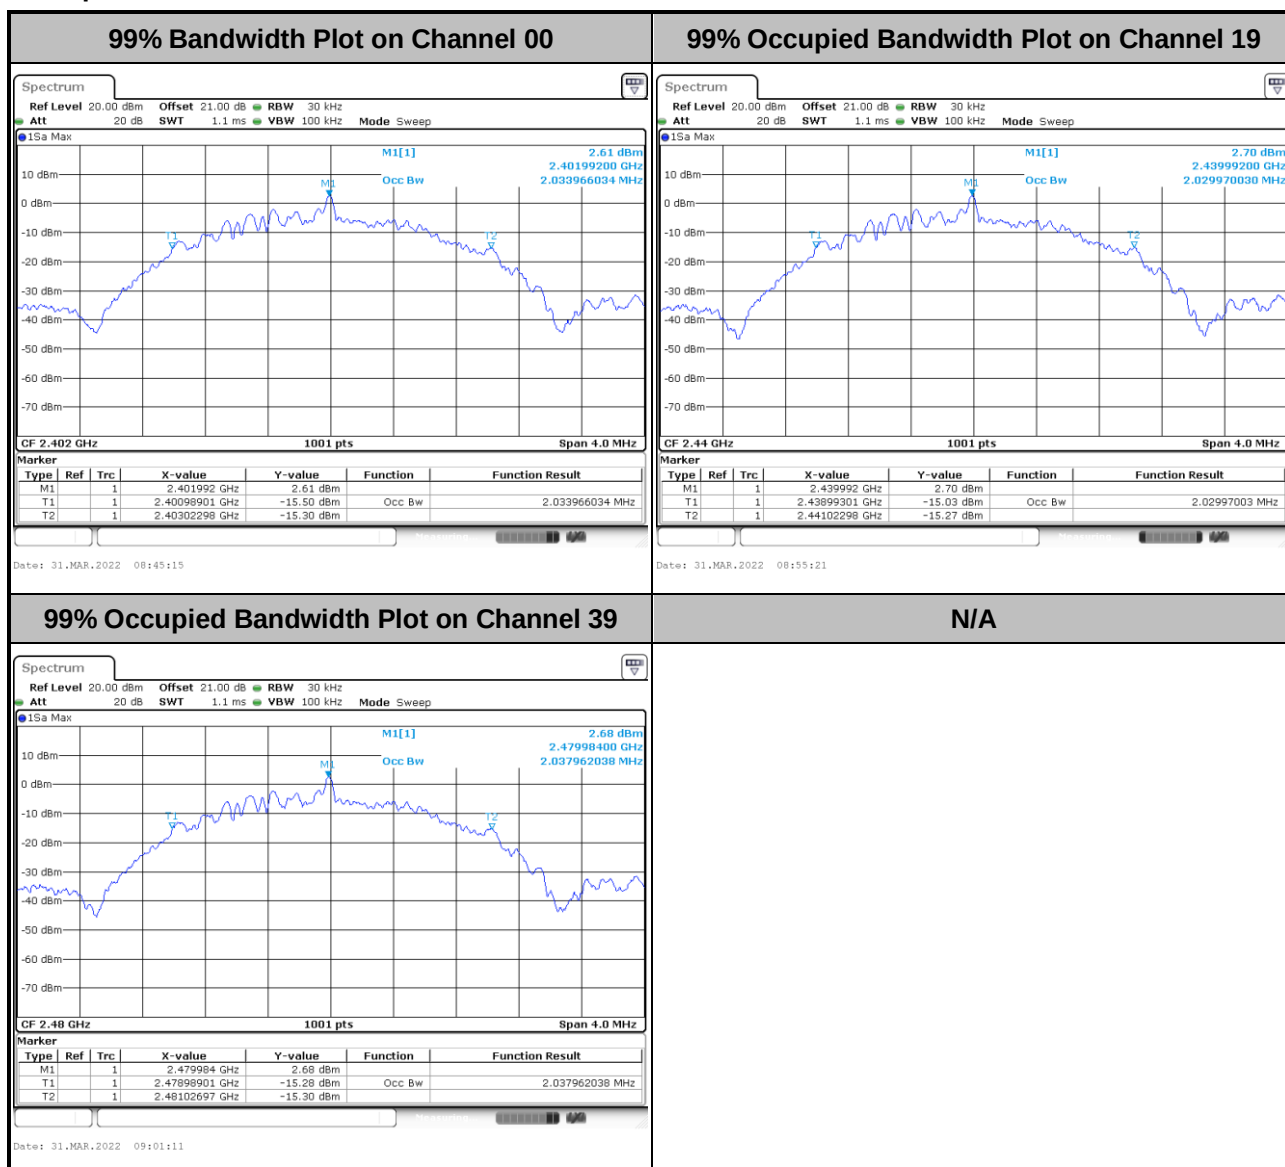

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

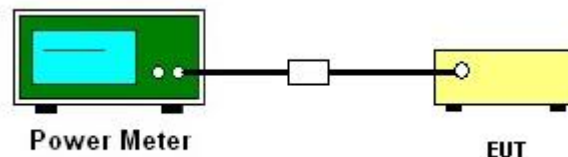

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

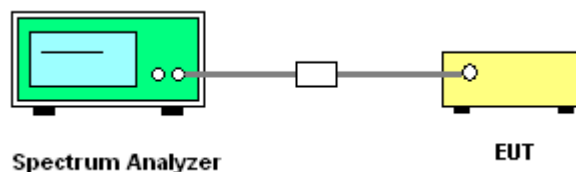

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<1st BLE>

<1Mbps>

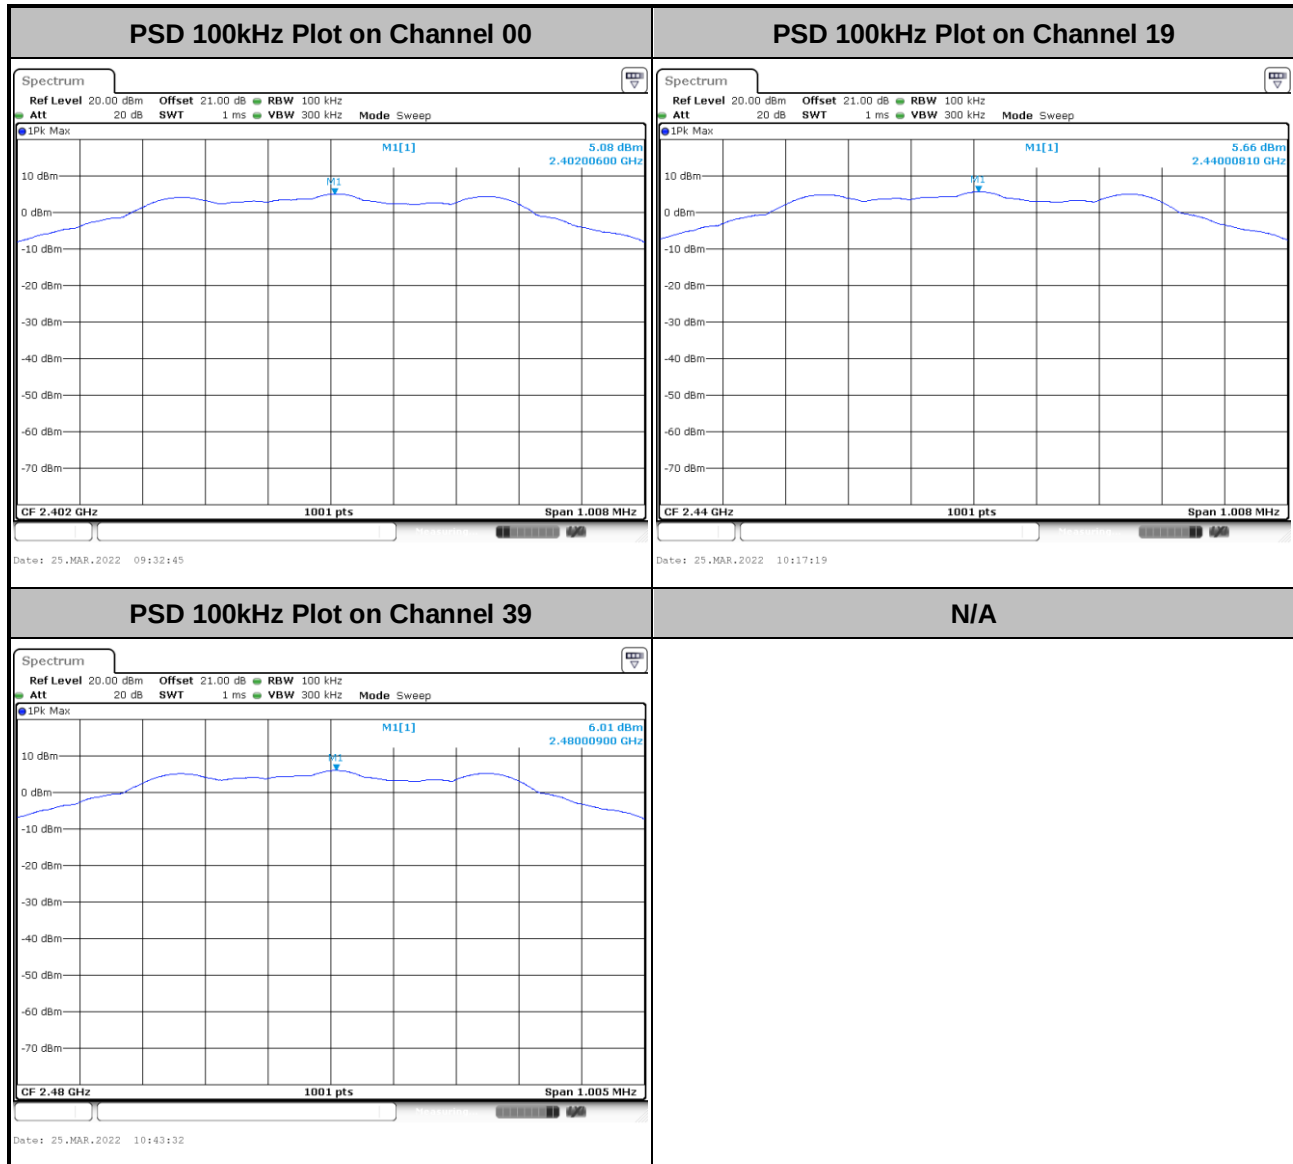




<2Mbps>

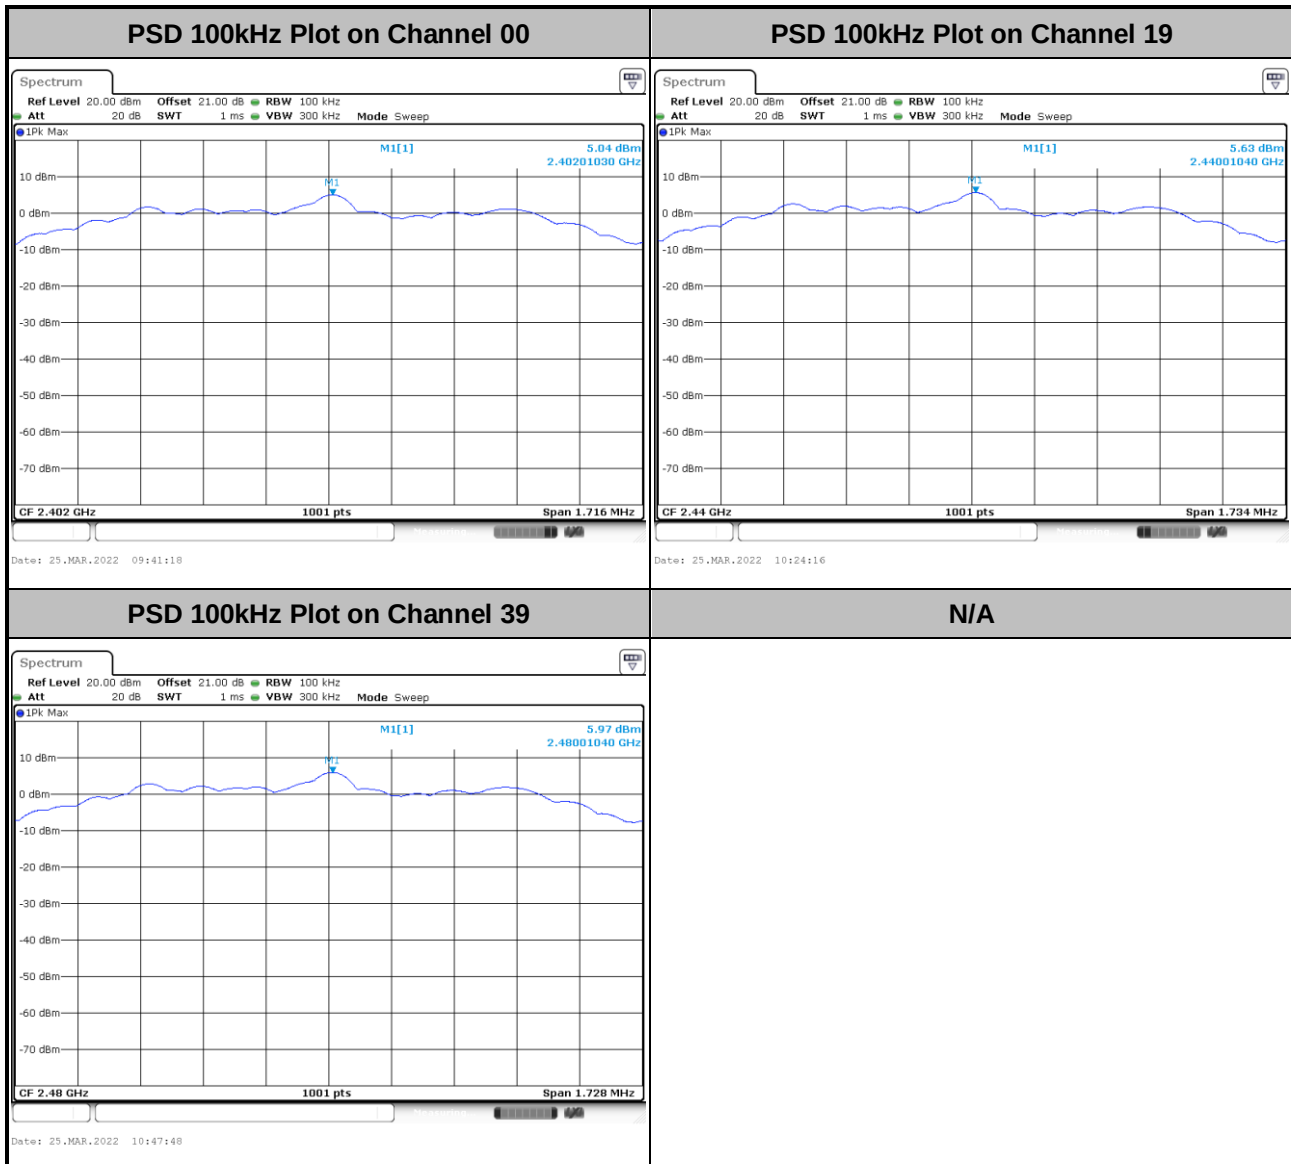


<2nd BLE>

<1Mbps>


PSD 100kHz Plot on Channel 00

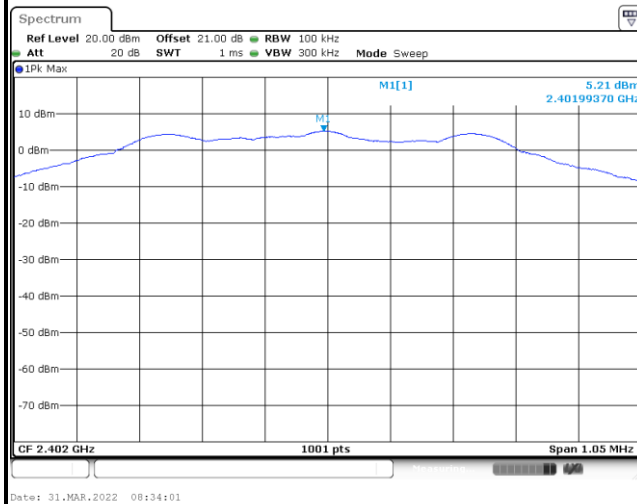

PSD 100kHz Plot on Channel 19

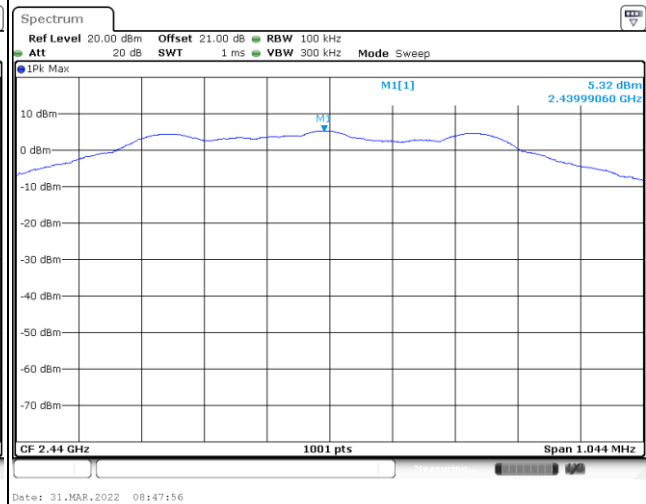


PSD 100kHz Plot on Channel 39

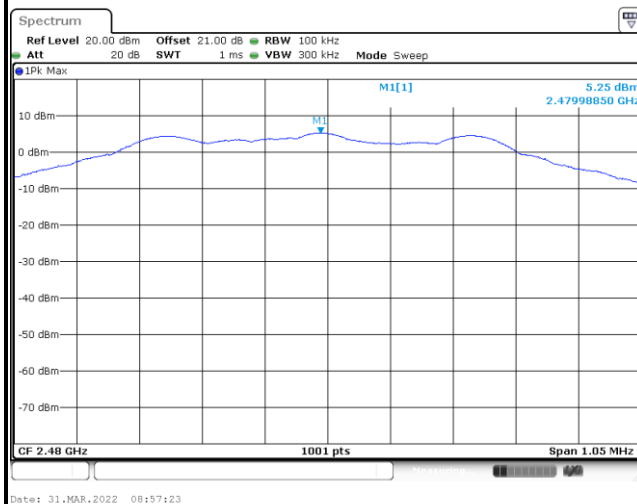

N/A



<2Mbps>

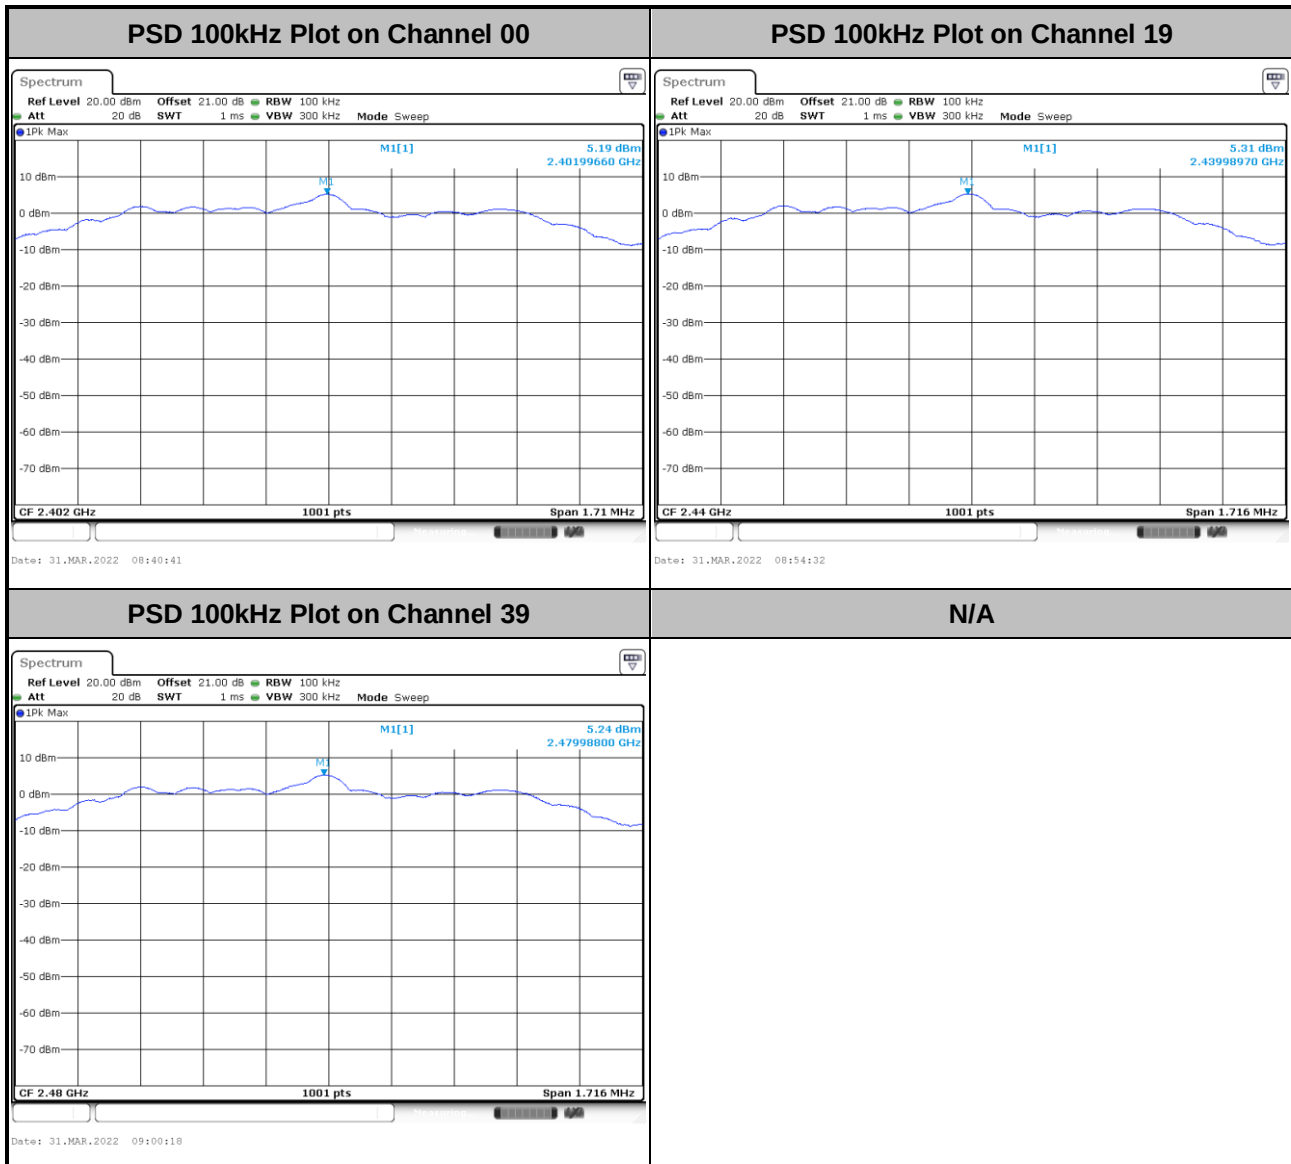




3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<1st BLE>

<1Mbps>

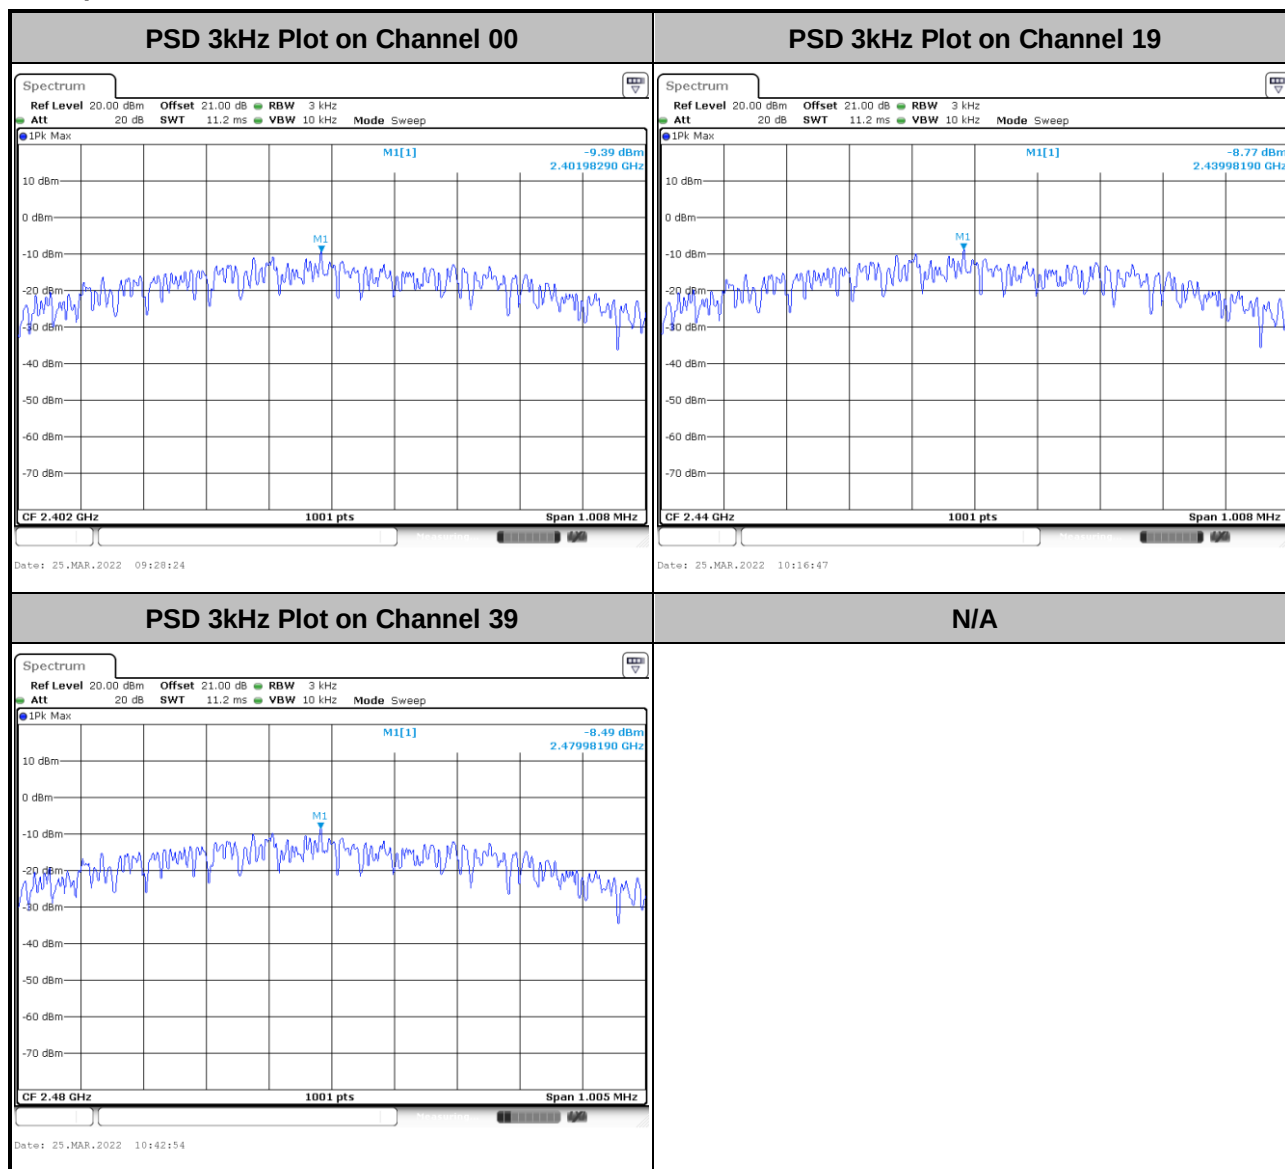




<2Mbps>

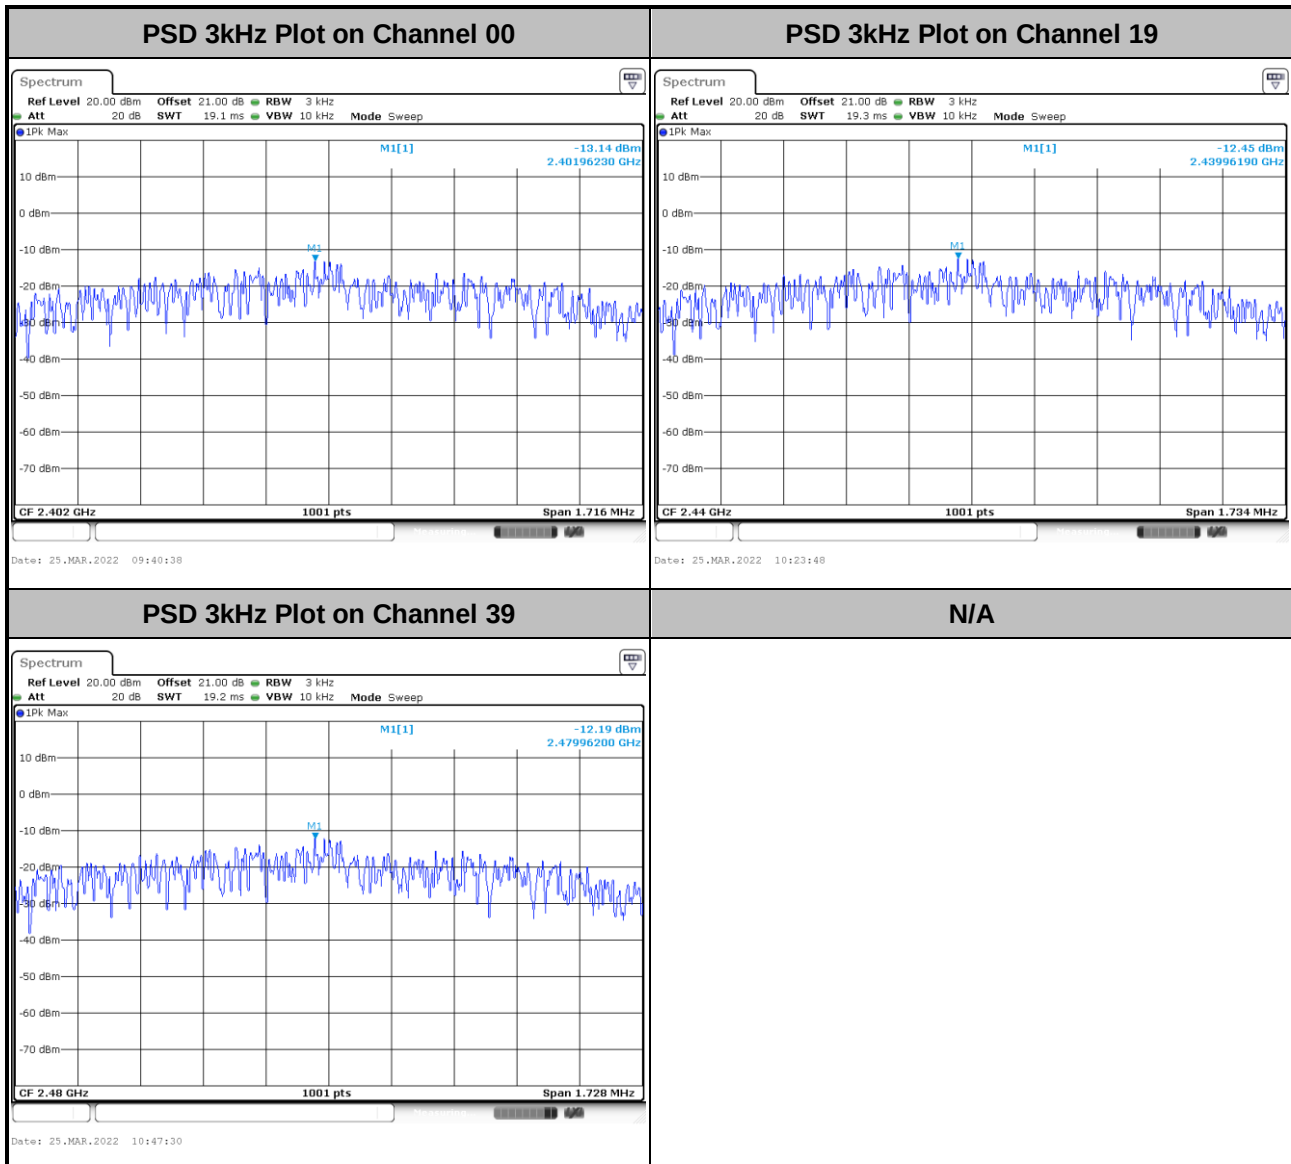




<2nd BLE>

<1Mbps>

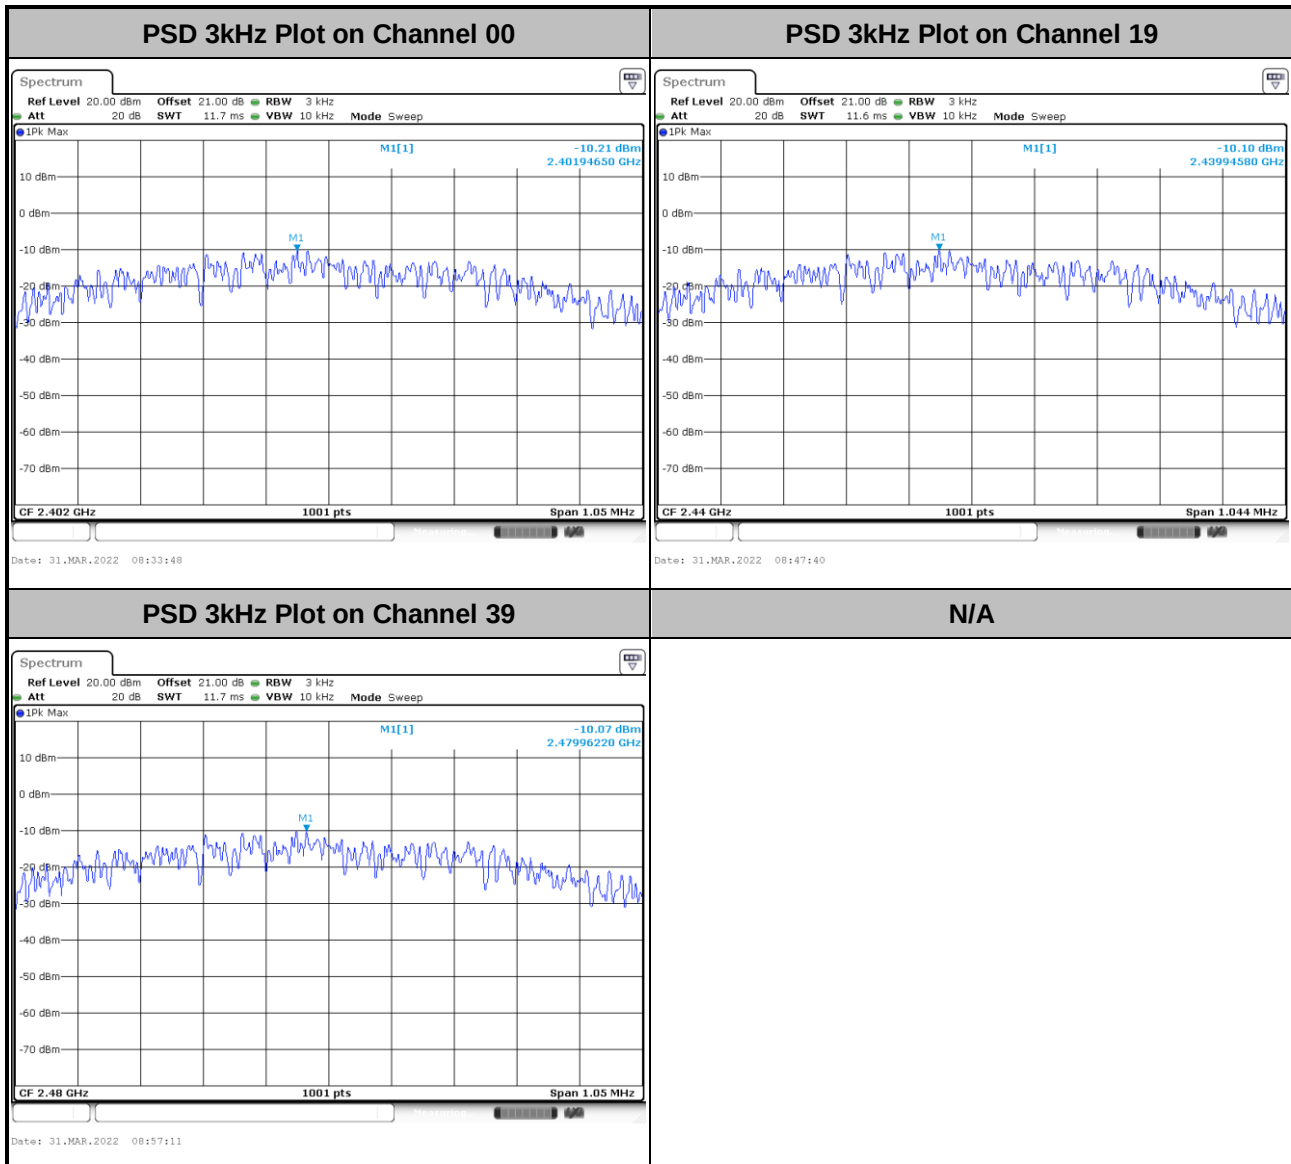



<2Mbps>

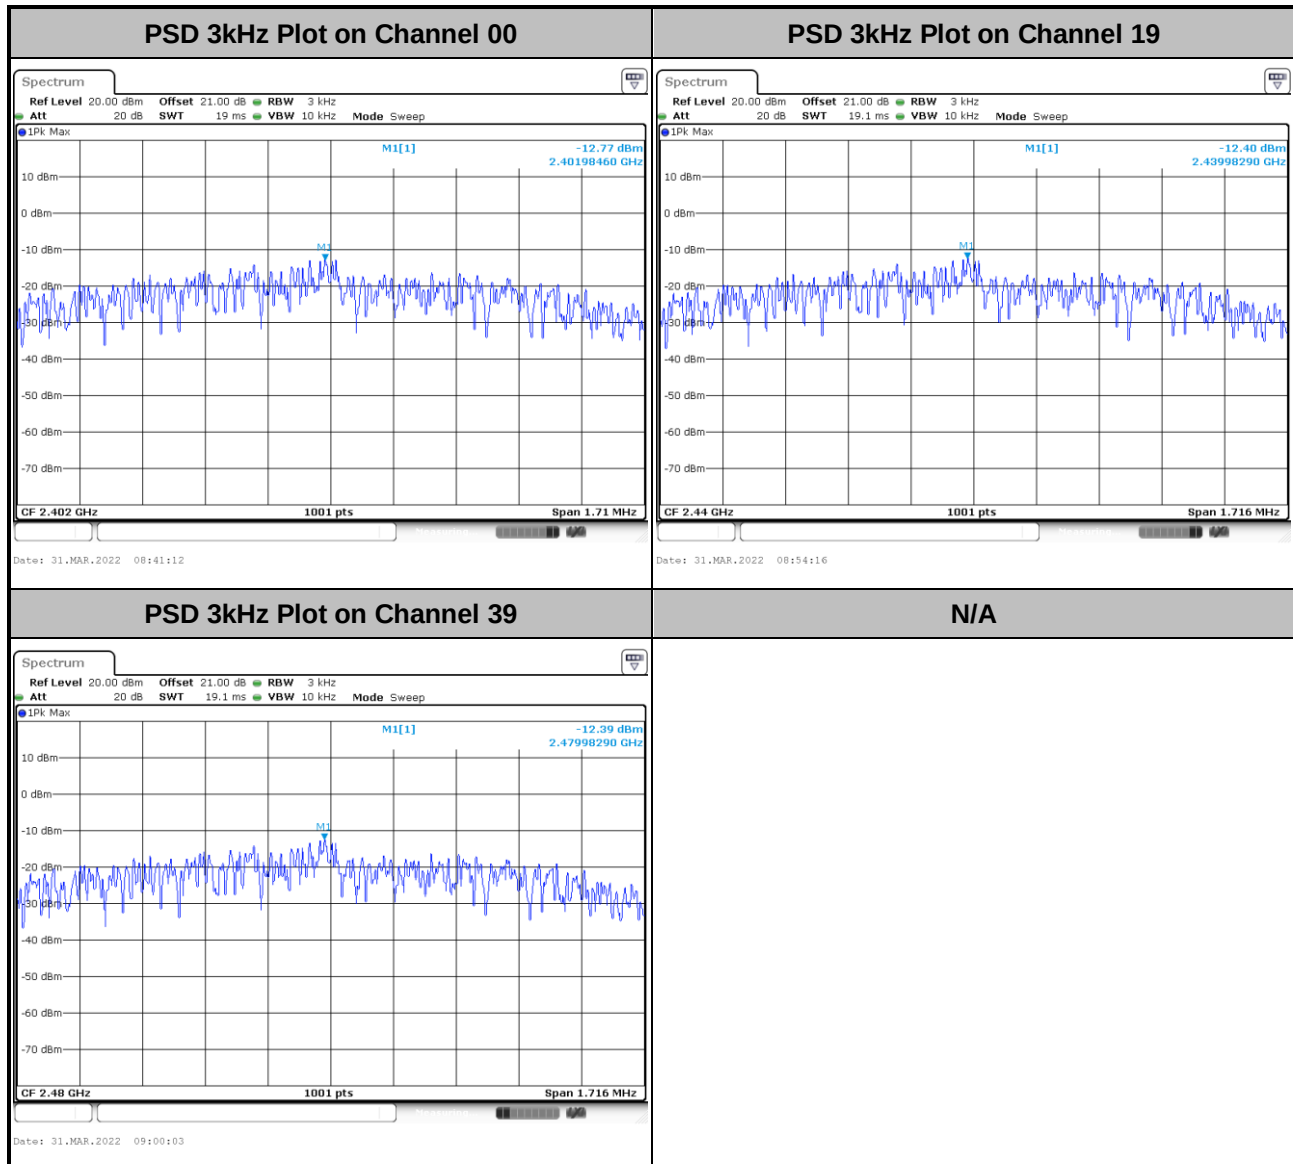

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

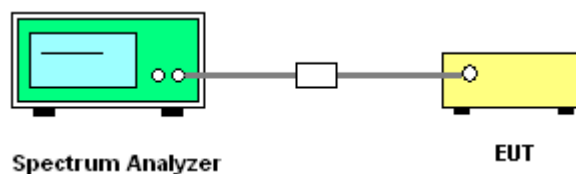





3.4.5 Test Result of Conducted Band Edges Plots

<1st BLE>

<1Mbps>

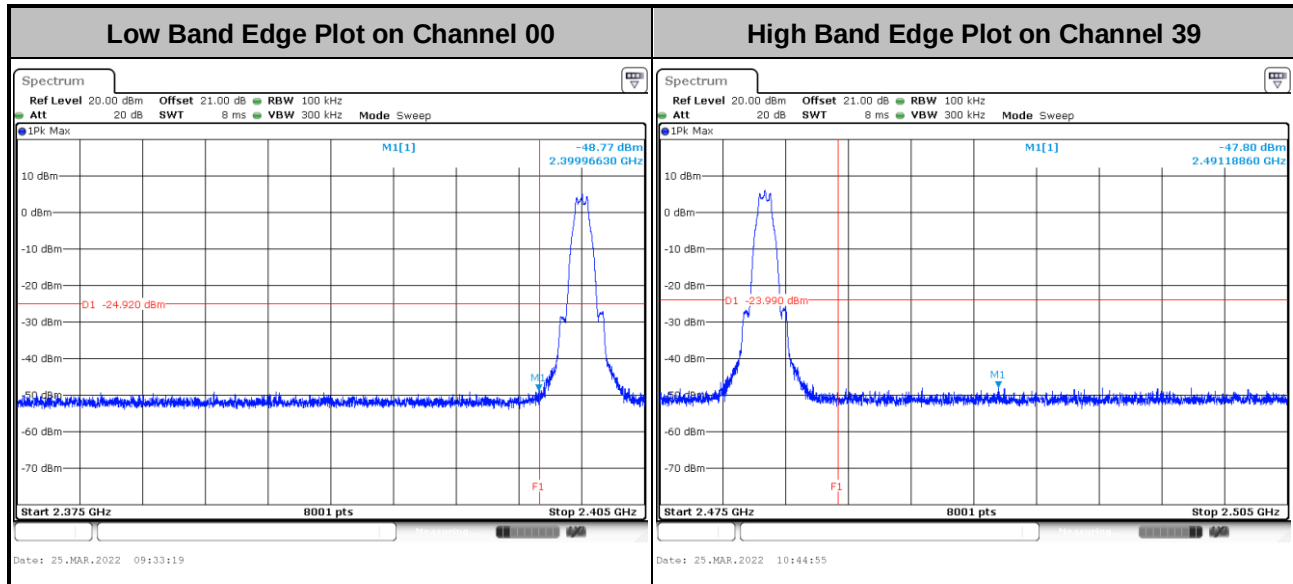


<2Mbps>

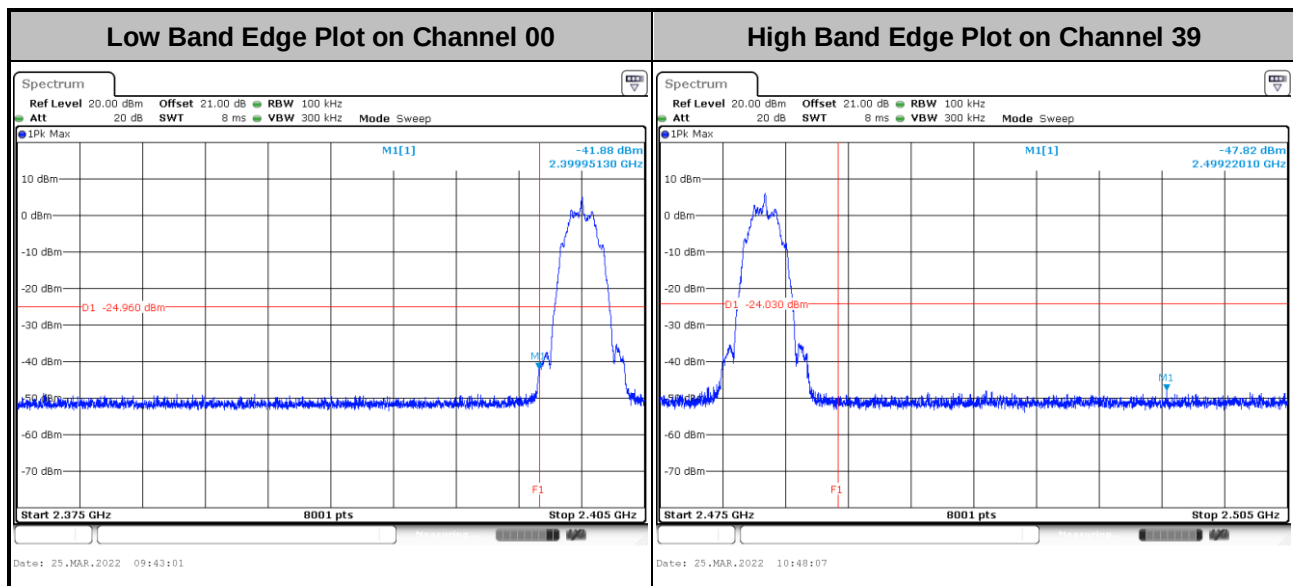


<2nd BLE>

<1Mbps>

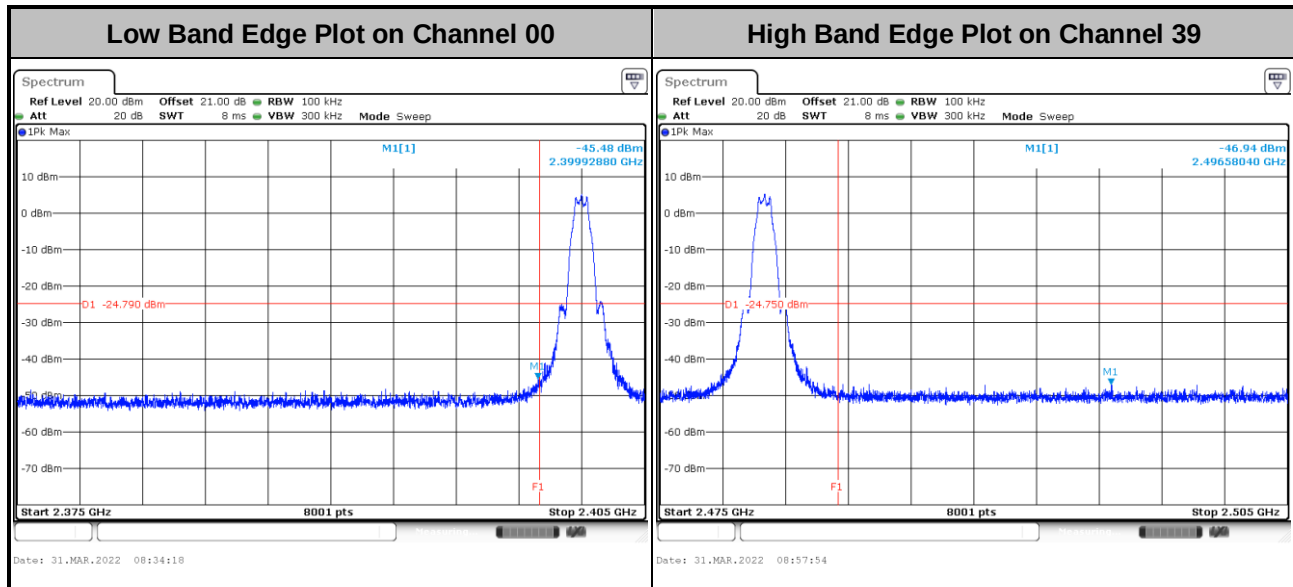

<2Mbps>

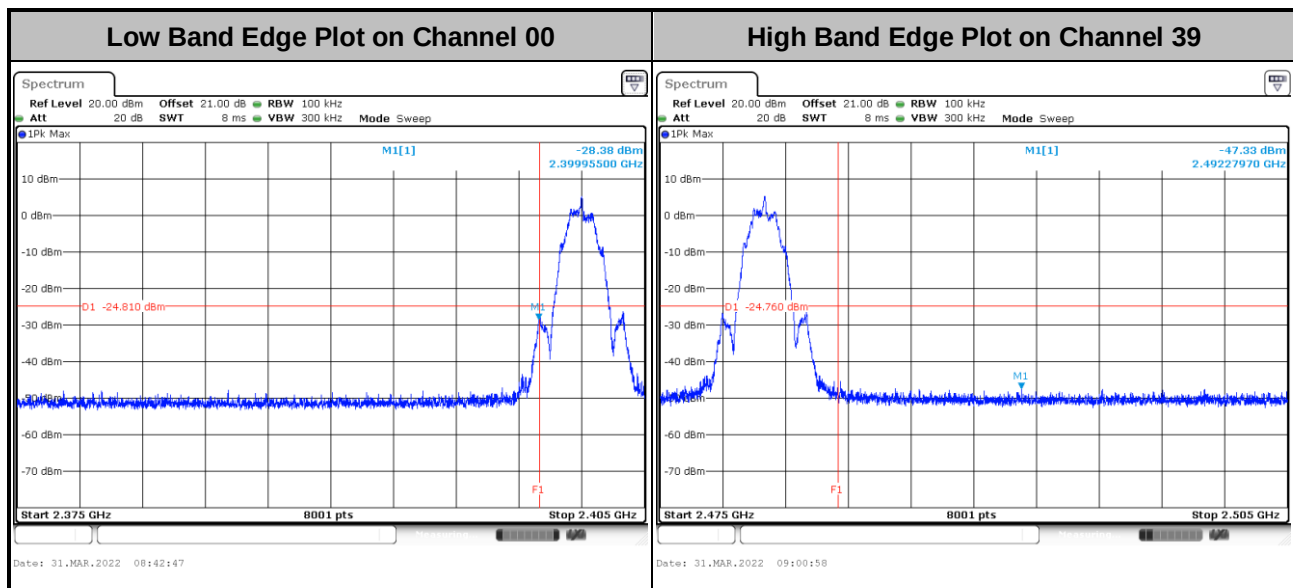




3.4.6 Test Result of Conducted Spurious Emission Plots


<1st BLE>

<1Mbps>

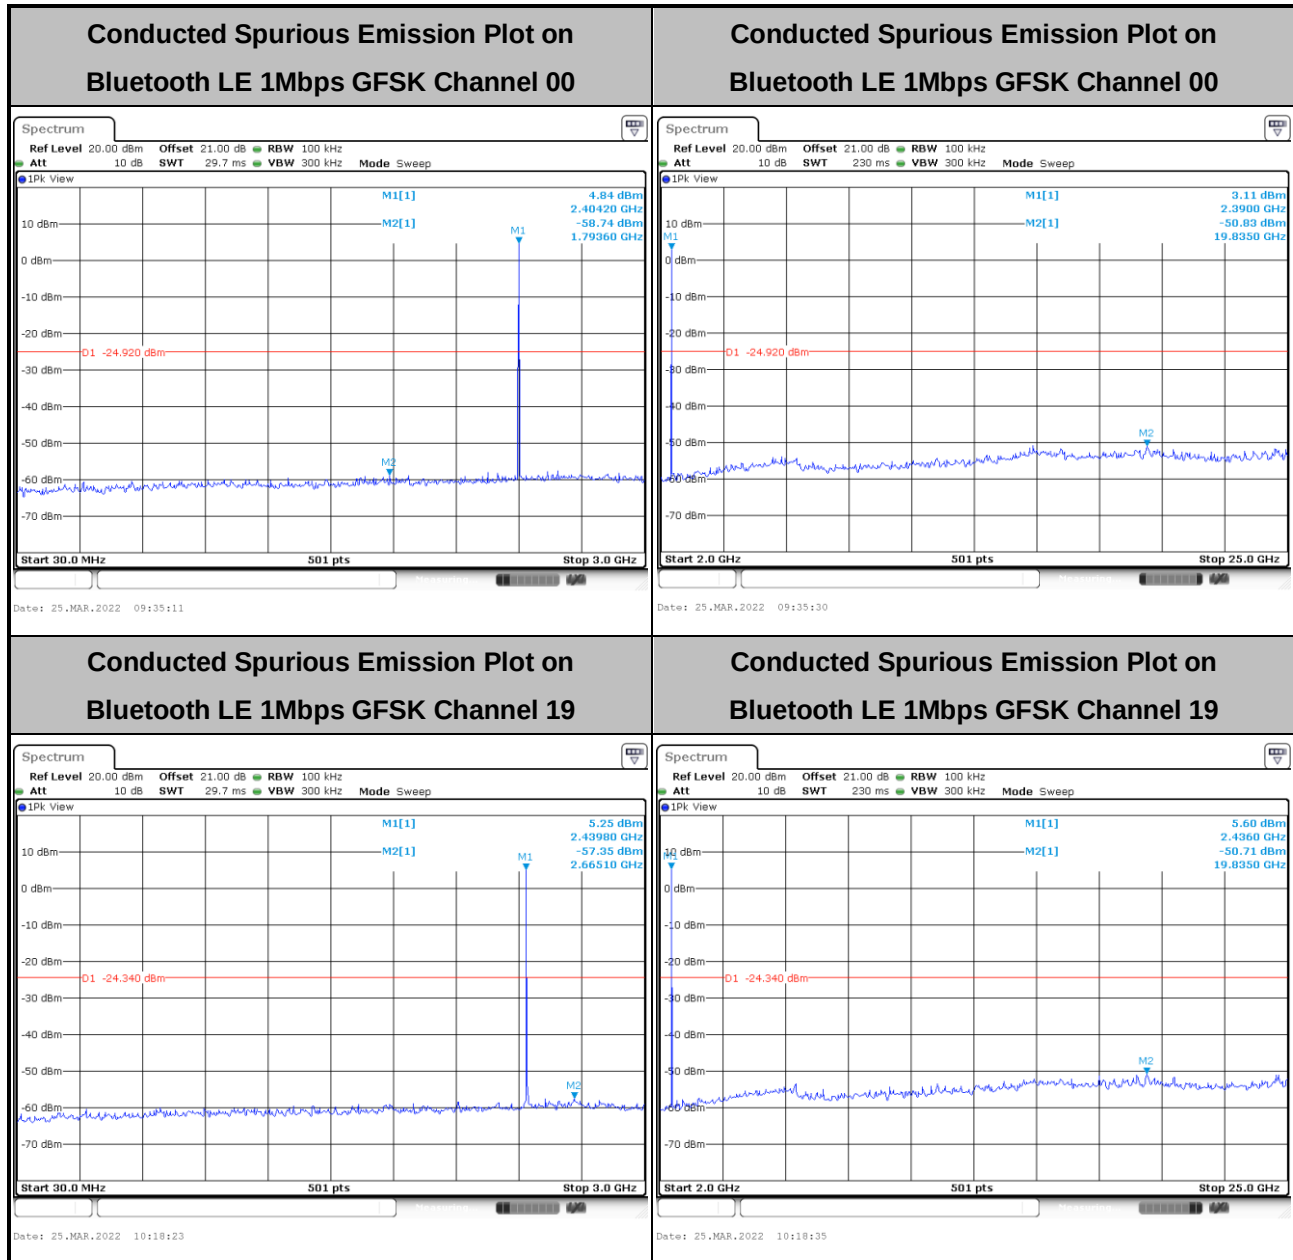




Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39




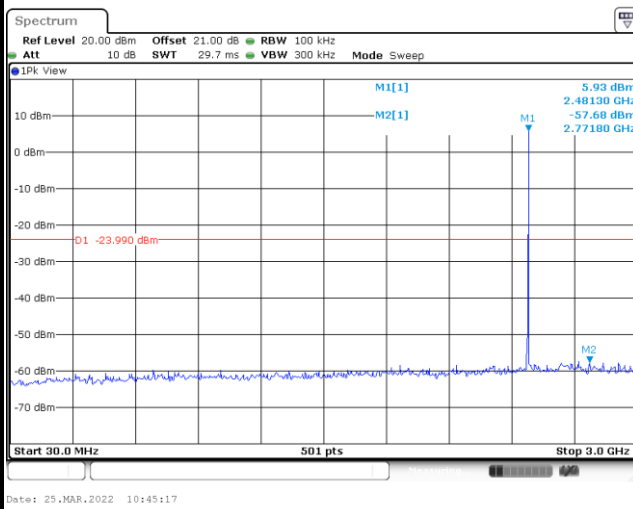




Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39

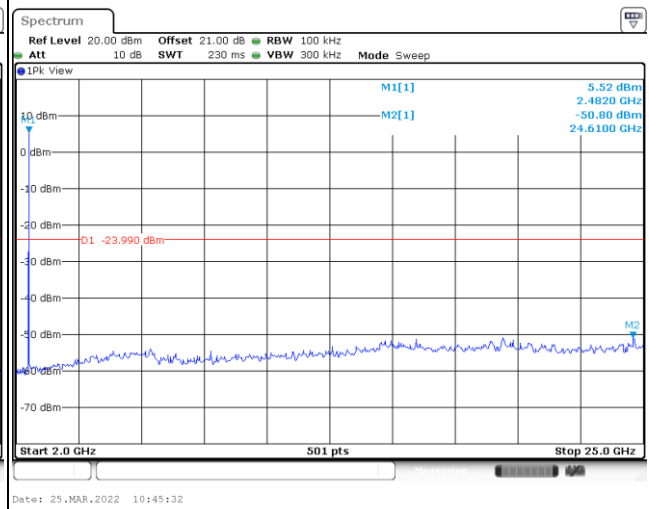







<2Mbps>

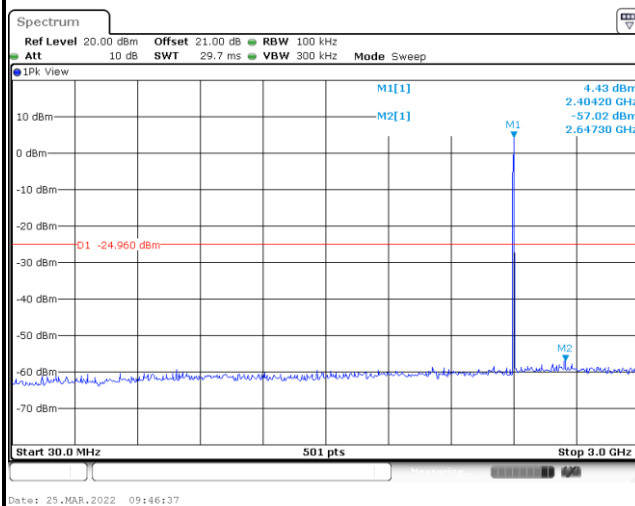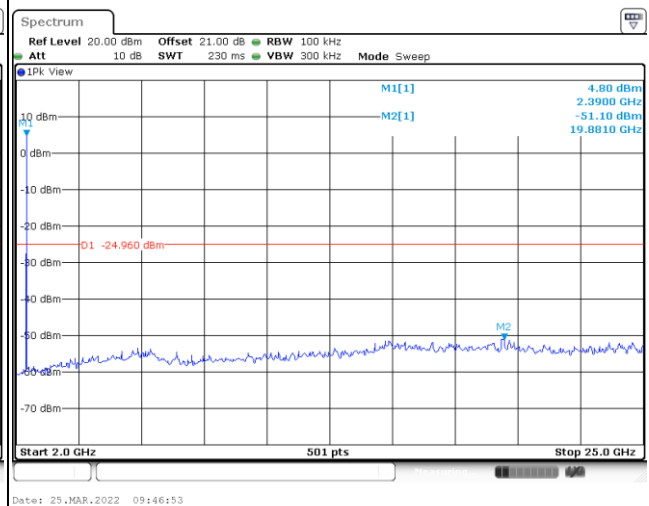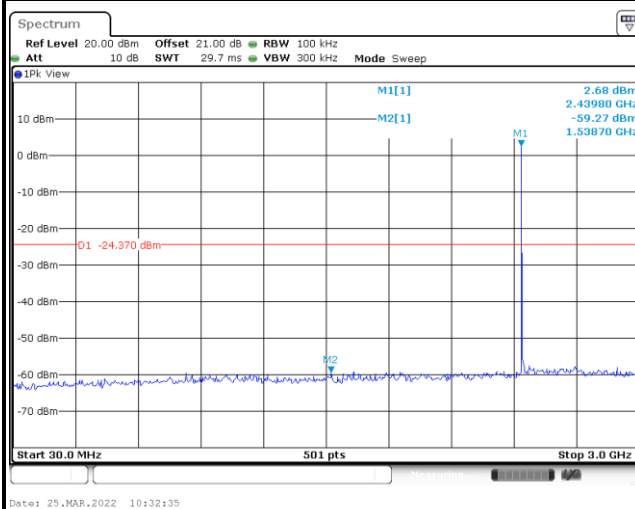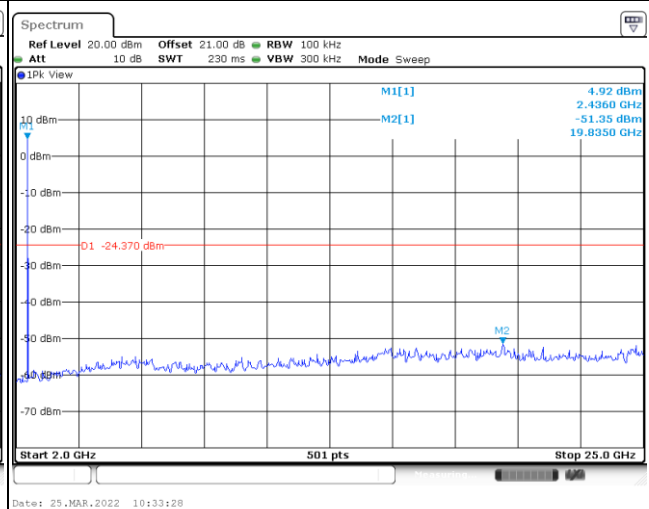**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19**

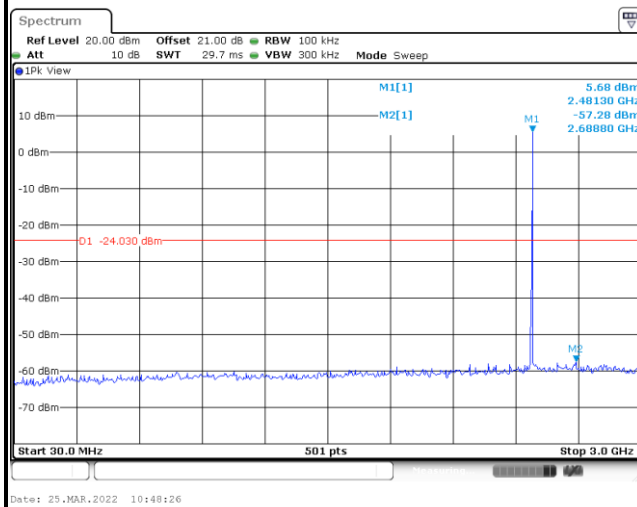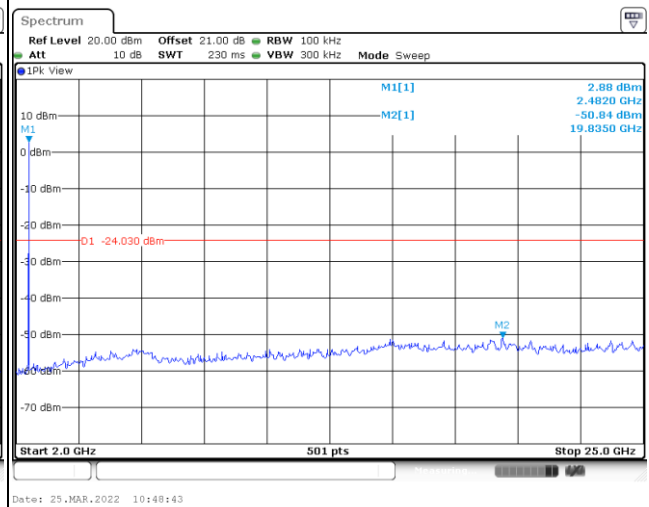**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39**


<2nd BLE>

<1Mbps>

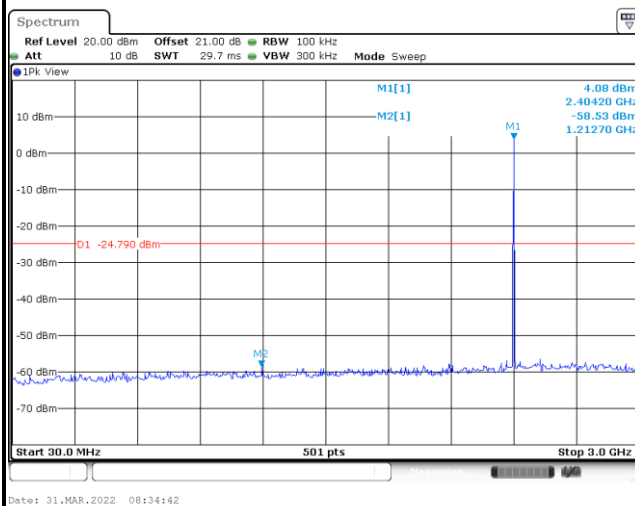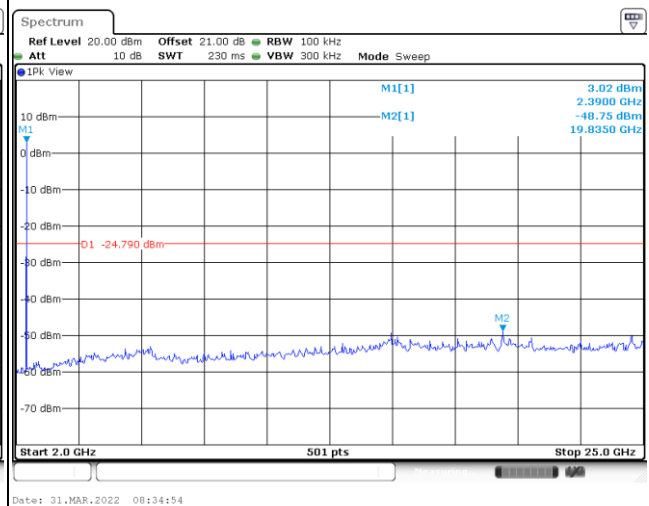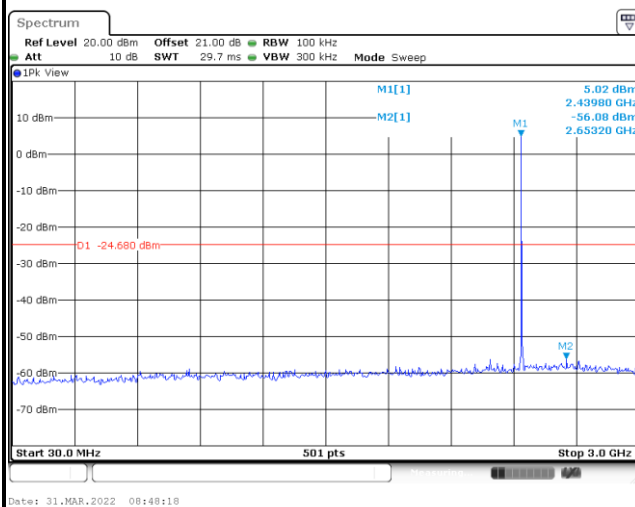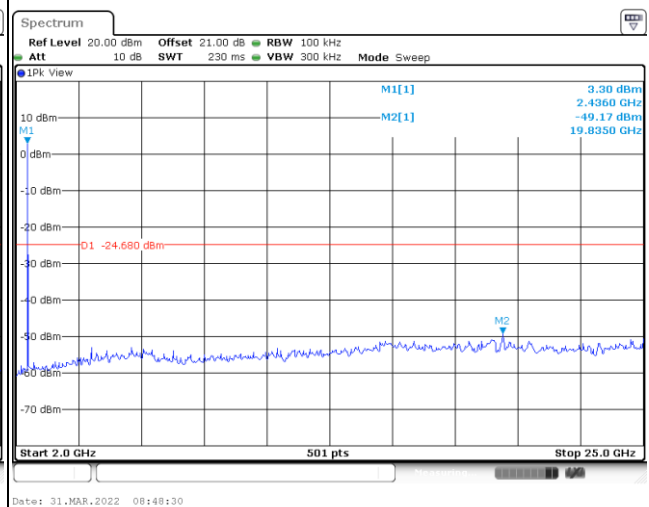
**Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 19****Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 19**



Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39




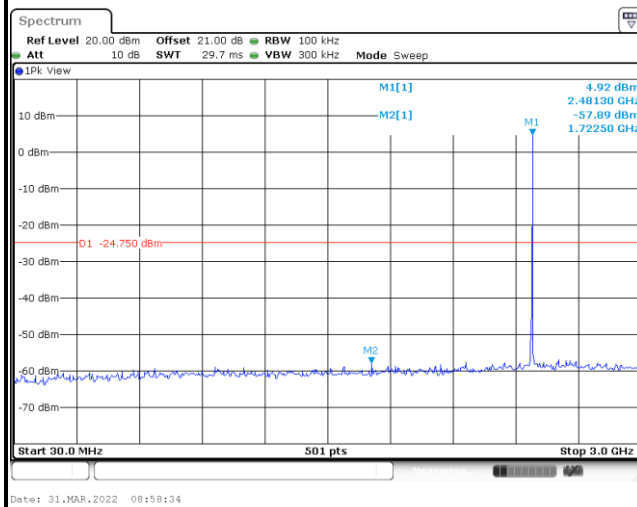


Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39

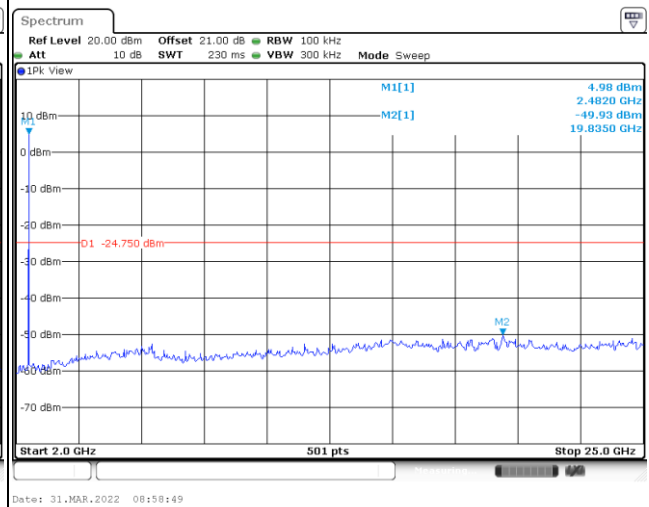




<2Mbps>

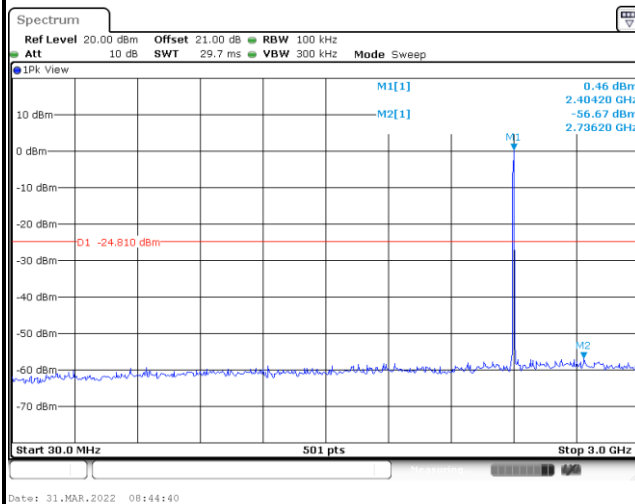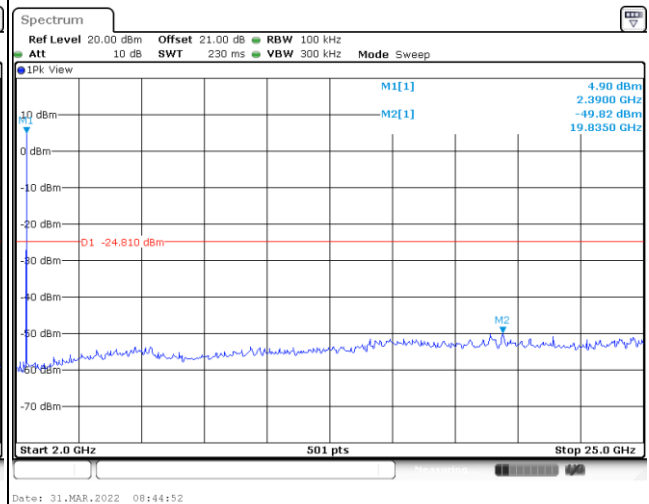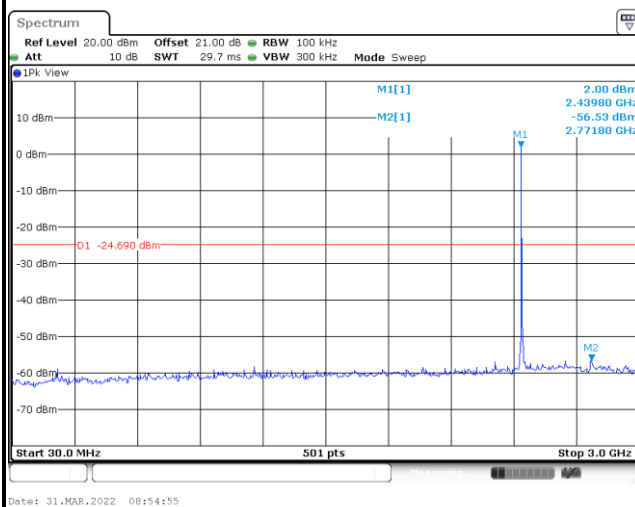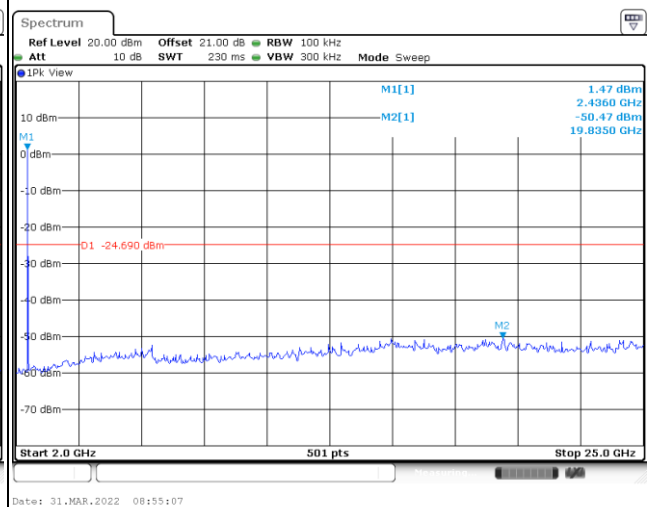
**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19**



Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39

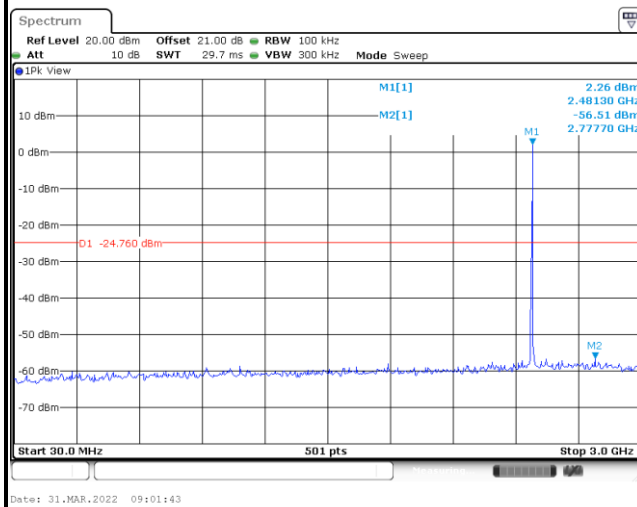

Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39

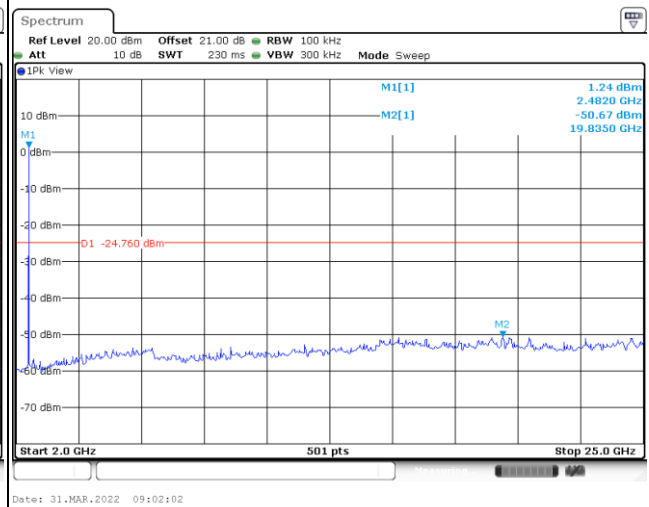



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - For average measurement:
The procedure for method trace averaging is as follows:
 - a) RBW = 1 MHz.
 - b) VBW $\geq [3 \times \text{RBW}]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - e) Sweep time = auto.


- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - 2) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

3.5.4 Test Setup


For radiated test below 30MHz

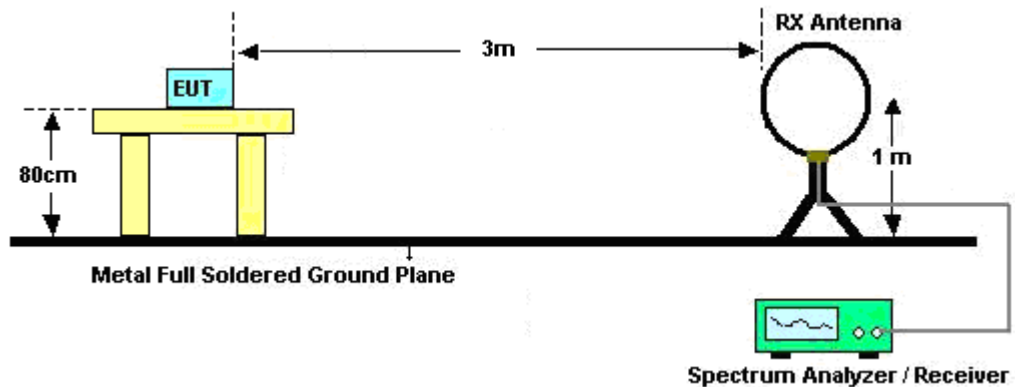


For radiated test from 30MHz to 1GHz

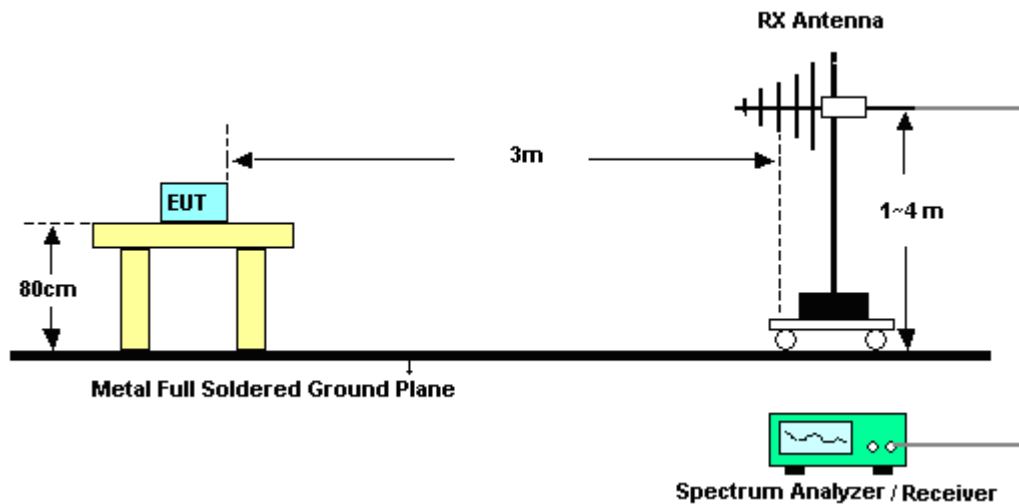

For radiated test from 1GHz to 18GHz

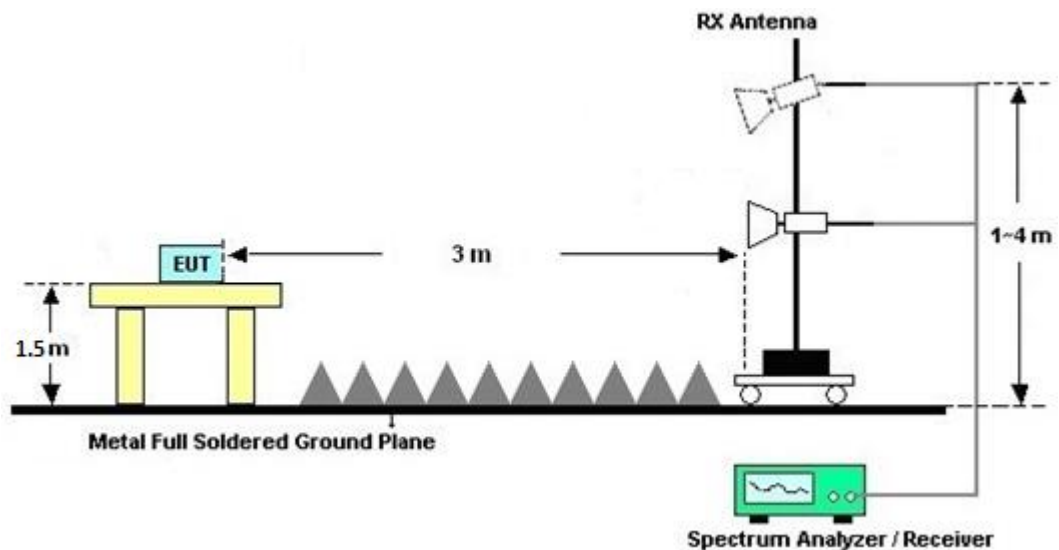

For radiated test above 18GHz

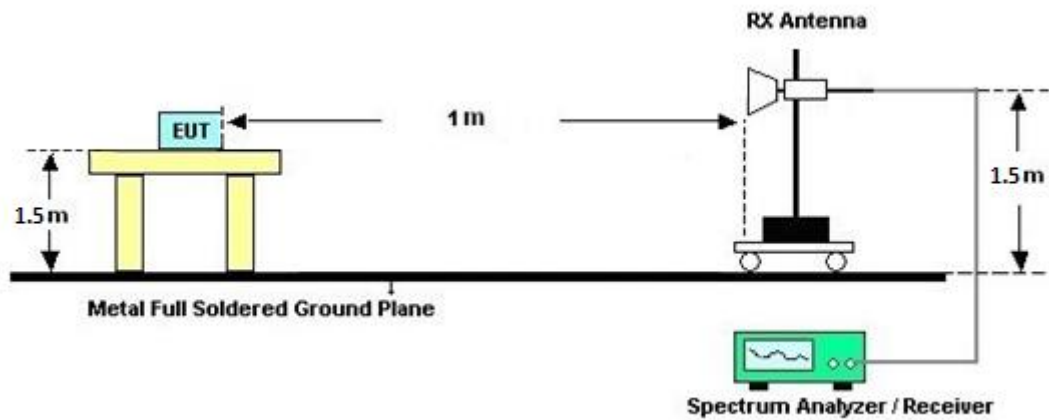

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

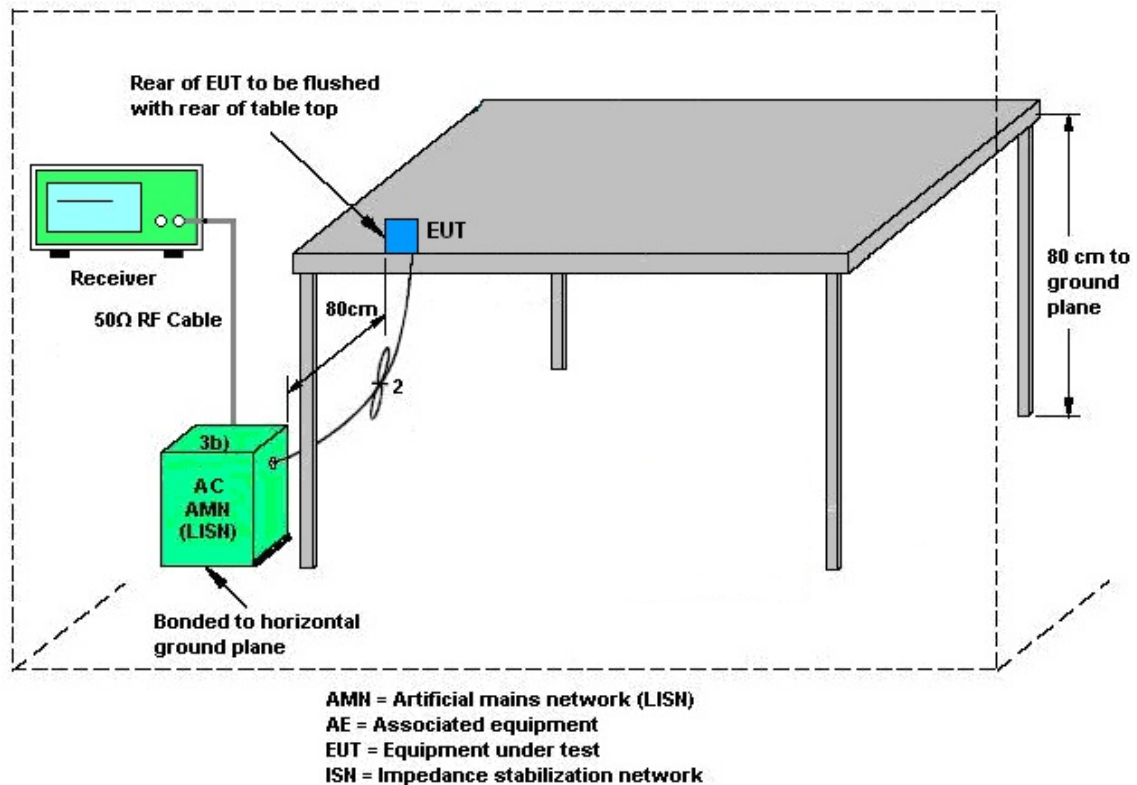

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEP	DTM-303A	TP201996	N/A	Nov. 16, 2021	Feb. 22, 2022~ Mar. 31, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Meter	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Dec. 29, 2021	Feb. 22, 2022~ Mar. 31, 2022	Dec. 28, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Feb. 22, 2022~ Mar. 31, 2022	Aug. 29, 2022	Conducted (TH05-HY)
Switch Control Manframe	E-IUSTRUMENT	ETF-1405-0	EC1900067 (BOX7)	N/A	Aug. 12, 2021	Feb. 22, 2022~ Mar. 31, 2022	Aug. 11, 2022	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Mar. 05, 2022~ Apr. 14, 2022	Sep. 06, 2022	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Mar. 05, 2022~ Apr. 14, 2022	Dec. 23, 2022	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 30, 2021	Mar. 05, 2022~ Apr. 14, 2022	Nov. 29, 2022	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 15, 2021	Mar. 05, 2022~ Apr. 14, 2022	Dec. 14, 2022	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 28, 2021	Mar. 05, 2022~ Apr. 14, 2022	Apr. 27, 2022	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 13, 2021	Mar. 05, 2022~ Apr. 14, 2022	Jul. 12, 2022	Radiation (03CH13-HY)
Hygrometer	TECEP	DTM-303B	TP200889	N/A	Sep. 30, 2021	Mar. 05, 2022~ Apr. 14, 2022	Sep. 29, 2022	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 18, 2021	Mar. 05, 2022~ Apr. 14, 2022	May 17, 2022	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 26, 2021	Mar. 05, 2022~ Apr. 14, 2022	Oct. 25, 2022	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 18, 2021	Mar. 05, 2022~ Mar. 16, 2022	Mar. 17, 2022	Radiation (03CH13-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 23, 2021	Mar. 17, 2022~ Apr. 14, 2022	Dec. 22, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 14, 2021	Mar. 05, 2022~ Apr. 14, 2022	Sep. 13, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OSS	SN2	3GHz High Pass Filter	Jul. 12, 2021	Mar. 05, 2022~ Apr. 14, 2022	Jul. 11, 2022	Radiation (03CH13-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN6	6.75GHz High Pass Filter	Jun. 30, 2021	Mar. 05, 2022~ Apr. 14, 2022	Jun. 29, 2022	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 09, 2022	Mar. 05, 2022~ Apr. 14, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 09, 2022	Mar. 05, 2022~ Apr. 14, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 09, 2022	Mar. 05, 2022~ Apr. 14, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 05, 2022~ Apr. 14, 2022	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Mar. 05, 2022~ Apr. 14, 2022	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Mar. 05, 2022~ Apr. 14, 2022	N/A	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 10, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Mar. 10, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Mar. 10, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Mar. 10, 2022	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Mar. 10, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2021	Mar. 10, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Mar. 10, 2022	Dec. 29, 2022	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.9 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ching Chen	Temperature:	21~25	°C
Test Date:	2022/2/22-2022/3/31	Relative Humidity:	51~54	%

<1st BLE>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.025	0.672	0.50	Pass
BLE	1Mbps	1	19	2440	1.025	0.672	0.50	Pass
BLE	1Mbps	1	39	2480	1.023	0.670	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.70	30.00	2.50	8.20	36.00	Pass
BLE	1Mbps	1	19	2440	6.40	30.00	2.50	8.90	36.00	Pass
BLE	1Mbps	1	39	2480	6.80	30.00	2.50	9.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.08	-9.39	2.50	8.00	Pass
BLE	1Mbps	1	19	2440	5.66	-8.77	2.50	8.00	Pass
BLE	1Mbps	1	39	2480	6.01	-8.49	2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE5.1	2Mbps	1	0	2402	2.030	1.144	0.50	Pass
BLE5.1	2Mbps	1	19	2440	2.026	1.156	0.50	Pass
BLE5.1	2Mbps	1	39	2480	2.026	1.152	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.1	2Mbps	1	0	2402	5.70	30.00	2.50	8.20	36.00	Pass
BLE5.1	2Mbps	1	19	2440	6.40	30.00	2.50	8.90	36.00	Pass
BLE5.1	2Mbps	1	39	2480	6.80	30.00	2.50	9.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE5.1	2Mbps	1	0	2402	5.04	-13.14	2.50	8.00	Pass
BLE5.1	2Mbps	1	19	2440	5.63	-12.45	2.50	8.00	Pass
BLE5.1	2Mbps	1	39	2480	5.97	-12.19	2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<2nd BLE>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.043	0.700	0.50	Pass
BLE	1Mbps	1	19	2440	1.045	0.696	0.50	Pass
BLE	1Mbps	1	39	2480	1.049	0.700	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.60	30.00	2.50	8.10	36.00	Pass
BLE	1Mbps	1	19	2440	5.70	30.00	2.50	8.20	36.00	Pass
BLE	1Mbps	1	39	2480	5.80	30.00	2.50	8.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.21	-10.21	2.50	8.00	Pass
BLE	1Mbps	1	19	2440	5.32	-10.10	2.50	8.00	Pass
BLE	1Mbps	1	39	2480	5.25	-10.07	2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE5.1	2Mbps	1	0	2402	2.034	1.140	0.50	Pass
BLE5.1	2Mbps	1	19	2440	2.030	1.144	0.50	Pass
BLE5.1	2Mbps	1	39	2480	2.038	1.144	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.1	2Mbps	1	0	2402	5.60	30.00	2.50	8.10	36.00	Pass
BLE5.1	2Mbps	1	19	2440	5.70	30.00	2.50	8.20	36.00	Pass
BLE5.1	2Mbps	1	39	2480	5.80	30.00	2.50	8.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE5.1	2Mbps	1	0	2402	5.19	-12.77	2.50	8.00	Pass
BLE5.1	2Mbps	1	19	2440	5.31	-12.40	2.50	8.00	Pass
BLE5.1	2Mbps	1	39	2480	5.24	-12.39	2.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 1N0508
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

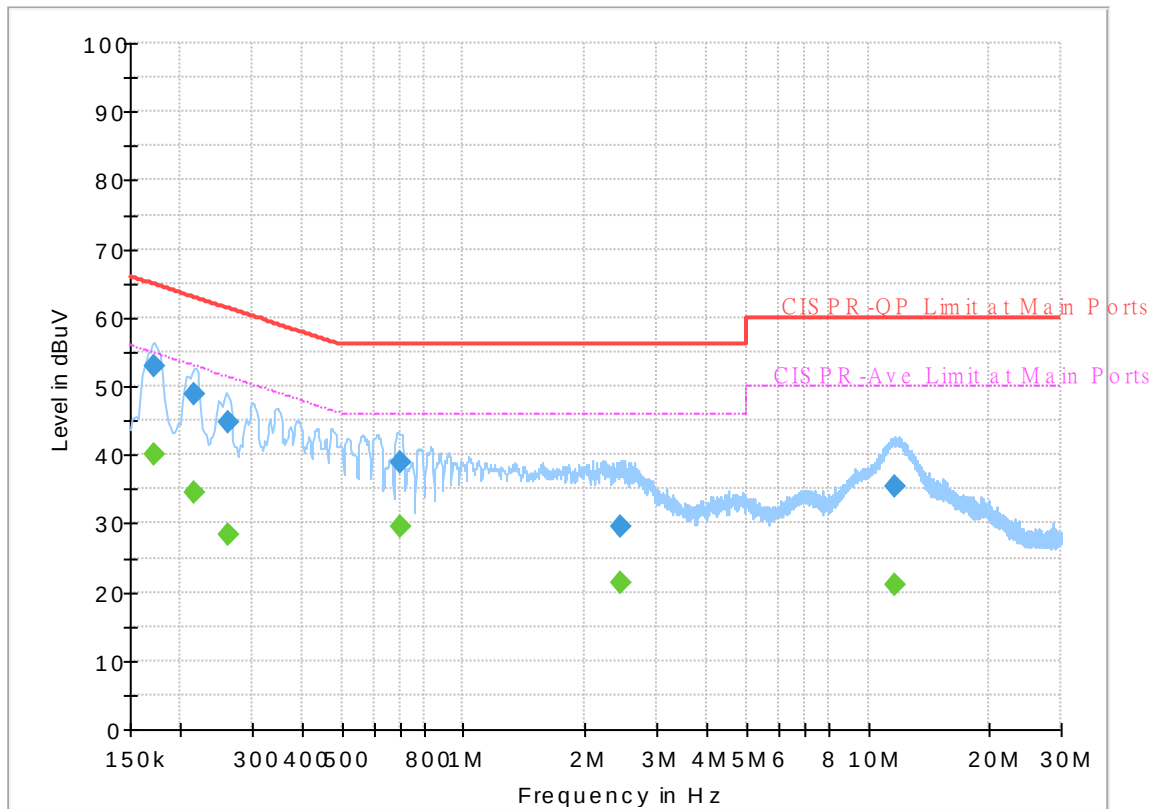


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172500	---	40.12	54.84	14.72	L1	OFF	19.6
0.172500	52.87	---	64.84	11.97	L1	OFF	19.6
0.215250	---	34.45	53.00	18.55	L1	OFF	19.6
0.215250	48.78	---	63.00	14.22	L1	OFF	19.6
0.262500	---	28.31	51.35	23.04	L1	OFF	19.6
0.262500	44.70	---	61.35	16.65	L1	OFF	19.6
0.694500	---	29.46	46.00	16.54	L1	OFF	19.6
0.694500	38.83	---	56.00	17.17	L1	OFF	19.6
2.456250	---	21.27	46.00	24.73	L1	OFF	19.6
2.456250	29.64	---	56.00	26.36	L1	OFF	19.6
11.625000	---	21.16	50.00	28.84	L1	OFF	19.8
11.625000	35.27	---	60.00	24.73	L1	OFF	19.8

EUT Information

Report NO : 1N0508
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

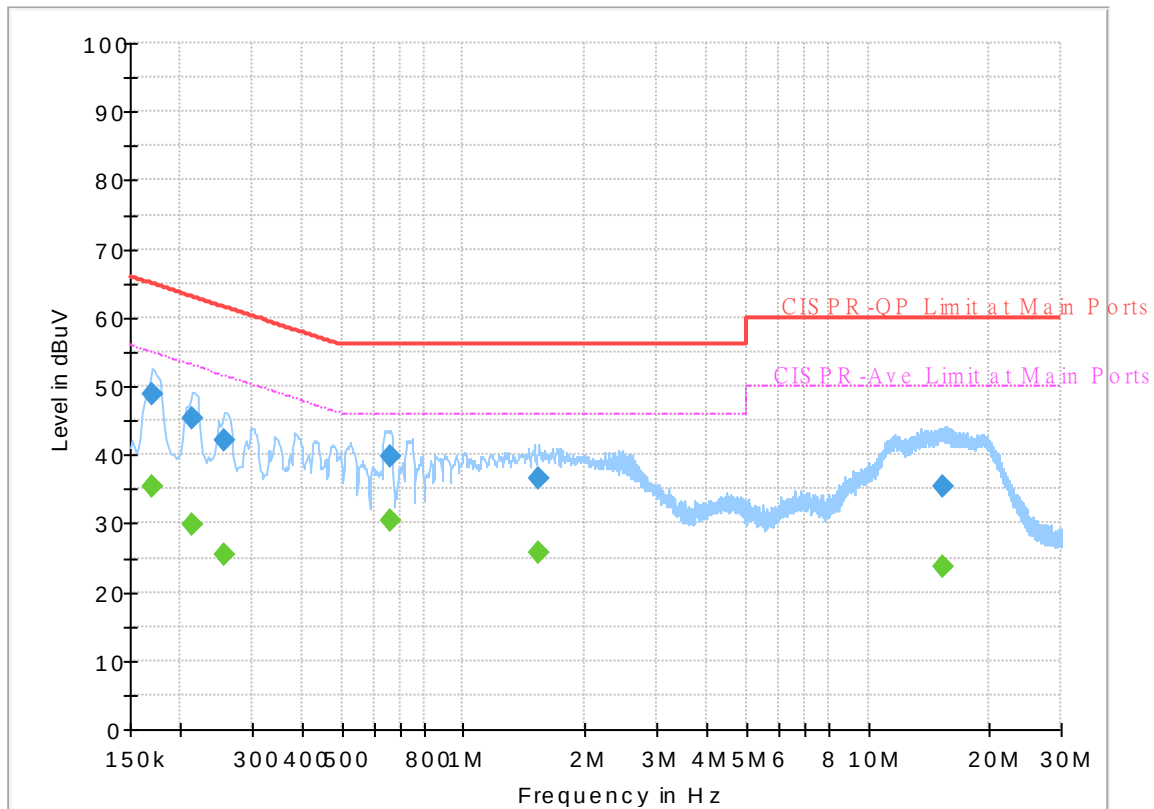

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170250	---	35.42	54.95	19.53	N	OFF	19.6
0.170250	48.69	---	64.95	16.26	N	OFF	19.6
0.213000	---	29.94	53.09	23.15	N	OFF	19.6
0.213000	45.22	---	63.09	17.87	N	OFF	19.6
0.255750	---	25.32	51.57	26.25	N	OFF	19.6
0.255750	42.20	---	61.57	19.37	N	OFF	19.6
0.656250	---	30.49	46.00	15.51	N	OFF	19.6
0.656250	39.76	---	56.00	16.24	N	OFF	19.6
1.538250	---	25.66	46.00	20.34	N	OFF	19.6
1.538250	36.59	---	56.00	19.41	N	OFF	19.6
15.265500	---	23.76	50.00	26.24	N	OFF	19.9
15.265500	35.44	---	60.00	24.56	N	OFF	19.9



Appendix C. Radiated Spurious Emission

Test Engineer :	Yuan Lee, Jacky Hong, Peter Liao	Temperature :	20~25°C
		Relative Humidity :	50~60%

<1st BLE>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2374.05	56.41	-17.59	74	41.68	27.75	14.05	27.07	100	82	P	H
		2375.94	46.88	-7.12	54	32.15	27.75	14.05	27.07	100	82	A	H
	*	2402	101.28	-	-	86.57	27.7	14.07	27.06	100	82	P	H
	*	2402	97.06	-	-	82.35	27.7	14.07	27.06	100	82	A	H
													H
													H
		2352.21	55.1	-18.9	74	40.35	27.8	14.03	27.08	108	75	P	V
		2335.41	46.97	-7.03	54	32.12	27.92	14.01	27.08	108	75	A	V
	*	2402	94.4	-	-	79.69	27.7	14.07	27.06	108	75	P	V
	*	2402	89.76	-	-	75.05	27.7	14.07	27.06	108	75	A	V
													V
													V
BLE CH 19 2440MHz		2349.62	57.1	-16.9	74	42.36	27.8	14.02	27.08	100	80	P	H
		2373.98	46.78	-7.22	54	32.05	27.75	14.05	27.07	100	80	A	H
	*	2440	101.15	-	-	86.47	27.62	14.11	27.05	100	80	P	H
	*	2440	96.86	-	-	82.18	27.62	14.11	27.05	100	80	A	H
		2485.86	55.94	-18.06	74	41.15	27.67	14.15	27.03	100	80	P	H
		2485.23	46.76	-7.24	54	31.97	27.67	14.15	27.03	100	80	A	H
		2358.02	56.13	-17.87	74	41.4	27.78	14.03	27.08	100	58	P	V
		2317.7	46.87	-7.13	54	31.9	28.06	14	27.09	100	58	A	V
	*	2440	96.03	-	-	81.35	27.62	14.11	27.05	100	58	P	V
	*	2440	92.06	-	-	77.38	27.62	14.11	27.05	100	58	A	V
		2492.02	55.1	-18.9	74	40.3	27.68	14.15	27.03	100	58	P	V
		2486.77	46.81	-7.19	54	32.02	27.67	14.15	27.03	100	58	A	V



BLE CH 39 2480MHz	*	2480	102.5	-	-	87.74	27.66	14.14	27.04	100	85	P	H
	*	2480	98.18	-	-	83.42	27.66	14.14	27.04	100	85	A	H
		2493.4	55.64	-18.36	74	40.83	27.69	14.15	27.03	100	85	P	H
		2496.4	46.83	-7.17	54	32.01	27.69	14.16	27.03	100	85	A	H
													H
													H
	*	2480	96.38	-	-	81.62	27.66	14.14	27.04	100	60	P	V
	*	2480	92.76	-	-	78	27.66	14.14	27.04	100	60	A	V
		2485.56	55.44	-18.56	74	40.65	27.67	14.15	27.03	100	60	P	V
		2489.44	46.77	-7.23	54	31.97	27.68	14.15	27.03	100	60	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.37	-34.63	74	58.26	31.41	6.79	57.09	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	38.97	-35.03	74	57.86	31.41	6.79	57.09	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	39.86	-34.14	74	58.56	31.44	6.82	56.96	-	-	P	H
		7320	45.71	-28.29	74	57.11	37.06	8.46	56.92	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	39.44	-34.56	74	58.14	31.44	6.82	56.96	-	-	P	V
		7320	45.6	-28.4	74	57	37.06	8.46	56.92	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	39.5	-34.5	74	57.73	31.72	6.86	56.81	-	-	P	H
		7440	44.51	-29.49	74	56.13	37.02	8.53	57.17	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4960	39.11	-34.89	74	57.34	31.72	6.86	56.81	-	-	P	V
		7440	45.4	-28.6	74	57.02	37.02	8.53	57.17	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2331.63	55.45	-18.55	74	40.57	27.95	14.01	27.08	385	58	P	H
		2324.91	49.6	-4.4	54	34.69	28	14	27.09	385	58	A	H
	*	2402	100.02	-	-	85.31	27.7	14.07	27.06	385	58	P	H
	*	2402	95.03	-	-	80.32	27.7	14.07	27.06	385	58	A	H
													H
													H
		2354.835	55.42	-18.58	74	40.68	27.79	14.03	27.08	107	121	P	V
		2318.82	49.48	-4.52	54	34.52	28.05	14	27.09	107	121	A	V
	*	2402	100.76	-	-	86.05	27.7	14.07	27.06	107	121	P	V
	*	2402	95.59	-	-	80.88	27.7	14.07	27.06	107	121	A	V
													V
													V
BLE CH 19 2440MHz		2310.98	55.14	-18.86	74	40.13	28.11	13.99	27.09	374	63	P	H
		2310.28	49.81	-4.19	54	34.79	28.12	13.99	27.09	374	63	A	H
	*	2440	100.3	-	-	85.62	27.62	14.11	27.05	374	63	P	H
	*	2440	95.8	-	-	81.12	27.62	14.11	27.05	374	63	A	H
		2496.29	55.47	-18.53	74	40.65	27.69	14.16	27.03	374	63	P	H
		2484.04	49.56	-4.44	54	34.78	27.67	14.15	27.04	374	63	A	H
		2369.64	55.31	-18.69	74	40.58	27.76	14.04	27.07	100	124	P	V
		2329.74	49.62	-4.38	54	34.73	27.96	14.01	27.08	100	124	A	V
	*	2440	101.57	-	-	86.89	27.62	14.11	27.05	100	124	P	V
	*	2440	97.68	-	-	83	27.62	14.11	27.05	100	124	A	V
		2494.96	55.86	-18.14	74	41.04	27.69	14.16	27.03	100	124	P	V
		2488.73	49.52	-4.48	54	34.72	27.68	14.15	27.03	100	124	A	V



BLE CH 39 2480MHz	*	2480	100.83	-	-	86.07	27.66	14.14	27.04	355	58	P	H
	*	2480	96.63	-	-	81.87	27.66	14.14	27.04	355	58	A	H
		2483.52	56.42	-17.58	74	41.64	27.67	14.15	27.04	355	58	P	H
		2498.44	49.65	-4.35	54	34.82	27.7	14.16	27.03	355	58	A	H
													H
													H
	*	2480	102.22	-	-	87.46	27.66	14.14	27.04	100	119	P	V
	*	2480	97.6	-	-	82.84	27.66	14.14	27.04	100	119	A	V
		2483.6	56.82	-17.18	74	42.04	27.67	14.15	27.04	100	119	P	V
		2484.28	49.74	-4.26	54	34.96	27.67	14.15	27.04	100	119	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.76	-34.24	74	58.65	31.41	6.79	57.09	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	39.48	-34.52	74	58.37	31.41	6.79	57.09	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	40.19	-33.81	74	58.89	31.44	6.82	56.96	-	-	P	H
		7320	45.34	-28.66	74	56.74	37.06	8.46	56.92	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	40.36	-33.64	74	59.06	31.44	6.82	56.96	-	-	P	V
		7320	45.5	-28.5	74	56.9	37.06	8.46	56.92	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30.97	21.55	-18.45	40	29.33	23.85	0.72	32.35	-	-	P	H
		121.18	23.93	-19.57	43.5	37.62	17.48	1.13	32.3	-	-	P	H
		184.23	23.3	-20.2	43.5	39.5	14.8	1.27	32.27	-	-	P	H
		304.51	25.49	-20.51	46	36.76	19.3	1.6	32.17	-	-	P	H
		640.13	27.11	-18.89	46	31.03	26.05	2.25	32.22	-	-	P	H
		952.47	32.19	-13.81	46	30.3	30.43	2.56	31.1	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		30	22.72	-17.28	40	29.77	24.57	0.72	32.34	-	-	P	V
		106.63	24.2	-19.3	43.5	38.91	16.55	1.07	32.33	-	-	P	V
		120.21	28.9	-14.6	43.5	42.57	17.5	1.13	32.3	-	-	P	V
		322.94	23.97	-22.03	46	35	19.48	1.65	32.16	-	-	P	V
		568.35	26.79	-19.21	46	31.04	25.87	2.13	32.25	-	-	P	V
		955.38	32.52	-13.48	46	30.46	30.56	2.57	31.07	-	-	P	V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

<2nd BLE>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2364.39	56.37	-17.63	74	41.63	27.77	14.04	27.07	330	291	P	H
		2327.535	48.84	-5.16	54	31.94	27.98	16.01	27.09	330	291	A	H
	*	2402	99.78	-	-	85.07	27.7	14.07	27.06	330	291	P	H
	*	2402	95.03	-	-	78.31	27.7	16.08	27.06	330	291	A	H
													H
													H
		2363.34	56.63	-17.37	74	41.89	27.77	14.04	27.07	377	360	P	V
		2315.565	49.08	-4.92	54	32.09	28.08	16	27.09	377	360	A	V
	*	2402	98	-	-	83.29	27.7	14.07	27.06	377	360	P	V
	*	2402	93.05	-	-	76.33	27.7	16.08	27.06	377	360	A	V
		2363.34	56.63	-17.37	74	41.89	27.77	14.04	27.07	377	360	P	V
													V
BLE CH 19 2440MHz		2315.6	56.1	-17.9	74	41.12	28.08	13.99	27.09	306	294	P	H
		2312.66	48.74	-5.26	54	31.73	28.1	16	27.09	306	294	A	H
	*	2440	100.08	-	-	85.4	27.62	14.11	27.05	306	294	P	H
	*	2440	96.06	-	-	79.37	27.62	16.12	27.05	306	294	A	H
		2499.16	55.71	-18.29	74	40.88	27.7	14.16	27.03	306	294	P	H
		2496.29	48.4	-5.6	54	31.57	27.69	16.17	27.03	306	294	A	H
		2389.8	56.09	-17.91	74	41.38	27.72	14.06	27.07	257	353	P	V
		2319.52	48.76	-5.24	54	31.8	28.04	16.01	27.09	257	353	A	V
	*	2440	98.86	-	-	84.18	27.62	14.11	27.05	257	353	P	V
	*	2440	93.9	-	-	77.21	27.62	16.12	27.05	257	353	A	V
		2489.08	55.98	-18.02	74	41.18	27.68	14.15	27.03	257	353	P	V
		2495.87	48.7	-5.3	54	31.87	27.69	16.17	27.03	257	353	A	V



BLE CH 39 2480MHz	*	2480	99.95	-	-	85.19	27.66	14.14	27.04	308	296	P	H
	*	2480	94.94	-	-	78.17	27.66	16.15	27.04	308	296	A	H
		2483.64	55.93	-18.07	74	41.15	27.67	14.15	27.04	308	296	P	H
		2483.76	48.53	-5.47	54	31.74	27.67	16.16	27.04	308	296	A	H
													H
													H
	*	2480	97.14	-	-	82.38	27.66	14.14	27.04	321	357	P	V
	*	2480	92.32	-	-	75.55	27.66	16.15	27.04	321	357	A	V
		2486.92	55.86	-18.14	74	41.07	27.67	14.15	27.03	321	357	P	V
		2492.44	48.47	-5.53	54	31.66	27.68	16.16	27.03	321	357	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	53.7	-20.3	74	72.59	31.41	6.79	57.09	206	9	P	H
		4804	50.38	-3.62	54	69.27	31.41	6.79	57.09	206	9	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	46.06	-27.94	74	64.95	31.41	6.79	57.09	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	51.5	-22.5	74	70.2	31.44	6.82	56.96	248	5	P	H
		4880	46.77	-7.23	54	65.47	31.44	6.82	56.96	248	5	A	H
		7320	55.46	-18.54	74	66.86	37.06	8.46	56.92	197	74	P	H
		7320	49.91	-4.09	54	61.31	37.06	8.46	56.92	197	74	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	43.77	-30.23	74	62.47	31.44	6.82	56.96	-	-	P	V
		7320	55.88	-18.12	74	67.28	37.06	8.46	56.92	177	333	P	V
		7320	50.46	-3.54	54	61.86	37.06	8.46	56.92	177	333	A	V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2313.255	55.24	-18.76	74	40.25	28.09	13.99	27.09	322	60	P	H
		2378.25	51.48	-2.52	54	31.92	27.74	18.89	27.07	322	60	A	H
	*	2402	100.03	-	-	85.32	27.7	14.07	27.06	322	60	P	H
	*	2402	95.52	-	-	75.97	27.7	18.91	27.06	322	60	A	H
													H
													H
		2312.73	55.37	-18.63	74	40.37	28.1	13.99	27.09	324	360	P	V
		2321.55	51.39	-2.61	54	31.61	28.03	18.84	27.09	324	360	A	V
	*	2402	99.52	-	-	84.81	27.7	14.07	27.06	324	360	P	V
	*	2402	94.63	-	-	75.08	27.7	18.91	27.06	324	360	A	V
													V
													V
BLE CH 19 2440MHz		2328.34	55.64	-18.36	74	40.74	27.97	14.01	27.08	285	64	P	H
		2337.16	51.27	-2.73	54	31.6	27.9	18.85	27.08	285	64	A	H
	*	2440	100.84	-	-	86.16	27.62	14.11	27.05	285	64	P	H
	*	2440	96.04	-	-	76.52	27.62	18.95	27.05	285	64	A	H
		2483.76	55.08	-18.92	74	40.3	27.67	14.15	27.04	285	64	P	H
		2499.09	51.24	-2.76	54	31.57	27.7	19	27.03	285	64	A	H
		2322.18	55.19	-18.81	74	40.26	28.02	14	27.09	316	360	P	V
		2311.26	51.34	-2.66	54	31.49	28.11	18.83	27.09	316	360	A	V
	*	2440	100.87	-	-	86.19	27.62	14.11	27.05	316	360	P	V
	*	2440	96.59	-	-	77.07	27.62	18.95	27.05	316	360	A	V
		2497.13	55.57	-18.43	74	40.75	27.69	14.16	27.03	316	360	P	V
		2495.1	51.24	-2.76	54	31.58	27.69	19	27.03	316	360	A	V



BLE CH 39 2480MHz	*	2480	99.88	-	-	85.12	27.66	14.14	27.04	102	322	P	H
	*	2480	95.42	-	-	75.82	27.66	18.98	27.04	102	322	A	H
		2483.64	58.21	-15.79	74	43.43	27.67	14.15	27.04	102	322	P	H
		2483.72	50.22	-3.78	54	30.6	27.67	18.99	27.04	102	322	A	H
													H
													H
	*	2480	100.32	-	-	85.56	27.66	14.14	27.04	349	2	P	V
	*	2480	96.01	-	-	76.41	27.66	18.98	27.04	349	2	A	V
		2483.52	57.09	-16.91	74	42.31	27.67	14.15	27.04	349	2	P	V
		2483.56	50.38	-3.62	54	30.76	27.67	18.99	27.04	349	2	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	52.77	-21.23	74	71.66	31.41	6.79	57.09	239	50	P	H
		4804	48.83	-5.17	54	67.72	31.41	6.79	57.09	239	50	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	46.16	-27.84	74	65.05	31.41	6.79	57.09			P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	51.09	-22.91	74	69.79	31.44	6.82	56.96	196	54	P	H
		4880	42.19	-11.81	54	60.89	31.44	6.82	56.96	196	54	A	H
		7320	54.53	-19.47	74	65.93	37.06	8.46	56.92	196	52	P	H
		7320	49.7	-4.3	54	61.1	37.06	8.46	56.92	196	52	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	44.94	-29.06	74	63.64	31.44	6.82	56.96	-	-	P	V
		7320	55.64	-18.36	74	67.04	37.06	8.46	56.92	210	20	P	V
		7320	50.19	-3.81	54	61.59	37.06	8.46	56.92	210	20	A	V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		47.46	29.73	-10.27	40	45.95	15.34	0.82	32.38	-	-	P	H
		119.24	33.34	-10.16	43.5	47.1	17.41	1.13	32.3	-	-	P	H
		144.46	34.13	-9.37	43.5	47.94	17.3	1.18	32.29	-	-	P	H
		263.77	26.73	-19.27	46	37.74	19.71	1.5	32.22	-	-	P	H
		551.86	28.39	-17.61	46	33.54	24.98	2.11	32.24	-	-	P	H
		720.64	30.4	-15.6	46	33.8	26.44	2.33	32.17	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		47.46	22.99	-17.01	40	39.21	15.34	0.82	32.38	-	-	P	V
		120.21	28.38	-15.12	43.5	42.05	17.5	1.13	32.3	-	-	P	V
		144.46	26.13	-17.37	43.5	39.94	17.3	1.18	32.29	-	-	P	V
		263.77	21.74	-24.26	46	32.75	19.71	1.5	32.22	-	-	P	V
		805.03	30.1	-15.9	46	31.94	27.7	2.45	31.99	-	-	P	V
		949.56	31.5	-14.5	46	29.78	30.28	2.56	31.12	-	-	P	V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Yuan Lee, Jacky Hong, Peter Liao	Temperature :	20~25°C
		Relative Humidity :	50~60%

Note symbol


-L	Low channel location
-R	High channel location

<1st BLE>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

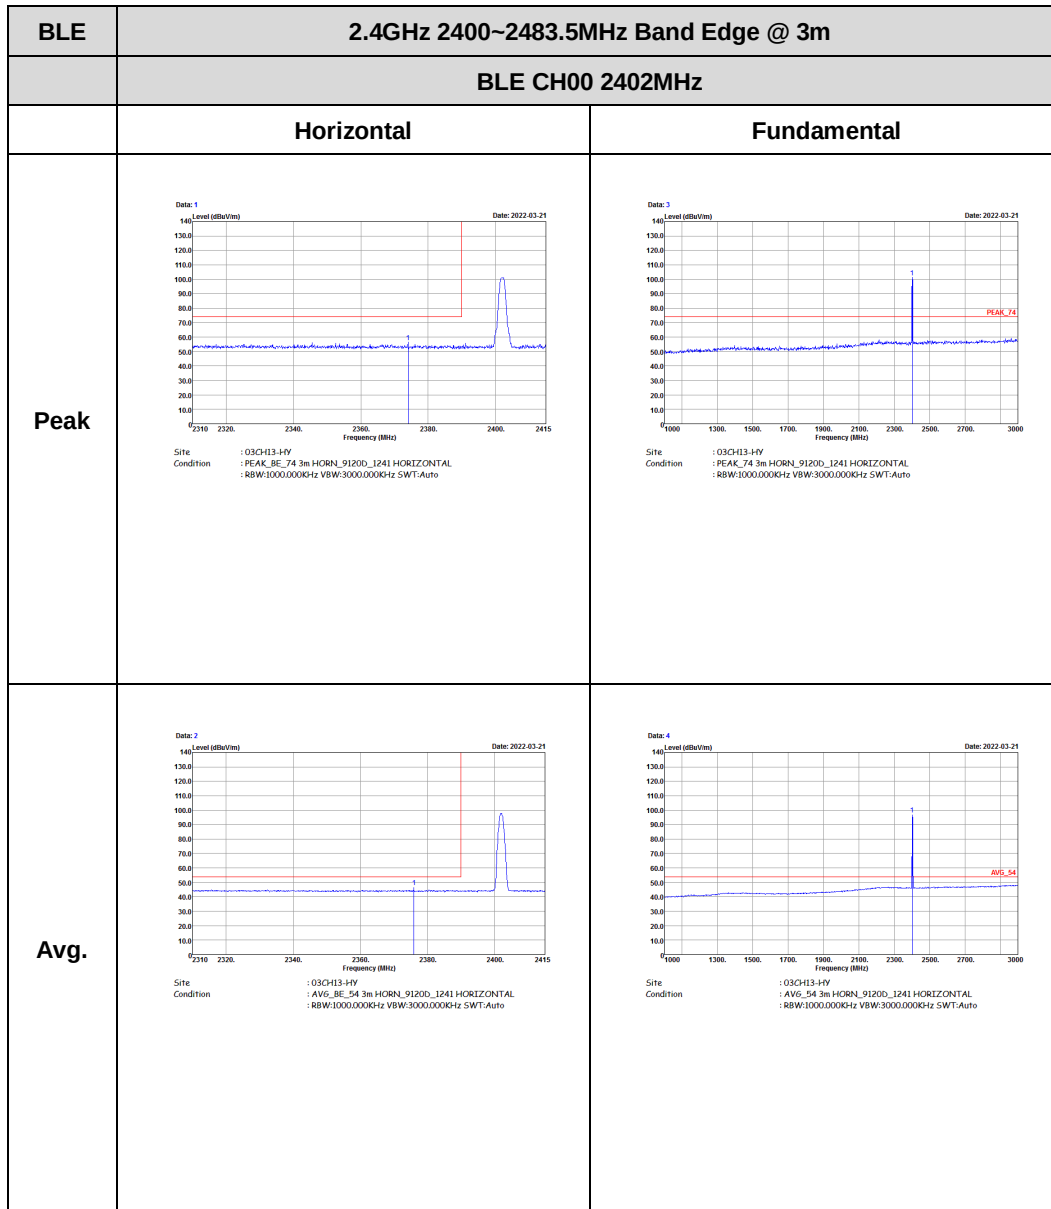



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Data: 5 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 7 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 6 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 8 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	Graph showing Peak level (dBm) vs Frequency (MHz) for Peak BE_74. The peak is at approximately 2440 MHz, reaching a level of about 100 dBm. The graph includes a red line indicating the peak level and a blue line indicating the noise floor. Site : 03CH13-4FY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	Graph showing Average level (dBm) vs Frequency (MHz) for AVG_BE_54. The average level is at approximately 2440 MHz, reaching a level of about 100 dBm. The graph includes a red line indicating the average level and a blue line indicating the noise floor. Site : 03CH13-4FY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Data: 7 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 9 Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 10 Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	Data: 11 Level (dBm/1m) Date: 2022-03-21 Site : 03CH13-4HV Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	Data: 12 Level (dBm/1m) Date: 2022-03-21 Site : 03CH13-4HV Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

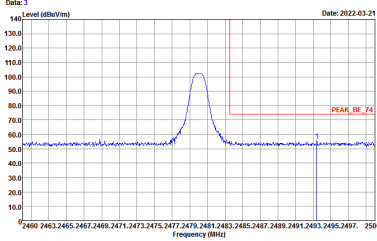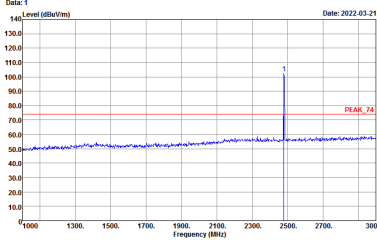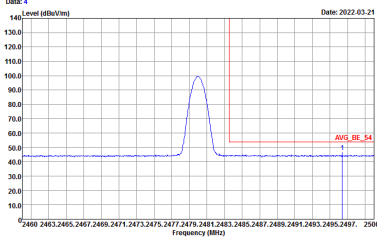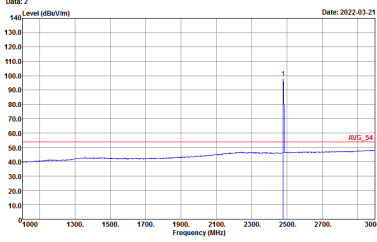

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Graph showing Peak Horizontal Spectrum Plot. The y-axis is Level (dBm/1m) from 10.0 to 140.0. The x-axis is Frequency (MHz) from 2400 to 2500. A peak is visible at approximately 2479 MHz, labeled PEAK_BE_74. The date is 2022-03-21.	Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Graph showing Peak Fundamental Spectrum Plot. The y-axis is Level (dBm/1m) from 10.0 to 140.0. The x-axis is Frequency (MHz) from 1000 to 3000. A peak is visible at approximately 2480 MHz, labeled PEAK_74. The date is 2022-03-21.
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Graph showing Avg Horizontal Spectrum Plot. The y-axis is Level (dBm/1m) from 10.0 to 140.0. The x-axis is Frequency (MHz) from 2400 to 2500. A peak is visible at approximately 2479 MHz, labeled AVG_BE_54. The date is 2022-03-21.	Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Graph showing Avg Fundamental Spectrum Plot. The y-axis is Level (dBm/1m) from 10.0 to 140.0. The x-axis is Frequency (MHz) from 1000 to 3000. A peak is visible at approximately 2480 MHz, labeled AVG_54. The date is 2022-03-21.

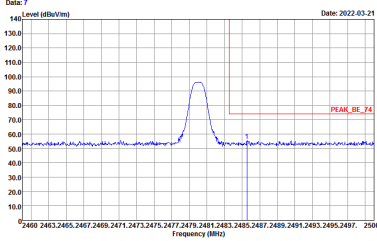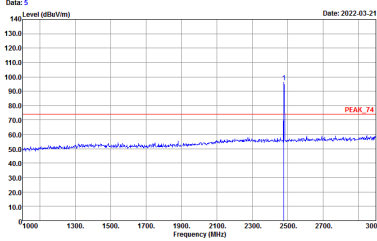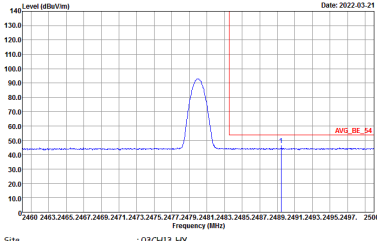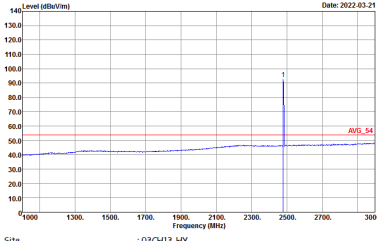

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 	Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 	Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	Date: 3 Level (dBuV/m) Date: 2022-03-24 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL	Date: 4 Level (dBuV/m) Date: 2022-03-24 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	Graph 3: Horizontal Level (dBuV/m) vs Frequency (MHz) Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL	Graph 4: Vertical Level (dBuV/m) vs Frequency (MHz) Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL




BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	Graph 3: Horizontal Level (dBuV/m) vs Frequency (MHz) Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL	Graph 4: Vertical Level (dBuV/m) vs Frequency (MHz) Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

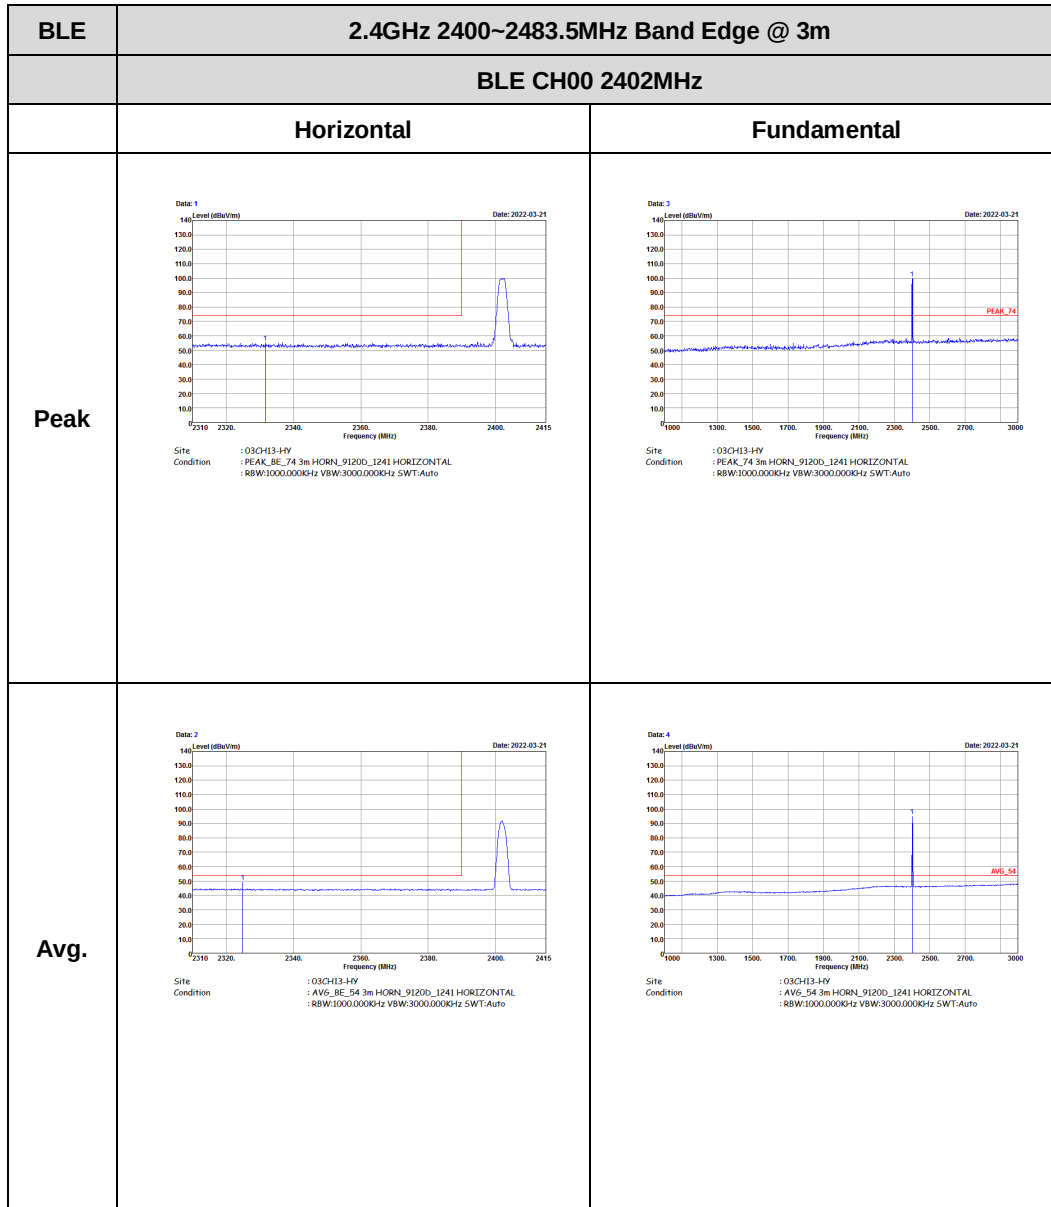



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Data: 5 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 7 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 6 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 8 Level (dBuV/m) Date: 2022-03-21 Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	Graph showing Peak level (dBm/100kHz) vs Frequency (MHz) for Peak BE_74. The peak is at approximately 2440 MHz, reaching a level of about 100 dBm/100kHz. The graph includes a red line indicating the peak level and a blue line for the average level. Site : 03CH13-14V Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank
Avg.	Graph showing Average level (dBm/100kHz) vs Frequency (MHz) for AVG_BE_54. The average level is at approximately 2440 MHz, reaching a level of about 100 dBm/100kHz. The graph includes a red line indicating the average level and a blue line for the peak level. Site : 03CH13-14V Condition : AVG_BE_54 3m HORN_9120D_1241 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank

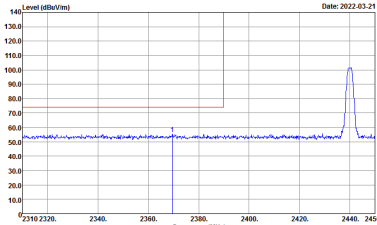
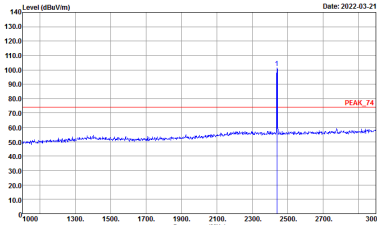
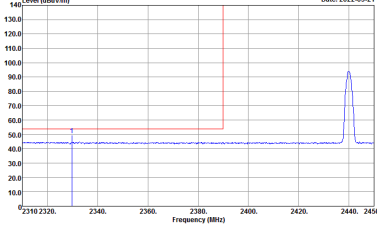
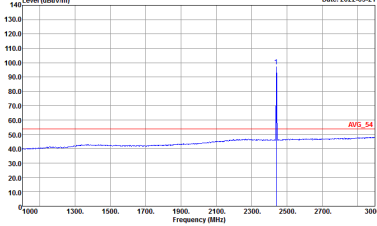


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Data: 7 Level (dBuV/m) Date: 2022.03.21  Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 9 Level (dBuV/m) Date: 2022.03.21  Site : 03CH13-HY Condition : PEAK_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Level (dBuV/m) Date: 2022.03.21  Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 10 Level (dBuV/m) Date: 2022.03.21  Site : 03CH13-HY Condition : AVG_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	Data: 11 Level (dBm/1m) Date: 2022-03-21 Site : 03CH13-14V Condition : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	Data: 12 Level (dBm/1m) Date: 2022-03-21 Site : 03CH13-14V Condition : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

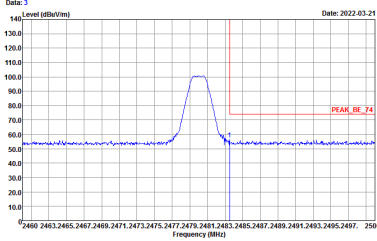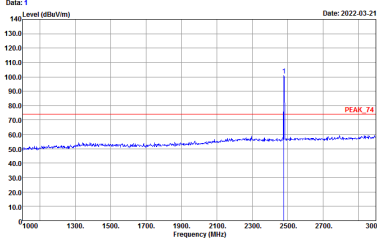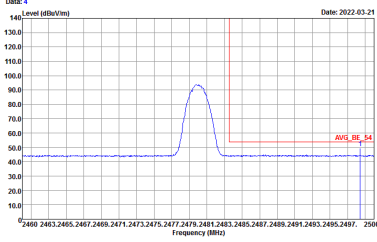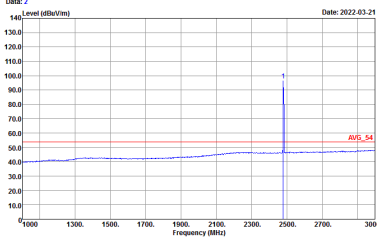

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 	Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 
Avg.	Site : 03CH13-HY Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 	Site : 03CH13-HY Condition : AVG_54 3m HORN_91200_1241 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto 



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Data: 7 Level (dBuV/m) Date: 2022-03-21 Site Condition : 03CH13-HV : PEAK_BE_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 5 Level (dBuV/m) Date: 2022-03-21 Site Condition : 03CH13-HV : PEAK_74 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Data: 8 Level (dBuV/m) Date: 2022-03-21 Site Condition : 03CH13-HV : AVG_BE_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Data: 6 Level (dBuV/m) Date: 2022-03-21 Site Condition : 03CH13-HV : AVG_54 3m HORN_9120D_1241 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	Date: 3 Level (dBuV/m) Date: 2022-03-24 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL	Date: 4 Level (dBuV/m) Date: 2022-03-24 Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	Date: 3 Level (dBuV/m) Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL	Date: 4 Level (dBuV/m) Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL