

KC.IA.00483 (ST13-A/1)

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig.

2-1. Frequency Band:

Frequency Band	MHz
BT/WiFi	2400~2500/5150~5850MHz

2-2. Impedance


50 ohm nominal

2-3. VSWR

2-3-1. Measurement frequency points and VSWR value

Frequency Band(MHz)	2400	2500	5150	5850
Typical Value: (VSWR)	1.54	1.25	1.43	1.88

UNLESS OTHER SPECIFIE X=± X.X=		TOXU 同讯技术 TOXU TECHNOLOGY CO., LTD.	
ANGLES=±	HOLEDIA=±	同讯技术	J., 21J.
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PRO	PERTY OF TOXURF
DRAWN BY: LI	CHECKED BY: YS	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEV	
DESIGNED BY: De wen	APPROVED BY: YS	WITHOUT PERMISSION	
TITLE : KC.IA.00483 Antenna Specification			SPEC REV.
THE TRAINING PROMISE OF THE PROMISE			P0

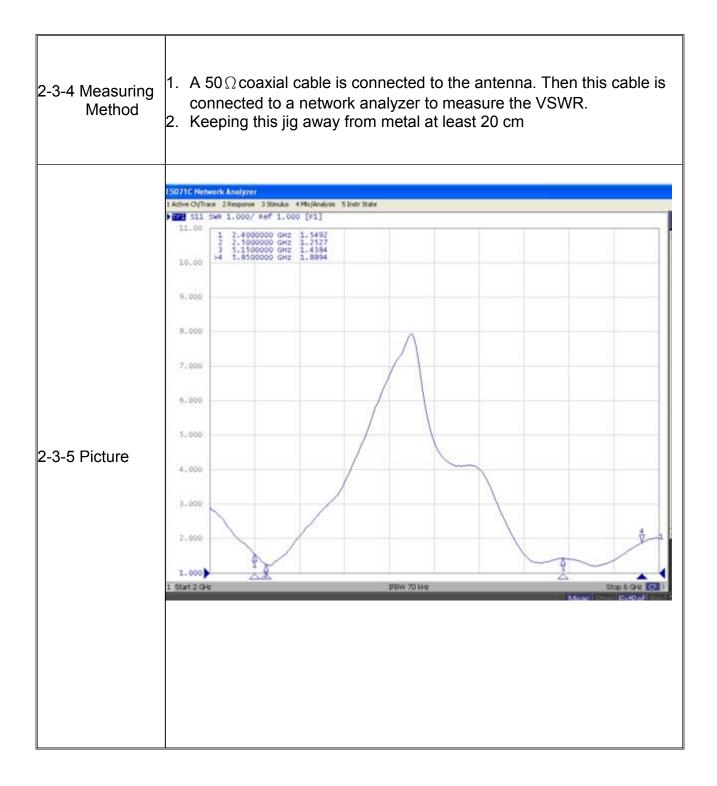

UNLESS OTHER SPECIFIED X=± X.X= ANGLES=±		TOXU 同讯技术 TOXU TECHNOLOGY CO)., LTD.
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOX TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USEE THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVI	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS	WITHOUT PERMISSION	
TITLE : KC.IA.00483 Antenna Specification			SPEC REV.
TITEE TROUGHOUT AIRE			P0




2-4. Efficiency and Gain

4-5.1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset jig
- 2. Fixed this handset jig on chamber's rotator plane
 - 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

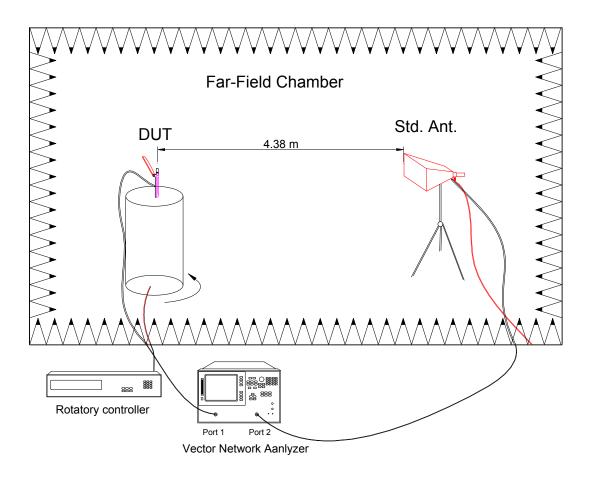



- 1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED X=± X.X= ANGLES=±		TOXU 同讯技术	TOXU TECHNOLOGY CO)., LTD.
SCALE:	UNIT: mm	THIS DRAWIN	GS AND SPECIFICATIONS ARE THE PROP	ERTY OF TOXURF
DRAWN BY: LI	CHECKED BY: YS	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEV		
DESIGNED BY: De wen	APPROVED BY: YS	WITHOUT PER	MISSION	
TITLE : KC.IA.00483 Antenna Specification			SPEC REV.	
TITEE TROUGHOUT AIRE	ma opcomodion			P0

2-4-1 Efficiency and Gain and 3D Date

Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	3.35	52.71
2410	3.02	50.29
2420	3.08	50.11
2430	3.29	51.92
2440	3.29	53.73
2450	3.42	51.54
2460	3.34	54.19
2470	3.29	49.82
2480	3.22	52.76
2490	3.21	52.61
2500	3.12	51.27

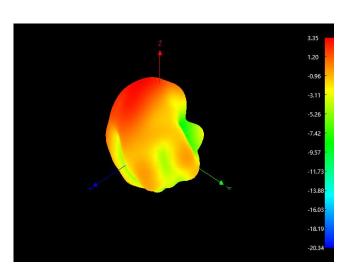


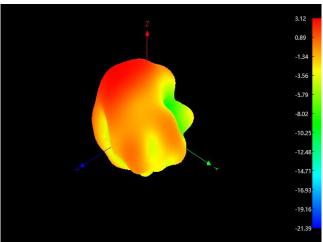

UNLESS OTHER SPECIFIE X=± X.X= ANGLES=±		TOXU 同 祝 技 术 TOXU TECHNOLOGY CO., LTD.	
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOX TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVI	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS	WITHOUT PERMISSION	
TITLE : KC.IA.00483 Antenna Specification			
THEE : NO.IA.00400 Antenna opecinication			

7	0	X	U

Frequency/Mhz		Efficiency / %
5150	3.87	54.33
5200	3.74	53.58
5250	3.7	52.24
5300	3.71	52.48
5350	3.63	52.6
5400	3.49	51.17
5450	3.4	50.7
5500	3.27	49.55
5550	3.14	50.75
5600	3.31	51.43
5650	3.17	45.75
5700	3.23	50.97
5750	3.19	50.21
5800	3.19	49.56
5850	3.74	49.71

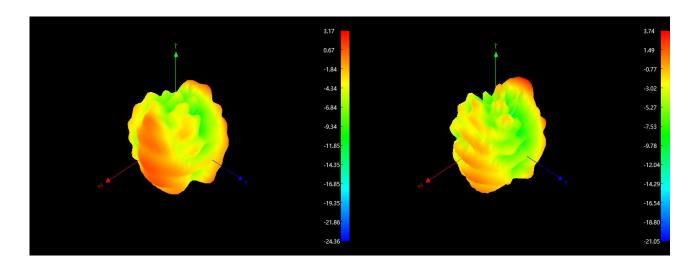


UNLESS OTHER SPECIFIED X=± X.X= ANGLES=±		TOXU 同讯技术	TOXU TECHNOLOGY CO)., LTD.
SCALE:	UNIT: mm	THIS DRAWIN	GS AND SPECIFICATIONS ARE THE PROP	ERTY OF TOXURF
DRAWN BY: LI	CHECKED BY: YS	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEV		
DESIGNED BY: De wen	APPROVED BY: YS	WITHOUT PER	MISSION	
TITLE : KC.IA.00483 Antenna Specification			SPEC REV.	
TITEE TROUGHOUT AIRE	ma opcomodion			P0



4. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm) The appearance of the antenna is according to drawing

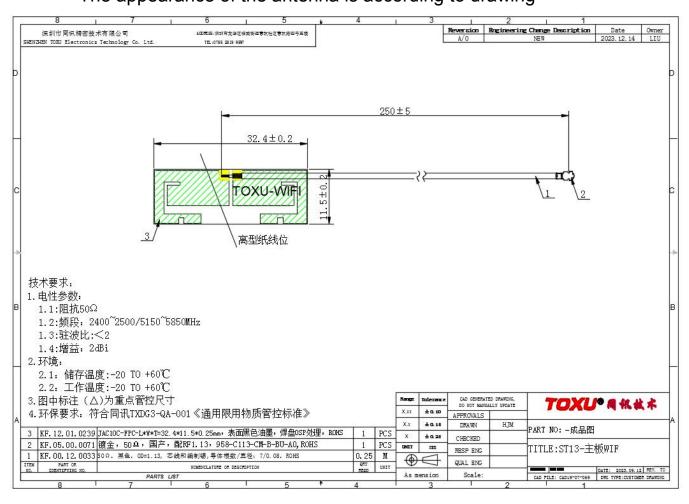

UNLESS OTHER SPECIFIED X=± X.X= ANGLES=±		TOXU 同讯技术	TOXU TECHNOLOGY CO)., LTD.
SCALE:	UNIT: mm	THIS DRAWIN	GS AND SPECIFICATIONS ARE THE PROP	ERTY OF TOXURF
DRAWN BY: LI	CHECKED BY: YS	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEV		
DESIGNED BY: De wen	APPROVED BY: YS	WITHOUT PER	MISSION	
TITLE : KC.IA.00483 Antenna Specification			SPEC REV.	
TITEE TROUGHOUT AIRE	ma opcomodion			P0



5 .Packaging specification:

Product number: xxxxx

Product model: xxxxx

-. Label requirements:

Customer	xxx		
supplier	xxxxx		
Material coding	xx		
Product model	xx		
Number	XXX PCS	Factory date	xxx
Remarks			

二、Boxing:

Job description:

1. Inner packaging:

XXpcs A bag

2. External packaging:

Xx PCS;

- 3. Matters needing attention:
 - a. Whether to add partition and pearl cotton;
 - b. Label attachments, such as ROHS, etc.;





UNLESS OTHER SPECIFIED TOLERANCES ON:		
$X=\pm$ X.X	$=\pm$ X.XX $=\pm$	TOXU 同讯技术 TOXU TECHNOLOGY CO., LTD.
ANGLES=±	HOLEDIA =±	间代技术
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXURF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00483 Antenna Specification		