



BNetzA-CAB-21/21-21

Test Report

Test report no.: 20114752-20162-1

Date of issue: 2021-09-16

Test result: The test item - **passed** - and complies with the listed standards.

Applicant

Continental Automotive GmbH

Manufacturer

Continental Automotive GmbH

Test Item

E3HCP422

Radio Frequency Testing according to:

Title 47

FCC Regulations Subpart 15C

§15.231

ISED-Regulations

RSS-Gen, Issue 5

RSS-210, Issue 9

Tested by

(name, function, signature) *B.Sc. Piotr Sardyko*
Deputy Test Lab Manager Radio

signature

Approved by

(name, function, signature) *Dr.-Ing. Harald Ansorge*
Managing Director

p.o. Andreas Bender
Head of Laboratory

signature

Applicant and Test item details	
Applicant	Continental Automotive GmbH Siemensstrasse 12, 93055 Regensburg Germany
Manufacturer	Continental Automotive GmbH Siemensstrasse 12, 93055 Regensburg Germany
Test item description	Integrated Body Controller
Model/Type reference	E3HCP422

Disclaimer and Notes

The content of this test report relates to the mentioned test sample(s) only.
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a ☒ point / ☐ comma is used as a decimal separator.
If otherwise, a detailed note is added adjoined to its use.

Decision rule: Binary Statement for Simple Acceptance Rule according ILAC-G8:09/2019

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	3
2	GENERAL INFORMATION	4
2.1	ADMINISTRATIVE DETAILS	4
2.2	POSSIBLE VERDICTS OF THE RESULTS	4
2.3	OBSERVATIONS.....	4
2.4	OPINIONS AND INTERPRETATIONS	4
2.5	REVISION HISTORY	4
2.6	FURTHER DOCUMENTS	5
2.1	FORMULA FOR DETERMINATION OF CORRECTION VALUES (E_c)	5
2.2	SOFTWARE/FIRMWARE USED FOR MEASUREMENTS	5
2.3	BLOCK DIAGRAMS	6
3	ENVIRONMENTAL & TEST CONDITIONS	7
3.1	ENVIRONMENTAL CONDITIONS	7
4	TEST STANDARDS AND REFERENCES.....	7
5	EQUIPMENT UNDER TEST (EUT)	8
5.1	PRODUCT DESCRIPTION*	8
5.2	TECHNICAL DATA OF EQUIPMENT*	8
5.3	TEST ITEM (EQUIPMENT UNDER TEST) DESCRIPTION*	8
5.4	AUXILIARY EQUIPMENT (AE) DESCRIPTION*	8
5.5	TEST ITEM OPERATING MODES DESCRIPTION*	8
5.6	TEST ITEM SET-UPS DESCRIPTION.....	9
5.7	NORMAL TEST CONDITIONS	9
5.8	ADDITIONAL INFORMATION	9
6	SUMMARY OF TEST RESULTS	10
7	TEST RESULTS.....	11
7.1	FUNDAMENTAL FIELD STRENGTH	11
7.2	RADIATED FIELD STRENGTH MEASUREMENTS	12
7.3	TRANSMIT TIME.....	14
7.4	OCCUPIED BANDWIDTH	15
8	MEASUREMENT EQUIPMENT	16
9	MEASUREMENT UNCERTAINTIES	18

2 GENERAL INFORMATION

2.1 Administrative details

Testing laboratory	IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 Sankt Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: www.ib-lenhardt.de E-Mail: info@ib-lenhardt.de
Accreditation	The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025:2018. Scope of testing and registration number: - Electromagnetic Compatibility and Telecommunication (FCC requirements) D-PL-21375-01-03 - Telekommunikation (TK) D-PL-21375-01-05 ISED Company Number 27156 Testing Laboratory CAB Identifier DE0020 Website DAkKS: https://www.dakks.de/ The Deutsche Akkreditierungsstelle GmbH (DAkKS) is also a signatory to the ILAC Mutual Recognition Arrangement
Date of receipt of test samples	2021-07-05
Start – End of tests	2021-07-05 – 2021-07-09

2.2 Possible verdicts of the results

Test sample meets the requirements	P (PASS) – the measured value is below the acceptance limit, AL = TL
Test sample does not meet the requirements	F (FAIL) – the measured value is above the acceptance limit, AL = TL
Test case does not apply to the test sample	N/A (Not applicable)
Test case not performed	N/P (Not performed)

2.3 Observations

No additional observations other than the reported observations within this test report have been made.

2.4 Opinions and Interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

2.5 Revision History

-0 Initial Version

-1 Version: the power of the EUT signal was increased. All the measurements were repeated with a new sample.

This test report 20114752-20162-1 replaces the previous test report 20114752-20162-0.

2.6 Further documents

List of further applicable documents belonging to the present test report:

Measurement plots:	20114752-20162-1_Annex A
EUT photographs:	20114752-20162-1_Annex B
Test setup photographs:	20114752-20162-1_Annex C

2.1 Formula for determination of correction values (E_C)

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

All units are dB-units, positive margin means value is below limit.

2.2 Software/Firmware used for measurements

All measurements were done directly with spectrum analyzer or SW R&S EMC32.

In some measurements (please see test equipment list for each test) R&S ESW 26 was used (please see chapter 8).

(Instrument) Firmware Version: **1.70**

In some measurements (please see test equipment list for each test) R&S FSW 50 was used (please see chapter 8).


(Instrument) Firmware Version: **4.61**

In some measurements SW R&S EMC32 was used.

Version: **11.10.00**

2.3 Block diagrams

Block diagram 1:

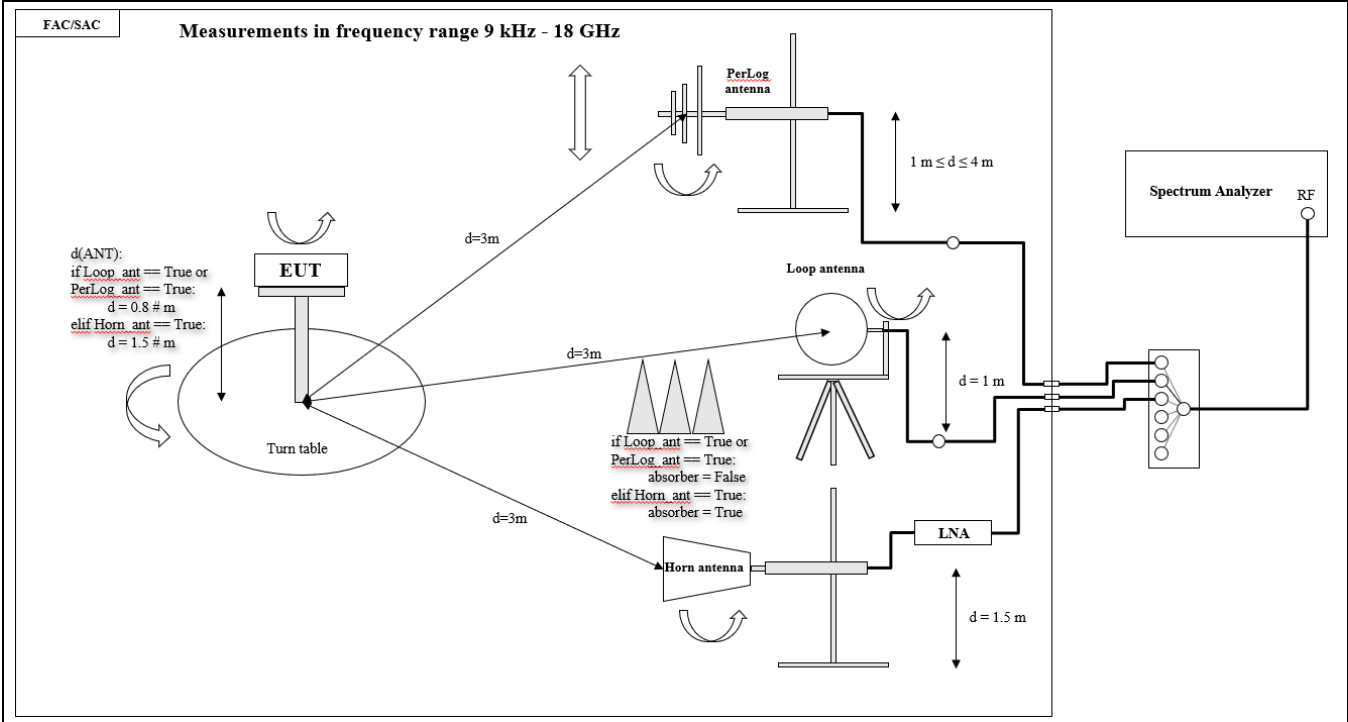

3 ENVIRONMENTAL & TEST CONDITIONS

3.1 Environmental conditions

Temperature	20°C ± 5°C
Relative humidity	25-75 % r.H.
Barometric Pressure	860-1060 mbar
Power supply	13.5V DC (external)

4 TEST STANDARDS AND REFERENCES

Test standard (accredited)

FCC CFR Title 47 Part 15 Subpart C:2016	---
ANSI C63.10: 2013	---
RSS-210 Issue 10	---
RSS-Gen Issue 5	---

Test standard (not accredited)

None

Reference	Description
none	---

5 EQUIPMENT UNDER TEST (EUT)

5.1 Product Description*

The FBS system is used for the Passive Start- and Entry-System (PASE), Remote Keyless Entry (RKE) and Immobilization .

*: declared by the applicant

5.2 Technical Data of Equipment*

Number of channel:	3
Channel bandwidth:	54kHz for RKE (FSK) and 114kHz for PASE (FSK)
Channel tested:	f _{low} : 433.47 MHz f _{cent} : 433.92 MHz f _{high} : 434.37 MHz
Spectrum Access Mechanism:	Duty Cycle
Antenna Type:	Internal
Antenna connector:	None
Equipment type:	Production model
Type of power source:	DC power supply
Test source voltage:	V _{min} : 9 VDC, V _{nom} : 13.5 VDC, V _{max} : 16 VDC

*: declared by the applicant

5.3 Test Item (Equipment Under Test) Description*

Short designation	EUT Model	EUT Description	Serial number	Hardware status	Software status
EUT A	E3HCP422	Integrated Body Controller	RBG 14.06.2100580005	C3	Homologation FCC SW07

*: declared by the applicant

5.4 Auxiliary Equipment (AE) Description*

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE1	-	Main board	-	-

*: declared by the applicant

5.5 Test Item Operating Modes Description*

EUT operating mode no.	Description of operating modes	Additional information
op. 1	ANT 1, Ch 1: 433.47 MHz, protocol PASE	Mode for modulated signal at center frequency
op. 2	ANT 1, Ch 1: 433.47 MHz, protocol RKE	Mode for modulated signal at center frequency
op. 3	ANT 1, Ch 2: 433.92 MHz, protocol PASE	Mode for modulated signal at center frequency
op. 4	ANT 1, Ch 2: 433.92 MHz, protocol RKE	Mode for modulated signal at center frequency
op. 5	ANT 1, Ch 3: 434.37 MHz, protocol PASE	Mode for modulated signal at center frequency
op. 6	ANT 1, Ch 3: 434.37 MHz, protocol RKE	Mode for modulated signal at center frequency

op. 7	ANT 2, Ch 1: 433.47 MHz, protocol PASE	Mode for modulated signal at center frequency
op. 8	ANT 2, Ch 1: 433.47 MHz, protocol RKE	Mode for modulated signal at center frequency
op. 9	ANT 2, Ch 2: 433.92 MHz, protocol PASE	Mode for modulated signal at center frequency
op. 10	ANT 2, Ch 2: 433.92 MHz, protocol RKE	Mode for modulated signal at center frequency
op. 11	ANT 2, Ch 3: 434.37 MHz, protocol PASE	Mode for modulated signal at center frequency
op. 12	ANT 2, Ch 3: 434.37 MHz, protocol RKE	Mode for modulated signal at center frequency
op. 13	Periodical Telegram	For duty cycle test. RKE.
op. 14	Periodical Telegram	For duty cycle test. PASE

*: declared by the applicant

5.6 Test Item Set-ups Description

set. 1	EUT A + AE 1
--------	--------------

5.7 Normal test conditions

Temperatur, [°C]		Voltage, [V]	
Tnom	20 ± 5	Vnom	13.5

5.8 Additional Information

Test items differences	Only one radiated sample was used
Additional application considerations to test a component or sub-assembly	None

6 SUMMARY OF TEST RESULTS

Test specification

FCC 15.231. ISSED RSS-210, Issue 10

Requirement / Test Case	Test Conditions	Set-up	Operating mode	Result / Remark	Verdict
Fundamental field strength	Nominal	1	1-12	None	Pass
Radiated field strength measurements	Nominal	1	5, 7	Set-up with the highest fundamental field strength	Pass
Transmit time	Nominal	1	13, 14	None	Pass
Occupied Bandwidth	Nominal	1	1-12	None	Pass

Notes

None

Comments and observations

None

7 TEST RESULTS

7.1 Fundamental field strength

Test equipment (Please see Chapter 8 for exact information of test equipment)

Radiated: C1, R1, A2, P2, M1

Description

The measurement antenna was situated in 3 m distance to the EUT. The EUT was placed on a tilt table at a height of 1.5 m above the ground plane. The tilt table was staying on a turn table. The tilt table and turn table were continuously moved in all axis to find the maximum radiated power of the EUT Signal.

Between EUT and measurement antenna absorbers are covering the GND-Plane.

See photos in Annex C for test Set-up and block diagram 1 in Chapter 2.9.

For spectrum analyzer settings please see plots in Annex A.

Limits

According to FCC 15.231(b):

Frequency [MHz]	Field strength@3m		Measurement distance [meters]	Remarks
	[μV/m]	[dBμV/m]		
40.66-40.70	2250	67.04	3	Linear interpolation
70-130	1250	61.93		
130-174	1250 to 3750	61.93 to 71.48		
174-260	3750	71.48		
260-470	3750 to 12500	71.48 to 81.93		
Above 470	12500	81.93		

Measurement Level = Reading Level + Coprrector Factor.

Average Limit = $20\text{LOG}(11017.514) = 80.841 \text{ dB}\mu\text{V/m}$. Peak Limit = $100.841 \text{ dB}\mu\text{V/m}$. @434 MHz.

Results*

Set./ Op.	Peak field strength, [dBμV/m]	Limit Peak, [dBμV/m]	Margin [dB]	DC CorFac, [dB]	AV field strength, [dBμV/m]	Limit AV, [dBμV/m]	Margin [dB]	Verdict
Set.1, Op. 1	97.6	100.841	3.241	-21.5	76.1	80.84	4.74	Pass
Set.1, Op. 2	92.61	100.841	8.231	-15.4	77.21	80.84	3.63	Pass
Set.1, Op. 3	97.64	100.841	3.201	-21.5	76.14	80.84	4.7	Pass
Set.1, Op. 4	92.66	100.841	8.181	-15.4	77.26	80.84	3.58	Pass
Set.1, Op. 5	97.68	100.841	3.161	-21.5	76.18	80.84	4.66	Pass
Set.1, Op. 6	92.67	100.841	8.171	-15.4	77.27	80.84	3.57	Pass
Set.1, Op. 7	96.64	100.841	4.201	-21.5	75.14	80.84	5.7	Pass
Set.1, Op. 8	91.68	100.841	9.161	-15.4	76.28	80.84	4.56	Pass
Set.1, Op. 9	96.8	100.841	4.041	-21.5	75.3	80.84	5.54	Pass
Set.1, Op. 10	91.92	100.841	8.921	-15.4	76.52	80.84	4.32	Pass
Set.1, Op. 11	96.87	100.841	3.971	-21.5	75.37	80.84	5.47	Pass
Set.1, Op. 12	91.92	100.841	8.921	-15.4	76.52	80.84	4.32	Pass

* Please see measurement plots in Annex A.

7.2 Radiated field strength measurements

Test equipment

Frequency range 9 kHz – 30 MHz

Measurement in a semianechoic room with the distance between the EUT and the reference point of the antenna 3 m (see photos in Annex B). The measurement was done with software R&S EMC 32 V11.00.

Radiated: A1, C1, M1, P1, R1

Frequency range 30 MHz – 1 GHz

Measurement in a semianechoic room with the distance between the EUT and the reference point of the antenna 3 m (see photos in Annex B). The measurement was done with software R&S EMC 32 V11.00.

Radiated: A2, C1, M1, P1, R1

Frequency range 1 GHz – 8 GHz

Measurement in a fully anechoic room with the distance between the EUT and the reference point of the antenna 3 m (see photos in Annex B). The measurement was done directly with spectrum analyzer.

Radiated: A3, Amp1, C1, M1, P1, R1

Description

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.10: 2013. For each antenna one representative op. mode was chosen for a radiated field strength measurement.

The measurement antenna was situated in 3 m distance to the EUT.

RBW for frequency range 9 kHz- 30 MHz: 9 kHz.

RBW for frequency range 30 MHz- 1 GHz: 120 kHz.

RBW for frequency range 1 GHz- 5 GHz: 1 MHz.

See photos in Annex C for test Set-up and block diagram in Chapter 2.9.

Limits

According to FCC 15.209:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490*	2400/F(kHz)	300
0.490-1.705*	24000/F(kHz)	30
1.705-30.0*	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

* Limit line was corrected due to measurement distance of 3 m

Results*

Plot No	Op./ Set.	Frequency	Detector	Test distance [m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Verdict
1	Op.5, Set.1, laying	9 kHz – 30 MHz	Quasi-Peak	3	56	128**	72	Pass
2	Op.5, Set.1, standing	9 kHz – 30 MHz	Quasi-Peak	3	56	128**	72	Pass
3	Op.5, Set.1, laying	30 MHz – 1 GHz	Quasi-Peak	3	42.5	46**	3.5	Pass

4	Op.5, Set.1, standing	30 MHz – 1 GHz	Quasi- Peak	3	42.5	46**	3.5	Pass
5	Op.5, Set.1	1 GHz – 5 GHz	Peak	3	54.63	74**	19.37	Pass
	Op.5, Set.1	1 GHz – 5 GHz	Average	3	44.9	54**	9.1	Pass
6	Op.7, Set.1, laying	9 kHz – 30 MHz	Quasi- Peak	3	56	128**	72	Pass
7	Op.7, Set.1, standing	9 kHz – 30 MHz	Quasi- Peak	3	56	128**	72	Pass
8	Op.7, Set.1, laying	30 MHz – 1 GHz	Quasi- Peak	3	42.5	46**	3.5	Pass
9	Op.7, Set.1, standing	30 MHz – 1 GHz	Quasi- Peak	3	42.5	46**	3.5	Pass
10	Op.7, Set.1	1 GHz – 5 GHz	Peak	3	54.44	74**	19.56	Pass
	Op.7, Set.1	1 GHz – 5 GHz	Average	3	45.16	54**	8.84	Pass

All Readings below 1 GHz are Quasi-Peak detector, above 1 GHz- with Peak and Average detector.

* Please see measurement plots in Annex A.

** Limit line was corrected due to measurement distance of 3 m

*** Noise level.

7.3 Transmit time

Test equipment (Please see Chapter 8 for exact information of test equipment)

Radiated: C1, R1, A2, P2, M1

Description

Please see test set-up photos in Annex B and block diagram in Chapter 2.9.

Measurement was done radiated.

The correction factor (worst case) is used for Fundamental field strength calculations (A_v).

Limits

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Results*

Plot No	Set./ Op.	Frequency, [MHz]	Measured value, [ms]	Limit**, [sec]	Result
1	13	433.77	16.96	< 5	Pass
2	14	433.77	8.43	< 5	Pass

* Please see measurement plots in Annex A.

** The manufacturer is responsible for not exceeding this requirement.

7.4 Occupied Bandwidth

Test equipment (Please see Chapter 8 for exact information of test equipment)

Radiated: C1, R1, A2, P2, M1

Description

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.10: 2013.

Please see test set-up photos in Annex C and block diagram in Chapter 2.9.

Please see Plots in Annex A for spectrum analyzer settings.

Measurement was done radiated.

Limits

The bandwidth of the emission shall be not wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be not wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Results*

Set./ Op.	Frequency, [MHz]	Measured value (20 dB BW), [kHz]	Limit, [MHz]	OBW 99%, [kHz]	Result
Set.1, Op. 1	433.47	103.896	1.083675	101.923	Pass
Set.1, Op. 2	433.47	41.958	1.083675	40.843	Pass
Set.1, Op. 3	433.92	103.896	1.0848	102.157	Pass
Set.1, Op. 4	433.92	41.958	1.0848	40.829	Pass
Set.1, Op. 5	434.37	103.896	1.085925	101.967	Pass
Set.1, Op. 6	434.37	42.957	1.085925	40.822	Pass
Set.1, Op. 7	433.47	104.895	1.083675	101.828	Pass
Set.1, Op. 8	433.47	42.957	1.083675	41.241	Pass
Set.1, Op. 9	433.92	104.895	1.0848	101.825	Pass
Set.1, Op. 10	433.92	42.957	1.0848	41.249	Pass
Set.1, Op. 11	434.37	104.895	1.085925	101.827	Pass
Set.1, Op. 12	434.37	42.957	1.085925	41.227	Pass

* Please see measurement plots in Annex A.

8 MEASUREMENT EQUIPMENT

No	Equipment	Type	Manufacturer	Serial No.	Int. No.	Last Calibration	Next Calibration
Antennas (A):							
1.	Active Loop Antenna	HFH2-Z2E	Rohde & Schwarz	100108	LAB000108	2020-03-25	2023-03-25
2.	Ultrabroadband antenna	HL562E	Rohde & Schwarz	102005	LAB000150	2020-07-05	2023-07-05
3.	Double-Ridged Waveguide Horn Antenna	HF-907	Rohde & Schwarz	102899	LAB000151	2020-04-23	2023-04-23
4.	Rod Antenna	-	-	-	LAB000290	-	-
5.	Horn Antenna (2.6 GHz – 3.95 GHz)	PE9863/SF-10	Pasternack	-	LAB000312	2021-01-13	-
6.	Horn Antenna (3.95 GHz – 5.85 GHz)	PE9861/SF-10	Pasternack	-	LAB000264	2020-09-29	-
7.	Horn Antenna (10 GHz – 15 GHz)	PE9855 SF-20	Pasternack	-	LAB000263	2020-09-29	-
8.	Horn Antenna (12.4 GHz – 18 GHz)	62-HA20-A-SMF	TTE Europe	-	LAB000282	2020-09-29	-
9.	Horn Antenna (17.6 GHz – 26.7 GHz)	20240-20	Flann Microwave Ltd	266402	LAB000127	2020-06-29	-
10.	Horn Antenna (26.4 GHz – 40.1 GHz)	22240-20	Flann Microwave Ltd	270447	LAB000129	2020-06-29	-
11.	Horn Antenna (33 GHz – 50.1 GHz)	23240-20	Flann Microwave Ltd	273430	LAB000132	2020-07-01	-
12.	Horn Antenna (49.9 GHz – 75.8 GHz)	25240-20	Flann Microwave Ltd	272860	LAB000133	2020-07-01	-
13.	Horn Antenna (60.5 GHz – 91.5 GHz)	26240-20	Flann Microwave Ltd	273417	LAB000135	2020-07-01	-
14.	Horn Antenna (73.8 GHz – 114 GHz)	27240-20	Flann Microwave Ltd	273368	LAB000138	2020-07-01	-
15.	Horn Antenna (114 GHz – 173 GHz)	29240-20	Flann Microwave Ltd	273382	LAB000139	2020-07-01	-
16.	Horn Antenna (145 GHz – 220 GHz)	30240-20	Flann Microwave Ltd	273390	LAB000178	2020-08-01	-
17.	Horn Antenna (217 GHz – 330 GHz)	32240-20	Flann Microwave Ltd	273469	LAB000152	2020-08-01	-
18.	Horn Antenna (49.9 GHz – 75.8 GHz)	25240-20	Flann Microwave Ltd	272861	LAB000134	2020-07-01	-
19.	Horn Antenna (60.5 GHz – 91.5 GHz)	26240-20	Flann Microwave Ltd	273418	LAB000136	2020-08-01	-
Amplifiers (Amp):							
1.	Pre-Amplifier	BBV 9718 C	Schwarzbeck Mess-Elektronik OHG	84	LAB000169	-	-
2.	Low noise amplifier	BZ-01000900-111550-202320	B&Z Technologies	24336	LAB000296	-	-
3.	Low noise amplifier	BZ-08001800-180855-202020	B&Z Technologies	22105	LAB000297	-	-
4.	Low noise amplifier	BZ-18004000-270845-252525	B&Z Technologies	22449	LAB000298	-	-
Attenuator (Att):							
1.	Attenuator	25081-20 (49.9 GHz - 75.8 GHz)	Flann Microwave Ltd	234411	LAB000229	-	-

2.	Attenuator	27081-20 (73.8 GHz – 112 GHz)	Flann Microwave Ltd	270004	LAB000230	-	-
RF Cables (Cab):							
1.	Coaxial cable	LU7-022-1000	Rosenberger	33	LAB000153	-	-
2.	Coaxial cable	LU7-022-1000	Rosenberger	34	LAB000153	-	-
3.	Coaxial cable	SF101/1.5m	Huber & Suhner	503987/1	LAB000165	-	-
Chambers (C):							
1.	Semi/Fully Anecoic Chamber	SAC5	Albatross Projects GmbH	20168.PRB	LAB000235	-	-
2.	Climatic chamber	T-65/50	CTS GmbH	204002	LAB000110	2021-06-18	2022-06-18
3.	Shielding Cover	CMU-Z11	Rohde & Schwarz	100876	LAB000039	-	-
Corner Reflector (CR):							
1.	Trihedral Corner Reflector	SAJ-080-S1	ERAVANT	04756-01	LAB000201	-	-
Filter (F):							
1.	High-pass filter (84 GHz – 110 GHz)	10-WHPF- 84.5-UG387	TTE	-	LAB000299	-	-
Harmonic mixers (H):							
1.	Harmonic Mixer	FS-Z75	Rohde & Schwarz	102015	LAB000112	2021-03-31	2022-03-31
2.	Harmonic Mixer	FS-Z90	Rohde & Schwarz	102020	LAB000113	2021-03-31	2022-03-31
3.	Harmonic Mixer	FS-Z110	Rohde & Schwarz	102000	LAB000114	2021-04-08	2022-04-08
4.	Harmonic Mixer	FS-Z170	Rohde & Schwarz	100996	LAB000126	2021-05-18	2022-05-18
5.	Harmonic Mixer	FS-Z220	Rohde & Schwarz	101039	LAB000116	2021-05-04	2022-05-04
6.	Harmonic Mixer	FS-Z325	Rohde & Schwarz	101015	LAB000117	2021-05-19	2025-05-19
Multimeters (M):							
1.	Multimeter	U1242B	Keysight	MY59240021	LAB000187	2020-06-24	2022-06-24
2.	Multimeter	U1242B	Keysight	MY59160026	LAB000018	2020-06-24	2022-06-29
Multipliers (Mp):							
1.	Multiplier	SMZ75	Rohde & Schwarz	101307	-	2018-03-15	-
2.	Multiplier	SMZ110	Rohde & Schwarz	100001	-	2020-05-09	-
Power Supply (P):							
1.	Power Supply	PS 2042-10 B	Elektro-Automatic GmbH	2878350263	LAB000190	-	-
2.	Power Supply	E3640A	Agilent	MY40005693	LAB000036	-	-
Power meters (PM):							
1.	Power meter	NRP-Z81	Rohde & Schwarz	106194	LAB000120	2021-05-04	2022-05-04
Receivers and Spectrumanalyzers (R):							
1.	Test Receiver	ESW-26	Rohde & Schwarz	101517	LAB000236	2021-02-05	2022-02-05

9 MEASUREMENT UNCERTAINTIES

Test case	Measurement uncertainty*
Radiated field strength	$\leq \pm 6$ dB
Occupied bandwidth	± 100 kHz
Time domain measurement	± 2.32 ms
DC and low frequency voltages	± 3 %
Temperature	± 1 °C
Humidity	± 3 %

*) The indicated expanded measurement uncertainty corresponds to the standard measurement uncertainty for the measurement results multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %.

END OF THE REPORT

Annex A

Measurement plots

part of / in addition to

Test report no.: 20114752-20162-1

Table of contents:


1	Fundamental field strength.....	4
1.1	Measurement with Set-up 1, Op. 1.....	4
1.2	Measurement with Set-up 1, Op. 2.....	4
1.3	Measurement with Set-up 1, Op. 3.....	5
1.4	Measurement with Set-up 1, Op. 4.....	5
1.5	Measurement with Set-up 1, Op. 5.....	6
1.6	Measurement with Set-up 1, Op. 6.....	6
1.7	Measurement with Set-up 1, Op. 7.....	7
1.8	Measurement with Set-up 1, Op. 8.....	7
1.9	Measurement with Set-up 1, Op. 9.....	8
1.10	Measurement with Set-up 1, Op. 10.....	8
1.11	Measurement with Set-up 1, Op. 11.....	9
1.12	Measurement with Set-up 1, Op. 12.....	9
2	General Limit - Radiated field strength emissions, 30 MHz - 1 GHz.....	10
2.1	Radiated magnetic field strength measurements ($f < 30$ MHz).....	10
2.1.1	Plot 1.....	10
2.1.2	Plot 2.....	10
2.1.3	Plot 6.....	11
2.1.4	Plot 7.....	11
2.2	Radiated magnetic field strength measurements ($30 \text{ MHz} < f < 1000 \text{ MHz}$).....	12
2.2.1	Plot 3.....	12
2.2.2	Plot 4.....	12
2.2.3	Plot 8.....	13
2.2.4	Plot 9.....	13
2.3	Radiated magnetic field strength measurements ($1 \text{ GHz} < f < 5 \text{ GHz}$).....	14
2.3.1	Plot 5.....	14
2.3.2	Plot 10.....	14
3	Transmit time	15
3.1	Plot 1*. RKE.....	15
3.2	Plot 2*. PASE.....	15
4	Occupied Bandwidth	17
4.1	20 dB bandwidth, set-up 1, op. 1.....	17
4.2	20 dB bandwidth, set-up 1, op. 2.....	17
4.3	20 dB bandwidth, set-up 1, op. 3.....	18
4.4	20 dB bandwidth, set-up 1, op. 4.....	18
4.5	20 dB bandwidth, set-up 1, op. 5.....	19
4.6	20 dB bandwidth, set-up 1, op. 6.....	19
4.7	20 dB bandwidth, set-up 1, op. 7.....	20
4.8	20 dB bandwidth, set-up 1, op. 8.....	20
4.9	20 dB bandwidth, set-up 1, op. 9.....	21
4.10	20 dB bandwidth, set-up 1, op. 10.....	21
4.11	20 dB bandwidth, set-up 1, op. 11.....	22

Annex A of TR no.: **20114752-20162-1**


4.12	20 dB bandwidth, set-up 1, op. 12	22
4.13	99 % occupied bandwidth, set-up 1, op. 1	23
4.14	99 % occupied bandwidth, set-up 1, op. 2	23
4.15	99 % occupied bandwidth, set-up 1, op. 3	24
4.16	99 % occupied bandwidth, set-up 1, op. 4	24
4.17	99 % occupied bandwidth, set-up 1, op. 5	25
4.18	99 % occupied bandwidth, set-up 1, op. 6	25
4.19	99 % occupied bandwidth, set-up 1, op. 7	26
4.20	99 % occupied bandwidth, set-up 1, op. 8	26
4.21	99 % occupied bandwidth, set-up 1, op. 9	27
4.22	99 % occupied bandwidth, set-up 1, op. 10	27
4.23	99 % occupied bandwidth, set-up 1, op. 11	28
4.24	99 % occupied bandwidth, set-up 1, op. 12	28

1 Fundamental field strength


1.1 Measurement with Set-up 1, Op. 1

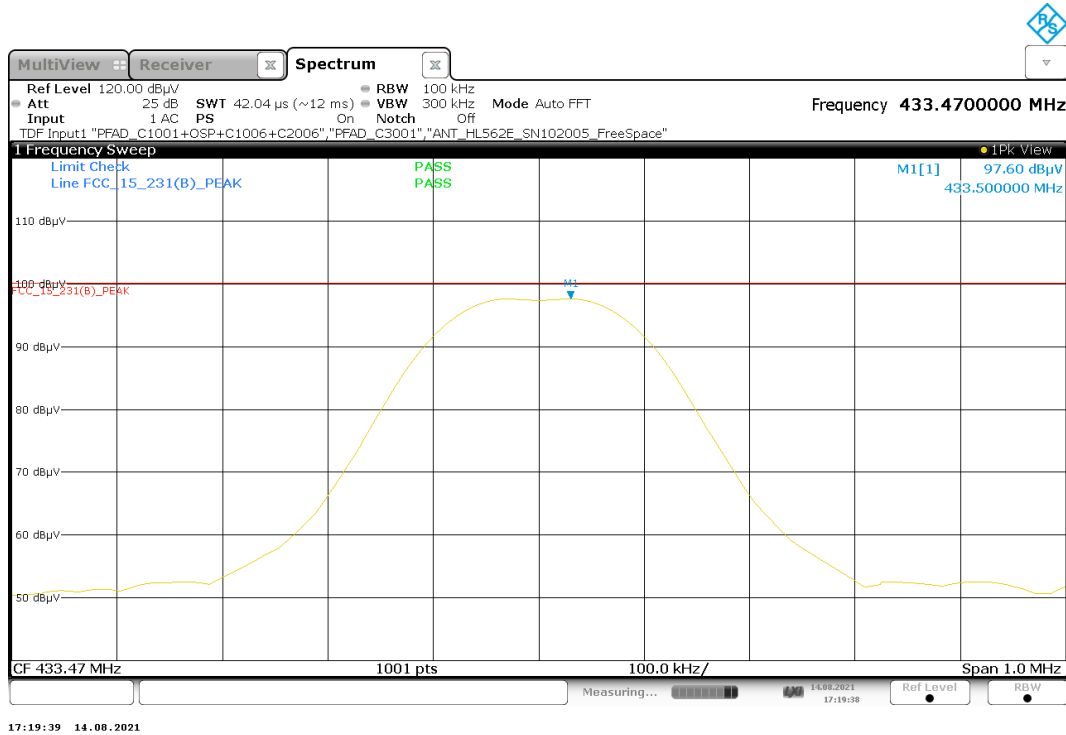


1.2 Measurement with Set-up 1, Op. 2

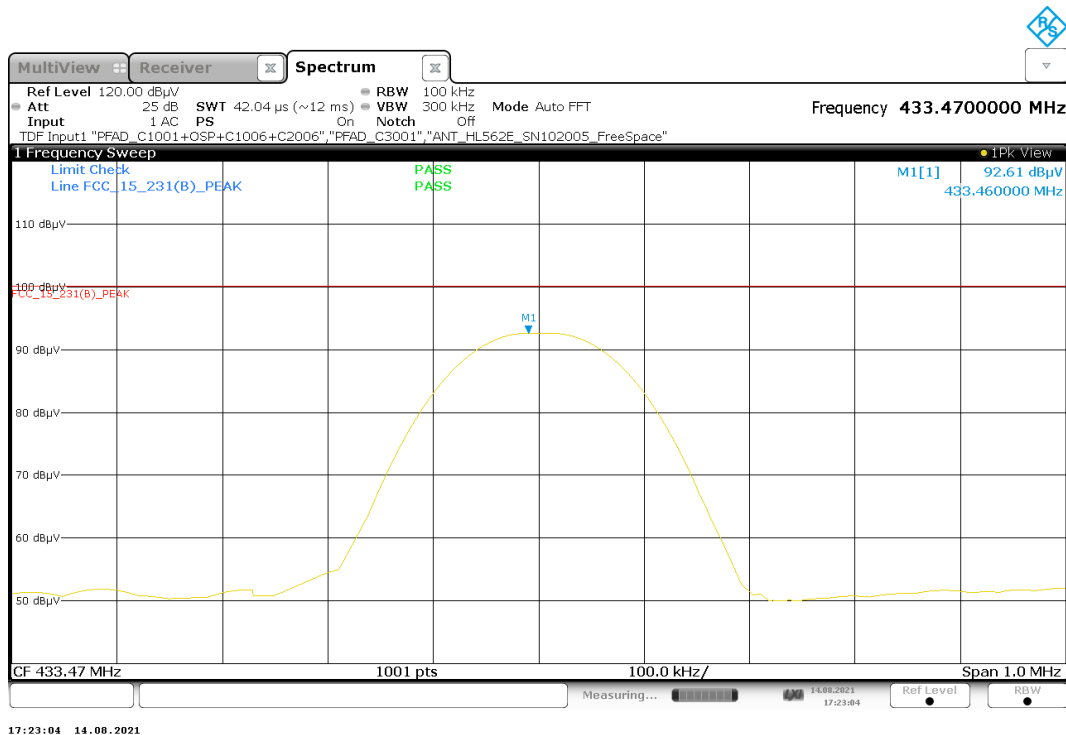


1.3 Measurement with Set-up 1, Op. 3

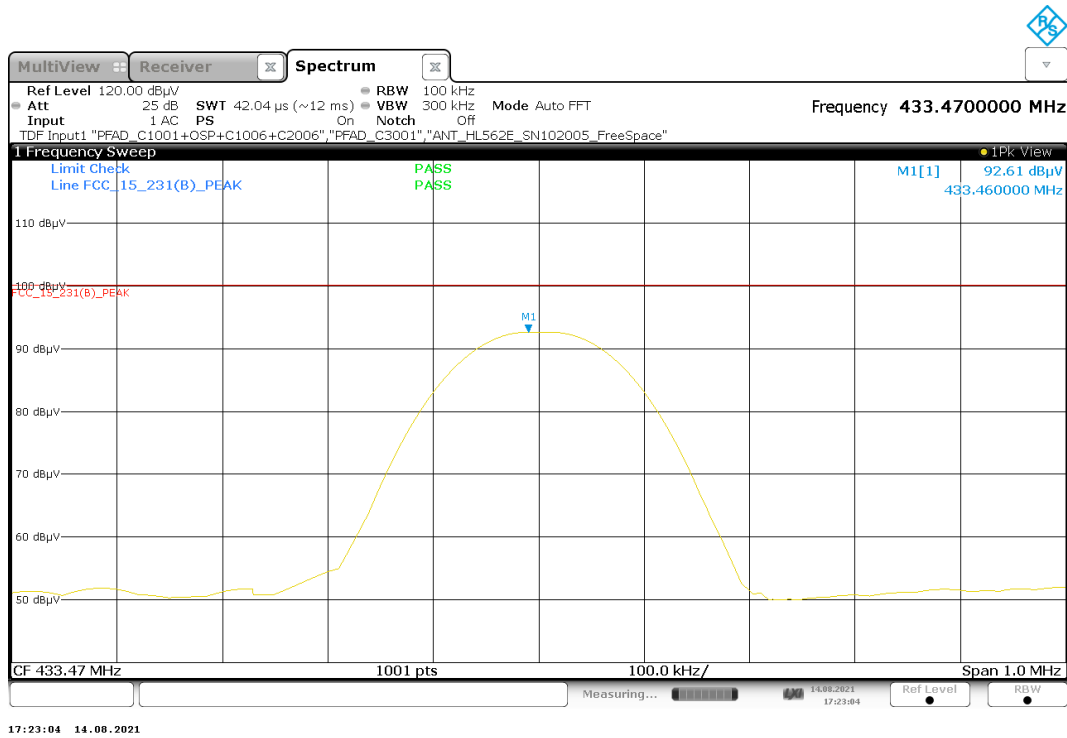


1.4 Measurement with Set-up 1, Op. 4

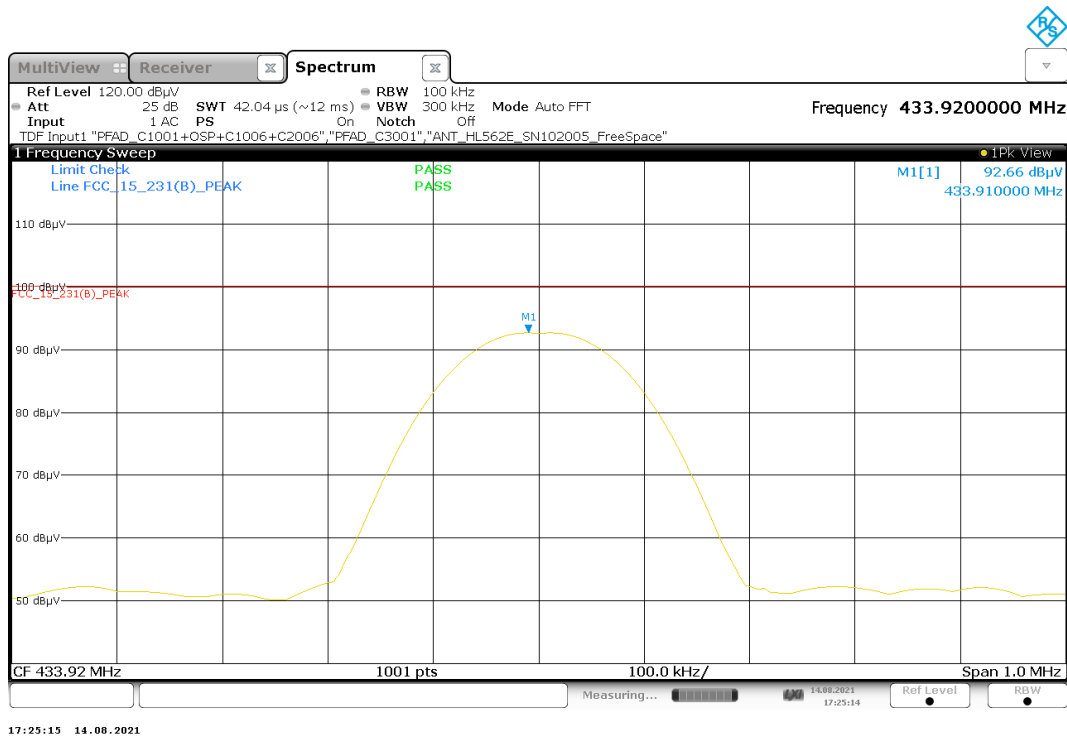


1.5 Measurement with Set-up 1, Op. 5

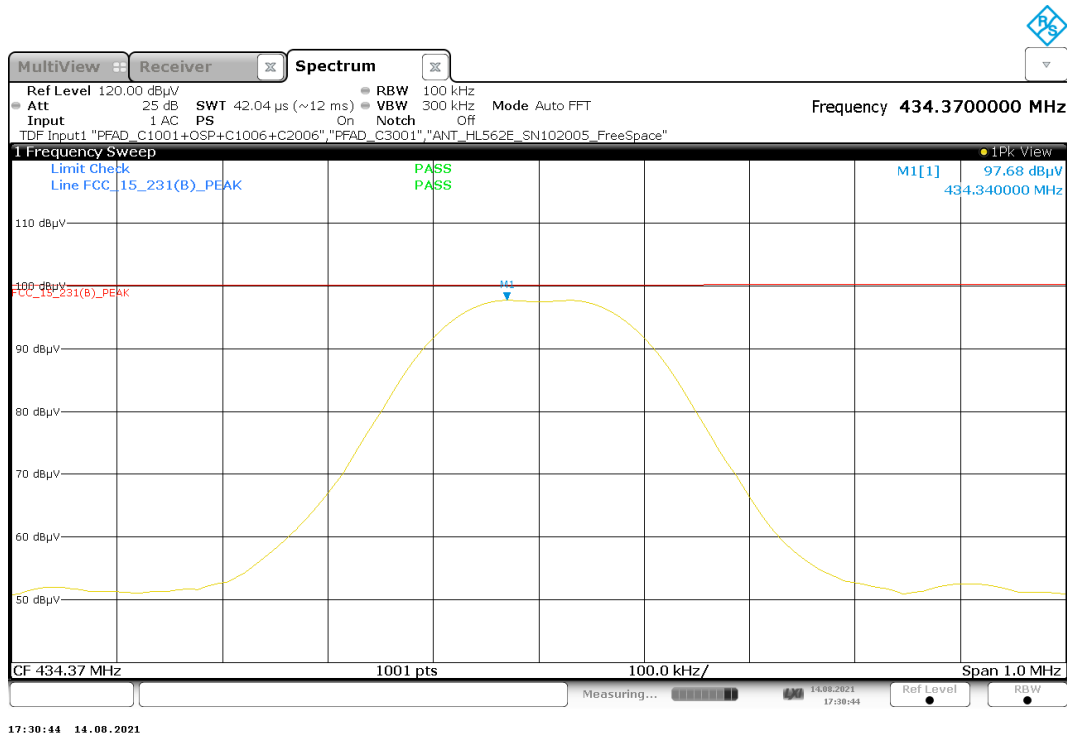


1.6 Measurement with Set-up 1, Op. 6

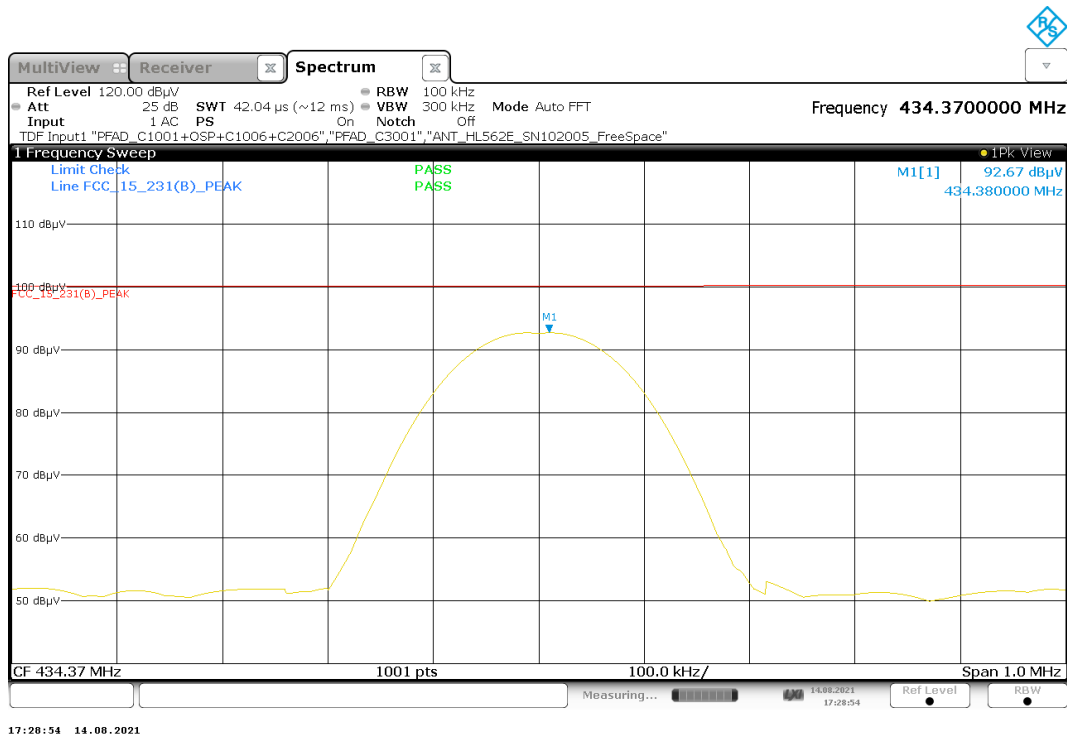


1.7 Measurement with Set-up 1, Op. 7

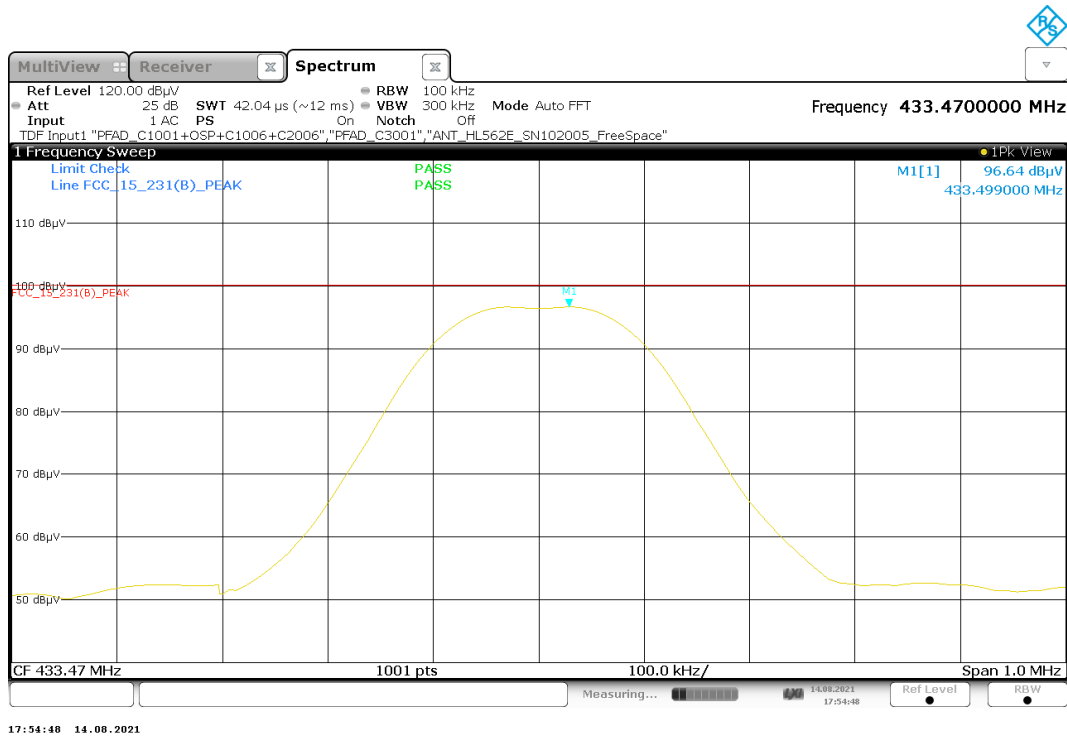


1.8 Measurement with Set-up 1, Op. 8

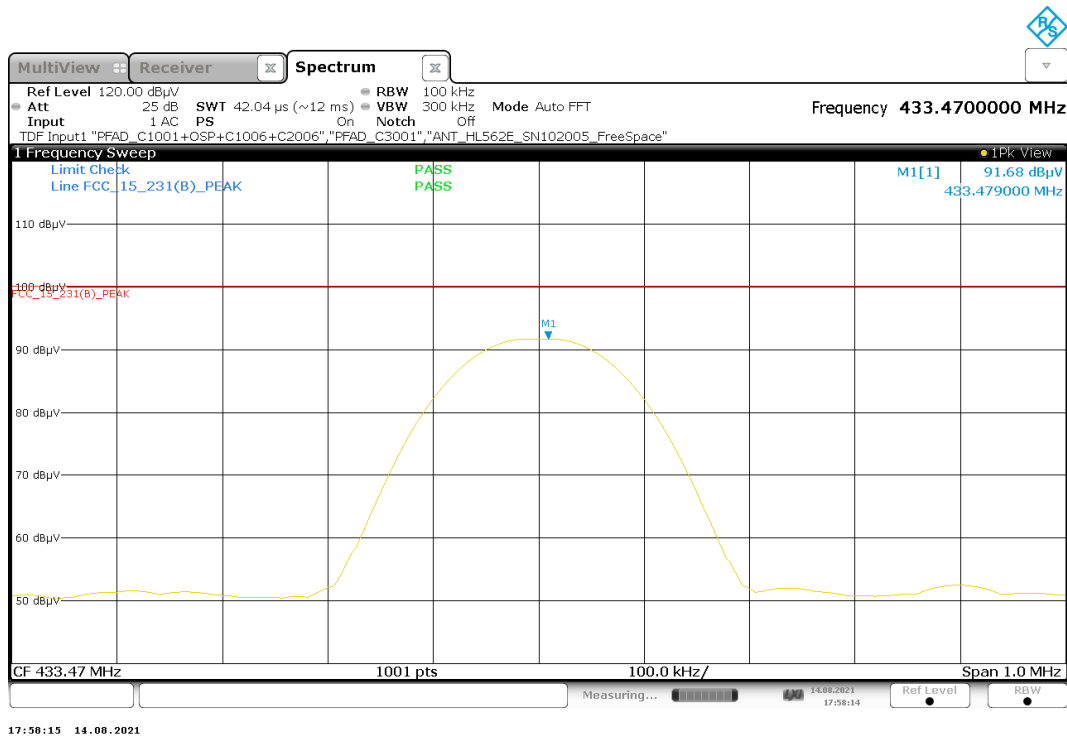


1.9 Measurement with Set-up 1, Op. 9

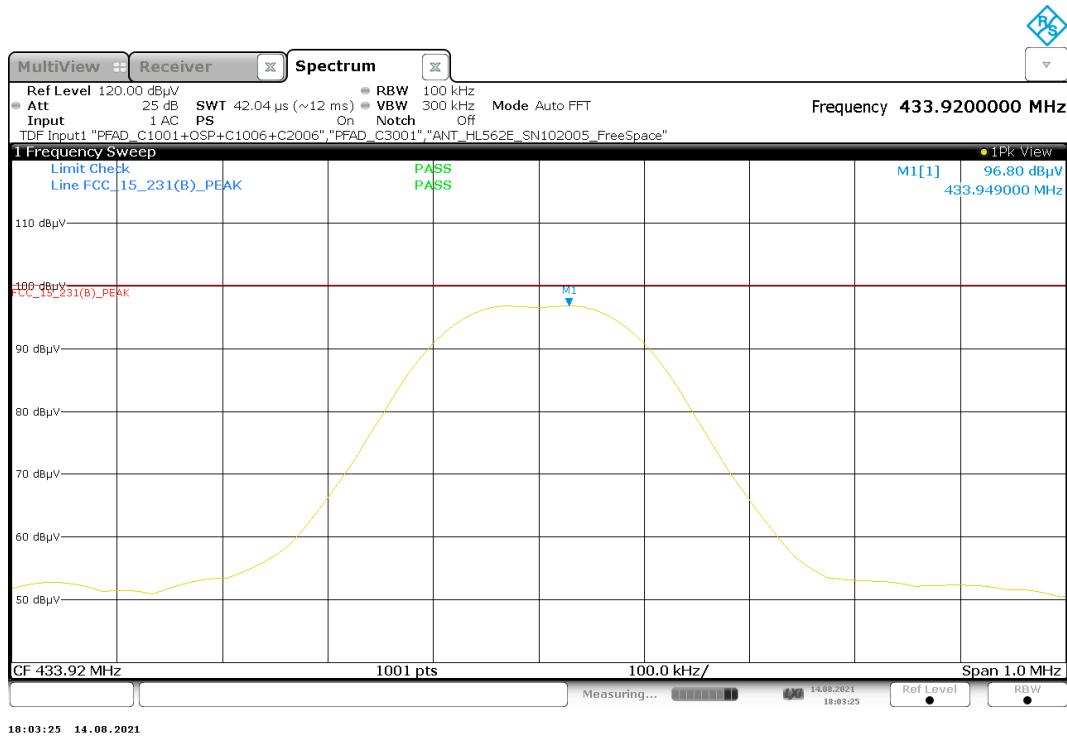


1.10 Measurement with Set-up 1, Op. 10

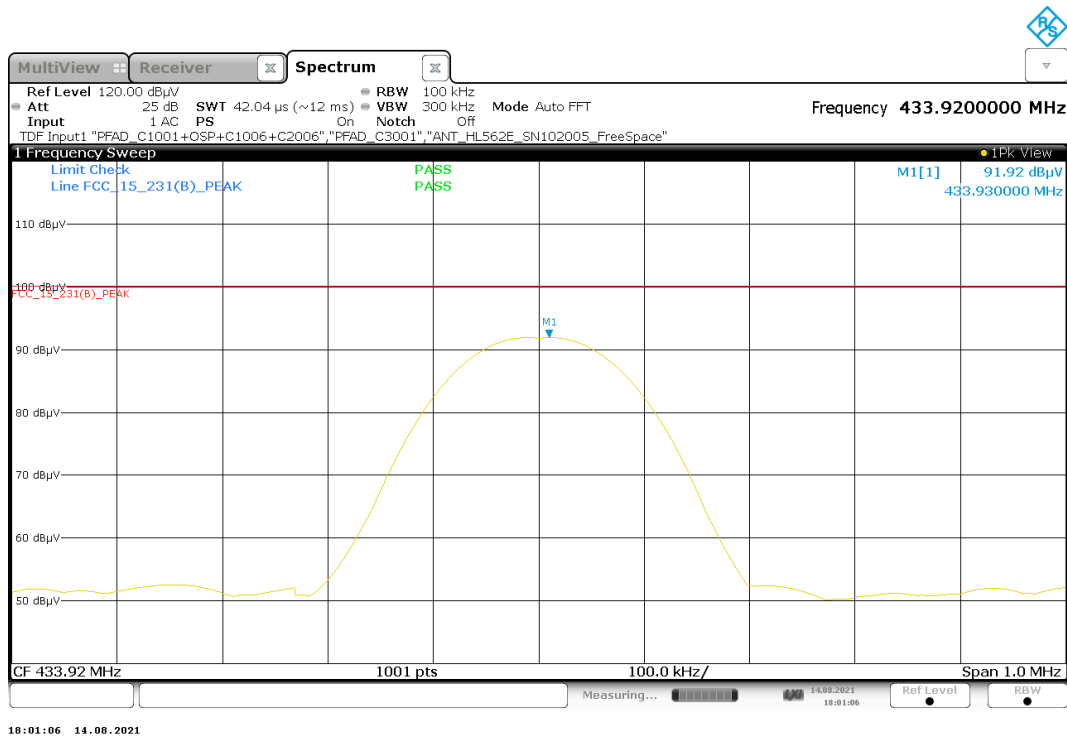

1.11 Measurement with Set-up 1, Op. 11

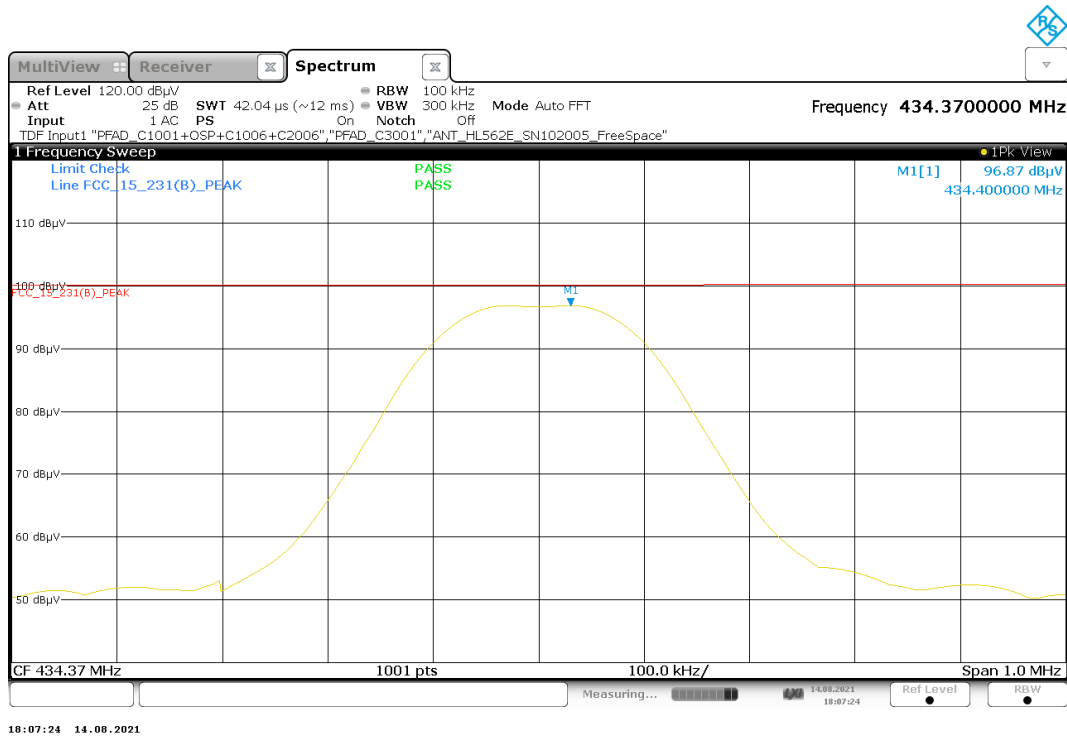


1.12 Measurement with Set-up 1, Op. 12

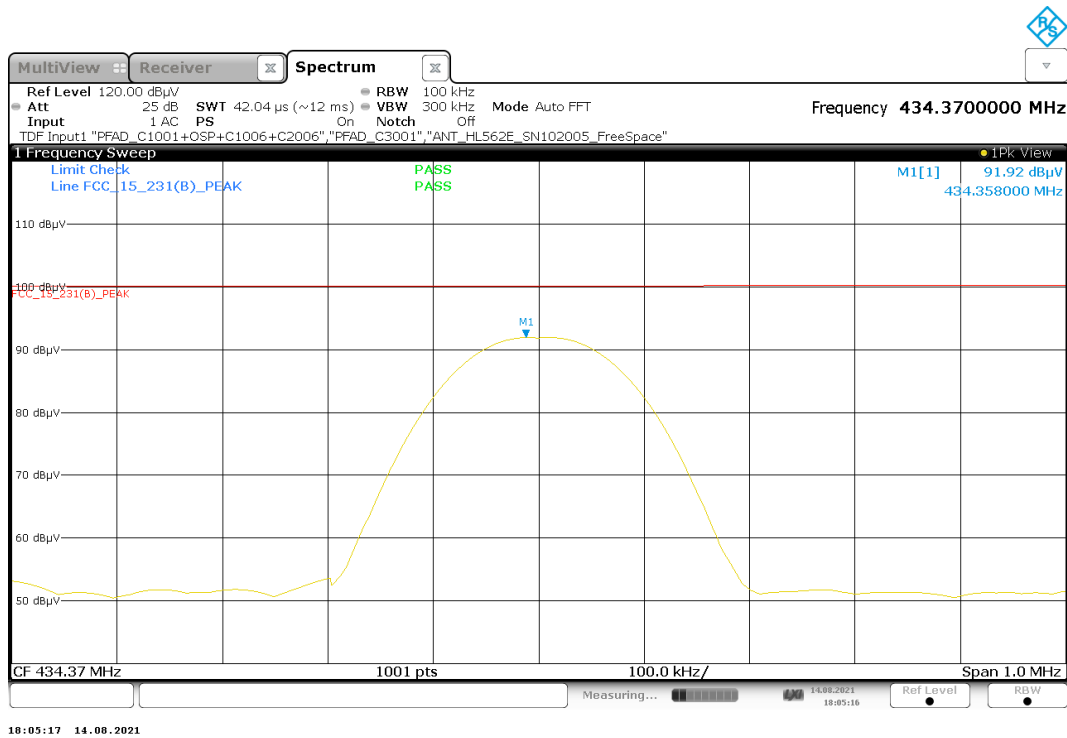


2 General Limit - Radiated field strength emissions, 30 MHz - 1 GHz

2.1 Radiated magnetic field strength measurements ($f < 30$ MHz)


2.1.1 Plot 1

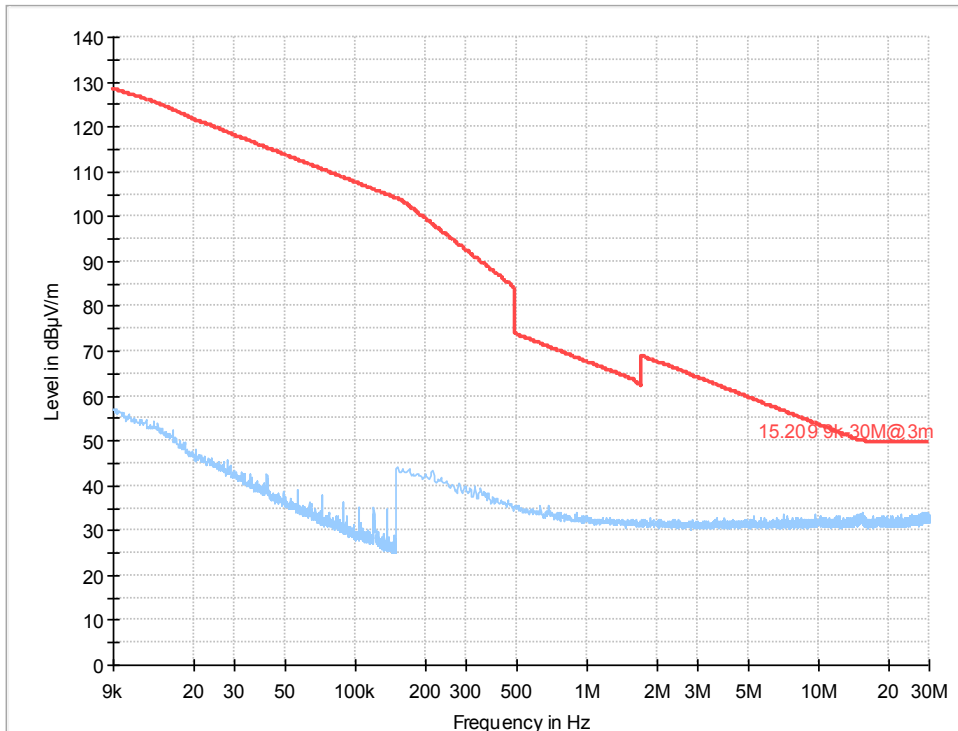


2.1.2 Plot 2

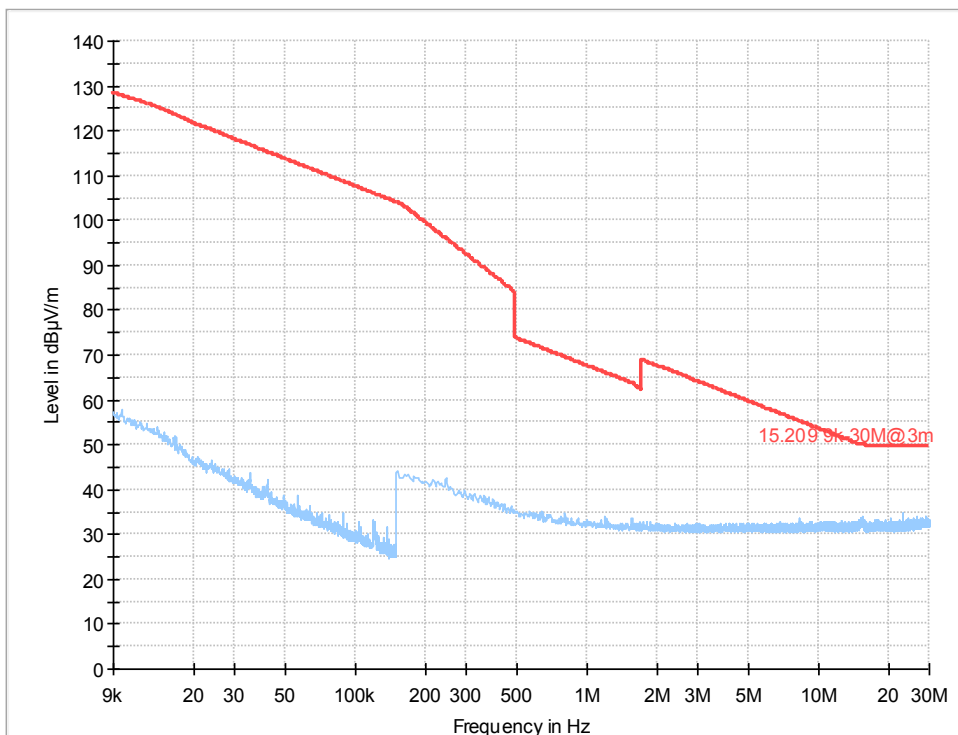

2.1.3 Plot 6

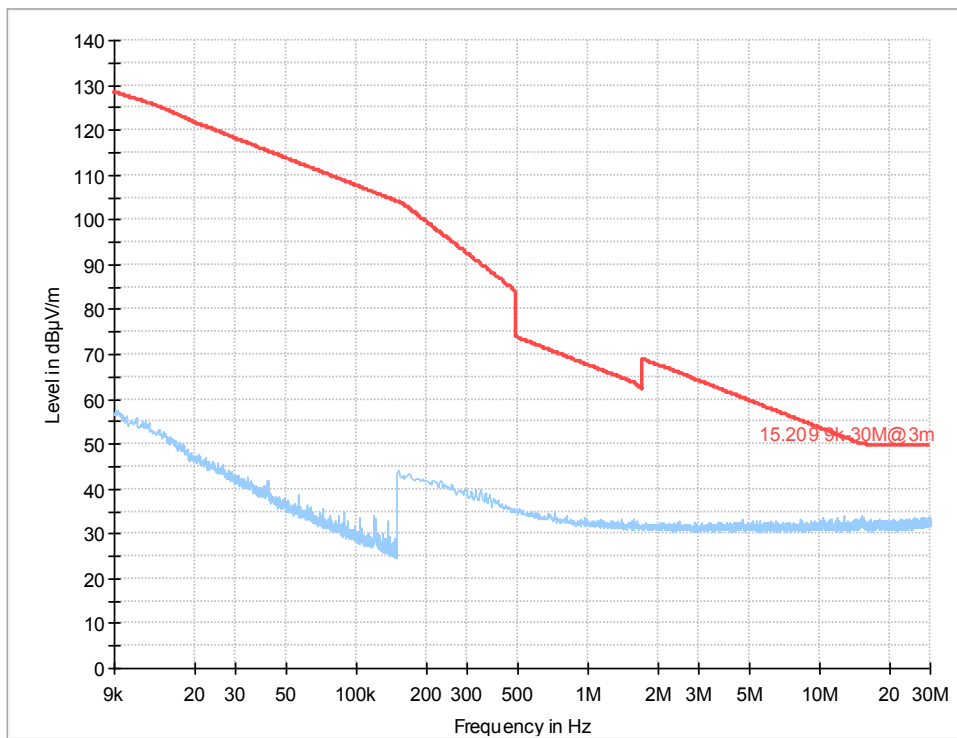


2.1.4 Plot 7

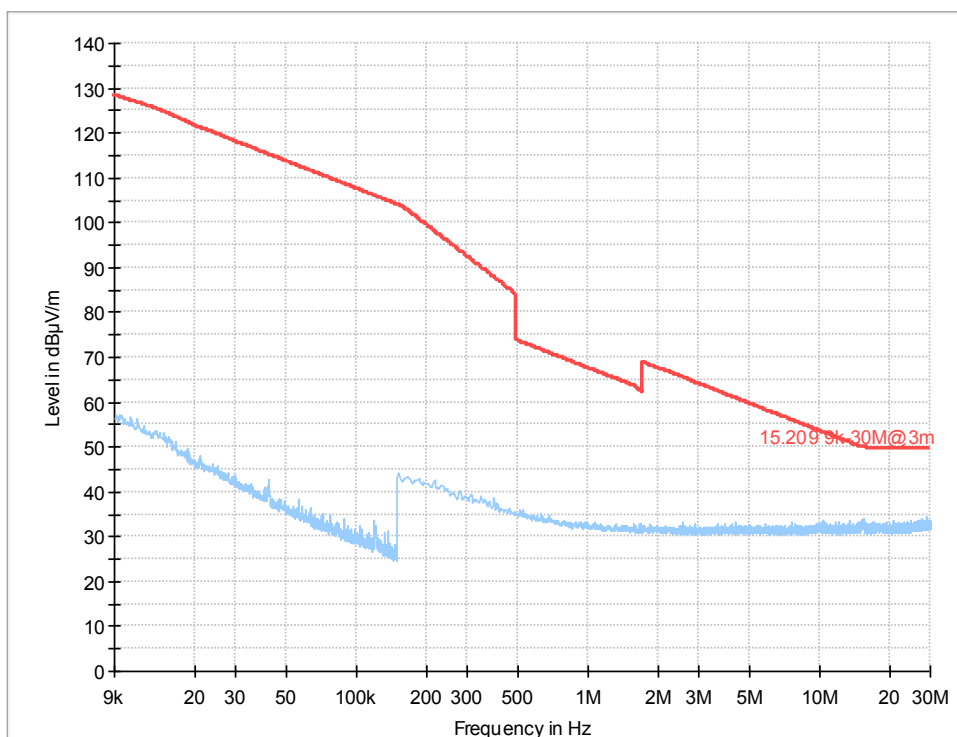


2.2 Radiated magnetic field strength measurements (30 MHz < f < 1000 MHz)


2.2.1 Plot 3

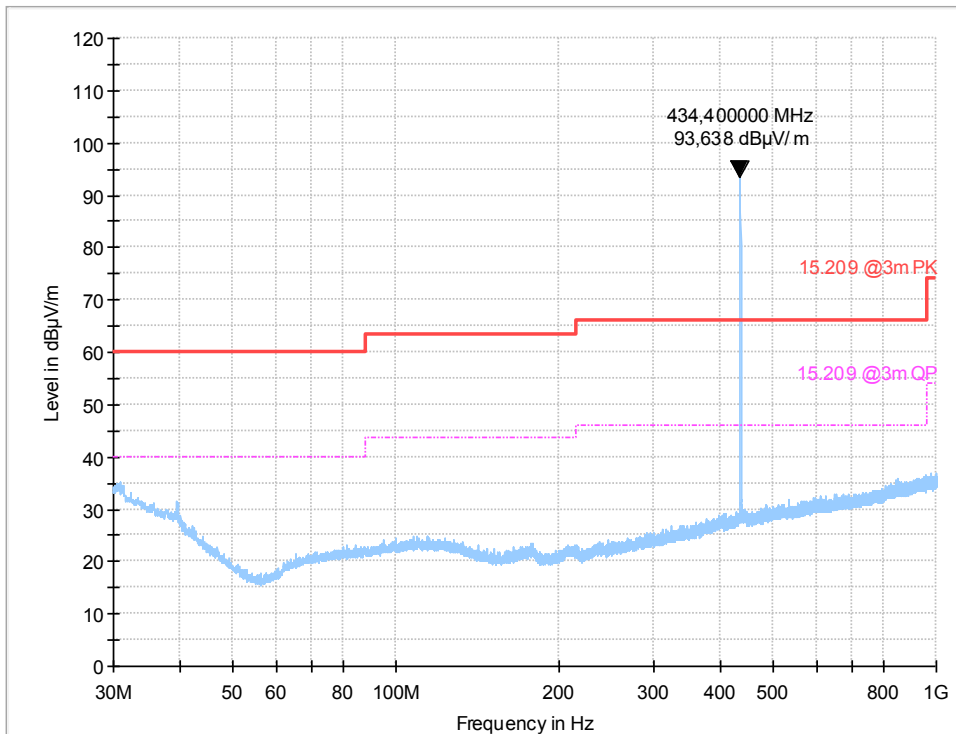


2.2.2 Plot 4

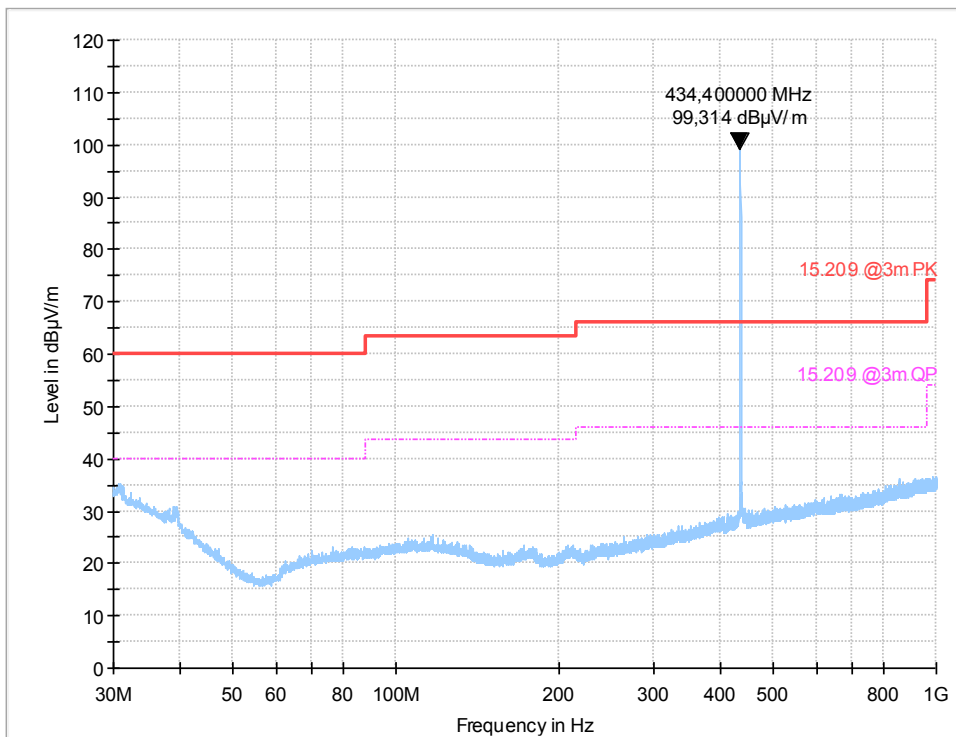

2.2.3 Plot 8

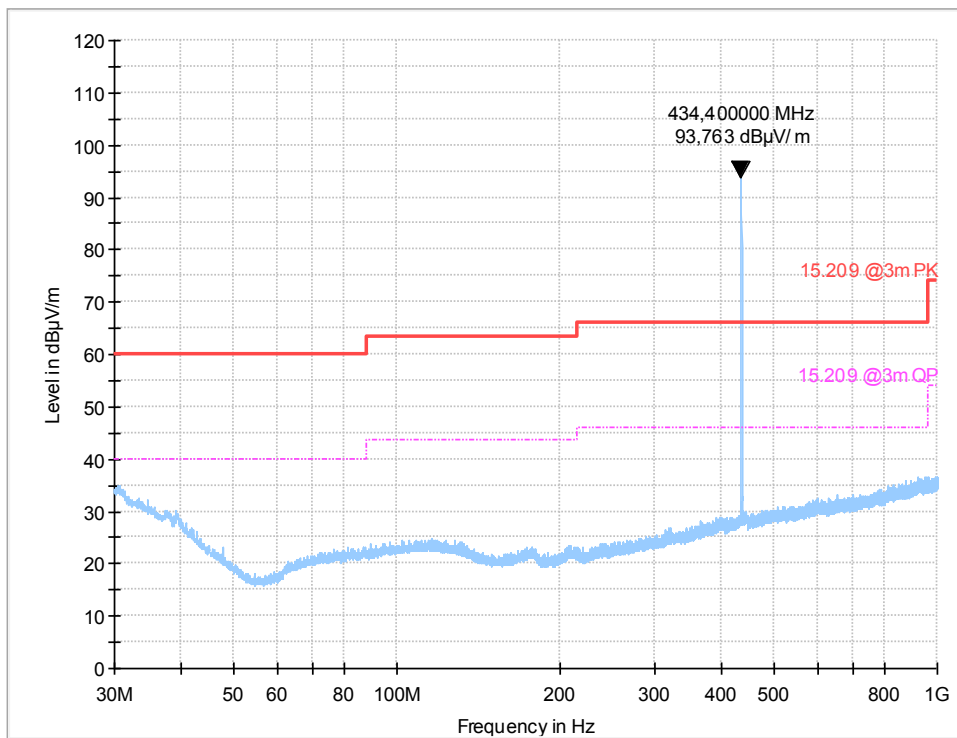


2.2.4 Plot 9

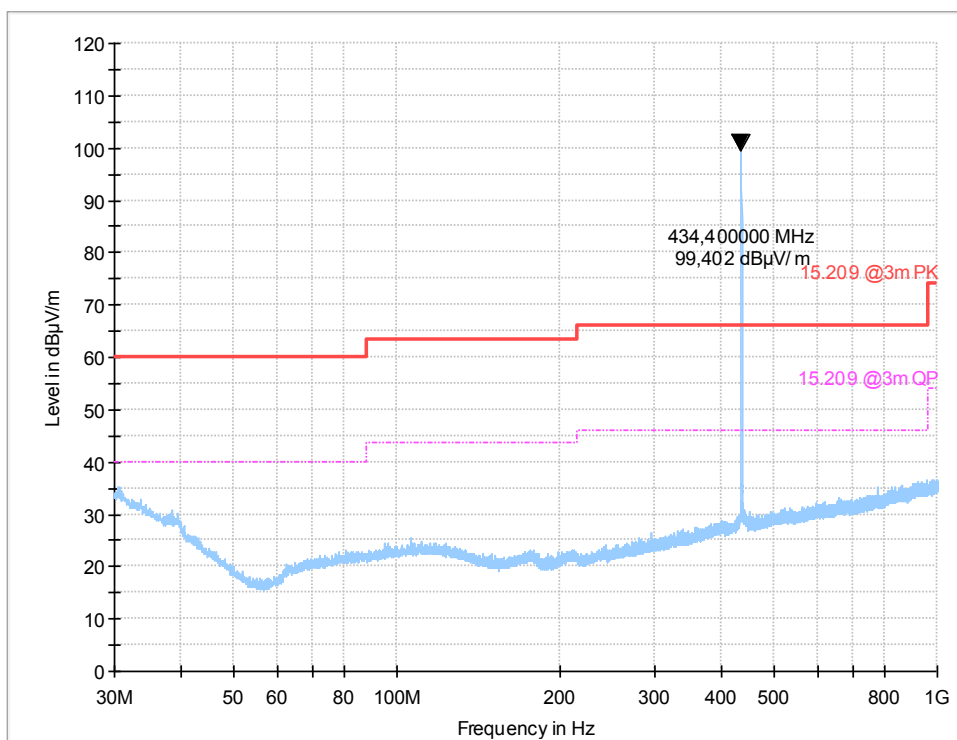


2.3 Radiated magnetic field strength measurements ($1\text{ GHz} < f < 5\text{ GHz}$)

2.3.1 Plot 5

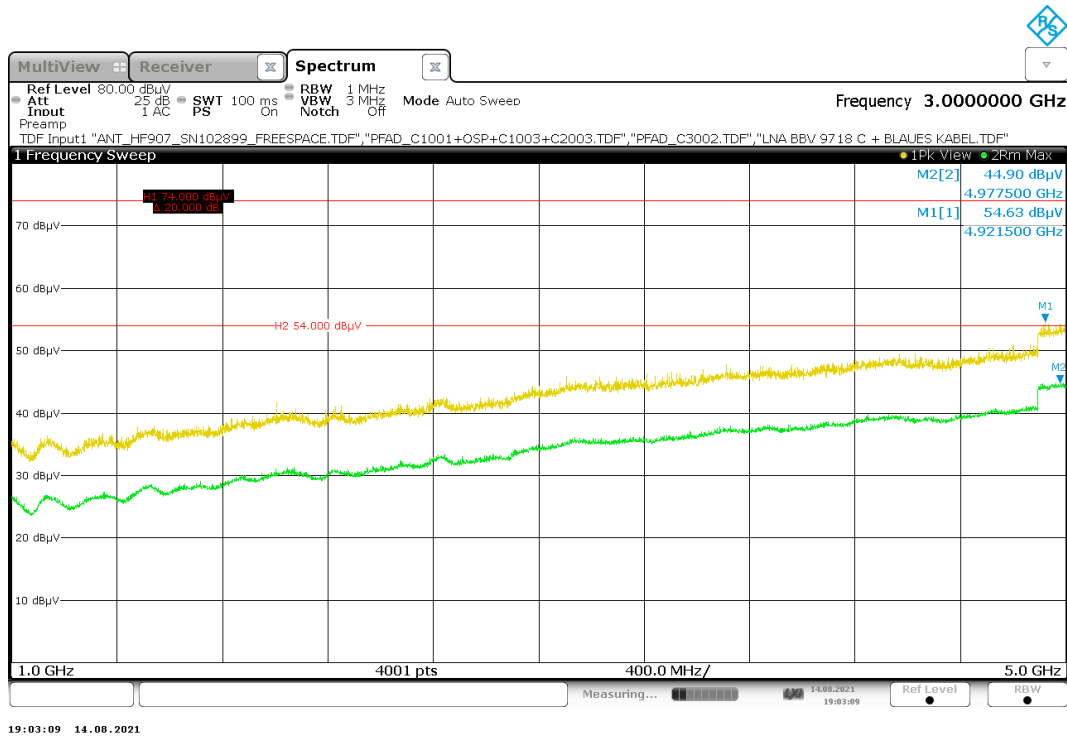


2.3.2 Plot 10

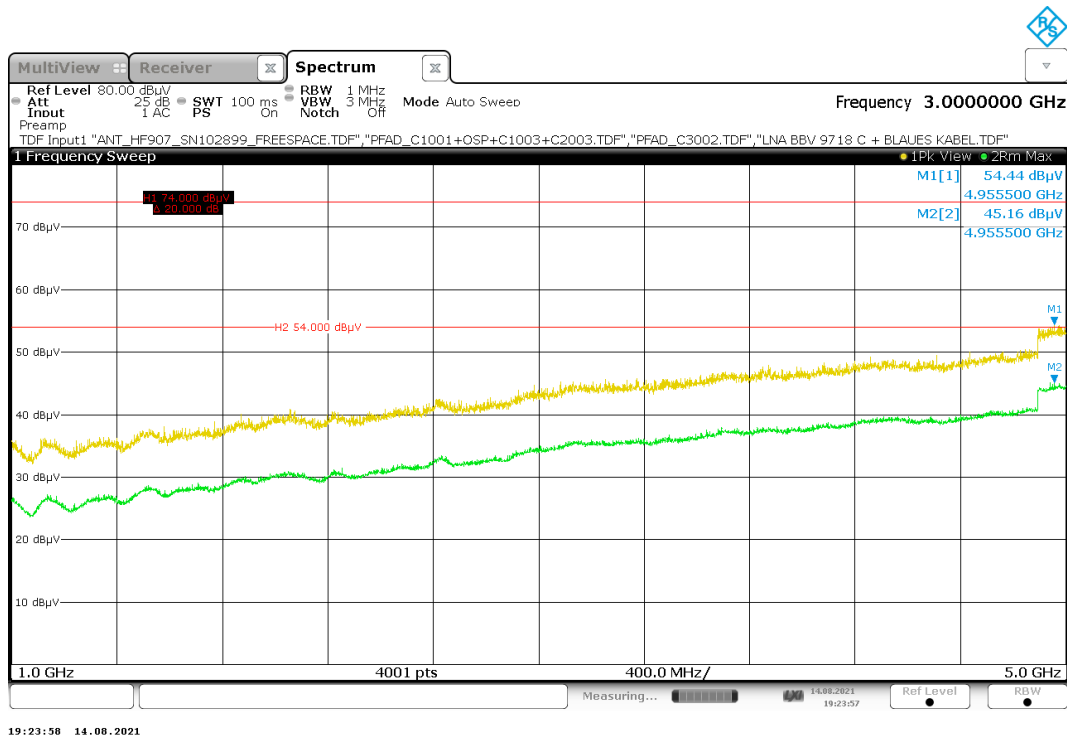


3 Transmit time

3.1 Plot 1*. RKE.

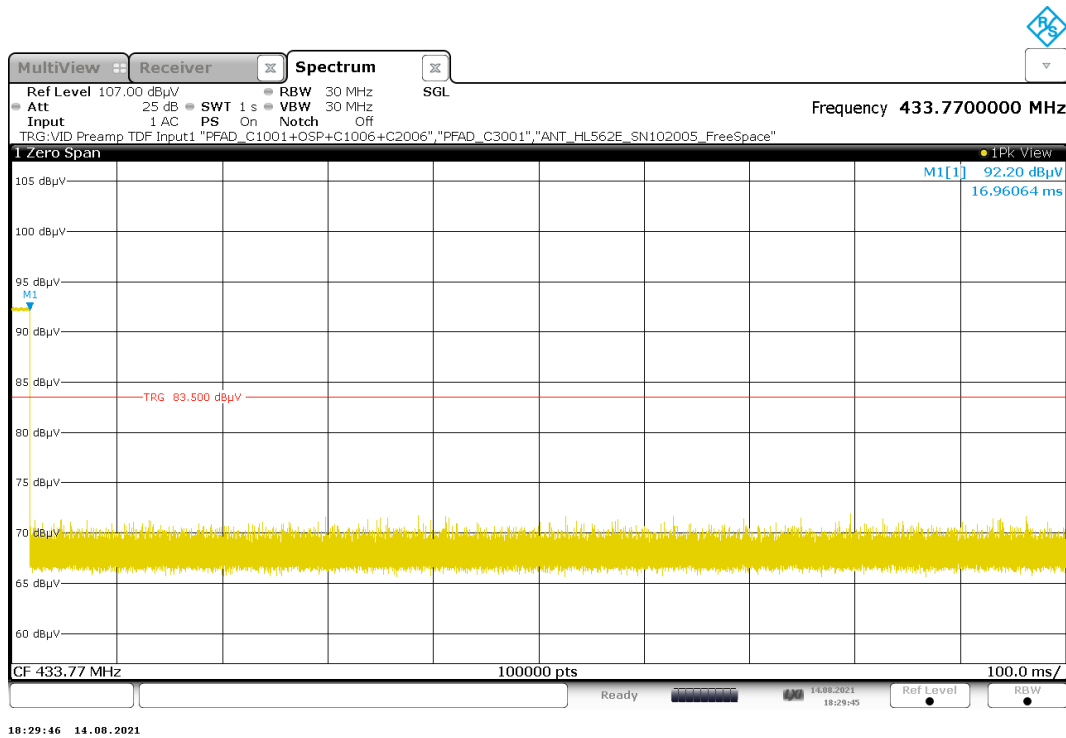

Duty cycle (DC) = 16.96 ms / 100 ms = 0.1696. Correct Factor = $20 \cdot \log(\text{DC}) = -15.4$ dB

3.2 Plot 2*. PASE

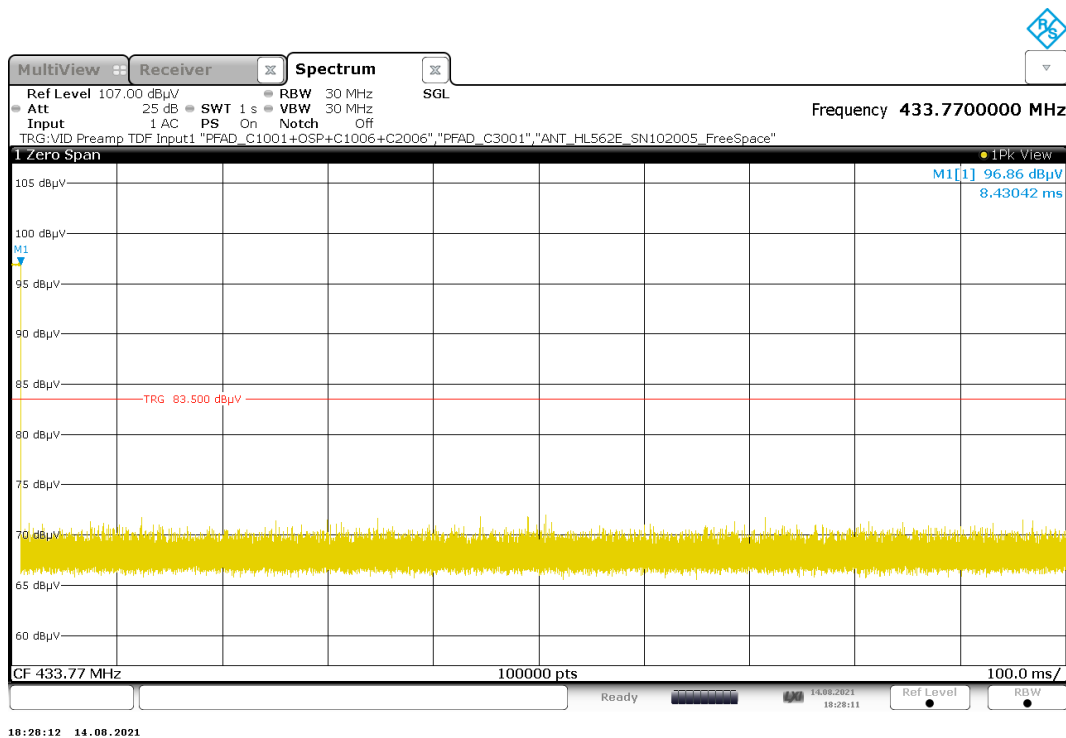


Duty cycle (DC) = 8.43 ms / 100 ms = 0.0843. Correct Factor = $20 \cdot \log(\text{DC}) = -21.5$ dB

Annex A of TR no.: **20114752-20162-1**


* The tested EUT uses a special test mode, not a real test mode. According to customer's information each RF transmission of the EUT will cease within less than 5 seconds after being triggered by the user. No test with real mode was done because the appropriate set-up for it is too complex and costly.

4 Occupied Bandwidth


4.1 20 dB bandwidth, set-up 1, op. 1

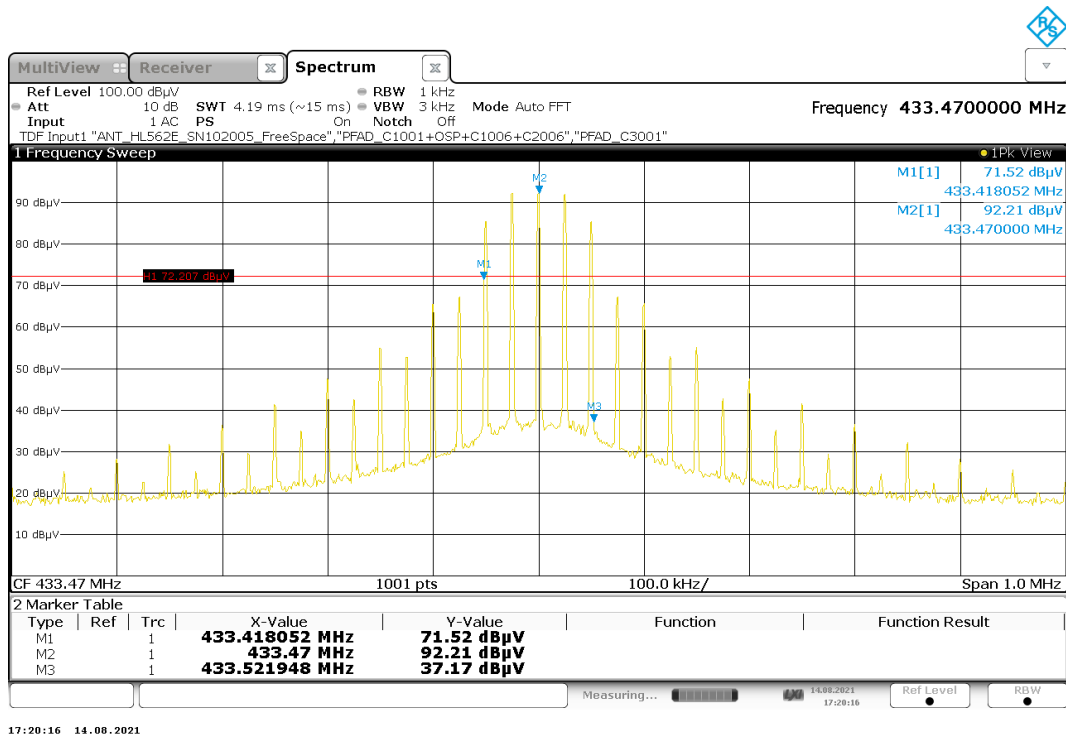


4.2 20 dB bandwidth, set-up 1, op. 2

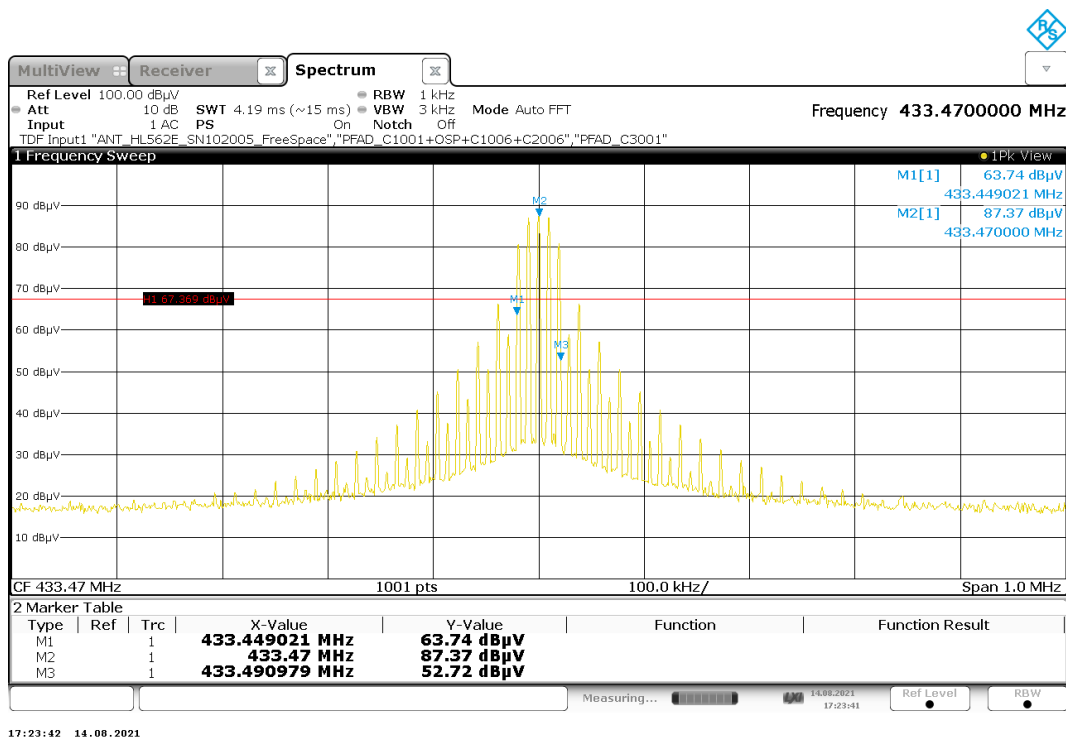


4.3 20 dB bandwidth, set-up 1, op. 3

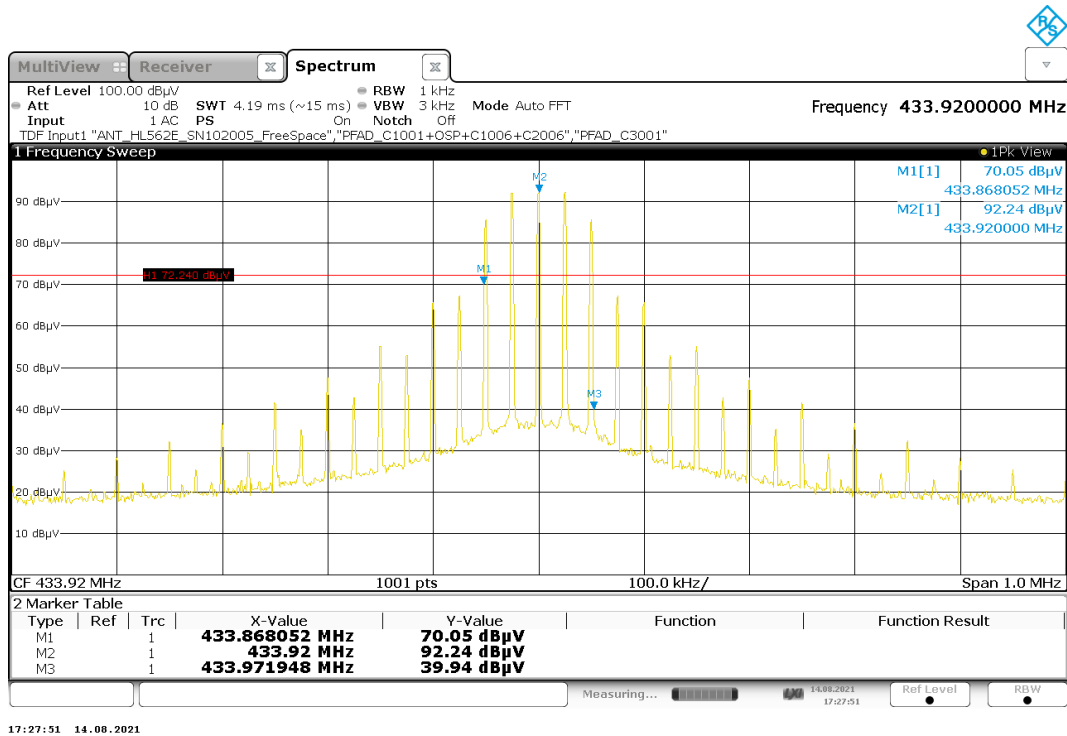


4.4 20 dB bandwidth, set-up 1, op. 4

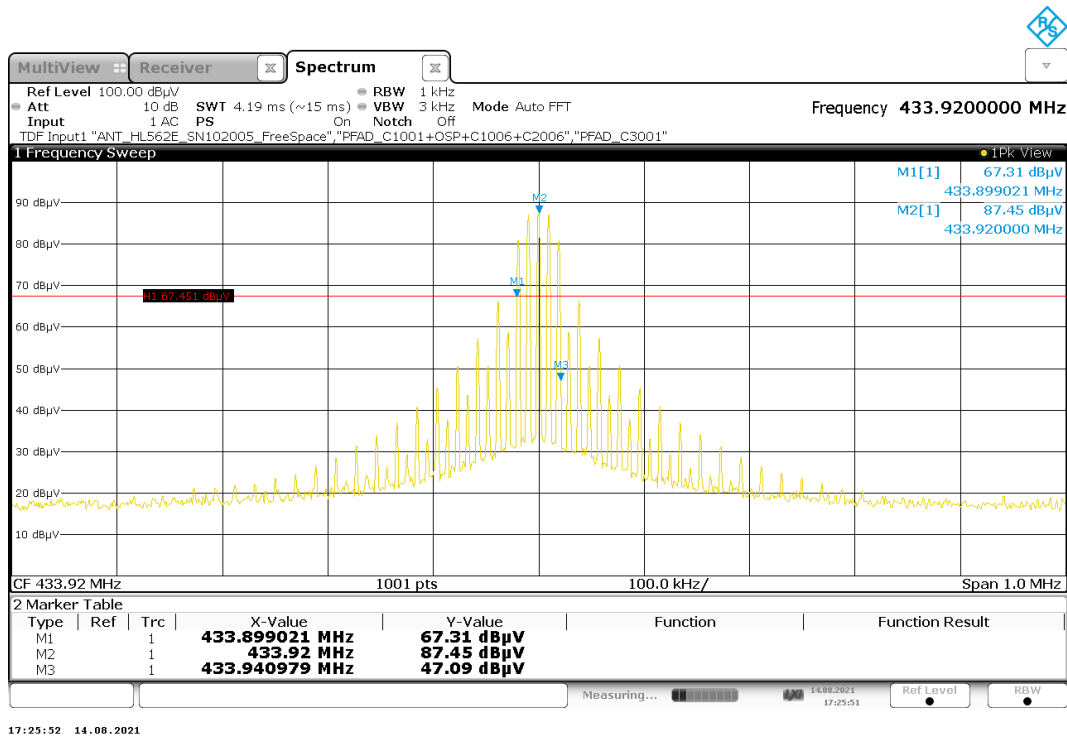


4.5 20 dB bandwidth, set-up 1, op. 5

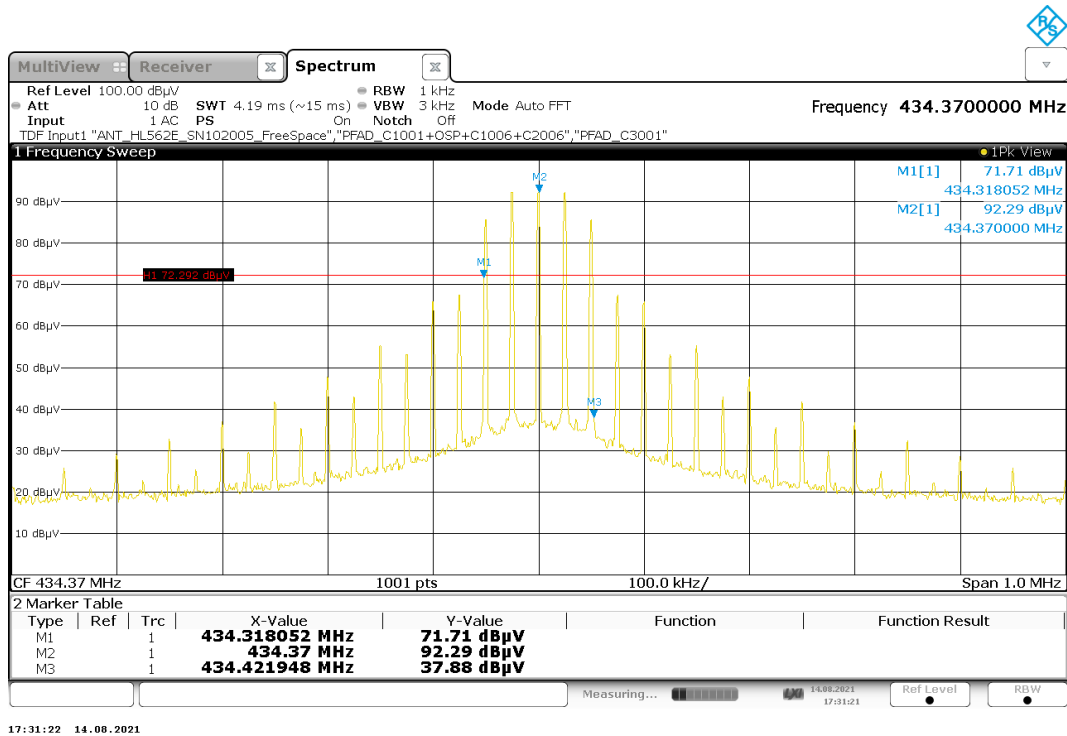


4.6 20 dB bandwidth, set-up 1, op. 6

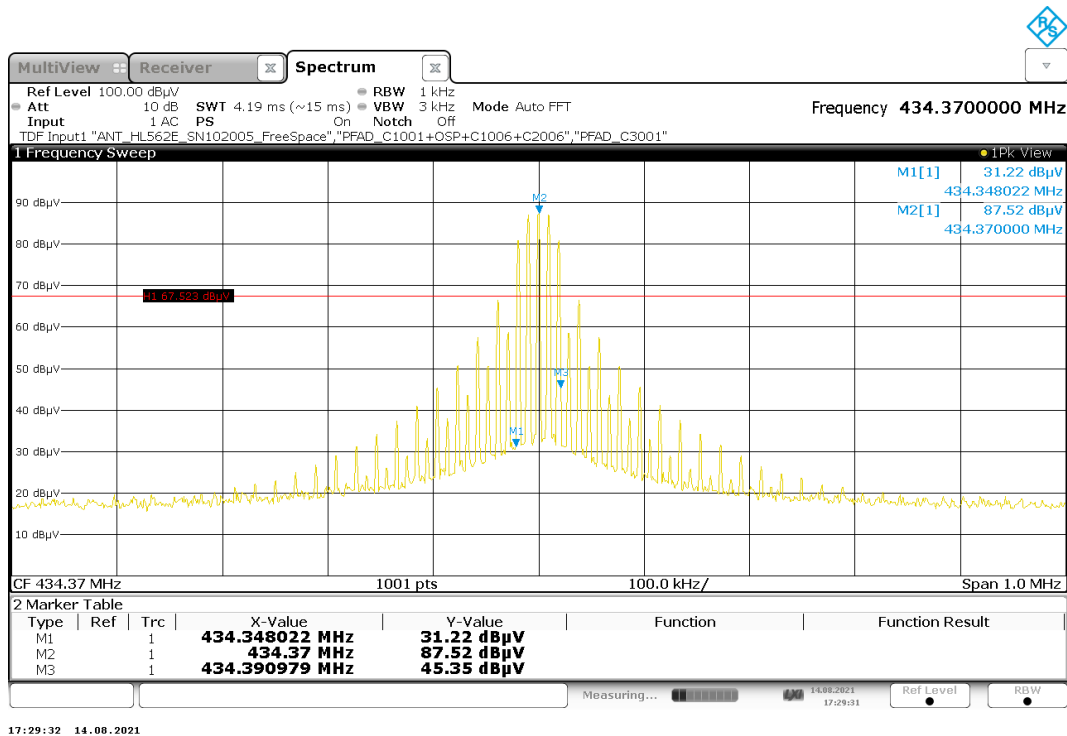


4.7 20 dB bandwidth, set-up 1, op. 7

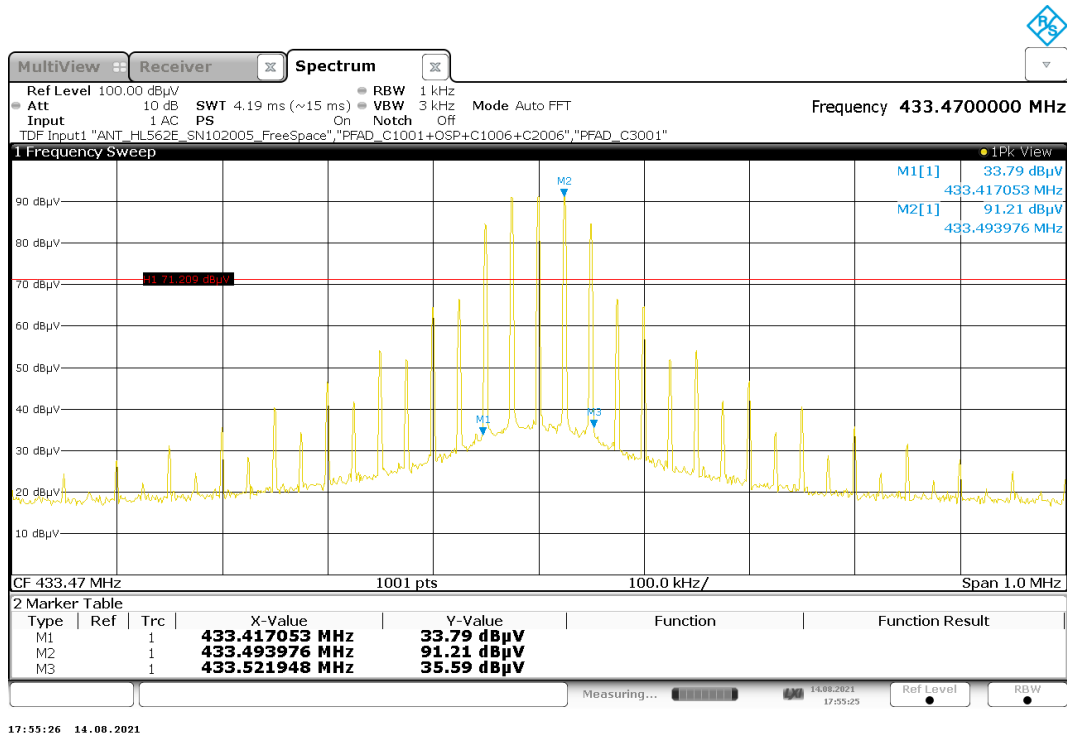


4.8 20 dB bandwidth, set-up 1, op. 8

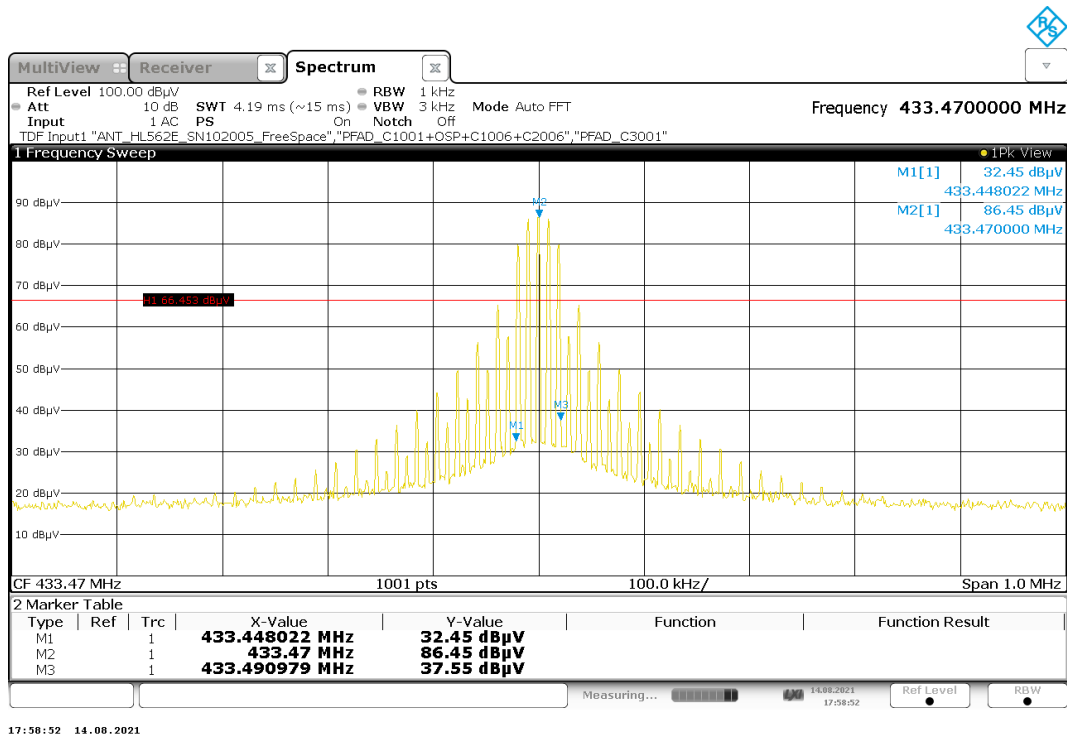


4.9 20 dB bandwidth, set-up 1, op. 9

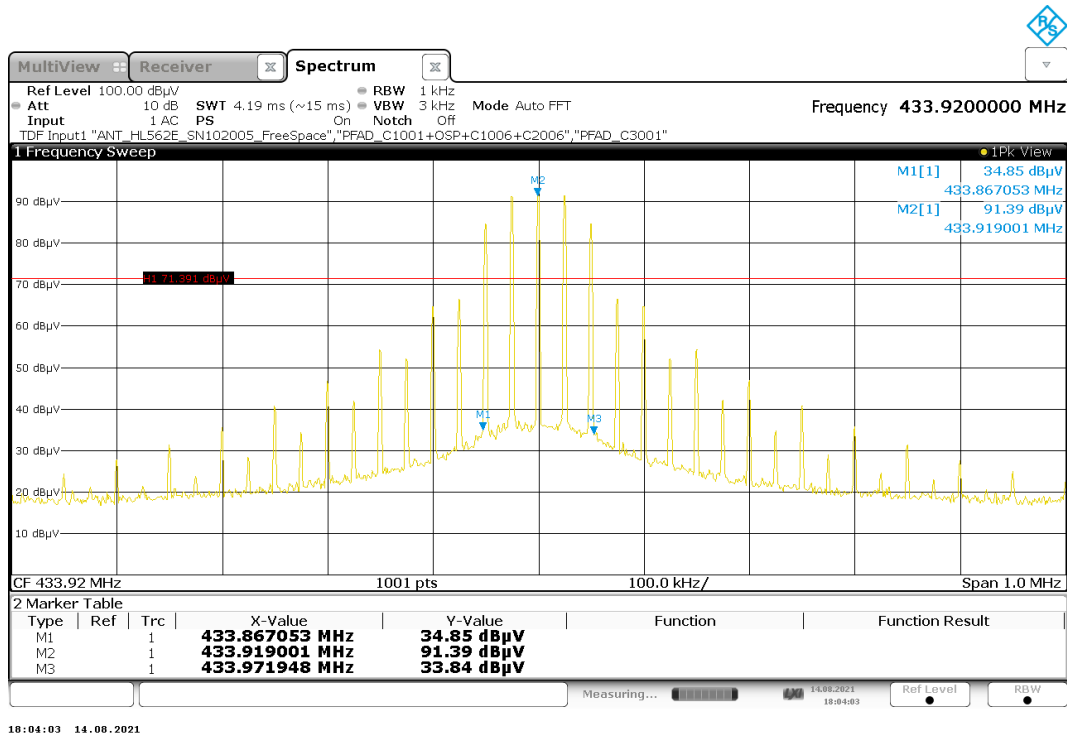


4.10 20 dB bandwidth, set-up 1, op. 10

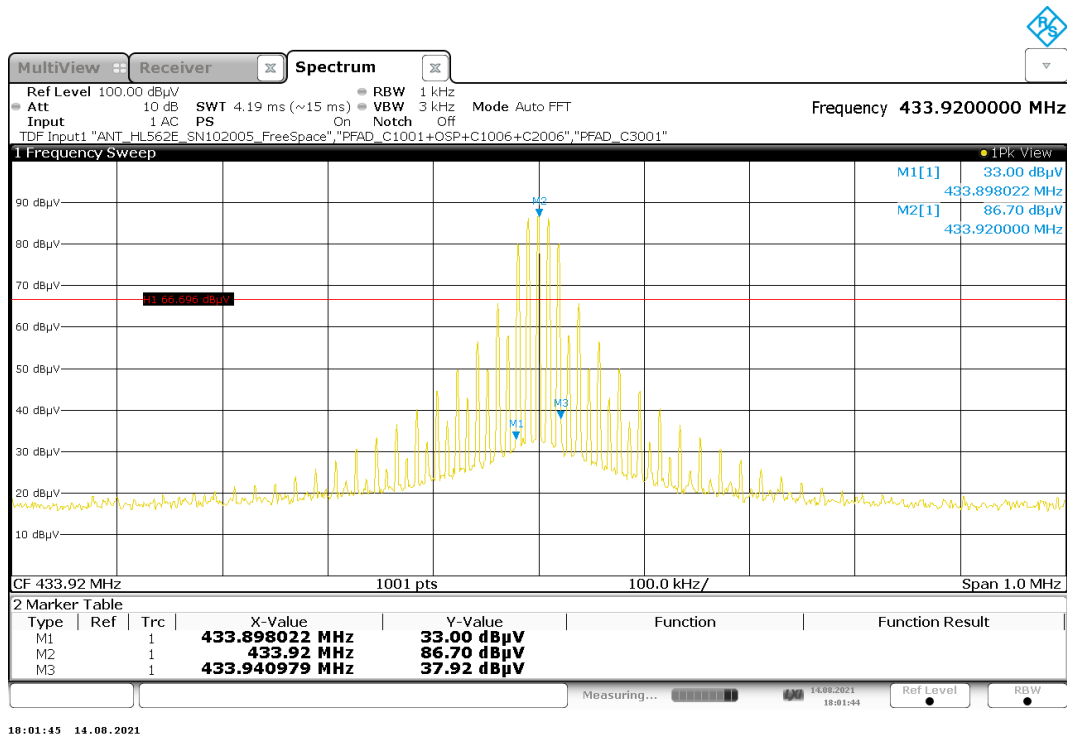


4.11 20 dB bandwidth, set-up 1, op. 11

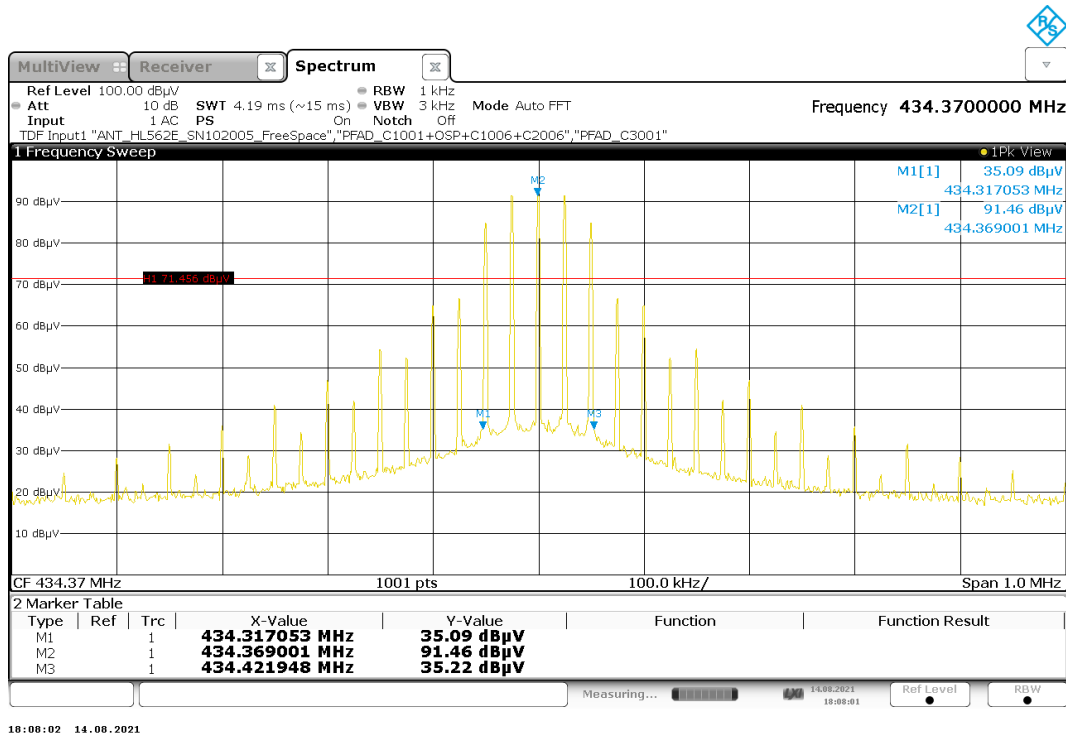


4.12 20 dB bandwidth, set-up 1, op. 12

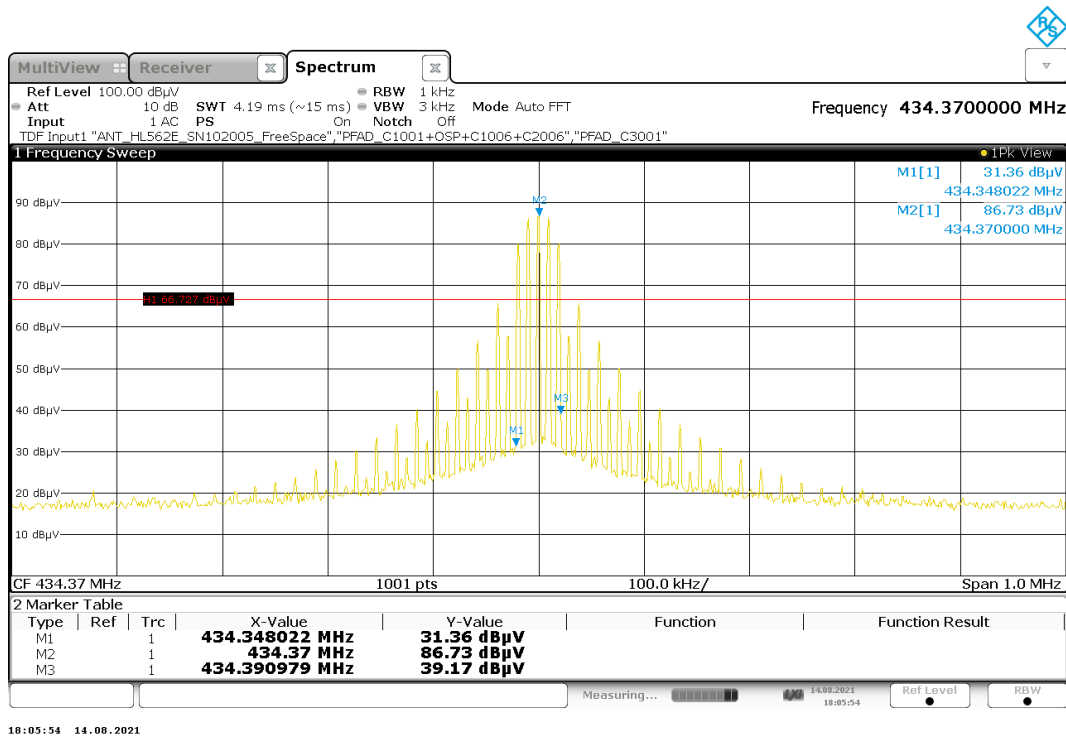


4.13 99 % occupied bandwidth, set-up 1, op. 1

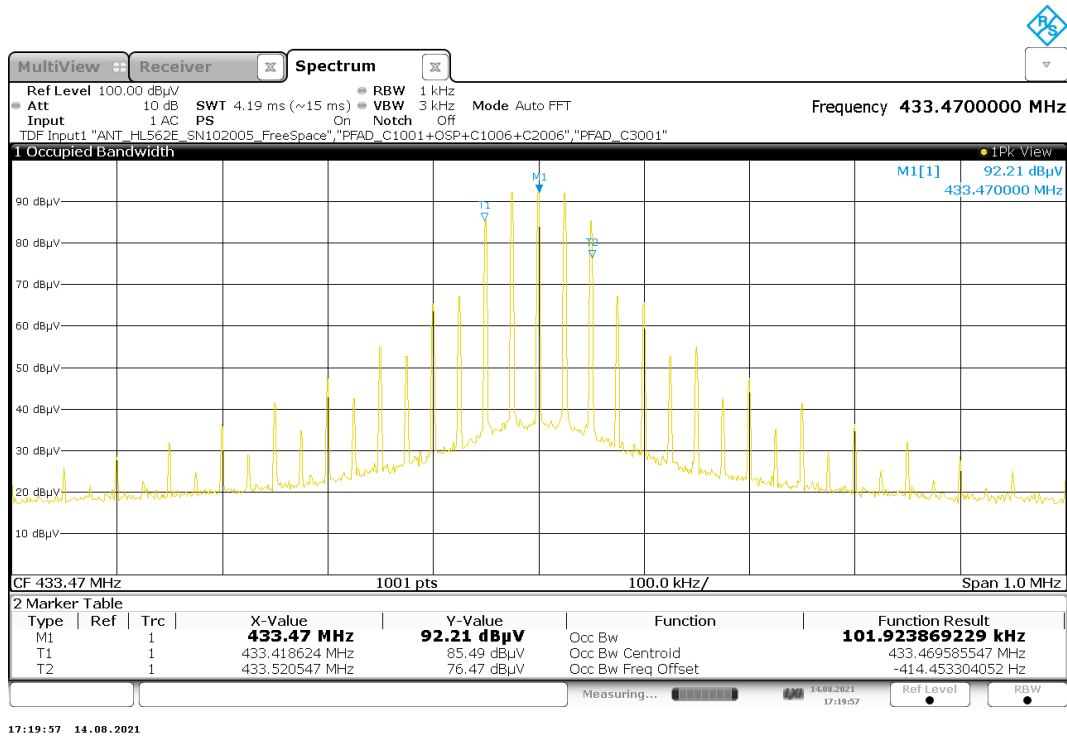


4.14 99 % occupied bandwidth, set-up 1, op. 2

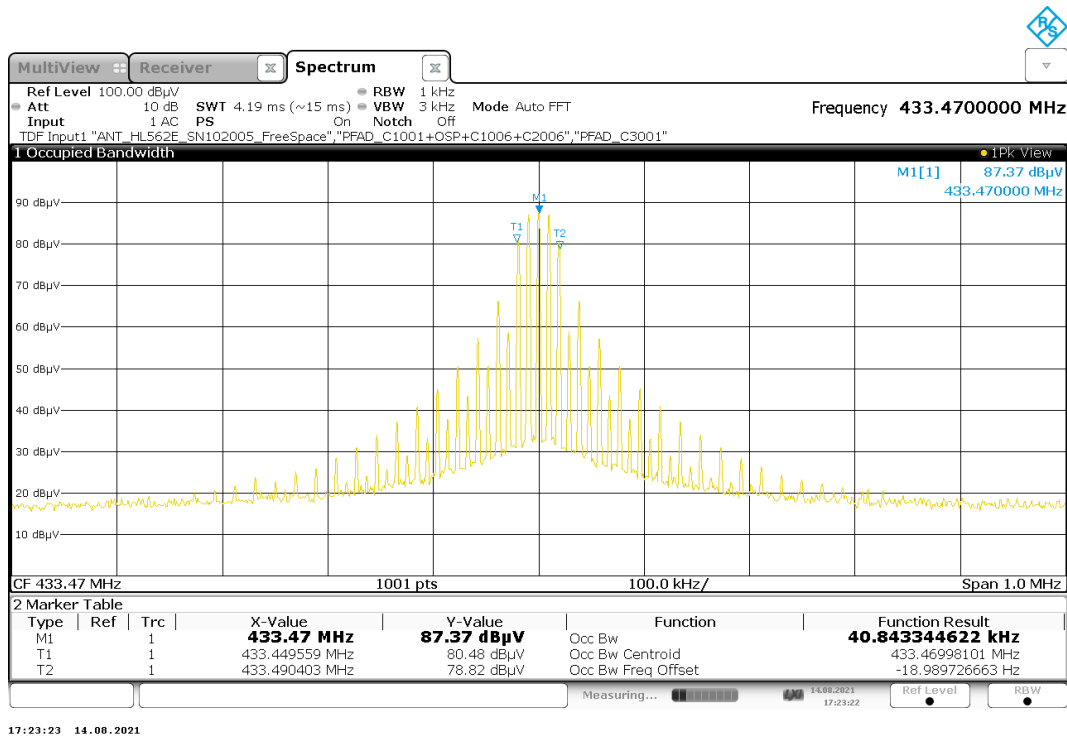


4.15 99 % occupied bandwidth, set-up 1, op. 3

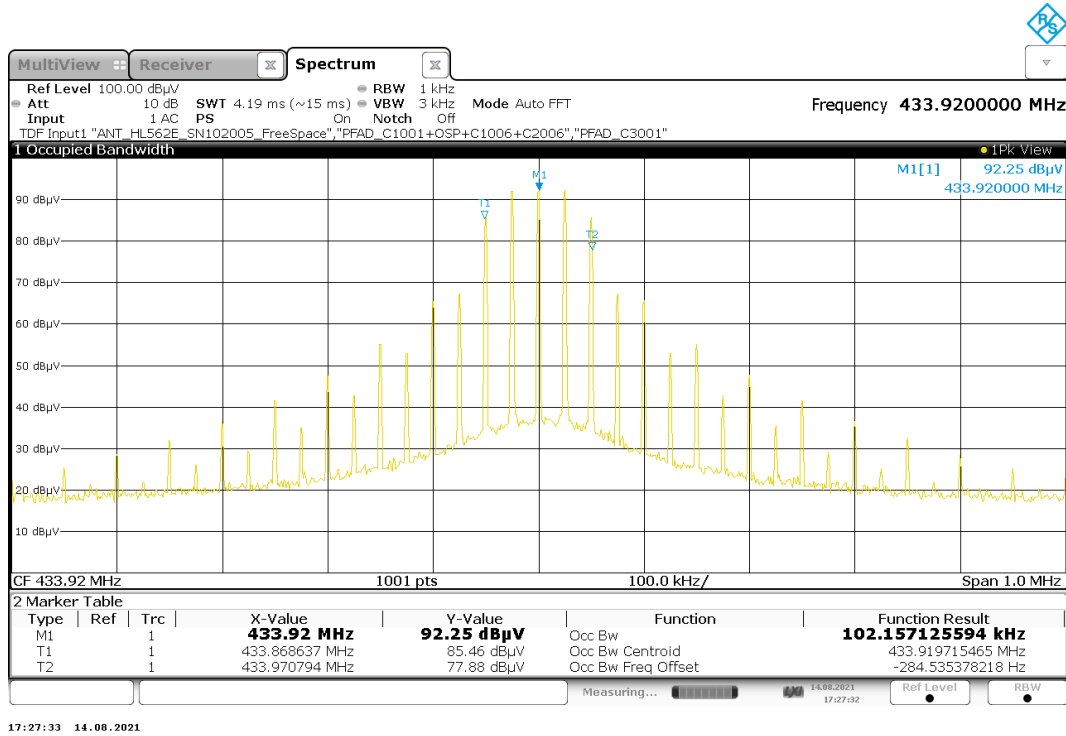


4.16 99 % occupied bandwidth, set-up 1, op. 4

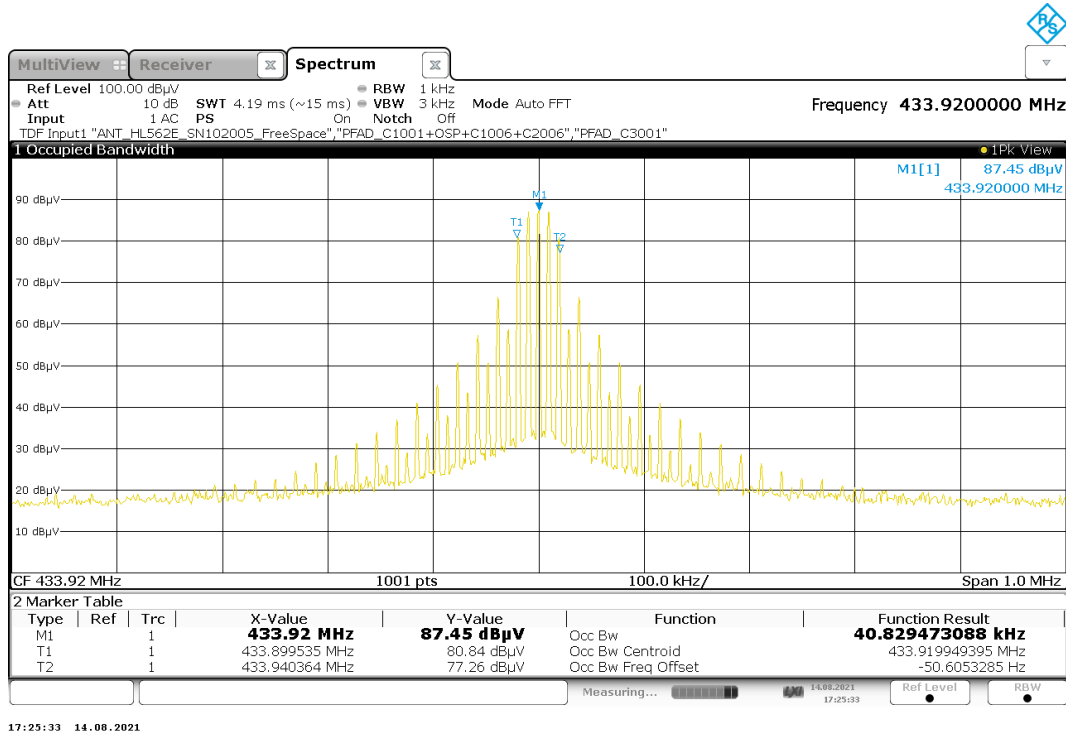


4.17 99 % occupied bandwidth, set-up 1, op. 5

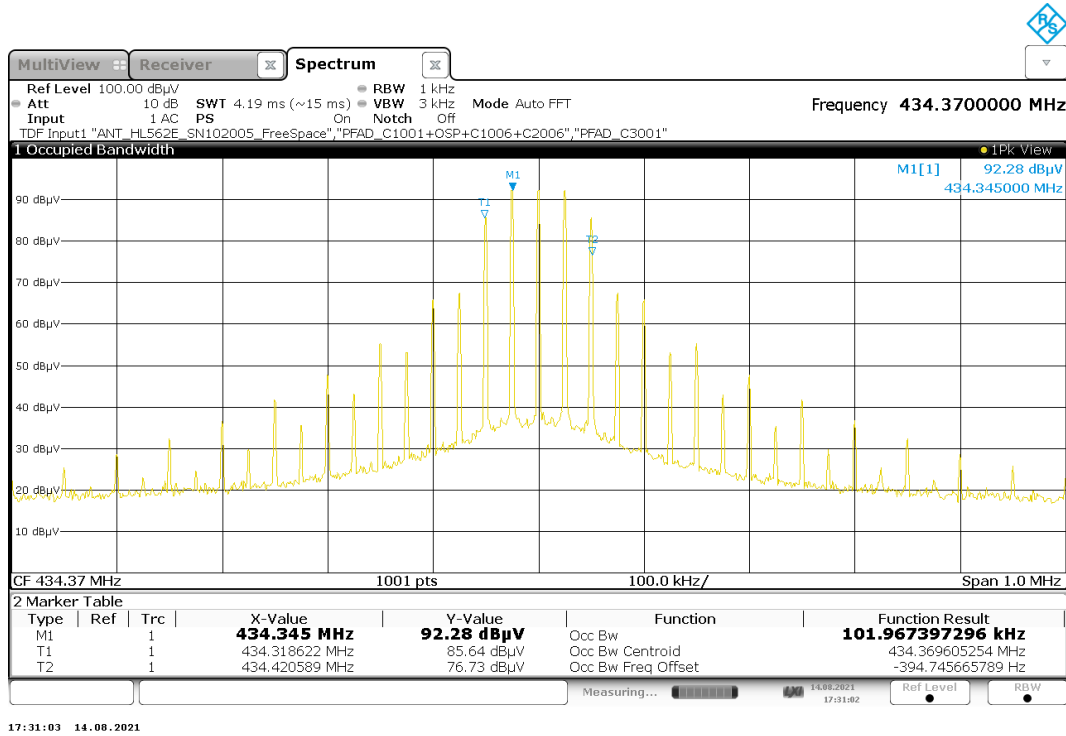


4.18 99 % occupied bandwidth, set-up 1, op. 6

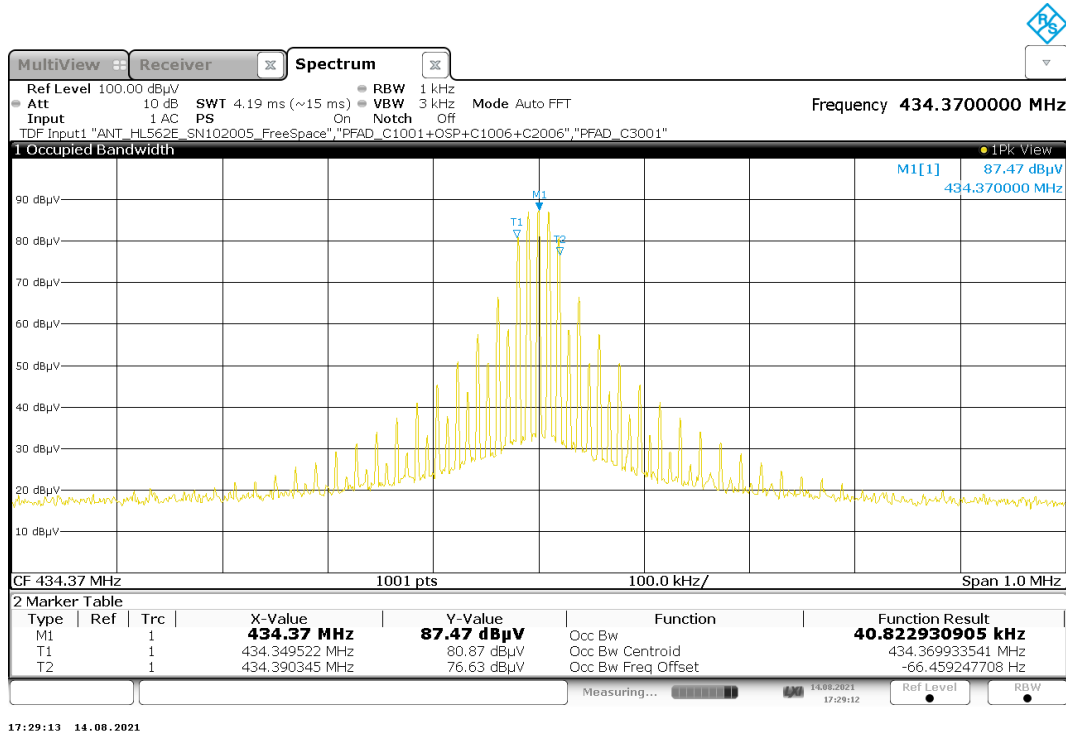


4.19 99 % occupied bandwidth, set-up 1, op. 7

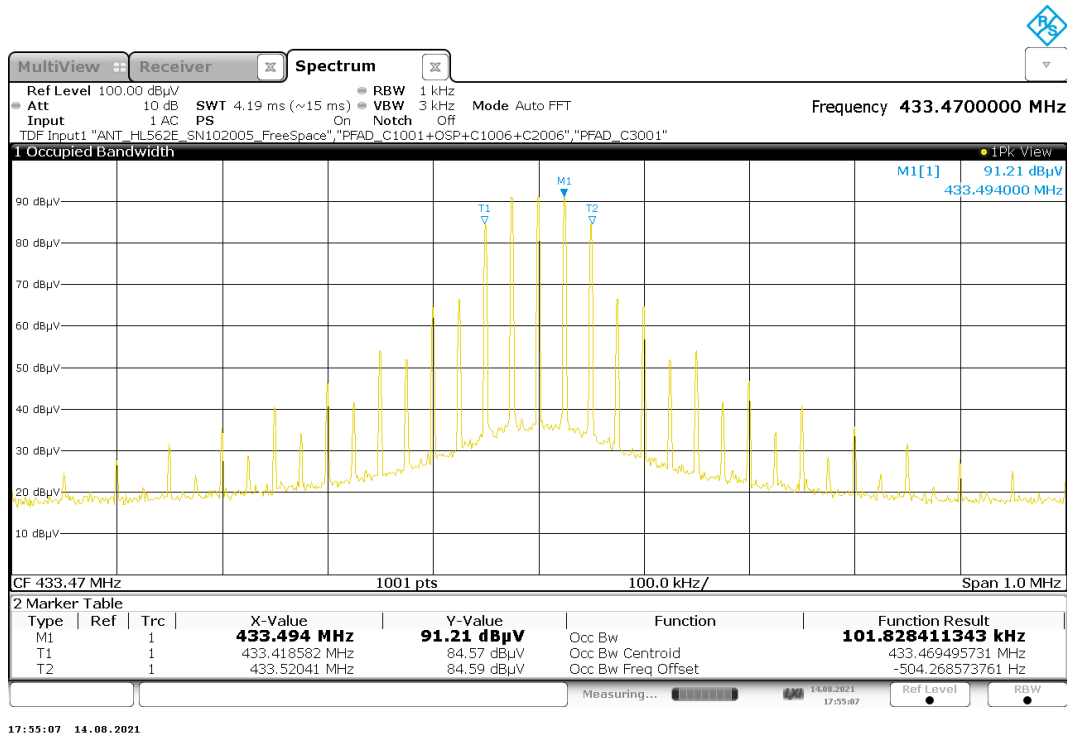


4.20 99 % occupied bandwidth, set-up 1, op. 8

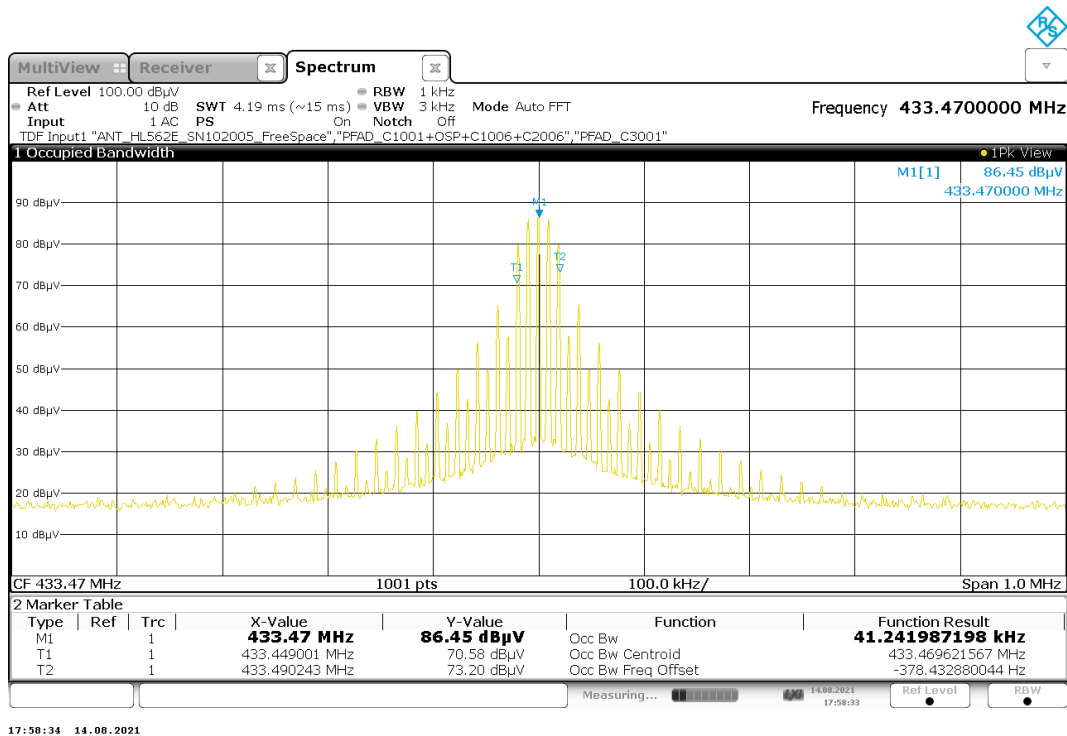


4.21 99 % occupied bandwidth, set-up 1, op. 9

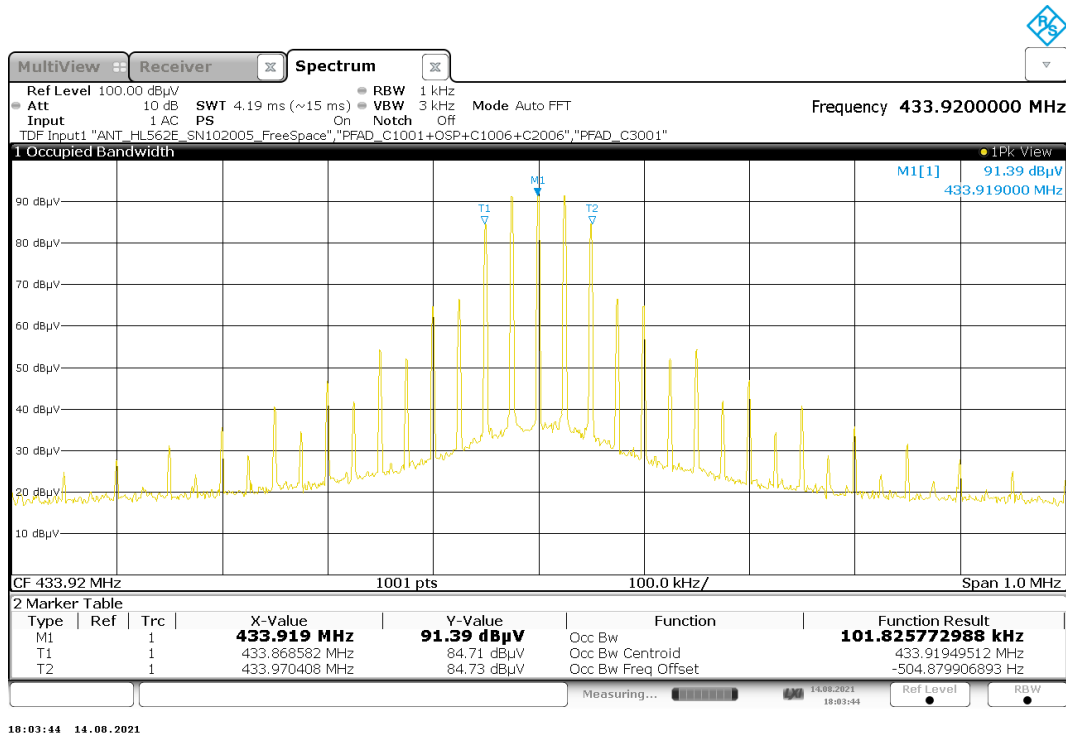

4.22 99 % occupied bandwidth, set-up 1, op. 10

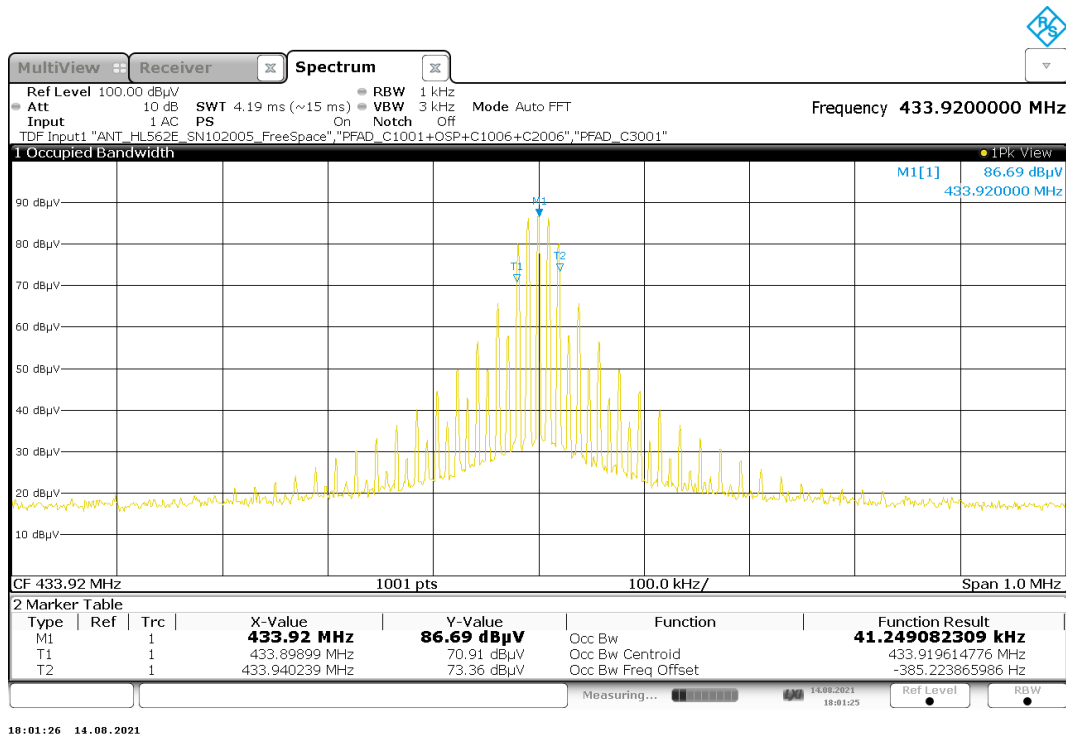

4.23 99 % occupied bandwidth, set-up 1, op. 11

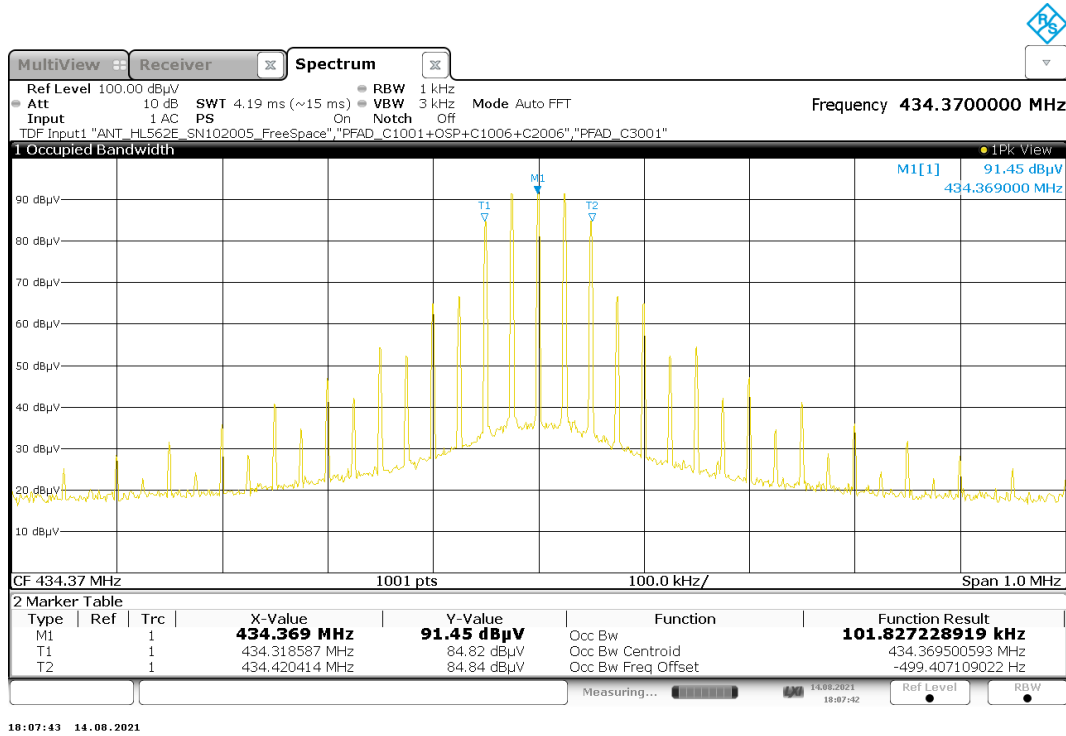

4.24 99 % occupied bandwidth, set-up 1, op. 12

