

FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 24129PN74G
FCC ID : 2AFZZPN74G
STANDARD : 47 CFR Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Aug. 30, 2024 ~ Sep. 27, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Maximum EIRP Power and Emission Designator	6
1.7 Testing Site	7
1.8 Test Software.....	7
1.9 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power Measurement	13
3.5 Peak-to-Average Ratio	14
3.6 EIRP	15
3.7 Occupied Bandwidth.....	16
3.8 Conducted Band Edge Measurement	17
3.9 Conducted Spurious Emission Measurement	18
3.10 Frequency Stability Measurement.....	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission Measurement	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



SPORTON LAB.

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG482619N	Rev. 01	Initial issue of report	Oct. 14, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 43.96 dB at 13820.000 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	24129PN74G
FCC ID	2AFZZPN74G
IMEI Code	Conducted: 864868070035782/864868070035790 Radiation: 864868070038067/864868070038075
HW Version	1352000O3
SW Version	Xiaomi HyperOS 2.0
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n77/n78: 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 4> 5G NR n77/n78: -2.2 dBi <Ant. 5> 5G NR n77/n78: -0.2 dBi <Ant. 8> 5G NR n77/n78: -2.5 dBi <Ant. 9> 5G NR n77/n78: -4.5 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP is shown in the report, 5G NR n77/n78 for Antenna 4.
2. The device supports n77/n78(1T4R) SRS resources on Ant.4/5/8/9, only the test data of worst Ant.4 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.

4. The device supports HPUE mode for 5G NR n77/n78.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.4046	8M59G7D	0.3155	8M60W7D
15	3457.50 ~ 3542.49	0.3451	13M6G7D	0.2183	13M6W7D
20	3460.02 ~ 3540.00	0.4036	18M2G7D	0.3076	18M2W7D
25	3462.51 ~ 3537.48	0.2254	23M3G7D	0.2291	23M3W7D
30	3465.00 ~ 3534.99	0.4305	27M9G7D	0.3289	27M9W7D
40	3470.01 ~ 3529.98	0.4198	37M8G7D	0.3119	37M9W7D
50	3475.02 ~ 3525.00	0.4634	47M5G7D	0.3404	47M6W7D
60	3480.00 ~ 3519.99	0.4159	57M9G7D	0.3243	58M0W7D
70	3485.01 ~ 3514.98	0.4446	67M4G7D	0.3396	67M7W7D
80	3490.02 ~ 3510.00	0.4426	77M5G7D	0.3373	77M6W7D
90	3495.00 ~ 3504.99	0.4539	87M5G7D	0.3436	87M6W7D
100	3500.01	0.4446	97M7G7D	0.3396	97M7W7D

5G NR n78		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.4055	8M59G7D	0.3170	8M60W7D
15	3457.50 ~ 3542.49	0.3412	13M6G7D	0.2213	13M6W7D
20	3460.02 ~ 3540.00	0.4150	18M2G7D	0.3133	18M2W7D
25	3462.51 ~ 3537.48	0.2323	23M3G7D	0.2275	23M3W7D
30	3465.00 ~ 3534.99	0.4315	27M9G7D	0.3327	27M9W7D
40	3470.01 ~ 3529.98	0.4150	37M8G7D	0.3206	37M9W7D
50	3475.02 ~ 3525.00	0.4406	47M5G7D	0.3388	47M6W7D
60	3480.00 ~ 3519.99	0.4169	57M9G7D	0.3228	58M0W7D
70	3485.01 ~ 3514.98	0.4436	67M4G7D	0.3428	67M7W7D
80	3490.02 ~ 3510.00	0.4498	77M5G7D	0.3524	77M6W7D
90	3495.00 ~ 3504.99	0.4529	87M5G7D	0.3508	87M6W7D
100	3500.01	0.4550	97M7G7D	0.3532	97M7W7D

Note:

1. 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH04-KS	AUDIX	E3	210616

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y plane)

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n77	20M	PI/2 BPSK, QPSK	1RB, Full RB	M
E.I.R.P	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	5G n77	10M, 60M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n77	10M, 60M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n77	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n77	Worst case from maximum power			M
	5G n78	Worst case from maximum power			M

Note:

- The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- Frequency Stability: Normal Voltage = 3.8V; Low Voltage = 3.6V; High Voltage = 4.3V.

2.2 Connection Diagram of Test System

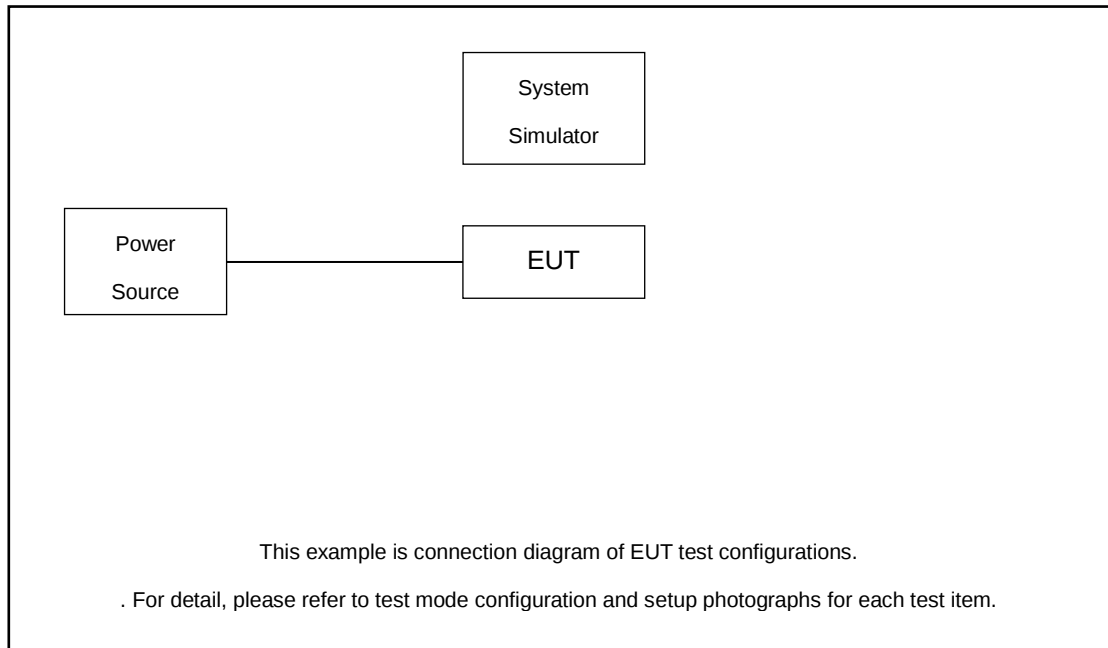

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 6.5 + 10 = 26.5 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

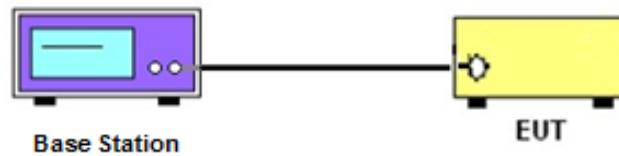

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

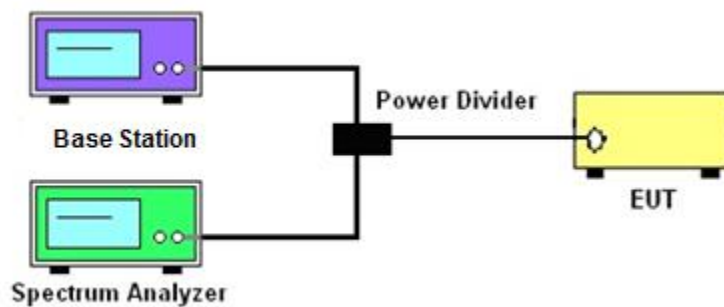

3.2.3 Frequency Stability

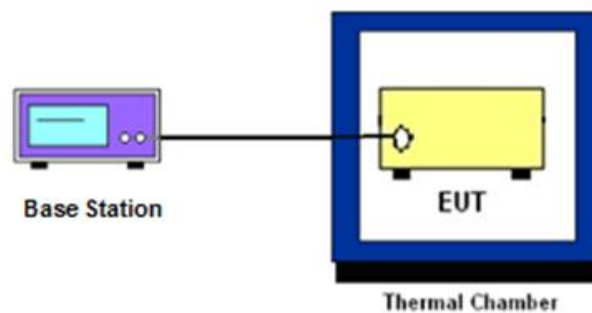

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

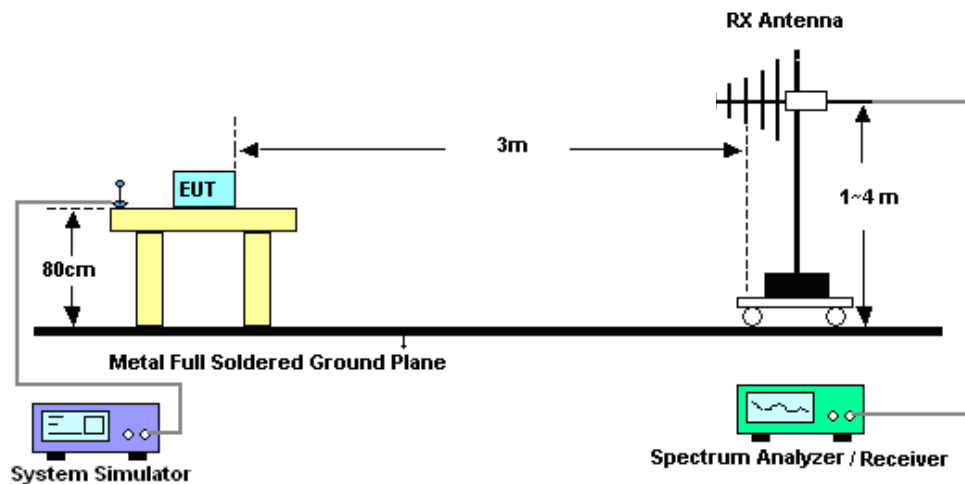

4.2.3 For radiated test above 1GHz

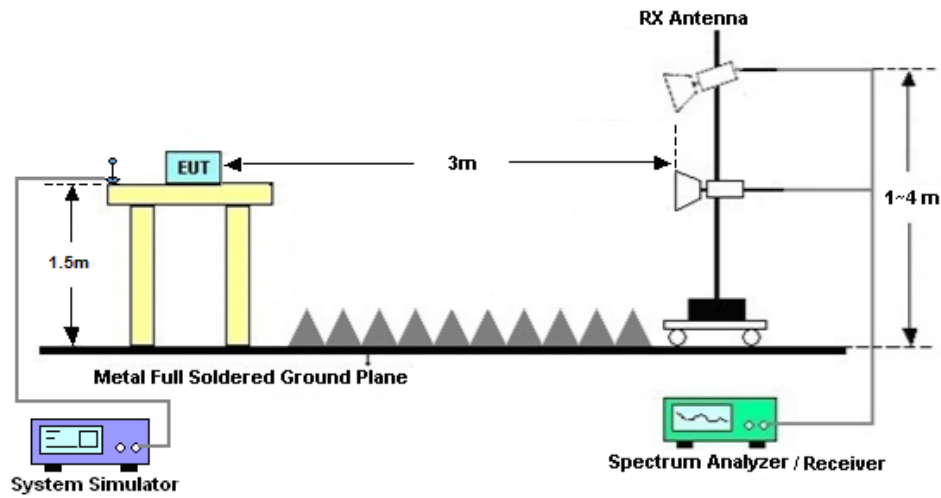

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Aug. 30, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 30, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Aug. 30, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2023	Sep. 27, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 11, 2023	Sep. 27, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Sep. 27, 2024	Sep. 07, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 06, 2023	Sep. 27, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Sep. 27, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Sep. 27, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Sep. 27, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Sep. 27, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 11, 2023	Sep. 27, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz-18Ghz	Oct. 11, 2023	Sep. 27, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 27, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 27, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 27, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.50 dB
Frequency Stability	±0.04 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring uncertainty for a level of Confidence of 95% ($u = 2uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

5G NR n77 for Ant.4

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	30	10	630334	3455.01	DFT-s-OFDM PI/2 BPSK	1@1	28.27	26.07	0.4046
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	28.24	26.04	0.4018
77	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	27.19	24.99	0.3155
77	30	10	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.12	25.92	0.3908
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.03	25.83	0.3828
77	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.98	24.78	0.3006
77	30	10	636332	3544.98	DFT-s-OFDM PI/2 BPSK	1@1	27.89	25.69	0.3707
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	27.81	25.61	0.3639
77	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	26.75	24.55	0.2851
77	30	15	630500	3457.5	DFT-s-OFDM PI/2 BPSK	1@1	27.58	25.38	0.3451
77	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	27.49	25.29	0.2183
77	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	27.49	25.29	0.2183
77	30	15	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	27.31	25.11	0.2094
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	27.23	25.03	0.2056
77	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.27	25.07	0.2075
77	30	15	636166	3542.49	DFT-s-OFDM PI/2 BPSK	1@1	26.87	24.67	0.1892
77	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	26.81	24.61	0.1866
77	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	26.81	24.61	0.1866
77	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	28.26	26.06	0.4036
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	28.18	25.98	0.3963
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	27.08	24.88	0.3076
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.09	25.89	0.3882
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.03	25.83	0.3828
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.98	24.78	0.3006
77	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	27.91	25.71	0.3724
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	27.82	25.62	0.3648
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	26.84	24.64	0.2911
77	30	25	630834	3462.51	DFT-s-OFDM PI/2 BPSK	1@1	27.63	25.43	0.2254
77	30	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	27.6	25.4	0.2239
77	30	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	27.7	25.5	0.2291
77	30	25	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	27.47	25.27	0.2173
77	30	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	27.48	25.28	0.2178



77	30	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.48	25.28	0.2178
77	30	25	635832	3537.48	DFT-s-OFDM PI/2 BPSK	1@1	26.89	24.69	0.1901
77	30	25	635832	3537.48	DFT-s-OFDM QPSK	1@1	26.74	24.54	0.1837
77	30	25	635832	3537.48	DFT-s-OFDM 16 QAM	1@1	26.81	24.61	0.1866
77	30	30	631000	3465	DFT-s-OFDM PI/2 BPSK	1@1	28.54	26.34	0.4305
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	28.43	26.23	0.4198
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	27.37	25.17	0.3289
77	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.35	26.15	0.4121
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.32	26.12	0.4093
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.15	24.95	0.3126
77	30	30	635666	3534.99	DFT-s-OFDM PI/2 BPSK	1@1	28.21	26.01	0.3990
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	28.11	25.91	0.3899
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	27.04	24.84	0.3048
77	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	28.34	26.14	0.4111
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	28.43	26.23	0.4198
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	27.14	24.94	0.3119
77	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.27	26.07	0.4046
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.26	26.06	0.4036
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.99	24.79	0.3013
77	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	28.24	26.04	0.4018
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	28.08	25.88	0.3873
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	27.03	24.83	0.3041
77	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@1	28.86	26.66	0.4634
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	28.41	26.21	0.4178
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	27.52	25.32	0.3404
77	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.47	26.27	0.4236
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.45	26.25	0.4217
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.36	25.16	0.3281
77	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	28.46	26.26	0.4227
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	28.35	26.15	0.4121
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	27.24	25.04	0.3192
77	30	60	632000	3480	DFT-s-OFDM PI/2 BPSK	1@1	28.39	26.19	0.4159
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	28.35	26.15	0.4121
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	27.31	25.11	0.3243
77	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.26	26.06	0.4036
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.31	26.11	0.4083
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.24	25.04	0.3192
77	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	28.31	26.11	0.4083
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	28.33	26.13	0.4102
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	27.1	24.9	0.3090
77	30	70	632334	3485.01	DFT-s-OFDM PI/2 BPSK	1@1	28.68	26.48	0.4446
77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	28.51	26.31	0.4276
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	27.51	25.31	0.3396



77	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.57	26.37	0.4335
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.56	26.36	0.4325
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.41	25.21	0.3319
77	30	70	634332	3514.98	DFT-s-OFDM PI/2 BPSK	1@1	28.57	26.37	0.4335
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	28.44	26.24	0.4207
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	27.33	25.13	0.3258
77	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@1	28.66	26.46	0.4426
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	28.59	26.39	0.4355
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	27.48	25.28	0.3373
77	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.59	26.39	0.4355
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.47	26.27	0.4236
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.4	25.2	0.3311
77	30	80	634000	3510	DFT-s-OFDM PI/2 BPSK	1@1	28.58	26.38	0.4345
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	28.48	26.28	0.4246
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	27.41	25.21	0.3319
77	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@1	28.77	26.57	0.4539
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	28.59	26.39	0.4355
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	27.56	25.36	0.3436
77	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.68	26.48	0.4446
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.57	26.37	0.4335
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.56	25.36	0.3436
77	30	90	633666	3504.99	DFT-s-OFDM PI/2 BPSK	1@1	28.59	26.39	0.4355
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	28.56	26.36	0.4325
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	27.55	25.35	0.3428
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	28.26	26.06	0.4036
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.68	26.48	0.4446
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	27.82	25.62	0.3648
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	28.17	25.97	0.3954
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.67	26.47	0.4436
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	27.9	25.7	0.3715
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	27.13	24.93	0.3112
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.51	25.31	0.3396
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	26.67	24.47	0.2799
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	25.68	23.48	0.2228
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	25.79	23.59	0.2286
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	25.08	22.88	0.1941
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	23.68	21.48	0.1406
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	23.97	21.77	0.1503
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	23.13	20.93	0.1239
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	26.51	24.31	0.2698
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	27.2	25	0.3162
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	26.45	24.25	0.2661

**5G NR n78 for Ant.4**

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
78	30	10	630334	3455.01	DFT-s-OFDM PI/2 BPSK	1@1	28.28	26.08	0.4055
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	28.26	26.06	0.4036
78	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	27.21	25.01	0.3170
78	30	10	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.11	25.91	0.3899
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.09	25.89	0.3882
78	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.02	24.82	0.3034
78	30	10	636332	3544.98	DFT-s-OFDM PI/2 BPSK	1@1	27.95	25.75	0.3758
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	27.85	25.65	0.3673
78	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	26.77	24.57	0.2864
78	30	15	630500	3457.5	DFT-s-OFDM PI/2 BPSK	1@1	27.53	25.33	0.3412
78	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	27.45	23.35	0.2163
78	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	27.55	23.45	0.2213
78	30	15	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	27.32	23.22	0.2099
78	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	27.23	23.13	0.2056
78	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.21	23.11	0.2046
78	30	15	636166	3542.49	DFT-s-OFDM PI/2 BPSK	1@1	26.85	22.75	0.1884
78	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	26.75	22.65	0.1841
78	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	26.79	22.69	0.1858
78	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@1	28.38	26.18	0.4150
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	28.17	25.97	0.3954
78	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	27.16	24.96	0.3133
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.11	25.91	0.3899
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.09	25.89	0.3882
78	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.01	24.81	0.3027
78	30	20	636000	3540	DFT-s-OFDM PI/2 BPSK	1@1	27.97	25.77	0.3776
78	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	27.86	25.66	0.3681
78	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	26.78	24.58	0.2871
78	30	25	630834	3462.51	DFT-s-OFDM PI/2 BPSK	1@1	27.76	23.66	0.2323
78	30	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	27.59	23.49	0.2234
78	30	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	27.67	23.57	0.2275
78	30	25	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	27.43	23.33	0.2153
78	30	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	27.36	23.26	0.2118
78	30	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.45	23.35	0.2163
78	30	25	635832	3537.48	DFT-s-OFDM PI/2 BPSK	1@1	26.83	22.73	0.1875
78	30	25	635832	3537.48	DFT-s-OFDM QPSK	1@1	26.77	22.67	0.1849
78	30	25	635832	3537.48	DFT-s-OFDM 16 QAM	1@1	26.86	22.76	0.1888
78	30	30	631000	3465	DFT-s-OFDM PI/2 BPSK	1@1	28.55	26.35	0.4315
78	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	28.46	26.26	0.4227
78	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	27.42	25.22	0.3327
78	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.44	26.24	0.4207
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.33	26.13	0.4102



78	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.40	25.20	0.3311
78	30	30	635666	3534.99	DFT-s-OFDM PI/2 BPSK	1@1	28.29	26.09	0.4064
78	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	28.10	25.90	0.3890
78	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	27.09	24.89	0.3083
78	30	40	631334	3470.01	DFT-s-OFDM PI/2 BPSK	1@1	28.38	26.18	0.4150
78	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	28.35	26.15	0.4121
78	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	27.26	25.06	0.3206
78	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.35	26.15	0.4121
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.25	26.05	0.4027
78	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.23	25.03	0.3184
78	30	40	635332	3529.98	DFT-s-OFDM PI/2 BPSK	1@1	28.24	26.04	0.4018
78	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	28.20	26.00	0.3981
78	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	27.04	24.84	0.3048
78	30	50	631668	3475.02	DFT-s-OFDM PI/2 BPSK	1@1	28.64	26.44	0.4406
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	28.55	26.35	0.4315
78	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	27.50	25.30	0.3388
78	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.53	26.33	0.4295
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.42	26.22	0.4188
78	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.48	25.28	0.3373
78	30	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	28.56	26.36	0.4325
78	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	28.46	26.26	0.4227
78	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	27.37	25.17	0.3289
78	30	60	632000	3480	DFT-s-OFDM PI/2 BPSK	1@1	28.40	26.20	0.4169
78	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	28.40	26.20	0.4169
78	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	27.29	25.09	0.3228
78	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.37	26.17	0.4140
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.34	26.14	0.4111
78	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.24	25.04	0.3192
78	30	60	634666	3519.99	DFT-s-OFDM PI/2 BPSK	1@1	28.35	26.15	0.4121
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	28.35	26.15	0.4121
78	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	27.28	25.08	0.3221
78	30	70	632334	3485.01	DFT-s-OFDM PI/2 BPSK	1@1	28.67	26.47	0.4436
78	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	28.63	26.43	0.4395
78	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	27.55	25.35	0.3428
78	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.59	26.39	0.4355
78	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.59	26.39	0.4355
78	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.50	25.30	0.3388
78	30	70	634332	3514.98	DFT-s-OFDM PI/2 BPSK	1@1	28.56	26.36	0.4325
78	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	28.59	26.39	0.4355
78	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	27.50	25.30	0.3388
78	30	80	632668	3490.02	DFT-s-OFDM PI/2 BPSK	1@1	28.73	26.53	0.4498
78	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	28.69	26.49	0.4457
78	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	27.67	25.47	0.3524



78	30	80	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.68	26.48	0.4446
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.61	26.41	0.4375
78	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.55	25.35	0.3428
78	30	80	634000	3510	DFT-s-OFDM PI/2 BPSK	1@1	28.67	26.47	0.4436
78	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	28.60	26.40	0.4365
78	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	27.44	25.24	0.3342
78	30	90	633000	3495	DFT-s-OFDM PI/2 BPSK	1@1	28.76	26.56	0.4529
78	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	28.68	26.48	0.4446
78	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	27.65	25.45	0.3508
78	30	90	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.69	26.49	0.4457
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.68	26.48	0.4446
78	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.55	25.35	0.3428
78	30	90	633666	3504.99	DFT-s-OFDM PI/2 BPSK	1@1	28.70	26.50	0.4467
78	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	28.68	26.48	0.4446
78	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	27.64	25.44	0.3499
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	28.35	26.15	0.4121
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	28.78	26.58	0.4550
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	27.94	25.74	0.3750
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	28.15	25.95	0.3936
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	28.78	26.58	0.4550
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	27.94	25.74	0.3750
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	27.12	24.92	0.3105
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	27.68	25.48	0.3532
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	26.87	24.67	0.2931
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	25.66	23.46	0.2218
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	26.00	23.80	0.2399
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	25.06	22.86	0.1932
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	23.78	21.58	0.1439
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	24.03	21.83	0.1524
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	23.29	21.09	0.1285
78	30	100	633334	3500.01	CP-OFDM QPSK	137@68	26.57	24.37	0.2735
78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	27.35	25.15	0.3273
78	30	100	633334	3500.01	CP-OFDM QPSK	1@271	26.53	24.33	0.2710



Software Version: 23.06.1602

FR1 N77(ANT4)


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0041	PASS	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0055	PASS	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0063	PASS	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0042	PASS	-30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0025	PASS	-20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0066	PASS	-10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0015	PASS	0°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0033	PASS	10°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0082	PASS	20°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0044	PASS	30°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0068	PASS	40°C
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	-0.0052	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	3.75	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	3.65	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	4.38	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	4.4	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-
BPSK Outer Full Mid CH

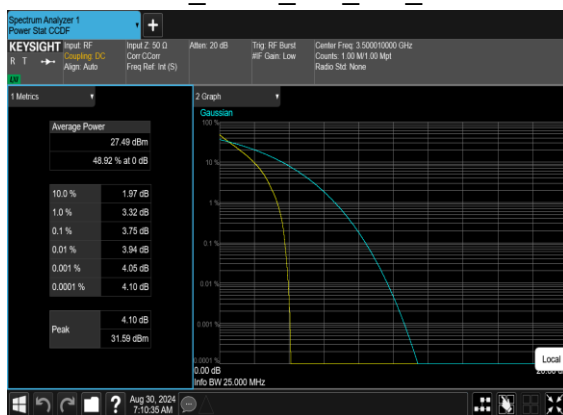

N77(20M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Left Mid CH



N77(20M)_DFT-s-OFDM QPSK Outer Full Mid CH



N77(20M)_DFT-s-OFDM QPSK Edge 1RB Left Mid CH








Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	633334	3500.01	CP-OFDM QPSK	24@0	8.5885	9.852
77	30	10	633334	3500.01	CP-OFDM 16 QAM	24@0	8.5404	9.243
77	30	10	633334	3500.01	CP-OFDM 64 QAM	24@0	8.5961	9.556
77	30	10	633334	3500.01	CP-OFDM 256 QAM	24@0	8.5928	9.531
77	30	15	633334	3500.01	CP-OFDM QPSK	38@0	13.592	14.5
77	30	15	633334	3500.01	CP-OFDM 16 QAM	38@0	13.606	14.56
77	30	15	633334	3500.01	CP-OFDM 64 QAM	38@0	13.58	14.69
77	30	15	633334	3500.01	CP-OFDM 256 QAM	38@0	13.567	14.53
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.183	19.26
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.168	19.45
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.179	19.5
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.217	19.28
77	30	25	633334	3500.01	CP-OFDM QPSK	65@0	23.278	24.63
77	30	25	633334	3500.01	CP-OFDM 16 QAM	65@0	23.17	24.5
77	30	25	633334	3500.01	CP-OFDM 64 QAM	65@0	23.273	24.47
77	30	25	633334	3500.01	CP-OFDM 256 QAM	65@0	23.212	24.46
77	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.857	29.46
77	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.902	29.07
77	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.857	29.73
77	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.873	29.22
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.813	39.36
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.892	39.57
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.944	39.43
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.933	39.4
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.515	49.12
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.608	49.32
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.527	49.57
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.439	49.33
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.903	59.8
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.984	59.86
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.931	59.88
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.81	59.62
77	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.409	69.81
77	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.597	69.7
77	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.435	70.02
77	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.678	69.71
77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.536	79.89
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.411	80.18
77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.612	80.24
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.433	80.01
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.463	90.29




77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.564	90.22
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.48	90.3
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.603	90.41
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.668	100.6
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.497	100.6
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.695	100.6
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.407	100.5

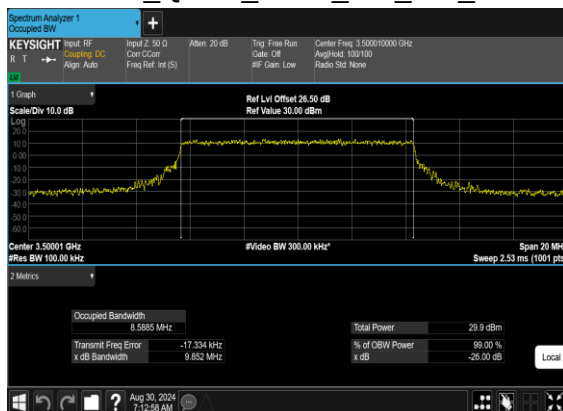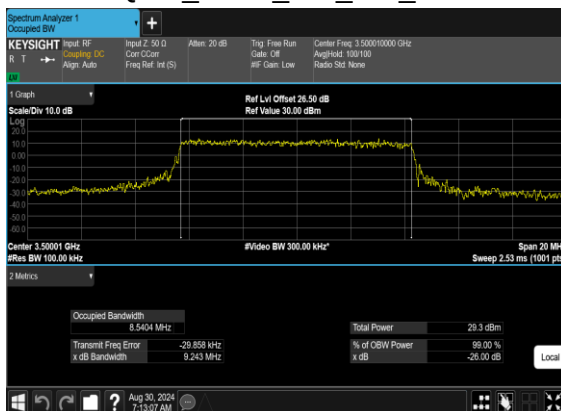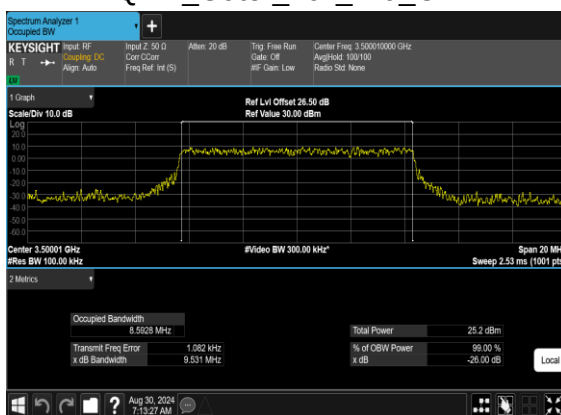
N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CHN77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CHN77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CHN77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH




N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

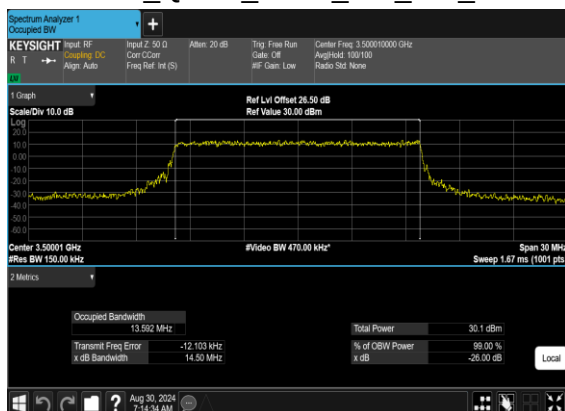


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

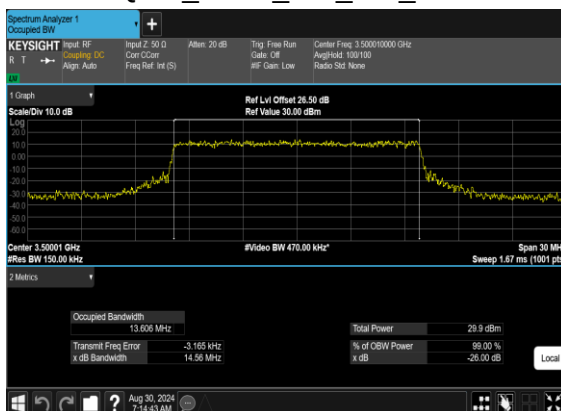

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

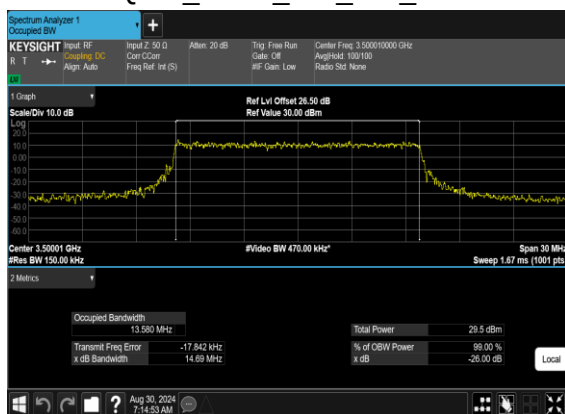


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

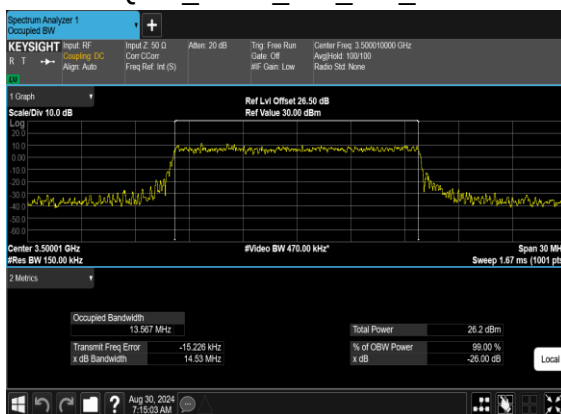





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

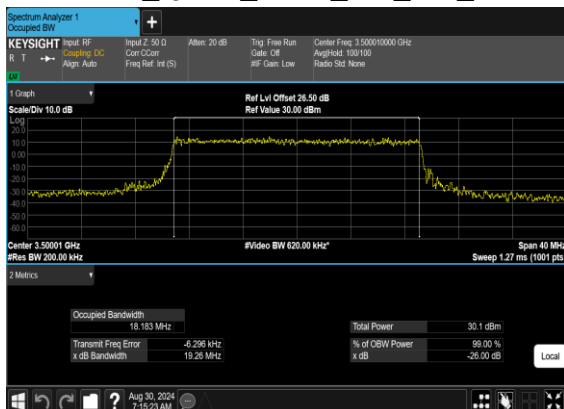


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

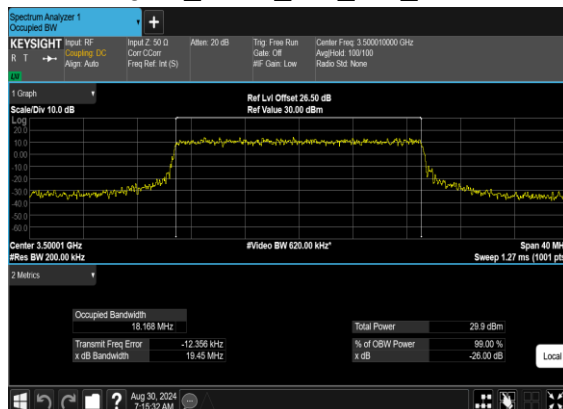

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

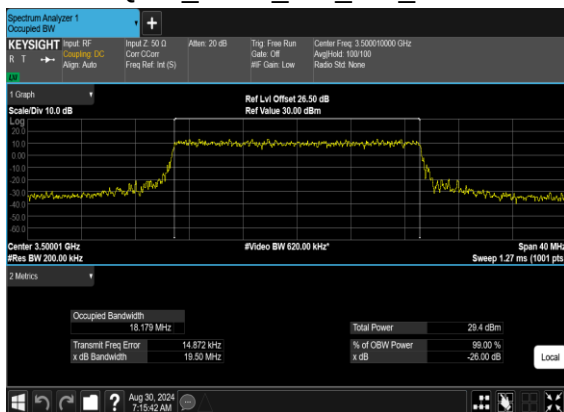


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

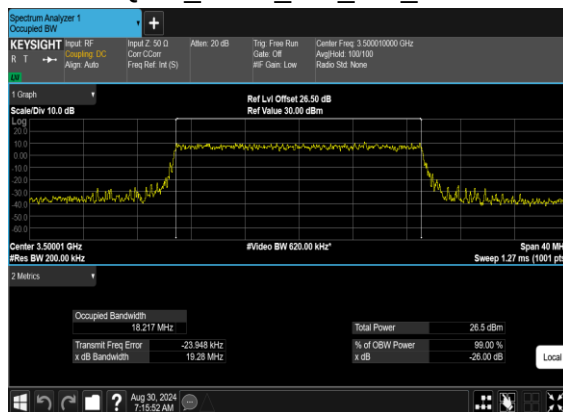





N77(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

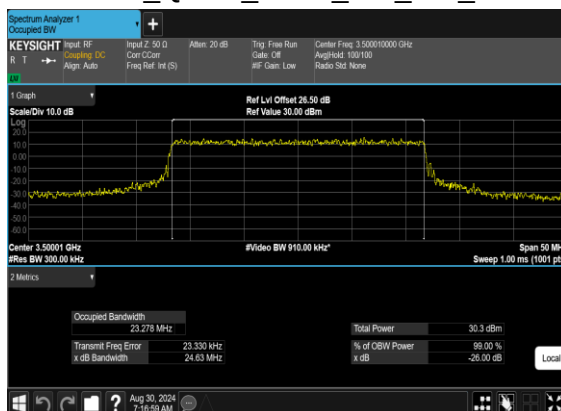


N77(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

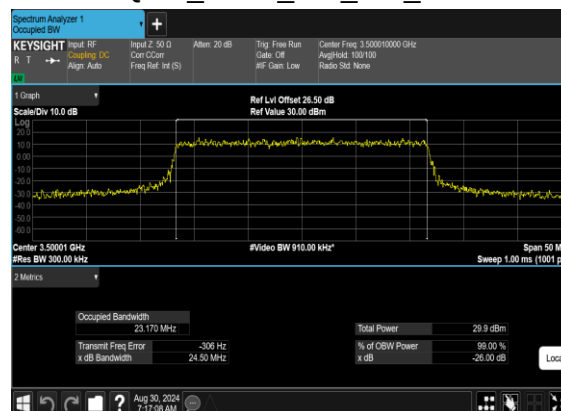

N77(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

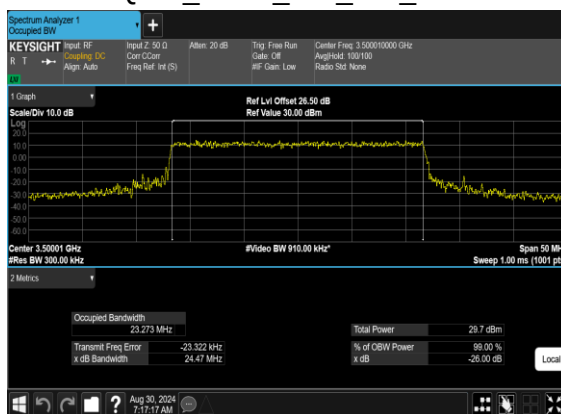


N77(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

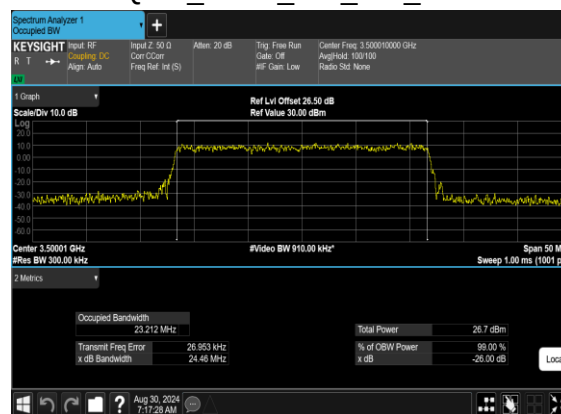





N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

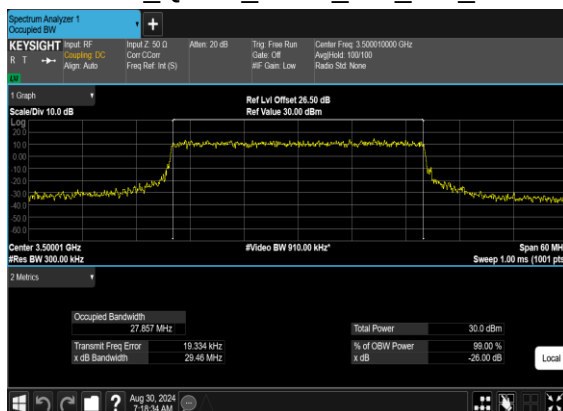


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

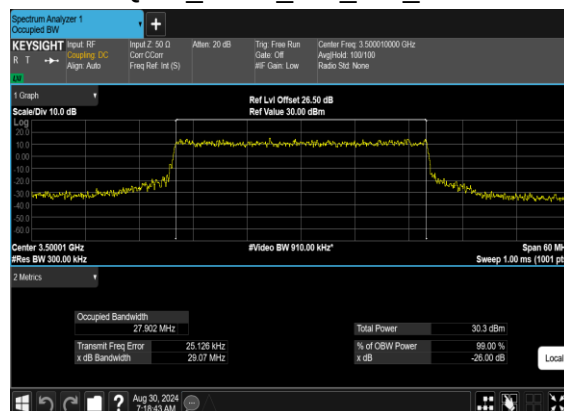

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

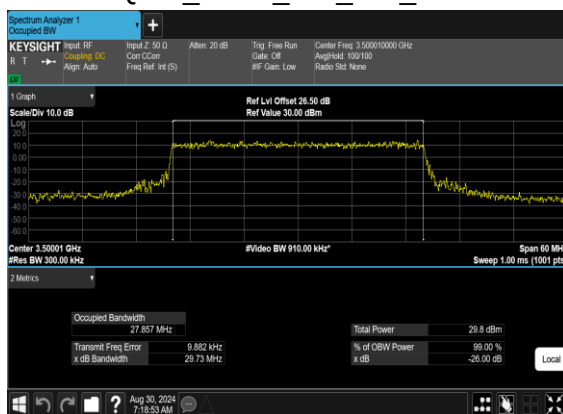


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

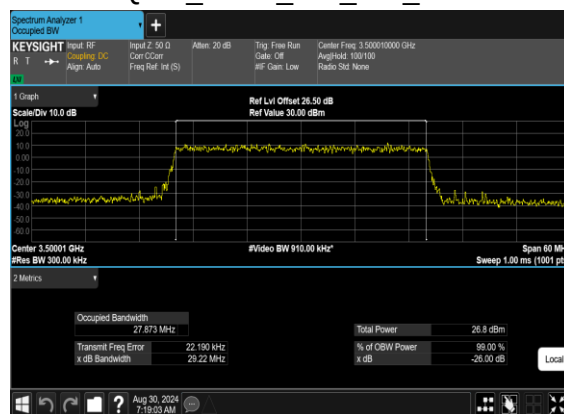





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

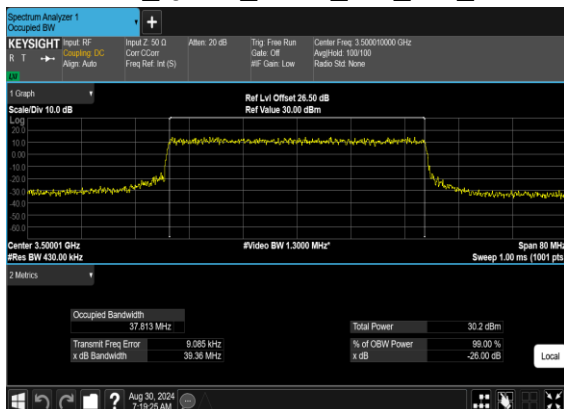


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

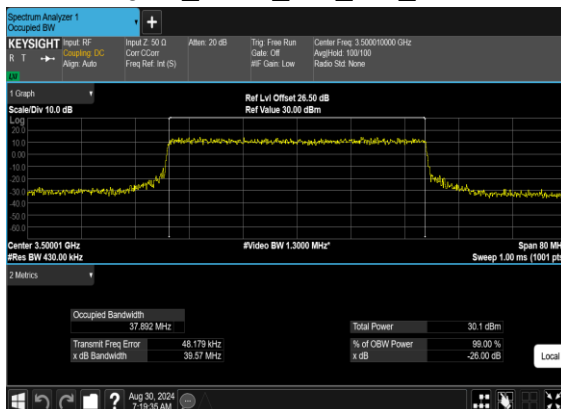

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

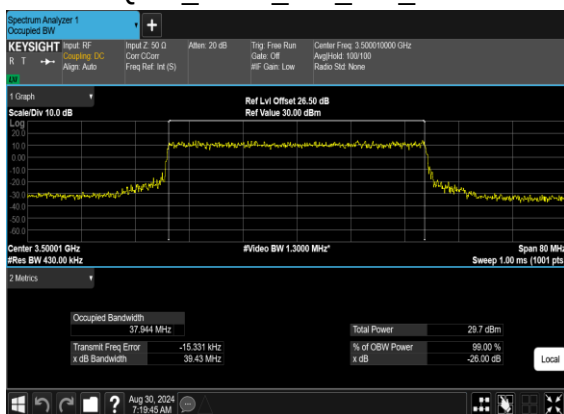


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

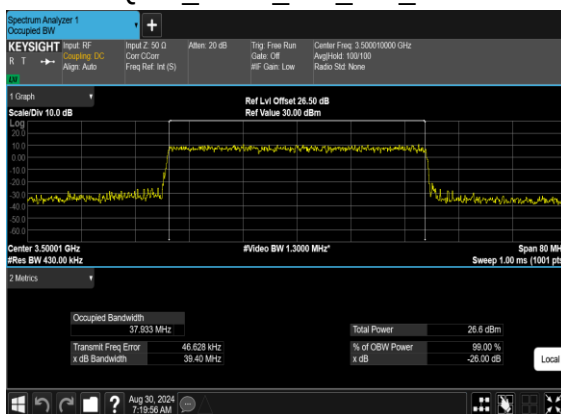





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

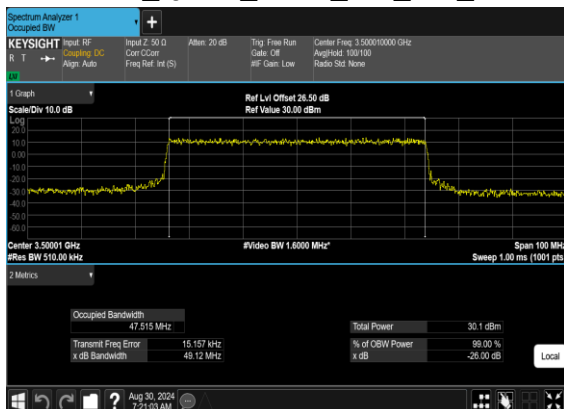


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

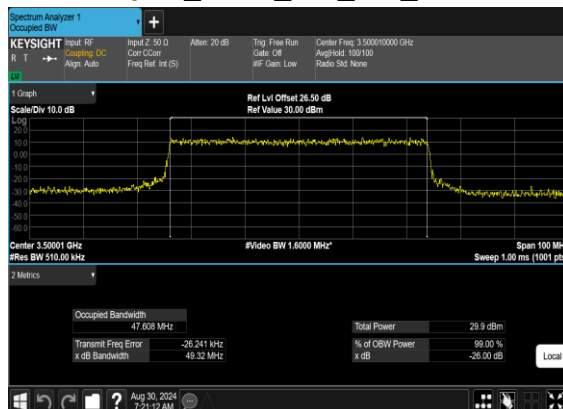

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

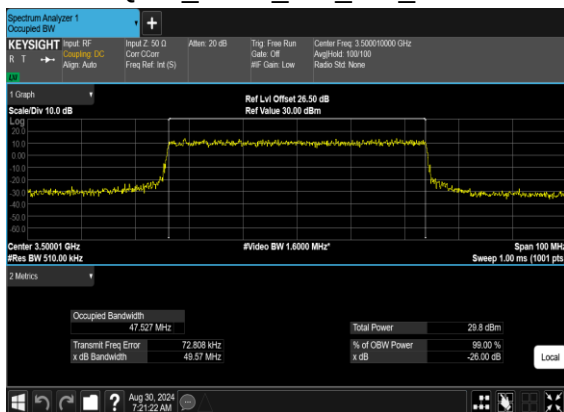


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

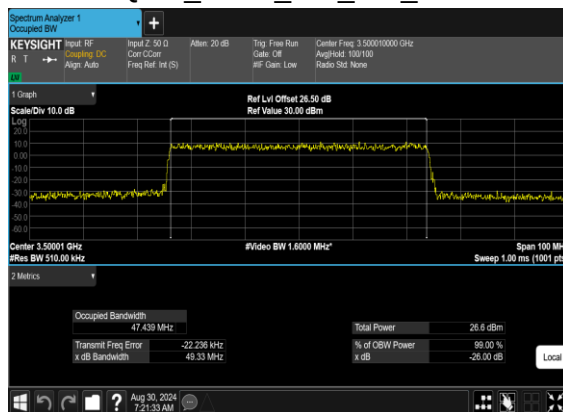





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

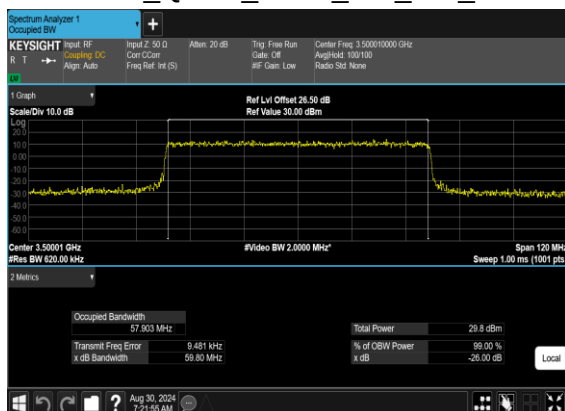


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

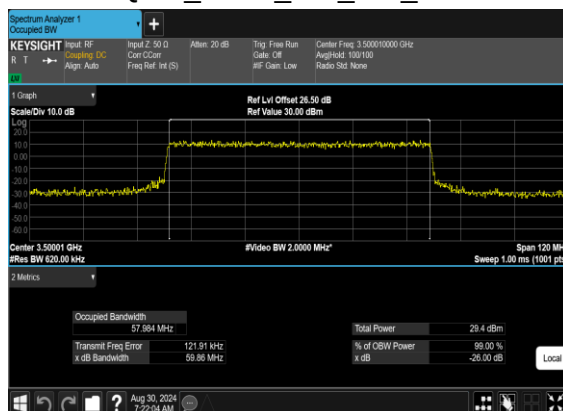

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

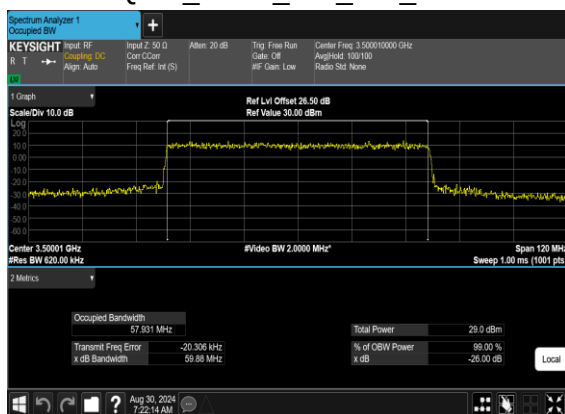


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

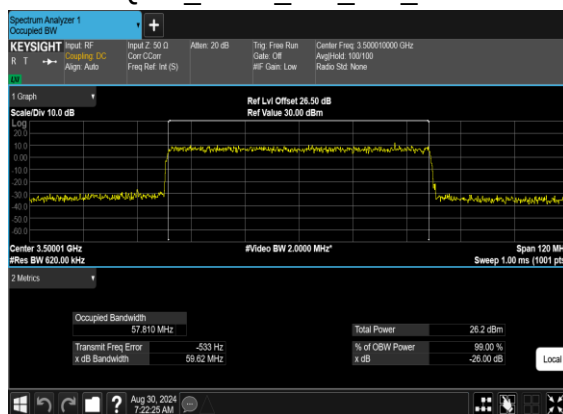





N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

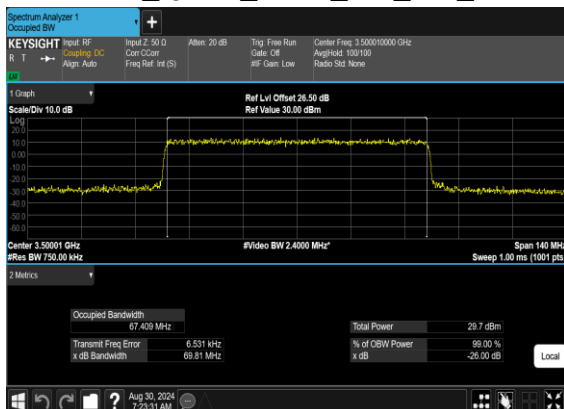


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

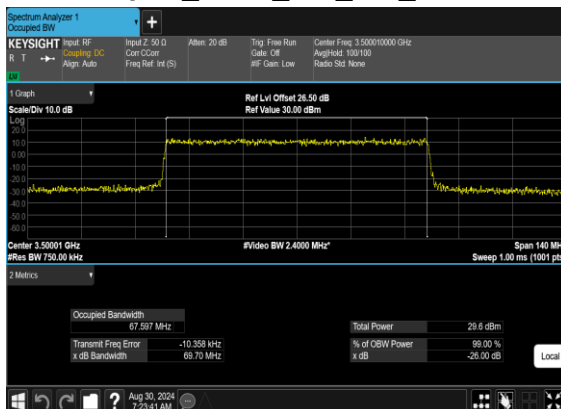

N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

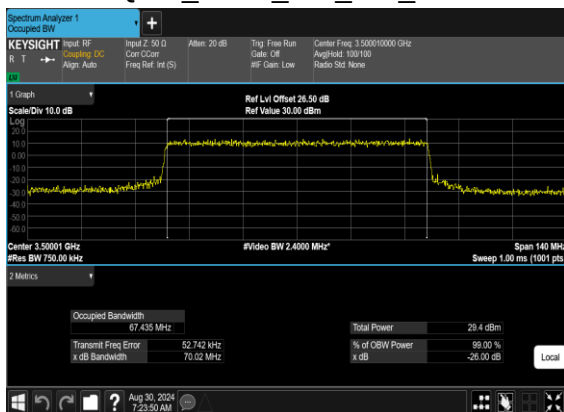


N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

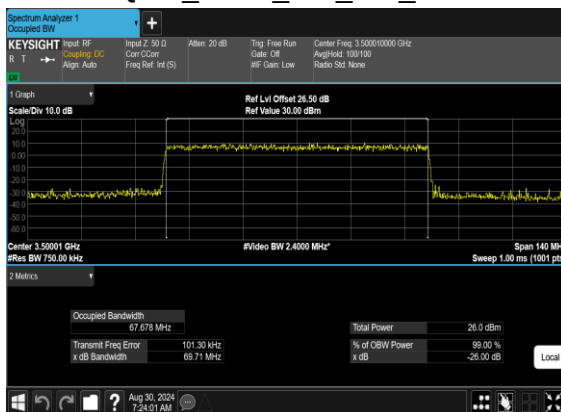





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

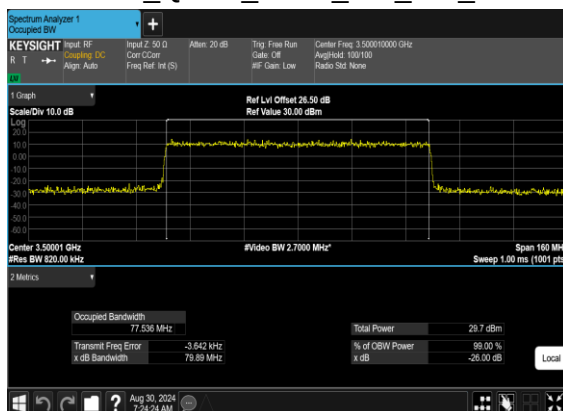


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

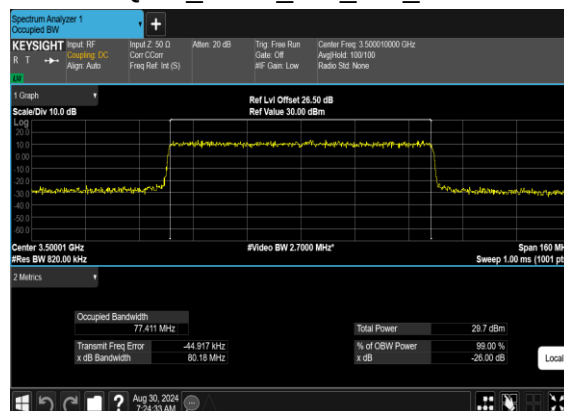

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

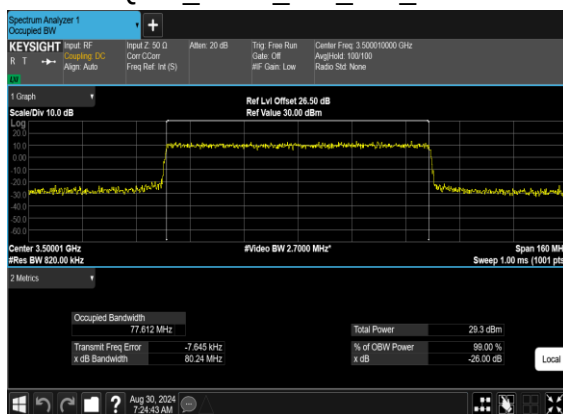


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

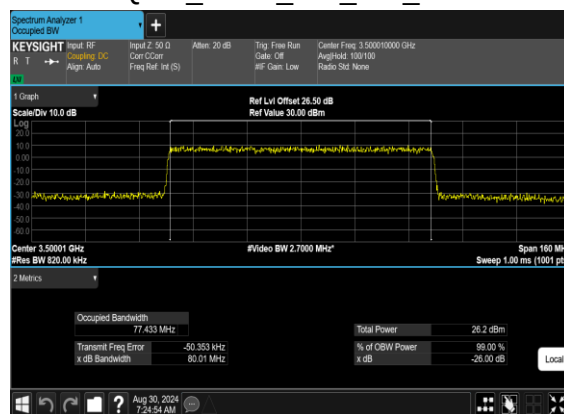





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

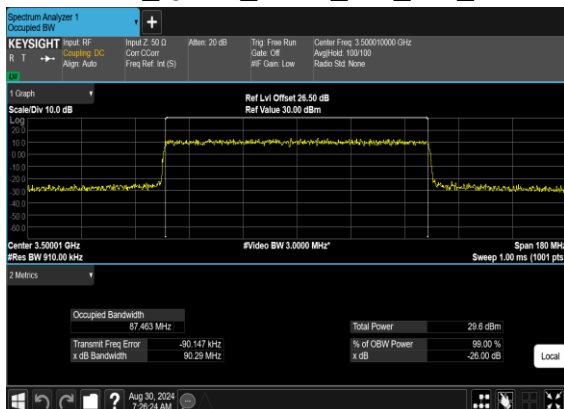


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

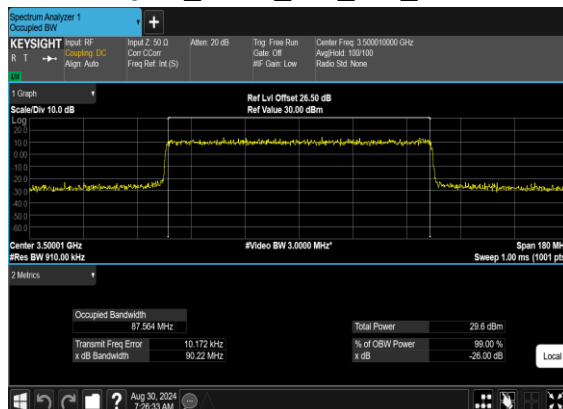


N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

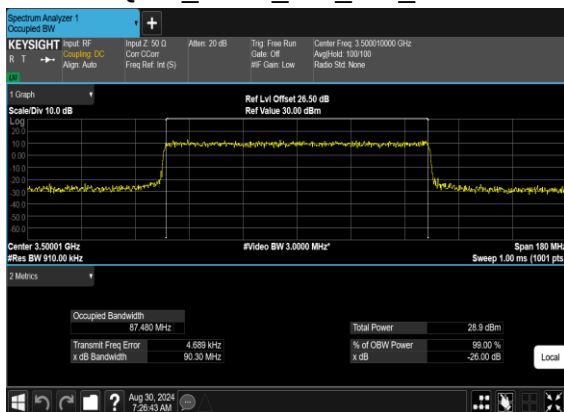


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

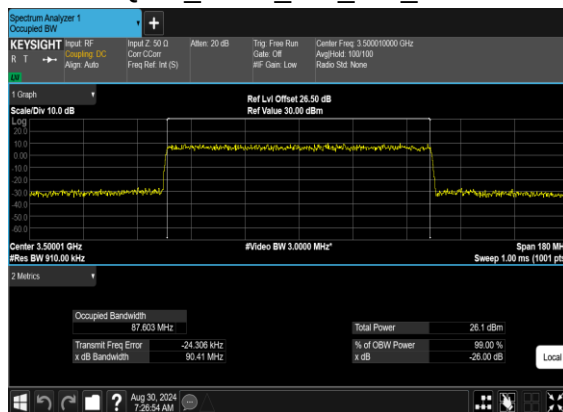


N77(100M)_CP-
OFDM QPSK Outer Full Mid CH

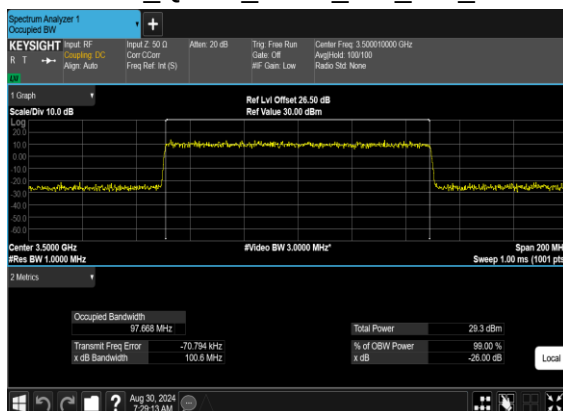


N77(100M)_CP-OFDM_16
QAM Outer Full Mid CH

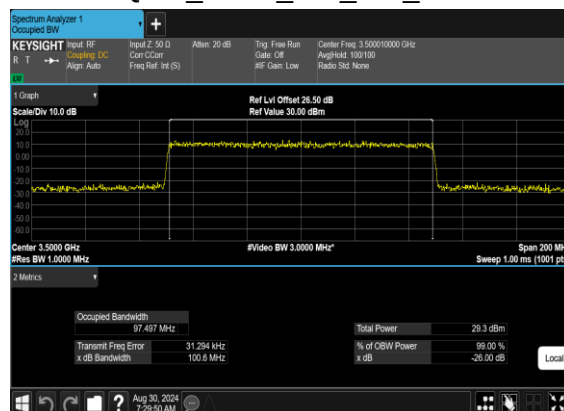

N77(100M)_CP-OFDM_64
QAM Outer Full Mid CH

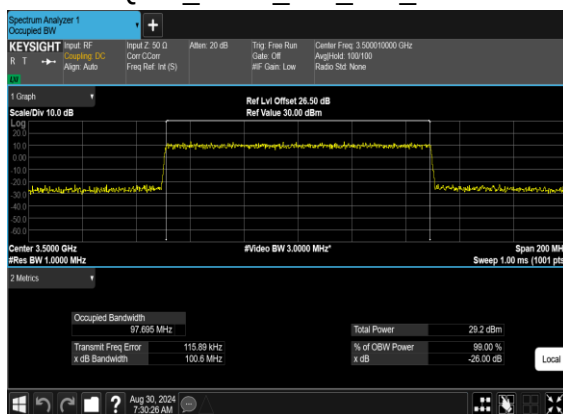







N77(100M)_CP-OFDM_256
QAM Outer Full Mid CH

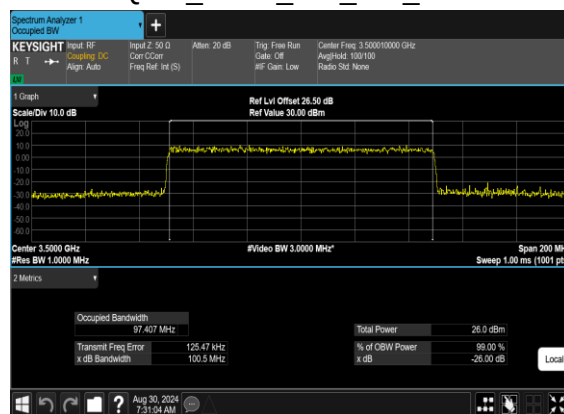




Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS

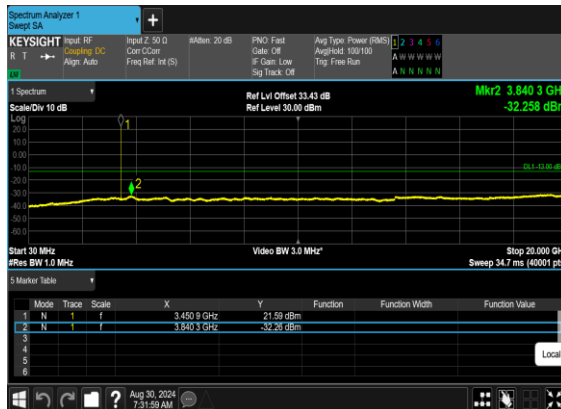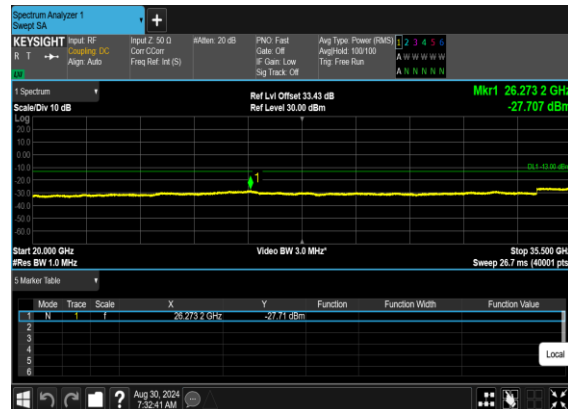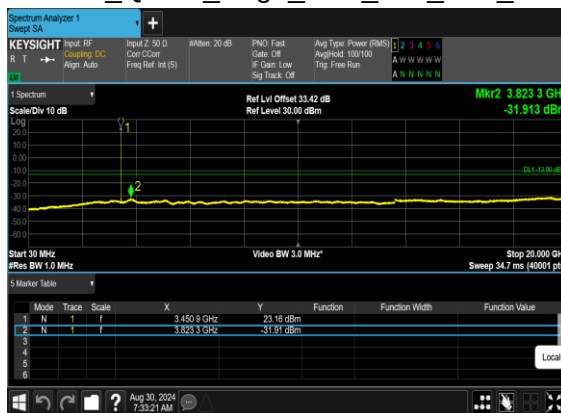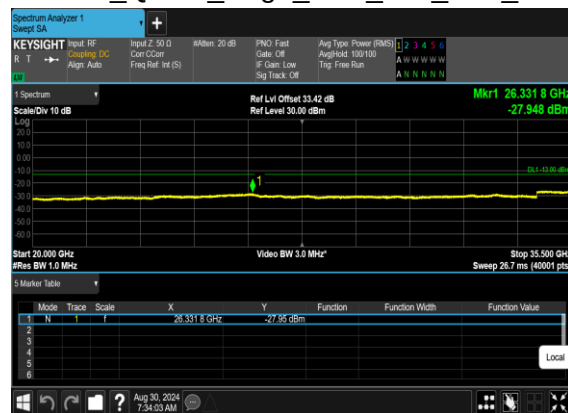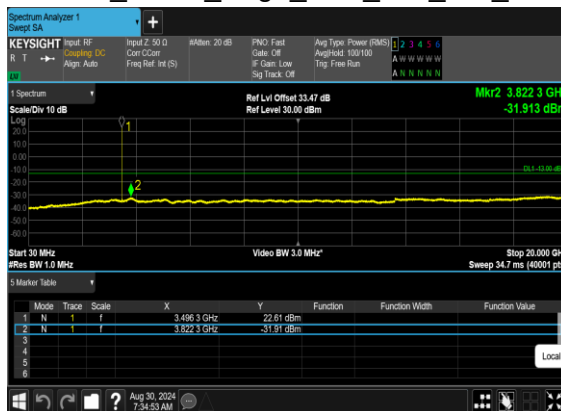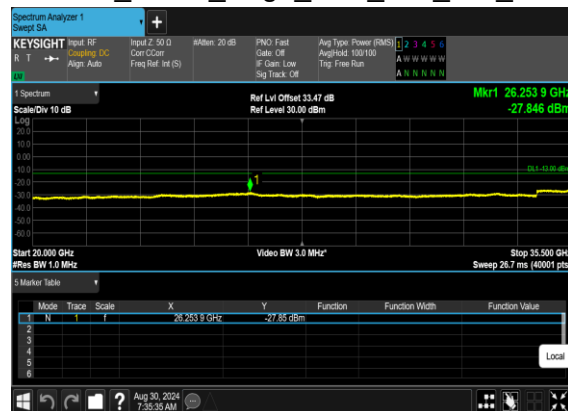
N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CHN77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

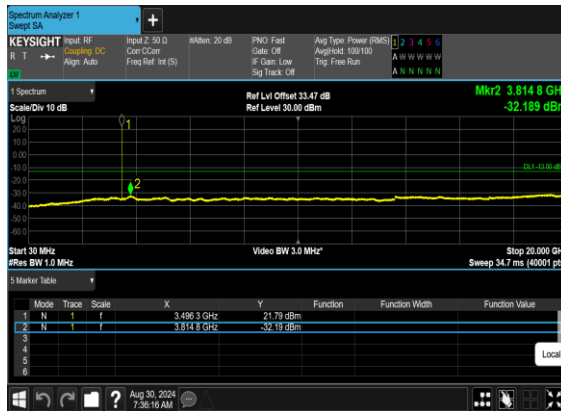


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

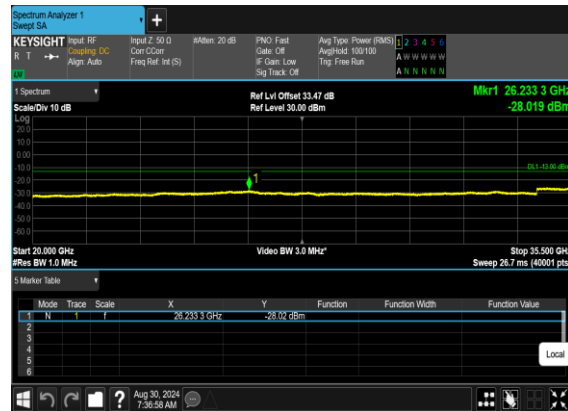


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

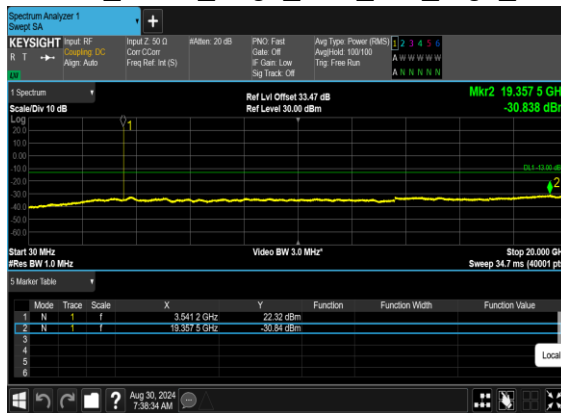


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH






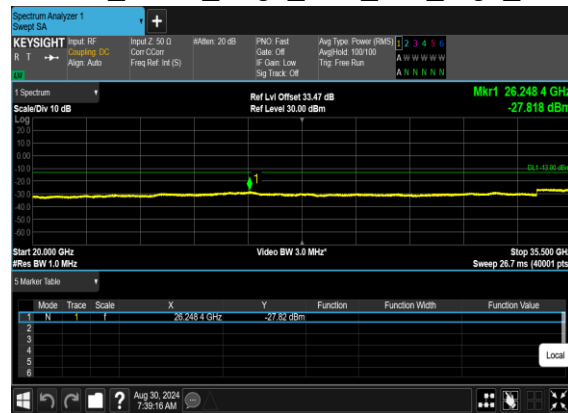








N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




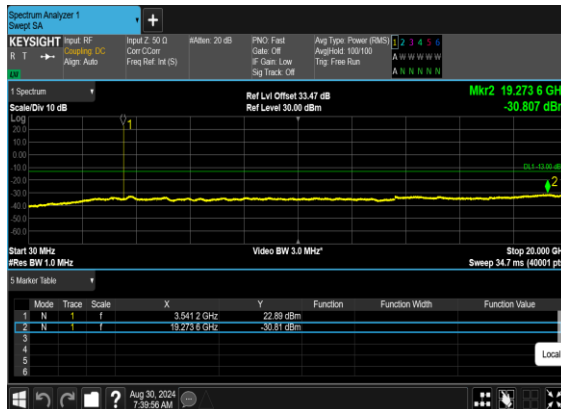


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

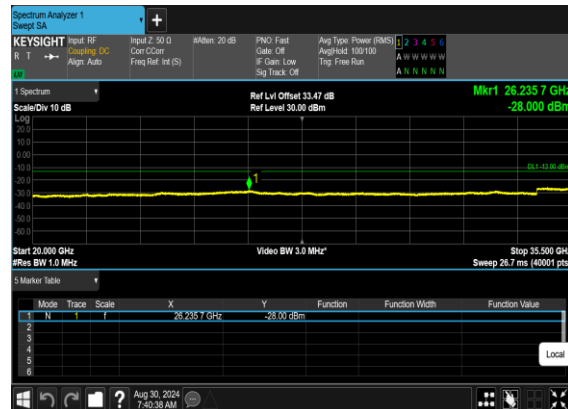

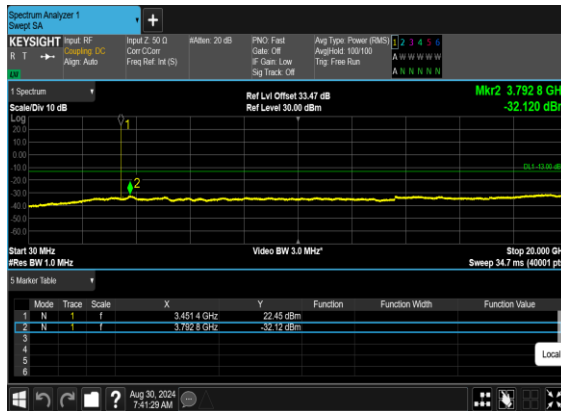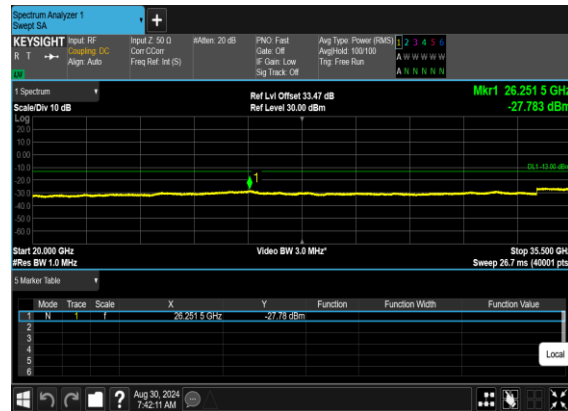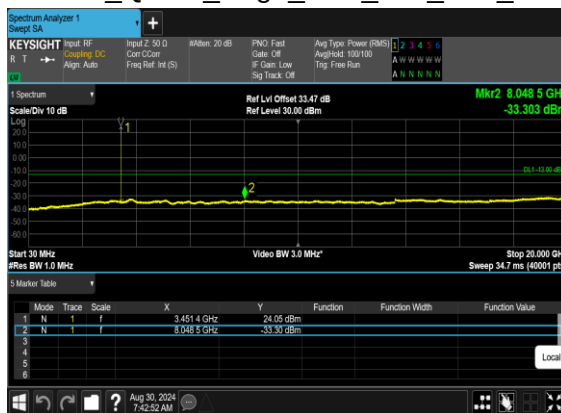
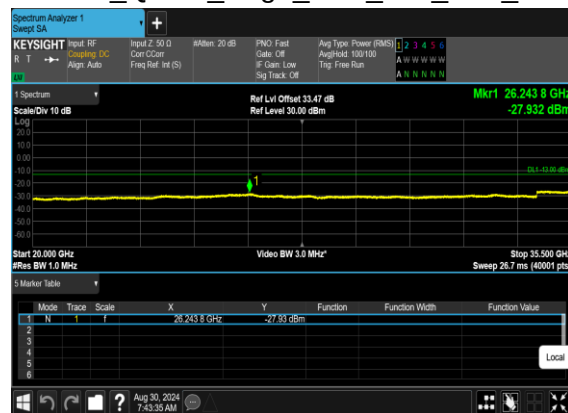
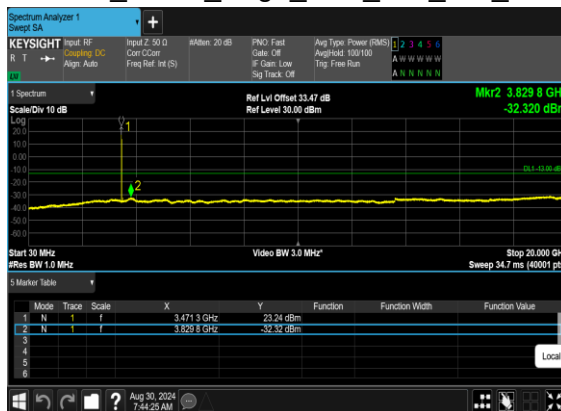
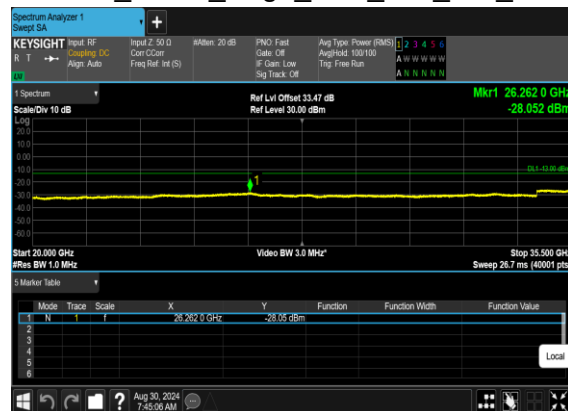
N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CHN77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

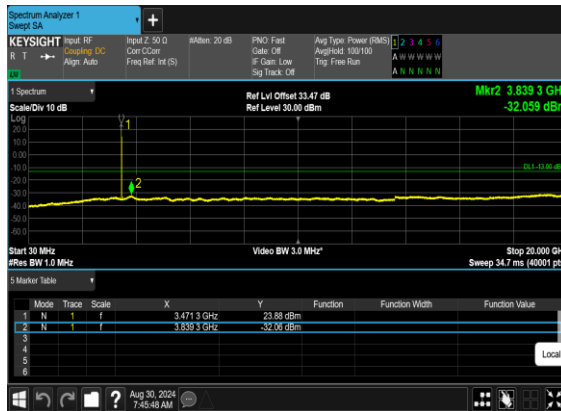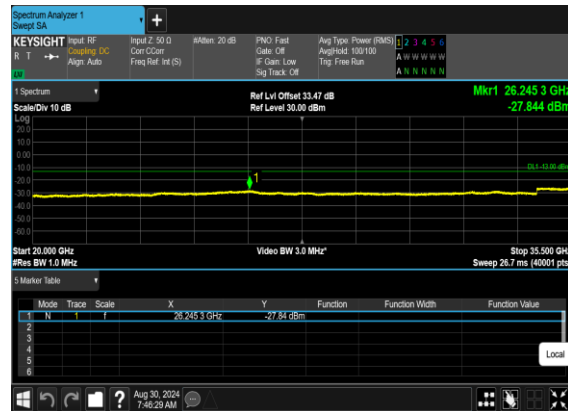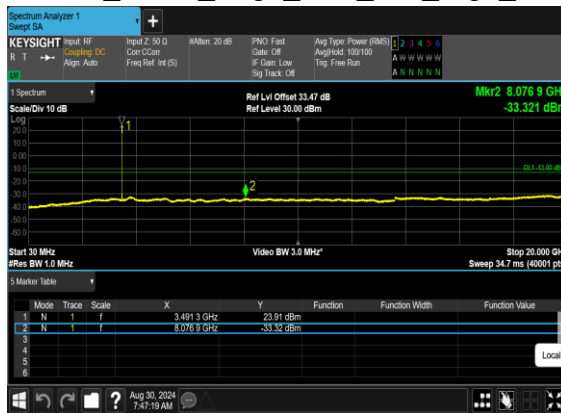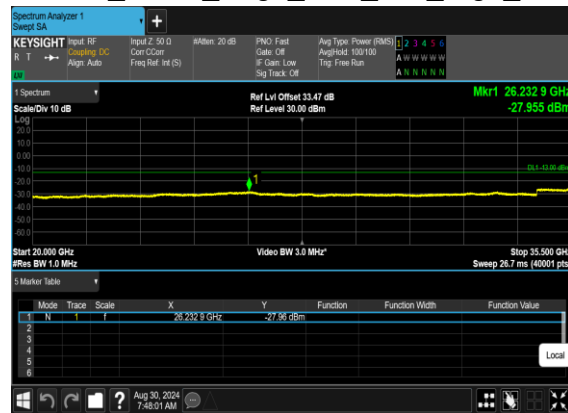
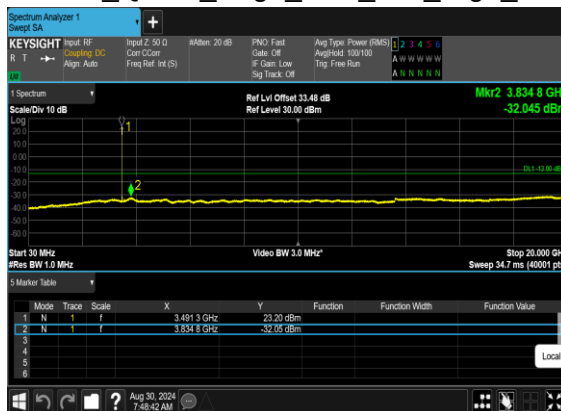
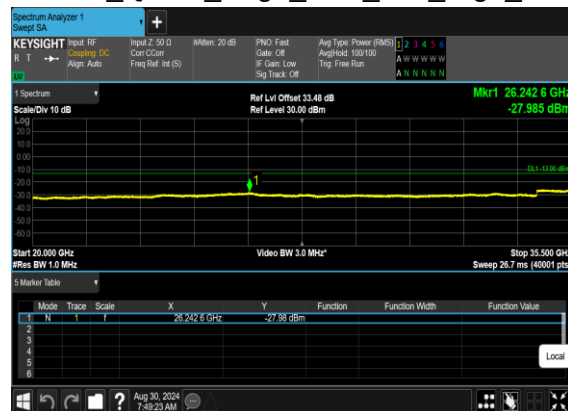
N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CHN77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CHN77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CHN77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CHN77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CHN77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

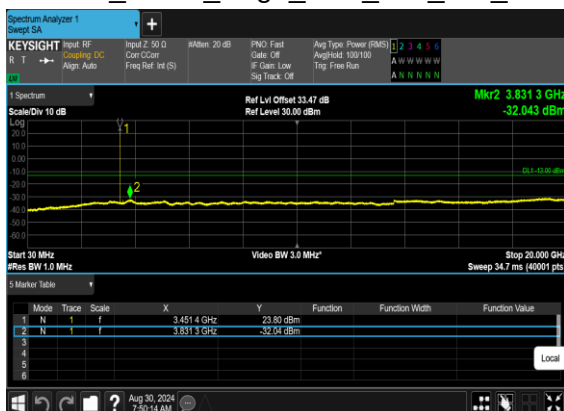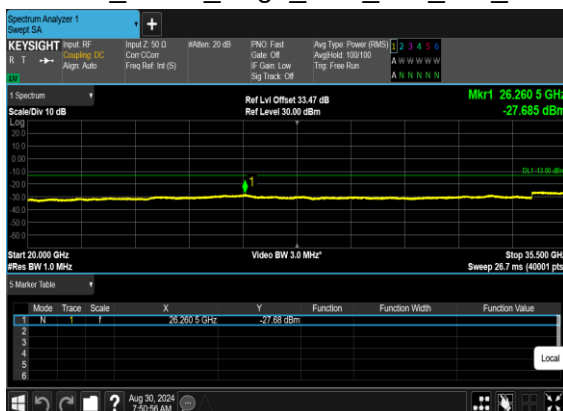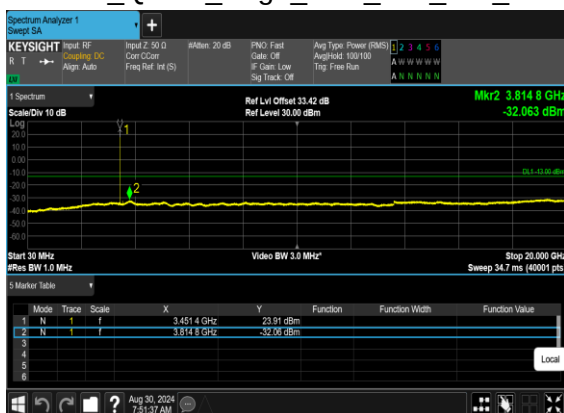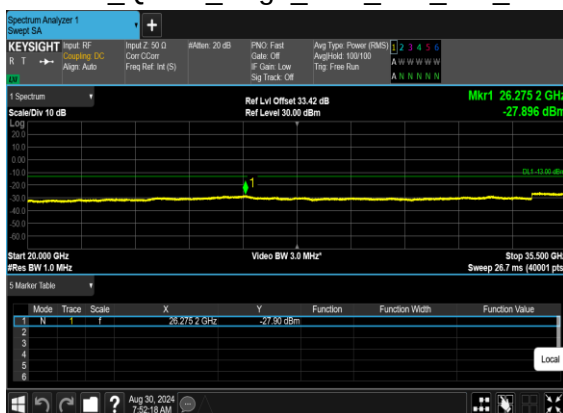N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CHN77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CHN77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CHN77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

**Conducted Band Edge**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	1@161	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@161	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS

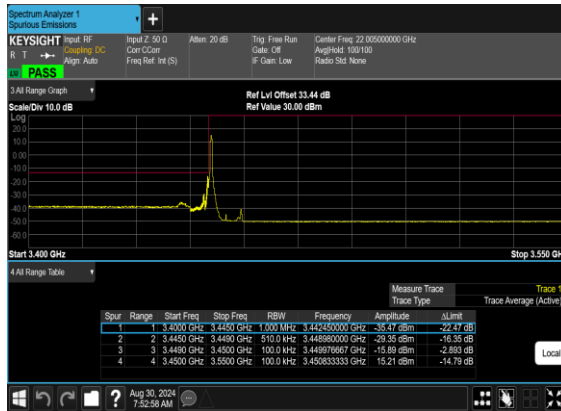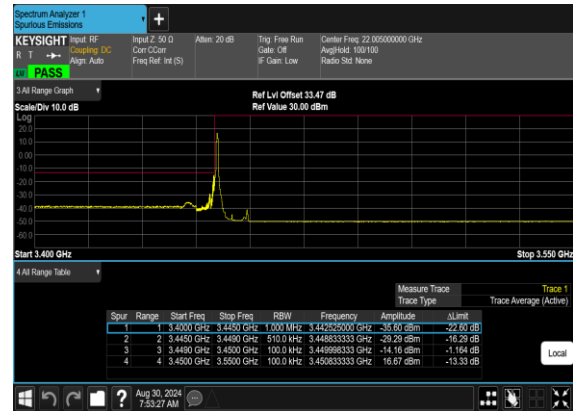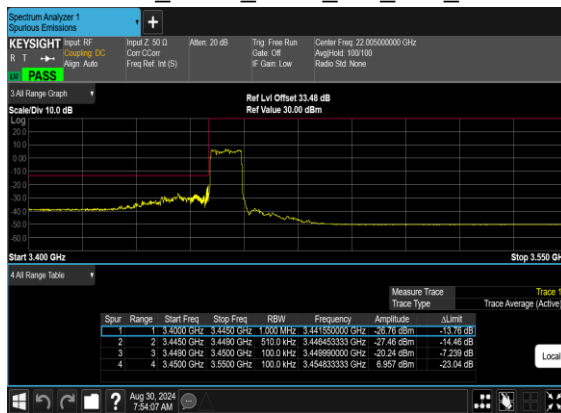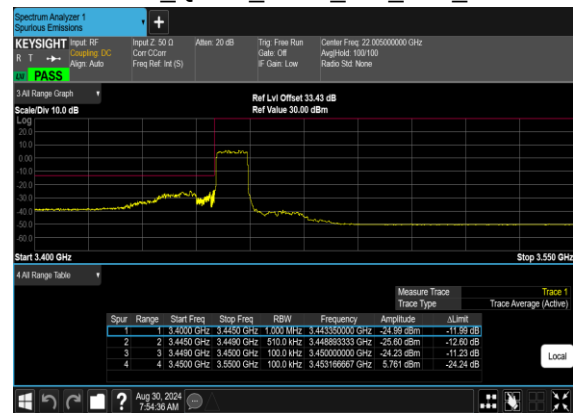N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CHN77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CHN77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CHN77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

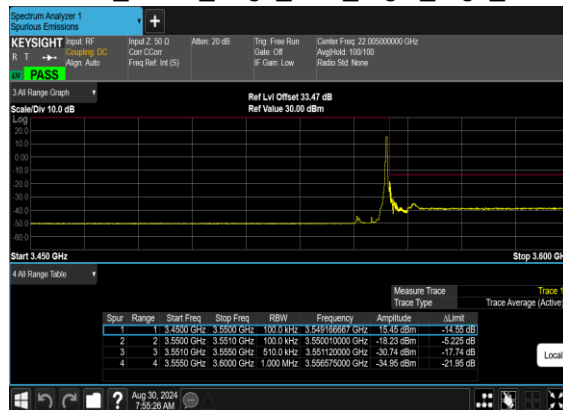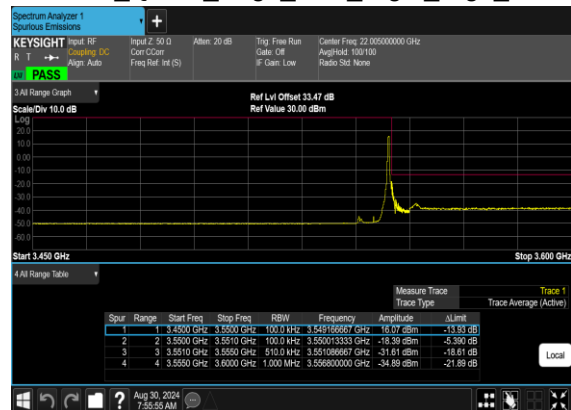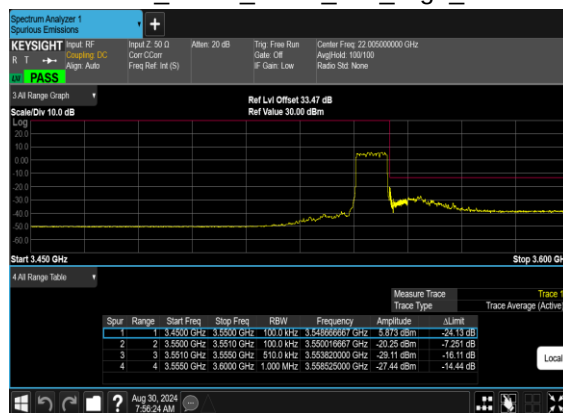N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CHN77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CHN77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CHN77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH