




Modulation	be EHT40	Test Freq. (MHz)	6925																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6925.00</td><td>96.23</td><td></td><td></td><td>92.19</td><td>4.04</td><td>Average</td><td>225</td><td>109</td></tr><tr><td>2 *</td><td>6925.00</td><td>109.13</td><td></td><td></td><td>105.09</td><td>4.04</td><td>Peak</td><td>225</td><td>109</td></tr><tr><td>3</td><td>13850.00</td><td>45.20</td><td>68.20</td><td>-23.00</td><td>37.43</td><td>7.77</td><td>Average</td><td>100</td><td>274</td></tr><tr><td>4</td><td>13850.00</td><td>57.61</td><td>88.20</td><td>-30.59</td><td>49.84</td><td>7.77</td><td>Peak</td><td>100</td><td>274</td></tr><tr><td>5</td><td>20775.00</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>38.48</td><td>3.50</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>20775.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>51.64</td><td>3.50</td><td>Peak</td><td>100</td><td>57</td></tr><tr><td>7</td><td>27700.00</td><td>44.18</td><td>68.20</td><td>-24.02</td><td>34.62</td><td>9.56</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>8</td><td>27700.00</td><td>57.33</td><td>88.20</td><td>-30.87</td><td>47.77</td><td>9.56</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6925.00	96.23			92.19	4.04	Average	225	109	2 *	6925.00	109.13			105.09	4.04	Peak	225	109	3	13850.00	45.20	68.20	-23.00	37.43	7.77	Average	100	274	4	13850.00	57.61	88.20	-30.59	49.84	7.77	Peak	100	274	5	20775.00	41.98	54.00	-12.02	38.48	3.50	Average	100	57	6	20775.00	55.14	74.00	-18.86	51.64	3.50	Peak	100	57	7	27700.00	44.18	68.20	-24.02	34.62	9.56	Average	100	117	8	27700.00	57.33	88.20	-30.87	47.77	9.56	Peak	100	117
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6925.00	96.23			92.19	4.04	Average	225	109																																																																																				
2 *	6925.00	109.13			105.09	4.04	Peak	225	109																																																																																				
3	13850.00	45.20	68.20	-23.00	37.43	7.77	Average	100	274																																																																																				
4	13850.00	57.61	88.20	-30.59	49.84	7.77	Peak	100	274																																																																																				
5	20775.00	41.98	54.00	-12.02	38.48	3.50	Average	100	57																																																																																				
6	20775.00	55.14	74.00	-18.86	51.64	3.50	Peak	100	57																																																																																				
7	27700.00	44.18	68.20	-24.02	34.62	9.56	Average	100	117																																																																																				
8	27700.00	57.33	88.20	-30.87	47.77	9.56	Peak	100	117																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			

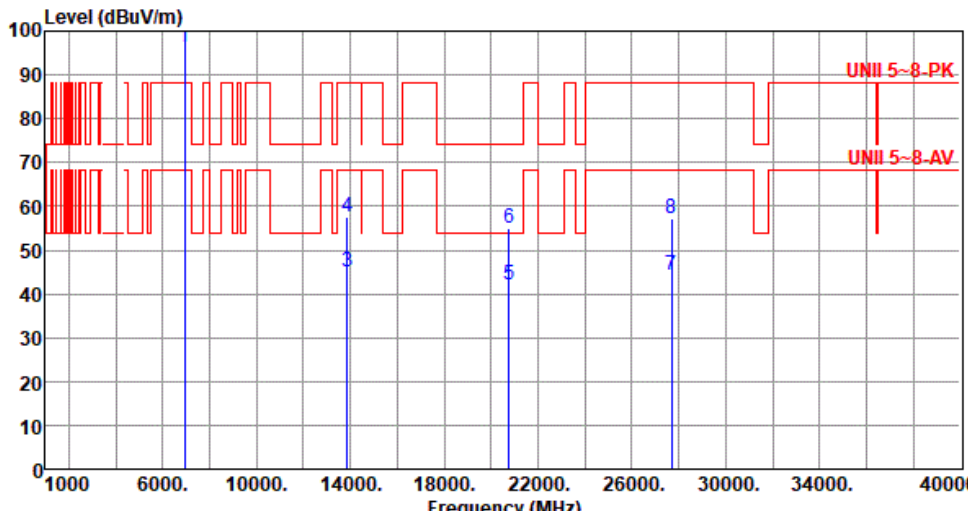


Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																																			
Polarization	Horizontal																																																																																																					
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																						
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>7085.00</td><td>89.02</td><td></td><td></td><td>84.34</td><td>4.68</td><td>Average</td><td>238</td><td>227</td></tr><tr><td>2</td><td>*</td><td>7085.00</td><td>101.82</td><td></td><td></td><td>97.14</td><td>4.68</td><td>Peak</td><td>238</td><td>227</td></tr><tr><td>3</td><td></td><td>7125.00</td><td>47.03</td><td>68.20</td><td>-21.17</td><td>42.23</td><td>4.80</td><td>Average</td><td>238</td><td>227</td></tr><tr><td>4</td><td></td><td>7125.00</td><td>59.07</td><td>88.20</td><td>-29.13</td><td>54.27</td><td>4.80</td><td>Peak</td><td>238</td><td>227</td></tr><tr><td>5</td><td></td><td>14170.00</td><td>45.10</td><td>68.20</td><td>-23.10</td><td>36.58</td><td>8.52</td><td>Average</td><td>238</td><td>227</td></tr><tr><td>6</td><td></td><td>14170.00</td><td>57.79</td><td>88.20</td><td>-30.41</td><td>49.27</td><td>8.52</td><td>Peak</td><td>238</td><td>227</td></tr><tr><td>7</td><td></td><td>21255.00</td><td>42.53</td><td>54.00</td><td>-11.47</td><td>38.27</td><td>4.26</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>8</td><td></td><td>21255.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>51.13</td><td>4.26</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	7085.00	89.02			84.34	4.68	Average	238	227	2	*	7085.00	101.82			97.14	4.68	Peak	238	227	3		7125.00	47.03	68.20	-21.17	42.23	4.80	Average	238	227	4		7125.00	59.07	88.20	-29.13	54.27	4.80	Peak	238	227	5		14170.00	45.10	68.20	-23.10	36.58	8.52	Average	238	227	6		14170.00	57.79	88.20	-30.41	49.27	8.52	Peak	238	227	7		21255.00	42.53	54.00	-11.47	38.27	4.26	Average	100	178	8		21255.00	55.39	74.00	-18.61	51.13	4.26	Peak	100	178
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	7085.00	89.02			84.34	4.68	Average	238	227																																																																																												
2	*	7085.00	101.82			97.14	4.68	Peak	238	227																																																																																												
3		7125.00	47.03	68.20	-21.17	42.23	4.80	Average	238	227																																																																																												
4		7125.00	59.07	88.20	-29.13	54.27	4.80	Peak	238	227																																																																																												
5		14170.00	45.10	68.20	-23.10	36.58	8.52	Average	238	227																																																																																												
6		14170.00	57.79	88.20	-30.41	49.27	8.52	Peak	238	227																																																																																												
7		21255.00	42.53	54.00	-11.47	38.27	4.26	Average	100	178																																																																																												
8		21255.00	55.39	74.00	-18.61	51.13	4.26	Peak	100	178																																																																																												

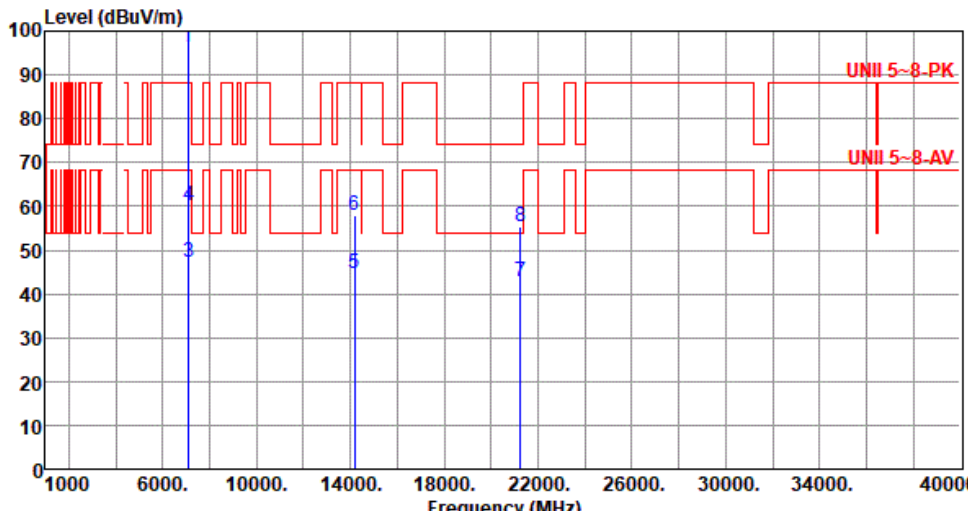


Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>7085.00</td><td>96.18</td><td></td><td></td><td>91.50</td><td>4.68</td><td>Average</td><td>224</td><td>287</td></tr><tr><td>2 *</td><td>7085.00</td><td>109.32</td><td></td><td></td><td>104.64</td><td>4.68</td><td>Peak</td><td>224</td><td>287</td></tr><tr><td>3</td><td>7125.00</td><td>47.11</td><td>68.20</td><td>-21.09</td><td>42.31</td><td>4.80</td><td>Average</td><td>224</td><td>287</td></tr><tr><td>4</td><td>7125.00</td><td>60.25</td><td>88.20</td><td>-27.95</td><td>55.45</td><td>4.80</td><td>Peak</td><td>224</td><td>287</td></tr><tr><td>5</td><td>14170.00</td><td>44.79</td><td>68.20</td><td>-23.41</td><td>36.27</td><td>8.52</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>6</td><td>14170.00</td><td>57.80</td><td>88.20</td><td>-30.40</td><td>49.28</td><td>8.52</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>7</td><td>21255.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>38.38</td><td>4.26</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>8</td><td>21255.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>51.26</td><td>4.26</td><td>Peak</td><td>100</td><td>213</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7085.00	96.18			91.50	4.68	Average	224	287	2 *	7085.00	109.32			104.64	4.68	Peak	224	287	3	7125.00	47.11	68.20	-21.09	42.31	4.80	Average	224	287	4	7125.00	60.25	88.20	-27.95	55.45	4.80	Peak	224	287	5	14170.00	44.79	68.20	-23.41	36.27	8.52	Average	100	218	6	14170.00	57.80	88.20	-30.40	49.28	8.52	Peak	100	218	7	21255.00	42.64	54.00	-11.36	38.38	4.26	Average	100	213	8	21255.00	55.52	74.00	-18.48	51.26	4.26	Peak	100	213
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	7085.00	96.18			91.50	4.68	Average	224	287																																																																																				
2 *	7085.00	109.32			104.64	4.68	Peak	224	287																																																																																				
3	7125.00	47.11	68.20	-21.09	42.31	4.80	Average	224	287																																																																																				
4	7125.00	60.25	88.20	-27.95	55.45	4.80	Peak	224	287																																																																																				
5	14170.00	44.79	68.20	-23.41	36.27	8.52	Average	100	218																																																																																				
6	14170.00	57.80	88.20	-30.40	49.28	8.52	Peak	100	218																																																																																				
7	21255.00	42.64	54.00	-11.36	38.38	4.26	Average	100	213																																																																																				
8	21255.00	55.52	74.00	-18.48	51.26	4.26	Peak	100	213																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>48.85</td><td>68.20</td><td>-19.35</td><td>47.46</td><td>1.39</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>5925.00</td><td>61.67</td><td>88.20</td><td>-26.53</td><td>60.28</td><td>1.39</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3 *</td><td>5985.00</td><td>93.90</td><td></td><td></td><td>92.49</td><td>1.41</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4 *</td><td>5985.00</td><td>107.20</td><td></td><td></td><td>105.79</td><td>1.41</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>11970.00</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>35.65</td><td>7.44</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>11970.00</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>48.65</td><td>7.44</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>7</td><td>17955.00</td><td>46.23</td><td>54.00</td><td>-7.77</td><td>32.14</td><td>14.09</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>17955.00</td><td>60.32</td><td>74.00</td><td>-13.68</td><td>46.23</td><td>14.09</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	48.85	68.20	-19.35	47.46	1.39	Average	100	208	2	5925.00	61.67	88.20	-26.53	60.28	1.39	Peak	100	208	3 *	5985.00	93.90			92.49	1.41	Average	100	208	4 *	5985.00	107.20			105.79	1.41	Peak	100	208	5	11970.00	43.09	54.00	-10.91	35.65	7.44	Average	100	172	6	11970.00	56.09	74.00	-17.91	48.65	7.44	Peak	100	172	7	17955.00	46.23	54.00	-7.77	32.14	14.09	Average	100	208	8	17955.00	60.32	74.00	-13.68	46.23	14.09	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	48.85	68.20	-19.35	47.46	1.39	Average	100	208																																																																																				
2	5925.00	61.67	88.20	-26.53	60.28	1.39	Peak	100	208																																																																																				
3 *	5985.00	93.90			92.49	1.41	Average	100	208																																																																																				
4 *	5985.00	107.20			105.79	1.41	Peak	100	208																																																																																				
5	11970.00	43.09	54.00	-10.91	35.65	7.44	Average	100	172																																																																																				
6	11970.00	56.09	74.00	-17.91	48.65	7.44	Peak	100	172																																																																																				
7	17955.00	46.23	54.00	-7.77	32.14	14.09	Average	100	208																																																																																				
8	17955.00	60.32	74.00	-13.68	46.23	14.09	Peak	100	208																																																																																				

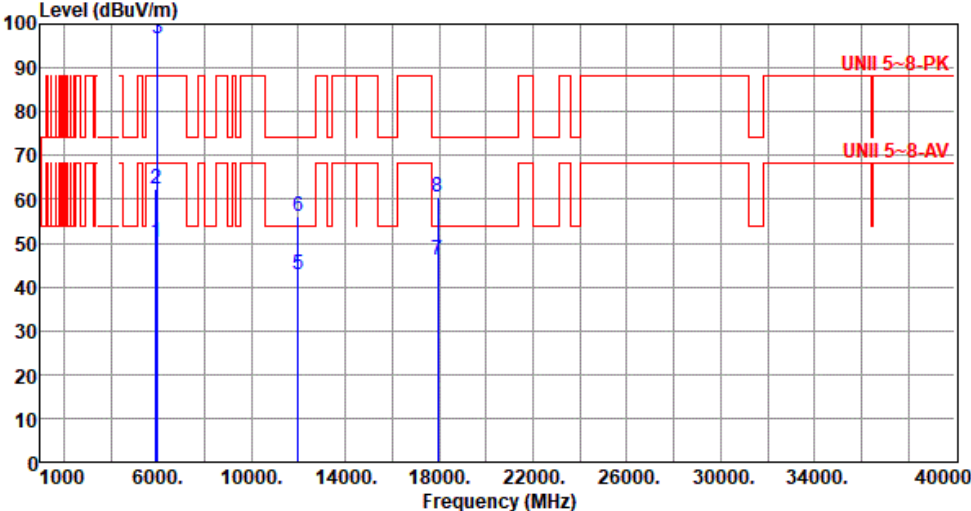

Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>50.07</td><td>68.20</td><td>-18.13</td><td>48.68</td><td>1.39</td><td>Average</td><td>246</td><td>218</td></tr><tr><td>2</td><td>5925.00</td><td>62.44</td><td>88.20</td><td>-25.76</td><td>61.05</td><td>1.39</td><td>Peak</td><td>246</td><td>218</td></tr><tr><td>3 *</td><td>5985.00</td><td>96.85</td><td></td><td></td><td>95.44</td><td>1.41</td><td>Average</td><td>246</td><td>218</td></tr><tr><td>4 *</td><td>5985.00</td><td>109.16</td><td></td><td></td><td>107.75</td><td>1.41</td><td>Peak</td><td>246</td><td>218</td></tr><tr><td>5</td><td>11970.00</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>35.43</td><td>7.44</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>11970.00</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>48.77</td><td>7.44</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>7</td><td>17955.00</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>32.18</td><td>14.09</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>8</td><td>17955.00</td><td>60.56</td><td>74.00</td><td>-13.44</td><td>46.47</td><td>14.09</td><td>Peak</td><td>100</td><td>238</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	50.07	68.20	-18.13	48.68	1.39	Average	246	218	2	5925.00	62.44	88.20	-25.76	61.05	1.39	Peak	246	218	3 *	5985.00	96.85			95.44	1.41	Average	246	218	4 *	5985.00	109.16			107.75	1.41	Peak	246	218	5	11970.00	42.87	54.00	-11.13	35.43	7.44	Average	100	158	6	11970.00	56.21	74.00	-17.79	48.77	7.44	Peak	100	158	7	17955.00	46.27	54.00	-7.73	32.18	14.09	Average	100	238	8	17955.00	60.56	74.00	-13.44	46.47	14.09	Peak	100	238
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	50.07	68.20	-18.13	48.68	1.39	Average	246	218																																																																																				
2	5925.00	62.44	88.20	-25.76	61.05	1.39	Peak	246	218																																																																																				
3 *	5985.00	96.85			95.44	1.41	Average	246	218																																																																																				
4 *	5985.00	109.16			107.75	1.41	Peak	246	218																																																																																				
5	11970.00	42.87	54.00	-11.13	35.43	7.44	Average	100	158																																																																																				
6	11970.00	56.21	74.00	-17.79	48.77	7.44	Peak	100	158																																																																																				
7	17955.00	46.27	54.00	-7.73	32.18	14.09	Average	100	238																																																																																				
8	17955.00	60.56	74.00	-13.44	46.47	14.09	Peak	100	238																																																																																				




Modulation	be EHT80	Test Freq. (MHz)	6145																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6145.00</td><td>94.13</td><td></td><td></td><td>92.48</td><td>1.65</td><td>Average</td><td>236</td><td>220</td></tr><tr><td>2 *</td><td>6145.00</td><td>106.96</td><td></td><td></td><td>105.31</td><td>1.65</td><td>Peak</td><td>236</td><td>220</td></tr><tr><td>3</td><td>12290.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>35.42</td><td>7.27</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>4</td><td>12290.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>48.76</td><td>7.27</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>5</td><td>18435.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>38.48</td><td>1.95</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>18435.00</td><td>53.57</td><td>74.00</td><td>-20.43</td><td>51.62</td><td>1.95</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td>24580.00</td><td>42.97</td><td>68.20</td><td>-25.23</td><td>34.27</td><td>8.70</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>8</td><td>24580.00</td><td>56.35</td><td>88.20</td><td>-31.85</td><td>47.65</td><td>8.70</td><td>Peak</td><td>100</td><td>128</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6145.00	94.13			92.48	1.65	Average	236	220	2 *	6145.00	106.96			105.31	1.65	Peak	236	220	3	12290.00	42.69	54.00	-11.31	35.42	7.27	Average	100	183	4	12290.00	56.03	74.00	-17.97	48.76	7.27	Peak	100	183	5	18435.00	40.43	54.00	-13.57	38.48	1.95	Average	100	177	6	18435.00	53.57	74.00	-20.43	51.62	1.95	Peak	100	177	7	24580.00	42.97	68.20	-25.23	34.27	8.70	Average	100	128	8	24580.00	56.35	88.20	-31.85	47.65	8.70	Peak	100	128
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6145.00	94.13			92.48	1.65	Average	236	220																																																																																																								
2 *	6145.00	106.96			105.31	1.65	Peak	236	220																																																																																																								
3	12290.00	42.69	54.00	-11.31	35.42	7.27	Average	100	183																																																																																																								
4	12290.00	56.03	74.00	-17.97	48.76	7.27	Peak	100	183																																																																																																								
5	18435.00	40.43	54.00	-13.57	38.48	1.95	Average	100	177																																																																																																								
6	18435.00	53.57	74.00	-20.43	51.62	1.95	Peak	100	177																																																																																																								
7	24580.00	42.97	68.20	-25.23	34.27	8.70	Average	100	128																																																																																																								
8	24580.00	56.35	88.20	-31.85	47.65	8.70	Peak	100	128																																																																																																								



Modulation	be EHT80	Test Freq. (MHz)	6145																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6145.00</td><td>97.84</td><td></td><td></td><td>96.19</td><td>1.65</td><td>Average</td><td>246</td><td>213</td></tr><tr><td>2</td><td>*</td><td>6145.00</td><td>110.36</td><td></td><td></td><td>108.71</td><td>1.65</td><td>Peak</td><td>246</td><td>213</td></tr><tr><td>3</td><td></td><td>12290.00</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>35.48</td><td>7.27</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>4</td><td></td><td>12290.00</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>48.72</td><td>7.27</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>5</td><td></td><td>18435.00</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>38.51</td><td>1.95</td><td>Average</td><td>100</td><td>264</td></tr><tr><td>6</td><td></td><td>18435.00</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>51.43</td><td>1.95</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>7</td><td></td><td>24580.00</td><td>42.99</td><td>68.20</td><td>-25.21</td><td>34.29</td><td>8.70</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>8</td><td></td><td>24580.00</td><td>56.33</td><td>88.20</td><td>-31.87</td><td>47.63</td><td>8.70</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6145.00	97.84			96.19	1.65	Average	246	213	2	*	6145.00	110.36			108.71	1.65	Peak	246	213	3		12290.00	42.75	54.00	-11.25	35.48	7.27	Average	100	177	4		12290.00	55.99	74.00	-18.01	48.72	7.27	Peak	100	177	5		18435.00	40.46	54.00	-13.54	38.51	1.95	Average	100	264	6		18435.00	53.38	74.00	-20.62	51.43	1.95	Peak	100	264	7		24580.00	42.99	68.20	-25.21	34.29	8.70	Average	100	117	8		24580.00	56.33	88.20	-31.87	47.63	8.70	Peak	100	117
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6145.00	97.84			96.19	1.65	Average	246	213																																																																																																																		
2	*	6145.00	110.36			108.71	1.65	Peak	246	213																																																																																																																		
3		12290.00	42.75	54.00	-11.25	35.48	7.27	Average	100	177																																																																																																																		
4		12290.00	55.99	74.00	-18.01	48.72	7.27	Peak	100	177																																																																																																																		
5		18435.00	40.46	54.00	-13.54	38.51	1.95	Average	100	264																																																																																																																		
6		18435.00	53.38	74.00	-20.62	51.43	1.95	Peak	100	264																																																																																																																		
7		24580.00	42.99	68.20	-25.21	34.29	8.70	Average	100	117																																																																																																																		
8		24580.00	56.33	88.20	-31.87	47.63	8.70	Peak	100	117																																																																																																																		

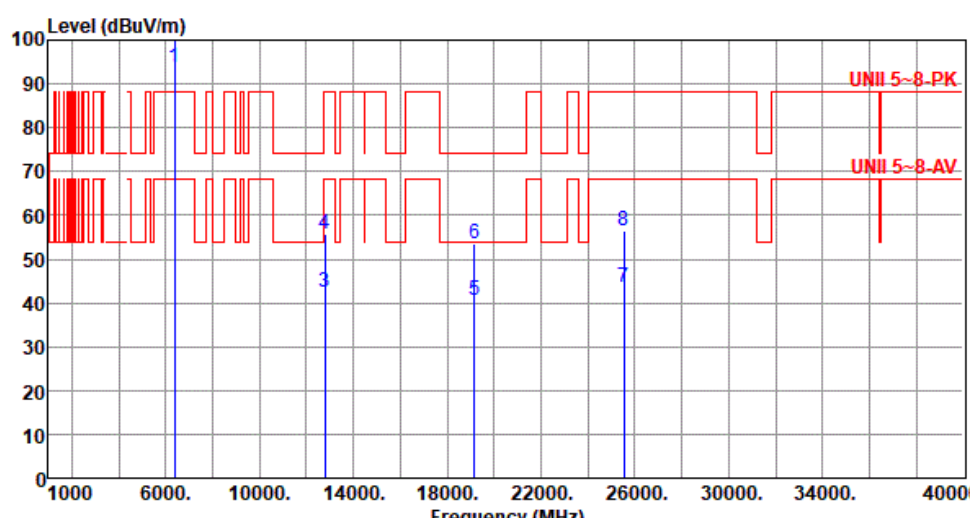

Modulation	be EHT80	Test Freq. (MHz)	6385																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																							
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>*</td><td>6385.00</td><td>93.83</td><td></td><td>91.13</td><td>2.70</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>*</td><td>6385.00</td><td>106.97</td><td></td><td>104.27</td><td>2.70</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td></td><td>12770.00</td><td>42.49</td><td>68.20 -25.71</td><td>35.48</td><td>7.01</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>4</td><td></td><td>12770.00</td><td>55.65</td><td>88.20 -32.55</td><td>48.64</td><td>7.01</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td></td><td>19155.00</td><td>40.67</td><td>54.00 -13.33</td><td>38.48</td><td>2.19</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>6</td><td></td><td>19155.00</td><td>53.52</td><td>74.00 -20.48</td><td>51.33</td><td>2.19</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>7</td><td></td><td>25540.00</td><td>43.38</td><td>68.20 -24.82</td><td>34.61</td><td>8.77</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>8</td><td></td><td>25540.00</td><td>56.41</td><td>88.20 -31.79</td><td>47.64</td><td>8.77</td><td>Peak</td><td>100</td><td>184</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	*	6385.00	93.83		91.13	2.70	Average	100	213	2	*	6385.00	106.97		104.27	2.70	Peak	100	213	3		12770.00	42.49	68.20 -25.71	35.48	7.01	Average	100	186	4		12770.00	55.65	88.20 -32.55	48.64	7.01	Peak	100	186	5		19155.00	40.67	54.00 -13.33	38.48	2.19	Average	100	215	6		19155.00	53.52	74.00 -20.48	51.33	2.19	Peak	100	215	7		25540.00	43.38	68.20 -24.82	34.61	8.77	Average	100	184	8		25540.00	56.41	88.20 -31.79	47.64	8.77	Peak	100	184
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
1	*	6385.00	93.83		91.13	2.70	Average	100	213																																																																																														
2	*	6385.00	106.97		104.27	2.70	Peak	100	213																																																																																														
3		12770.00	42.49	68.20 -25.71	35.48	7.01	Average	100	186																																																																																														
4		12770.00	55.65	88.20 -32.55	48.64	7.01	Peak	100	186																																																																																														
5		19155.00	40.67	54.00 -13.33	38.48	2.19	Average	100	215																																																																																														
6		19155.00	53.52	74.00 -20.48	51.33	2.19	Peak	100	215																																																																																														
7		25540.00	43.38	68.20 -24.82	34.61	8.77	Average	100	184																																																																																														
8		25540.00	56.41	88.20 -31.79	47.64	8.77	Peak	100	184																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	be EHT80	Test Freq. (MHz)	6385																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																												
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6385.00</td><td>97.60</td><td></td><td></td><td>94.90</td><td>2.70</td><td>Average</td><td>252</td><td>226</td></tr><tr><td>2</td><td>*</td><td>6385.00</td><td>110.05</td><td></td><td></td><td>107.35</td><td>2.70</td><td>Peak</td><td>252</td><td>226</td></tr><tr><td>3</td><td></td><td>12770.00</td><td>42.59</td><td>68.20</td><td>-25.61</td><td>35.58</td><td>7.01</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>4</td><td></td><td>12770.00</td><td>55.68</td><td>88.20</td><td>-32.52</td><td>48.67</td><td>7.01</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>5</td><td></td><td>19155.00</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>38.57</td><td>2.19</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td></td><td>19155.00</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>51.32</td><td>2.19</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>7</td><td></td><td>25540.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>34.56</td><td>8.77</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td></td><td>25540.00</td><td>56.34</td><td>88.20</td><td>-31.86</td><td>47.57</td><td>8.77</td><td>Peak</td><td>100</td><td>204</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m		reading			High	Table				dBuV/m		dB	dBuV	dB/m		cm	deg	1	*	6385.00	97.60			94.90	2.70	Average	252	226	2	*	6385.00	110.05			107.35	2.70	Peak	252	226	3		12770.00	42.59	68.20	-25.61	35.58	7.01	Average	100	258	4		12770.00	55.68	88.20	-32.52	48.67	7.01	Peak	100	258	5		19155.00	40.76	54.00	-13.24	38.57	2.19	Average	100	162	6		19155.00	53.51	74.00	-20.49	51.32	2.19	Peak	100	162	7		25540.00	43.33	68.20	-24.87	34.56	8.77	Average	100	204	8		25540.00	56.34	88.20	-31.86	47.57	8.77	Peak	100	204
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m		reading			High	Table																																																																																																																		
			dBuV/m		dB	dBuV	dB/m		cm	deg																																																																																																																		
1	*	6385.00	97.60			94.90	2.70	Average	252	226																																																																																																																		
2	*	6385.00	110.05			107.35	2.70	Peak	252	226																																																																																																																		
3		12770.00	42.59	68.20	-25.61	35.58	7.01	Average	100	258																																																																																																																		
4		12770.00	55.68	88.20	-32.52	48.67	7.01	Peak	100	258																																																																																																																		
5		19155.00	40.76	54.00	-13.24	38.57	2.19	Average	100	162																																																																																																																		
6		19155.00	53.51	74.00	-20.49	51.32	2.19	Peak	100	162																																																																																																																		
7		25540.00	43.33	68.20	-24.87	34.56	8.77	Average	100	204																																																																																																																		
8		25540.00	56.34	88.20	-31.86	47.57	8.77	Peak	100	204																																																																																																																		



Modulation	be EHT80	Test Freq. (MHz)	6465																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6465.00</td><td>93.28</td><td></td><td></td><td>90.15</td><td>3.13</td><td>Average</td><td>227</td><td>234</td></tr><tr><td>2 *</td><td>6465.00</td><td>106.90</td><td></td><td></td><td>103.77</td><td>3.13</td><td>Peak</td><td>227</td><td>234</td></tr><tr><td>3</td><td>12930.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>35.57</td><td>7.10</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>4</td><td>12930.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>48.76</td><td>7.10</td><td>Peak</td><td>100</td><td>187</td></tr><tr><td>5</td><td>19395.00</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>38.44</td><td>2.08</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>19395.00</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>51.43</td><td>2.08</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>7</td><td>25860.00</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>34.27</td><td>8.76</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>8</td><td>25860.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>47.53</td><td>8.76</td><td>Peak</td><td>100</td><td>183</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6465.00	93.28			90.15	3.13	Average	227	234	2 *	6465.00	106.90			103.77	3.13	Peak	227	234	3	12930.00	42.67	68.20	-25.53	35.57	7.10	Average	100	187	4	12930.00	55.86	88.20	-32.34	48.76	7.10	Peak	100	187	5	19395.00	40.52	54.00	-13.48	38.44	2.08	Average	100	205	6	19395.00	53.51	74.00	-20.49	51.43	2.08	Peak	100	205	7	25860.00	43.03	68.20	-25.17	34.27	8.76	Average	100	183	8	25860.00	56.29	88.20	-31.91	47.53	8.76	Peak	100	183
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6465.00	93.28			90.15	3.13	Average	227	234																																																																																																								
2 *	6465.00	106.90			103.77	3.13	Peak	227	234																																																																																																								
3	12930.00	42.67	68.20	-25.53	35.57	7.10	Average	100	187																																																																																																								
4	12930.00	55.86	88.20	-32.34	48.76	7.10	Peak	100	187																																																																																																								
5	19395.00	40.52	54.00	-13.48	38.44	2.08	Average	100	205																																																																																																								
6	19395.00	53.51	74.00	-20.49	51.43	2.08	Peak	100	205																																																																																																								
7	25860.00	43.03	68.20	-25.17	34.27	8.76	Average	100	183																																																																																																								
8	25860.00	56.29	88.20	-31.91	47.53	8.76	Peak	100	183																																																																																																								



Modulation	be EHT80	Test Freq. (MHz)	6465																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																												
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6465.00</td><td>97.26</td><td></td><td></td><td>94.13</td><td>3.13</td><td>Average</td><td>234</td><td>211</td></tr><tr><td>2</td><td>*</td><td>6465.00</td><td>110.06</td><td></td><td></td><td>106.93</td><td>3.13</td><td>Peak</td><td>234</td><td>211</td></tr><tr><td>3</td><td></td><td>12930.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>35.53</td><td>7.10</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td></td><td>12930.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>48.59</td><td>7.10</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td></td><td>19395.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>38.43</td><td>2.08</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td></td><td>19395.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>51.63</td><td>2.08</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>7</td><td></td><td>25860.00</td><td>43.21</td><td>68.20</td><td>-24.99</td><td>34.45</td><td>8.76</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>8</td><td></td><td>25860.00</td><td>56.33</td><td>88.20</td><td>-31.87</td><td>47.57</td><td>8.76</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6465.00	97.26			94.13	3.13	Average	234	211	2	*	6465.00	110.06			106.93	3.13	Peak	234	211	3		12930.00	42.63	68.20	-25.57	35.53	7.10	Average	100	176	4		12930.00	55.69	88.20	-32.51	48.59	7.10	Peak	100	176	5		19395.00	40.51	54.00	-13.49	38.43	2.08	Average	100	258	6		19395.00	53.71	74.00	-20.29	51.63	2.08	Peak	100	258	7		25860.00	43.21	68.20	-24.99	34.45	8.76	Average	100	116	8		25860.00	56.33	88.20	-31.87	47.57	8.76	Peak	100	116
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6465.00	97.26			94.13	3.13	Average	234	211																																																																																																																		
2	*	6465.00	110.06			106.93	3.13	Peak	234	211																																																																																																																		
3		12930.00	42.63	68.20	-25.57	35.53	7.10	Average	100	176																																																																																																																		
4		12930.00	55.69	88.20	-32.51	48.59	7.10	Peak	100	176																																																																																																																		
5		19395.00	40.51	54.00	-13.49	38.43	2.08	Average	100	258																																																																																																																		
6		19395.00	53.71	74.00	-20.29	51.63	2.08	Peak	100	258																																																																																																																		
7		25860.00	43.21	68.20	-24.99	34.45	8.76	Average	100	116																																																																																																																		
8		25860.00	56.33	88.20	-31.87	47.57	8.76	Peak	100	116																																																																																																																		



Modulation	be EHT80	Test Freq. (MHz)	6545																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6545.00</td><td>95.01</td><td></td><td>91.62</td><td>3.39</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>*</td><td>6545.00</td><td>107.88</td><td></td><td>104.49</td><td>3.39</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td></td><td>13090.00</td><td>43.58</td><td>68.20 -24.62</td><td>36.62</td><td>6.96</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td></td><td>13090.00</td><td>55.90</td><td>88.20 -32.30</td><td>48.94</td><td>6.96</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td></td><td>19635.00</td><td>41.16</td><td>54.00 -12.84</td><td>38.94</td><td>2.22</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>6</td><td></td><td>19635.00</td><td>54.25</td><td>74.00 -19.75</td><td>52.03</td><td>2.22</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>7</td><td></td><td>26180.00</td><td>43.56</td><td>68.20 -24.64</td><td>34.57</td><td>8.99</td><td>Average</td><td>100</td><td>189</td></tr><tr><td>8</td><td></td><td>26180.00</td><td>56.75</td><td>88.20 -31.45</td><td>47.76</td><td>8.99</td><td>Peak</td><td>100</td><td>189</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	*	6545.00	95.01		91.62	3.39	Average	100	208	2	*	6545.00	107.88		104.49	3.39	Peak	100	208	3		13090.00	43.58	68.20 -24.62	36.62	6.96	Average	100	176	4		13090.00	55.90	88.20 -32.30	48.94	6.96	Peak	100	176	5		19635.00	41.16	54.00 -12.84	38.94	2.22	Average	100	176	6		19635.00	54.25	74.00 -19.75	52.03	2.22	Peak	100	176	7		26180.00	43.56	68.20 -24.64	34.57	8.99	Average	100	189	8		26180.00	56.75	88.20 -31.45	47.76	8.99	Peak	100	189
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
								cm	deg																																																																																																								
1	*	6545.00	95.01		91.62	3.39	Average	100	208																																																																																																								
2	*	6545.00	107.88		104.49	3.39	Peak	100	208																																																																																																								
3		13090.00	43.58	68.20 -24.62	36.62	6.96	Average	100	176																																																																																																								
4		13090.00	55.90	88.20 -32.30	48.94	6.96	Peak	100	176																																																																																																								
5		19635.00	41.16	54.00 -12.84	38.94	2.22	Average	100	176																																																																																																								
6		19635.00	54.25	74.00 -19.75	52.03	2.22	Peak	100	176																																																																																																								
7		26180.00	43.56	68.20 -24.64	34.57	8.99	Average	100	189																																																																																																								
8		26180.00	56.75	88.20 -31.45	47.76	8.99	Peak	100	189																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT80	Test Freq. (MHz)	6545																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																						
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6545.00</td><td>95.09</td><td></td><td></td><td>91.70</td><td>3.39</td><td>Average</td><td>237</td><td>289</td></tr><tr><td>2</td><td>*</td><td>6545.00</td><td>108.64</td><td></td><td></td><td>105.25</td><td>3.39</td><td>Peak</td><td>237</td><td>289</td></tr><tr><td>3</td><td></td><td>13090.00</td><td>43.54</td><td>68.20</td><td>-24.66</td><td>36.58</td><td>6.96</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>4</td><td></td><td>13090.00</td><td>56.10</td><td>88.20</td><td>-32.10</td><td>49.14</td><td>6.96</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>5</td><td></td><td>19635.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>38.94</td><td>2.22</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td></td><td>19635.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>52.13</td><td>2.22</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>7</td><td></td><td>26180.00</td><td>43.56</td><td>68.20</td><td>-24.64</td><td>34.57</td><td>8.99</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td></td><td>26180.00</td><td>56.66</td><td>88.20</td><td>-31.54</td><td>47.67</td><td>8.99</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6545.00	95.09			91.70	3.39	Average	237	289	2	*	6545.00	108.64			105.25	3.39	Peak	237	289	3		13090.00	43.54	68.20	-24.66	36.58	6.96	Average	100	127	4		13090.00	56.10	88.20	-32.10	49.14	6.96	Peak	100	127	5		19635.00	41.16	54.00	-12.84	38.94	2.22	Average	100	145	6		19635.00	54.35	74.00	-19.65	52.13	2.22	Peak	100	145	7		26180.00	43.56	68.20	-24.64	34.57	8.99	Average	100	208	8		26180.00	56.66	88.20	-31.54	47.67	8.99	Peak	100	208
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6545.00	95.09			91.70	3.39	Average	237	289																																																																																												
2	*	6545.00	108.64			105.25	3.39	Peak	237	289																																																																																												
3		13090.00	43.54	68.20	-24.66	36.58	6.96	Average	100	127																																																																																												
4		13090.00	56.10	88.20	-32.10	49.14	6.96	Peak	100	127																																																																																												
5		19635.00	41.16	54.00	-12.84	38.94	2.22	Average	100	145																																																																																												
6		19635.00	54.35	74.00	-19.65	52.13	2.22	Peak	100	145																																																																																												
7		26180.00	43.56	68.20	-24.64	34.57	8.99	Average	100	208																																																																																												
8		26180.00	56.66	88.20	-31.54	47.67	8.99	Peak	100	208																																																																																												



Modulation	be EHT80	Test Freq. (MHz)	6625
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																						
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6625.00</td><td>94.82</td><td></td><td></td><td>91.29</td><td>3.53</td><td>Average</td><td>277</td><td>144</td></tr><tr><td>2</td><td>*</td><td>6625.00</td><td>108.03</td><td></td><td></td><td>104.50</td><td>3.53</td><td>Peak</td><td>277</td><td>144</td></tr><tr><td>3</td><td></td><td>13250.00</td><td>44.39</td><td>54.00</td><td>-9.61</td><td>37.27</td><td>7.12</td><td>Average</td><td>110</td><td>148</td></tr><tr><td>4</td><td></td><td>13250.00</td><td>56.60</td><td>74.00</td><td>-17.40</td><td>49.48</td><td>7.12</td><td>Peak</td><td>110</td><td>148</td></tr><tr><td>5</td><td></td><td>19875.00</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>37.79</td><td>2.45</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>6</td><td></td><td>19875.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>51.84</td><td>2.45</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>7</td><td></td><td>26500.00</td><td>44.16</td><td>68.20</td><td>-24.04</td><td>34.53</td><td>9.63</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>8</td><td></td><td>26500.00</td><td>57.47</td><td>88.20</td><td>-30.73</td><td>47.84</td><td>9.63</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6625.00	94.82			91.29	3.53	Average	277	144	2	*	6625.00	108.03			104.50	3.53	Peak	277	144	3		13250.00	44.39	54.00	-9.61	37.27	7.12	Average	110	148	4		13250.00	56.60	74.00	-17.40	49.48	7.12	Peak	110	148	5		19875.00	40.24	54.00	-13.76	37.79	2.45	Average	100	208	6		19875.00	54.29	74.00	-19.71	51.84	2.45	Peak	100	208	7		26500.00	44.16	68.20	-24.04	34.53	9.63	Average	100	116	8		26500.00	57.47	88.20	-30.73	47.84	9.63	Peak	100	116
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6625.00	94.82			91.29	3.53	Average	277	144																																																																																												
2	*	6625.00	108.03			104.50	3.53	Peak	277	144																																																																																												
3		13250.00	44.39	54.00	-9.61	37.27	7.12	Average	110	148																																																																																												
4		13250.00	56.60	74.00	-17.40	49.48	7.12	Peak	110	148																																																																																												
5		19875.00	40.24	54.00	-13.76	37.79	2.45	Average	100	208																																																																																												
6		19875.00	54.29	74.00	-19.71	51.84	2.45	Peak	100	208																																																																																												
7		26500.00	44.16	68.20	-24.04	34.53	9.63	Average	100	116																																																																																												
8		26500.00	57.47	88.20	-30.73	47.84	9.63	Peak	100	116																																																																																												



Modulation	be EHT80	Test Freq. (MHz)	6705						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):66									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6705.00	91.85			88.37	3.48	Average	236	229
2 *	6705.00	104.76			101.28	3.48	Peak	236	229
3	13410.00	44.81	68.20	-23.39	37.31	7.50	Average	100	148
4	13410.00	56.86	88.20	-31.34	49.36	7.50	Peak	100	148
5	20115.00	41.20	54.00	-12.80	38.48	2.72	Average	100	147
6	20115.00	54.46	74.00	-19.54	51.74	2.72	Peak	100	147
7	26820.00	43.92	68.20	-24.28	34.62	9.30	Average	100	168
8	26820.00	57.43	88.20	-30.77	48.13	9.30	Peak	100	168
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.									



Modulation	be EHT80	Test Freq. (MHz)	6705
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	6785
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6785.00</td><td>95.40</td><td></td><td></td><td>91.85</td><td>3.55</td><td>Average</td><td>234</td><td>294</td></tr><tr><td>2 *</td><td>6785.00</td><td>108.24</td><td></td><td></td><td>104.69</td><td>3.55</td><td>Peak</td><td>234</td><td>294</td></tr><tr><td>3</td><td>13570.00</td><td>44.92</td><td>68.20</td><td>-23.28</td><td>37.20</td><td>7.72</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>13570.00</td><td>57.18</td><td>88.20</td><td>-31.02</td><td>49.46</td><td>7.72</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>20355.00</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>38.77</td><td>2.90</td><td>Average</td><td>100</td><td>163</td></tr><tr><td>6</td><td>20355.00</td><td>55.01</td><td>74.00</td><td>-18.99</td><td>52.11</td><td>2.90</td><td>Peak</td><td>100</td><td>163</td></tr><tr><td>7</td><td>27140.00</td><td>43.79</td><td>68.20</td><td>-24.41</td><td>34.44</td><td>9.35</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>8</td><td>27140.00</td><td>57.21</td><td>88.20</td><td>-30.99</td><td>47.86</td><td>9.35</td><td>Peak</td><td>100</td><td>105</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6785.00	95.40			91.85	3.55	Average	234	294	2 *	6785.00	108.24			104.69	3.55	Peak	234	294	3	13570.00	44.92	68.20	-23.28	37.20	7.72	Average	100	178	4	13570.00	57.18	88.20	-31.02	49.46	7.72	Peak	100	178	5	20355.00	41.67	54.00	-12.33	38.77	2.90	Average	100	163	6	20355.00	55.01	74.00	-18.99	52.11	2.90	Peak	100	163	7	27140.00	43.79	68.20	-24.41	34.44	9.35	Average	100	105	8	27140.00	57.21	88.20	-30.99	47.86	9.35	Peak	100	105
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6785.00	95.40			91.85	3.55	Average	234	294																																																																																				
2 *	6785.00	108.24			104.69	3.55	Peak	234	294																																																																																				
3	13570.00	44.92	68.20	-23.28	37.20	7.72	Average	100	178																																																																																				
4	13570.00	57.18	88.20	-31.02	49.46	7.72	Peak	100	178																																																																																				
5	20355.00	41.67	54.00	-12.33	38.77	2.90	Average	100	163																																																																																				
6	20355.00	55.01	74.00	-18.99	52.11	2.90	Peak	100	163																																																																																				
7	27140.00	43.79	68.20	-24.41	34.44	9.35	Average	100	105																																																																																				
8	27140.00	57.21	88.20	-30.99	47.86	9.35	Peak	100	105																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	6865						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):66									
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	*	6865.00	95.79		92.05	3.74	Average	236	291
2	*	6865.00	108.96		105.22	3.74	Peak	236	291
3		13730.00	43.95	68.20 -24.25	36.27	7.68	Average	100	148
4		13730.00	57.22	88.20 -30.98	49.54	7.68	Peak	100	148
5		20595.00	41.70	54.00 -12.30	38.42	3.28	Average	100	108
6		20595.00	52.65	74.00 -21.35	49.37	3.28	Peak	100	108
7		27460.00	43.79	68.20 -24.41	34.33	9.46	Average	100	217
8		27460.00	56.97	88.20 -31.23	47.51	9.46	Peak	100	217


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.

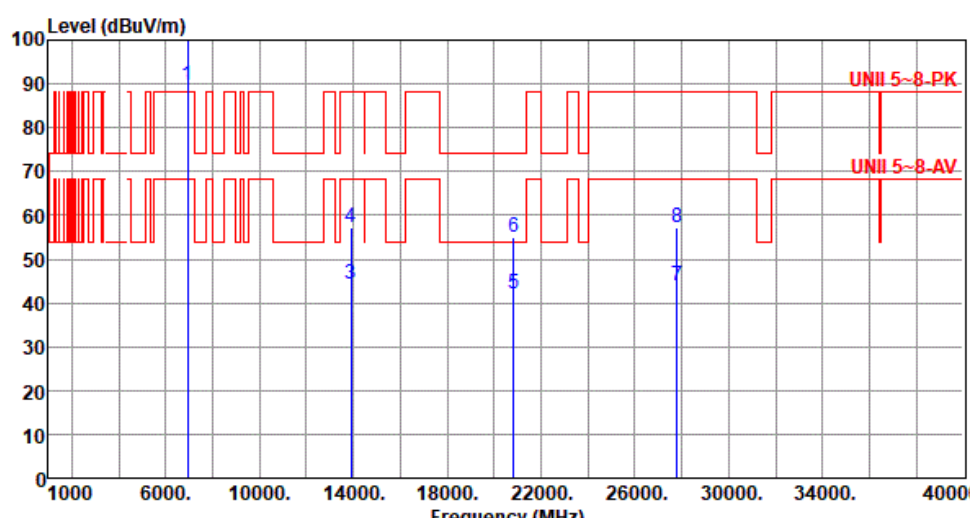

Modulation	be EHT80	Test Freq. (MHz)	6945																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6945.00</td><td>89.83</td><td></td><td></td><td>85.72</td><td>4.11</td><td>Average</td><td>230</td><td>239</td></tr><tr><td>2 *</td><td>6945.00</td><td>103.31</td><td></td><td></td><td>99.20</td><td>4.11</td><td>Peak</td><td>230</td><td>239</td></tr><tr><td>3</td><td>13890.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>36.45</td><td>7.81</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>4</td><td>13890.00</td><td>57.03</td><td>88.20</td><td>-31.17</td><td>49.22</td><td>7.81</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>5</td><td>20835.00</td><td>41.94</td><td>54.00</td><td>-12.06</td><td>38.29</td><td>3.65</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>6</td><td>20835.00</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>51.43</td><td>3.65</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>7</td><td>27780.00</td><td>43.90</td><td>68.20</td><td>-24.30</td><td>34.27</td><td>9.63</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>27780.00</td><td>57.30</td><td>88.20</td><td>-30.90</td><td>47.67</td><td>9.63</td><td>Peak</td><td>100</td><td>208</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6945.00	89.83			85.72	4.11	Average	230	239	2 *	6945.00	103.31			99.20	4.11	Peak	230	239	3	13890.00	44.26	68.20	-23.94	36.45	7.81	Average	100	177	4	13890.00	57.03	88.20	-31.17	49.22	7.81	Peak	100	177	5	20835.00	41.94	54.00	-12.06	38.29	3.65	Average	100	129	6	20835.00	55.08	74.00	-18.92	51.43	3.65	Peak	100	129	7	27780.00	43.90	68.20	-24.30	34.27	9.63	Average	100	208	8	27780.00	57.30	88.20	-30.90	47.67	9.63	Peak	100	208
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6945.00	89.83			85.72	4.11	Average	230	239																																																																																																								
2 *	6945.00	103.31			99.20	4.11	Peak	230	239																																																																																																								
3	13890.00	44.26	68.20	-23.94	36.45	7.81	Average	100	177																																																																																																								
4	13890.00	57.03	88.20	-31.17	49.22	7.81	Peak	100	177																																																																																																								
5	20835.00	41.94	54.00	-12.06	38.29	3.65	Average	100	129																																																																																																								
6	20835.00	55.08	74.00	-18.92	51.43	3.65	Peak	100	129																																																																																																								
7	27780.00	43.90	68.20	-24.30	34.27	9.63	Average	100	208																																																																																																								
8	27780.00	57.30	88.20	-30.90	47.67	9.63	Peak	100	208																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT80	Test Freq. (MHz)	6945																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																						
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6945.00</td><td>96.93</td><td></td><td></td><td>92.82</td><td>4.11</td><td>Average</td><td>247</td><td>291</td></tr><tr><td>2</td><td>*</td><td>6945.00</td><td>109.92</td><td></td><td></td><td>105.81</td><td>4.11</td><td>Peak</td><td>247</td><td>291</td></tr><tr><td>3</td><td></td><td>13890.00</td><td>44.18</td><td>68.20</td><td>-24.02</td><td>36.37</td><td>7.81</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>4</td><td></td><td>13890.00</td><td>56.93</td><td>88.20</td><td>-31.27</td><td>49.12</td><td>7.81</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>5</td><td></td><td>20835.00</td><td>42.02</td><td>54.00</td><td>-11.98</td><td>38.37</td><td>3.65</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>6</td><td></td><td>20835.00</td><td>52.99</td><td>74.00</td><td>-21.01</td><td>49.34</td><td>3.65</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>7</td><td></td><td>27780.00</td><td>43.86</td><td>68.20</td><td>-24.34</td><td>34.23</td><td>9.63</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>8</td><td></td><td>27780.00</td><td>57.26</td><td>88.20</td><td>-30.94</td><td>47.63</td><td>9.63</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6945.00	96.93			92.82	4.11	Average	247	291	2	*	6945.00	109.92			105.81	4.11	Peak	247	291	3		13890.00	44.18	68.20	-24.02	36.37	7.81	Average	100	283	4		13890.00	56.93	88.20	-31.27	49.12	7.81	Peak	100	283	5		20835.00	42.02	54.00	-11.98	38.37	3.65	Average	100	146	6		20835.00	52.99	74.00	-21.01	49.34	3.65	Peak	100	146	7		27780.00	43.86	68.20	-24.34	34.23	9.63	Average	100	117	8		27780.00	57.26	88.20	-30.94	47.63	9.63	Peak	100	117
		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6945.00	96.93			92.82	4.11	Average	247	291																																																																																												
2	*	6945.00	109.92			105.81	4.11	Peak	247	291																																																																																												
3		13890.00	44.18	68.20	-24.02	36.37	7.81	Average	100	283																																																																																												
4		13890.00	56.93	88.20	-31.27	49.12	7.81	Peak	100	283																																																																																												
5		20835.00	42.02	54.00	-11.98	38.37	3.65	Average	100	146																																																																																												
6		20835.00	52.99	74.00	-21.01	49.34	3.65	Peak	100	146																																																																																												
7		27780.00	43.86	68.20	-24.34	34.23	9.63	Average	100	117																																																																																												
8		27780.00	57.26	88.20	-30.94	47.63	9.63	Peak	100	117																																																																																												




Modulation	be EHT80	Test Freq. (MHz)	7025						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):65									
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	*	7025.00	90.23		85.74	4.49	Average	211	234
2	*	7025.00	103.33		98.84	4.49	Peak	211	234
3		7125.00	46.93	68.20	-21.27	42.13	Average	211	234
4		7125.00	59.48	88.20	-28.72	54.68	Peak	211	234
5		14050.00	44.23	68.20	-23.97	36.14	Average	100	178
6		14050.00	57.23	88.20	-30.97	49.14	Peak	100	178
7		21075.00	42.43	54.00	-11.57	38.37	Average	100	177
8		21075.00	55.49	74.00	-18.51	51.43	Peak	100	177
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.									



Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1 *</td><td>7025.00</td><td>97.46</td><td></td><td></td><td>92.97</td><td>4.49</td><td>Average</td><td>225</td><td>291</td></tr><tr><td>2 *</td><td>7025.00</td><td>110.18</td><td></td><td></td><td>105.69</td><td>4.49</td><td>Peak</td><td>225</td><td>291</td></tr><tr><td>3</td><td>7125.00</td><td>46.94</td><td>68.20</td><td>-21.26</td><td>42.14</td><td>4.80</td><td>Average</td><td>225</td><td>291</td></tr><tr><td>4</td><td>7125.00</td><td>59.31</td><td>88.20</td><td>-28.89</td><td>54.51</td><td>4.80</td><td>Peak</td><td>225</td><td>291</td></tr><tr><td>5</td><td>14050.00</td><td>44.37</td><td>68.20</td><td>-23.83</td><td>36.28</td><td>8.09</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>6</td><td>14050.00</td><td>57.41</td><td>88.20</td><td>-30.79</td><td>49.32</td><td>8.09</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>7</td><td>21075.00</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>38.46</td><td>4.06</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>8</td><td>21075.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>51.47</td><td>4.06</td><td>Peak</td><td>100</td><td>108</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7025.00	97.46			92.97	4.49	Average	225	291	2 *	7025.00	110.18			105.69	4.49	Peak	225	291	3	7125.00	46.94	68.20	-21.26	42.14	4.80	Average	225	291	4	7125.00	59.31	88.20	-28.89	54.51	4.80	Peak	225	291	5	14050.00	44.37	68.20	-23.83	36.28	8.09	Average	100	234	6	14050.00	57.41	88.20	-30.79	49.32	8.09	Peak	100	234	7	21075.00	42.52	54.00	-11.48	38.46	4.06	Average	100	108	8	21075.00	55.53	74.00	-18.47	51.47	4.06	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	7025.00	97.46			92.97	4.49	Average	225	291																																																																																				
2 *	7025.00	110.18			105.69	4.49	Peak	225	291																																																																																				
3	7125.00	46.94	68.20	-21.26	42.14	4.80	Average	225	291																																																																																				
4	7125.00	59.31	88.20	-28.89	54.51	4.80	Peak	225	291																																																																																				
5	14050.00	44.37	68.20	-23.83	36.28	8.09	Average	100	234																																																																																				
6	14050.00	57.41	88.20	-30.79	49.32	8.09	Peak	100	234																																																																																				
7	21075.00	42.52	54.00	-11.48	38.46	4.06	Average	100	108																																																																																				
8	21075.00	55.53	74.00	-18.47	51.47	4.06	Peak	100	108																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

Unwanted Emissions (Above 1GHz) for be EHT160

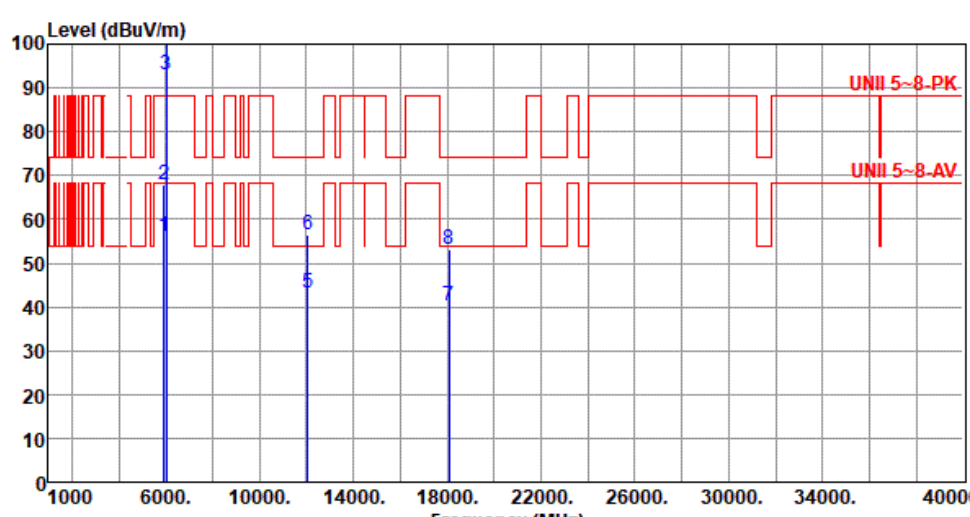Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>56.02</td><td>68.20</td><td>-12.18</td><td>54.63</td><td>1.39</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>2</td><td>5925.00</td><td>68.03</td><td>88.20</td><td>-20.17</td><td>66.64</td><td>1.39</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>3 *</td><td>6025.00</td><td>92.88</td><td></td><td></td><td>91.43</td><td>1.45</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>4 *</td><td>6025.00</td><td>105.86</td><td></td><td></td><td>104.41</td><td>1.45</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>5</td><td>12050.00</td><td>43.10</td><td>54.00</td><td>-10.90</td><td>35.48</td><td>7.62</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>6</td><td>12050.00</td><td>56.38</td><td>74.00</td><td>-17.62</td><td>48.76</td><td>7.62</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>7</td><td>18075.00</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>38.48</td><td>1.83</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>8</td><td>18075.00</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>51.42</td><td>1.83</td><td>Peak</td><td>100</td><td>177</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	56.02	68.20	-12.18	54.63	1.39	Average	100	215	2	5925.00	68.03	88.20	-20.17	66.64	1.39	Peak	100	215	3 *	6025.00	92.88			91.43	1.45	Average	100	215	4 *	6025.00	105.86			104.41	1.45	Peak	100	215	5	12050.00	43.10	54.00	-10.90	35.48	7.62	Average	100	167	6	12050.00	56.38	74.00	-17.62	48.76	7.62	Peak	100	167	7	18075.00	40.31	54.00	-13.69	38.48	1.83	Average	100	177	8	18075.00	53.25	74.00	-20.75	51.42	1.83	Peak	100	177
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	56.02	68.20	-12.18	54.63	1.39	Average	100	215																																																																																				
2	5925.00	68.03	88.20	-20.17	66.64	1.39	Peak	100	215																																																																																				
3 *	6025.00	92.88			91.43	1.45	Average	100	215																																																																																				
4 *	6025.00	105.86			104.41	1.45	Peak	100	215																																																																																				
5	12050.00	43.10	54.00	-10.90	35.48	7.62	Average	100	167																																																																																				
6	12050.00	56.38	74.00	-17.62	48.76	7.62	Peak	100	167																																																																																				
7	18075.00	40.31	54.00	-13.69	38.48	1.83	Average	100	177																																																																																				
8	18075.00	53.25	74.00	-20.75	51.42	1.83	Peak	100	177																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT160	Test Freq. (MHz)	6025
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT160	Test Freq. (MHz)	6185
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBUV/m)			



Modulation	be EHT160	Test Freq. (MHz)	6185																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6185.00</td><td>97.21</td><td></td><td></td><td>95.40</td><td>1.81</td><td>Average</td><td>233</td><td>229</td></tr><tr><td>2 *</td><td>6185.00</td><td>109.93</td><td></td><td></td><td>108.12</td><td>1.81</td><td>Peak</td><td>233</td><td>229</td></tr><tr><td>3</td><td>12370.00</td><td>44.00</td><td>54.00</td><td>-10.00</td><td>36.91</td><td>7.09</td><td>Average</td><td>102</td><td>277</td></tr><tr><td>4</td><td>12370.00</td><td>59.75</td><td>74.00</td><td>-14.25</td><td>52.66</td><td>7.09</td><td>Peak</td><td>102</td><td>277</td></tr><tr><td>5</td><td>18555.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>40.09</td><td>2.07</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>6</td><td>18555.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>53.51</td><td>2.07</td><td>Peak</td><td>100</td><td>321</td></tr><tr><td>7</td><td>24740.00</td><td>46.29</td><td>68.20</td><td>-21.91</td><td>37.41</td><td>8.88</td><td>Average</td><td>102</td><td>338</td></tr><tr><td>8</td><td>24740.00</td><td>55.85</td><td>88.20</td><td>-32.35</td><td>46.97</td><td>8.88</td><td>Peak</td><td>102</td><td>338</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6185.00	97.21			95.40	1.81	Average	233	229	2 *	6185.00	109.93			108.12	1.81	Peak	233	229	3	12370.00	44.00	54.00	-10.00	36.91	7.09	Average	102	277	4	12370.00	59.75	74.00	-14.25	52.66	7.09	Peak	102	277	5	18555.00	42.16	54.00	-11.84	40.09	2.07	Average	100	321	6	18555.00	55.58	74.00	-18.42	53.51	2.07	Peak	100	321	7	24740.00	46.29	68.20	-21.91	37.41	8.88	Average	102	338	8	24740.00	55.85	88.20	-32.35	46.97	8.88	Peak	102	338
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6185.00	97.21			95.40	1.81	Average	233	229																																																																																				
2 *	6185.00	109.93			108.12	1.81	Peak	233	229																																																																																				
3	12370.00	44.00	54.00	-10.00	36.91	7.09	Average	102	277																																																																																				
4	12370.00	59.75	74.00	-14.25	52.66	7.09	Peak	102	277																																																																																				
5	18555.00	42.16	54.00	-11.84	40.09	2.07	Average	100	321																																																																																				
6	18555.00	55.58	74.00	-18.42	53.51	2.07	Peak	100	321																																																																																				
7	24740.00	46.29	68.20	-21.91	37.41	8.88	Average	102	338																																																																																				
8	24740.00	55.85	88.20	-32.35	46.97	8.88	Peak	102	338																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6345.00</td><td>99.19</td><td></td><td>96.69</td><td>2.50</td><td>Average</td><td>234</td><td>211</td></tr><tr><td>2</td><td>*</td><td>6345.00</td><td>112.31</td><td></td><td>109.81</td><td>2.50</td><td>Peak</td><td>234</td><td>211</td></tr><tr><td>3</td><td></td><td>12690.00</td><td>42.61</td><td>54.00 -11.39</td><td>35.74</td><td>6.87</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>4</td><td></td><td>12690.00</td><td>56.10</td><td>74.00 -17.90</td><td>49.23</td><td>6.87</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>5</td><td></td><td>19035.00</td><td>40.70</td><td>54.00 -13.30</td><td>38.46</td><td>2.24</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td></td><td>19035.00</td><td>53.90</td><td>74.00 -20.10</td><td>51.66</td><td>2.24</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>7</td><td></td><td>25380.00</td><td>43.22</td><td>68.20 -24.98</td><td>34.39</td><td>8.83</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>8</td><td></td><td>25380.00</td><td>56.51</td><td>88.20 -31.69</td><td>47.68</td><td>8.83</td><td>Peak</td><td>100</td><td>172</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	*	6345.00	99.19		96.69	2.50	Average	234	211	2	*	6345.00	112.31		109.81	2.50	Peak	234	211	3		12690.00	42.61	54.00 -11.39	35.74	6.87	Average	100	158	4		12690.00	56.10	74.00 -17.90	49.23	6.87	Peak	100	158	5		19035.00	40.70	54.00 -13.30	38.46	2.24	Average	100	158	6		19035.00	53.90	74.00 -20.10	51.66	2.24	Peak	100	158	7		25380.00	43.22	68.20 -24.98	34.39	8.83	Average	100	172	8		25380.00	56.51	88.20 -31.69	47.68	8.83	Peak	100	172
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
								cm	deg																																																																																																								
1	*	6345.00	99.19		96.69	2.50	Average	234	211																																																																																																								
2	*	6345.00	112.31		109.81	2.50	Peak	234	211																																																																																																								
3		12690.00	42.61	54.00 -11.39	35.74	6.87	Average	100	158																																																																																																								
4		12690.00	56.10	74.00 -17.90	49.23	6.87	Peak	100	158																																																																																																								
5		19035.00	40.70	54.00 -13.30	38.46	2.24	Average	100	158																																																																																																								
6		19035.00	53.90	74.00 -20.10	51.66	2.24	Peak	100	158																																																																																																								
7		25380.00	43.22	68.20 -24.98	34.39	8.83	Average	100	172																																																																																																								
8		25380.00	56.51	88.20 -31.69	47.68	8.83	Peak	100	172																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	




Modulation	be EHT160	Test Freq. (MHz)	6505																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6505.00</td><td>92.36</td><td></td><td></td><td>89.12</td><td>3.24</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2 *</td><td>6505.00</td><td>105.60</td><td></td><td></td><td>102.36</td><td>3.24</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>13010.00</td><td>41.99</td><td>68.20</td><td>-26.21</td><td>35.03</td><td>6.96</td><td>Average</td><td>102</td><td>196</td></tr><tr><td>4</td><td>13010.00</td><td>54.34</td><td>88.20</td><td>-33.86</td><td>47.38</td><td>6.96</td><td>Peak</td><td>102</td><td>196</td></tr><tr><td>5</td><td>19515.00</td><td>40.05</td><td>54.00</td><td>-13.95</td><td>37.92</td><td>2.13</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>6</td><td>19515.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>51.51</td><td>2.13</td><td>Peak</td><td>100</td><td>83</td></tr><tr><td>7</td><td>26020.00</td><td>42.82</td><td>68.20</td><td>-25.38</td><td>33.95</td><td>8.87</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>8</td><td>26020.00</td><td>55.72</td><td>88.20</td><td>-32.48</td><td>46.85</td><td>8.87</td><td>Peak</td><td>100</td><td>15</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6505.00	92.36			89.12	3.24	Average	100	223	2 *	6505.00	105.60			102.36	3.24	Peak	100	223	3	13010.00	41.99	68.20	-26.21	35.03	6.96	Average	102	196	4	13010.00	54.34	88.20	-33.86	47.38	6.96	Peak	102	196	5	19515.00	40.05	54.00	-13.95	37.92	2.13	Average	100	83	6	19515.00	53.64	74.00	-20.36	51.51	2.13	Peak	100	83	7	26020.00	42.82	68.20	-25.38	33.95	8.87	Average	100	15	8	26020.00	55.72	88.20	-32.48	46.85	8.87	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6505.00	92.36			89.12	3.24	Average	100	223																																																																																				
2 *	6505.00	105.60			102.36	3.24	Peak	100	223																																																																																				
3	13010.00	41.99	68.20	-26.21	35.03	6.96	Average	102	196																																																																																				
4	13010.00	54.34	88.20	-33.86	47.38	6.96	Peak	102	196																																																																																				
5	19515.00	40.05	54.00	-13.95	37.92	2.13	Average	100	83																																																																																				
6	19515.00	53.64	74.00	-20.36	51.51	2.13	Peak	100	83																																																																																				
7	26020.00	42.82	68.20	-25.38	33.95	8.87	Average	100	15																																																																																				
8	26020.00	55.72	88.20	-32.48	46.85	8.87	Peak	100	15																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

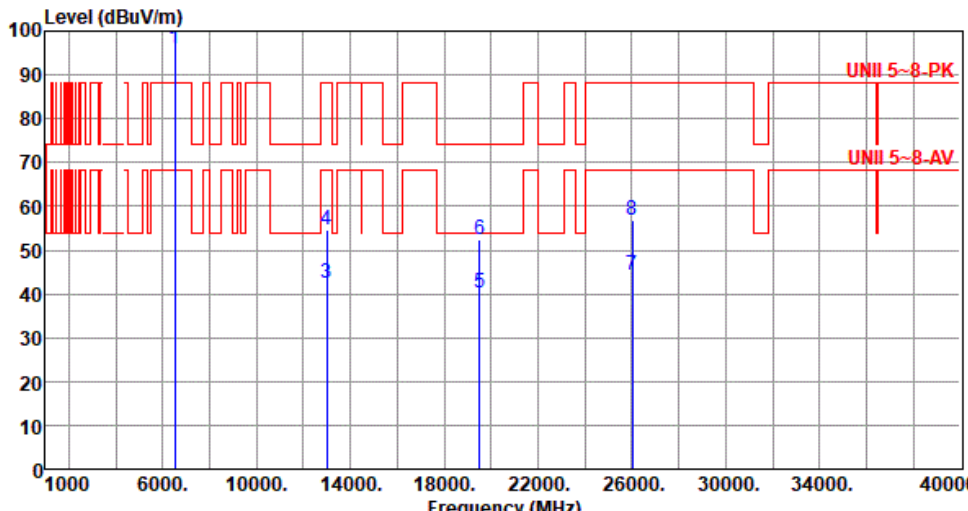

Modulation	be EHT160	Test Freq. (MHz)	6505																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																						
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6505.00</td><td>95.86</td><td></td><td></td><td>92.62</td><td>3.24</td><td>Average</td><td>235</td><td>212</td></tr><tr><td>2</td><td>*</td><td>6505.00</td><td>108.67</td><td></td><td></td><td>105.43</td><td>3.24</td><td>Peak</td><td>235</td><td>212</td></tr><tr><td>3</td><td></td><td>13010.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>35.35</td><td>6.96</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>4</td><td></td><td>13010.00</td><td>54.43</td><td>88.20</td><td>-33.77</td><td>47.47</td><td>6.96</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>5</td><td></td><td>19515.00</td><td>40.32</td><td>54.00</td><td>-13.68</td><td>38.19</td><td>2.13</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td></td><td>19515.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>50.45</td><td>2.13</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>7</td><td></td><td>26020.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>35.48</td><td>8.87</td><td>Average</td><td>102</td><td>1</td></tr><tr><td>8</td><td></td><td>26020.00</td><td>56.73</td><td>88.20</td><td>-31.47</td><td>47.86</td><td>8.87</td><td>Peak</td><td>102</td><td>1</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6505.00	95.86			92.62	3.24	Average	235	212	2	*	6505.00	108.67			105.43	3.24	Peak	235	212	3		13010.00	42.31	68.20	-25.89	35.35	6.96	Average	100	240	4		13010.00	54.43	88.20	-33.77	47.47	6.96	Peak	100	240	5		19515.00	40.32	54.00	-13.68	38.19	2.13	Average	100	55	6		19515.00	52.58	74.00	-21.42	50.45	2.13	Peak	100	55	7		26020.00	44.35	68.20	-23.85	35.48	8.87	Average	102	1	8		26020.00	56.73	88.20	-31.47	47.86	8.87	Peak	102	1
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6505.00	95.86			92.62	3.24	Average	235	212																																																																																												
2	*	6505.00	108.67			105.43	3.24	Peak	235	212																																																																																												
3		13010.00	42.31	68.20	-25.89	35.35	6.96	Average	100	240																																																																																												
4		13010.00	54.43	88.20	-33.77	47.47	6.96	Peak	100	240																																																																																												
5		19515.00	40.32	54.00	-13.68	38.19	2.13	Average	100	55																																																																																												
6		19515.00	52.58	74.00	-21.42	50.45	2.13	Peak	100	55																																																																																												
7		26020.00	44.35	68.20	-23.85	35.48	8.87	Average	102	1																																																																																												
8		26020.00	56.73	88.20	-31.47	47.86	8.87	Peak	102	1																																																																																												

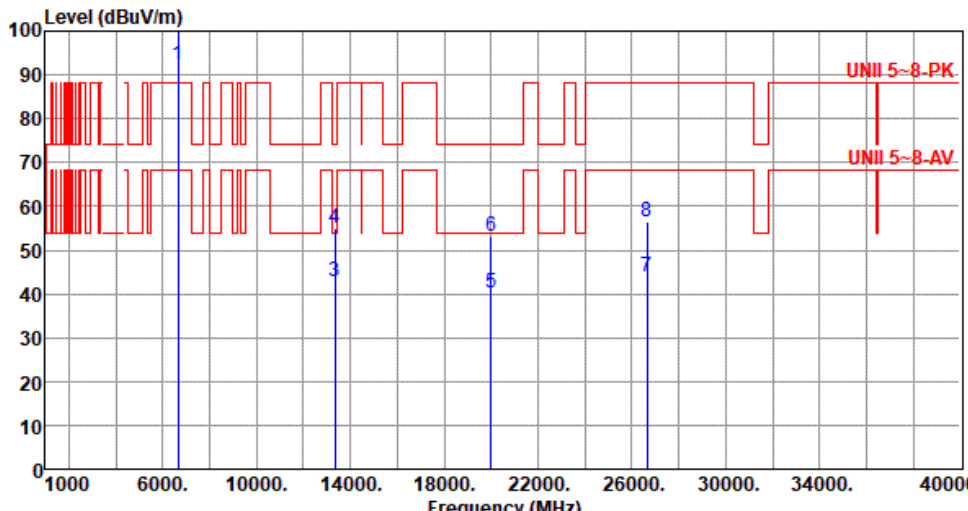

Modulation	be EHT160	Test Freq. (MHz)	6665																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6665.00</td><td>92.21</td><td></td><td></td><td>88.73</td><td>3.48</td><td>Average</td><td>233</td><td>231</td></tr><tr><td>2 *</td><td>6665.00</td><td>105.36</td><td></td><td></td><td>101.88</td><td>3.48</td><td>Peak</td><td>233</td><td>231</td></tr><tr><td>3</td><td>13330.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>35.47</td><td>7.20</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>13330.00</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>47.73</td><td>7.20</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>19995.00</td><td>40.28</td><td>54.00</td><td>-13.72</td><td>37.69</td><td>2.59</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>6</td><td>19995.00</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>50.45</td><td>2.59</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>7</td><td>26660.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>34.17</td><td>9.68</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>8</td><td>26660.00</td><td>56.40</td><td>88.20</td><td>-31.80</td><td>46.72</td><td>9.68</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6665.00	92.21			88.73	3.48	Average	233	231	2 *	6665.00	105.36			101.88	3.48	Peak	233	231	3	13330.00	42.67	54.00	-11.33	35.47	7.20	Average	100	25	4	13330.00	54.93	74.00	-19.07	47.73	7.20	Peak	100	25	5	19995.00	40.28	54.00	-13.72	37.69	2.59	Average	100	101	6	19995.00	53.04	74.00	-20.96	50.45	2.59	Peak	100	101	7	26660.00	43.85	68.20	-24.35	34.17	9.68	Average	100	35	8	26660.00	56.40	88.20	-31.80	46.72	9.68	Peak	100	35
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6665.00	92.21			88.73	3.48	Average	233	231																																																																																																								
2 *	6665.00	105.36			101.88	3.48	Peak	233	231																																																																																																								
3	13330.00	42.67	54.00	-11.33	35.47	7.20	Average	100	25																																																																																																								
4	13330.00	54.93	74.00	-19.07	47.73	7.20	Peak	100	25																																																																																																								
5	19995.00	40.28	54.00	-13.72	37.69	2.59	Average	100	101																																																																																																								
6	19995.00	53.04	74.00	-20.96	50.45	2.59	Peak	100	101																																																																																																								
7	26660.00	43.85	68.20	-24.35	34.17	9.68	Average	100	35																																																																																																								
8	26660.00	56.40	88.20	-31.80	46.72	9.68	Peak	100	35																																																																																																								



Modulation	be EHT160	Test Freq. (MHz)	6665						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	*	6665.00	95.35		91.87	3.48	Average	236	291
2	*	6665.00	108.21		104.73	3.48	Peak	236	291
3		13330.00	44.87	54.00	-9.13	37.67	Average	102	316
4		13330.00	56.28	74.00	-17.72	49.08	Peak	102	316
5		19995.00	40.44	54.00	-13.56	37.85	Average	100	48
6		19995.00	53.94	74.00	-20.06	51.35	Peak	100	48
7		26660.00	45.43	68.20	-22.77	35.75	Average	100	286
8		26660.00	56.80	88.20	-31.40	47.12	Peak	100	286

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.



Modulation	be EHT160	Test Freq. (MHz)	6825																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6825.00</td><td>92.38</td><td></td><td>88.76</td><td>3.62</td><td>Average</td><td>227</td><td>235</td></tr><tr><td>2</td><td>*</td><td>6825.00</td><td>105.75</td><td></td><td>102.13</td><td>3.62</td><td>Peak</td><td>227</td><td>235</td></tr><tr><td>3</td><td></td><td>13650.00</td><td>44.55</td><td>68.20 -23.65</td><td>36.84</td><td>7.71</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>4</td><td></td><td>13650.00</td><td>56.91</td><td>88.20 -31.29</td><td>49.20</td><td>7.71</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>5</td><td></td><td>20475.00</td><td>41.64</td><td>54.00 -12.36</td><td>38.45</td><td>3.19</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>6</td><td></td><td>20475.00</td><td>54.80</td><td>74.00 -19.20</td><td>51.61</td><td>3.19</td><td>Peak</td><td>100</td><td>174</td></tr><tr><td>7</td><td></td><td>27300.00</td><td>43.55</td><td>68.20 -24.65</td><td>34.18</td><td>9.37</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>8</td><td></td><td>27300.00</td><td>56.74</td><td>88.20 -31.46</td><td>47.37</td><td>9.37</td><td>Peak</td><td>100</td><td>115</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	6825.00	92.38		88.76	3.62	Average	227	235	2	*	6825.00	105.75		102.13	3.62	Peak	227	235	3		13650.00	44.55	68.20 -23.65	36.84	7.71	Average	100	251	4		13650.00	56.91	88.20 -31.29	49.20	7.71	Peak	100	251	5		20475.00	41.64	54.00 -12.36	38.45	3.19	Average	100	174	6		20475.00	54.80	74.00 -19.20	51.61	3.19	Peak	100	174	7		27300.00	43.55	68.20 -24.65	34.18	9.37	Average	100	115	8		27300.00	56.74	88.20 -31.46	47.37	9.37	Peak	100	115
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	*	6825.00	92.38		88.76	3.62	Average	227	235																																																																																																								
2	*	6825.00	105.75		102.13	3.62	Peak	227	235																																																																																																								
3		13650.00	44.55	68.20 -23.65	36.84	7.71	Average	100	251																																																																																																								
4		13650.00	56.91	88.20 -31.29	49.20	7.71	Peak	100	251																																																																																																								
5		20475.00	41.64	54.00 -12.36	38.45	3.19	Average	100	174																																																																																																								
6		20475.00	54.80	74.00 -19.20	51.61	3.19	Peak	100	174																																																																																																								
7		27300.00	43.55	68.20 -24.65	34.18	9.37	Average	100	115																																																																																																								
8		27300.00	56.74	88.20 -31.46	47.37	9.37	Peak	100	115																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	

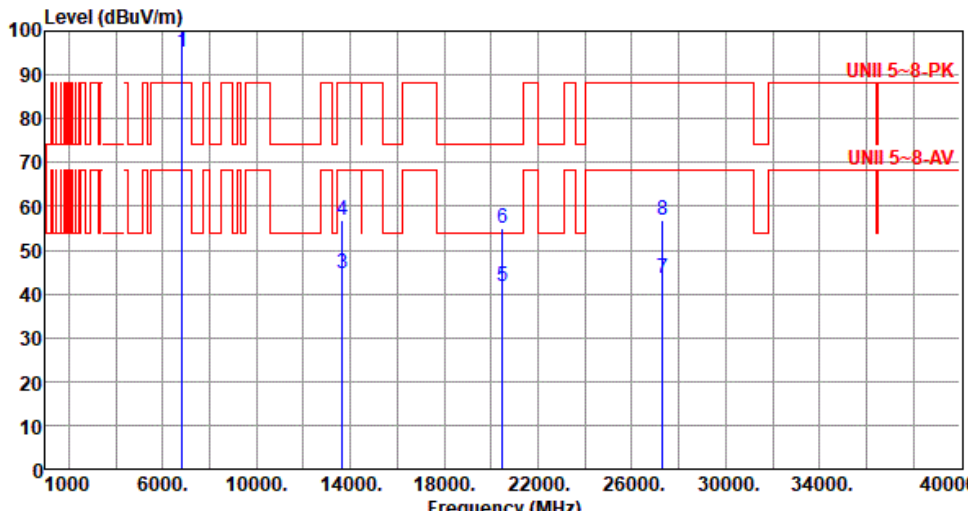

Modulation	be EHT160	Test Freq. (MHz)	6825						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6825.00	95.35			91.73	3.62	Average	236	292
2 *	6825.00	108.39			104.77	3.62	Peak	236	292
3	13650.00	44.48	68.20	-23.72	36.77	7.71	Average	100	179
4	13650.00	56.82	88.20	-31.38	49.11	7.71	Peak	100	179
5	20475.00	41.69	54.00	-12.31	38.50	3.19	Average	100	106
6	20475.00	54.85	74.00	-19.15	51.66	3.19	Peak	100	106
7	27300.00	43.57	68.20	-24.63	34.20	9.37	Average	100	206
8	27300.00	56.75	88.20	-31.45	47.38	9.37	Peak	100	206

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.




Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																												
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>*</td><td>6985.00</td><td>90.72</td><td></td><td></td><td>86.39</td><td>4.33</td><td>Average</td><td>225</td><td>231</td></tr><tr><td>2</td><td>*</td><td>6985.00</td><td>103.75</td><td></td><td></td><td>99.42</td><td>4.33</td><td>Peak</td><td>225</td><td>231</td></tr><tr><td>3</td><td></td><td>7125.00</td><td>51.22</td><td>68.20</td><td>-16.98</td><td>46.42</td><td>4.80</td><td>Average</td><td>225</td><td>231</td></tr><tr><td>4</td><td></td><td>7125.00</td><td>63.28</td><td>88.20</td><td>-24.92</td><td>58.48</td><td>4.80</td><td>Peak</td><td>225</td><td>231</td></tr><tr><td>5</td><td></td><td>7250.00</td><td>46.76</td><td>54.00</td><td>-7.24</td><td>41.55</td><td>5.21</td><td>Average</td><td>225</td><td>231</td></tr><tr><td>6</td><td></td><td>7250.00</td><td>57.69</td><td>74.00</td><td>-16.31</td><td>52.48</td><td>5.21</td><td>Peak</td><td>225</td><td>231</td></tr><tr><td>7</td><td></td><td>13970.00</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>38.11</td><td>7.87</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>8</td><td></td><td>13970.00</td><td>60.86</td><td>88.20</td><td>-27.34</td><td>52.99</td><td>7.87</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>9</td><td></td><td>20955.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>37.13</td><td>3.82</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>10</td><td></td><td>20955.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>49.82</td><td>3.82</td><td>Peak</td><td>100</td><td>33</td></tr></table>						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6985.00	90.72			86.39	4.33	Average	225	231	2	*	6985.00	103.75			99.42	4.33	Peak	225	231	3		7125.00	51.22	68.20	-16.98	46.42	4.80	Average	225	231	4		7125.00	63.28	88.20	-24.92	58.48	4.80	Peak	225	231	5		7250.00	46.76	54.00	-7.24	41.55	5.21	Average	225	231	6		7250.00	57.69	74.00	-16.31	52.48	5.21	Peak	225	231	7		13970.00	45.98	68.20	-22.22	38.11	7.87	Average	100	211	8		13970.00	60.86	88.20	-27.34	52.99	7.87	Peak	100	211	9		20955.00	40.95	54.00	-13.05	37.13	3.82	Average	100	33	10		20955.00	53.64	74.00	-20.36	49.82	3.82	Peak	100	33
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	*	6985.00	90.72			86.39	4.33	Average	225	231																																																																																																																		
2	*	6985.00	103.75			99.42	4.33	Peak	225	231																																																																																																																		
3		7125.00	51.22	68.20	-16.98	46.42	4.80	Average	225	231																																																																																																																		
4		7125.00	63.28	88.20	-24.92	58.48	4.80	Peak	225	231																																																																																																																		
5		7250.00	46.76	54.00	-7.24	41.55	5.21	Average	225	231																																																																																																																		
6		7250.00	57.69	74.00	-16.31	52.48	5.21	Peak	225	231																																																																																																																		
7		13970.00	45.98	68.20	-22.22	38.11	7.87	Average	100	211																																																																																																																		
8		13970.00	60.86	88.20	-27.34	52.99	7.87	Peak	100	211																																																																																																																		
9		20955.00	40.95	54.00	-13.05	37.13	3.82	Average	100	33																																																																																																																		
10		20955.00	53.64	74.00	-20.36	49.82	3.82	Peak	100	33																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																												



Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6985.00</td><td>97.11</td><td></td><td></td><td>92.78</td><td>4.33</td><td>Average</td><td>241</td><td>290</td></tr><tr><td>2</td><td>*</td><td>6985.00</td><td>110.03</td><td></td><td></td><td>105.70</td><td>4.33</td><td>Peak</td><td>241</td><td>290</td></tr><tr><td>3</td><td></td><td>7125.00</td><td>57.06</td><td>68.20</td><td>-11.14</td><td>52.26</td><td>4.80</td><td>Average</td><td>241</td><td>290</td></tr><tr><td>4</td><td></td><td>7125.00</td><td>68.96</td><td>88.20</td><td>-19.24</td><td>64.16</td><td>4.80</td><td>Peak</td><td>241</td><td>290</td></tr><tr><td>5</td><td></td><td>7250.00</td><td>50.54</td><td>54.00</td><td>-3.46</td><td>45.33</td><td>5.21</td><td>Average</td><td>241</td><td>290</td></tr><tr><td>6</td><td></td><td>7250.00</td><td>61.69</td><td>74.00</td><td>-12.31</td><td>56.48</td><td>5.21</td><td>Peak</td><td>241</td><td>290</td></tr><tr><td>7</td><td></td><td>13970.00</td><td>46.12</td><td>68.20</td><td>-22.08</td><td>38.25</td><td>7.87</td><td>Average</td><td>100</td><td>289</td></tr><tr><td>8</td><td></td><td>13970.00</td><td>60.00</td><td>88.20</td><td>-28.20</td><td>52.13</td><td>7.87</td><td>Peak</td><td>100</td><td>289</td></tr><tr><td>9</td><td></td><td>20955.00</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>37.48</td><td>3.82</td><td>Average</td><td>183</td><td>260</td></tr><tr><td>10</td><td></td><td>20955.00</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>49.84</td><td>3.82</td><td>Peak</td><td>183</td><td>260</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6985.00	97.11			92.78	4.33	Average	241	290	2	*	6985.00	110.03			105.70	4.33	Peak	241	290	3		7125.00	57.06	68.20	-11.14	52.26	4.80	Average	241	290	4		7125.00	68.96	88.20	-19.24	64.16	4.80	Peak	241	290	5		7250.00	50.54	54.00	-3.46	45.33	5.21	Average	241	290	6		7250.00	61.69	74.00	-12.31	56.48	5.21	Peak	241	290	7		13970.00	46.12	68.20	-22.08	38.25	7.87	Average	100	289	8		13970.00	60.00	88.20	-28.20	52.13	7.87	Peak	100	289	9		20955.00	41.30	54.00	-12.70	37.48	3.82	Average	183	260	10		20955.00	53.66	74.00	-20.34	49.84	3.82	Peak	183	260
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	*	6985.00	97.11			92.78	4.33	Average	241	290																																																																																																																		
2	*	6985.00	110.03			105.70	4.33	Peak	241	290																																																																																																																		
3		7125.00	57.06	68.20	-11.14	52.26	4.80	Average	241	290																																																																																																																		
4		7125.00	68.96	88.20	-19.24	64.16	4.80	Peak	241	290																																																																																																																		
5		7250.00	50.54	54.00	-3.46	45.33	5.21	Average	241	290																																																																																																																		
6		7250.00	61.69	74.00	-12.31	56.48	5.21	Peak	241	290																																																																																																																		
7		13970.00	46.12	68.20	-22.08	38.25	7.87	Average	100	289																																																																																																																		
8		13970.00	60.00	88.20	-28.20	52.13	7.87	Peak	100	289																																																																																																																		
9		20955.00	41.30	54.00	-12.70	37.48	3.82	Average	183	260																																																																																																																		
10		20955.00	53.66	74.00	-20.34	49.84	3.82	Peak	183	260																																																																																																																		

Unwanted Emissions (Above 1GHz) for be EHT320

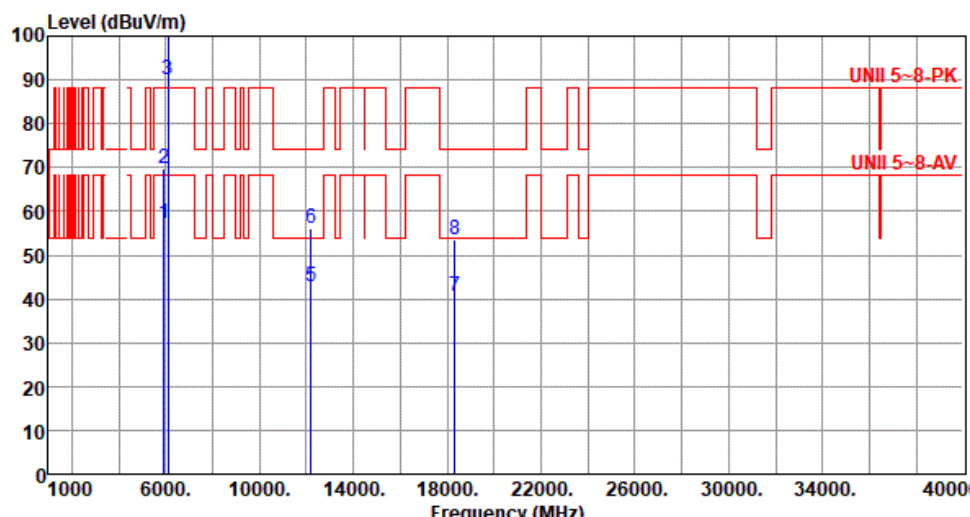Modulation	be EHT320	Test Freq. (MHz)	6105																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>57.03</td><td>68.20</td><td>-11.17</td><td>55.64</td><td>1.39</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>5925.00</td><td>69.70</td><td>88.20</td><td>-18.50</td><td>68.31</td><td>1.39</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3 *</td><td>6105.00</td><td>90.21</td><td></td><td></td><td>88.66</td><td>1.55</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4 *</td><td>6105.00</td><td>103.03</td><td></td><td></td><td>101.48</td><td>1.55</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>12210.00</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>35.48</td><td>7.30</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>6</td><td>12210.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>48.76</td><td>7.30</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>7</td><td>18315.00</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>38.43</td><td>2.07</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>8</td><td>18315.00</td><td>53.43</td><td>74.00</td><td>-20.57</td><td>51.36</td><td>2.07</td><td>Peak</td><td>100</td><td>251</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5925.00	57.03	68.20	-11.17	55.64	1.39	Average	100	211	2	5925.00	69.70	88.20	-18.50	68.31	1.39	Peak	100	211	3 *	6105.00	90.21			88.66	1.55	Average	100	211	4 *	6105.00	103.03			101.48	1.55	Peak	100	211	5	12210.00	42.78	54.00	-11.22	35.48	7.30	Average	100	186	6	12210.00	56.06	74.00	-17.94	48.76	7.30	Peak	100	186	7	18315.00	40.50	54.00	-13.50	38.43	2.07	Average	100	251	8	18315.00	53.43	74.00	-20.57	51.36	2.07	Peak	100	251
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	5925.00	57.03	68.20	-11.17	55.64	1.39	Average	100	211																																																																																																								
2	5925.00	69.70	88.20	-18.50	68.31	1.39	Peak	100	211																																																																																																								
3 *	6105.00	90.21			88.66	1.55	Average	100	211																																																																																																								
4 *	6105.00	103.03			101.48	1.55	Peak	100	211																																																																																																								
5	12210.00	42.78	54.00	-11.22	35.48	7.30	Average	100	186																																																																																																								
6	12210.00	56.06	74.00	-17.94	48.76	7.30	Peak	100	186																																																																																																								
7	18315.00	40.50	54.00	-13.50	38.43	2.07	Average	100	251																																																																																																								
8	18315.00	53.43	74.00	-20.57	51.36	2.07	Peak	100	251																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																																	




Modulation	be EHT320		Test Freq. (MHz)		6105																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>61.22</td><td>68.20</td><td>-6.98</td><td>59.83</td><td>1.39</td><td>Average</td><td>240</td><td>213</td></tr><tr><td>2</td><td>5925.00</td><td>72.80</td><td>88.20</td><td>-15.40</td><td>71.41</td><td>1.39</td><td>Peak</td><td>240</td><td>213</td></tr><tr><td>3 *</td><td>6105.00</td><td>93.26</td><td></td><td></td><td>91.71</td><td>1.55</td><td>Average</td><td>240</td><td>213</td></tr><tr><td>4 *</td><td>6105.00</td><td>106.17</td><td></td><td></td><td>104.62</td><td>1.55</td><td>Peak</td><td>240</td><td>213</td></tr><tr><td>5</td><td>12210.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>35.44</td><td>7.30</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>6</td><td>12210.00</td><td>56.02</td><td>74.00</td><td>-17.98</td><td>48.72</td><td>7.30</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>7</td><td>18315.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>38.42</td><td>2.07</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>8</td><td>18315.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>51.62</td><td>2.07</td><td>Peak</td><td>100</td><td>271</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m	dBuV/m	dB	dBuV			cm	deg	1	5925.00	61.22	68.20	-6.98	59.83	1.39	Average	240	213	2	5925.00	72.80	88.20	-15.40	71.41	1.39	Peak	240	213	3 *	6105.00	93.26			91.71	1.55	Average	240	213	4 *	6105.00	106.17			104.62	1.55	Peak	240	213	5	12210.00	42.74	54.00	-11.26	35.44	7.30	Average	100	146	6	12210.00	56.02	74.00	-17.98	48.72	7.30	Peak	100	146	7	18315.00	40.49	54.00	-13.51	38.42	2.07	Average	100	271	8	18315.00	53.69	74.00	-20.31	51.62	2.07	Peak	100	271
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m	dBuV/m	dB	dBuV			cm	deg																																																																																																														
1	5925.00	61.22	68.20	-6.98	59.83	1.39	Average	240	213																																																																																																														
2	5925.00	72.80	88.20	-15.40	71.41	1.39	Peak	240	213																																																																																																														
3 *	6105.00	93.26			91.71	1.55	Average	240	213																																																																																																														
4 *	6105.00	106.17			104.62	1.55	Peak	240	213																																																																																																														
5	12210.00	42.74	54.00	-11.26	35.44	7.30	Average	100	146																																																																																																														
6	12210.00	56.02	74.00	-17.98	48.72	7.30	Peak	100	146																																																																																																														
7	18315.00	40.49	54.00	-13.51	38.42	2.07	Average	100	271																																																																																																														
8	18315.00	53.69	74.00	-20.31	51.62	2.07	Peak	100	271																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																							




Modulation	be EHT320	Test Freq. (MHz)	6265																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6265.00</td><td>91.52</td><td></td><td></td><td>89.42</td><td>2.10</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2 *</td><td>6265.00</td><td>104.58</td><td></td><td></td><td>102.48</td><td>2.10</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>12530.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>35.59</td><td>6.66</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>4</td><td>12530.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>48.85</td><td>6.66</td><td>Peak</td><td>100</td><td>166</td></tr><tr><td>5</td><td>18795.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>38.51</td><td>2.21</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>6</td><td>18795.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>51.43</td><td>2.21</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>7</td><td>25060.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>34.27</td><td>8.91</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>8</td><td>25060.00</td><td>56.44</td><td>88.20</td><td>-31.76</td><td>47.53</td><td>8.91</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6265.00	91.52			89.42	2.10	Average	100	218	2 *	6265.00	104.58			102.48	2.10	Peak	100	218	3	12530.00	42.25	54.00	-11.75	35.59	6.66	Average	100	166	4	12530.00	55.51	74.00	-18.49	48.85	6.66	Peak	100	166	5	18795.00	40.72	54.00	-13.28	38.51	2.21	Average	100	213	6	18795.00	53.64	74.00	-20.36	51.43	2.21	Peak	100	213	7	25060.00	43.18	68.20	-25.02	34.27	8.91	Average	100	206	8	25060.00	56.44	88.20	-31.76	47.53	8.91	Peak	100	206
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6265.00	91.52			89.42	2.10	Average	100	218																																																																																																								
2 *	6265.00	104.58			102.48	2.10	Peak	100	218																																																																																																								
3	12530.00	42.25	54.00	-11.75	35.59	6.66	Average	100	166																																																																																																								
4	12530.00	55.51	74.00	-18.49	48.85	6.66	Peak	100	166																																																																																																								
5	18795.00	40.72	54.00	-13.28	38.51	2.21	Average	100	213																																																																																																								
6	18795.00	53.64	74.00	-20.36	51.43	2.21	Peak	100	213																																																																																																								
7	25060.00	43.18	68.20	-25.02	34.27	8.91	Average	100	206																																																																																																								
8	25060.00	56.44	88.20	-31.76	47.53	8.91	Peak	100	206																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	

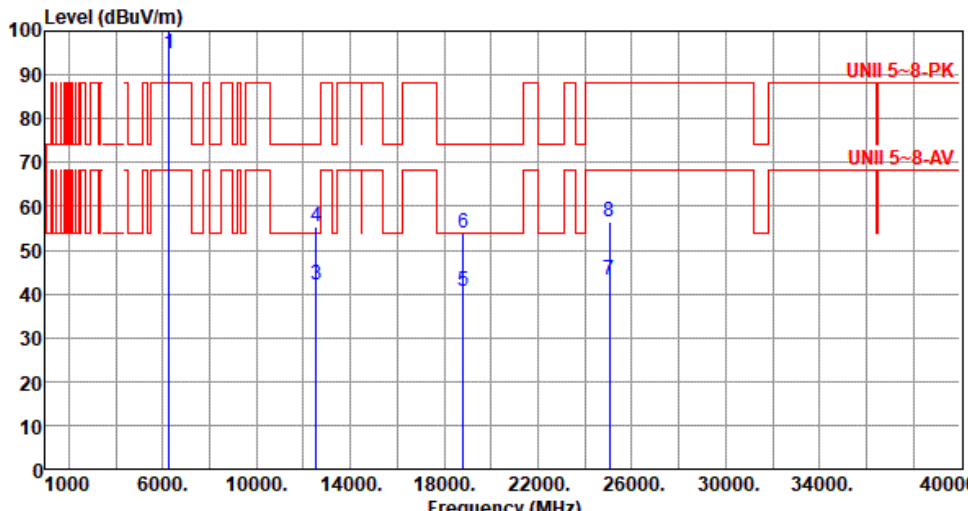

Modulation	be EHT320	Test Freq. (MHz)	6265																																																																																																			
Polarization	Vertical																																																																																																					
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																						
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6265.00</td><td>94.79</td><td></td><td></td><td>92.69</td><td>2.10</td><td>Average</td><td>240</td><td>212</td></tr><tr><td>2</td><td>*</td><td>6265.00</td><td>107.63</td><td></td><td></td><td>105.53</td><td>2.10</td><td>Peak</td><td>240</td><td>212</td></tr><tr><td>3</td><td></td><td>12530.00</td><td>42.18</td><td>54.00</td><td>-11.82</td><td>35.52</td><td>6.66</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td></td><td>12530.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>48.83</td><td>6.66</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td></td><td>18795.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>38.46</td><td>2.21</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>6</td><td></td><td>18795.00</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>51.72</td><td>2.21</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>7</td><td></td><td>25060.00</td><td>43.22</td><td>68.20</td><td>-24.98</td><td>34.31</td><td>8.91</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>8</td><td></td><td>25060.00</td><td>56.42</td><td>88.20</td><td>-31.78</td><td>47.51</td><td>8.91</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6265.00	94.79			92.69	2.10	Average	240	212	2	*	6265.00	107.63			105.53	2.10	Peak	240	212	3		12530.00	42.18	54.00	-11.82	35.52	6.66	Average	100	178	4		12530.00	55.49	74.00	-18.51	48.83	6.66	Peak	100	178	5		18795.00	40.67	54.00	-13.33	38.46	2.21	Average	100	215	6		18795.00	53.93	74.00	-20.07	51.72	2.21	Peak	100	215	7		25060.00	43.22	68.20	-24.98	34.31	8.91	Average	100	227	8		25060.00	56.42	88.20	-31.78	47.51	8.91	Peak	100	227
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6265.00	94.79			92.69	2.10	Average	240	212																																																																																												
2	*	6265.00	107.63			105.53	2.10	Peak	240	212																																																																																												
3		12530.00	42.18	54.00	-11.82	35.52	6.66	Average	100	178																																																																																												
4		12530.00	55.49	74.00	-18.51	48.83	6.66	Peak	100	178																																																																																												
5		18795.00	40.67	54.00	-13.33	38.46	2.21	Average	100	215																																																																																												
6		18795.00	53.93	74.00	-20.07	51.72	2.21	Peak	100	215																																																																																												
7		25060.00	43.22	68.20	-24.98	34.31	8.91	Average	100	227																																																																																												
8		25060.00	56.42	88.20	-31.78	47.51	8.91	Peak	100	227																																																																																												

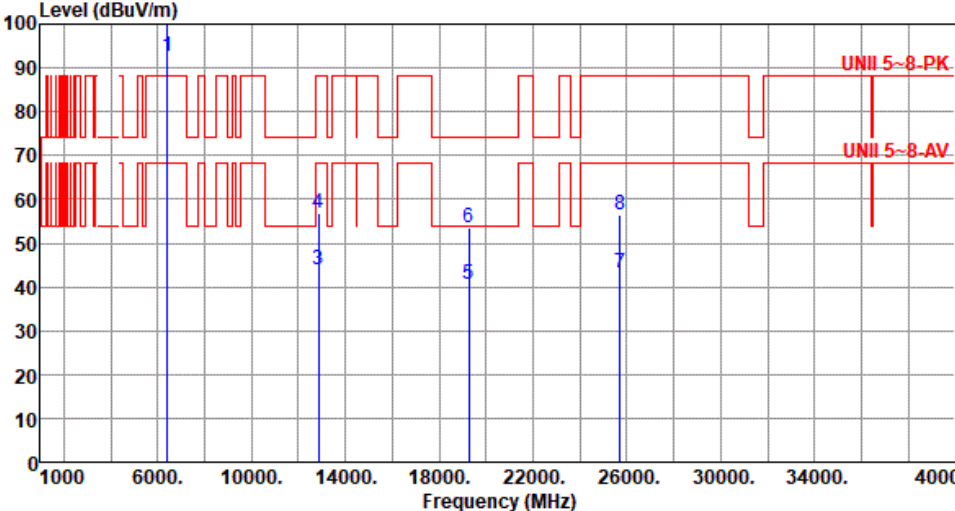

Modulation	be EHT320	Test Freq. (MHz)	6425																																																																																																			
Polarization	Horizontal																																																																																																					
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																						
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6425.00</td><td>92.57</td><td></td><td></td><td>89.63</td><td>2.94</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>2</td><td>*</td><td>6425.00</td><td>105.77</td><td></td><td></td><td>102.83</td><td>2.94</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>3</td><td></td><td>12850.00</td><td>43.74</td><td>68.20</td><td>-24.46</td><td>36.62</td><td>7.12</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>4</td><td></td><td>12850.00</td><td>56.79</td><td>88.20</td><td>-31.41</td><td>49.67</td><td>7.12</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>5</td><td></td><td>19275.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>38.51</td><td>2.18</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>6</td><td></td><td>19275.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>51.47</td><td>2.18</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>7</td><td></td><td>25700.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>34.50</td><td>8.76</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>8</td><td></td><td>25700.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>47.71</td><td>8.76</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6425.00	92.57			89.63	2.94	Average	100	234	2	*	6425.00	105.77			102.83	2.94	Peak	100	234	3		12850.00	43.74	68.20	-24.46	36.62	7.12	Average	100	182	4		12850.00	56.79	88.20	-31.41	49.67	7.12	Peak	100	182	5		19275.00	40.69	54.00	-13.31	38.51	2.18	Average	100	168	6		19275.00	53.65	74.00	-20.35	51.47	2.18	Peak	100	168	7		25700.00	43.26	68.20	-24.94	34.50	8.76	Average	100	222	8		25700.00	56.47	88.20	-31.73	47.71	8.76	Peak	100	222
		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																												
1	*	6425.00	92.57			89.63	2.94	Average	100	234																																																																																												
2	*	6425.00	105.77			102.83	2.94	Peak	100	234																																																																																												
3		12850.00	43.74	68.20	-24.46	36.62	7.12	Average	100	182																																																																																												
4		12850.00	56.79	88.20	-31.41	49.67	7.12	Peak	100	182																																																																																												
5		19275.00	40.69	54.00	-13.31	38.51	2.18	Average	100	168																																																																																												
6		19275.00	53.65	74.00	-20.35	51.47	2.18	Peak	100	168																																																																																												
7		25700.00	43.26	68.20	-24.94	34.50	8.76	Average	100	222																																																																																												
8		25700.00	56.47	88.20	-31.73	47.71	8.76	Peak	100	222																																																																																												



Modulation	be EHT320	Test Freq. (MHz)	6425																																																																																																																				
Polarization	Vertical																																																																																																																						
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																							
Level (dBuV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) 1 2 3 4 5 6 7 8 6425.00 12850.00 19275.00 25700.00 95.80 43.67 56.85 40.73 53.82 43.23 56.57 68.20 88.20 54.00 74.00 68.20 88.20 -24.53 -31.35 -13.27 -20.18 -24.97 -31.63 92.86 36.55 49.73 38.55 51.64 34.47 47.81 2.94 7.12 7.12 2.18 2.18 8.76 8.76 Average Peak Average Peak Average Peak Average Peak 239 100 100 100 100 100 100 212 178 178 258 258 206 206 UNII 5-8-PK UNII 5-8-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6425.00</td><td>95.80</td><td></td><td>92.86</td><td>2.94</td><td>Average</td><td>239</td><td>212</td></tr><tr><td>2</td><td>*</td><td>6425.00</td><td>108.86</td><td></td><td>105.92</td><td>2.94</td><td>Peak</td><td>239</td><td>212</td></tr><tr><td>3</td><td></td><td>12850.00</td><td>43.67</td><td>68.20</td><td>-24.53</td><td>36.55</td><td>7.12</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td></td><td>12850.00</td><td>56.85</td><td>88.20</td><td>-31.35</td><td>49.73</td><td>7.12</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td></td><td>19275.00</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>38.55</td><td>2.18</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td></td><td>19275.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>51.64</td><td>2.18</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>7</td><td></td><td>25700.00</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>34.47</td><td>8.76</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>8</td><td></td><td>25700.00</td><td>56.57</td><td>88.20</td><td>-31.63</td><td>47.81</td><td>8.76</td><td>Peak</td><td>100</td><td>206</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6425.00	95.80		92.86	2.94	Average	239	212	2	*	6425.00	108.86		105.92	2.94	Peak	239	212	3		12850.00	43.67	68.20	-24.53	36.55	7.12	Average	100	178	4		12850.00	56.85	88.20	-31.35	49.73	7.12	Peak	100	178	5		19275.00	40.73	54.00	-13.27	38.55	2.18	Average	100	258	6		19275.00	53.82	74.00	-20.18	51.64	2.18	Peak	100	258	7		25700.00	43.23	68.20	-24.97	34.47	8.76	Average	100	206	8		25700.00	56.57	88.20	-31.63	47.81	8.76	Peak	100	206
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	*	6425.00	95.80		92.86	2.94	Average	239	212																																																																																																														
2	*	6425.00	108.86		105.92	2.94	Peak	239	212																																																																																																														
3		12850.00	43.67	68.20	-24.53	36.55	7.12	Average	100	178																																																																																																													
4		12850.00	56.85	88.20	-31.35	49.73	7.12	Peak	100	178																																																																																																													
5		19275.00	40.73	54.00	-13.27	38.55	2.18	Average	100	258																																																																																																													
6		19275.00	53.82	74.00	-20.18	51.64	2.18	Peak	100	258																																																																																																													
7		25700.00	43.23	68.20	-24.97	34.47	8.76	Average	100	206																																																																																																													
8		25700.00	56.57	88.20	-31.63	47.81	8.76	Peak	100	206																																																																																																													



Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6585.00</td><td>90.25</td><td></td><td></td><td>86.72</td><td>3.53</td><td>Average</td><td>234</td><td>231</td></tr><tr><td>2 *</td><td>6585.00</td><td>103.27</td><td></td><td></td><td>99.74</td><td>3.53</td><td>Peak</td><td>234</td><td>231</td></tr><tr><td>3</td><td>13170.00</td><td>44.95</td><td>68.20</td><td>-23.25</td><td>37.84</td><td>7.11</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>13170.00</td><td>57.24</td><td>88.20</td><td>-30.96</td><td>50.13</td><td>7.11</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>19755.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>38.46</td><td>2.31</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>6</td><td>19755.00</td><td>54.03</td><td>74.00</td><td>-19.97</td><td>51.72</td><td>2.31</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>7</td><td>26340.00</td><td>43.60</td><td>68.20</td><td>-24.60</td><td>34.35</td><td>9.25</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>8</td><td>26340.00</td><td>56.92</td><td>88.20</td><td>-31.28</td><td>47.67</td><td>9.25</td><td>Peak</td><td>100</td><td>234</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6585.00	90.25			86.72	3.53	Average	234	231	2 *	6585.00	103.27			99.74	3.53	Peak	234	231	3	13170.00	44.95	68.20	-23.25	37.84	7.11	Average	100	178	4	13170.00	57.24	88.20	-30.96	50.13	7.11	Peak	100	178	5	19755.00	40.77	54.00	-13.23	38.46	2.31	Average	100	146	6	19755.00	54.03	74.00	-19.97	51.72	2.31	Peak	100	146	7	26340.00	43.60	68.20	-24.60	34.35	9.25	Average	100	234	8	26340.00	56.92	88.20	-31.28	47.67	9.25	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6585.00	90.25			86.72	3.53	Average	234	231																																																																																				
2 *	6585.00	103.27			99.74	3.53	Peak	234	231																																																																																				
3	13170.00	44.95	68.20	-23.25	37.84	7.11	Average	100	178																																																																																				
4	13170.00	57.24	88.20	-30.96	50.13	7.11	Peak	100	178																																																																																				
5	19755.00	40.77	54.00	-13.23	38.46	2.31	Average	100	146																																																																																				
6	19755.00	54.03	74.00	-19.97	51.72	2.31	Peak	100	146																																																																																				
7	26340.00	43.60	68.20	-24.60	34.35	9.25	Average	100	234																																																																																				
8	26340.00	56.92	88.20	-31.28	47.67	9.25	Peak	100	234																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Modulation	be EHT320	Test Freq. (MHz)	6745						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):66									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	*	6745.00	86.24		82.76	3.48	Average	229	231
2	*	6745.00	99.36		95.88	3.48	Peak	229	231
3		13490.00	44.71	68.20 -23.49	37.13	7.58	Average	100	177
4		13490.00	57.16	88.20 -31.04	49.58	7.58	Peak	100	177
5		20235.00	41.02	54.00 -12.98	38.23	2.79	Average	100	177
6		20235.00	54.22	74.00 -19.78	51.43	2.79	Peak	100	177
7		26980.00	43.76	68.20 -24.44	34.50	9.26	Average	100	120
8		26980.00	57.08	88.20 -31.12	47.82	9.26	Peak	100	120

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.



Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6745.00</td><td>92.03</td><td></td><td></td><td>88.55</td><td>3.48</td><td>Average</td><td>234</td><td>293</td></tr><tr><td>2 *</td><td>6745.00</td><td>104.93</td><td></td><td></td><td>101.45</td><td>3.48</td><td>Peak</td><td>234</td><td>293</td></tr><tr><td>3</td><td>13490.00</td><td>45.16</td><td>68.20</td><td>-23.04</td><td>37.58</td><td>7.58</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>4</td><td>13490.00</td><td>57.20</td><td>88.20</td><td>-31.00</td><td>49.62</td><td>7.58</td><td>Peak</td><td>100</td><td>257</td></tr><tr><td>5</td><td>20235.00</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>38.42</td><td>2.79</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>6</td><td>20235.00</td><td>52.10</td><td>74.00</td><td>-21.90</td><td>49.31</td><td>2.79</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>7</td><td>26980.00</td><td>43.41</td><td>68.20</td><td>-24.79</td><td>34.15</td><td>9.26</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>8</td><td>26980.00</td><td>56.68</td><td>88.20</td><td>-31.52</td><td>47.42</td><td>9.26</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	6745.00	92.03			88.55	3.48	Average	234	293	2 *	6745.00	104.93			101.45	3.48	Peak	234	293	3	13490.00	45.16	68.20	-23.04	37.58	7.58	Average	100	257	4	13490.00	57.20	88.20	-31.00	49.62	7.58	Peak	100	257	5	20235.00	41.21	54.00	-12.79	38.42	2.79	Average	100	255	6	20235.00	52.10	74.00	-21.90	49.31	2.79	Peak	100	255	7	26980.00	43.41	68.20	-24.79	34.15	9.26	Average	100	103	8	26980.00	56.68	88.20	-31.52	47.42	9.26	Peak	100	103
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1 *	6745.00	92.03			88.55	3.48	Average	234	293																																																																																																								
2 *	6745.00	104.93			101.45	3.48	Peak	234	293																																																																																																								
3	13490.00	45.16	68.20	-23.04	37.58	7.58	Average	100	257																																																																																																								
4	13490.00	57.20	88.20	-31.00	49.62	7.58	Peak	100	257																																																																																																								
5	20235.00	41.21	54.00	-12.79	38.42	2.79	Average	100	255																																																																																																								
6	20235.00	52.10	74.00	-21.90	49.31	2.79	Peak	100	255																																																																																																								
7	26980.00	43.41	68.20	-24.79	34.15	9.26	Average	100	103																																																																																																								
8	26980.00	56.68	88.20	-31.52	47.42	9.26	Peak	100	103																																																																																																								



Modulation	be EHT320	Test Freq. (MHz)	6905
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			




Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																																																																															
Polarization	Vertical																																																																																																																																																	
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																																																		
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6905.00</td><td>92.99</td><td></td><td></td><td>89.03</td><td>3.96</td><td>Average</td><td>235</td><td>290</td></tr><tr><td>2</td><td>*</td><td>6905.00</td><td>104.70</td><td></td><td></td><td>100.74</td><td>3.96</td><td>Peak</td><td>235</td><td>290</td></tr><tr><td>3</td><td></td><td>7125.00</td><td>53.32</td><td>68.20</td><td>-14.88</td><td>48.52</td><td>4.80</td><td>Average</td><td>235</td><td>290</td></tr><tr><td>4</td><td></td><td>7125.00</td><td>63.48</td><td>88.20</td><td>-24.72</td><td>58.68</td><td>4.80</td><td>Peak</td><td>235</td><td>290</td></tr><tr><td>5</td><td></td><td>7250.00</td><td>48.19</td><td>54.00</td><td>-5.81</td><td>42.98</td><td>5.21</td><td>Average</td><td>235</td><td>290</td></tr><tr><td>6</td><td></td><td>7250.00</td><td>61.05</td><td>74.00</td><td>-12.95</td><td>55.84</td><td>5.21</td><td>Peak</td><td>235</td><td>290</td></tr><tr><td>7</td><td></td><td>13810.00</td><td>46.25</td><td>68.20</td><td>-21.95</td><td>38.51</td><td>7.74</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>8</td><td></td><td>13810.00</td><td>59.11</td><td>88.20</td><td>-29.09</td><td>51.37</td><td>7.74</td><td>Peak</td><td>100</td><td>257</td></tr><tr><td>9</td><td></td><td>20715.00</td><td>37.84</td><td>54.00</td><td>-16.16</td><td>34.42</td><td>3.42</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>10</td><td></td><td>20715.00</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>47.52</td><td>3.42</td><td>Peak</td><td>100</td><td>182</td></tr></table>						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6905.00	92.99			89.03	3.96	Average	235	290	2	*	6905.00	104.70			100.74	3.96	Peak	235	290	3		7125.00	53.32	68.20	-14.88	48.52	4.80	Average	235	290	4		7125.00	63.48	88.20	-24.72	58.68	4.80	Peak	235	290	5		7250.00	48.19	54.00	-5.81	42.98	5.21	Average	235	290	6		7250.00	61.05	74.00	-12.95	55.84	5.21	Peak	235	290	7		13810.00	46.25	68.20	-21.95	38.51	7.74	Average	100	257	8		13810.00	59.11	88.20	-29.09	51.37	7.74	Peak	100	257	9		20715.00	37.84	54.00	-16.16	34.42	3.42	Average	100	182	10		20715.00	50.94	74.00	-23.06	47.52	3.42	Peak	100	182
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																																								
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																																								
			dBuV/m			dBuV			cm	deg																																																																																																																																								
1	*	6905.00	92.99			89.03	3.96	Average	235	290																																																																																																																																								
2	*	6905.00	104.70			100.74	3.96	Peak	235	290																																																																																																																																								
3		7125.00	53.32	68.20	-14.88	48.52	4.80	Average	235	290																																																																																																																																								
4		7125.00	63.48	88.20	-24.72	58.68	4.80	Peak	235	290																																																																																																																																								
5		7250.00	48.19	54.00	-5.81	42.98	5.21	Average	235	290																																																																																																																																								
6		7250.00	61.05	74.00	-12.95	55.84	5.21	Peak	235	290																																																																																																																																								
7		13810.00	46.25	68.20	-21.95	38.51	7.74	Average	100	257																																																																																																																																								
8		13810.00	59.11	88.20	-29.09	51.37	7.74	Peak	100	257																																																																																																																																								
9		20715.00	37.84	54.00	-16.16	34.42	3.42	Average	100	182																																																																																																																																								
10		20715.00	50.94	74.00	-23.06	47.52	3.42	Peak	100	182																																																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																																																		




Adapter mode

Unwanted Emissions (Below 1GHz)

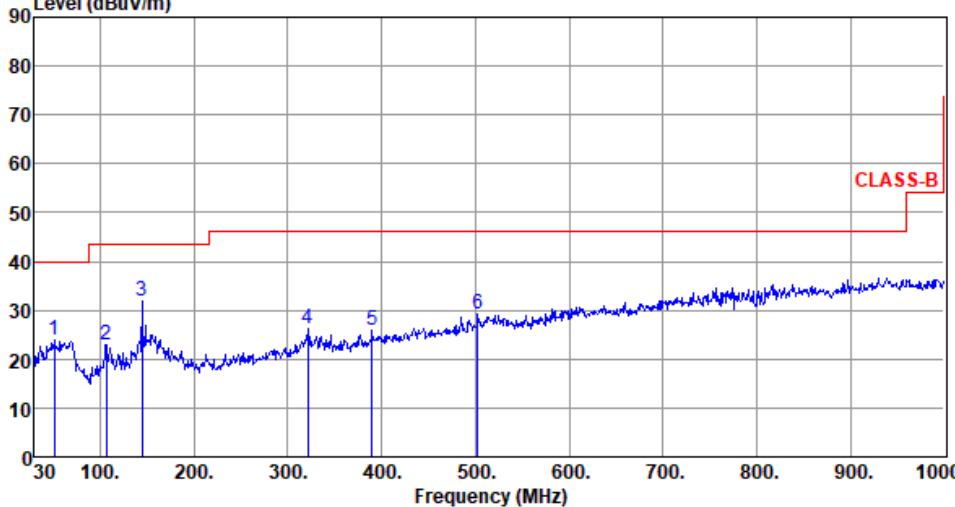Modulation	be EHT160		Test Freq. (MHz)		6345																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
Level (dBUV/m)  CLASS-B <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>51.34</td><td>23.93</td><td>40.00</td><td>-16.07</td><td>31.83</td><td>-7.90</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>106.63</td><td>22.98</td><td>43.50</td><td>-20.52</td><td>34.77</td><td>-11.79</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>144.46</td><td>31.84</td><td>43.50</td><td>-11.66</td><td>40.49</td><td>-8.65</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>321.00</td><td>26.07</td><td>46.00</td><td>-19.93</td><td>33.19</td><td>-7.12</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>389.87</td><td>26.03</td><td>46.00</td><td>-19.97</td><td>31.21</td><td>-5.18</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>502.39</td><td>29.36</td><td>46.00</td><td>-16.64</td><td>31.71</td><td>-2.35</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	51.34	23.93	40.00	-16.07	31.83	-7.90	Peak	---	---	2	106.63	22.98	43.50	-20.52	34.77	-11.79	Peak	---	---	3	144.46	31.84	43.50	-11.66	40.49	-8.65	Peak	---	---	4	321.00	26.07	46.00	-19.93	33.19	-7.12	Peak	---	---	5	389.87	26.03	46.00	-19.97	31.21	-5.18	Peak	---	---	6	502.39	29.36	46.00	-16.64	31.71	-2.35	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	51.34	23.93	40.00	-16.07	31.83	-7.90	Peak	---	---																																																																						
2	106.63	22.98	43.50	-20.52	34.77	-11.79	Peak	---	---																																																																						
3	144.46	31.84	43.50	-11.66	40.49	-8.65	Peak	---	---																																																																						
4	321.00	26.07	46.00	-19.93	33.19	-7.12	Peak	---	---																																																																						
5	389.87	26.03	46.00	-19.97	31.21	-5.18	Peak	---	---																																																																						
6	502.39	29.36	46.00	-16.64	31.71	-2.35	Peak	---	---																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															

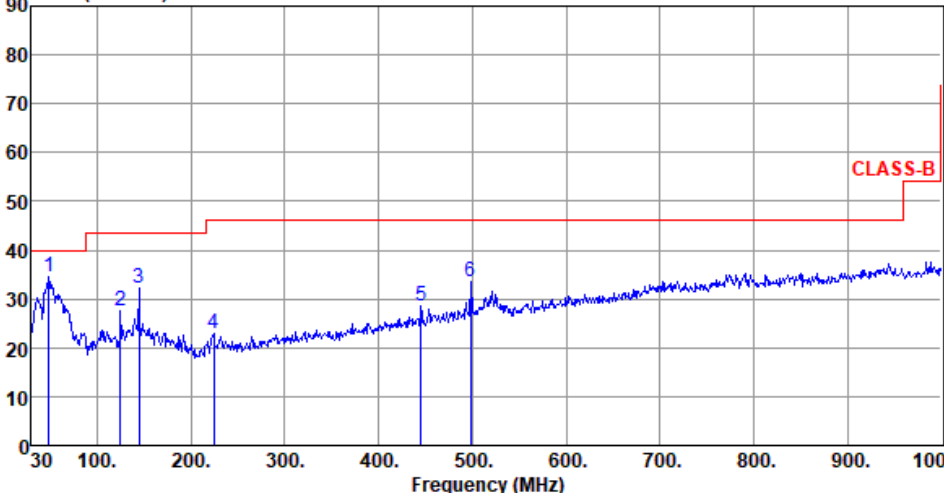

Modulation	be EHT160	Test Freq. (MHz)	6345						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg
1	48.43	34.65	40.00	-5.35	42.57	-7.92	Peak	---	---
2	125.06	27.50	43.50	-16.00	38.02	-10.52	Peak	---	---
3	144.46	32.33	43.50	-11.17	40.98	-8.65	Peak	---	---
4	224.00	23.02	46.00	-22.98	35.15	-12.13	Peak	---	---
5	445.16	28.59	46.00	-17.41	32.22	-3.63	Peak	---	---
6	498.51	33.51	46.00	-12.49	35.96	-2.45	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	5.94359G	-14.15	5.8919G	-57.71	-54.15	-3.56	1
802.11be EHT40_Nss2,(MCS0)_2TX	Pass	5.9618G	-3.27	6.0554G	-53.29	-43.27	-10.02	1
802.11be EHT80_Nss2,(MCS0)_2TX	Pass	6.02216G	0.55	6.1286G	-46.6	-39.45	-7.15	2
802.11be EHT160_Nss2,(MCS0)_2TX	Pass	6.10828G	2.55	6.4434G	-37.61	-37.45	-0.16	2
802.11be EHT320_Nss2,(MCS0)_2TX	Pass	6.1386G	3.81	6.6218G	-37.7	-36.19	-1.51	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	6.42671G	-5.7	6.446G	-32.21	-25.7	-6.51	2
802.11be EHT40_Nss2,(MCS0)_2TX	Pass	6.46098G	-2.49	6.5126G	-53.53	-42.49	-11.04	1
802.11be EHT80_Nss2,(MCS0)_2TX	Pass	6.47259G	1.19	6.6294G	-48.2	-38.81	-9.39	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	6.86249G	-7.08	6.866G	-33.56	-27.08	-6.48	2
802.11be EHT40_Nss2,(MCS0)_2TX	Pass	6.74298G	-4.79	6.7966G	-53.06	-44.79	-8.27	1
802.11be EHT80_Nss2,(MCS0)_2TX	Pass	6.77621G	-0.46	6.9358G	-47.17	-40.46	-6.71	2
802.11be EHT160_Nss2,(MCS0)_2TX	Pass	6.74828G	2.39	6.5658G	-40.28	-37.61	-2.67	2
802.11be EHT320_Nss2,(MCS0)_2TX	Pass	6.6314G	3.55	6.0586G	-37.38	-36.45	-0.93	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	Pass	7.12219G	-16.1	7.0656G	-59.79	-56.1	-3.69	1
802.11be EHT40_Nss2,(MCS0)_2TX	Pass	6.94238G	-3.35	6.9918G	-52.54	-43.35	-9.19	1
802.11be EHT80_Nss2,(MCS0)_2TX	Pass	6.99903G	0.52	6.8918G	-48.13	-39.48	-8.65	2
802.11be EHT160_Nss2,(MCS0)_2TX	Pass	6.9882G	2.8	6.7258G	-38.54	-37.2	-1.34	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5935MHz	Pass	5.94359G	-14.15	5.8919G	-57.71	-54.15	-3.56	1
5935MHz	Pass	5.94259G	-13.72	5.8947G	-57.74	-53.72	-4.02	2
5955MHz	Pass	5.96339G	-6.99	5.966G	-34.38	-26.99	-7.39	1
5955MHz	Pass	5.96259G	-6.7	5.966G	-33.55	-26.7	-6.85	2
6175MHz	Pass	6.16661G	-7.12	6.186G	-34.64	-27.12	-7.52	1
6175MHz	Pass	6.16591G	-6.47	6.186G	-33.89	-26.47	-7.42	2
6415MHz	Pass	6.42249G	-6.97	6.426G	-33.74	-26.97	-6.77	1
6415MHz	Pass	6.42389G	-6.2	6.426G	-33.19	-26.2	-6.99	2
6435MHz	Pass	6.42641G	-6.2	6.446G	-34.06	-26.2	-7.86	1
6435MHz	Pass	6.42671G	-5.7	6.446G	-32.21	-25.7	-6.51	2
6475MHz	Pass	6.48349G	-6.75	6.486G	-33.5	-26.75	-6.75	1
6475MHz	Pass	6.46601G	-6.25	6.486G	-33.26	-26.25	-7.01	2
6515MHz	Pass	6.52249G	-6.89	6.526G	-33.41	-26.89	-6.52	1
6515MHz	Pass	6.52339G	-6.12	6.526G	-32.96	-26.12	-6.84	2
6535MHz	Pass	6.52571G	-7.17	6.5461G	-34.79	-27.26	-7.53	1
6535MHz	Pass	6.52721G	-6.66	6.546G	-33.5	-26.66	-6.84	2
6715MHz	Pass	6.70741G	-8.37	6.7261G	-35.72	-28.46	-7.26	1
6715MHz	Pass	6.70631G	-7.18	6.726G	-34.17	-27.18	-6.99	2
6855MHz	Pass	6.86359G	-7.73	6.866G	-34.73	-27.73	-7	1
6855MHz	Pass	6.86249G	-7.08	6.866G	-33.56	-27.08	-6.48	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.86611G	-7.44	6.8861G	-35.13	-27.53	-7.6	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.88369G	-6.89	6.886G	-33.9	-26.89	-7.01	2
6895MHz	Pass	6.88951G	-7.02	6.906G	-33.79	-27.02	-6.77	1
6895MHz	Pass	6.90359G	-6.5	6.906G	-32.51	-26.5	-6.01	2
7015MHz	Pass	7.02419G	-8.41	7.026G	-35.78	-28.41	-7.37	1
7015MHz	Pass	7.02429G	-7.65	7.026G	-34.4	-27.65	-6.75	2
7095MHz	Pass	7.08571G	-9.18	7.106G	-36.48	-29.18	-7.3	1
7095MHz	Pass	7.10299G	-8.12	7.106G	-35.05	-28.12	-6.93	2
7115MHz	Pass	7.12219G	-16.1	7.0656G	-59.79	-56.1	-3.69	1
7115MHz	Pass	7.12329G	-15.81	7.066G	-59.56	-55.81	-3.75	2
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.9618G	-3.27	6.0554G	-53.29	-43.27	-10.02	1
5965MHz	Pass	5.97139G	-2.9	6.061G	-53.22	-42.9	-10.32	2
6165MHz	Pass	6.14742G	-2.93	6.0812G	-53.6	-42.93	-10.67	1
6165MHz	Pass	6.14682G	-2.21	6.0676G	-53.52	-42.21	-11.31	2
6405MHz	Pass	6.4024G	-3.37	6.478G	-53.83	-43.37	-10.46	1
6405MHz	Pass	6.4098G	-2.57	6.474G	-53.68	-42.57	-11.11	2
6445MHz	Pass	6.46098G	-2.49	6.5126G	-53.53	-42.49	-11.04	1
6445MHz	Pass	6.46138G	-2	6.5182G	-53.29	-42	-11.29	2
6485MHz	Pass	6.50318G	-2.48	6.5532G	-53.64	-42.48	-11.16	1
6485MHz	Pass	6.50258G	-1.97	6.4056G	-53.53	-41.97	-11.56	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6525MHz Straddle 6.525-6.875GHz	Pass	6.54318G	-3.05	6.622G	-53.1	-43.05	-10.05	1
6525MHz Straddle 6.525-6.875GHz	Pass	6.50722G	-2.55	6.6222G	-53.27	-42.55	-10.72	2
6565MHz	Pass	6.58238G	-3.42	6.6514G	-53.18	-43.42	-9.76	1
6565MHz	Pass	6.54802G	-2.89	6.6384G	-53.15	-42.89	-10.26	2
6725MHz	Pass	6.74298G	-4.79	6.7966G	-53.06	-44.79	-8.27	1
6725MHz	Pass	6.70662G	-3.53	6.8024G	-52.78	-43.53	-9.25	2
6845MHz	Pass	6.86358G	-3.5	6.9448G	-52.61	-43.5	-9.11	1
6845MHz	Pass	6.86298G	-2.8	6.9356G	-52.35	-42.8	-9.55	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.86802G	-3.8	6.9566G	-52.55	-43.8	-8.75	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.90158G	-3.4	6.9584G	-52.37	-43.4	-8.97	2
6925MHz	Pass	6.94238G	-3.35	6.9918G	-52.54	-43.35	-9.19	1
6925MHz	Pass	6.94018G	-2.86	6.9944G	-52.3	-42.86	-9.44	2
7005MHz	Pass	6.99021G	-3	6.9388G	-52.21	-43	-9.21	1
7005MHz	Pass	6.98682G	-2.31	6.9348G	-52.07	-42.31	-9.76	2
7085MHz	Pass	7.06902G	-4.81	7.0176G	-55.01	-44.81	-10.2	1
7085MHz	Pass	7.06662G	-3.79	7.0186G	-54.93	-43.79	-11.14	2
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.01817G	0.18	6.121G	-47.78	-39.82	-7.96	1
5985MHz	Pass	6.02216G	0.55	6.1286G	-46.6	-39.45	-7.15	2
6145MHz	Pass	6.11063G	0.23	6.0998G	-29.3	-19.82	-9.48	1
6145MHz	Pass	6.11823G	1.23	6.281G	-46.89	-38.77	-8.12	2
6385MHz	Pass	6.42296G	0.69	6.5334G	-48.12	-39.31	-8.81	1
6385MHz	Pass	6.42256G	1.07	6.5238G	-47.01	-38.93	-8.08	2
6465MHz	Pass	6.47339G	0.38	6.5102G	-29.41	-19.22	-10.19	1
6465MHz	Pass	6.47259G	1.19	6.6294G	-48.2	-38.81	-9.39	2
6545MHz Straddle 6.525-6.875GHz	Pass	6.55019G	-0.34	6.7202G	-47.49	-40.34	-7.15	1
6545MHz Straddle 6.525-6.875GHz	Pass	6.5422G	0.2	6.7198G	-47.57	-39.8	-7.77	2
6625MHz	Pass	6.63019G	-0.53	6.7858G	-48.41	-40.53	-7.88	1
6625MHz	Pass	6.6294G	-0.03	6.7738G	-47.48	-40.03	-7.45	2
6705MHz	Pass	6.69901G	-0.37	6.7498G	-29.72	-19.87	-9.85	1
6705MHz	Pass	6.66904G	0.45	6.8962G	-48.48	-39.55	-8.93	2
6785MHz	Pass	6.7878G	-1.34	6.947G	-48.41	-41.34	-7.07	1
6785MHz	Pass	6.77621G	-0.46	6.9358G	-47.17	-40.46	-6.71	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.87219G	-1.22	6.7198G	-48.22	-41.22	-7	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.8698G	-0.32	6.9994G	-47.43	-40.32	-7.11	2
6945MHz	Pass	6.95299G	0.15	6.795G	-48.98	-39.85	-9.13	1
6945MHz	Pass	6.95139G	0.81	6.8034G	-48.07	-39.19	-8.88	2
7025MHz	Pass	6.99303G	-0.08	6.8906G	-48.82	-40.08	-8.74	1
7025MHz	Pass	6.99903G	0.52	6.8918G	-48.13	-39.48	-8.65	2
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.09693G	2.51	6.289G	-42.29	-37.49	-4.8	1
6025MHz	Pass	6.03459G	3.1	6.2858G	-37.99	-36.9	-1.09	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6185MHz	Pass	6.11067G	1.55	6.4458G	-43.74	-38.45	-5.29	1
6185MHz	Pass	6.10828G	2.55	6.4434G	-37.61	-37.45	-0.16	2
6345MHz	Pass	6.35299G	2.42	6.0746G	-43.33	-37.58	-5.75	1
6345MHz	Pass	6.26908G	3.24	6.0834G	-38.07	-36.76	-1.31	2
6505MHz Straddle 6.525-6.875GHz	Pass	6.5002G	1.97	6.777G	-46.05	-38.03	-8.02	1
6505MHz Straddle 6.525-6.875GHz	Pass	6.52018G	2.93	6.2242G	-44.47	-37.07	-7.4	2
6665MHz	Pass	6.65941G	3.16	6.9258G	-41.58	-36.84	-4.74	1
6665MHz	Pass	6.67539G	3.07	6.4066G	-41.7	-36.93	-4.77	2
6825MHz Straddle 6.525-6.875GHz	Pass	6.75307G	1.47	6.5642G	-45.37	-38.53	-6.84	1
6825MHz Straddle 6.525-6.875GHz	Pass	6.74828G	2.39	6.5658G	-40.28	-37.61	-2.67	2
6985MHz	Pass	6.99459G	1.83	6.725G	-44.61	-38.17	-6.44	1
6985MHz	Pass	6.9882G	2.8	6.7258G	-38.54	-37.2	-1.34	2
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.1386G	3.81	6.6218G	-37.7	-36.19	-1.51	1
6105MHz	Pass	6.113G	3.89	6.617G	-38.39	-36.11	-2.28	2
6265MHz	Pass	6.1275G	3.46	6.785G	-38.2	-36.54	-1.66	1
6265MHz	Pass	6.1179G	3.61	6.7818G	-39.28	-36.39	-2.89	2
6425MHz Straddle 6.525-6.875GHz	Pass	6.4314G	3.8	6.9466G	-38.77	-36.2	-2.57	1
6425MHz Straddle 6.525-6.875GHz	Pass	6.2716G	3.95	6.945G	-39.12	-36.05	-3.07	2
6585MHz Straddle 6.525-6.875GHz	Pass	6.6314G	3.55	6.0586G	-37.38	-36.45	-0.93	1
6585MHz Straddle 6.525-6.875GHz	Pass	6.577G	3.61	6.0458G	-37.93	-36.39	-1.54	2
6745MHz Straddle 6.525-6.875GHz	Pass	6.7658G	3.09	6.2138G	-38.34	-36.91	-1.43	1
6745MHz Straddle 6.525-6.875GHz	Pass	6.6155G	3.09	6.2074G	-38.63	-36.91	-1.72	2
6905MHz Straddle 6.525-6.875GHz	Pass	6.7563G	2.32	6.3898G	-39.39	-37.68	-1.71	1
6905MHz Straddle 6.525-6.875GHz	Pass	6.7707G	2.72	6.3818G	-38.26	-37.28	-0.98	2



5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


5935MHz_TX



5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


5955MHz_TX

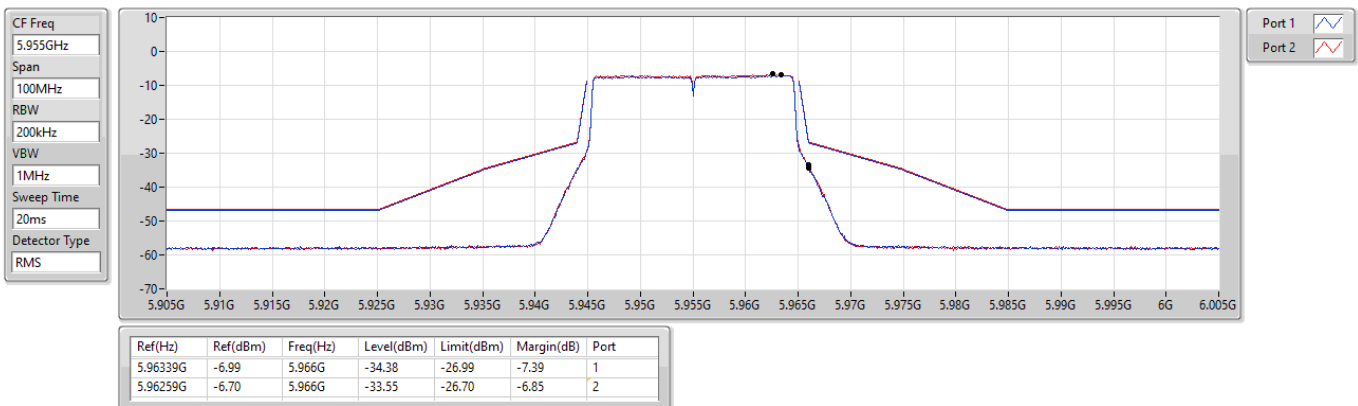

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6175MHz_TX

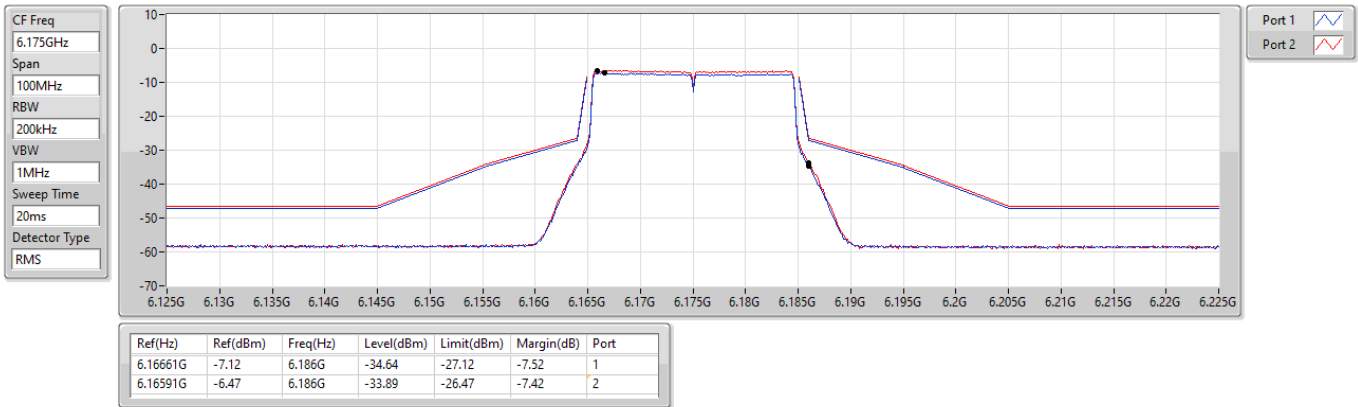

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6415MHz_TX

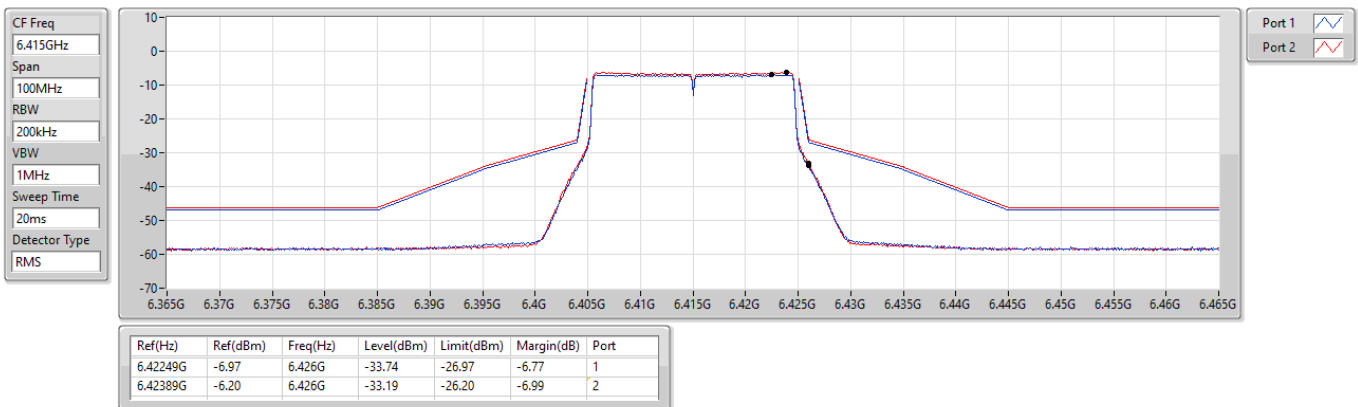

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6435MHz_TX

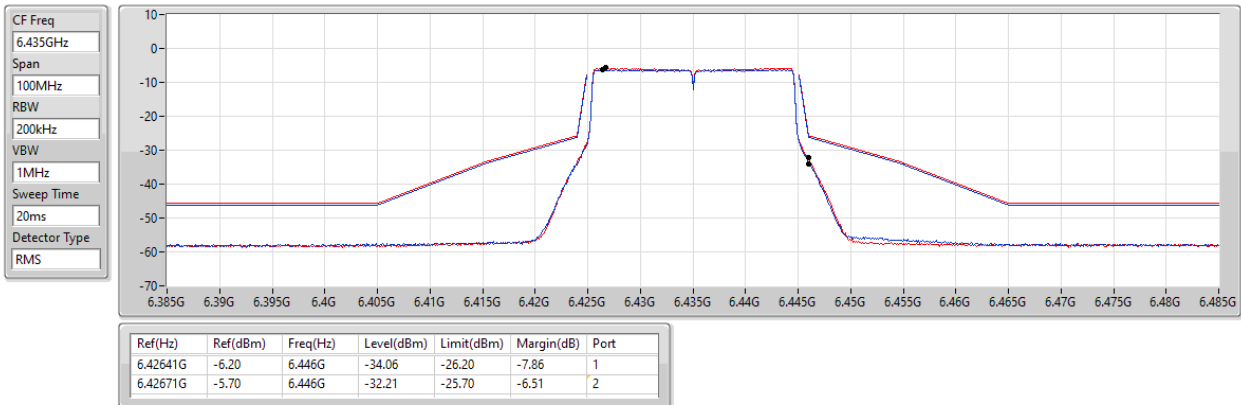

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6475MHz_TX

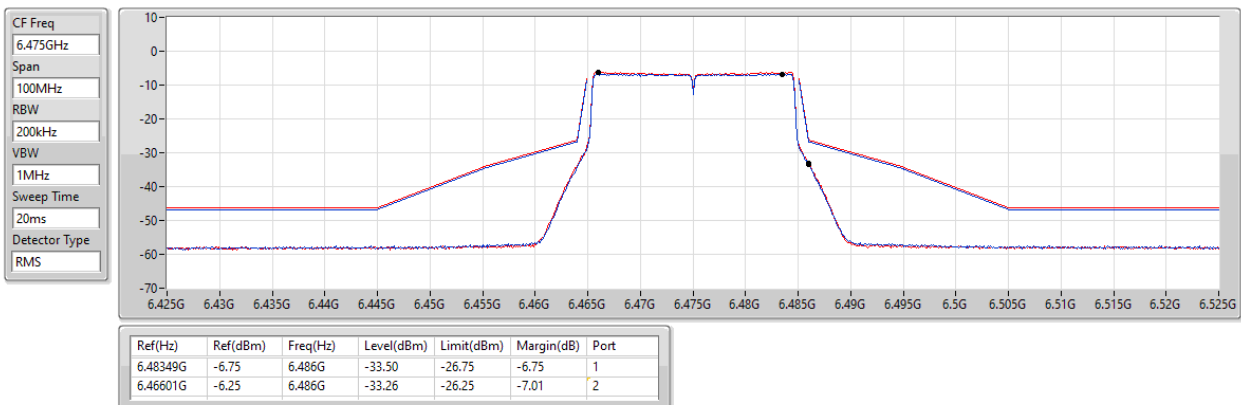

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6515MHz_TX

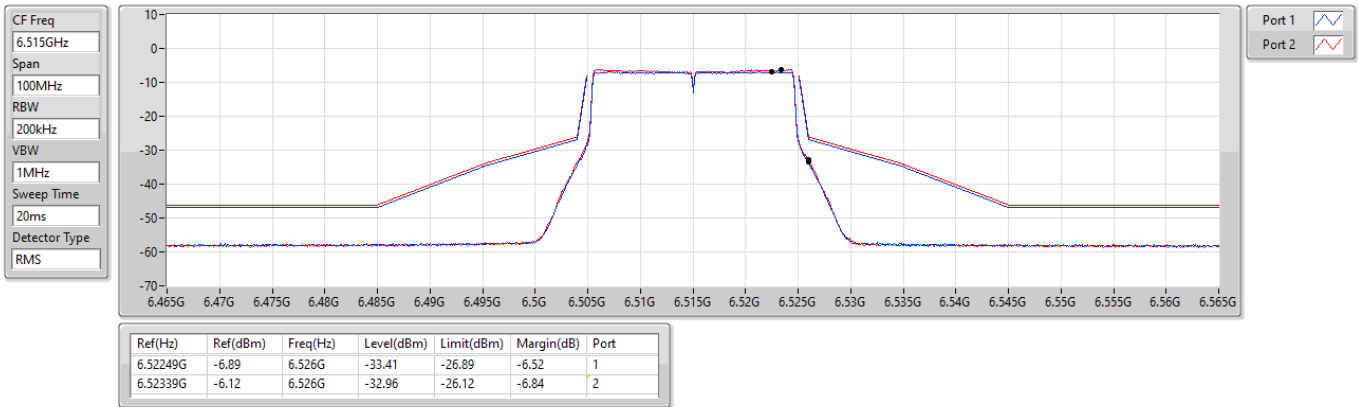

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6535MHz_TX

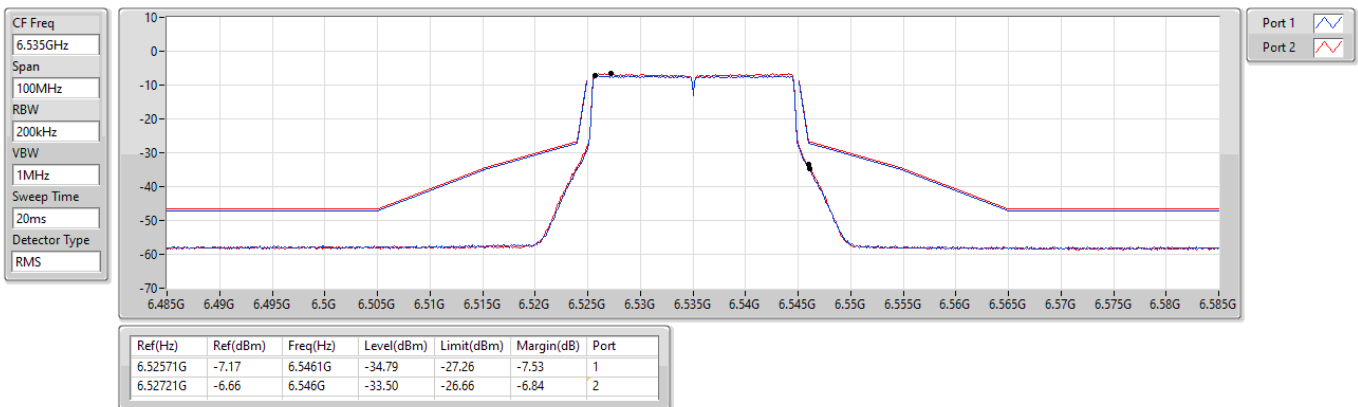

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6715MHz_TX

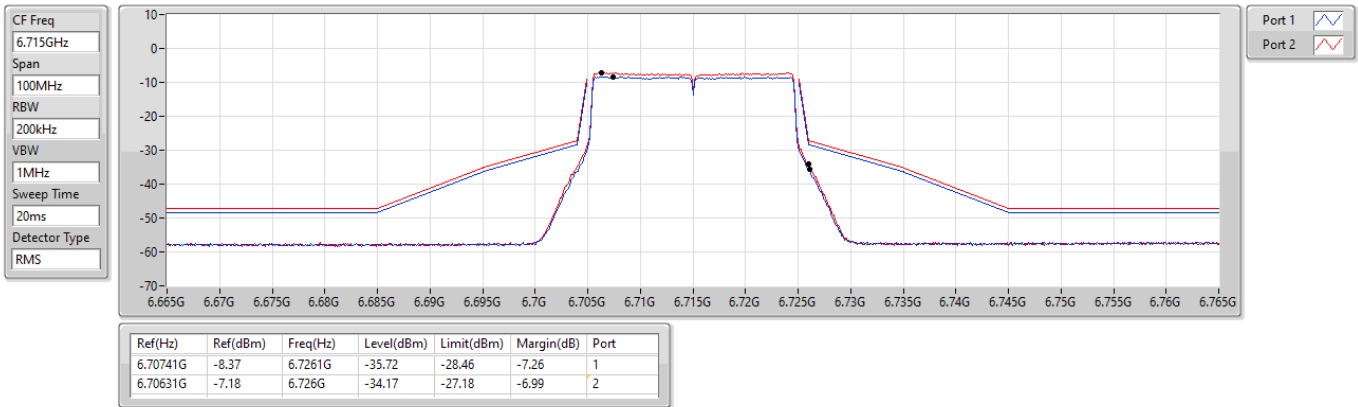

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6855MHz_TX

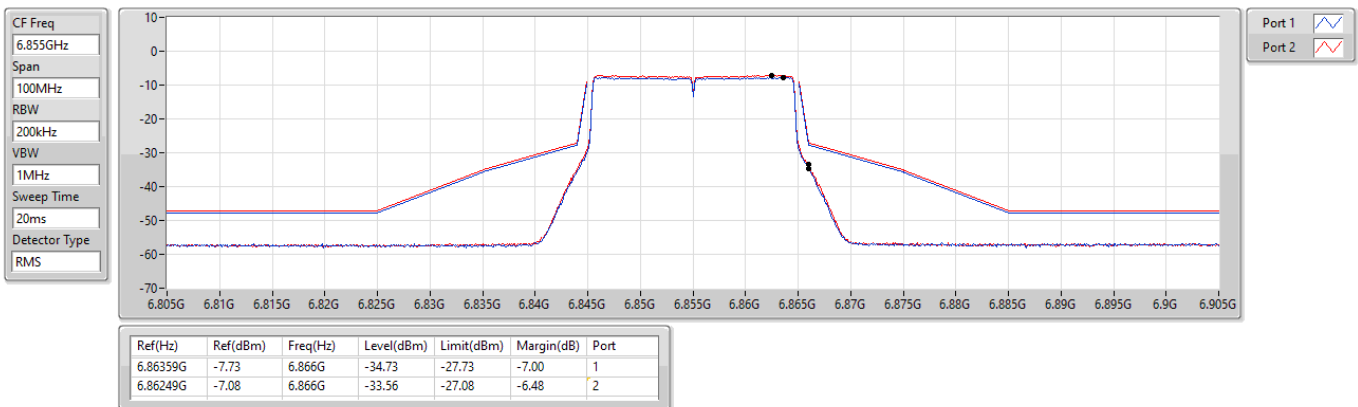

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6875MHz Straddle 6.525-6.875GHz_TX

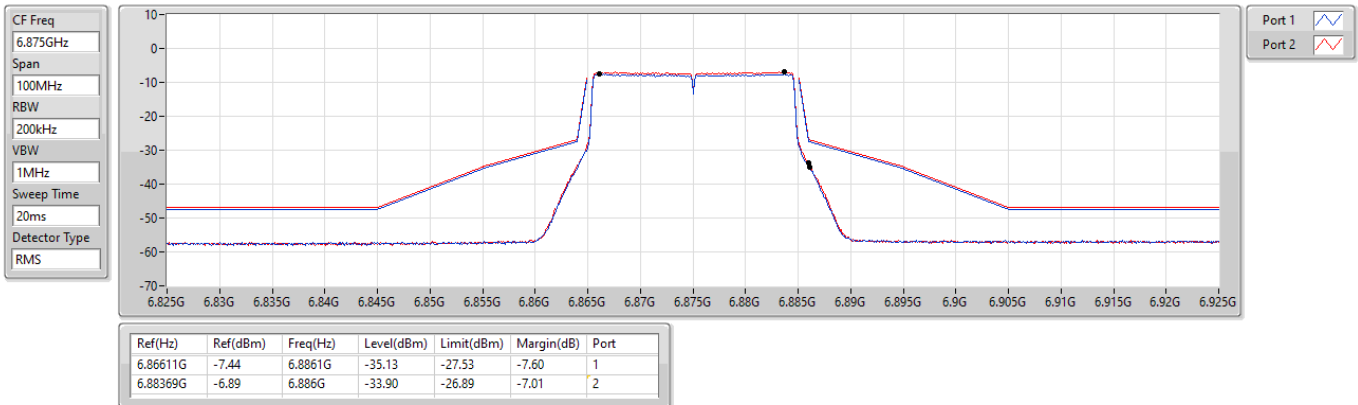

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


6895MHz_TX

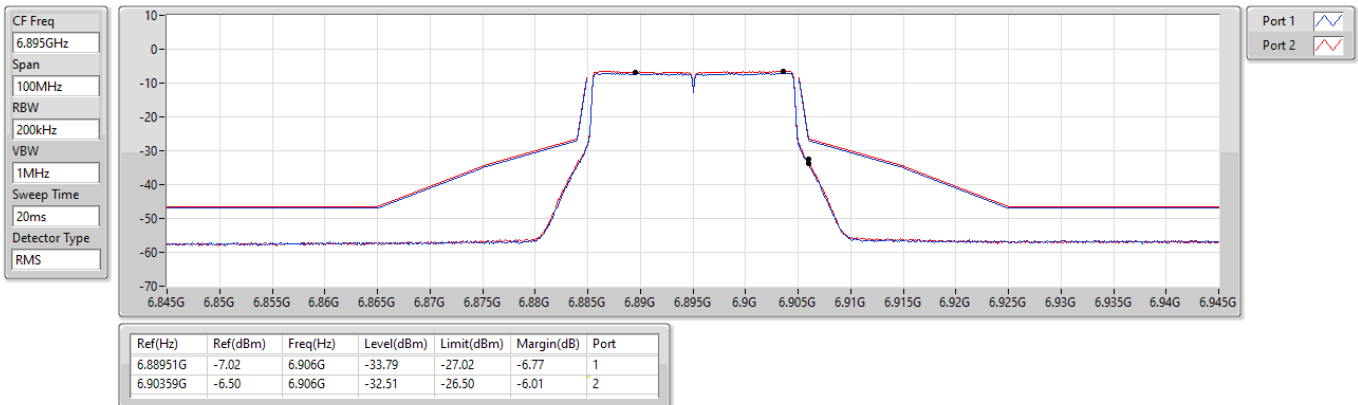

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


7015MHz_TX

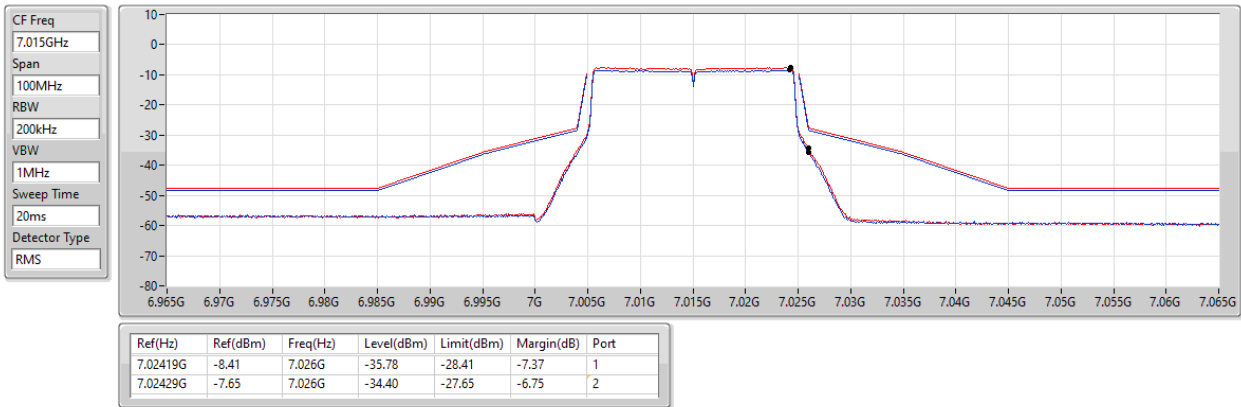

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


7095MHz_TX

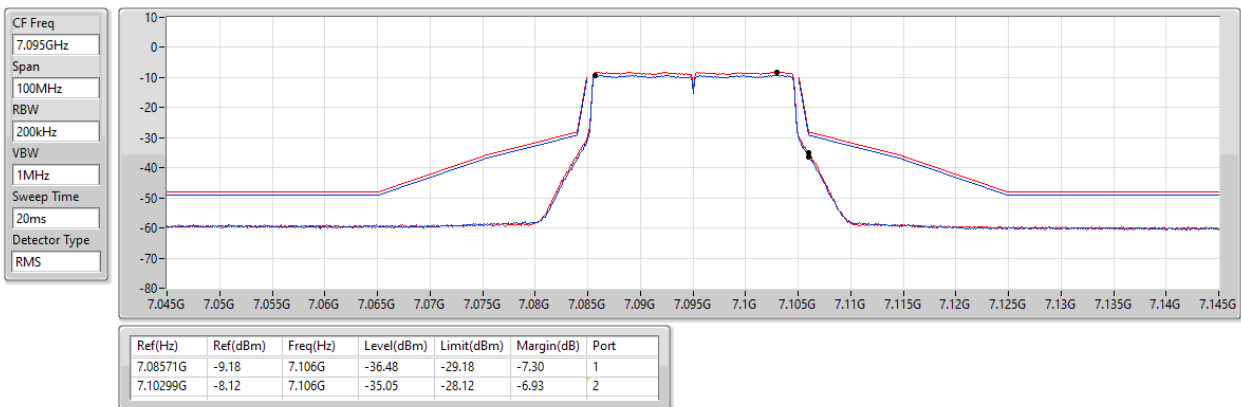

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

MASK


7115MHz_TX

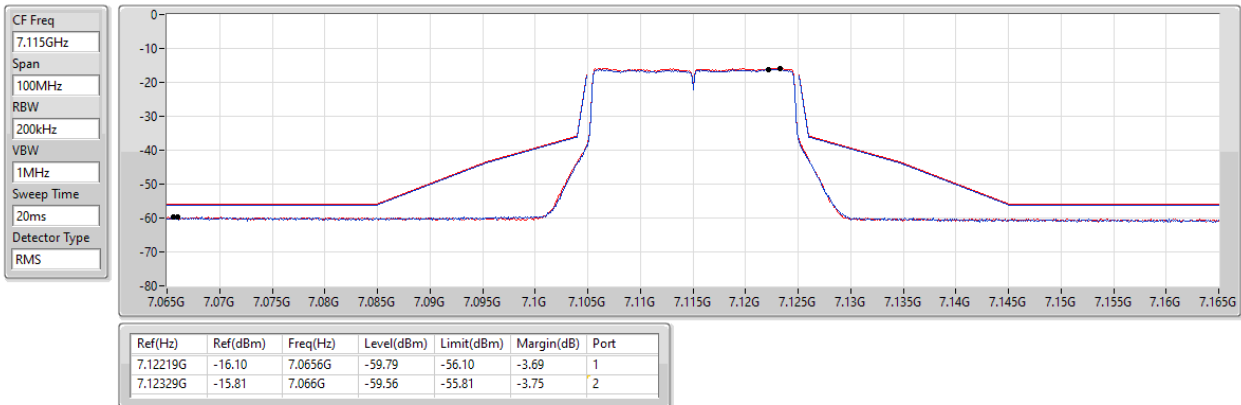

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


5965MHz_TX

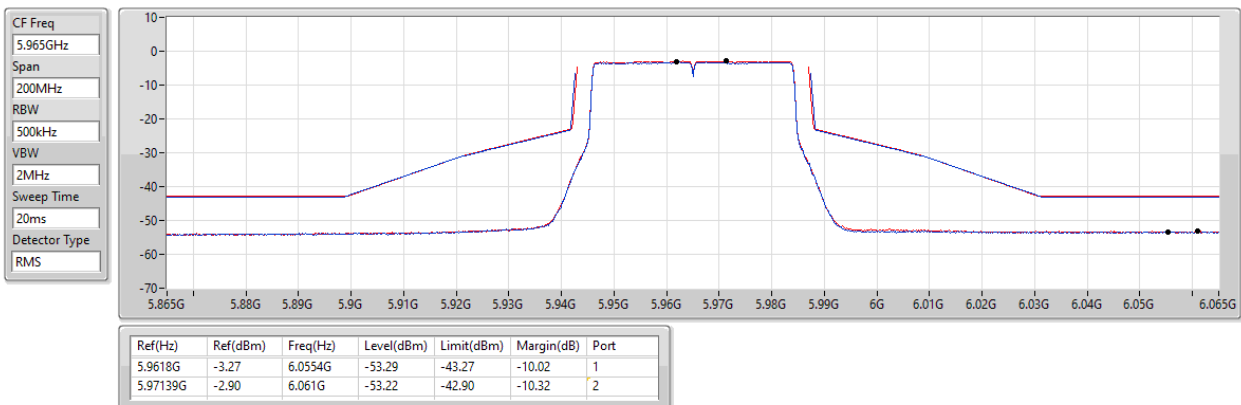

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6165MHz_TX

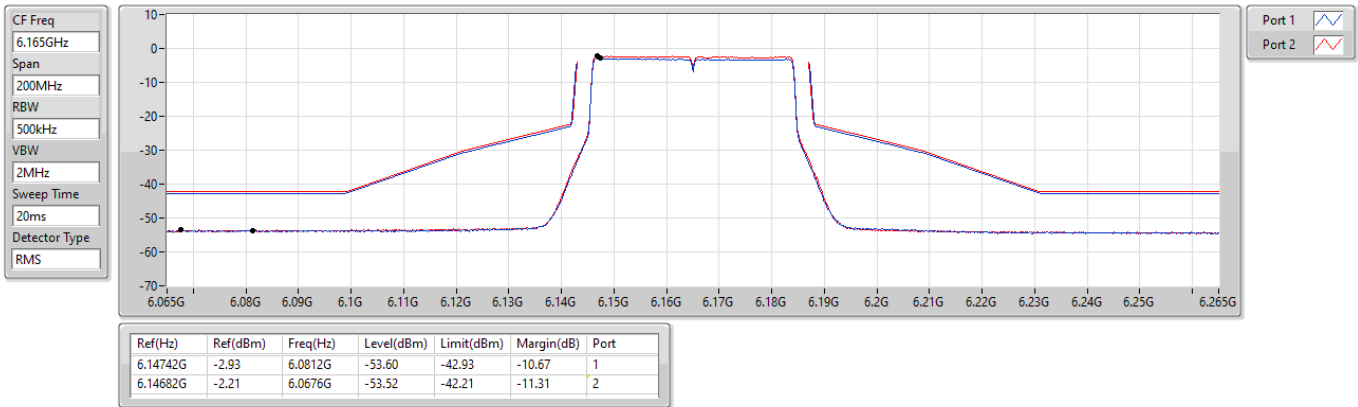

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6405MHz_TX

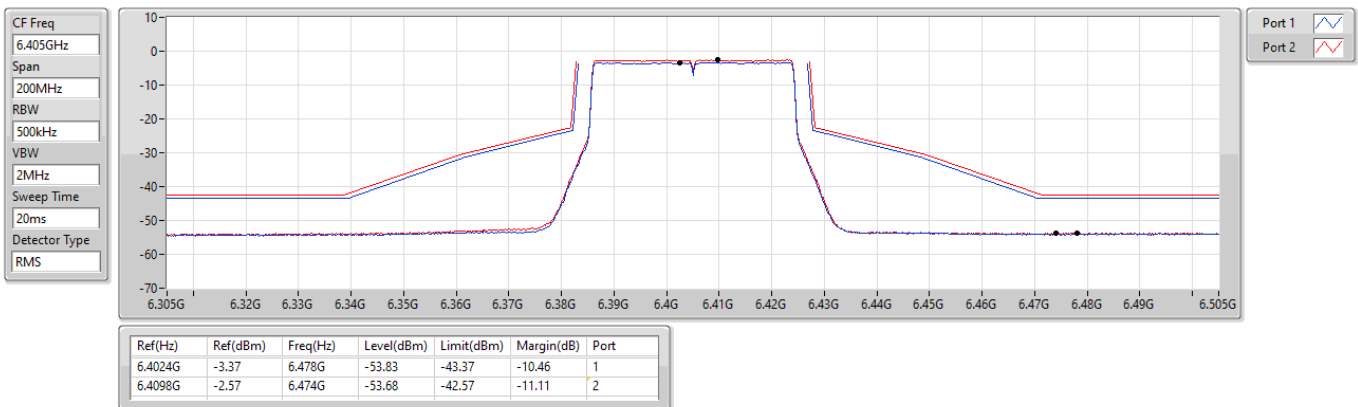

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6445MHz_TX

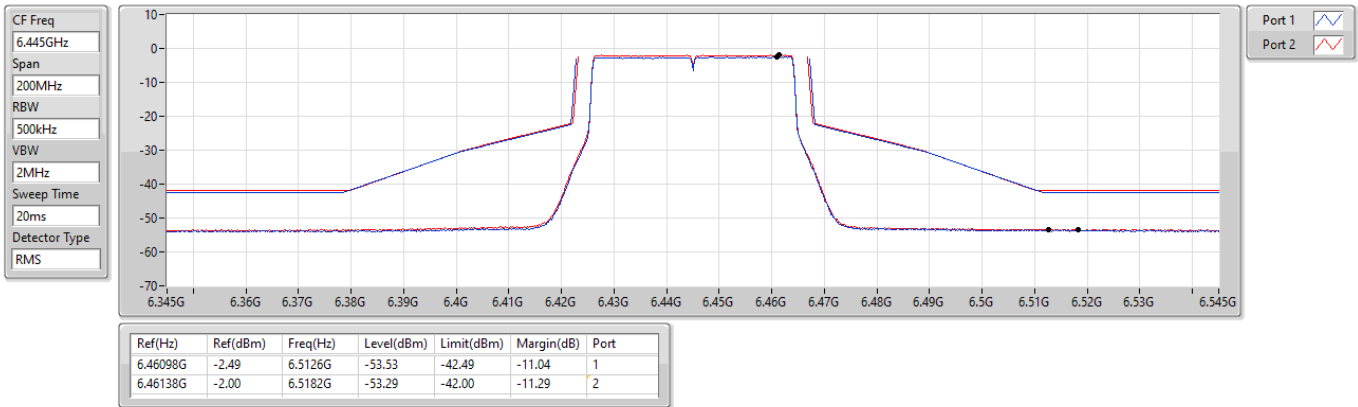

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6485MHz_TX

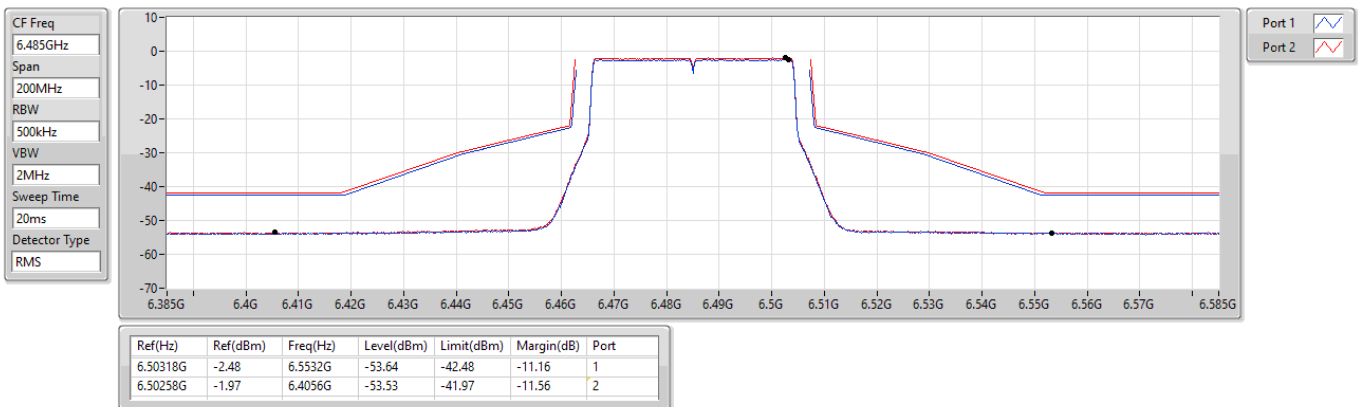

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6525MHz Straddle 6.525-6.875GHz_TX

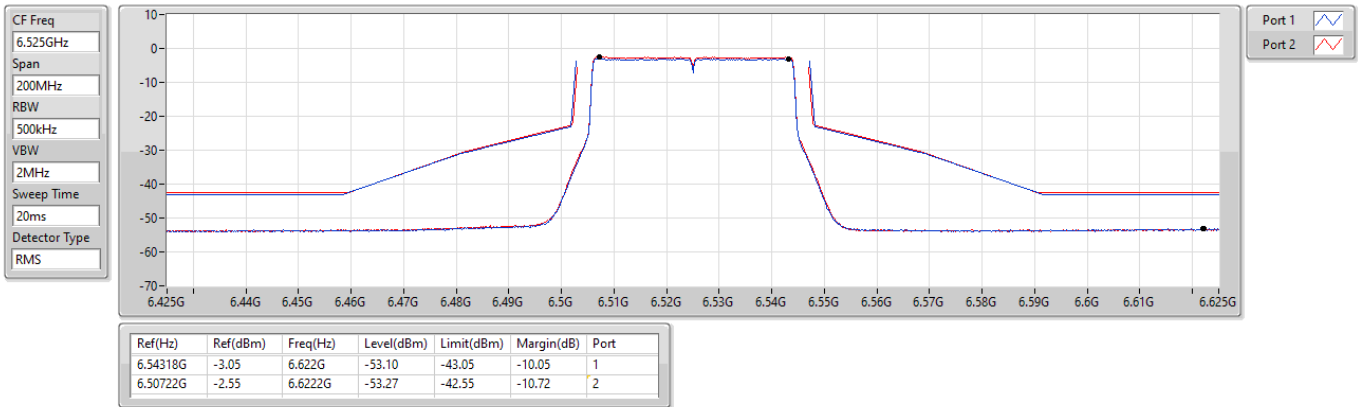

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6565MHz_TX

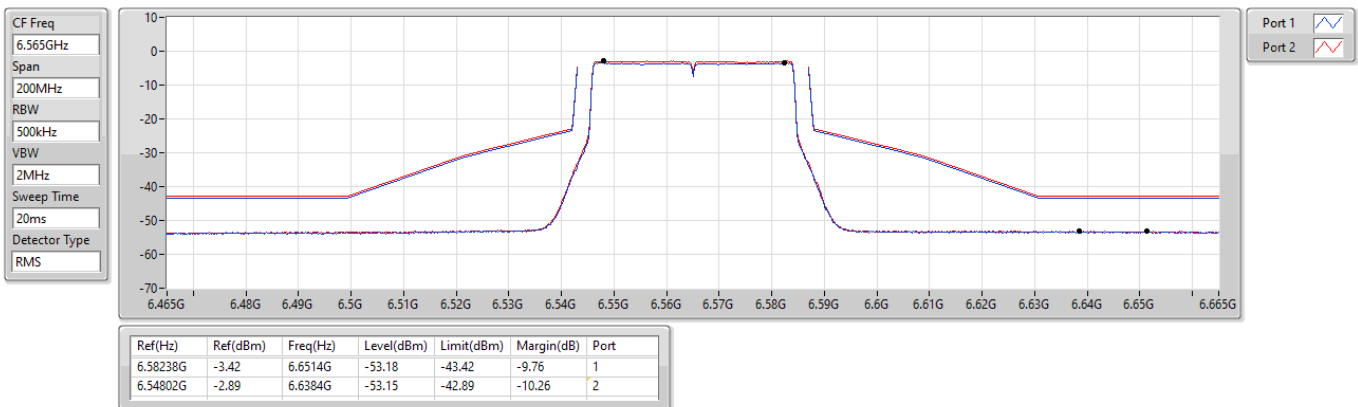

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6725MHz_TX

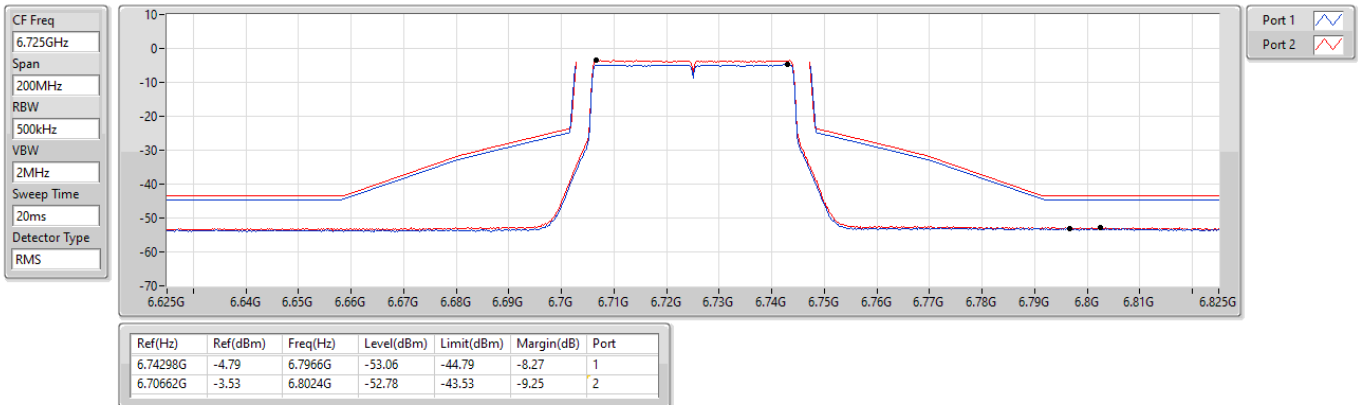

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6845MHz_TX

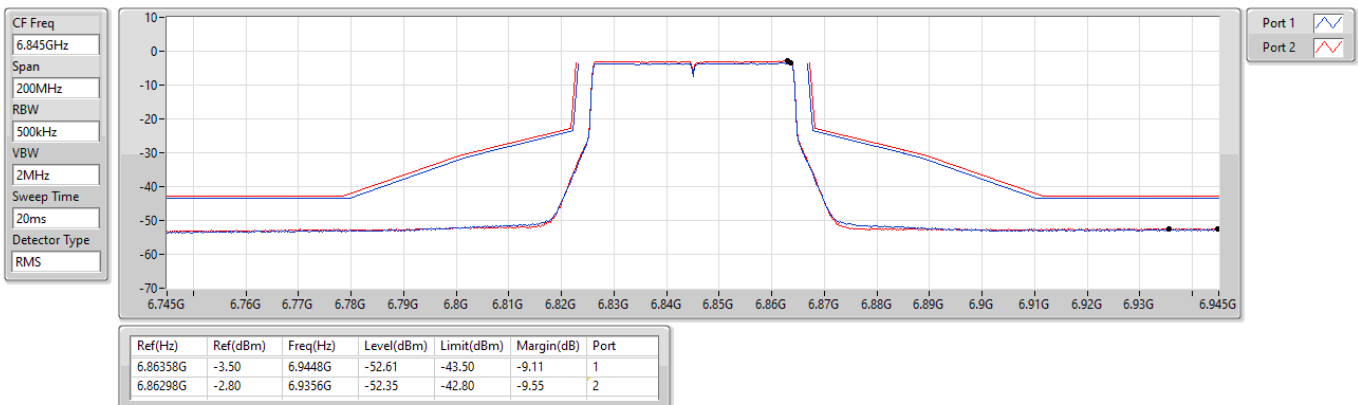

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6885MHz Straddle 6.525-6.875GHz_TX

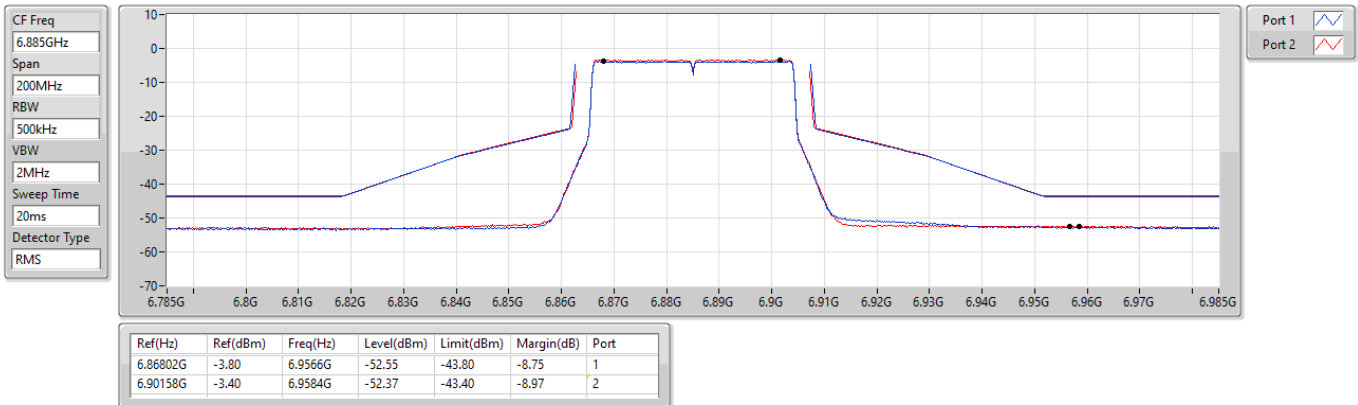

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


6925MHz_TX

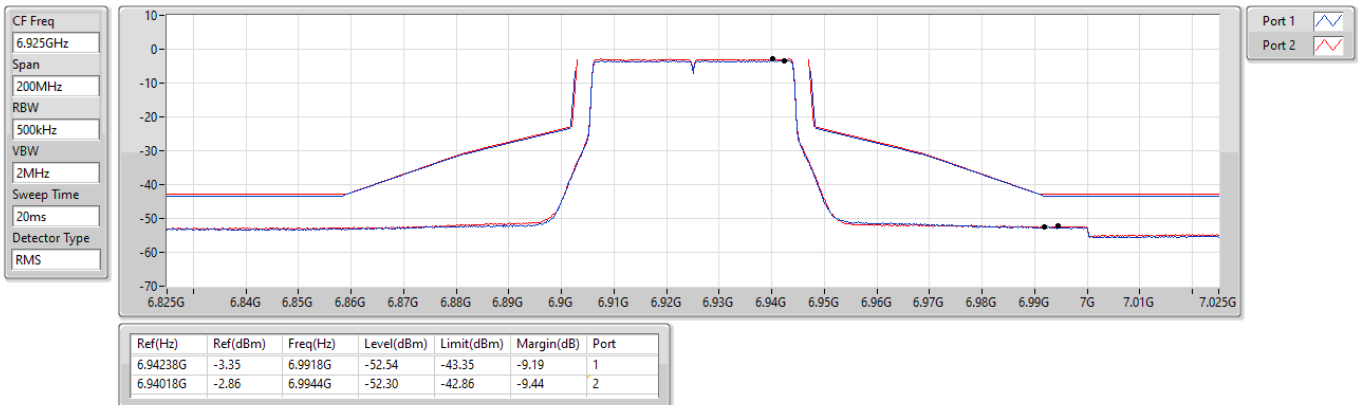

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


7005MHz_TX

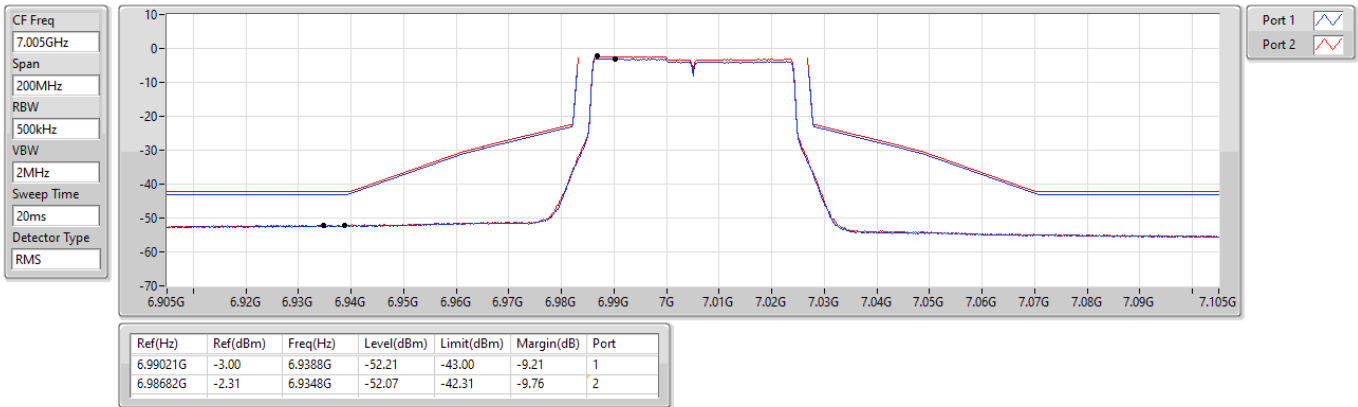

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

MASK


7085MHz_TX

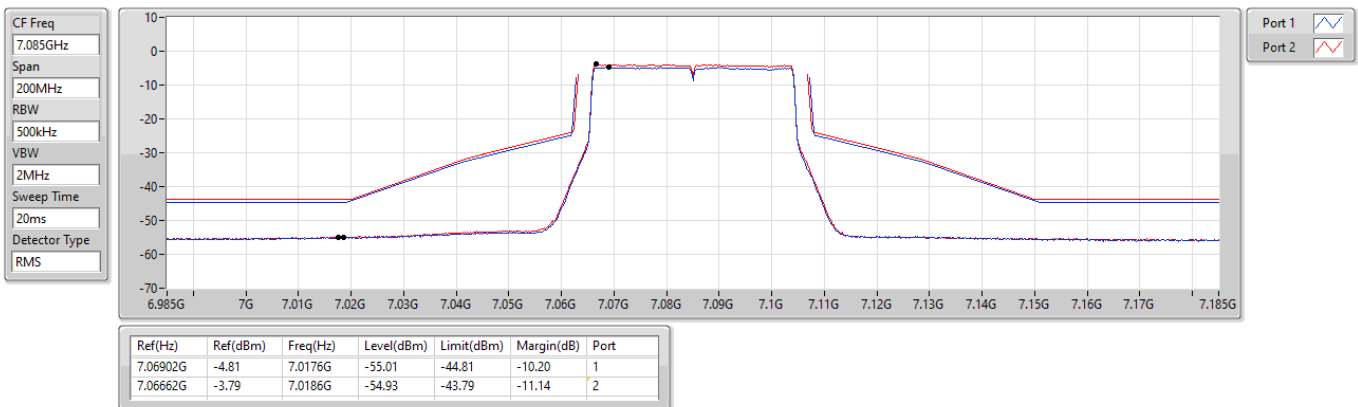

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


5985MHz_TX

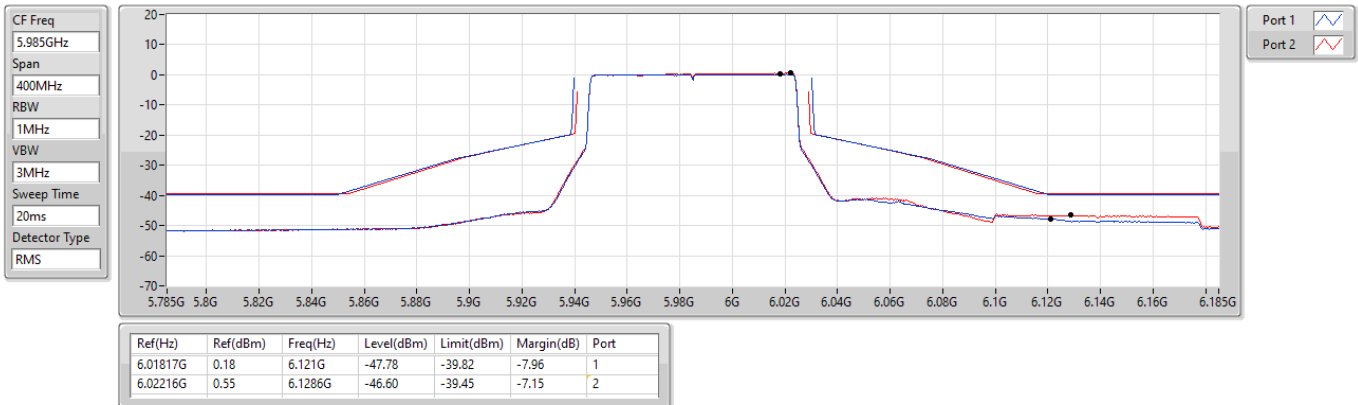

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6145MHz_TX

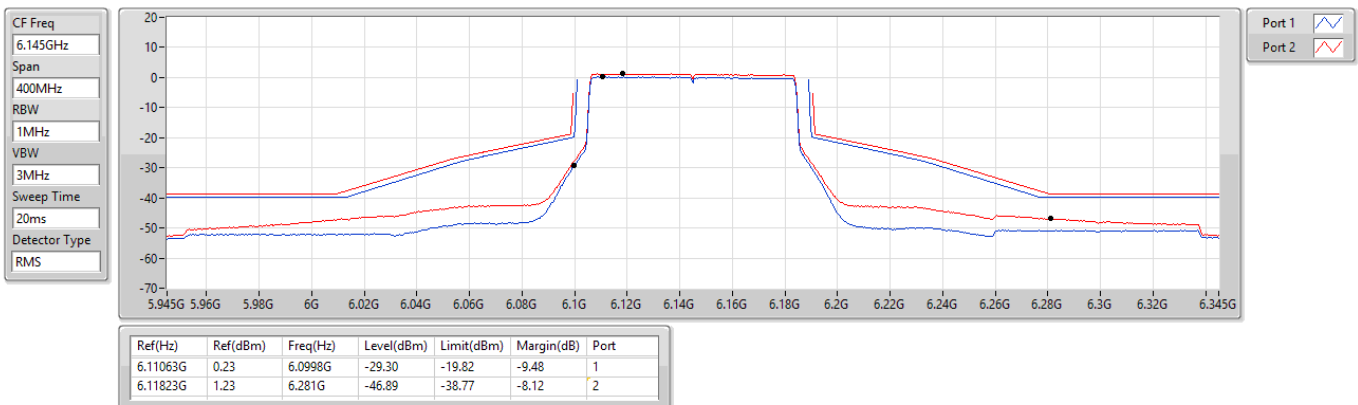

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6385MHz_TX

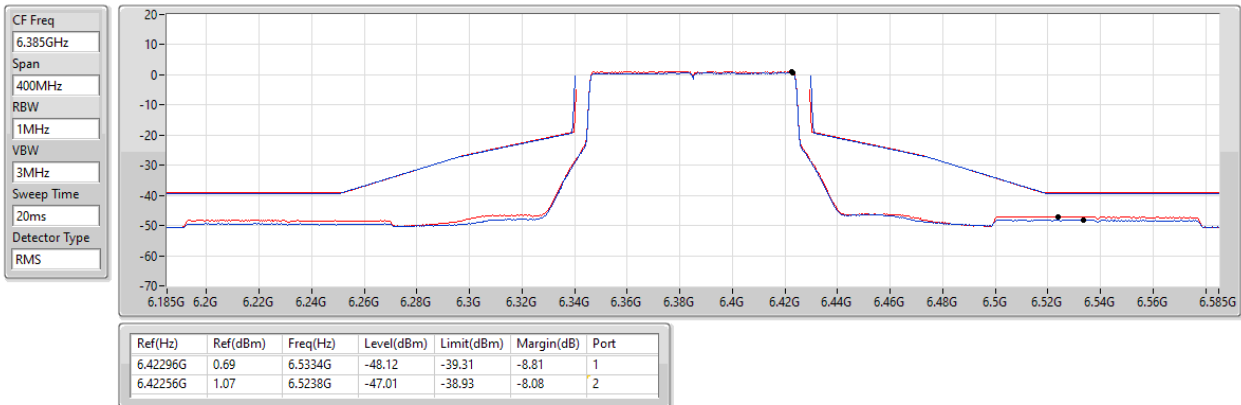

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6465MHz_TX

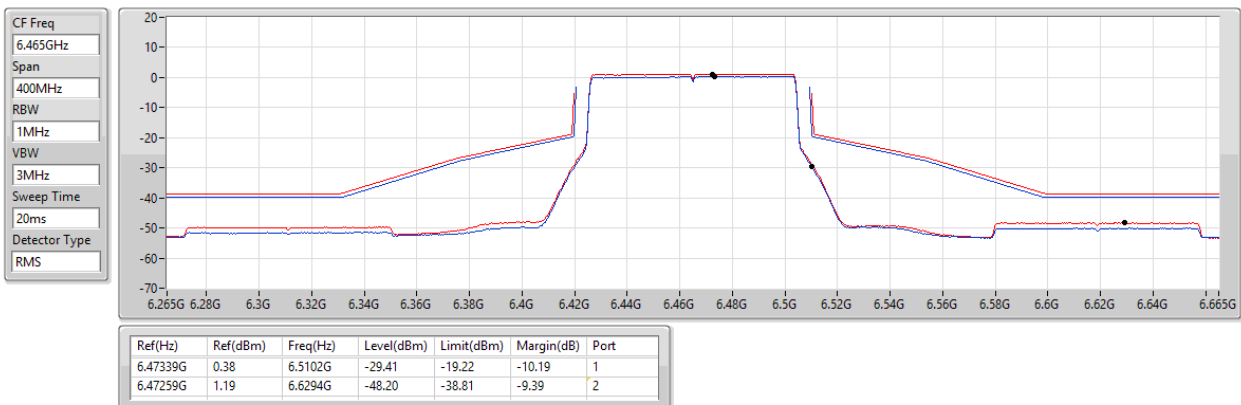

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6545MHz Straddle 6.525-6.875GHz_TX

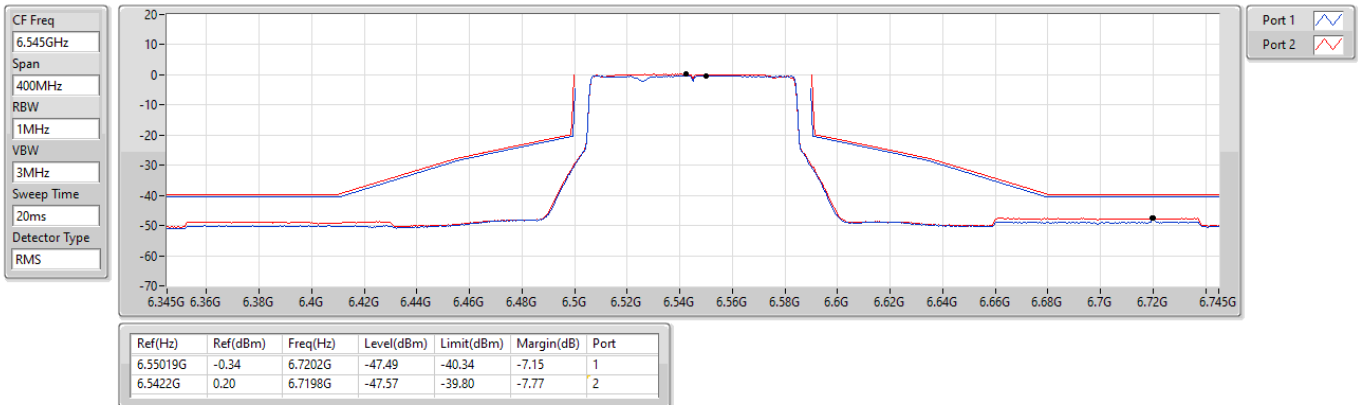

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6625MHz_TX

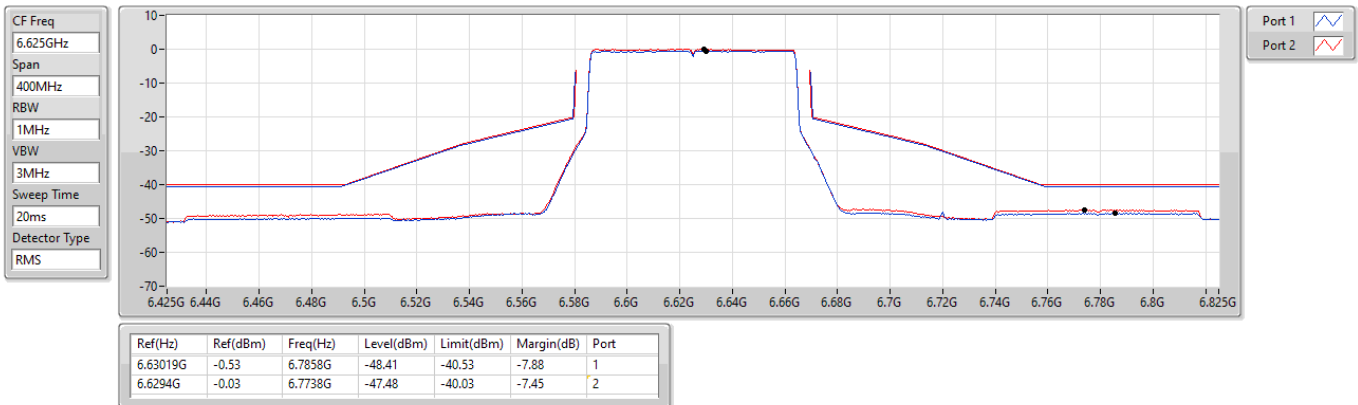

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6705MHz_TX

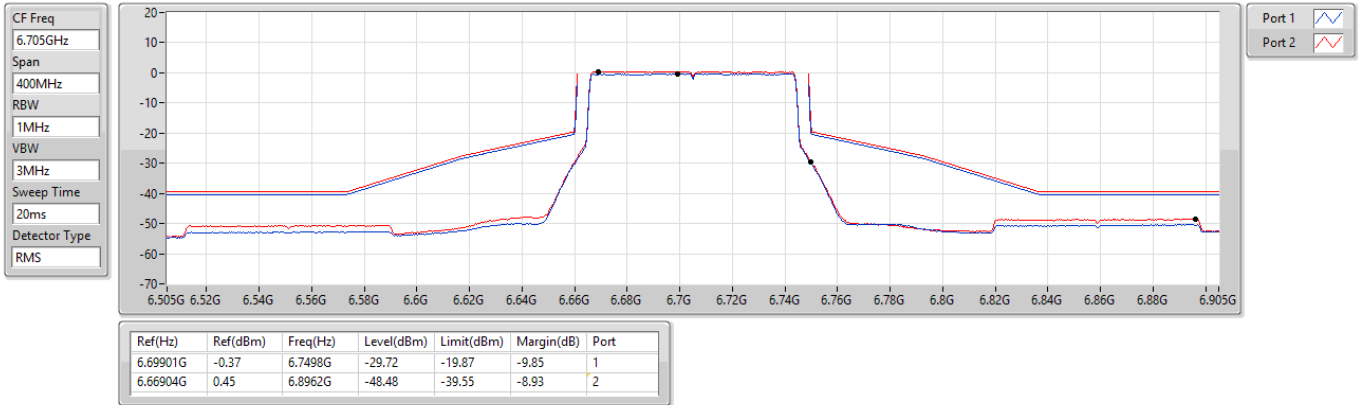

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6785MHz_TX

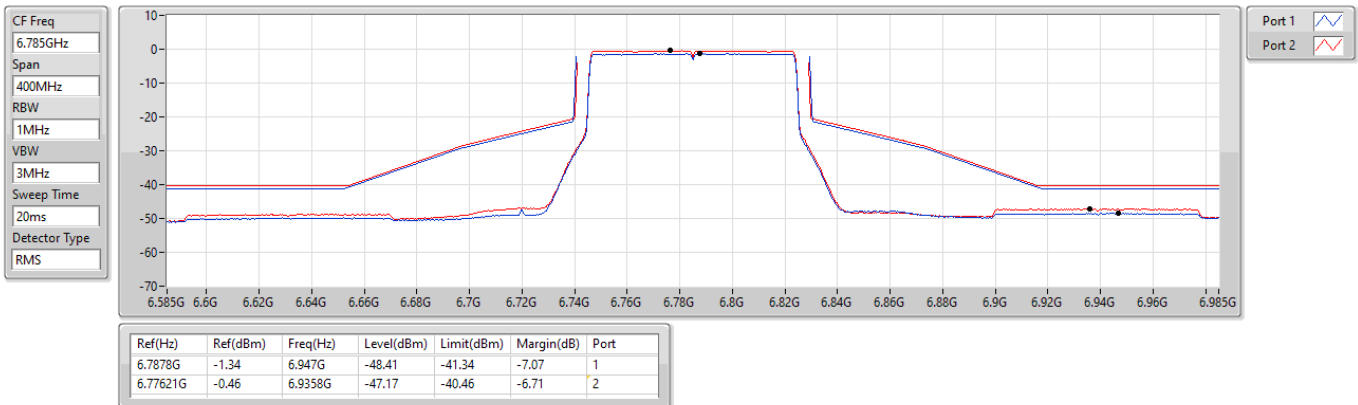

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6865MHz Straddle 6.525-6.875GHz_TX

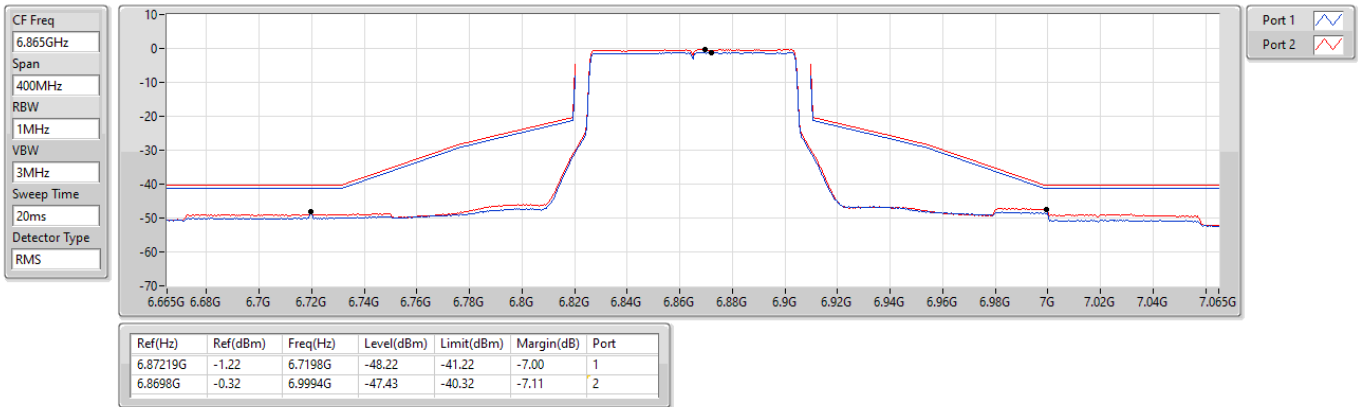

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


6945MHz_TX

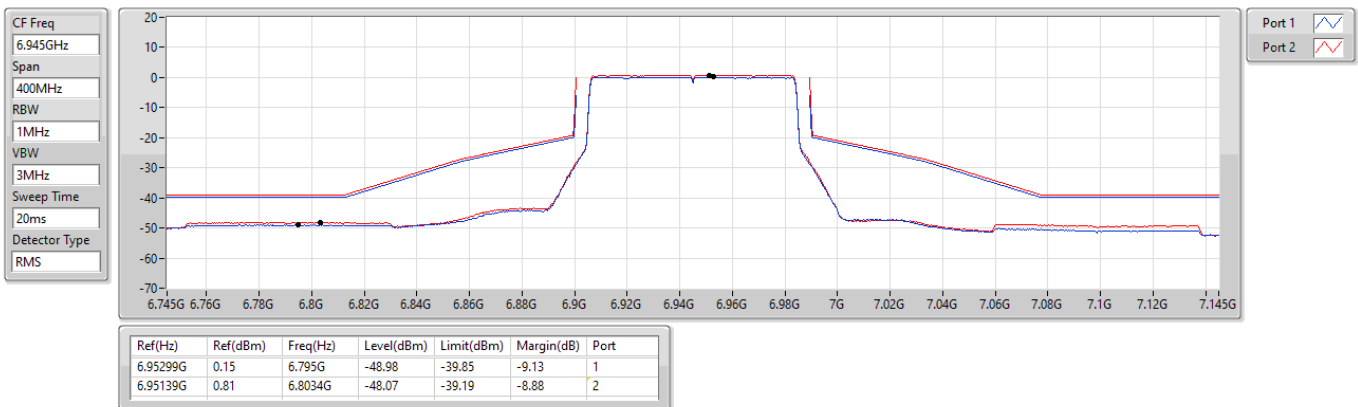

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

MASK


7025MHz_TX

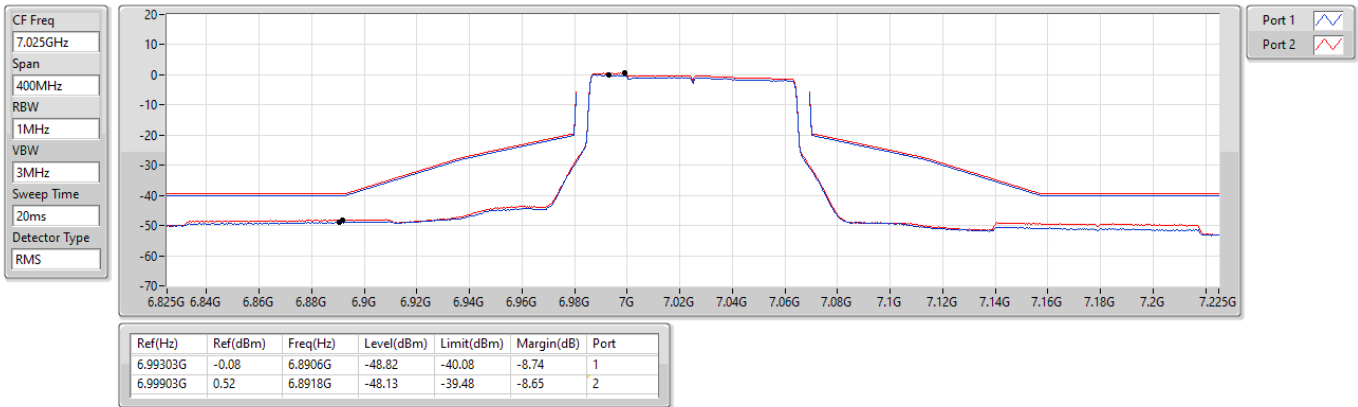

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6025MHz_TX

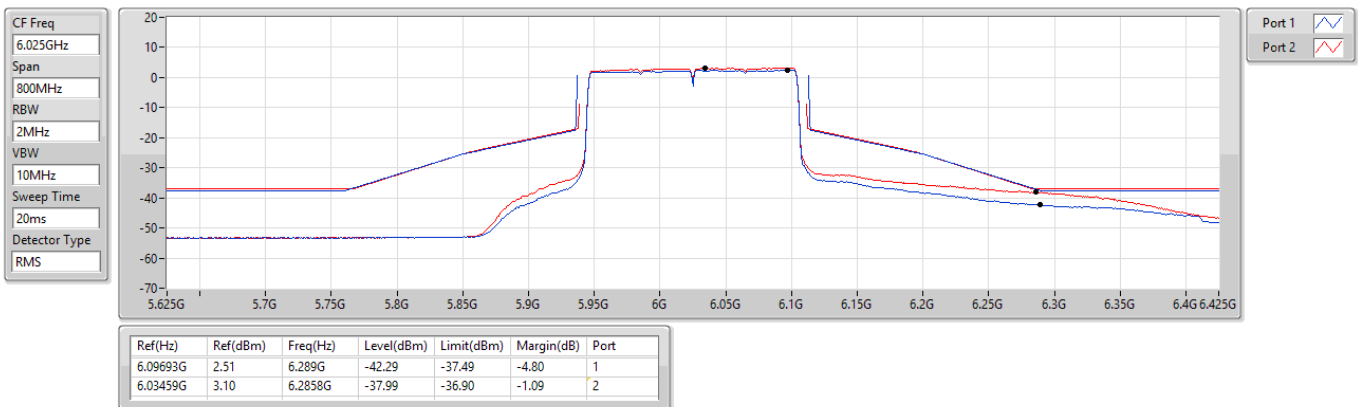

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6185MHz_TX

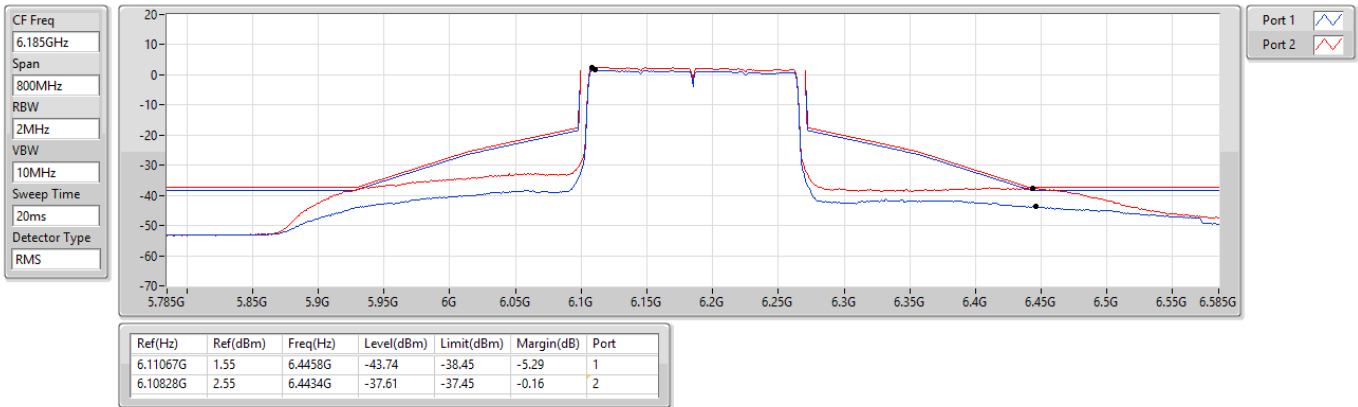

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6345MHz_TX

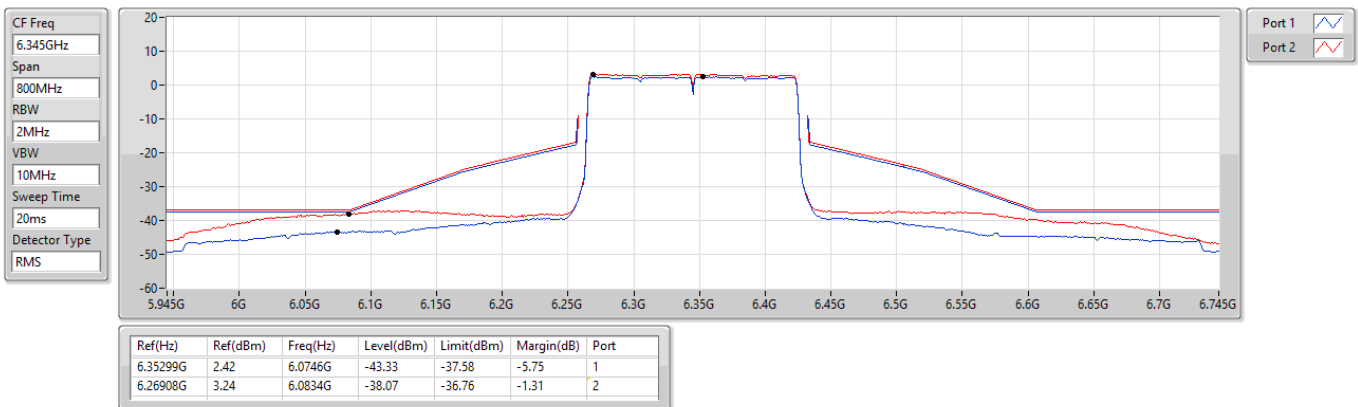

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6505MHz Straddle 6.525-6.875GHz_TX

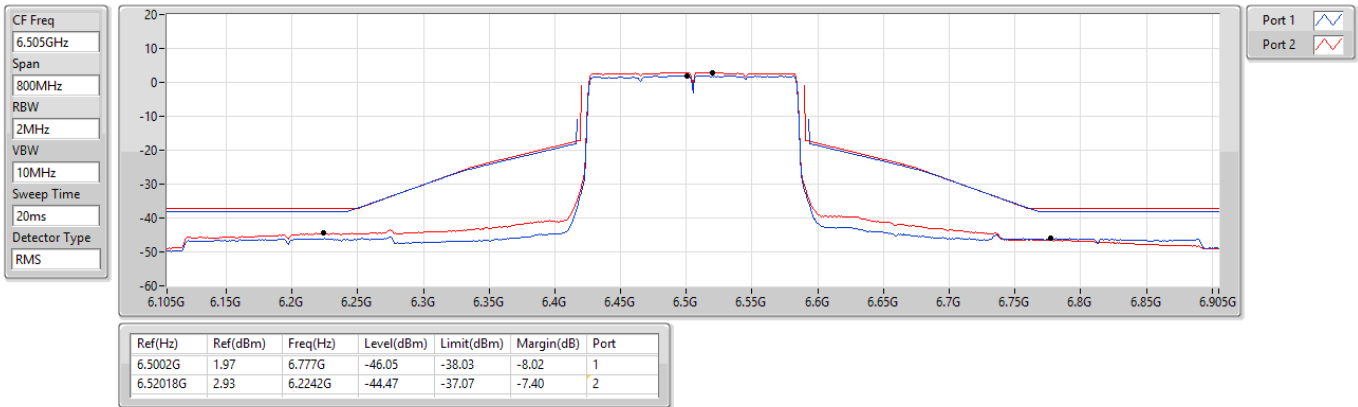

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6665MHz_TX

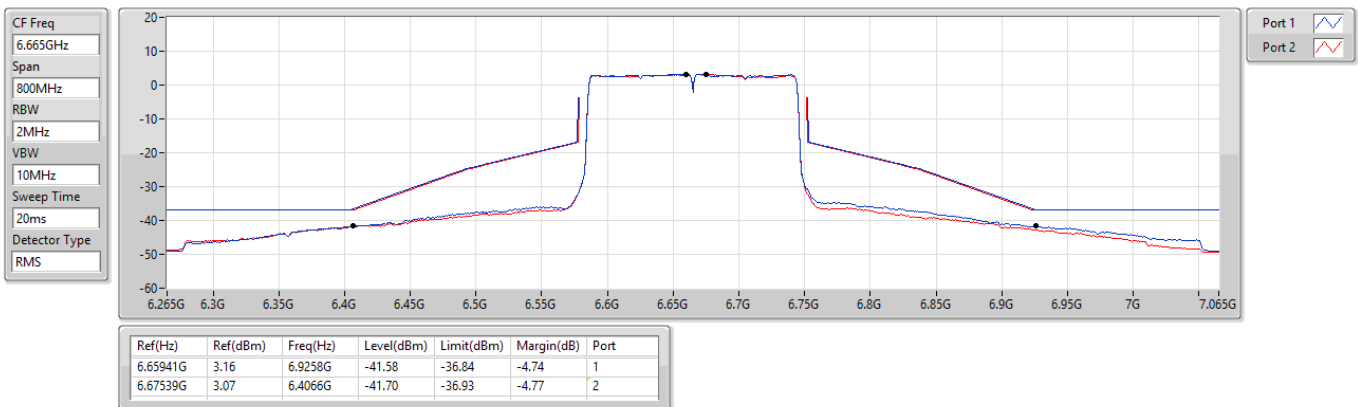

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6825MHz Straddle 6.525-6.875GHz_TX

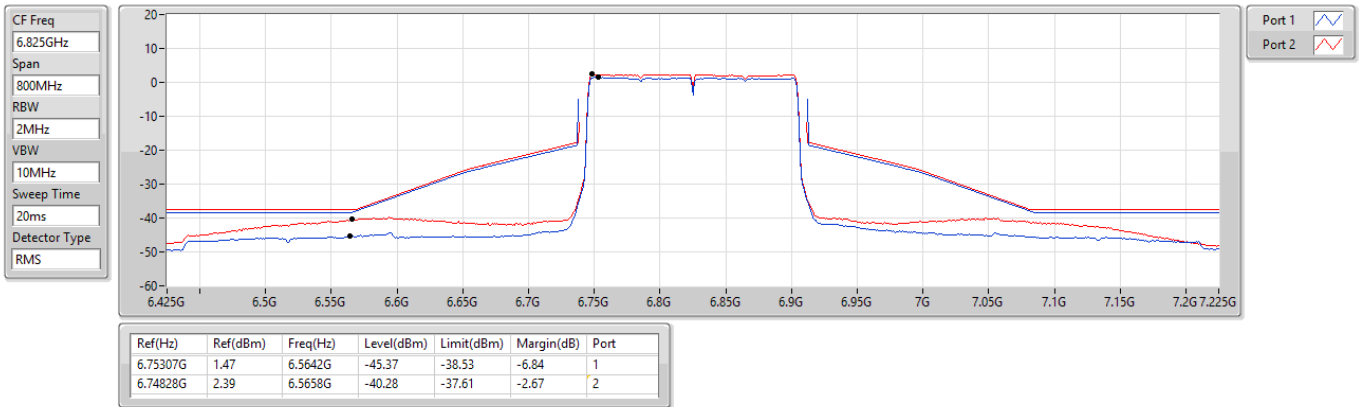

6.875-7.125GHz_802.11be EHT160_Nss2,(MCS0)_2TX

MASK


6985MHz_TX

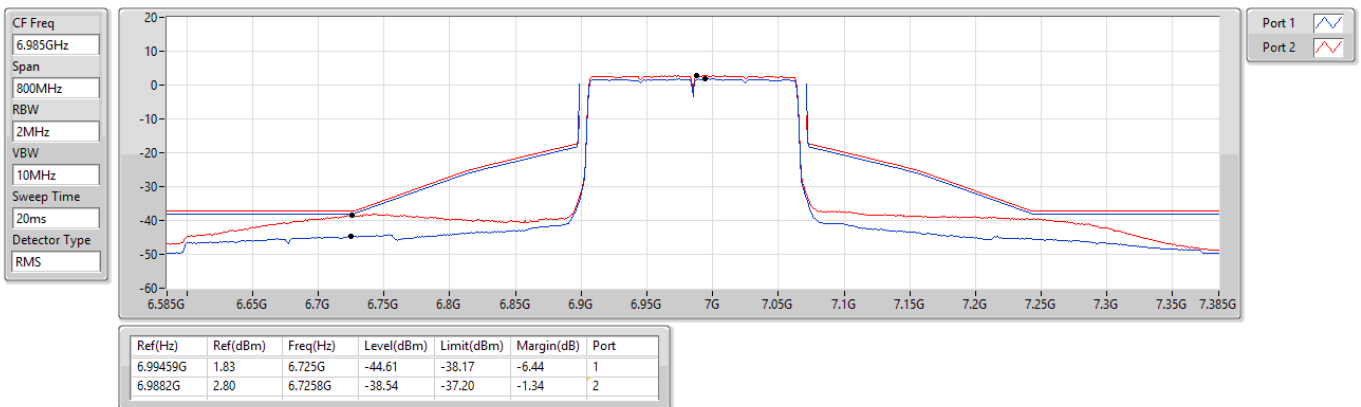

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

MASK


6105MHz_TX

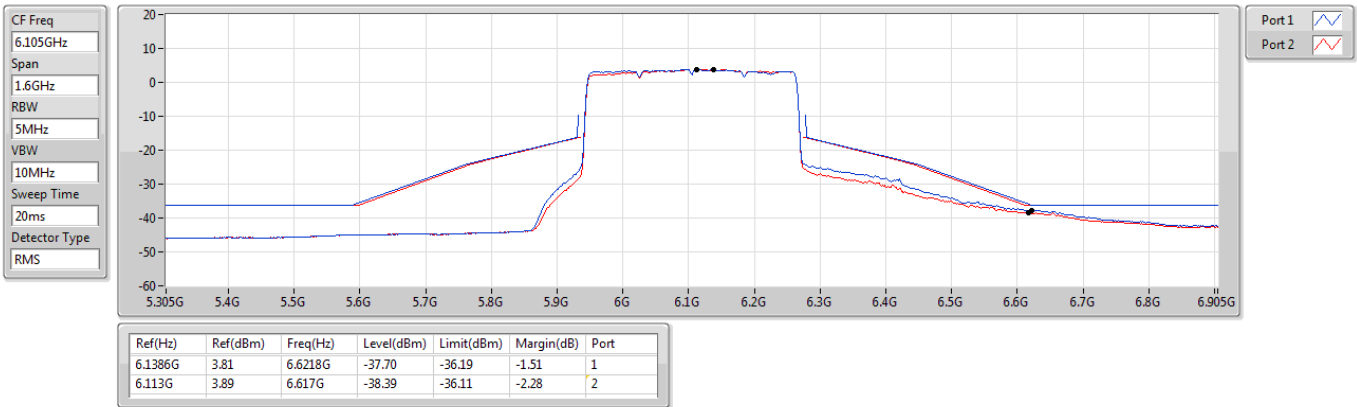

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

MASK


6265MHz_TX

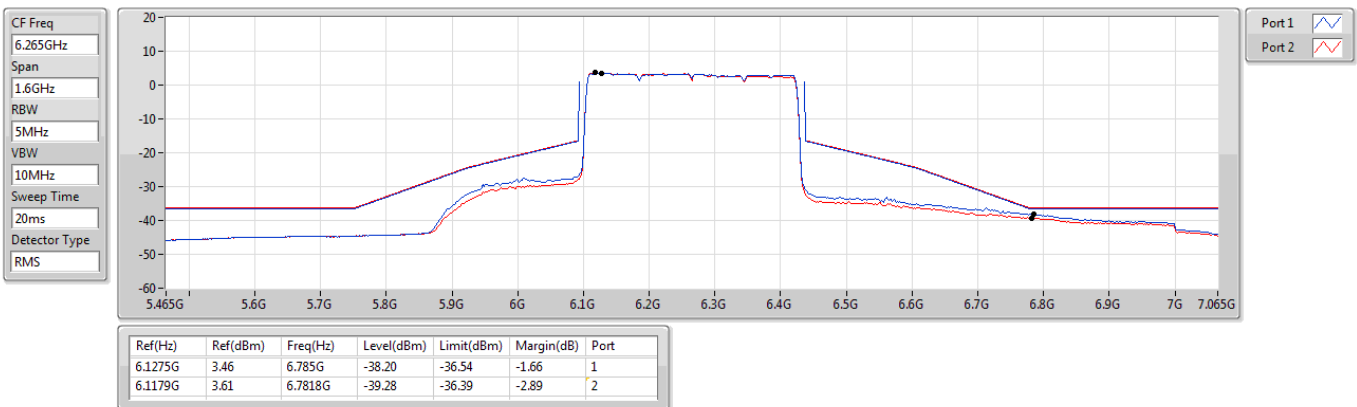

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

MASK


6425MHz Straddle 6.525-6.875GHz_TX

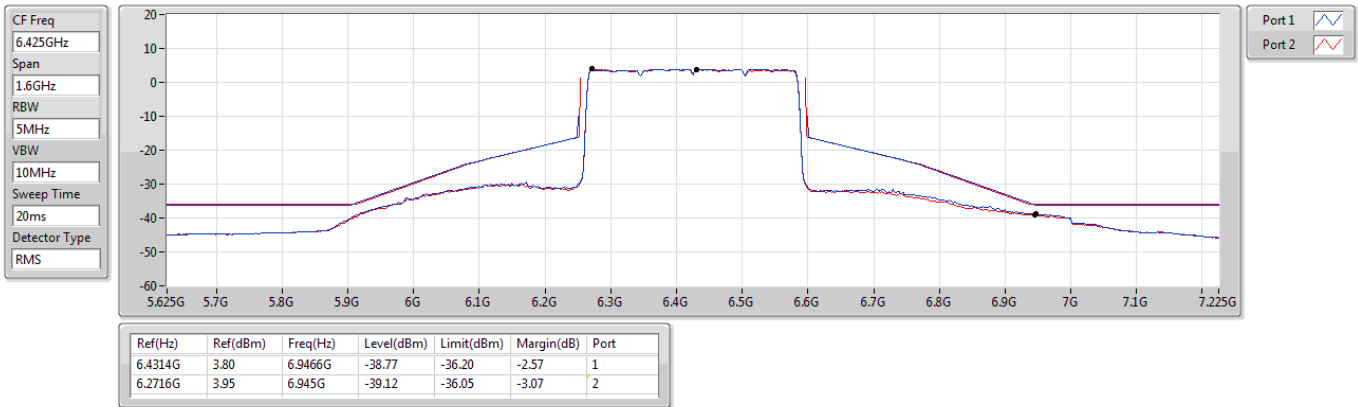

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

MASK

6585MHz Straddle 6.525-6.875GHz_TX

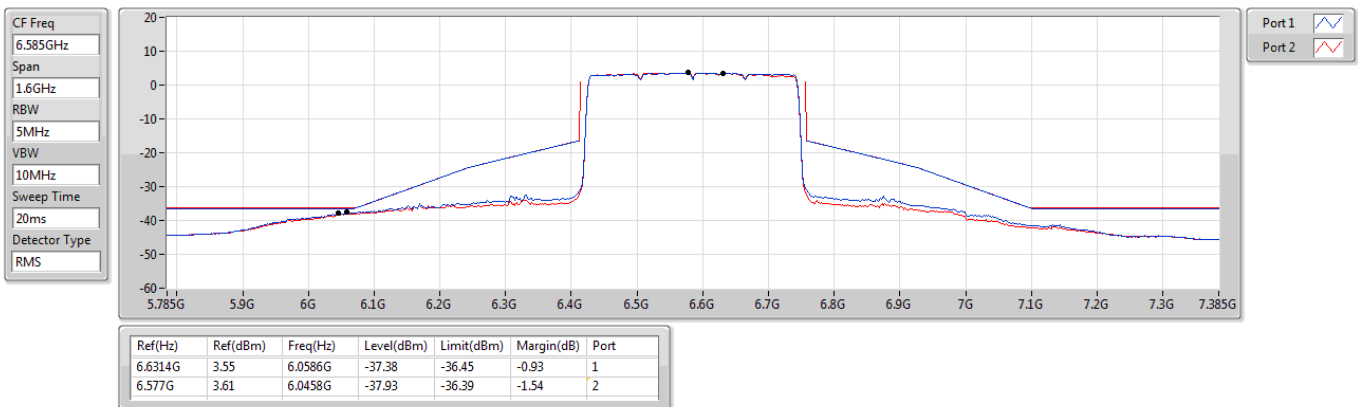




6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

MASK


6745MHz Straddle 6.525-6.875GHz_TX

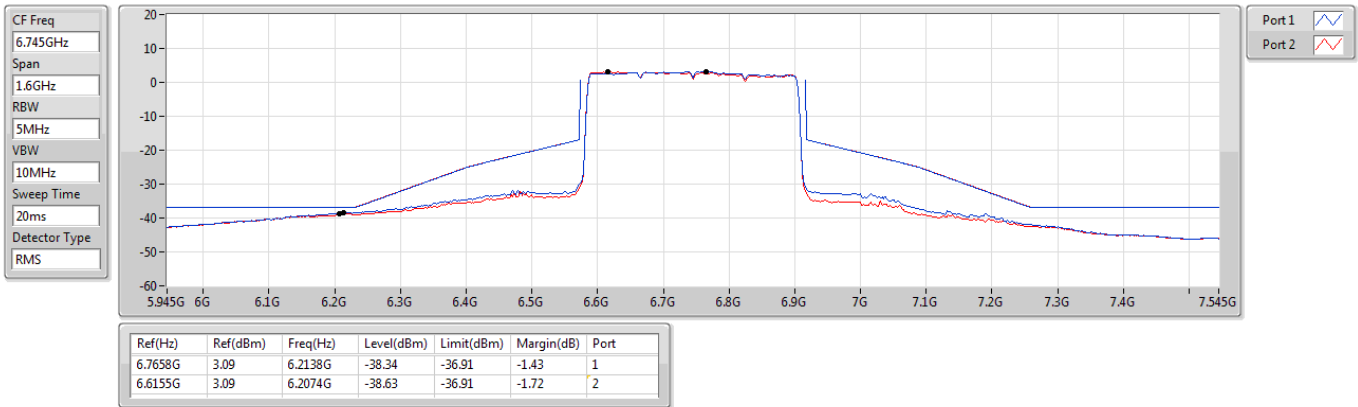

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

MASK

6905MHz Straddle 6.525-6.875GHz_TX

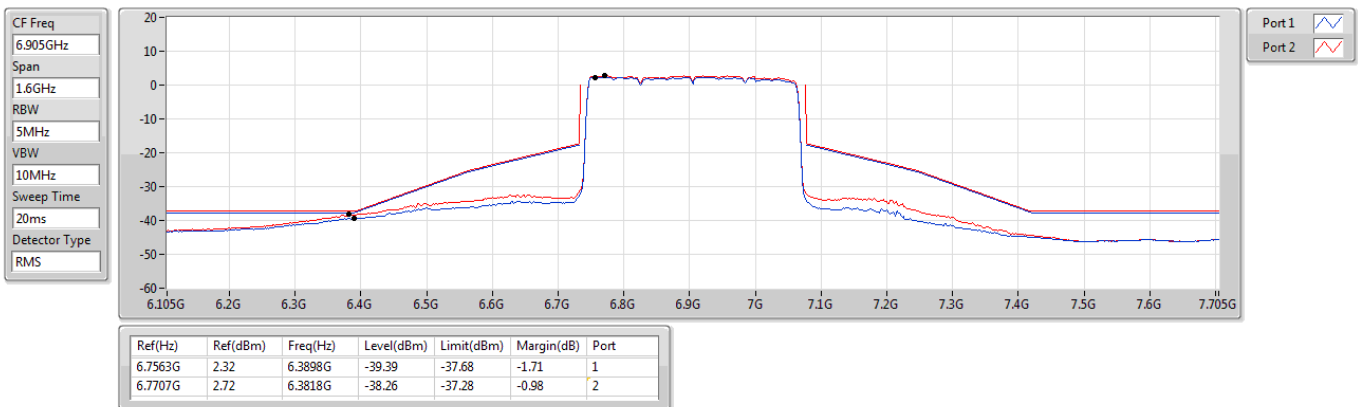

Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	2.00	2.92	4.07	4.43
T20°C Vmin	1.91	2.82	3.91	4.33
T50°C Vnom	5.59	6.25	6.75	6.93
T40°C Vnom	4.59	5.42	6.11	6.39
T30°C Vnom	3.98	4.70	5.51	5.78
T20°C Vnom	1.93	2.91	3.98	4.36
T10°C Vnom	6.85	7.68	8.27	8.58
T0°C Vnom	12.22	12.31	12.42	12.45
T-10°C Vnom	13.57	13.83	14.05	14.11
T-20°C Vnom	13.64	13.92	14.23	14.30
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	1.90	2.67	3.44	3.83
T20°C Vmin	1.80	2.62	3.30	3.66
T50°C Vnom	3.83	5.24	6.33	6.94
T40°C Vnom	3.28	4.61	5.85	6.20
T30°C Vnom	2.92	4.12	4.96	5.38
T20°C Vnom	1.90	2.67	3.37	3.73
T10°C Vnom	6.36	7.42	8.34	8.61
T0°C Vnom	10.15	11.29	12.50	12.81
T-10°C Vnom	11.57	12.60	13.25	13.64
T-20°C Vnom	11.76	12.92	13.81	14.18
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-72.43	1.1	-73.53	-62	Ceased
				-73.43	1.1	-74.53	-62	Minimal
				-92.43	1.1	-93.53	-62	Normal
	6	6475	6474	-74.74	2.45	-77.19	-62	Ceased
				-76.74	2.45	-79.19	-62	Minimal
				-94.74	2.45	-97.19	-62	Normal
	7	6695	6694	-72.8	2.75	-75.55	-62	Ceased
				-74.3	2.75	-77.05	-62	Minimal
				-92.8	2.75	-95.55	-62	Normal
	8	6995	6994	-72.56	2.75	-75.31	-62	Ceased
				-74.06	2.75	-76.81	-62	Minimal
				-92.56	2.75	-95.31	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)



Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	5950	-67.72	1.1	-68.82	-62	Ceased
				-70.72	1.1	-71.82	-62	Minimal
				-87.72	1.1	-88.82	-62	Normal
	6 / 7	6585	6740	-70.75	2.45	-73.2	-62	Ceased
				-72.25	2.45	-74.7	-62	Minimal
				-90.75	2.45	-93.2	-62	Normal
	7 / 8	6905	7060	-72.18	2.75	-74.93	-62	Ceased
				-73.18	2.75	-75.93	-62	Minimal
				-92.18	2.75	-94.93	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-72.43	-73.53	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-74.74	-77.19	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-72.8	-75.55	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-72.56	-75.31	V	V	V	V	V	V	V	V	V	V	100	90

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-67.72	-68.82	V	V	V	V	V	V	V	V	V	V	100	90
			6100	-71.78	-72.88	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-69.87	-70.97	V	V	V	V	V	V	V	V	V	V	100	90
	6 / 7	6585	6430	-72.38	-74.83	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-76.81	-79.26	V	V	V	V	V	V	V	V	V	V	100	90
			6740	-70.75	-73.2	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-72.57	-75.32	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-75.72	-78.47	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-72.18	-74.93	V	V	V	V	V	V	V	V	V	V	100	90


Test plot of Incumbent signal

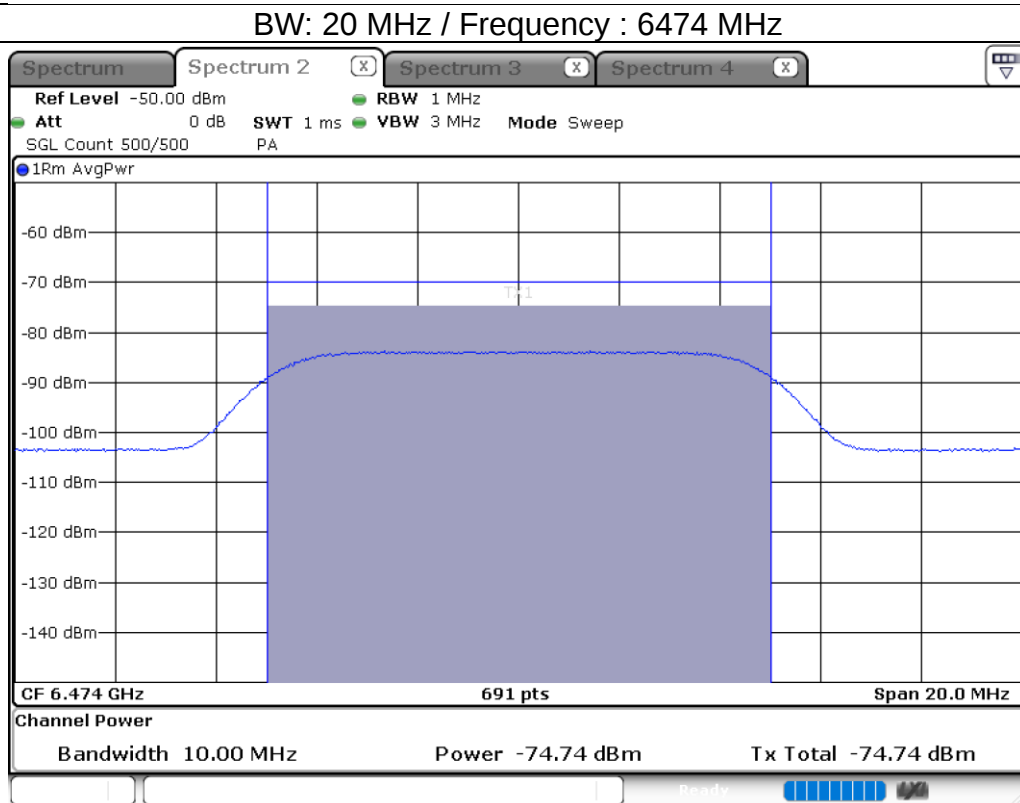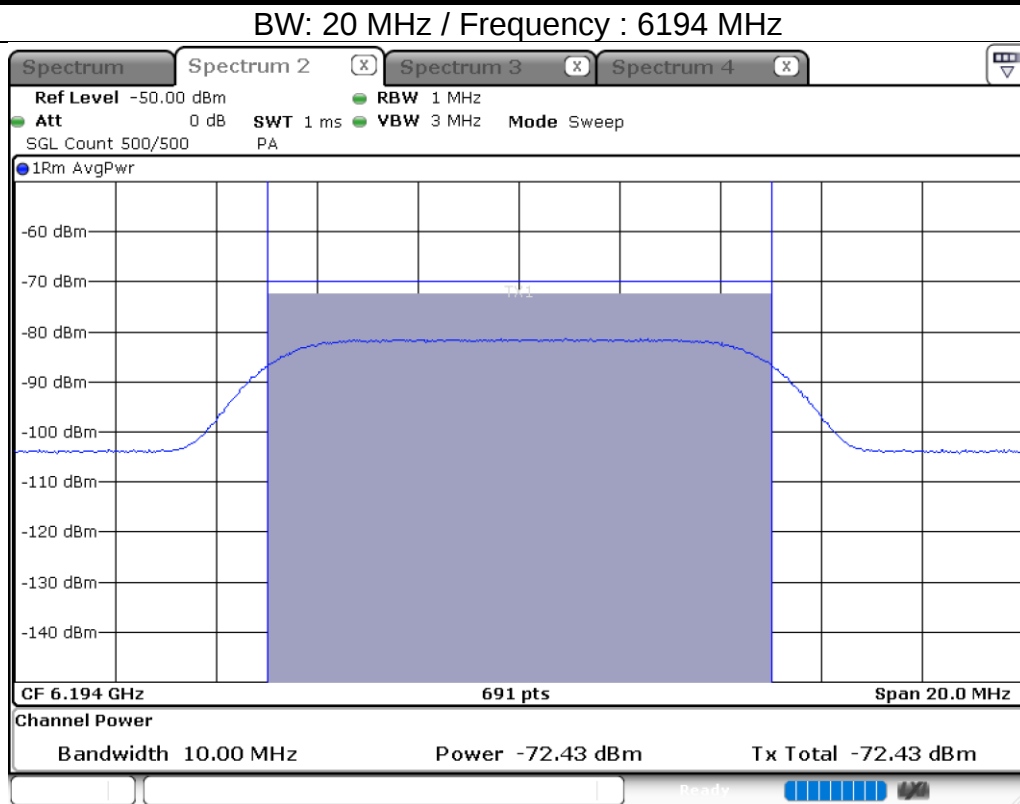


BW: 20 MHz / Frequency : 6694 MHz

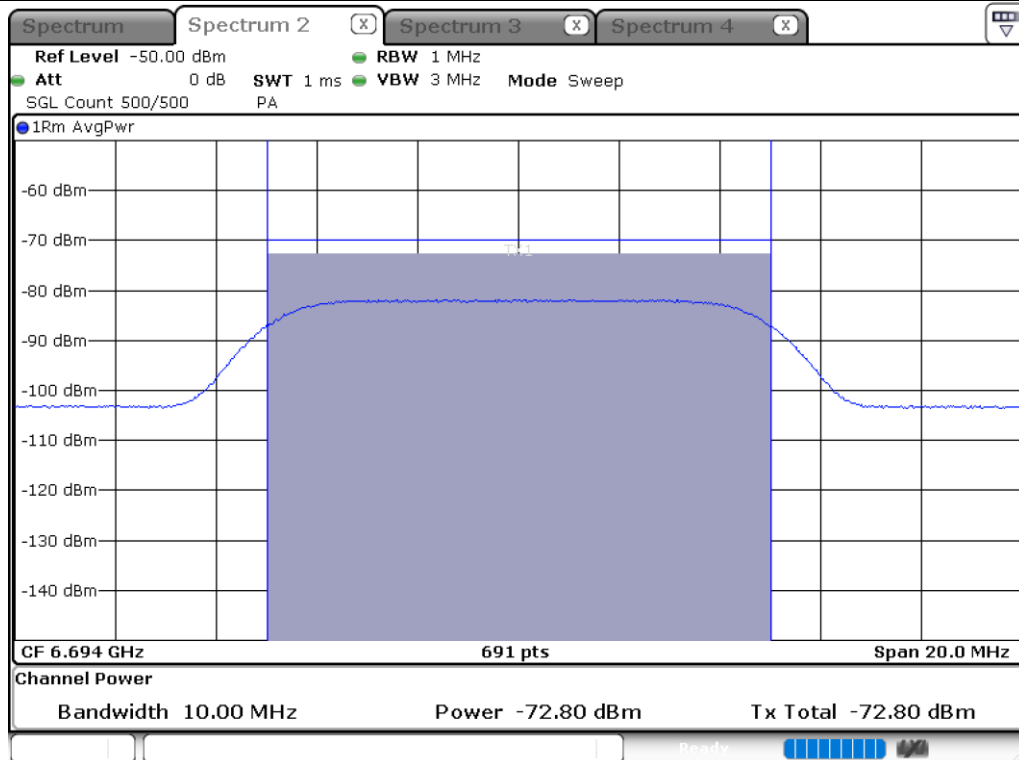


BW: 20 MHz / Frequency : 6994MHz

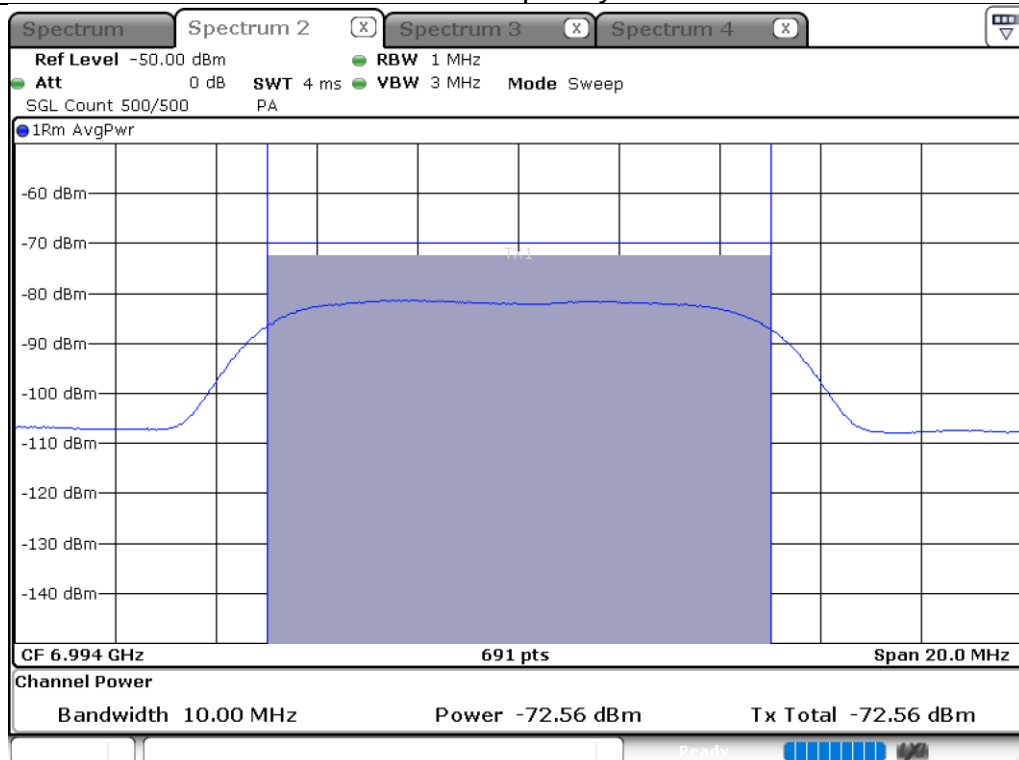


BW: 320 MHz / Frequency : 5950 MHz

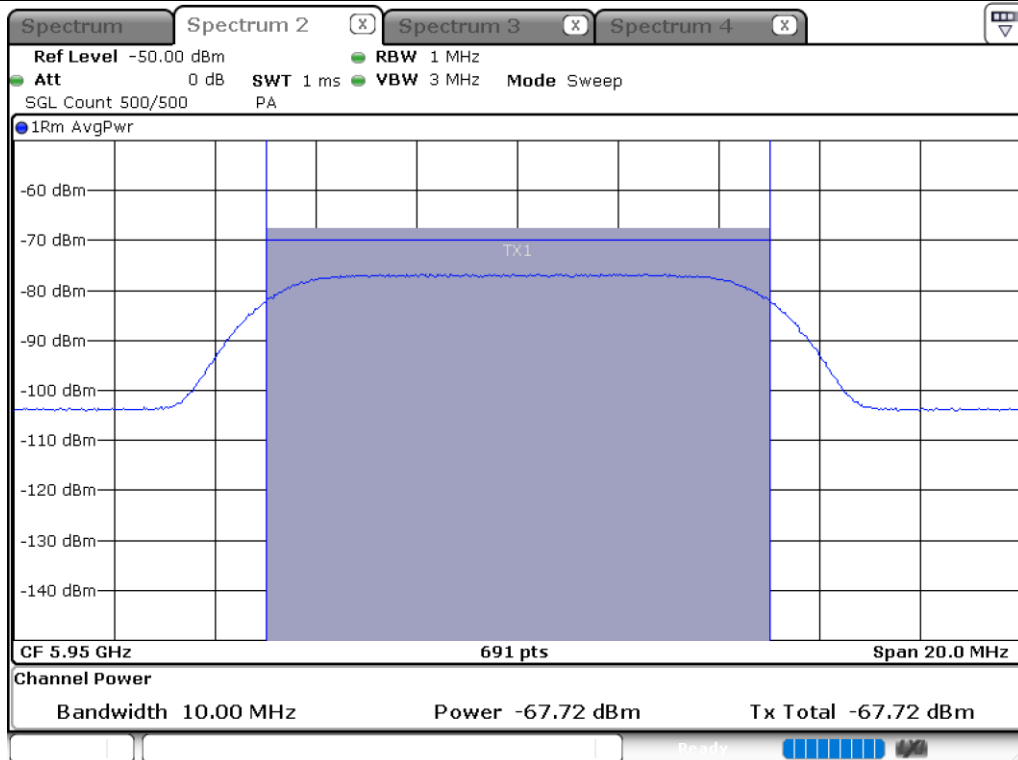


BW: 320 MHz / Frequency : 6100 MHz

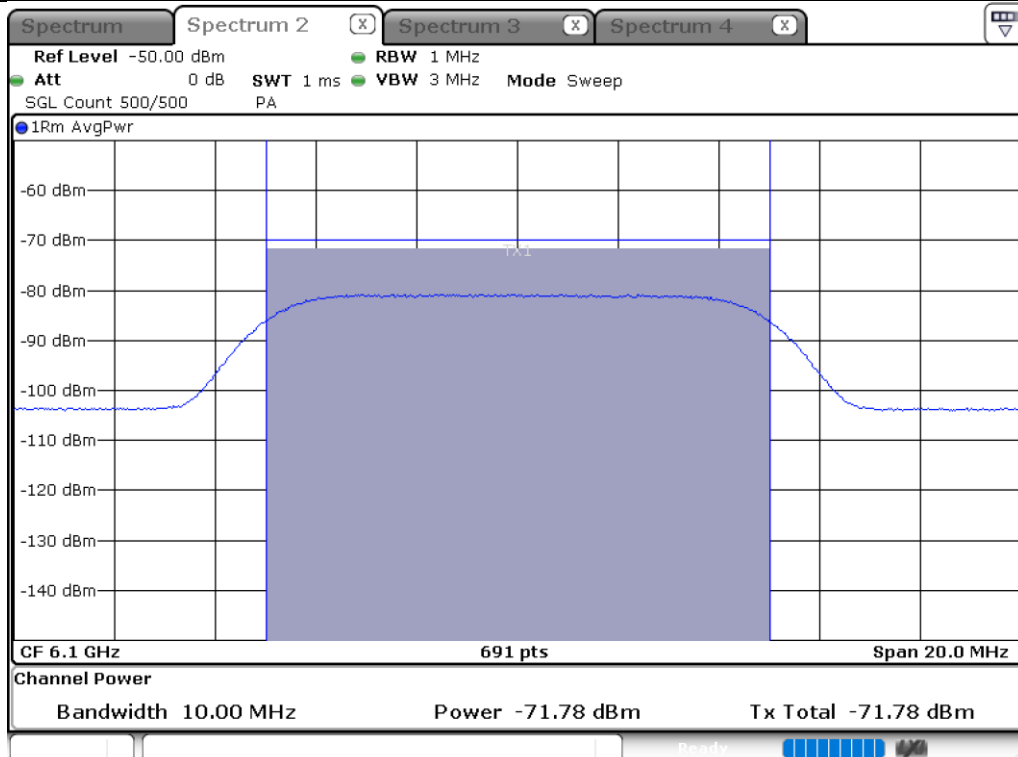


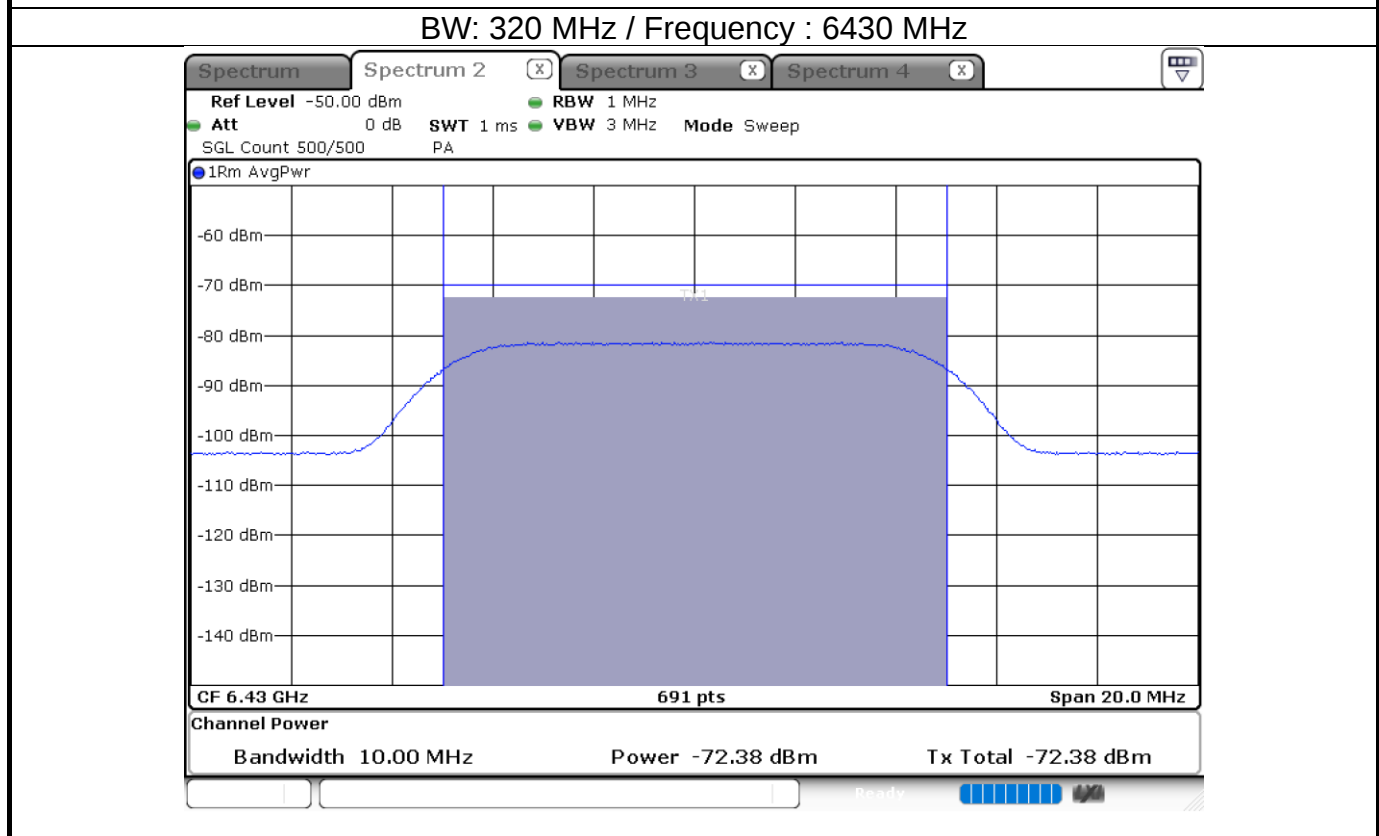


BW: 320 MHz / Frequency : 6580 MHz

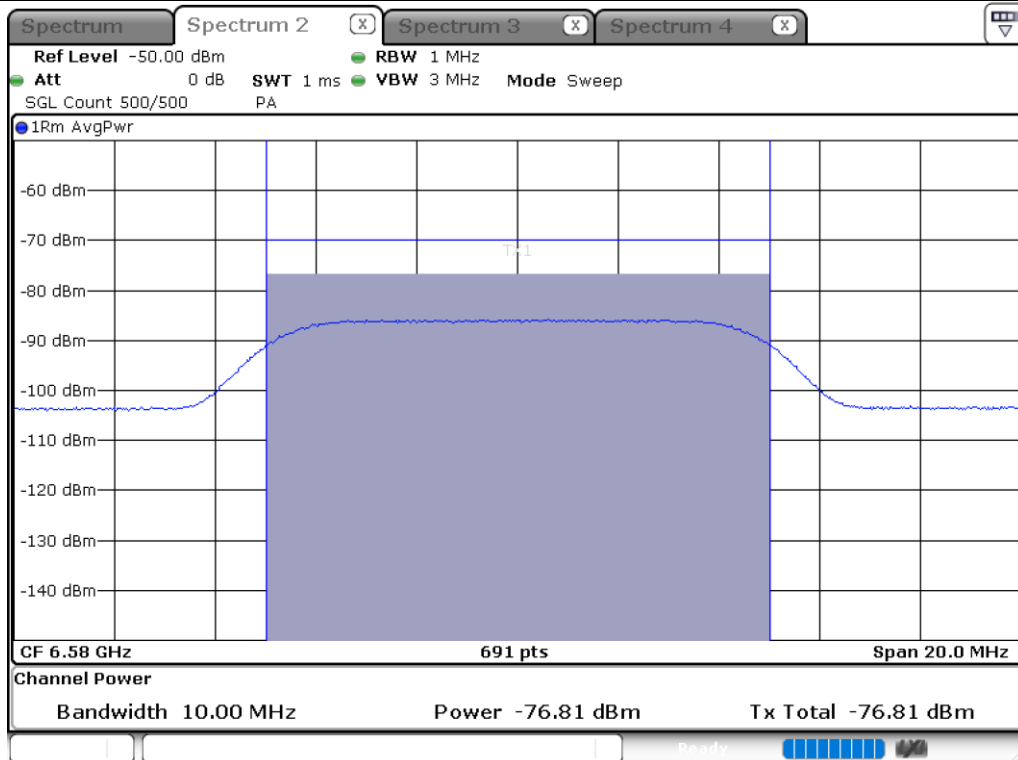


BW: 320 MHz / Frequency : 6740 MHz

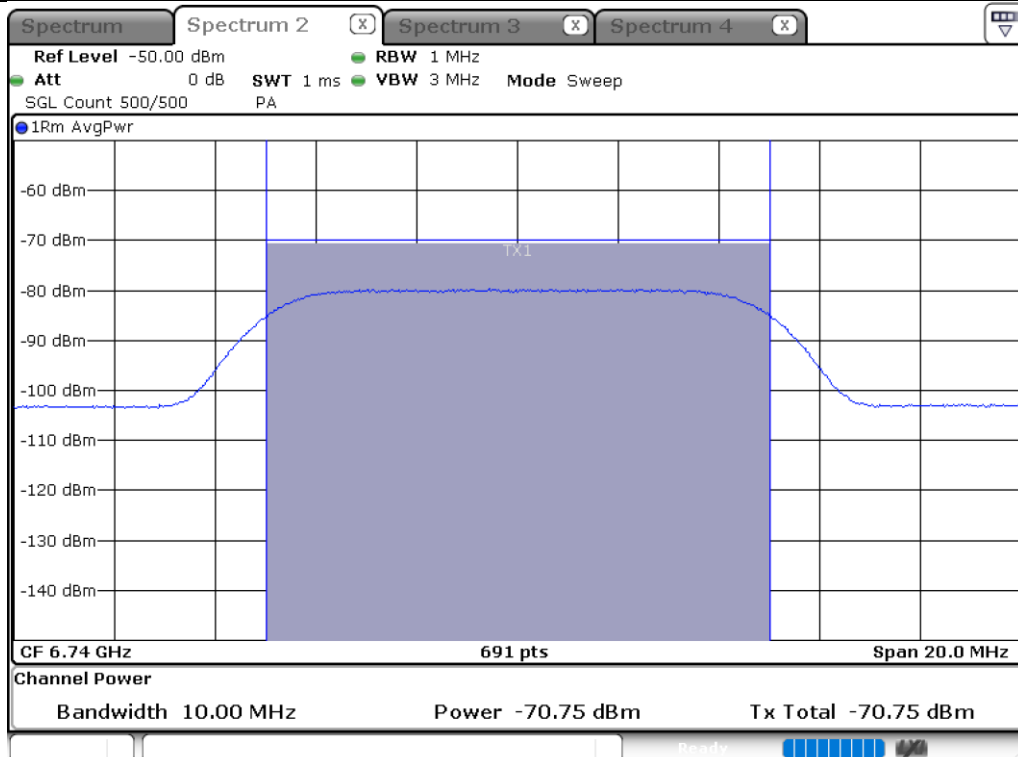


BW: 320 MHz / Frequency : 6750 MHz

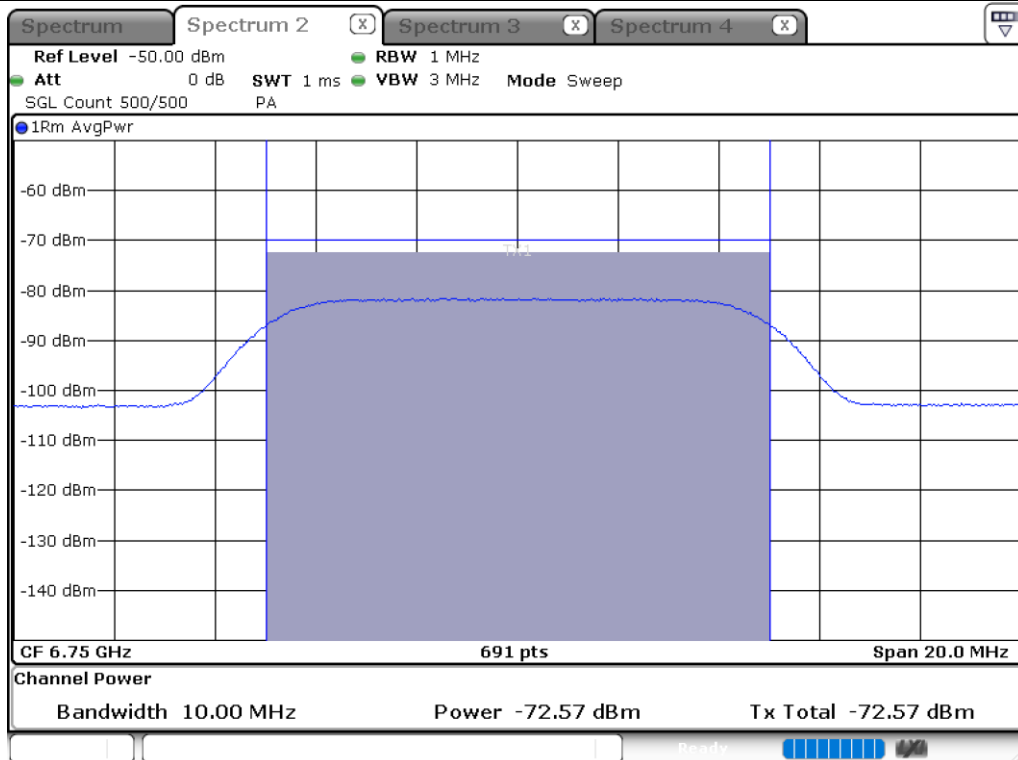

BW: 320 MHz / Frequency : 6900 MHz

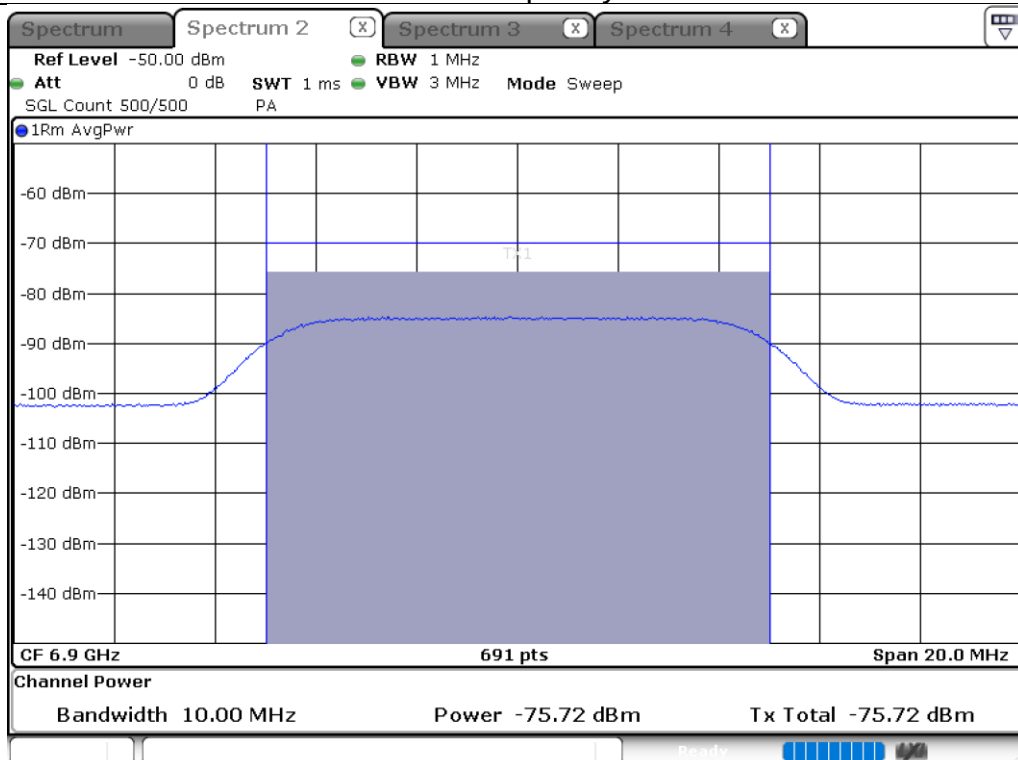

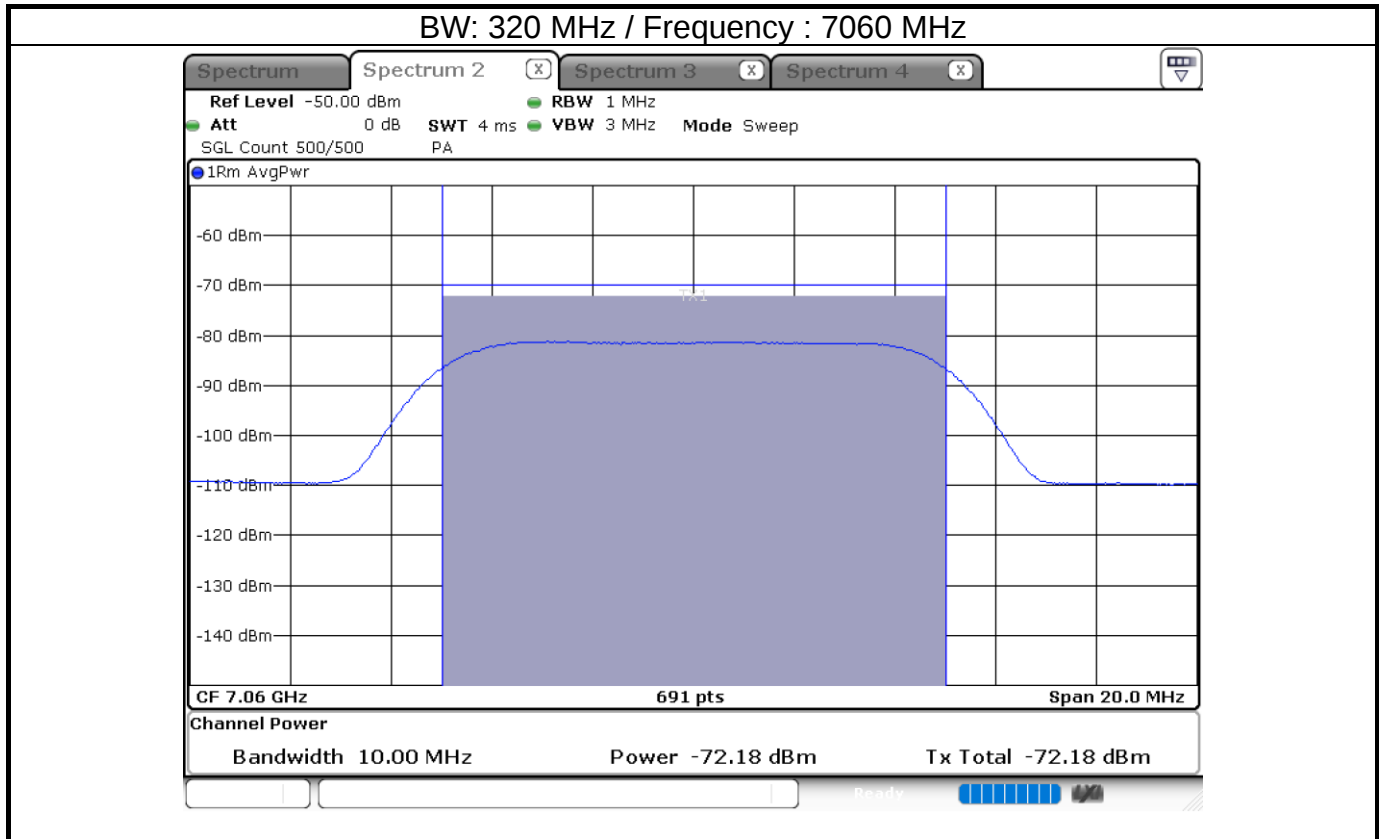

Test plot of Contention Based Protocol EUT Normal transmission

