



Volume Control TEST REPORT

No.24T04Z100816-003

for

Shenzhen Tinno Mobile Technology Corp.

Smart Phone

U655AA, U655AC

FCC ID: XD6U655AA

with

Hardware Version: V1.0

Software Version: U655AAV01.03_9.10/U655ACV01.02.10

Issued Date: 2024-07-04

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



No. 24T04Z100816-003

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z100816-003	Rev.0	1st edition	2024-07-04

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATA	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. AIR INTERFACES / BANDS USED FOR TESTING.....	9
6. TEST RESULTS	9
6.1. TEST SUMMARY AND CONCLUSIONS.....	9
6.2. DESCRIPTION OF TEST SETUP	10
6.3. TEST DETAIL RESULTS	11
7. TEST FACILITIES UTILIZED	19
ANNEX A: EUT PHOTOGRAPH	20
ANNEX B: EUT PARAMETERS.....	21
ANNEX C: TEST LAYOUT	22
ANNEX D: THE WORST-CASE MEASUREMENT DATA OF THE CHOSEN CODEC OF TELEPHONY CALL	23
ANNEX E: THE WORST-CASE MEASUREMENT DATA OF OTHER CODECS OF TELEPHONY CALL	29
ANNEX F: FREQUENCY RESPONSE USED DF AND 1/12 OCTAVE	30
ANNEX G: HATS CERTIFICATE.....	32
ANNEX H: ACOUSTIC CHAMBER CERTIFICATE	33
ANNEX I: ACCREDITATION CERTIFICATE.....	34

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191


1.3. Testing Environment

Normal Temperature: 18-28℃
Relative Humidity: 0-80%
Ambient noise of 14dB(A) and is compliance with requirement of standards
acoustic chamber (SEE ANNEX H)


1.4. Project data

Testing Start Date: 2024-04-18
Testing End Date: 2024-07-03

1.5. Signature



Zhu Hongye
(Prepared this test report)



Lu Yuping
(Reviewed this test report)



Zhao Xinglong
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	Shenzhen Tinno Mobile Technology Corp. 27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Sh
Address	enzhen ,PRC
Contact	xiaoping.li
Email	xiaoping.li@tinno.com
Tel.	0755-86095550
Fax	0755-86095551

2.2. Manufacturer Information

Company Name	Shenzhen Tinno Mobile Technology Corp. 27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Sh
Address	enzhen ,PRC
Contact	xiaoping.li
Email	xiaoping.li@tinno.com
Tel.	0755-86095550
Fax	0755-86095551

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

General Information:

Description	Smart Phone
Model name/HVIN	U655AA, U655AC
FCC ID	XD6U655AA
Extreme Temperature	-10~45℃
Nominal Voltage	3.85V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.6V

Supported Bands:

UMTS Frequency Band(s)	B 1/2/4/5/8
GSM Frequency Band(s)	Not support
E-UTRA Frequency Band(s)	B 2/3/4/5/7/12/14/20/29/30/66
5G Frequency Band(s)	SA N2/5/30/66/77 NSA N2/5/66/77
WLAN Frequency Band(s)	2.4GHz/5GHz

Supported Codecs:

UMTS Audio Codec(s)	AMR NB/AMR WB
GSM Audio Codec (s)	Not support
E-UTRA Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/EVS SWB
5G Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/EVS SWB
WLAN Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/EVS SWB

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT06a	IMEI: 861709079999979	V1.0	U655AAV01.03_9.10	2024-04-10

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN
/	/	/

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex B for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
ANSI C63.19	American National Standard Methods of Measurement of Compatibility Between Wireless Communications Devices and Hearing Aids	2019
TIA 5050	Telecommunications Communications Products Receive Volume Control Requirements for Wireless (Mobile) Devices	2018 Edition
285076 D04 Volume Control v02	GUIDANCE FOR PERFORMING VOLUME CONTROL MEASUREMENTS ON MOBILE HANDSETS	2023.09.29
285076 D05 HAC Waiver DA 23-914 v01	HAC COMPLIANCE UNDER WAIVER DA 23-914	2023.09.29

5. Air Interfaces / Bands used for testing

The codec bit rates of the applicant's choosing are EVS-NB 13.2kbps and EVS-WB 13.2kbps.

Air-interface	Band	Tested Codec	Tested Rate(kbps)
WCDMA (UMTS)	B 2/4/5	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85
VoLTE	B 2/4/5/7/12/14/30/66	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85
		EVS-NB	13.2
		EVS-WB	13.2
VoWiFi	802.11g/ac	AMR-NB	4.75
		EVS-NB	13.2
5G NR	SA 2/5/30/66 NSA 2/5/66	AMR-NB	4.75
		AMR-WB	6.6
		EVS-NB	13.2

6. Test Results

6.1. Test summary and Conclusions

The volume control measurement method is in accordance with the TIA 5050-2018.

The EUT was tested in CTTL acoustics laboratory. All the detail results are showed in section 6.3.

I: Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the volume control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:

- a. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing.
- b. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of conversational gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing.

II: For all other narrowband and wideband codecs not evaluated in I.a. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for conversational gain and documented in the test report at the 2N and 8N levels with a gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate. The handset

volume setting used to comply with I.a. shall be used for these other CMRS codec evaluations.

III. Any other codec for voice services embedded in the handset, not identified in I and II above, is not required to comply or demonstrate in the test reports for conversational gain.

Table 6.1-1: the worst-case test results of the chosen codec of telephony call

Air- interfac e & Band	Chann el	Band width	Modula tion	RB Size	RB Offset	Vol ume Lev el	Codec	NB/ WB	Bit Rate	2N/ 8N	Conv. Gain (ANN EX D)	FR (AN NEX D)	Min PN-SDNR (ANNEX D)		Verdic t
		[MH z]							[kbp s]	[N]	[dB]		[Hz]	[dB]	
LTE Band 2	18900	10	16QA M	1	49	Max	EVS	NB	13.2	2N	13.03	PASS	800	22.71	PASS
LTE Band 2	18900	10	16QA M	1	49	Max	EVS	NB	13.2	8N	16.61	PASS	3150	21.27	PASS
LTE Band 2	18900	10	16QA M	1	49	Max	EVS	WB	13.2	2N	13.07	PASS	315	23.23	PASS
LTE Band 2	18900	10	16QA M	1	49	Max	EVS	WB	13.2	8N	17.43	PASS	315	22.92	PASS

Table 6.1-2: the worst-case test results of other codecs of telephony call

Air- interfac e & Band	Channe l	Band width	Modulat ion	RB Size	RB Offs et	Vol ume Lev el	Codec	NB/ WB	Bit Rate	2N/ 8N	Conv. Gain (ANN EX E)	FR (AN NEX E)	Min PN-SDNR (ANNEX E)		Verdic t
		[MH z]							[kbp s]	[N]	[dB]		[Hz]	[dB]	
VoNR N66	132322	10	16QAM	15	1	Max	AMR	NB	4.75	2N	13.02	/	/	/	PASS
VoNR N66	132322	10	16QAM	15	1	Max	AMR	NB	4.75	8N	16.75	/	/	/	PASS
VoNR N66	132322	10	16QAM	15	1	Max	AMR	WB	6.6	2N	13.20	/	/	/	PASS
VoNR N66	132322	10	16QAM	15	1	Max	AMR	WB	6.6	8N	17.04	/	/	/	PASS

6.2. Description of Test Setup

In order to provide the complete information about the measurement environment within this report the setup is described in this chapter. Figure 6.2.1 shows a block diagram of the test arrangement.

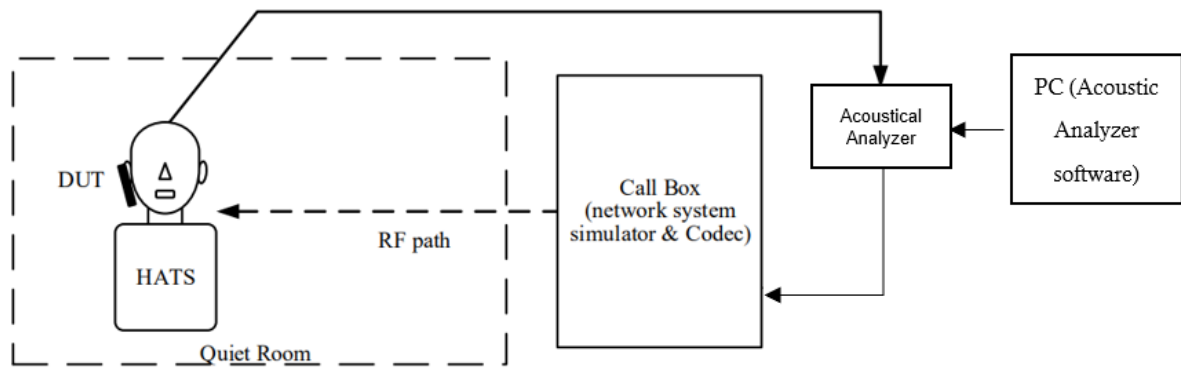


Fig. 6.2.1: Block diagram of the test setup

An artificial head measurement system according to ITU-T Recommendation P.58 equipped with artificial ears (Type3.3 acc. ITU-T Rec. P.57) are used. The artificial head is placed in the center of an anechoic test room. The measurements are implemented in the HEAD acoustics software ACQUA and can be carried out automatically. They allow signal recording at the artificial ears and feeding at the network simulator.

The network simulators (e.g. Rohde & Schwarz CMW500, CMX500) establish the call to the Smart Phone via an antenna connection. The EUT was tested using EFR/AMR-NB/AMR-WB/EVS-NB/EVS-WB codecs.

ANNEX C shows the handheld Positioner with mounted EUT. The application force between the phone and the artificial ear is adjusted. A mounting force of 2N or 8 N is adjusted.

6.3. Test Detail Results

6.3.1 VoLTE IMS call investigation

Table 6.3.1-1: the **Codec** and **Bandwidth** investigating results of **VoLTE** IMS call

Band	Chann el	Ban dwi dth	Modul ation	RB Siz e	R B O ff se t	Volum e Level	Code c	NB/ WB	Bit Rate	2N/ 8N	Conv. Gain	FR	Min PN-SDNR	
		[M Hz]							[kbps)	[N]	[dB]		[Hz]	[dB]
B2	18900	10	QPSK	50	0	Max	EVS	NB	13.2	2N	13.31	PASS	800	24.11
B2	18900	10	QPSK	50	0	Max	EVS	NB	13.2	8N	16.96	PASS	800	22.68
B2	18900	10	QPSK	50	0	Max	EVS	WB	13.2	2N	13.67	PASS	250	24.51
B2	18900	10	QPSK	50	0	Max	EVS	WB	13.2	8N	17.18	PASS	250	24.46
B2	18900	10	QPSK	50	0	Max	AMR	NB	4.75	2N	13.13	/	/	/

B2	18900	10	QPSK	50	0	Max	AMR	NB	12.2	2N	13.75	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	NB	4.75	8N	16.62	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	WB	6.6	2N	13.46	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	WB	23.85	2N	13.71	/	/	/
B2	18900	10	QPSK	50	0	Max	AMR	WB	6.6	8N	17.23	/	/	/

Table 6.3.1-2: the **Radio Configuration** investigating results of **VoLTE** IMS call

Band	Chann el	Ban dwi dth	Modul ation	RB Siz e	RB Off set	Volum e Level	Code c	NB/ WB	Bit Rate	2N/ 8N	Conv. Gain	FR	Min PN-SDNR	
		[M Hz]							[kbps]	[N]	[dB]		[Hz]	[dB]
B2	18900	10	QPSK	1	0	Max	EVS	NB	13.2	8N	16.81	PASS	800	22.12
B2	18900	10	QPSK	1	49	Max	EVS	NB	13.2	8N	16.72	PASS	800	21.68
B2	18900	10	16QA M	1	0	Max	EVS	NB	13.2	8N	16.76	PASS	3150	22.36
B2	18900	10	16QA M	1	49	Max	EVS	NB	13.2	8N	16.61	PASS	3150	21.27
B2	18900	10	16QA M	50	0	Max	EVS	NB	13.2	8N	16.68	PASS	3150	22.45
B2	18900	20	QPSK	100	0	Max	EVS	NB	13.2	8N	16.72	PASS	800	23.05
B2	18900	20	QPSK	1	0	Max	EVS	NB	13.2	8N	16.70	PASS	800	22.99
B2	18900	20	QPSK	1	99	Max	EVS	NB	13.2	8N	16.70	PASS	800	23.40
B2	18900	20	16QA M	1	0	Max	EVS	NB	13.2	8N	16.86	PASS	800	21.72
B2	18900	20	16QA M	1	99	Max	EVS	NB	13.2	8N	16.94	PASS	3150	23.28
B2	18900	20	16QA M	100	0	Max	EVS	NB	13.2	8N	16.85	PASS	800	21.80
B2	18900	15	QPSK	1	0	Max	EVS	NB	13.2	8N	16.85	PASS	3150	21.99
B2	18900	15	QPSK	1	74	Max	EVS	NB	13.2	8N	16.95	PASS	3150	21.82
B2	18900	15	16QA M	1	0	Max	EVS	NB	13.2	8N	16.90	PASS	3150	23.53
B2	18900	15	16QA M	1	74	Max	EVS	NB	13.2	8N	16.84	PASS	800	23.45
B2	18900	5	QPSK	1	0	Max	EVS	NB	13.2	8N	16.92	PASS	800	22.08
B2	18900	5	QPSK	1	24	Max	EVS	NB	13.2	8N	16.89	PASS	800	22.57
B2	18900	5	16QA M	1	0	Max	EVS	NB	13.2	8N	16.90	PASS	800	22.29
B2	18900	5	16QA M	1	24	Max	EVS	NB	13.2	8N	16.86	PASS	800	23.60

B2	18900	3	QPSK	1	0	Max	EVS	NB	13.2	8N	17.25	PASS	800	22.45
B2	18900	3	16QAM	1	0	Max	EVS	NB	13.2	8N	17.28	PASS	800	22.40
B2	18900	1.4	QPSK	1	0	Max	EVS	NB	13.2	8N	17.20	PASS	250	24.05
B2	18900	1.4	16QAM	1	0	Max	EVS	NB	13.2	8N	17.19	PASS	800	22.49
B2	18900	10	QPSK	1	0	Max	AMR	NB	4.75	2N	13.34	/	/	/
B2	18900	10	QPSK	1	49	Max	AMR	NB	4.75	2N	13.38	/	/	/
B2	18900	10	16QAM	1	0	Max	AMR	NB	4.75	2N	13.21	/	/	/
B2	18900	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.12	/	/	/
B2	18900	10	16QAM	50	0	Max	AMR	NB	4.75	2N	13.40	/	/	/
B2	18900	20	QPSK	100	0	Max	AMR	NB	4.75	2N	13.25	/	/	/
B2	18900	20	QPSK	1	0	Max	AMR	NB	4.75	2N	13.15	/	/	/
B2	18900	20	QPSK	1	99	Max	AMR	NB	4.75	2N	13.13	/	/	/
B2	18900	20	16QAM	1	0	Max	AMR	NB	4.75	2N	13.32	/	/	/
B2	18900	20	16QAM	1	99	Max	AMR	NB	4.75	2N	13.23	/	/	/
B2	18900	20	16QAM	100	0	Max	AMR	NB	4.75	2N	13.19	/	/	/
B2	18900	15	QPSK	75	0	Max	AMR	NB	4.75	2N	13.31	/	/	/
B2	18900	15	QPSK	1	74	Max	AMR	NB	4.75	2N	13.15	/	/	/
B2	18900	15	16QAM	75	0	Max	AMR	NB	4.75	2N	13.41	/	/	/
B2	18900	15	16QAM	1	74	Max	AMR	NB	4.75	2N	13.15	/	/	/
B2	18900	5	QPSK	25	0	Max	AMR	NB	4.75	2N	13.14	/	/	/
B2	18900	5	QPSK	1	24	Max	AMR	NB	4.75	2N	13.26	/	/	/
B2	18900	5	16QAM	25	0	Max	AMR	NB	4.75	2N	13.40	/	/	/
B2	18900	5	16QAM	1	24	Max	AMR	NB	4.75	2N	13.15	/	/	/
B2	18900	3	QPSK	15	0	Max	AMR	NB	4.75	2N	13.36	/	/	/
B2	18900	3	QPSK	1	14	Max	AMR	NB	4.75	2N	13.17	/	/	/
B2	18900	3	16QAM	1	14	Max	AMR	NB	4.75	2N	13.36	/	/	/
B2	18900	1.4	QPSK	6	0	Max	AMR	NB	4.75	2N	13.25	/	/	/
B2	18900	1.4	QPSK	1	5	Max	AMR	NB	4.75	2N	13.42	/	/	/

B2	18900	1.4	16QAM	1	5	Max	AMR	NB	4.75	2N	13.31	/	/	/
----	-------	-----	-------	---	---	-----	-----	----	------	----	-------	---	---	---

Table 6.3.1-3: the **LTE Band** investigating results of **VoLTE** IMS call

Band	Channel	Bandwidth	Modulation	RB Size	RB Offset	Volume Level	Code c	NB / WB	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
		[MHz]							[kbps]	[N]	[dB]		[Hz]	[dB]
B4	20175	10	16QAM	1	49	Max	EVS	NB	13.2	8N	17.02	PASS	800	22.32
B5	20525	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.95	PASS	800	23.31
B7	21100	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.87	PASS	800	23.33
B12	23095	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.90	PASS	800	24.35
B14	23330	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.95	PASS	800	22.94
B30	27710	10	16QAM	1	49	Max	EVS	NB	13.2	8N	17.00	PASS	800	24.29
B66	132322	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.84	PASS	800	22.11
B4	20175	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.32	/	/	/
B5	20525	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.24	/	/	/
B7	21100	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.26	/	/	/
B12	23095	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.30	/	/	/
B14	23330	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.24	/	/	/
B30	27710	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.27	/	/	/
B66	132322	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.25	/	/	/

6.3.2 VoWiFi IMS call investigation

Table 6.3.2: the investigating results of **VoWiFi** IMS call

Mode	Channel	Modulation	Data Rate	Volume Level	Code c	NB/ WB	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
			[Mbps]				[kbps]	[N]	[dB]		[Hz]	[dB]
802.11g	6	DSSS	1	Max	EVS	NB	13.2	8N	16.94	PASS	800	21.79
802.11g	6	DSSS	2	Max	EVS	NB	13.2	8N	17.03	PASS	800	22.40
802.11g	6	CCK	5.5	Max	EVS	NB	13.2	8N	17.30	PASS	800	22.06
802.11g	6	CCK	11	Max	EVS	NB	13.2	8N	17.33	PASS	800	21.27
802.11ac	6	BPSK	6	Max	EVS	NB	13.2	8N	17.30	PASS	3150	22.49
802.11ac	6	BPSK	9	Max	EVS	NB	13.2	8N	17.34	PASS	800	22.21
802.11ac	6	QPSK	12	Max	EVS	NB	13.2	8N	17.25	PASS	3150	22.54
802.11ac	6	QPSK	18	Max	EVS	NB	13.2	8N	17.23	PASS	800	22.56

802.11ac	6	16-QAM	24	Max	EVS	NB	13.2	8N	17.35	PASS	800	22.06
802.11ac	6	16-QAM	36	Max	EVS	NB	13.2	8N	17.08	PASS	800	22.31
802.11ac	6	64-QAM	48	Max	EVS	NB	13.2	8N	17.23	PASS	800	23.71
802.11ac	6	64-QAM	54	Max	EVS	NB	13.2	8N	17.20	PASS	3150	22.74
802.11g	6	DSSS	1	Max	AMR	NB	4.75	2N	13.40	/	/	/
802.11g	6	DSSS	2	Max	AMR	NB	4.75	2N	13.22	/	/	/
802.11g	6	CCK	5.5	Max	AMR	NB	4.75	2N	13.29	/	/	/
802.11g	6	CCK	11	Max	AMR	NB	4.75	2N	13.51	/	/	/
802.11ac	6	BPSK	6	Max	AMR	NB	4.75	2N	13.25	/	/	/
802.11ac	6	BPSK	9	Max	AMR	NB	4.75	2N	13.23	/	/	/
802.11ac	6	QPSK	12	Max	AMR	NB	4.75	2N	13.10	/	/	/
802.11ac	6	QPSK	18	Max	AMR	NB	4.75	2N	13.23	/	/	/
802.11ac	6	16-QAM	24	Max	AMR	NB	4.75	2N	13.19	/	/	/
802.11ac	6	16-QAM	36	Max	AMR	NB	4.75	2N	13.22	/	/	/
802.11ac	6	64-QAM	48	Max	AMR	NB	4.75	2N	13.23	/	/	/
802.11ac	6	64-QAM	54	Max	AMR	NB	4.75	2N	13.27	/	/	/

6.3.3 WCDMA call investigation

Table6.3.3: the investigating results of **WCDMA** call

air interface	Band	Channel	Volume Level	Code c	Voice bandwidth	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
						[kbps]	[N]	[dB]		[Hz]	[dB]
WCDMA	Band2	9262	Max	AMR	NB	4.75	2N	13.29	/	/	/
WCDMA	Band2	9262	Max	AMR	NB	12.2	2N	13.85	/	/	/
WCDMA	Band2	9262	Max	AMR	NB	4.75	8N	17.02	/	/	/
WCDMA	Band2	9262	Max	AMR	WB	6.6	2N	13.69	/	/	/
WCDMA	Band2	9262	Max	AMR	WB	23.85	2N	14.09	/	/	/
WCDMA	Band2	9262	Max	AMR	WB	6.6	8N	17.53	/	/	/
WCDMA	Band4	1312	Max	AMR	NB	4.75	2N	13.21	/	/	/
WCDMA	Band5	4132	Max	AMR	NB	4.75	2N	13.19	/	/	/

6.3.4 5G NR call investigation

Table6.3.4-1: the investigating results of **5G NR** IMS call

Band	Channel	Bandwidth [MHz]	Modulation	SCS (kHz)	RB	Volume Level	Code c	NB/WB	Bit Rate	2N/8N [N]	Conv Gain [dB]	FR	Min PN-SDNR	
									[kbps]				[Hz]	[dB]
N66	132322	20	QPSK	15	106	Max	EVS	NB	13.2	8N	17.13	PASS	250	24.39
N66	132322	20	QPSK	15	75	Max	EVS	NB	13.2	8N	17.13	PASS	250	25.59
N66	132322	20	QPSK	15	50	Max	EVS	NB	13.2	8N	17.02	PASS	250	25.59
N66	132322	20	QPSK	15	20	Max	EVS	NB	13.2	8N	17.02	PASS	250	25.60
N66	132322	20	16QAM	15	106	Max	EVS	NB	13.2	8N	17.14	PASS	250	25.60
N66	132322	20	16QAM	15	53	Max	EVS	NB	13.2	8N	17.10	PASS	250	24.76
N66	132322	20	16QAM	15	1	Max	EVS	NB	13.2	8N	17.09	PASS	3150	25.62
N66	132322	20	64QAM	15	106	Max	EVS	NB	13.2	8N	17.05	PASS	250	25.55
N66	132322	20	256QAM	15	106	Max	EVS	NB	13.2	8N	17.06	PASS	250	25.49
N66	132322	15	QPSK	15	79	Max	EVS	NB	13.2	8N	17.04	PASS	250	25.45
N66	132322	15	QPSK	15	50	Max	EVS	NB	13.2	8N	17.03	PASS	250	25.46
N66	132322	15	QPSK	15	20	Max	EVS	NB	13.2	8N	17.02	PASS	250	25.34
N66	132322	15	16QAM	15	79	Max	EVS	NB	13.2	8N	17.01	PASS	250	25.42
N66	132322	15	16QAM	15	1	Max	EVS	NB	13.2	8N	17.08	PASS	250	23.88
N66	132322	15	64QAM	15	79	Max	EVS	NB	13.2	8N	17.14	PASS	250	24.50
N66	132322	15	256QAM	15	79	Max	EVS	NB	13.2	8N	17.16	PASS	250	24.44
N66	132322	10	QPSK	15	52	Max	EVS	NB	13.2	8N	17.15	PASS	250	24.53
N66	132322	10	QPSK	15	20	Max	EVS	NB	13.2	8N	17.21	PASS	250	24.55
N66	132322	10	16QAM	15	52	Max	EVS	NB	13.2	8N	17.21	PASS	250	24.62
N66	132322	10	16QAM	15	1	Max	EVS	NB	13.2	8N	17.18	PASS	250	24.69
N66	132322	10	64QAM	15	25	Max	EVS	NB	13.2	8N	17.15	PASS	250	24.62
N66	132322	10	256QAM	15	52	Max	EVS	NB	13.2	8N	17.15	PASS	250	24.58
N2	18900	15	16QAM	15	1	Max	EVS	NB	13.2	8N	17.12	PASS	250	23.74

N5	20525	15	16QAM	15	1	Max	EVS	NB	13.2	8N	17.20	PASS	250	23.71
N30	27710	15	16QAM	15	1	Max	EVS	NB	13.2	8N	17.09	PASS	3150	22.44
N66	132322	20	QPSK	15	106	Max	AMR	NB	4.75	2N	13.23	/	/	
N66	132322	20	QPSK	15	75	Max	AMR	NB	4.75	2N	13.32	/	/	/
N66	132322	20	QPSK	15	50	Max	AMR	NB	4.75	2N	13.14	/	/	/
N66	132322	20	QPSK	15	20	Max	AMR	NB	4.75	2N	13.18	/	/	/
N66	132322	20	16QAM	15	106	Max	AMR	NB	4.75	2N	13.19	/	/	/
N66	132322	20	16QAM	15	53	Max	AMR	NB	4.75	2N	13.13	/	/	/
N66	132322	20	16QAM	15	1	Max	AMR	NB	4.75	2N	13.18	/	/	/
N66	132322	20	64QAM	15	106	Max	AMR	NB	4.75	2N	13.16	/	/	/
N66	132322	20	256QAM	15	106	Max	AMR	NB	4.75	2N	13.10	/	/	/
N66	132322	15	QPSK	15	79	Max	AMR	NB	4.75	2N	13.13	/	/	/
N66	132322	15	QPSK	15	50	Max	AMR	NB	4.75	2N	13.25	/	/	/
N66	132322	15	QPSK	15	20	Max	AMR	NB	4.75	2N	13.27	/	/	/
N66	132322	15	16QAM	15	79	Max	AMR	NB	4.75	2N	13.23	/	/	/
N66	132322	15	16QAM	15	1	Max	AMR	NB	4.75	2N	13.14	/	/	/
N66	132322	15	64QAM	15	79	Max	AMR	NB	4.75	2N	13.12	/	/	/
N66	132322	15	256QAM	15	79	Max	AMR	NB	4.75	2N	13.23	/	/	/
N66	132322	10	QPSK	15	52	Max	AMR	NB	4.75	2N	13.16	/	/	/
N66	132322	10	QPSK	15	26	Max	AMR	NB	4.75	2N	13.10	/	/	/
N66	132322	10	QPSK	15	20	Max	AMR	NB	4.75	2N	13.15	/	/	/
N66	132322	10	16QAM	15	52	Max	AMR	NB	4.75	2N	13.29	/	/	/
N66	132322	10	16QAM	15	1	Max	AMR	NB	4.75	2N	13.02	/	/	/
N66	132322	10	64QAM	15	25	Max	AMR	NB	4.75	2N	13.24	/	/	/
N66	132322	10	256QAM	15	52	Max	AMR	NB	4.75	2N	13.03	/	/	/
N2	18900	10	16QAM	15	1	Max	AMR	NB	4.75	2N	13.16	/	/	/

N5	20525	10	16QAM	15	1	Max	AMR	NB	4.75	2N	13.16	/	/	/
N30	27710	10	16QAM	15	1	Max	AMR	NB	4.75	2N	13.14	/	/	/

Table6.3.4-2: the investigating results of **5G NR with NSA mode** IMS call

Band	Bandwidth	Modulation	RB Size	RB Offset	Volume Level	Code c	NB / WB	Bit Rate	2N/8N	Conv. Gain	FR	Min PN-SDNR	
	[MHz]							[kbps]	[N]	[dB]		[Hz]	[dB]
B2-N5/66	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.82	PASS	3150	25.38
B5-N2/66	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.79	PASS	3150	25.40
B12-N2/66	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.91	PASS	3150	25.40
B14-N2/66	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.96	PASS	3150	25.80
B30-N2/5/66	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.98	PASS	3150	25.41
B66-N2/5/66	10	16QAM	1	49	Max	EVS	NB	13.2	8N	16.95	PASS	3150	25.32
B2-N5/66	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.50	/	/	/
B5-N2/66	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.33	/	/	/
B12-N2/66	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.20	/	/	/
B14-N2/66	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.34	/	/	/
B30-N2/5/66	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.27	/	/	/
B66-N2/5/66	10	16QAM	1	49	Max	AMR	NB	4.75	2N	13.28	/	/	/

7. Test Facilities Utilized

No	Name	Type	SN	Manufacturer	Cal.Due Date
1	Measurement Frontend	Labcore	77000136	HEAD acoustics GmbH	2025-11-29
2	HEAD measurement system	HMS II.3	12306194(torso13740182)	HEAD acoustics GmbH	2024-10-25
3	Universal communication tester	CMW500	170430	Rohde&Schwarz	2024-08-03
4	Universal communication tester	CMX500	101626	Rohde&Schwarz	2024-08-05
5	Acoustic chamber	4.70 m×4.30 m×2.10 m	None	Ruisen	2026-10-26
Software					
Name		Version			
ACQUA		V 5.1.200			

END OF REPORT BODY

ANNEX A: EUT photograph

No phone's photos for Confidentiality requirements.

ANNEX B: EUT parameters

Disclaimer: The bands and codecs of EUT provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

General Information:

Description	Smart Phone
Model name/HVIN	U655AA,U655AC
FCC ID	XD6U655AA
Extreme Temperature	-10~45℃
Nominal Voltage	3.85V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.6V

Supported Bands:

UMTS Frequency Band(s)	B 1/2/4/5/8
GSM Frequency Band(s)	Not support
E-UTRA Frequency Band(s)	B 2/3/4/5/7/12/14/20/29/30/66
5G Frequency Band(s)	SA N2/5/30/66/77 NSA N2/5/66/77
WLAN Frequency Band(s)	2.4GHz/5GHz

Supported Codecs:

UMTS Audio Codec(s)	AMR NB/AMR WB
GSM Audio Codec (s)	Not support
E-UTRA Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/EVS SWB
5G Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/EVS SWB
WLAN Audio Codec(s)	AMR NB/AMR WB/EVS NB/EVS WB/EVS SWB

ANNEX C: Test Layout


Artificial Ear Type		3.3
Mounting Force [N]		2 and 8
Center Fork Offset [°]		0
Volume Level		7(1-7)
Angle settings		
Xe [°]	Ye [°]	Ze[°]
0	0	5

NOTE: The handset shall be placed in either the standard test position as specified in IEEE Std 269 or a recommended test position specified by the manufacturer that complies with the recommended test position requirements in IEEE Std 269.


No phone's photos for Confidentiality requirements.


ANNEX D: The Worst-case Measurement Data of The Chosen Codec of Telephony Call


SMD	Status	Single Value Description	Single Value	Object
5.1 Receive Volume Control Performance 8N 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Speech Level [dB[SPL]]	86.61	24T04Z100816 VoLTE EVS
5.1.1 -1 Conversation Gain 8N 16QAM,RB Size=1,RB Offset=49; Table-2	Ok	Calculated Value [dB]	16.61	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 400Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	27.69	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 500Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	25.90	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 630Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	25.99	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 800Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	21.27	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1000Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	31.34	24T04Z100816 VoLTE EVS

Receive path - distortion and noise 1250Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	30.86	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1600Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	35.38	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2000Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	35.61	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2500Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	31.04	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 3150Hz WB&NB 16QAM,RB Size=1,RB Offset=49; Table-2	Done	Distortion (Noise) [dB], 0.0 dB	24.03	24T04Z100816 VoLTE EVS
5.2 Receive path – distortion and noise 16QAM,RB Size=1,RB Offset=49; Table-2	Ok			24T04Z100816 VoLTE EVS
5.3 Receive Acoustic Frequency response Performance 16QAM,RB Size=1,RB Offset=49; Table-2	Ok	Min. dist. to tolerance scheme [dB], 3245.6 Hz		24T04Z100816 VoLTE EVS
5.1 Receive Volume Control Performance 8N	Done	Speech Level [dB[SPL]]	87.43	24T04Z100816 VoLTE EVS
5.1.1 -1 Conversation Gain 8N	Ok	Calculated Value [dB]	17.43	24T04Z100816 VoLTE EVS

Receive path - distortion and noise 250 WBonly	Done	Distortion (Noise) [dB], 0.0 dB	24.93	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 315Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	23.23	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 400Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	23.73	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	28.71	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 630Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.31	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 800Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.29	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.10	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1250Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	32.74	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1600Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.18	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.58	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.81	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 3150Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	31.88	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 4000Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	33.66	24T04Z100816 VoLTE EVS

Receive path - distortion and noise 5000Hz WBonly	Done	Distortion (Noise) [dB], 0.0 dB	34.54	24T04Z100816 VoLTE EVS
5.2 Receive path – distortion and noise	Ok			24T04Z100816 VoLTE EVS
5.3 Receive Acoustic Frequency response Performance	Ok	Min. dist. to tolerance scheme [dB], 230.2 Hz		24T04Z100816 VoLTE EVS
5.1 Receive Volume Control Performance 2N	Done	Speech Level [dB[SPL]]	83.03	24T04Z100816 VoLTE EVS
5.1.1 -1 Conversation Gain 2N	Ok	Calculated Value [dB]	13.03	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 400Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	23.07	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	23.57	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 630Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	26.27	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 800Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	22.71	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	34.10	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1250Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	30.97	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1600Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	35.57	24T04Z100816 VoLTE EVS

Receive path - distortion and noise 2000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	35.65	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	31.32	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 3150Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	24.36	24T04Z100816 VoLTE EVS
5.2 Receive path – distortion and noise	Ok			24T04Z100816 VoLTE EVS
5.3 Receive Acoustic Frequency response Performance	Ok	Min. dist. to tolerance scheme [dB], 3245.6 Hz		24T04Z100816 VoLTE EVS
5.1 Receive Volume Control Performance 2N	Done	Speech Level [dB[SPL]]	83.03	24T04Z100816 VoLTE EVS
5.1.1 -1 Conversation Gain 2N	Ok	Calculated Value [dB]	13.03	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 250 WOnly	Done	Distortion (Noise) [dB], 0.0 dB	25.11	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 315Hz WOnly	Done	Distortion (Noise) [dB], 0.0 dB	22.92	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 4000Hz WOnly	Done	Distortion (Noise) [dB], 0.0 dB	33.43	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 400Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	23.78	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	28.96	24T04Z100816 VoLTE EVS

Receive path - distortion and noise 630Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	33.43	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 800Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.35	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.37	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1250Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	32.75	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 1600Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	38.39	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2000Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	37.80	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 2500Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	34.55	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 3150Hz WB&NB	Done	Distortion (Noise) [dB], 0.0 dB	32.01	24T04Z100816 VoLTE EVS
Receive path - distortion and noise 5000Hz WBOnly	Done	Distortion (Noise) [dB], 0.0 dB	34.48	24T04Z100816 VoLTE EVS
5.2 Receive path – distortion and noise	Ok			24T04Z100816 VoLTE EVS
5.3 Receive Acoustic Frequency response Performance	Ok	Min. dist. to tolerance scheme [dB], 205.7 Hz		24T04Z100816 VoLTE EVS

1.02

ANNEX E: The Worst-case Measurement Data of Other Codecs of Telephony Call

SMD	Status	Single Value Description	Single Value	Object
5.1 Receive Volume Control Performance 8N Table-8	Done	Speech Level [dB[SPL]]	86.75	24T04Z100816 VoNR AMR
5.1.1 -1 Conversation Gain 8N Table-8	Ok	Calculated Value [dB]	16.75	24T04Z100816 VoNR AMR
5.1 Receive Volume Control Performance 8N Table-8	Done	Speech Level [dB[SPL]]	87.04	24T04Z100816 VoNR AMR
5.1.1 -1 Conversation Gain 8N Table-8	Ok	Calculated Value [dB]	17.04	24T04Z100816 VoNR AMR
5.1 Receive Volume Control Performance 2N 10MHz,16QAM,SCS=15,RB=1; Table-5; Table-8	Done	Speech Level [dB[SPL]]	83.02	24T04Z100816 VoNR AMR
5.1.1 -1 Conversation Gain 2N 10MHz,16QAM,SCS=15,RB=1; Table-5; Table-8	Ok	Calculated Value [dB]	13.02	24T04Z100816 VoNR AMR
5.1 Receive Volume Control Performance 2N Table-8	Done	Speech Level [dB[SPL]]	83.20	24T04Z100816 VoNR AMR
5.1.1 -1 Conversation Gain 2N Table-8	Ok	Calculated Value [dB]	13.20	24T04Z100816 VoNR AMR

ANNEX F: FREQUENCY RESPONSE USED DF and 1/12 OCTAVE

Title:		5.3 Receive Acoustic Frequency response Performance	
Mode:		Do measurement	File to analyse:
Signal			
Source:		ieee_male_dual_wb, Adj. -90 dB; -4 dB	
Measurement			
Direction:		Out 2 -> In 2	Run time info: No
Pre measure info:		No	
Filter:		FIR	
Analysis			
Reference:		rcv_wb_ref1 (ext. created)	
Time range:		250.0..10450.0 ms	
Transformation:		12th octave, Hanning, FFT:16384, OV:75%	
Tolerance scheme:		wb_fr_tol, adj. to upper, 100..8000 Hz	
Calculate value:		No	
Result			
Check min. dist.:		> 0.0 dB	
Representation:		-5..5 , 100..8000 Hz, -50..50 dB	
Special features			
Special features:		Comp.delay, Store to rcv_fr_wb.fft	

Filter

FF/DF Average

Channel 1: Off Channel 2: Off

Filter measured signal

Use IIR filter 1: Off Mid./edge frequency: 1000.0 Hz

Kind: Bandstop Quality: 1.000

Order: 2nd order Amplification: 0 dB

Type: Butterworth

Filter 2

Use IIR filter 2: Off Mid./edge frequency: 1000.0 Hz

Kind: Bandstop Quality: 1.000

Order: 2nd order Amplification: 0 dB

Type: Butterworth

Filter 3

Use IIR filter 3: Off Mid./edge frequency: 1000.0 Hz

Kind: Bandstop Quality: 1.000

Order: 2nd order Amplification: 0 dB

Type: Butterworth

Filter 4

Use IIR filter 4: Off Mid./edge frequency: 1000.0 Hz

Kind: Bandstop Quality: 1.000

Order: 2nd order Amplification: 0 dB

Type: Butterworth

IIR Filter combination

Filter combination: serial

FIR Filter

Use FIR Filter: Ch2 FIR filter: p2df_ieee1652.fft

OK

ANNEX G: HATS CERTIFICATE

中国计量科学研究院



证书编号 LSsx2022-08382

校准结果

表 2 HATS 右耳校准结果

频率/Hz	31.5	63	125	250
REF/dB	92.45	92.40	92.39	92.46
(REF+10)/dB	102.45	102.40	102.38	102.47
差值/dB	10.00	10.00	9.99	10.01
频率/Hz	500	1000	2000	16000
REF/dB	92.83	94.00	98.20	94.12
(REF+10)/dB	102.83	104.00	108.19	103.81
差值/dB	10.00	10.00	9.99	9.69

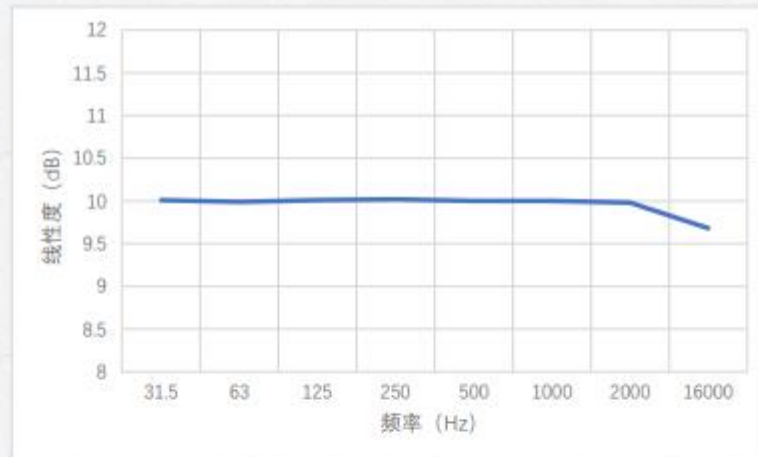


图 2 HATS 右耳线性度图

输出部分

2、频率响应

校准时用 B&K 4938 型压力场传声器在 HATS 嘴正前方，在其参考点处进行校准，测得其嘴（配 PA50 型功率放大器）的频谱如图 3 所示，100 Hz 至 20 kHz 范围内 1/3 倍频程中心频率频谱数据见表 3。

2019-jz-R0520

ANNEX H: ACOUSTIC CHAMBER CERTIFICATE



中国计量科学研究院

证书编号 LSsx2021-19386


校准结果

二、背景噪声校准结果

正常情况下，消声室的 A 计权背景噪声为 14 dB，其 1/3 倍频频谱见图 2。

[dB/20.0u Pa]

Autospectrum(zb) - Input
Working : Input ; Input : CFB Analyzer

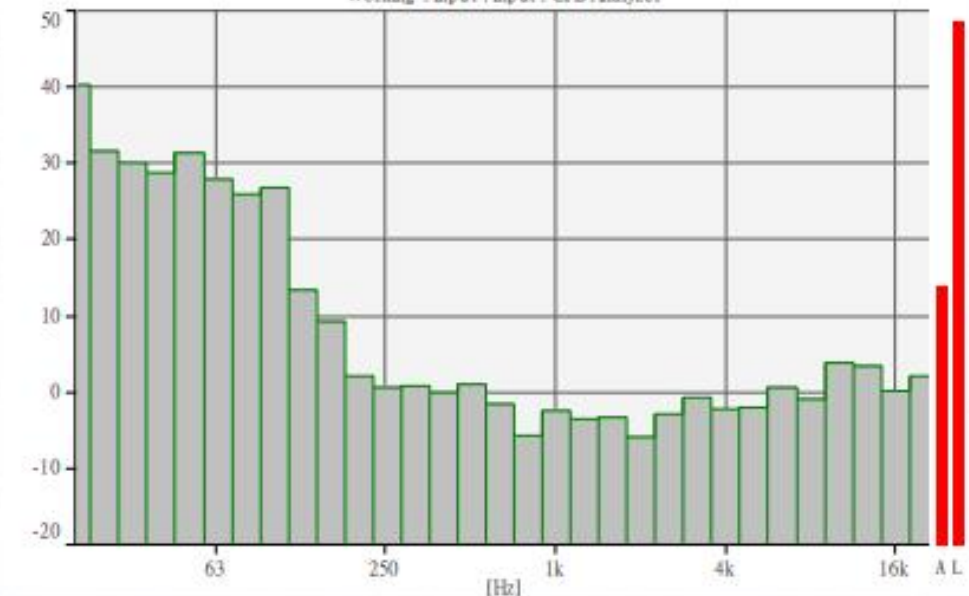

[Hz]

图 2 背景噪声频谱图

声压级校准结果不确定度：U=0.6 dB (k=2)

-----以下空白-----

说明：

根据校准规范 JJF 1147-2006 的规定，通常情况下 60 个月校准一次。

声明：

1. 我院仅对加盖“中国计量科学研究院校准专用章”的完整证书负责。
2. 本证书的校准结果仅对本次所校准的计量器具有效。

校准员： 郑云山

核验员： 牛辉

2019-jz-R0520

第15页共15页

ANNEX I: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26th day of June 2023.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****