Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz	RU configuration	484/65

Horizontal

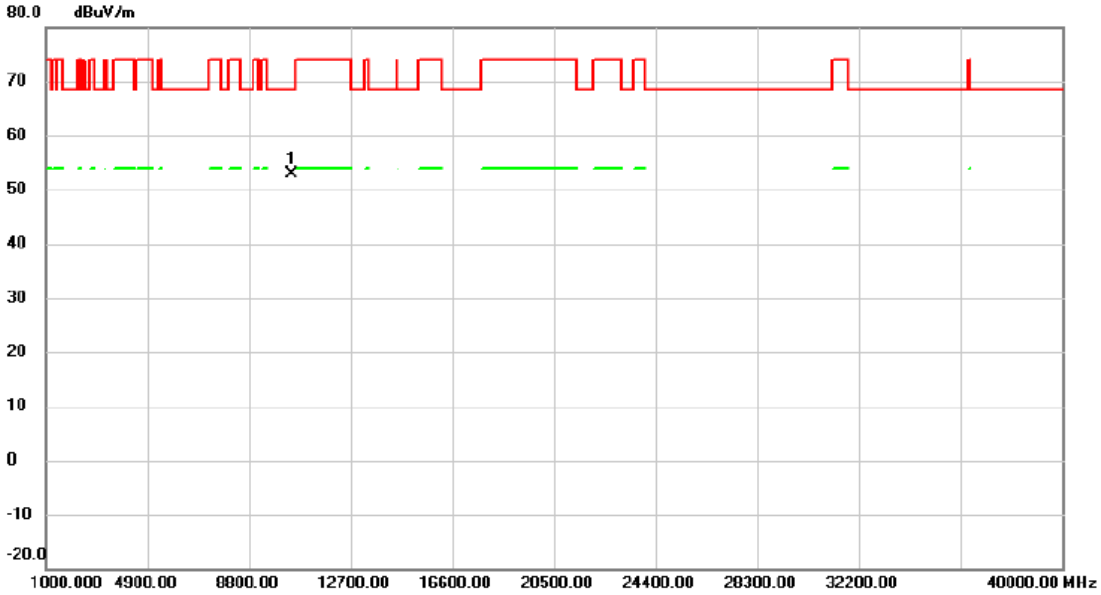

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10458.92	51.88	0.98	52.86	68.30	-15.44	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	52/40

Vertical

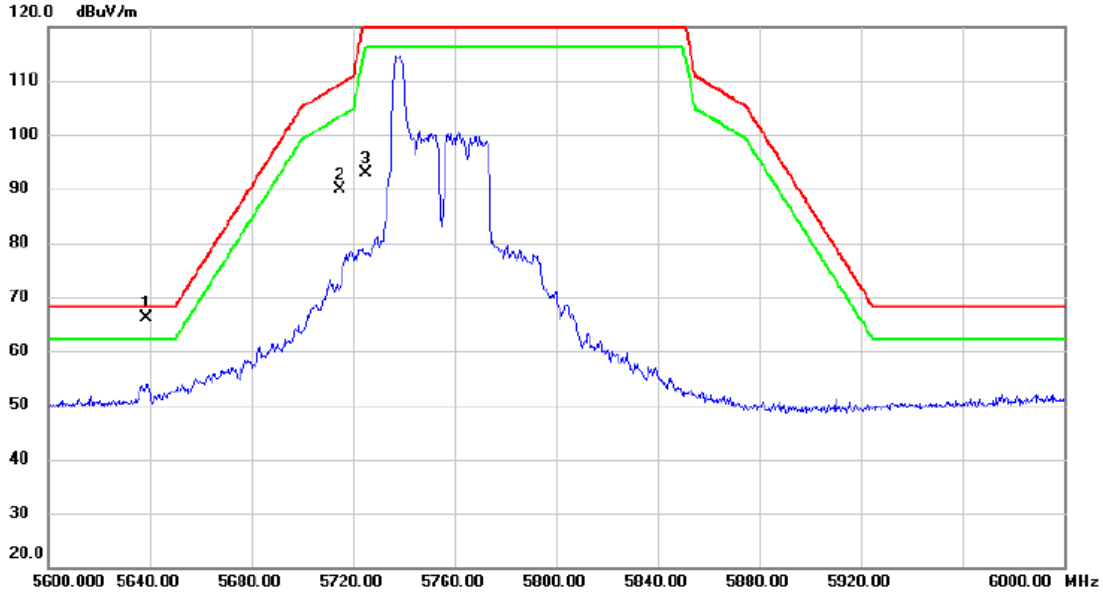

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5638.600	24.55	41.47	66.02	68.20	-2.18	peak	
2		5715.000	48.21	41.58	89.79	109.40	-19.61	peak	
3		5725.000	51.35	41.60	92.95	122.20	-29.25	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	52/40

Horizontal

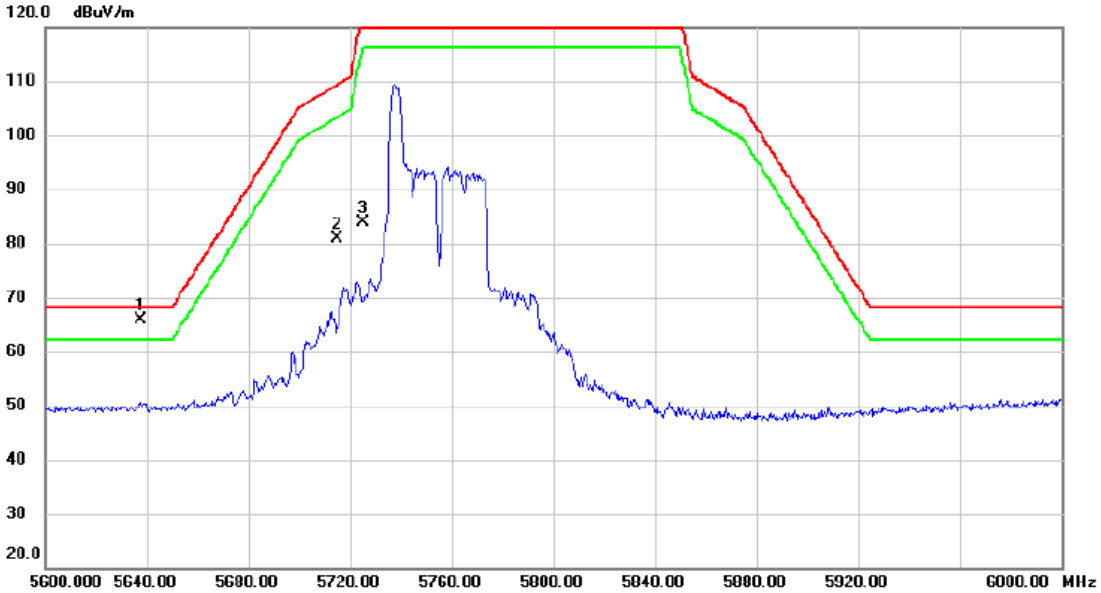

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5637.600	24.50	41.47	65.97	68.20	-2.23	peak	
2		5715.000	39.36	41.58	80.94	109.40	-28.46	peak	
3		5725.000	42.36	41.60	83.96	122.20	-38.24	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	106/54

Vertical

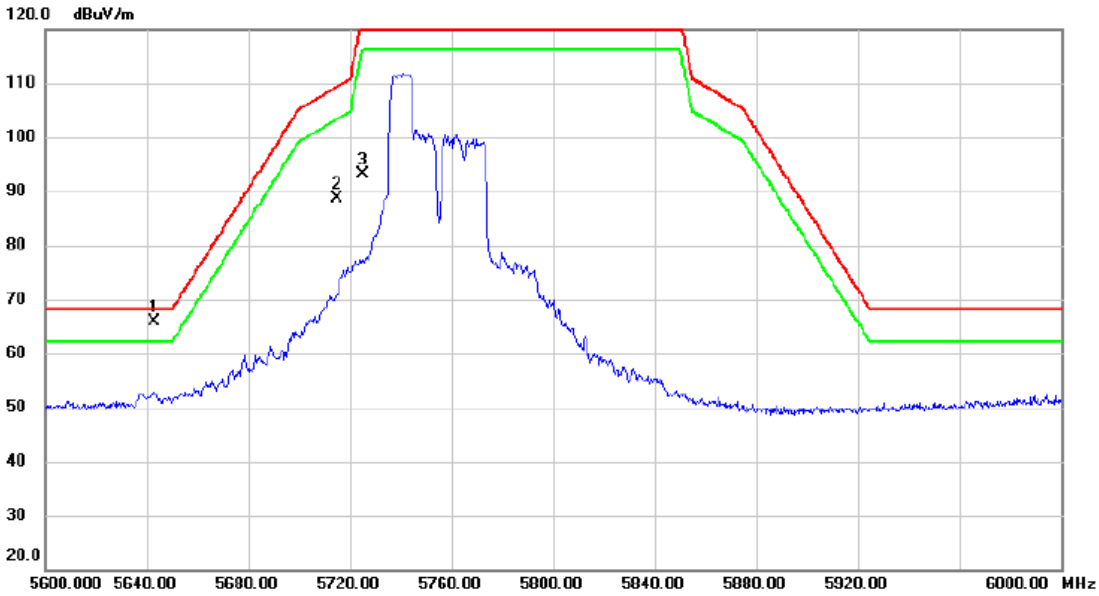

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5642.800	24.46	41.47	65.93	68.20	-2.27	peak	
2		5715.000	47.11	41.58	88.69	109.40	-20.71	peak	
3		5725.000	51.54	41.60	93.14	122.20	-29.06	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	106/54

Horizontal

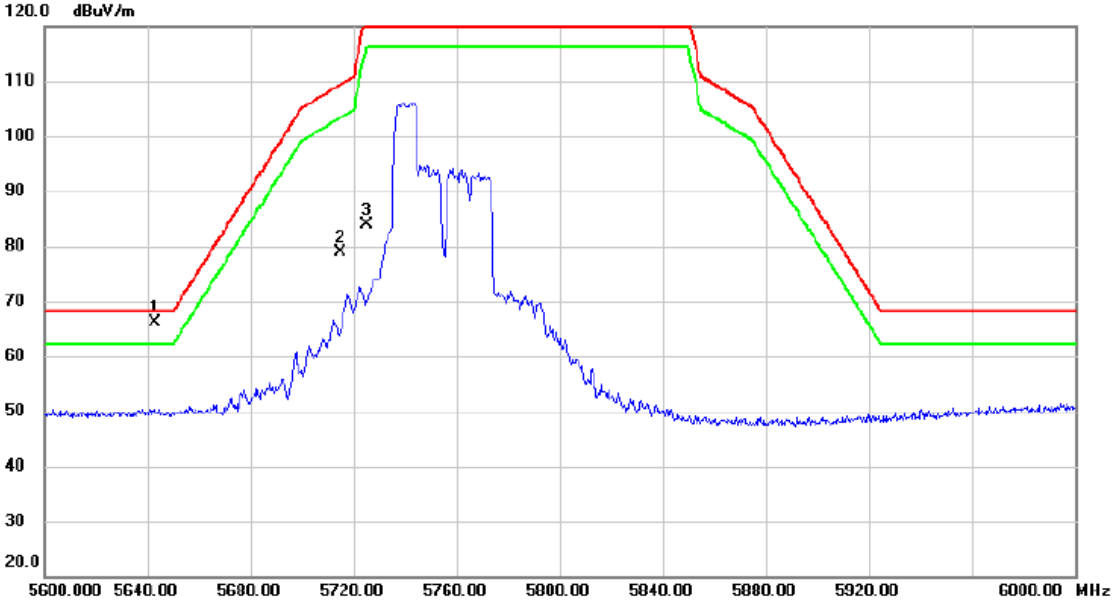

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5642.800	24.61	41.47	66.08	68.20	-2.12	peak	
2		5715.000	37.35	41.58	78.93	109.40	-30.47	peak	
3		5725.000	42.17	41.60	83.77	122.20	-38.43	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	242/61

Vertical

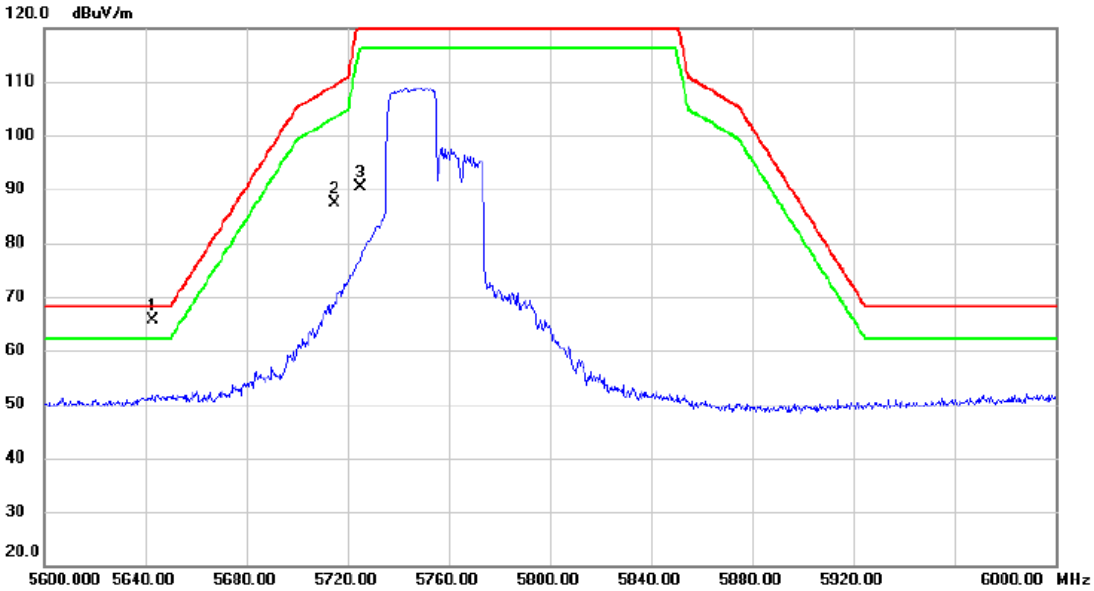

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5642.800	24.11	41.47	65.58	68.20	-2.62	peak	
2		5715.000	45.91	41.58	87.49	109.40	-21.91	peak	
3		5725.000	48.67	41.60	90.27	122.20	-31.93	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	242/61

Horizontal

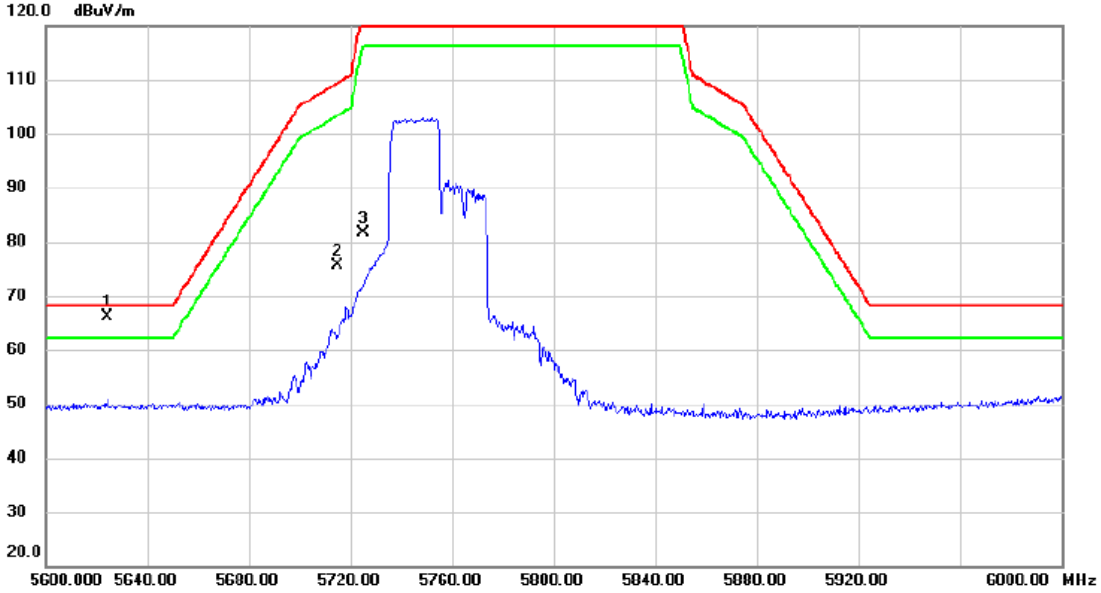

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5624.000	24.75	41.44	66.19	68.20	-2.01	peak	
2		5715.000	34.03	41.58	75.61	109.40	-33.79	peak	
3		5725.000	40.03	41.60	81.63	122.20	-40.57	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	484/65

Vertical

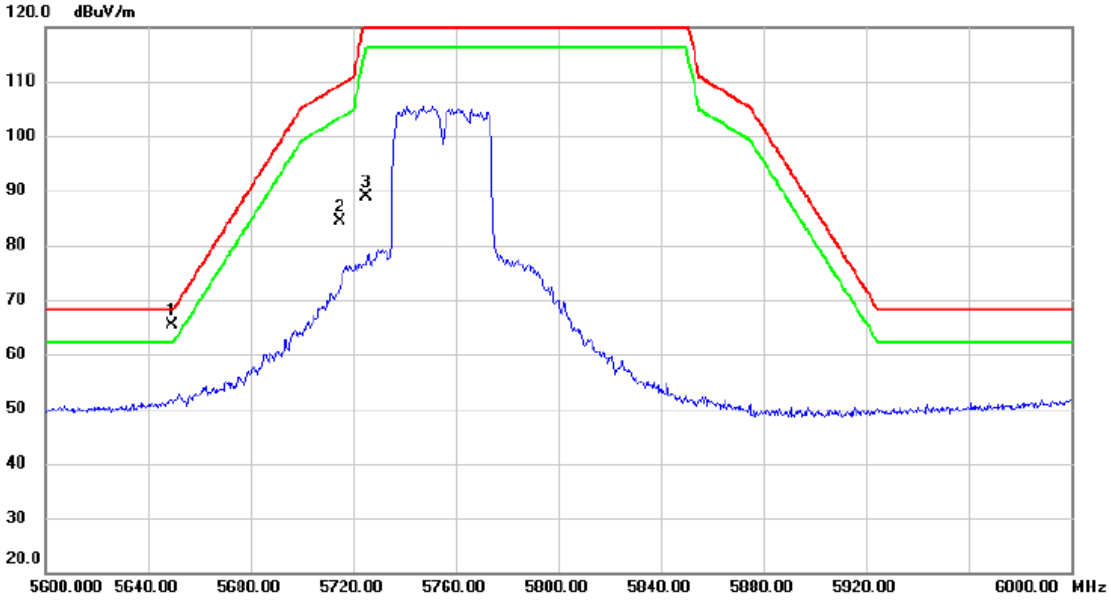

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5649.400	23.85	41.48	65.33	68.20	-2.87	peak	
2		5715.000	42.88	41.58	84.46	109.40	-24.94	peak	
3		5725.000	47.25	41.60	88.85	122.20	-33.35	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	484/65

Vertical

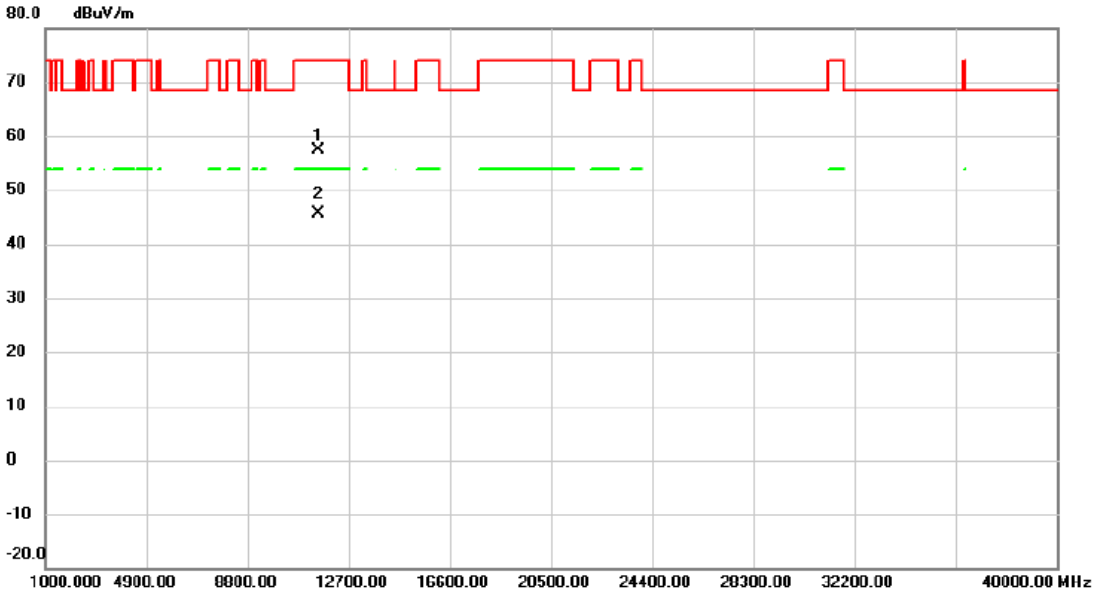

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11507.95	55.19	2.18	57.37	74.00	-16.63	peak	
2	*	11508.85	43.38	2.17	45.55	54.00	-8.45	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	484/65

Horizontal

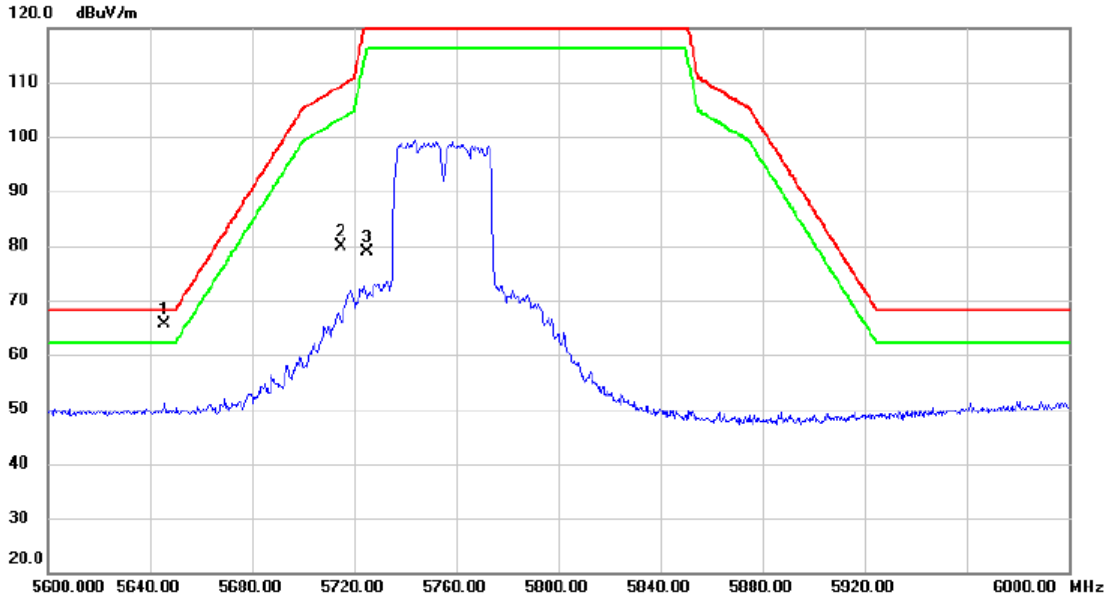

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5645.600	24.08	41.48	65.56	68.20	-2.64	peak	
2		5715.000	38.39	41.58	79.97	109.40	-29.43	peak	
3		5725.000	37.29	41.60	78.89	122.20	-43.31	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz	RU configuration	484/65

Horizontal

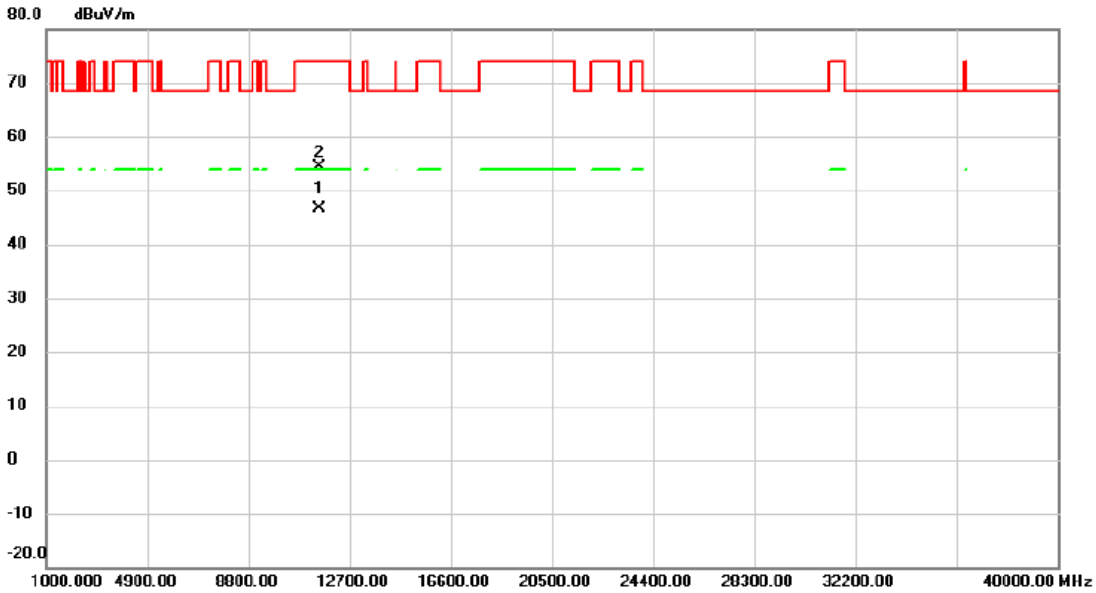

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11511.69	44.52	2.17	46.69	54.00	-7.31	AVG	
2		11512.02	52.18	2.17	54.35	74.00	-19.65	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	52/40

Vertical

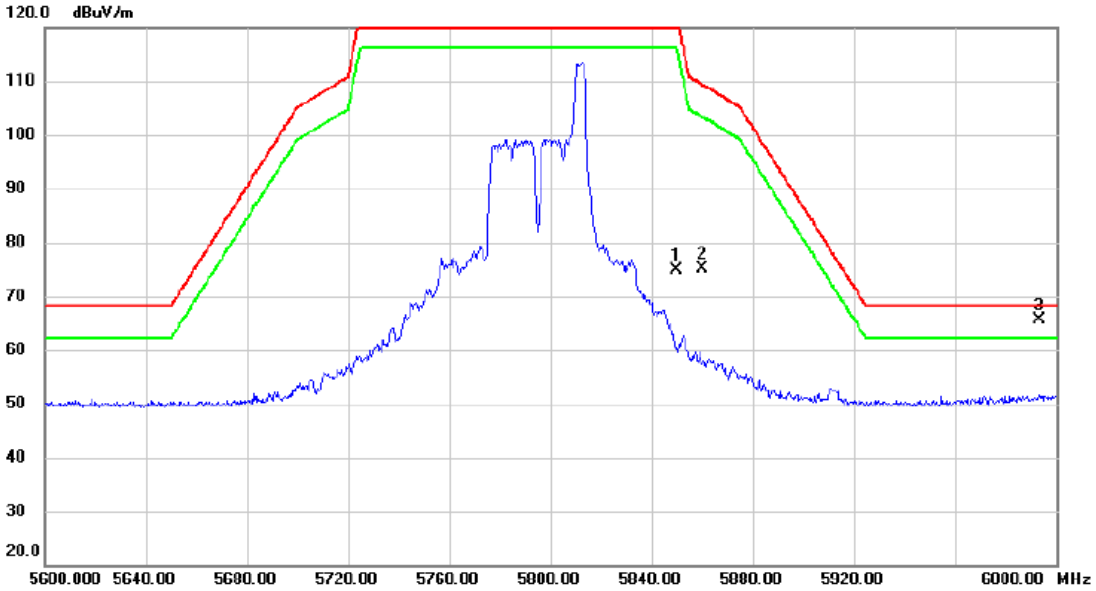

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	33.12	41.80	74.92	122.20	-47.28	peak	
2		5860.000	33.29	41.81	75.10	109.40	-34.30	peak	
3	*	5993.200	23.49	42.02	65.51	68.20	-2.69	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	52/40

Horizontal

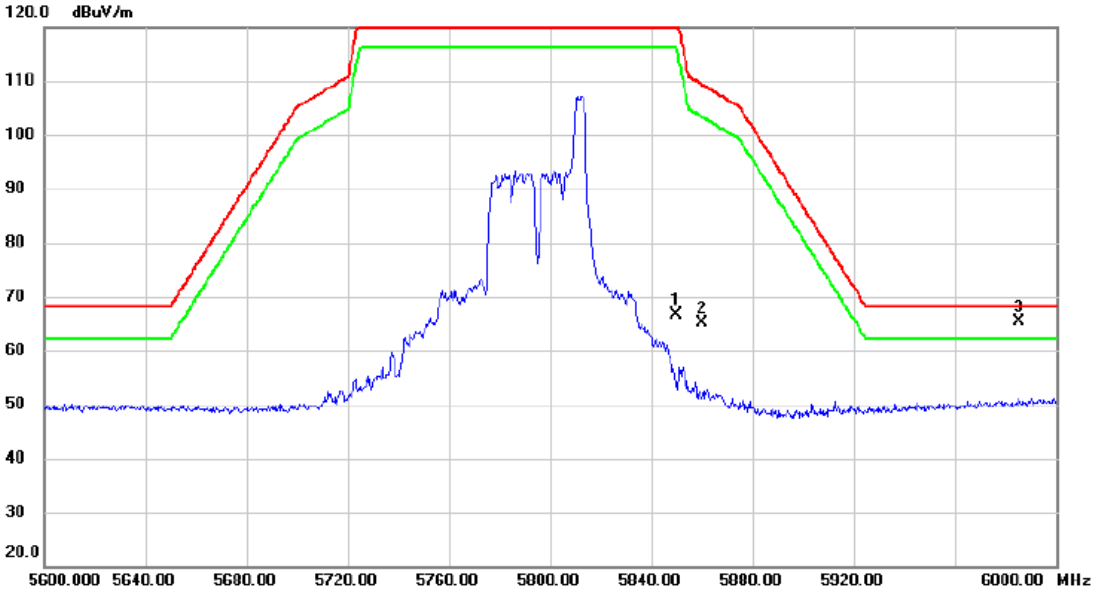

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	24.82	41.80	66.62	122.20	-55.58	peak	
2		5860.000	23.37	41.81	65.18	109.40	-44.22	peak	
3	*	5985.200	23.37	42.00	65.37	68.20	-2.83	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	106/54

Vertical

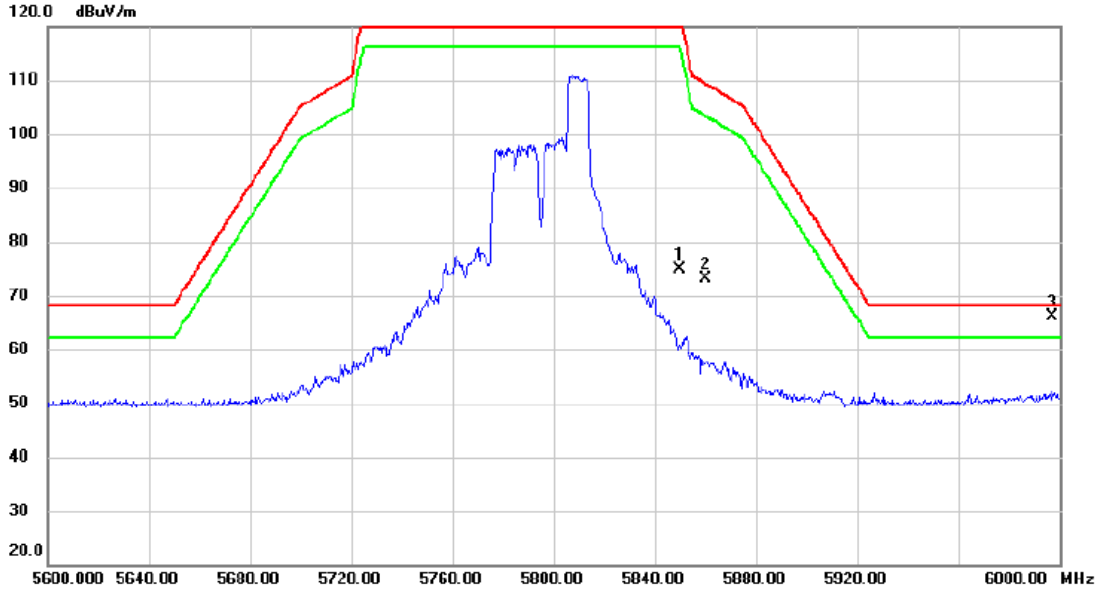

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	33.17	41.80	74.97	122.20	-47.23	peak	
2		5860.000	31.22	41.81	73.03	109.40	-36.37	peak	
3	*	5997.200	24.18	42.03	66.21	68.20	-1.99	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	106/54

Horizontal

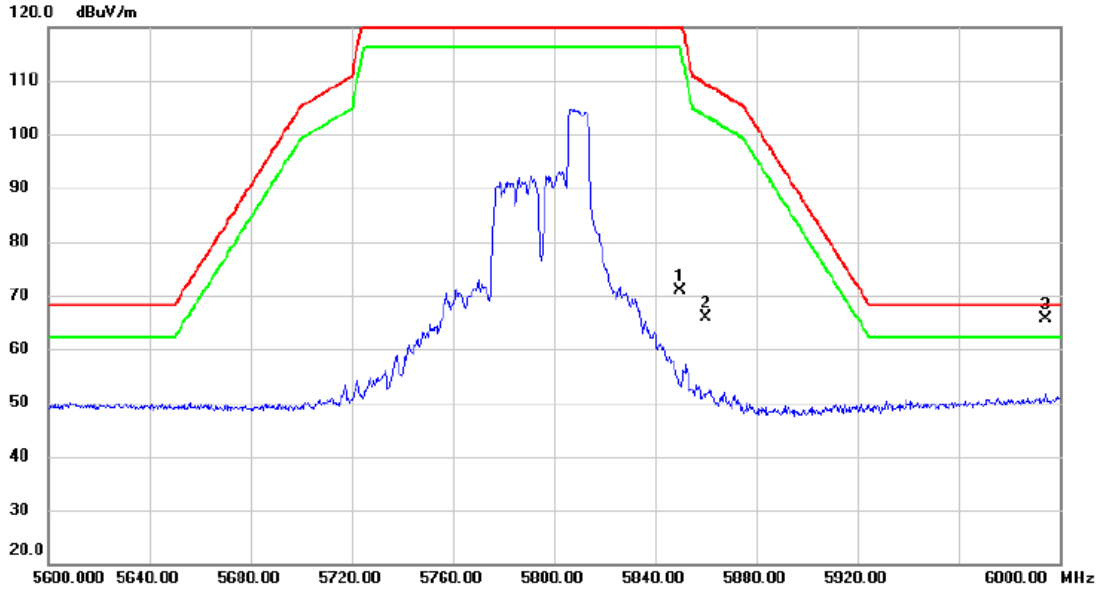

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	29.18	41.80	70.98	122.20	-51.22	peak	
2		5860.000	24.17	41.81	65.98	109.40	-43.42	peak	
3	*	5994.600	23.69	42.02	65.71	68.20	-2.49	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	242/61

Vertical

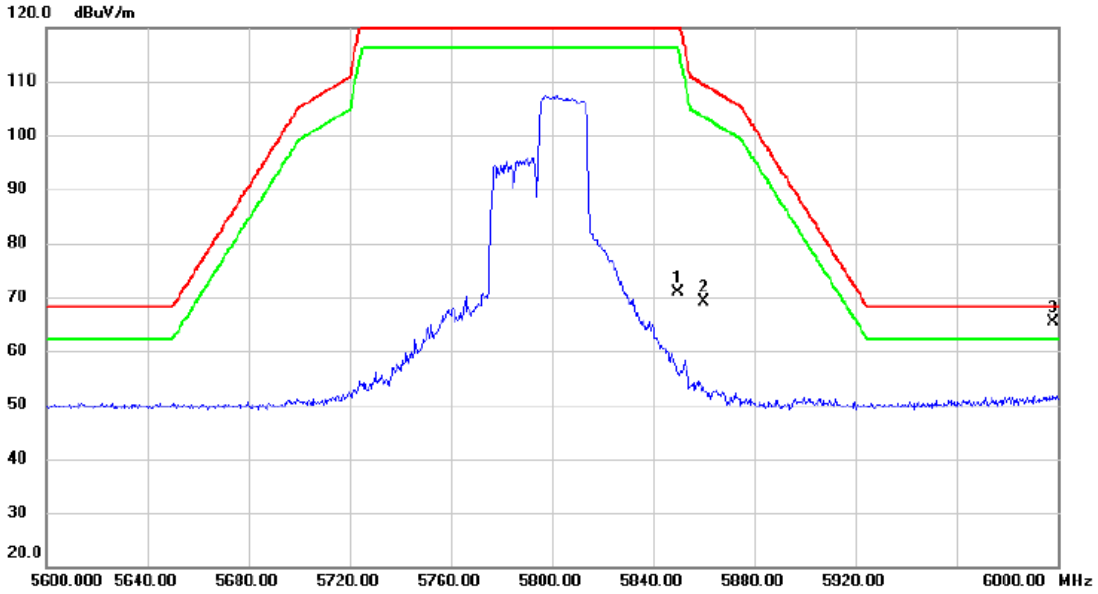

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	29.15	41.80	70.95	122.20	-51.25	peak	
2		5860.000	27.31	41.81	69.12	109.40	-40.28	peak	
3	*	5998.400	23.33	42.03	65.36	68.20	-2.84	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	242/61

Horizontal

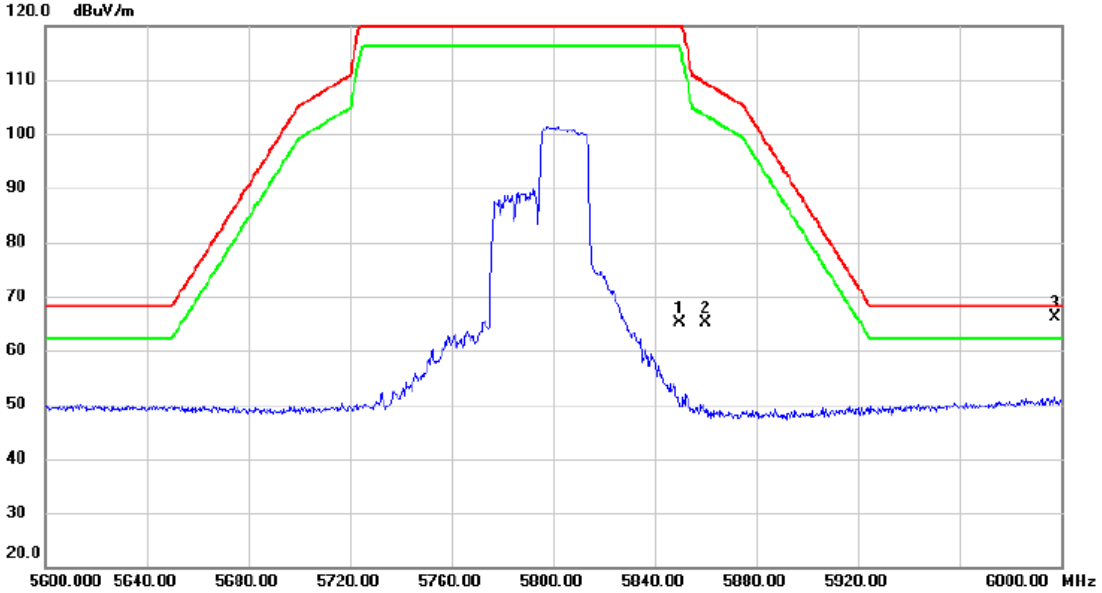

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	23.23	41.80	65.03	122.20	-57.17	peak	
2		5860.000	23.20	41.81	65.01	109.40	-44.39	peak	
3	*	5997.800	24.05	42.03	66.08	68.20	-2.12	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	484/65

Vertical

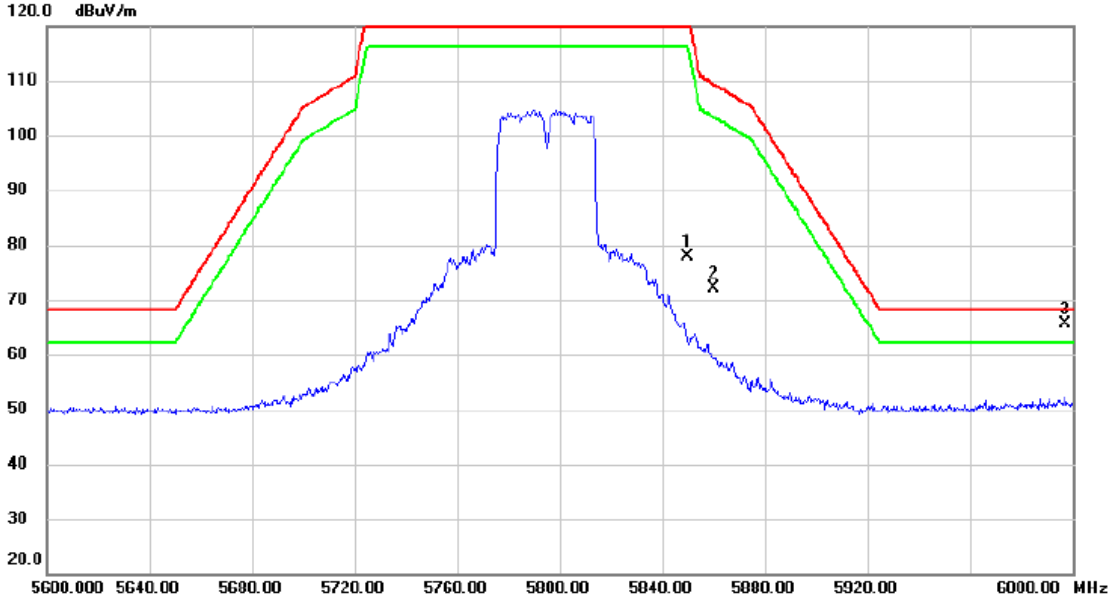

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	36.10	41.80	77.90	122.20	-44.30	peak	
2		5860.000	30.41	41.81	72.22	109.40	-37.18	peak	
3	*	5996.800	23.71	42.03	65.74	68.20	-2.46	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	484/65

Vertical

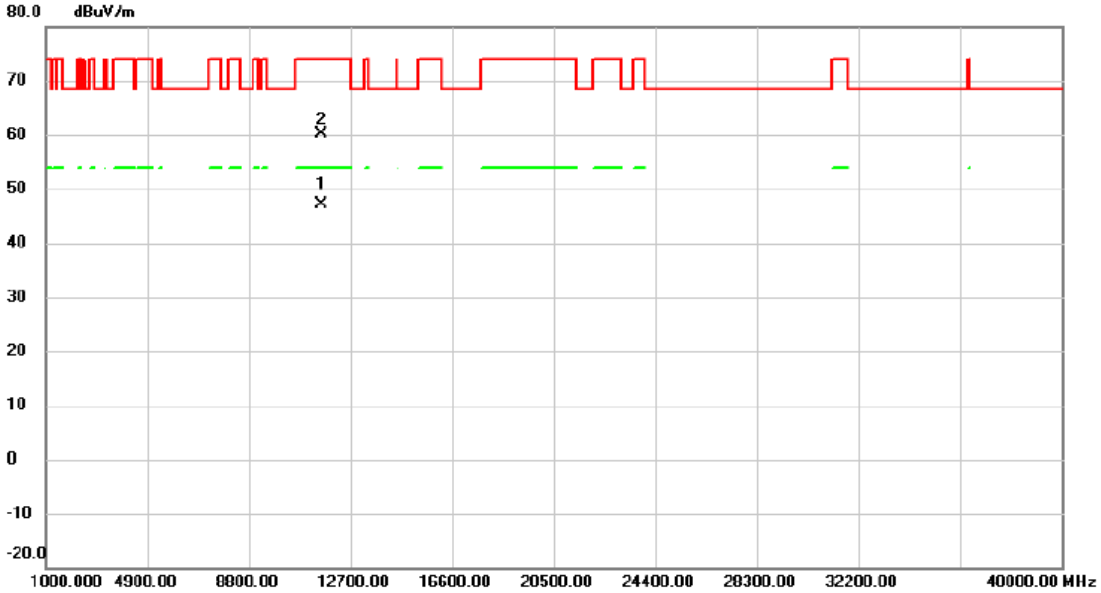

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11588.80	45.09	2.09	47.18	54.00	-6.82	AVG	
2		11589.30	58.06	2.09	60.15	74.00	-13.85	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	484/65

Horizontal

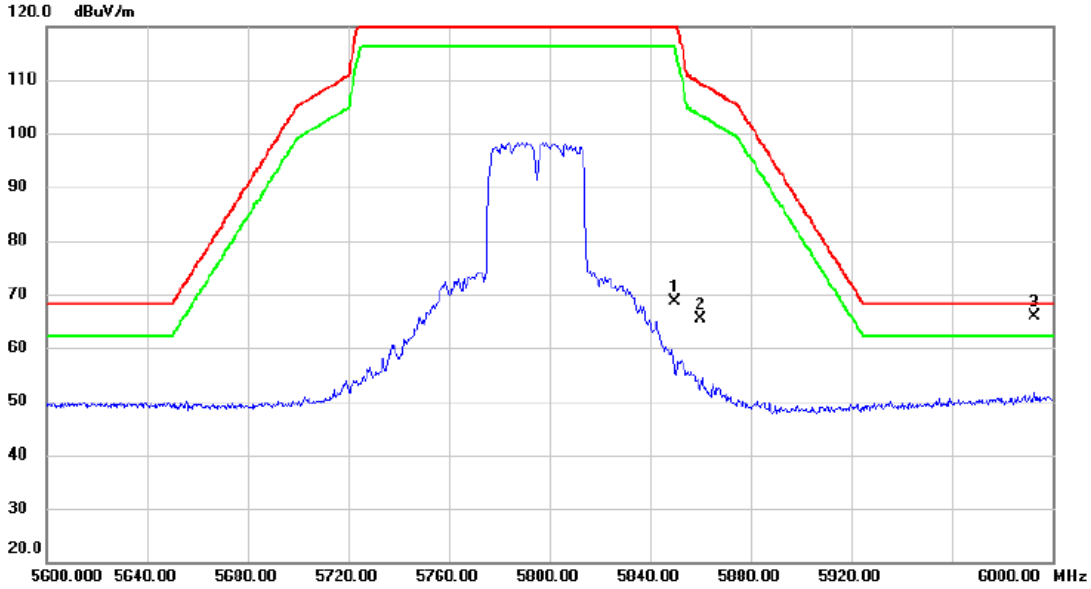

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5850.000	26.72	41.80	68.52	122.20	-53.68	peak	
2		5860.000	23.61	41.81	65.42	109.40	-43.98	peak	
3	*	5992.800	23.87	42.02	65.89	68.20	-2.31	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz	RU configuration	484/65

Horizontal

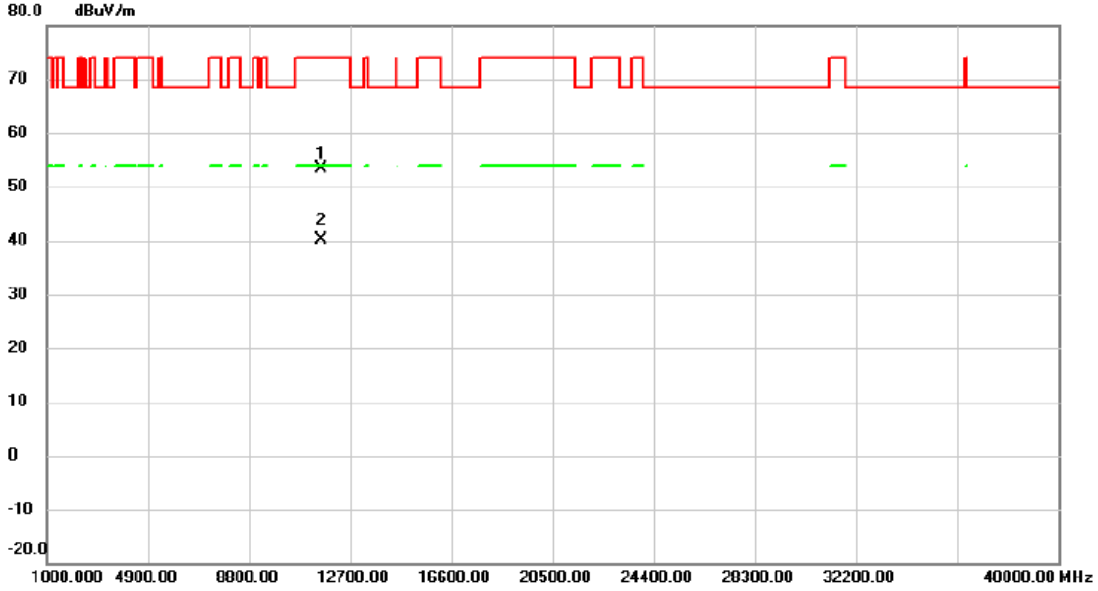

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.36	51.41	2.08	53.49	74.00	-20.51	peak	
2	*	11591.30	37.94	2.08	40.02	54.00	-13.98	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	106/53

Vertical

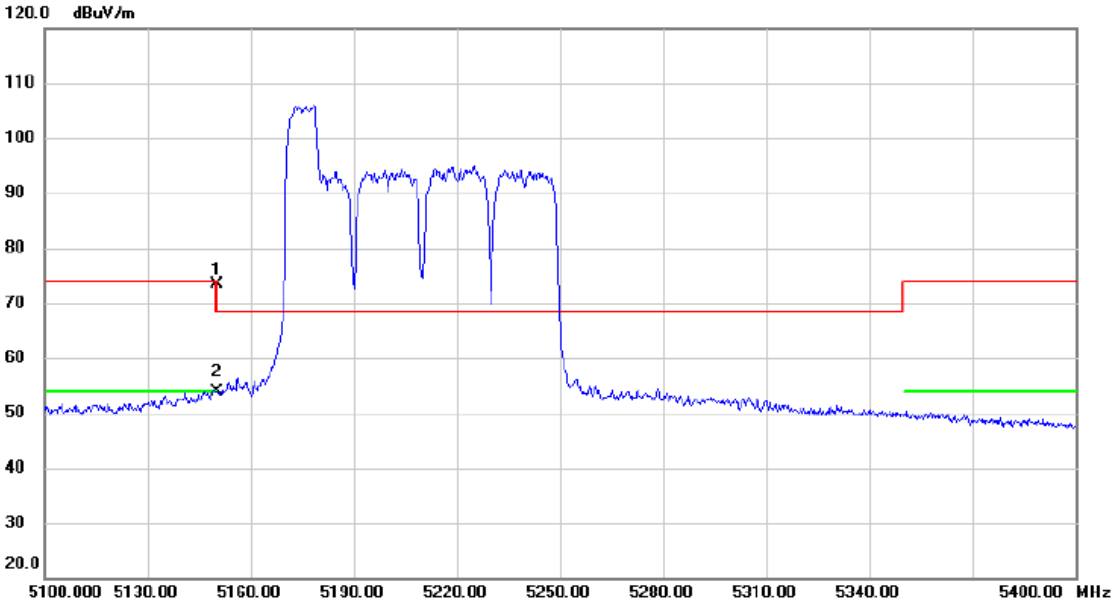

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	32.79	40.53	73.32	74.00	-0.68	peak	
2	*	5150.000	13.33	40.53	53.86	54.00	-0.14	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	106/53

Horizontal

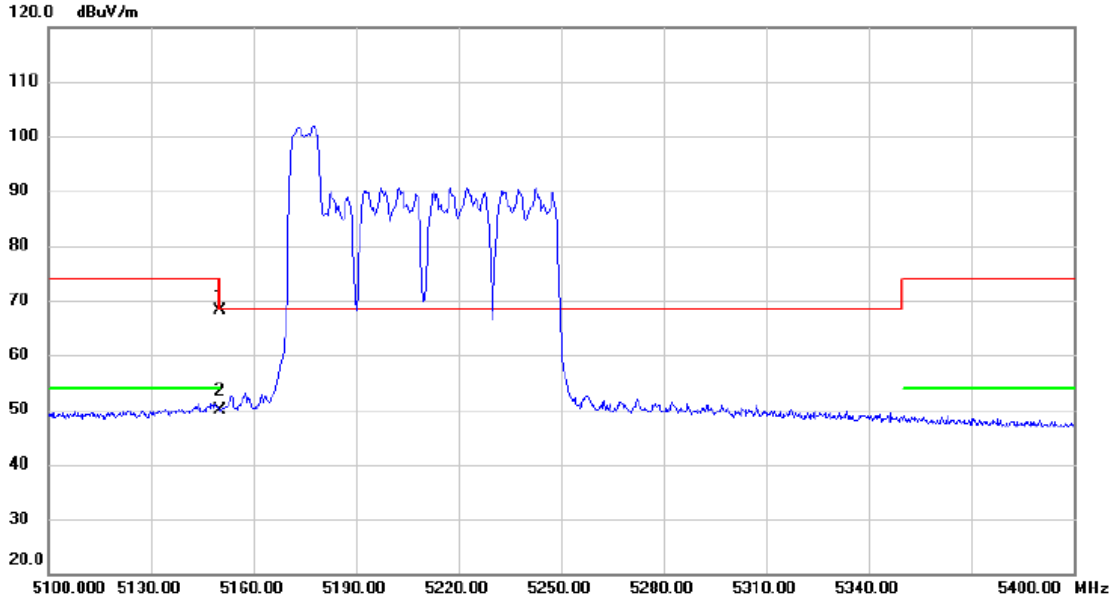

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	27.66	40.53	68.19	74.00	-5.81	peak	
2	*	5150.000	9.23	40.53	49.76	54.00	-4.24	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	242/64

Vertical

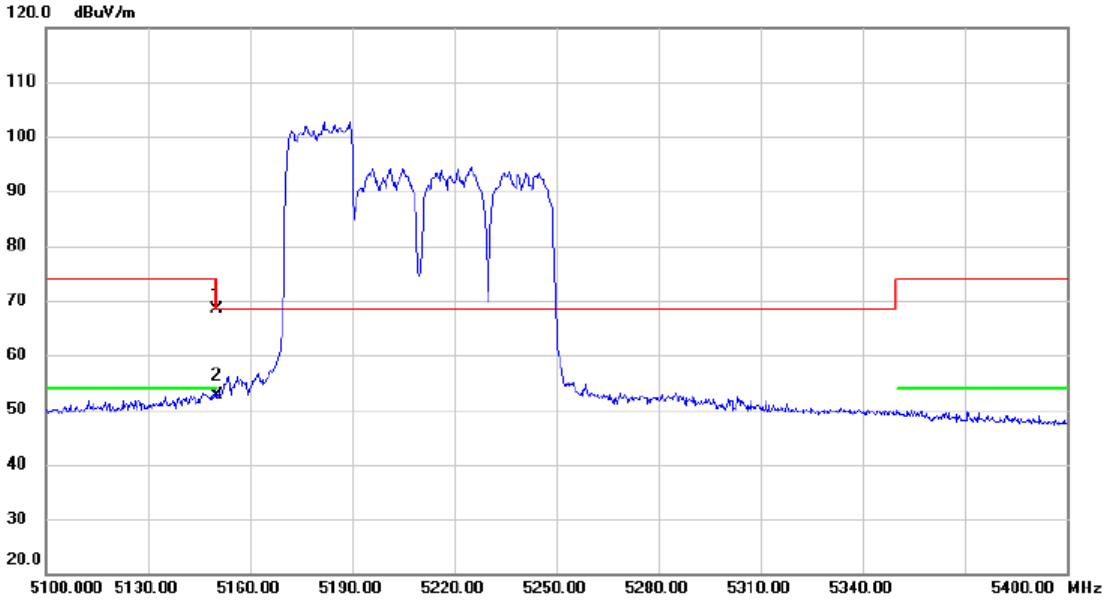

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	27.93	40.53	68.46	74.00	-5.54	peak	
2	*	5150.000	12.10	40.53	52.63	54.00	-1.37	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	242/64

Horizontal

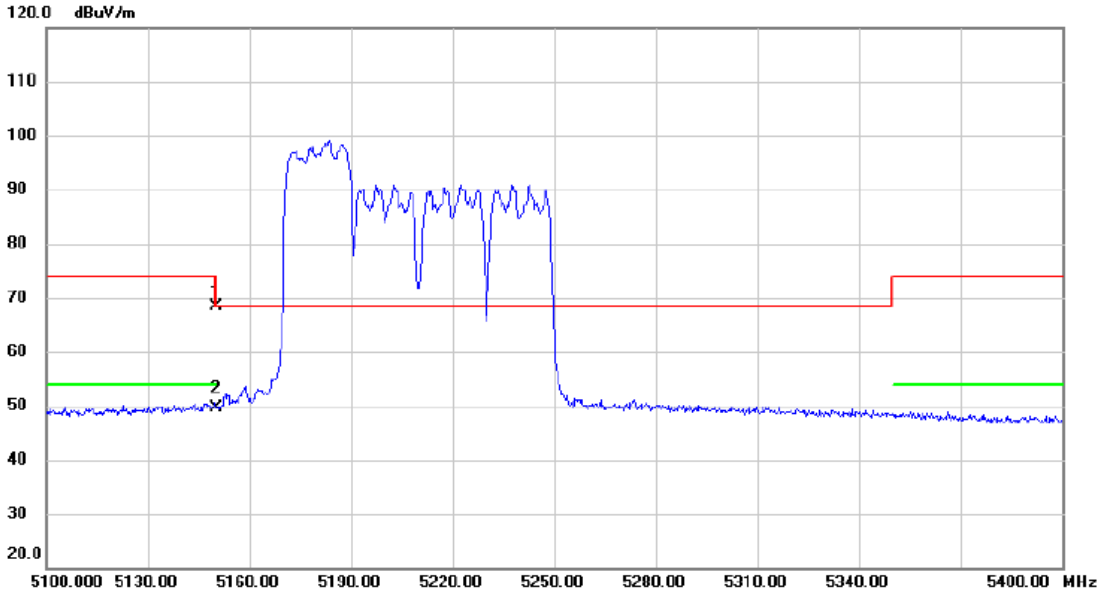

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	27.84	40.53	68.37	74.00	-5.63	peak	
2	*	5150.000	8.98	40.53	49.51	54.00	-4.49	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	484/66

Vertical

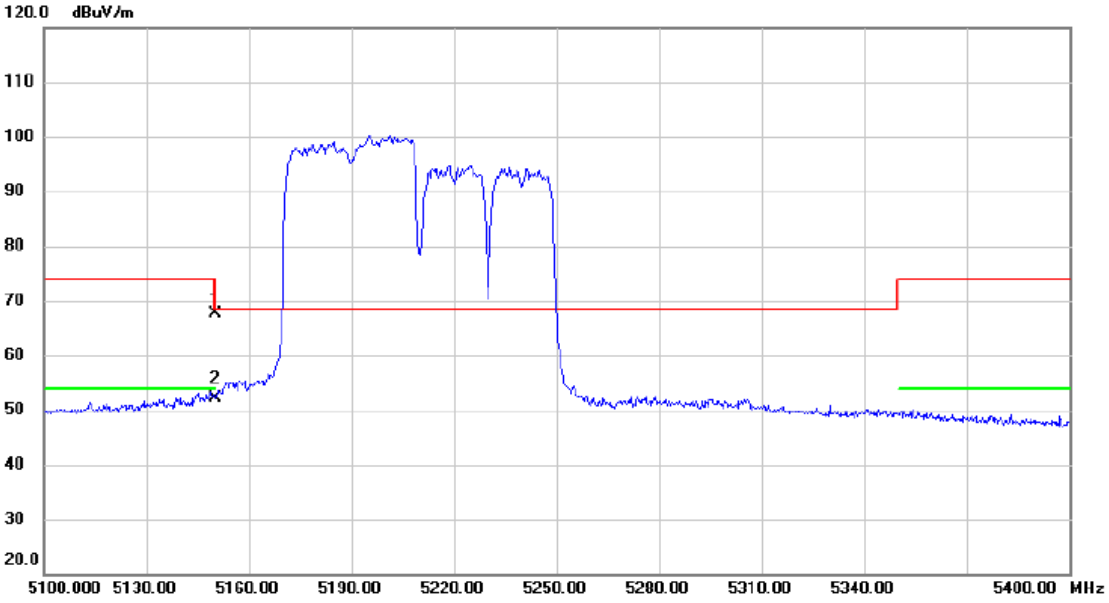

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	26.98	40.53	67.51	74.00	-6.49	peak	
2	*	5150.000	11.67	40.53	52.20	54.00	-1.80	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	484/66

Horizontal

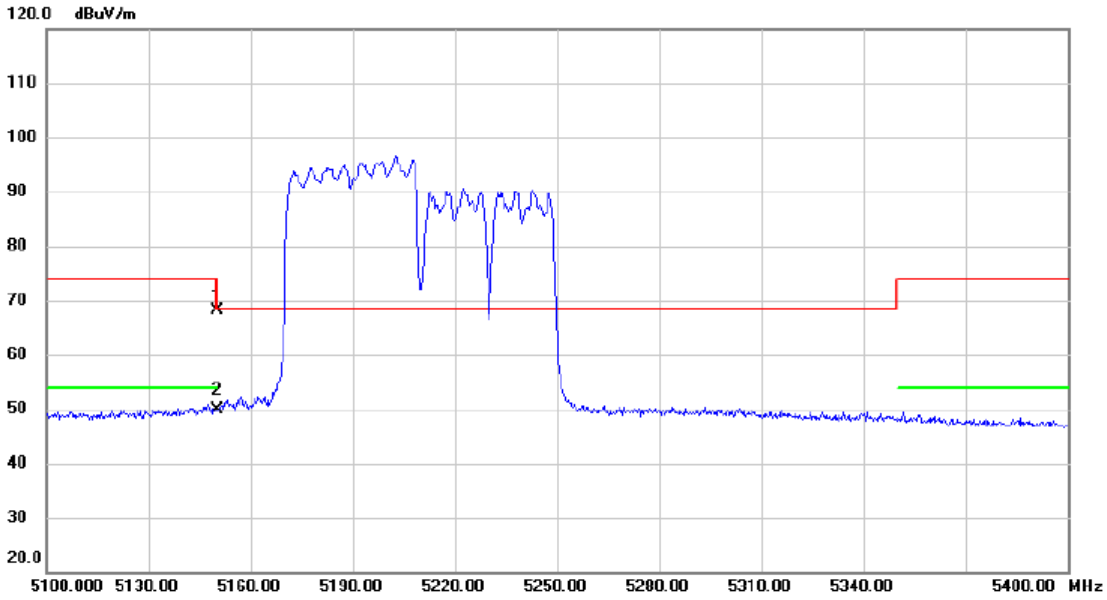

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	27.66	40.53	68.19	74.00	-5.81	peak	
2	*	5150.000	9.29	40.53	49.82	54.00	-4.18	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	996/67

Vertical

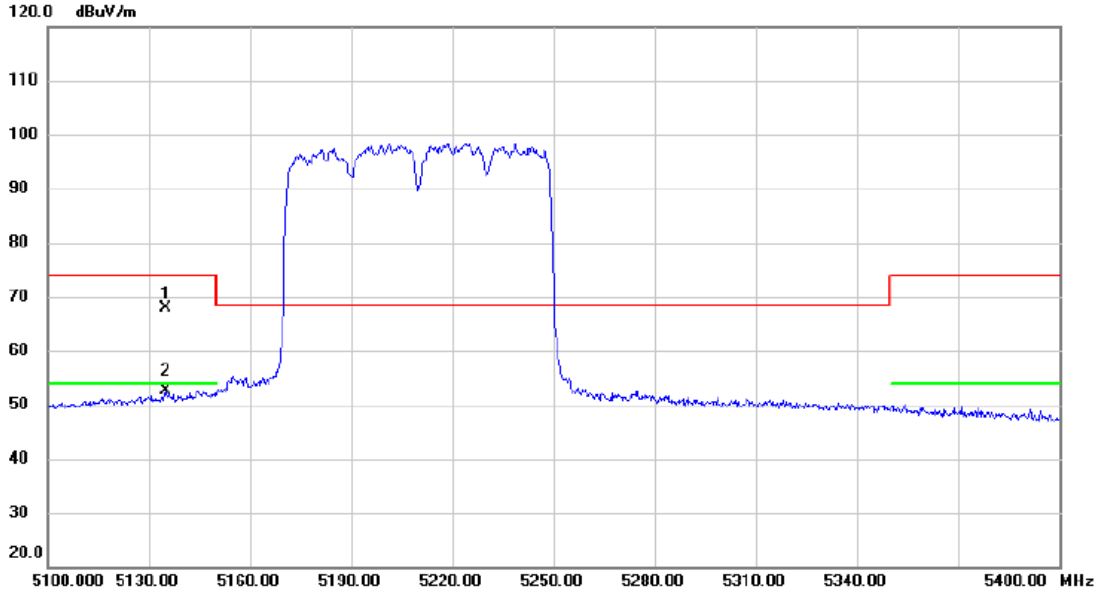

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5134.950	27.45	40.50	67.95	74.00	-6.05	peak	
2	*	5134.950	12.05	40.50	52.55	54.00	-1.45	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	996/67

Vertical

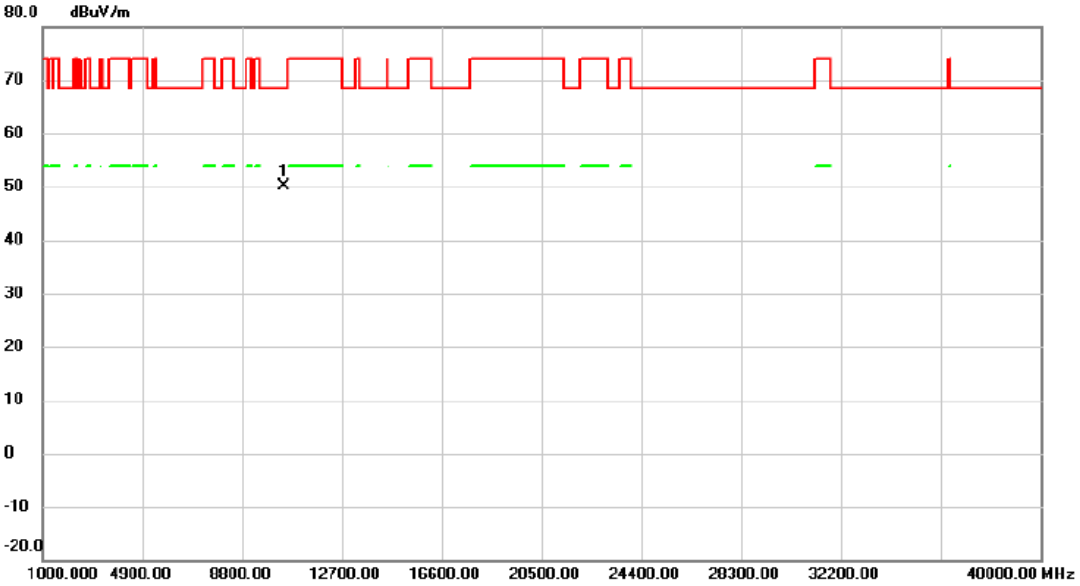

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10417.52	49.41	0.84	50.25	68.30	-18.05	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	996/67

Horizontal

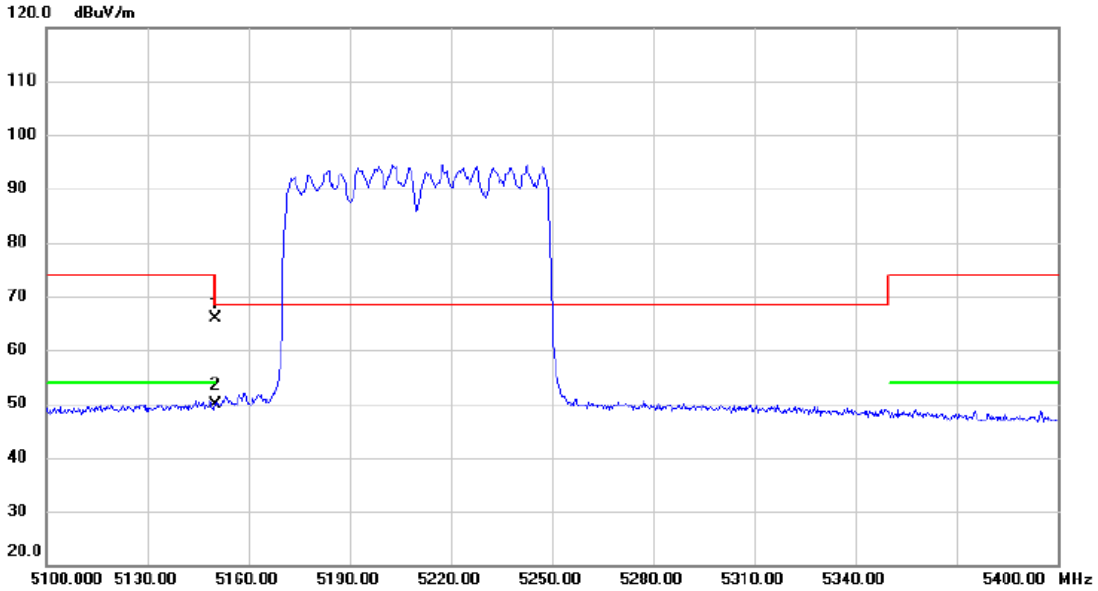

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	25.45	40.53	65.98	74.00	-8.02	peak	
2	*	5150.000	9.28	40.53	49.81	54.00	-4.19	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz	RU configuration	996/67

Horizontal

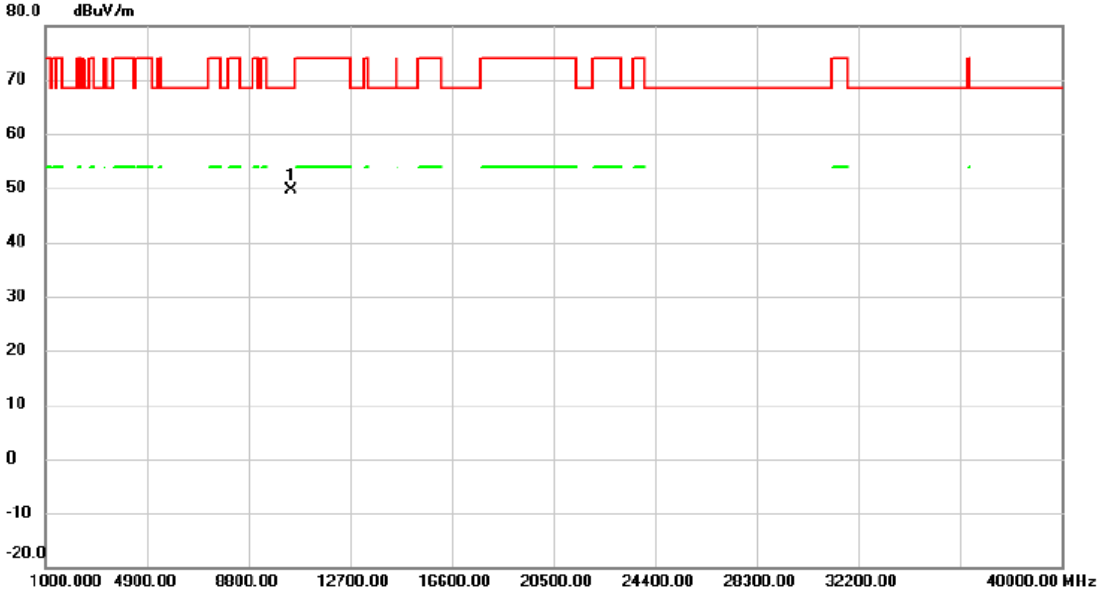

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10419.14	48.86	0.86	49.72	68.30	-18.58	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	106/53

Vertical

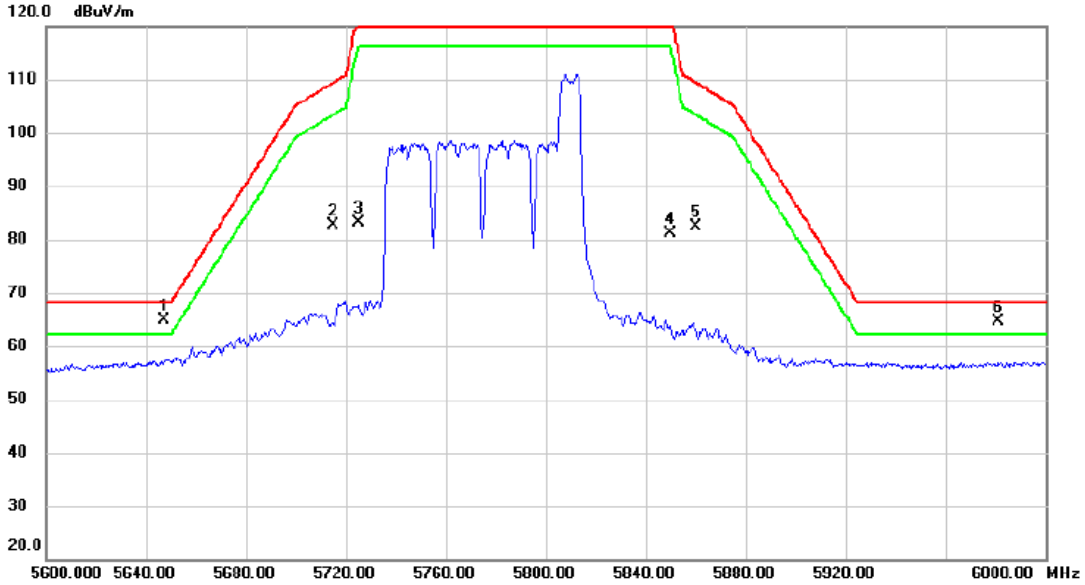

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5647.160	23.46	41.48	64.94	68.20	-3.26	peak	
2		5715.000	40.98	41.58	82.56	109.40	-26.84	peak	
3		5725.000	41.62	41.60	83.22	122.20	-38.98	peak	
4		5850.000	39.31	41.80	81.11	122.20	-41.09	peak	
5		5860.000	40.54	41.81	82.35	109.40	-27.05	peak	
6	!	5981.240	22.71	42.00	64.71	68.20	-3.49	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	106/53

Horizontal

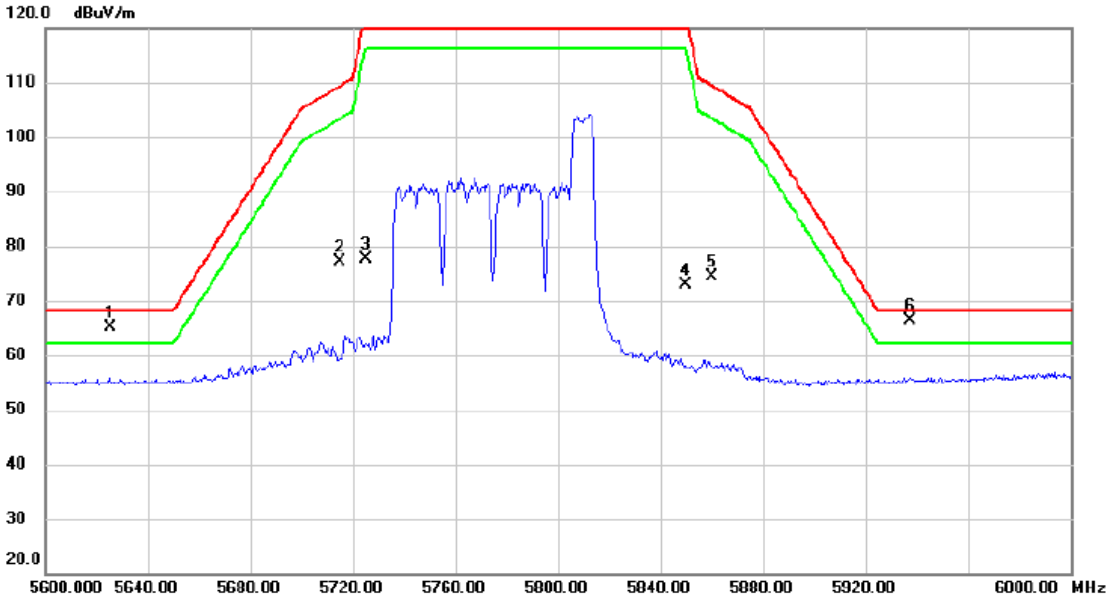

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	5625.480	23.67	41.44	65.11	68.20	-3.09	peak	
2		5715.000	35.60	41.58	77.18	109.40	-32.22	peak	
3		5725.000	35.93	41.60	77.53	122.20	-44.67	peak	
4		5850.000	30.96	41.80	72.76	122.20	-49.44	peak	
5		5860.000	32.65	41.81	74.46	109.40	-34.94	peak	
6	*	5937.480	24.56	41.93	66.49	68.20	-1.71	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	242/63

Vertical

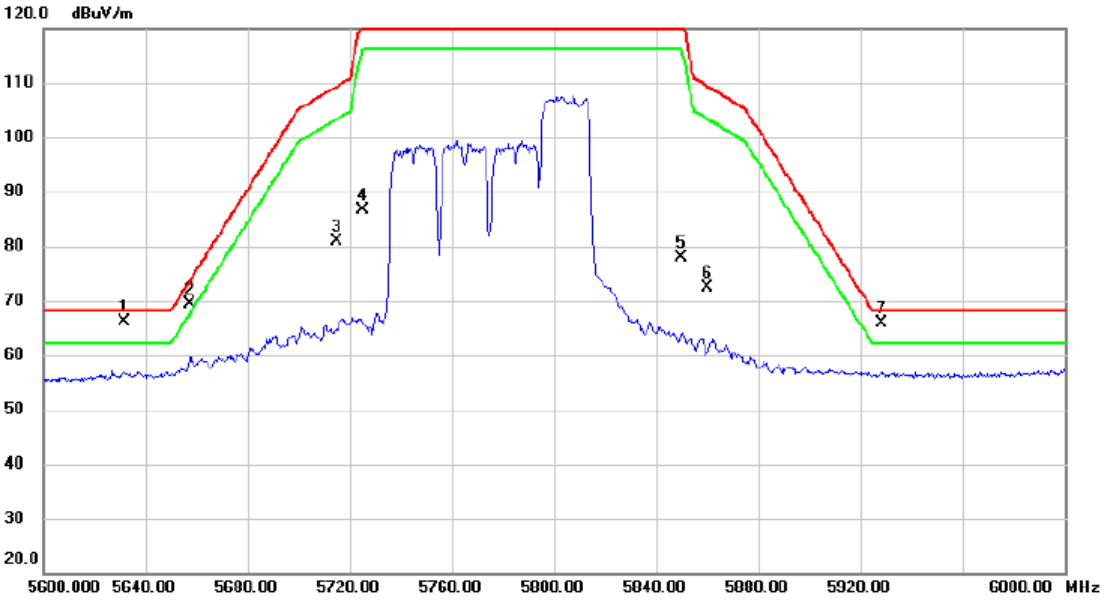

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5631.640	24.67	41.45	66.12	68.20	-2.08	peak	
2	!	5657.480	27.77	41.49	69.26	73.74	-4.48	peak	
3		5715.000	39.36	41.58	80.94	109.40	-28.46	peak	
4		5725.000	44.95	41.60	86.55	122.20	-35.65	peak	
5		5850.000	36.19	41.80	77.99	122.20	-44.21	peak	
6		5860.000	30.50	41.81	72.31	109.40	-37.09	peak	
7	!	5928.040	24.01	41.92	65.93	68.20	-2.27	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	242/63

Horizontal

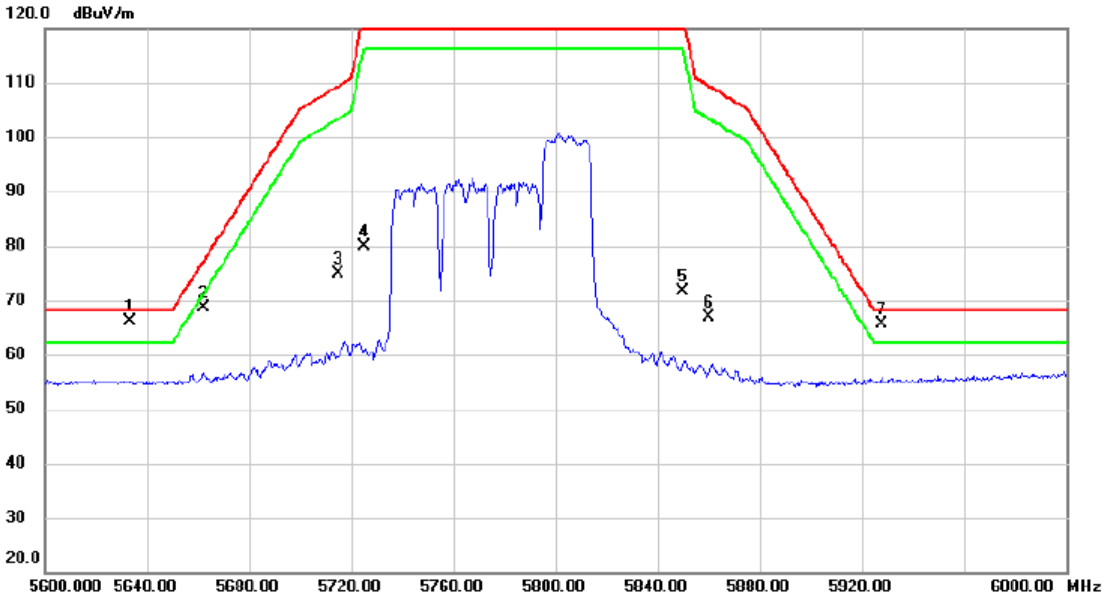

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5633.440	24.60	41.46	66.06	68.20	-2.14	peak	
2		5662.160	27.08	41.51	68.59	77.20	-8.61	peak	
3		5715.000	33.21	41.58	74.79	109.40	-34.61	peak	
4		5725.000	38.32	41.60	79.92	122.20	-42.28	peak	
5		5850.000	29.94	41.80	71.74	122.20	-50.46	peak	
6		5860.000	25.09	41.81	66.90	109.40	-42.50	peak	
7	!	5927.480	23.70	41.92	65.62	68.20	-2.58	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	484/65

Vertical

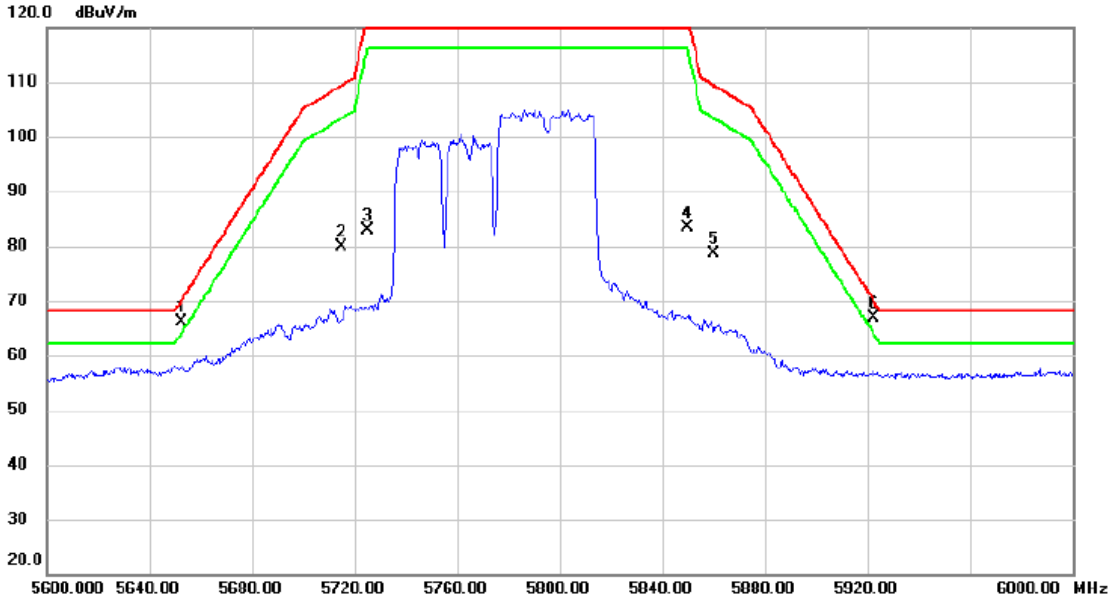

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	5652.280	24.76	41.49	66.25	69.89	-3.64	peak	
2		5715.000	38.30	41.58	79.88	109.40	-29.52	peak	
3		5725.000	41.28	41.60	82.88	122.20	-39.32	peak	
4		5850.000	41.65	41.80	83.45	122.20	-38.75	peak	
5		5860.000	36.74	41.81	78.55	109.40	-30.85	peak	
6	*	5922.440	25.04	41.91	66.95	70.09	-3.14	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	484/65

Horizontal

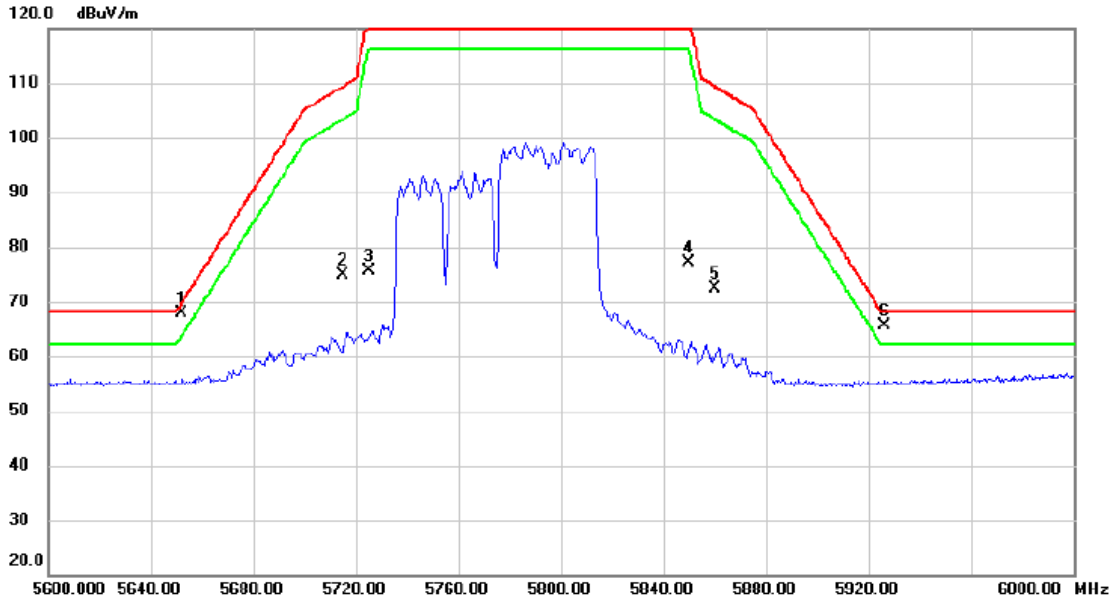

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5652.200	26.48	41.49	67.97	69.83	-1.86	peak	
2		5715.000	33.23	41.58	74.81	109.40	-34.59	peak	
3		5725.000	33.99	41.60	75.59	122.20	-46.61	peak	
4		5850.000	35.24	41.80	77.04	122.20	-45.16	peak	
5		5860.000	30.46	41.81	72.27	109.40	-37.13	peak	
6	!	5926.240	23.71	41.91	65.62	68.20	-2.58	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996/67

Vertical

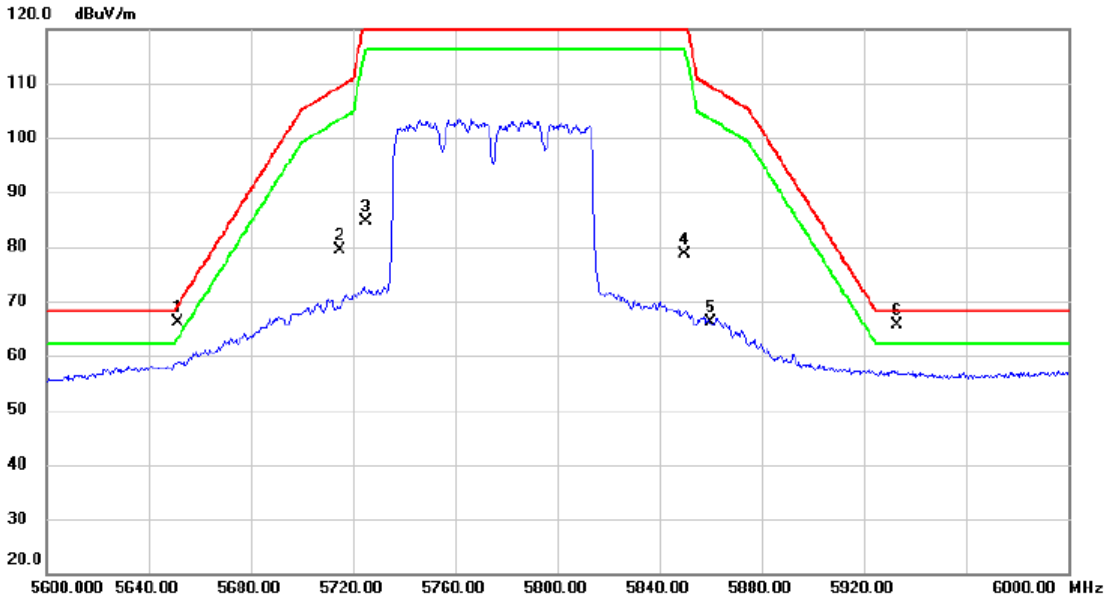

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	5651.560	24.71	41.48	66.19	69.35	-3.16	peak	
2		5715.000	37.68	41.58	79.26	109.40	-30.14	peak	
3		5725.000	42.93	41.60	84.53	122.20	-37.67	peak	
4		5850.000	36.86	41.80	78.66	122.20	-43.54	peak	
5		5860.000	24.31	41.81	66.12	109.40	-43.28	peak	
6	*	5932.960	23.60	41.93	65.53	68.20	-2.67	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996/67

Vertical

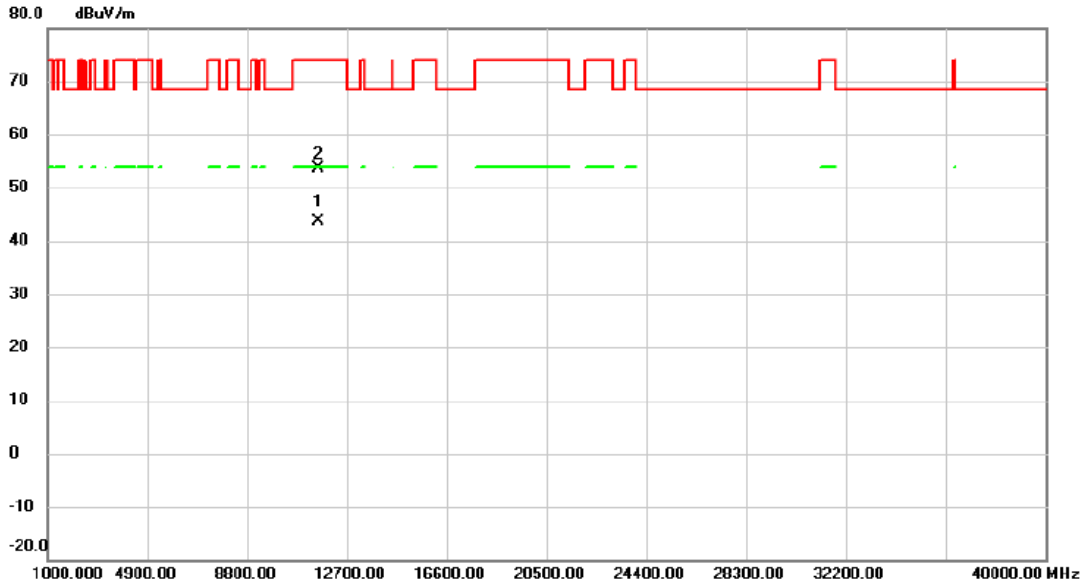

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11579.20	41.63	2.09	43.72	54.00	-10.28	AVG	
2		11579.90	51.62	2.09	53.71	74.00	-20.29	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996/67

Horizontal

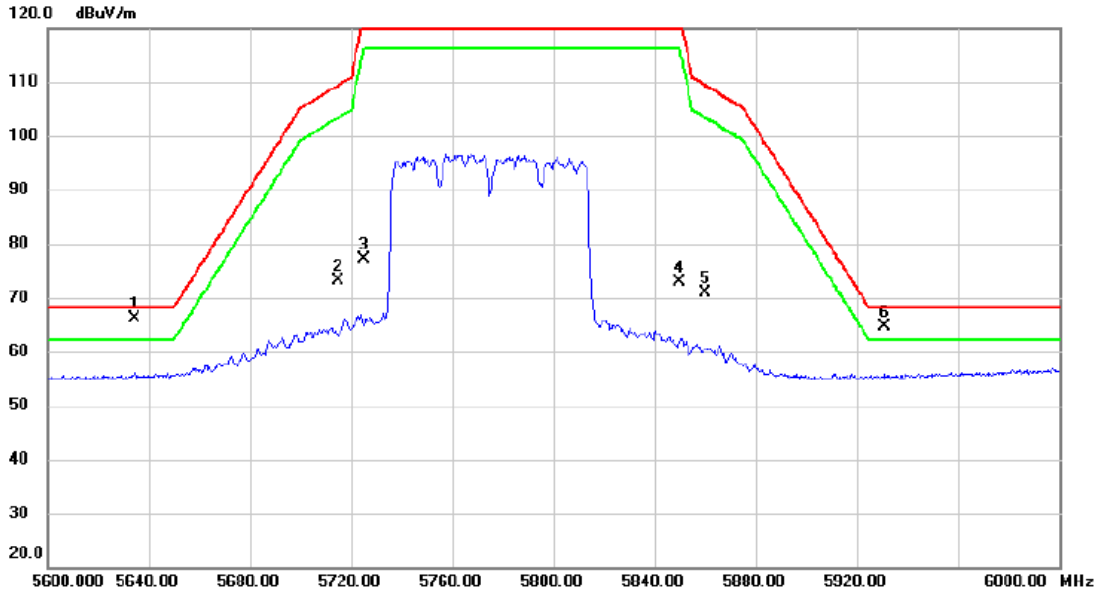

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5634.440	24.60	41.46	66.06	68.20	-2.14	peak	
2		5715.000	31.46	41.58	73.04	109.40	-36.36	peak	
3		5725.000	35.62	41.60	77.22	122.20	-44.98	peak	
4		5850.000	30.99	41.80	72.79	122.20	-49.41	peak	
5		5860.000	29.07	41.81	70.88	109.40	-38.52	peak	
6	!	5931.160	22.76	41.93	64.69	68.20	-3.51	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X		
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz	RU configuration	996/67

Horizontal

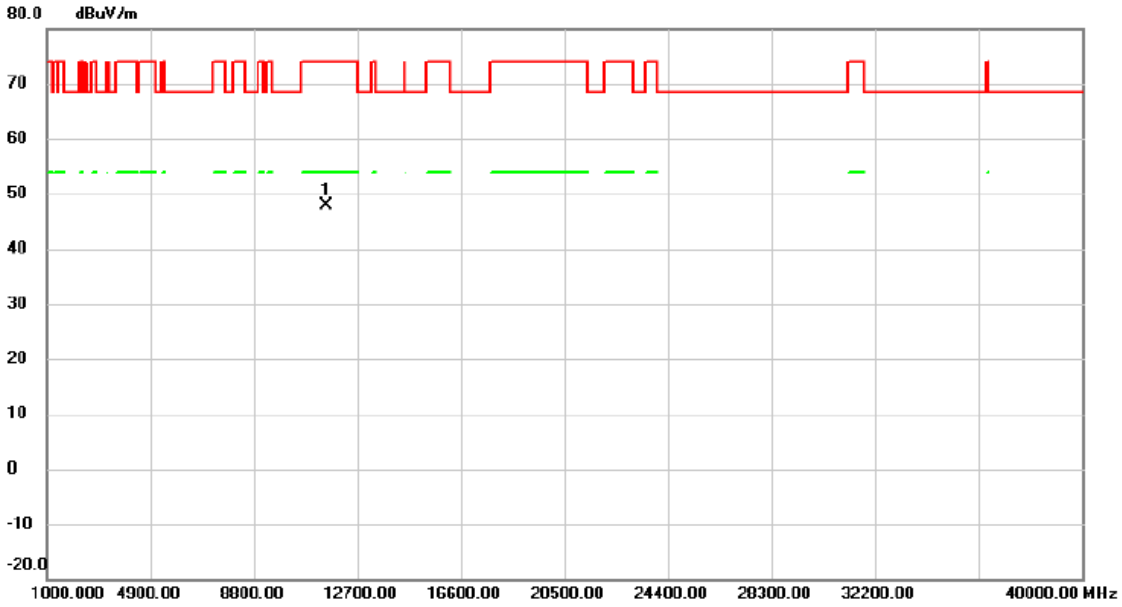

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11537.50	45.82	2.15	47.97	74.00	-26.03	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode	UNII-1_TX AX (HE20) Mode	RU configuration	52/37

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.60	18.60
40	5200	21.55	18.70
48	5240	21.59	18.70

CH36

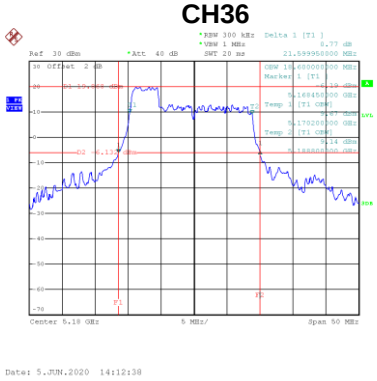

CH40

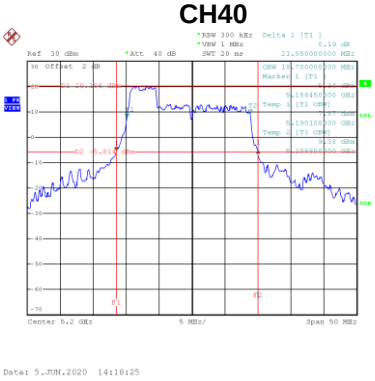

CH48

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	52/37

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	17.20	500	Complies
157	5785	17.15	500	Complies
165	5825	17.20	500	Complies

CH149



CH157



CH165

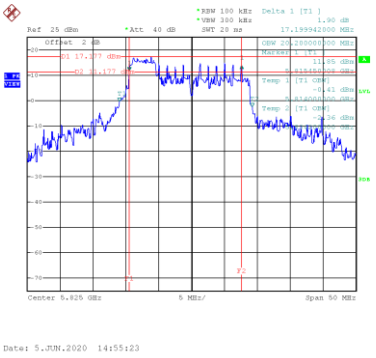

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	52/37

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	20.90
157	5785	21.10
165	5825	21.20

CH149

CH157

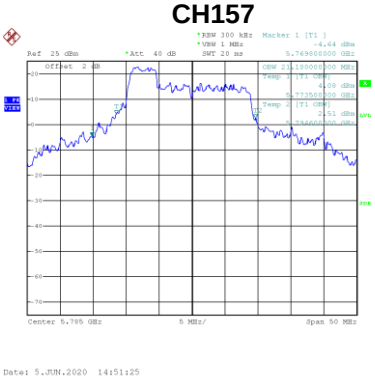

CH165

Test Mode	UNII-1_TX AX (HE20) Mode	RU configuration	106/53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	25.79	18.80
40	5200	23.49	18.60
48	5240	24.30	18.70

CH36

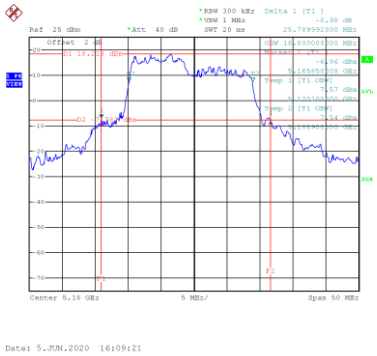

CH40

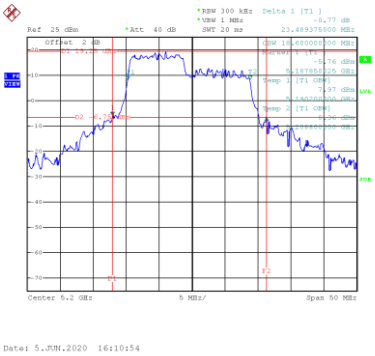

CH48

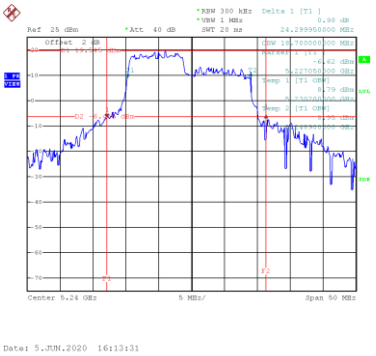

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	106/53

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	17.39	500	Complies
157	5785	17.20	500	Complies
165	5825	17.20	500	Complies

CH149

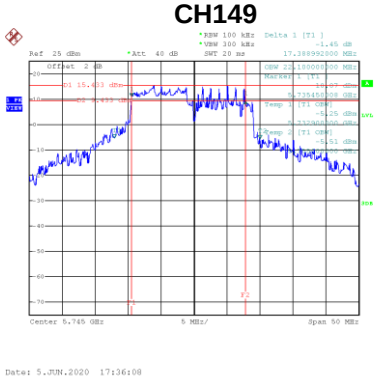

CH157

CH165

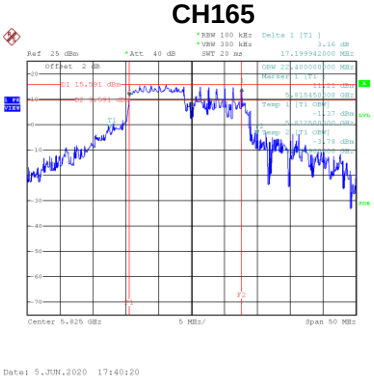

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	106/53

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	22.70
157	5785	22.50
165	5825	23.30

CH149



CH157



CH165

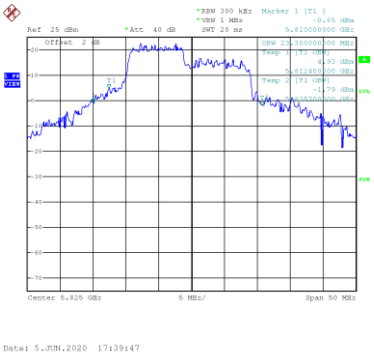

Test Mode	UNII-1_TX AX (HE20) Mode	RU configuration	242/61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	45.75	28.00
40	5200	46.05	29.20
48	5240	31.09	17.50

CH36

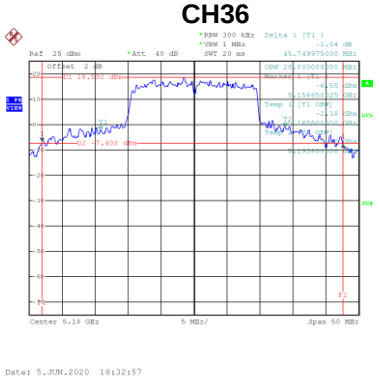

CH40

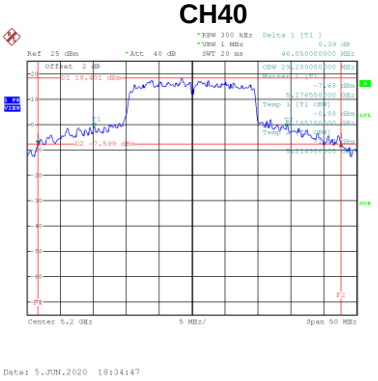

CH48

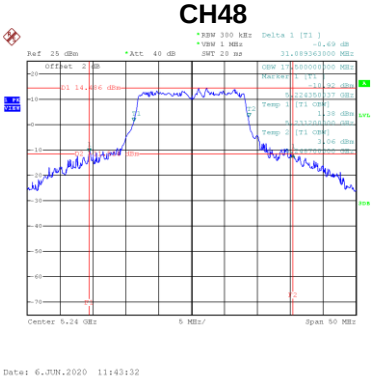

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	242/61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	18.15	500	Complies
157	5785	18.15	500	Complies
165	5825	17.95	500	Complies

CH149

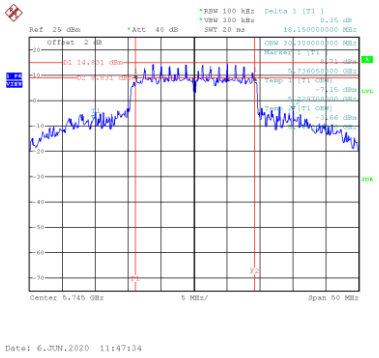

CH157

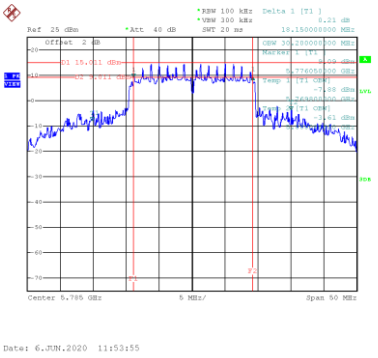

CH165

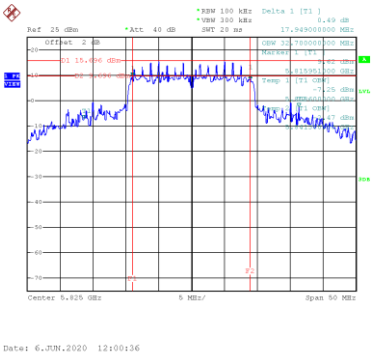

Test Mode	UNII-3_TX AX (HE20) Mode	RU configuration	242/61

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	32.10
157	5785	32.10
165	5825	34.50

CH149

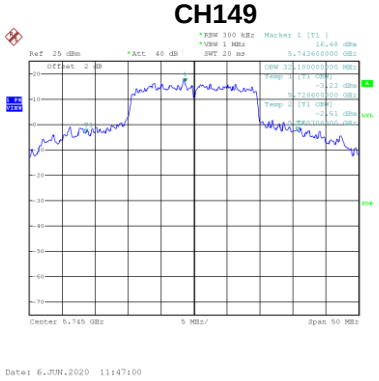

CH157

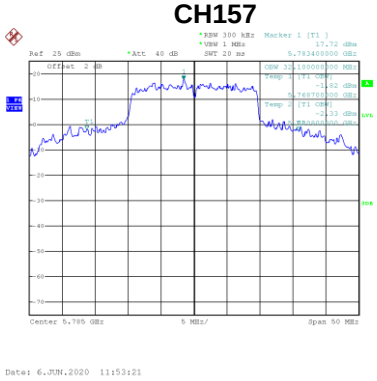

CH165

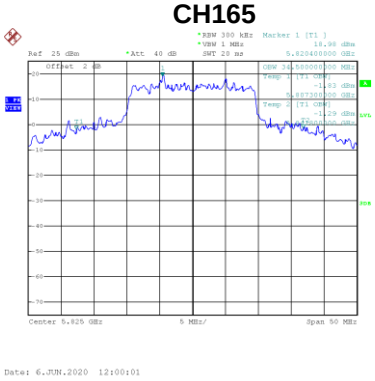

Test Mode	UNII-1_TX AX (HE40) Mode	RU configuration	52/37

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	40.60	37.80
46	5230	40.90	37.80

CH38

CH46

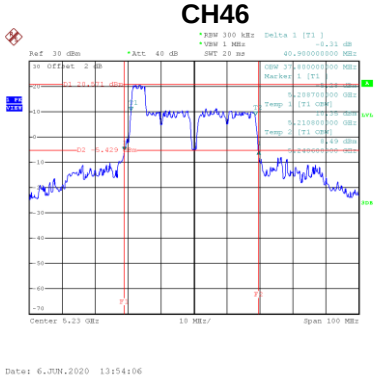

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	52/37

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	22.90	500	Complies
159	5795	22.90	500	Complies

CH151

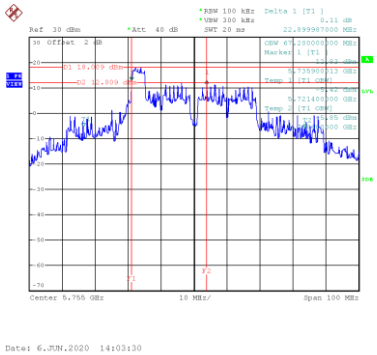

CH159

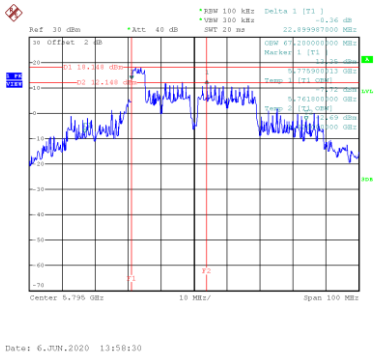

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	52/37

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	67.80
159	5795	68.40

CH151

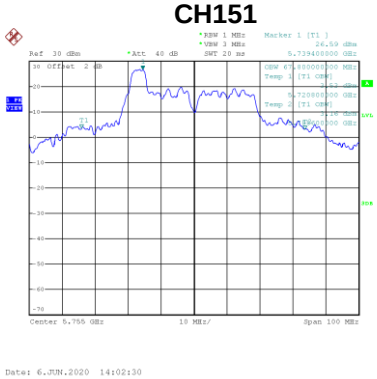

CH159

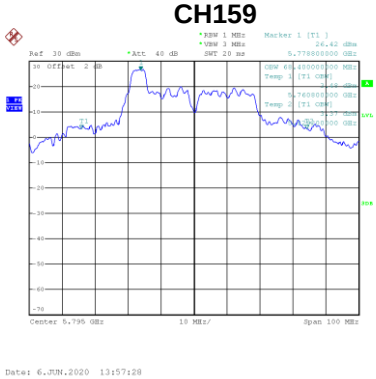

Test Mode	UNII-1_TX AX (HE40) Mode	RU configuration	106/53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	51.40	38.00
46	5230	40.79	37.80

CH38

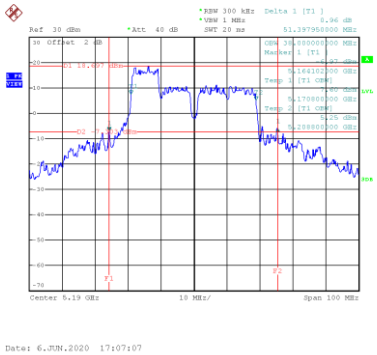

CH46

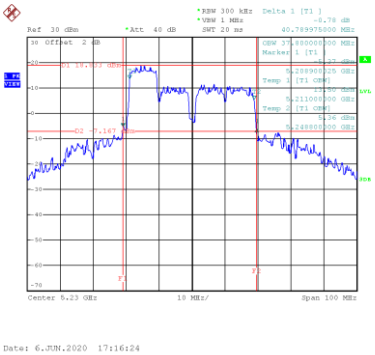

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	106/53

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.59	500	Complies
159	5795	36.70	500	Complies

CH151

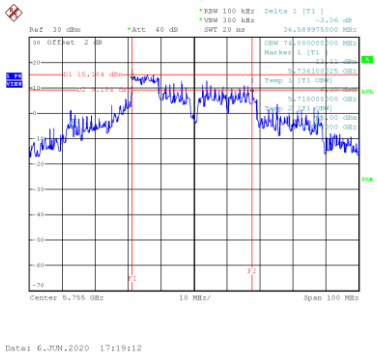

CH159

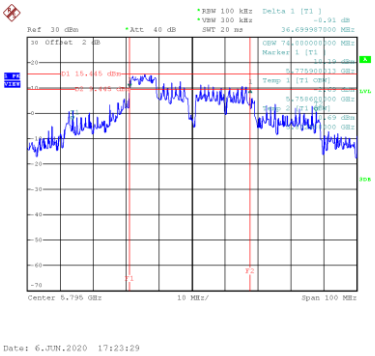

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	106/53

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	73.40
159	5795	73.80

CH151

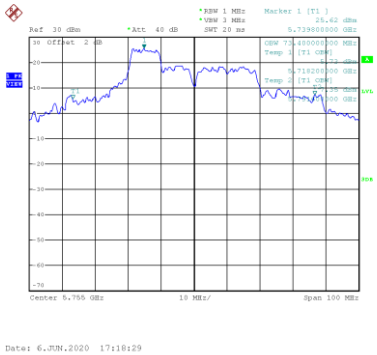

CH159

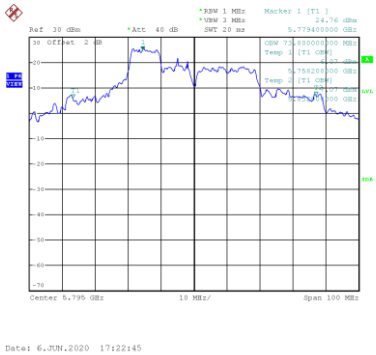

Test Mode	UNII-1_TX AX (HE40) Mode	RU configuration	242/61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	71.70	37.80
46	5230	71.70	37.80

CH38

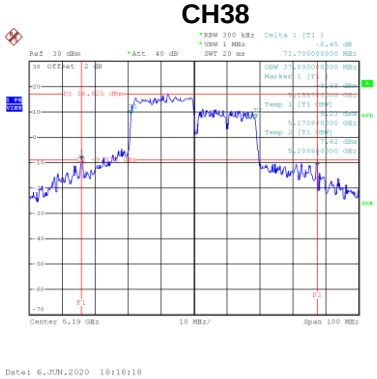

CH46

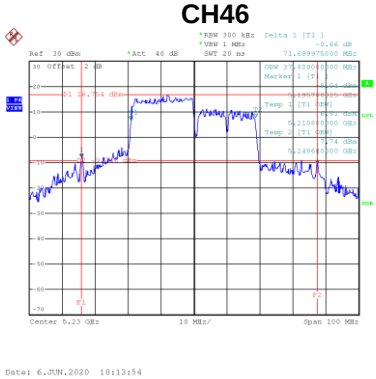

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	242/61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.80	500	Complies
159	5795	36.80	500	Complies

CH151

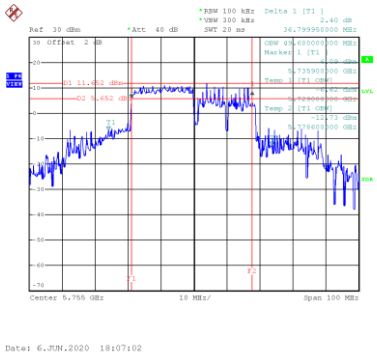

CH159

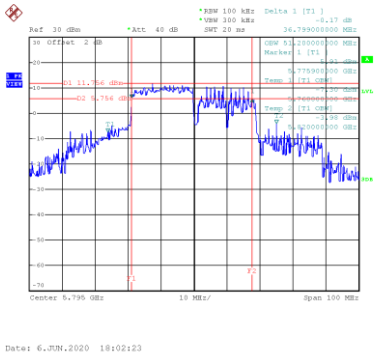

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	242/61

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	49.40
159	5795	51.40

CH151

CH159

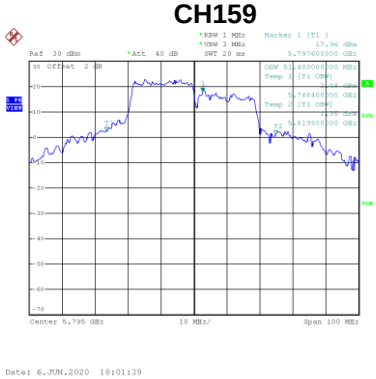

Test Mode	UNII-1_TX AX (HE40) Mode	RU configuration	484/65

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	40.20	37.60
46	5230	39.79	37.80

CH38

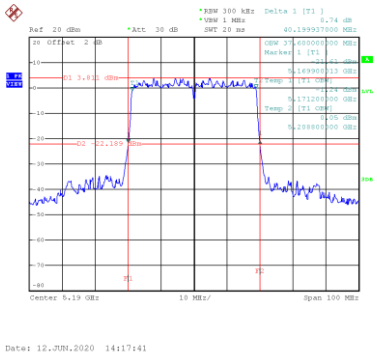

CH46

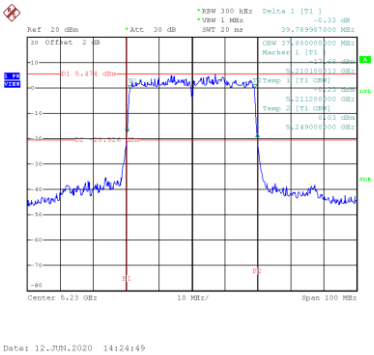

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	484/65

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.80	500	Complies
159	5795	37.10	500	Complies

CH151

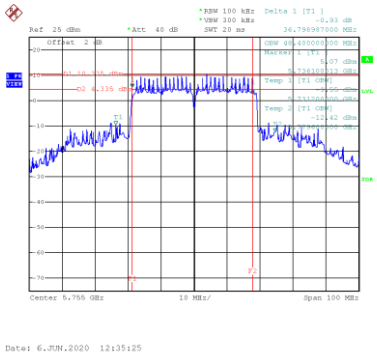

CH159

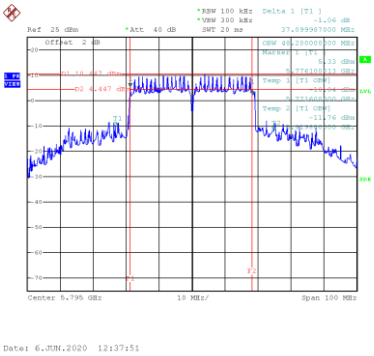

Test Mode	UNII-3_TX AX (HE40) Mode	RU configuration	484/65

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	56.20
159	5795	57.00

CH151

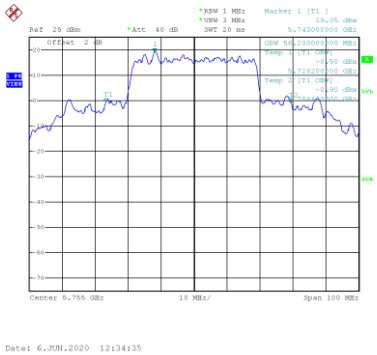

CH159

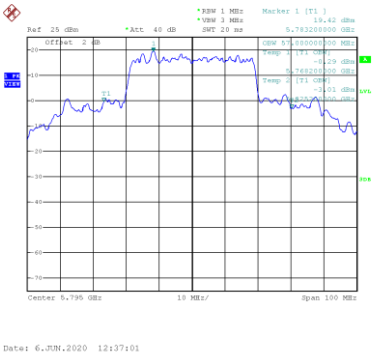

Test Mode	UNII-1_TX AX (HE80) Mode	RU configuration	106/53

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	81.60	78.00

CH42

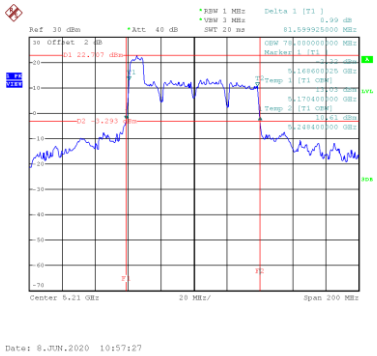

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	106/53

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	64.20	500	Complies

CH155

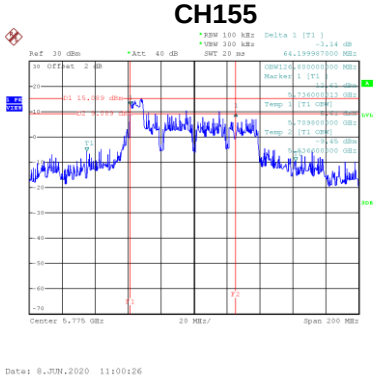

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	106/53

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
155	5775	132.00

CH155

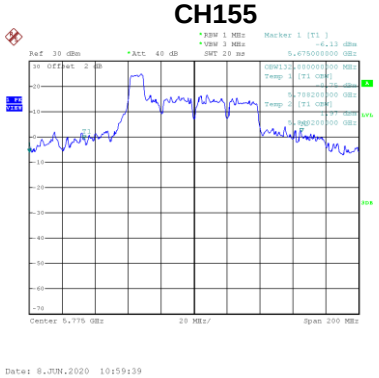

Test Mode	UNII-1_TX AX (HE80) Mode	RU configuration	242/61

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	80.40	76.80

CH42

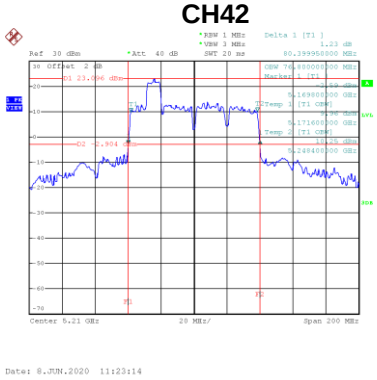

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	242/61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	76.60	500	Complies

CH155

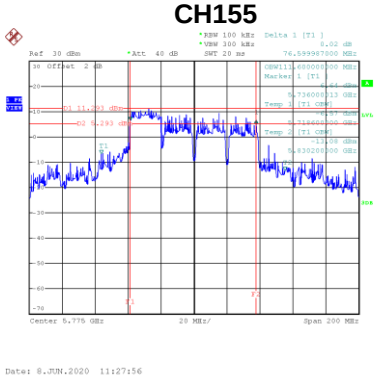

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	242/61

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
155	5775	111.60

CH155

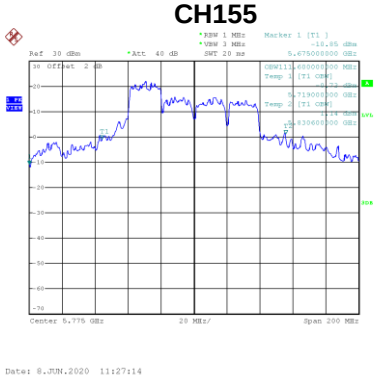

Test Mode	UNII-1_TX AX (HE80) Mode	RU configuration	484/65

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	85.99	77.60

CH42

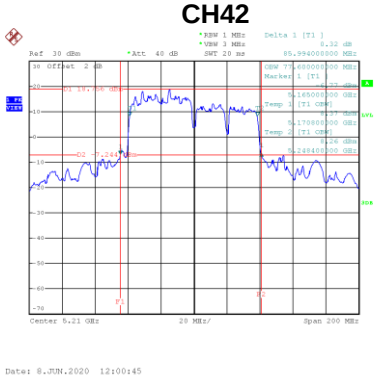

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	484/65

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	76.00	500	Complies

CH155

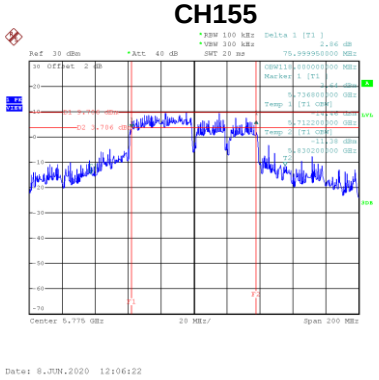

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	484/65

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
155	5775	115.20

CH155

Test Mode	UNII-1_TX AX (HE80) Mode	RU configuration	996/67

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	115.60	78.80

CH42

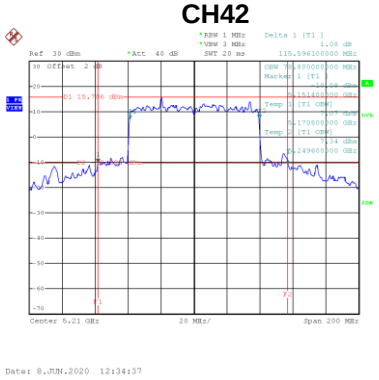

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	996/67

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	75.40	500	Complies

CH155

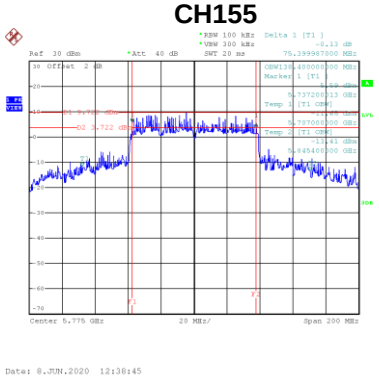

Test Mode	UNII-3_TX AX (HE80) Mode	RU configuration	996/67

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
155	5775	144.00

CH155

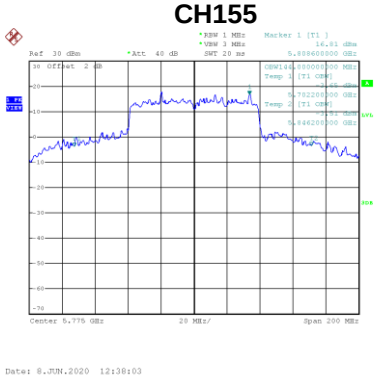

APPENDIX E - CONDUCTED OUTPUT POWER

Non-Beamforming

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	52/37	19.41	0.55	19.96	29.99	0.9978	Complies
		52/38	19.96	0.55	20.51	29.99	0.9978	Complies
		52/40	19.58	0.55	20.13	29.99	0.9978	Complies
		106/53	20.08	0.55	20.63	29.99	0.9978	Complies
		106/54	19.63	0.55	20.18	29.99	0.9978	Complies
		242/61	19.16	0.55	19.71	29.99	0.9978	Complies
40	5200	52/37	20.03	0.55	20.58	29.99	0.9978	Complies
		52/38	20.04	0.55	20.59	29.99	0.9978	Complies
		52/40	20.11	0.55	20.66	29.99	0.9978	Complies
		106/53	22.75	0.55	23.30	29.99	0.9978	Complies
		106/54	22.62	0.55	23.17	29.99	0.9978	Complies
		242/61	20.98	0.55	21.53	29.99	0.9978	Complies
48	5240	52/37	20.06	0.55	20.61	29.99	0.9978	Complies
		52/38	20.44	0.55	20.99	29.99	0.9978	Complies
		52/40	20.08	0.55	20.63	29.99	0.9978	Complies
		106/53	22.51	0.55	23.06	29.99	0.9978	Complies
		106/54	21.56	0.55	22.11	29.99	0.9978	Complies
		242/61	24.45	0.55	25.00	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	52/37	19.03	0.55	19.58	29.99	0.9978	Complies
		52/38	19.16	0.55	19.71	29.99	0.9978	Complies
		52/40	18.98	0.55	19.53	29.99	0.9978	Complies
		106/53	19.34	0.55	19.89	29.99	0.9978	Complies
		106/54	19.66	0.55	20.21	29.99	0.9978	Complies
		242/61	18.55	0.55	19.10	29.99	0.9978	Complies
40	5200	52/37	19.26	0.55	19.81	29.99	0.9978	Complies
		52/38	19.35	0.55	19.90	29.99	0.9978	Complies
		52/40	19.16	0.55	19.71	29.99	0.9978	Complies
		106/53	21.56	0.55	22.11	29.99	0.9978	Complies
		106/54	22.20	0.55	22.75	29.99	0.9978	Complies
		242/61	20.21	0.55	20.76	29.99	0.9978	Complies
48	5240	52/37	19.54	0.55	20.09	29.99	0.9978	Complies
		52/38	19.94	0.55	20.49	29.99	0.9978	Complies
		52/40	19.71	0.55	20.26	29.99	0.9978	Complies
		106/53	21.89	0.55	22.44	29.99	0.9978	Complies
		106/54	22.15	0.55	22.70	29.99	0.9978	Complies
		242/61	24.64	0.55	25.19	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	52/37	22.78	29.99	0.9978	Complies
		52/38	23.14	29.99	0.9978	Complies
		52/40	22.85	29.99	0.9978	Complies
		106/53	23.28	29.99	0.9978	Complies
		106/54	23.20	29.99	0.9978	Complies
		242/61	22.42	29.99	0.9978	Complies
40	5200	52/37	23.22	29.99	0.9978	Complies
		52/38	23.27	29.99	0.9978	Complies
		52/40	23.22	29.99	0.9978	Complies
		106/53	25.75	29.99	0.9978	Complies
		106/54	25.97	29.99	0.9978	Complies
		242/61	24.17	29.99	0.9978	Complies
48	5240	52/37	23.37	29.99	0.9978	Complies
		52/38	23.76	29.99	0.9978	Complies
		52/40	23.46	29.99	0.9978	Complies
		106/53	25.77	29.99	0.9978	Complies
		106/54	25.42	29.99	0.9978	Complies
		242/61	28.10	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	52/37	16.94	1.15	18.09	29.99	0.9978	Complies
		52/40	17.72	1.15	18.87	29.99	0.9978	Complies
		52/44	16.83	1.15	17.98	29.99	0.9978	Complies
		106/53	17.20	1.15	18.35	29.99	0.9978	Complies
		106/54	17.99	1.15	19.14	29.99	0.9978	Complies
		106/56	17.79	1.15	18.94	29.99	0.9978	Complies
		242/61	18.32	1.15	19.47	29.99	0.9978	Complies
		242/62	17.68	1.15	18.83	29.99	0.9978	Complies
		484/65	16.58	1.15	17.73	29.99	0.9978	Complies
46	5230	52/37	20.01	1.15	21.16	29.99	0.9978	Complies
		52/40	19.82	1.15	20.97	29.99	0.9978	Complies
		52/44	19.70	1.15	20.85	29.99	0.9978	Complies
		106/53	21.74	1.15	22.89	29.99	0.9978	Complies
		106/54	22.12	1.15	23.27	29.99	0.9978	Complies
		106/56	21.79	1.15	22.94	29.99	0.9978	Complies
		242/61	25.12	1.15	26.27	29.99	0.9978	Complies
		242/62	25.11	1.15	26.26	29.99	0.9978	Complies
		484/65	25.05	1.15	26.20	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	52/37	16.18	1.15	17.33	29.99	0.9978	Complies
		52/40	16.81	1.15	17.96	29.99	0.9978	Complies
		52/44	16.16	1.15	17.31	29.99	0.9978	Complies
		106/53	15.97	1.15	17.12	29.99	0.9978	Complies
		106/54	16.97	1.15	18.12	29.99	0.9978	Complies
		106/56	16.92	1.15	18.07	29.99	0.9978	Complies
		242/61	17.67	1.15	18.82	29.99	0.9978	Complies
		242/62	16.86	1.15	18.01	29.99	0.9978	Complies
		484/65	15.80	1.15	16.95	29.99	0.9978	Complies
46	5230	52/37	19.16	1.15	20.31	29.99	0.9978	Complies
		52/40	19.21	1.15	20.36	29.99	0.9978	Complies
		52/44	19.17	1.15	20.32	29.99	0.9978	Complies
		106/53	20.89	1.15	22.04	29.99	0.9978	Complies
		106/54	21.07	1.15	22.22	29.99	0.9978	Complies
		106/56	21.11	1.15	22.26	29.99	0.9978	Complies
		242/61	24.32	1.15	25.47	29.99	0.9978	Complies
		242/62	24.53	1.15	25.68	29.99	0.9978	Complies
		484/65	24.17	1.15	25.32	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	52/37	20.74	29.99	0.9978	Complies
		52/40	21.45	29.99	0.9978	Complies
		52/44	20.67	29.99	0.9978	Complies
		106/53	20.79	29.99	0.9978	Complies
		106/54	21.67	29.99	0.9978	Complies
		106/56	21.54	29.99	0.9978	Complies
		242/61	22.17	29.99	0.9978	Complies
		242/62	21.45	29.99	0.9978	Complies
		484/65	20.37	29.99	0.9978	Complies
46	5230	52/37	23.77	29.99	0.9978	Complies
		52/40	23.69	29.99	0.9978	Complies
		52/44	23.61	29.99	0.9978	Complies
		106/53	25.50	29.99	0.9978	Complies
		106/54	25.79	29.99	0.9978	Complies
		106/56	25.63	29.99	0.9978	Complies
		242/61	28.90	29.99	0.9978	Complies
		242/62	28.99	29.99	0.9978	Complies
		484/65	28.80	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	106/53	16.78	1.25	18.03	29.99	0.9978	Complies
		106/56	17.38	1.25	18.63	29.99	0.9978	Complies
		106/60	16.44	1.25	17.69	29.99	0.9978	Complies
		242/61	16.34	1.25	17.59	29.99	0.9978	Complies
		242/63	16.96	1.25	18.21	29.99	0.9978	Complies
		242/64	16.81	1.25	18.06	29.99	0.9978	Complies
		484/65	15.61	1.25	16.86	29.99	0.9978	Complies
		484/66	15.61	1.25	16.86	29.99	0.9978	Complies
		996/67	24.29	1.25	25.54	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	106/53	15.81	1.25	17.06	29.99	0.9978	Complies
		106/56	16.60	1.25	17.85	29.99	0.9978	Complies
		106/60	15.60	1.25	16.85	29.99	0.9978	Complies
		242/61	15.37	1.25	16.62	29.99	0.9978	Complies
		242/63	15.84	1.25	17.09	29.99	0.9978	Complies
		242/64	16.50	1.25	17.75	29.99	0.9978	Complies
		484/65	14.70	1.25	15.95	29.99	0.9978	Complies
		484/66	14.73	1.25	15.98	29.99	0.9978	Complies
		996/67	24.95	1.25	26.20	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	106/53	20.58	29.99	0.9978	Complies
		106/56	21.27	29.99	0.9978	Complies
		106/60	20.30	29.99	0.9978	Complies
		242/61	20.14	29.99	0.9978	Complies
		242/63	20.70	29.99	0.9978	Complies
		242/64	20.92	29.99	0.9978	Complies
		484/65	19.44	29.99	0.9978	Complies
		484/66	19.45	29.99	0.9978	Complies
		996/67	28.89	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	52/37	20.90	0.55	21.45	29.99	0.9978	Complies
		52/38	20.85	0.55	21.40	29.99	0.9978	Complies
		52/40	20.81	0.55	21.36	29.99	0.9978	Complies
		106/53	21.14	0.55	21.69	29.99	0.9978	Complies
		106/54	21.01	0.55	21.56	29.99	0.9978	Complies
		242/61	21.11	0.55	21.66	29.99	0.9978	Complies
157	5785	52/37	21.16	0.55	21.71	29.99	0.9978	Complies
		52/38	21.27	0.55	21.82	29.99	0.9978	Complies
		52/40	21.48	0.55	22.03	29.99	0.9978	Complies
		106/53	19.85	0.55	20.40	29.99	0.9978	Complies
		106/54	19.55	0.55	20.10	29.99	0.9978	Complies
		242/61	20.63	0.55	21.18	29.99	0.9978	Complies
165	5825	52/37	16.71	0.55	17.26	29.99	0.9978	Complies
		52/38	16.52	0.55	17.07	29.99	0.9978	Complies
		52/40	16.13	0.55	16.68	29.99	0.9978	Complies
		106/53	16.49	0.55	17.04	29.99	0.9978	Complies
		106/54	16.48	0.55	17.03	29.99	0.9978	Complies
		242/61	20.19	0.55	20.74	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	52/37	21.00	0.55	21.55	29.99	0.9978	Complies
		52/38	21.02	0.55	21.57	29.99	0.9978	Complies
		52/40	20.97	0.55	21.52	29.99	0.9978	Complies
		106/53	20.68	0.55	21.23	29.99	0.9978	Complies
		106/54	21.28	0.55	21.83	29.99	0.9978	Complies
		242/61	20.97	0.55	21.52	29.99	0.9978	Complies
157	5785	52/37	21.62	0.55	22.17	29.99	0.9978	Complies
		52/38	21.71	0.55	22.26	29.99	0.9978	Complies
		52/40	21.21	0.55	21.76	29.99	0.9978	Complies
		106/53	19.28	0.55	19.83	29.99	0.9978	Complies
		106/54	19.79	0.55	20.34	29.99	0.9978	Complies
		242/61	20.97	0.55	21.52	29.99	0.9978	Complies
165	5825	52/37	16.24	0.55	16.79	29.99	0.9978	Complies
		52/38	17.06	0.55	17.61	29.99	0.9978	Complies
		52/40	16.62	0.55	17.17	29.99	0.9978	Complies
		106/53	16.20	0.55	16.75	29.99	0.9978	Complies
		106/54	17.13	0.55	17.68	29.99	0.9978	Complies
		242/61	20.79	0.55	21.34	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	52/37	24.51	29.99	0.9978	Complies
		52/38	24.49	29.99	0.9978	Complies
		52/40	24.45	29.99	0.9978	Complies
		106/53	24.47	29.99	0.9978	Complies
		106/54	24.71	29.99	0.9978	Complies
		242/61	24.60	29.99	0.9978	Complies
157	5785	52/37	24.95	29.99	0.9978	Complies
		52/38	25.05	29.99	0.9978	Complies
		52/40	24.91	29.99	0.9978	Complies
		106/53	23.13	29.99	0.9978	Complies
		106/54	23.23	29.99	0.9978	Complies
		242/61	24.36	29.99	0.9978	Complies
165	5825	52/37	20.04	29.99	0.9978	Complies
		52/38	20.36	29.99	0.9978	Complies
		52/40	19.94	29.99	0.9978	Complies
		106/53	19.91	29.99	0.9978	Complies
		106/54	20.38	29.99	0.9978	Complies
		242/61	24.06	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	52/37	21.25	1.15	22.40	29.99	0.9978	Complies
		52/40	21.49	1.15	22.64	29.99	0.9978	Complies
		52/44	20.91	1.15	22.06	29.99	0.9978	Complies
		106/53	21.23	1.15	22.38	29.99	0.9978	Complies
		106/54	21.69	1.15	22.84	29.99	0.9978	Complies
		106/56	21.55	1.15	22.70	29.99	0.9978	Complies
		242/61	21.07	1.15	22.22	29.99	0.9978	Complies
		242/62	20.98	1.15	22.13	29.99	0.9978	Complies
		484/65	19.35	1.15	20.50	29.99	0.9978	Complies
159	5795	52/37	19.64	1.15	20.79	29.99	0.9978	Complies
		52/40	18.84	1.15	19.99	29.99	0.9978	Complies
		52/44	17.97	1.15	19.12	29.99	0.9978	Complies
		106/53	20.75	1.15	21.90	29.99	0.9978	Complies
		106/54	21.09	1.15	22.24	29.99	0.9978	Complies
		106/56	20.97	1.15	22.12	29.99	0.9978	Complies
		242/61	19.80	1.15	20.95	29.99	0.9978	Complies
		242/62	19.90	1.15	21.05	29.99	0.9978	Complies
		484/65	19.28	1.15	20.43	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	52/37	20.56	1.15	21.71	29.99	0.9978	Complies
		52/40	20.32	1.15	21.47	29.99	0.9978	Complies
		52/44	20.55	1.15	21.70	29.99	0.9978	Complies
		106/53	20.08	1.15	21.23	29.99	0.9978	Complies
		106/54	20.87	1.15	22.02	29.99	0.9978	Complies
		106/56	20.76	1.15	21.91	29.99	0.9978	Complies
		242/61	20.65	1.15	21.80	29.99	0.9978	Complies
		242/62	19.53	1.15	20.68	29.99	0.9978	Complies
		484/65	18.40	1.15	19.55	29.99	0.9978	Complies
159	5795	52/37	18.91	1.15	20.06	29.99	0.9978	Complies
		52/40	19.42	1.15	20.57	29.99	0.9978	Complies
		52/44	18.87	1.15	20.02	29.99	0.9978	Complies
		106/53	20.09	1.15	21.24	29.99	0.9978	Complies
		106/54	20.61	1.15	21.76	29.99	0.9978	Complies
		106/56	20.03	1.15	21.18	29.99	0.9978	Complies
		242/61	18.57	1.15	19.72	29.99	0.9978	Complies
		242/62	18.31	1.15	19.46	29.99	0.9978	Complies
		484/65	18.44	1.15	19.59	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	52/37	25.08	29.99	0.9978	Complies
		52/40	25.11	29.99	0.9978	Complies
		52/44	24.90	29.99	0.9978	Complies
		106/53	24.86	29.99	0.9978	Complies
		106/54	25.46	29.99	0.9978	Complies
		106/56	25.34	29.99	0.9978	Complies
		242/61	25.03	29.99	0.9978	Complies
		242/62	24.48	29.99	0.9978	Complies
		484/65	23.07	29.99	0.9978	Complies
159	5795	52/37	23.45	29.99	0.9978	Complies
		52/40	23.30	29.99	0.9978	Complies
		52/44	22.61	29.99	0.9978	Complies
		106/53	24.60	29.99	0.9978	Complies
		106/54	25.02	29.99	0.9978	Complies
		106/56	24.69	29.99	0.9978	Complies
		242/61	23.39	29.99	0.9978	Complies
		242/62	23.34	29.99	0.9978	Complies
		484/65	23.04	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	106/53	25.66	1.25	26.91	29.99	0.9978	Complies
		106/56	25.77	1.25	27.02	29.99	0.9978	Complies
		106/60	25.71	1.25	26.96	29.99	0.9978	Complies
		242/61	25.50	1.25	26.75	29.99	0.9978	Complies
		242/63	25.59	1.25	26.84	29.99	0.9978	Complies
		242/64	25.48	1.25	26.73	29.99	0.9978	Complies
		484/65	25.14	1.25	26.39	29.99	0.9978	Complies
		484/66	25.08	1.25	26.33	29.99	0.9978	Complies
		996/67	24.76	1.25	26.01	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	106/53	25.42	1.25	26.67	29.99	0.9978	Complies
		106/56	25.59	1.25	26.84	29.99	0.9978	Complies
		106/60	25.49	1.25	26.74	29.99	0.9978	Complies
		242/61	24.91	1.25	26.16	29.99	0.9978	Complies
		242/63	24.99	1.25	26.24	29.99	0.9978	Complies
		242/64	24.77	1.25	26.02	29.99	0.9978	Complies
		484/65	24.41	1.25	25.66	29.99	0.9978	Complies
		484/66	24.45	1.25	25.70	29.99	0.9978	Complies
		996/67	24.35	1.25	25.60	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	106/53	29.80	29.99	0.9978	Complies
		106/56	29.94	29.99	0.9978	Complies
		106/60	29.86	29.99	0.9978	Complies
		242/61	29.47	29.99	0.9978	Complies
		242/63	29.56	29.99	0.9978	Complies
		242/64	29.40	29.99	0.9978	Complies
		484/65	29.05	29.99	0.9978	Complies
		484/66	29.04	29.99	0.9978	Complies
		996/67	28.82	29.99	0.9978	Complies

Beamforming

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	52/37	19.09	0.55	19.64	29.99	0.9978	Complies
		52/38	19.69	0.55	20.24	29.99	0.9978	Complies
		52/40	19.25	0.55	19.80	29.99	0.9978	Complies
		106/53	19.63	0.55	20.18	29.99	0.9978	Complies
		106/54	19.15	0.55	19.70	29.99	0.9978	Complies
		242/61	18.94	0.55	19.49	29.99	0.9978	Complies
40	5200	52/37	19.66	0.55	20.21	29.99	0.9978	Complies
		52/38	19.54	0.55	20.09	29.99	0.9978	Complies
		52/40	19.74	0.55	20.29	29.99	0.9978	Complies
		106/53	22.47	0.55	23.02	29.99	0.9978	Complies
		106/54	22.39	0.55	22.94	29.99	0.9978	Complies
		242/61	20.75	0.55	21.30	29.99	0.9978	Complies
48	5240	52/37	19.82	0.55	20.37	29.99	0.9978	Complies
		52/38	20.15	0.55	20.70	29.99	0.9978	Complies
		52/40	19.82	0.55	20.37	29.99	0.9978	Complies
		106/53	22.15	0.55	22.70	29.99	0.9978	Complies
		106/54	21.06	0.55	21.61	29.99	0.9978	Complies
		242/61	23.97	0.55	24.52	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	52/37	18.68	0.55	19.23	29.99	0.9978	Complies
		52/38	18.90	0.55	19.45	29.99	0.9978	Complies
		52/40	18.52	0.55	19.07	29.99	0.9978	Complies
		106/53	19.04	0.55	19.59	29.99	0.9978	Complies
		106/54	19.36	0.55	19.91	29.99	0.9978	Complies
		242/61	18.14	0.55	18.69	29.99	0.9978	Complies
40	5200	52/37	18.82	0.55	19.37	29.99	0.9978	Complies
		52/38	18.89	0.55	19.44	29.99	0.9978	Complies
		52/40	18.83	0.55	19.38	29.99	0.9978	Complies
		106/53	21.23	0.55	21.78	29.99	0.9978	Complies
		106/54	22.00	0.55	22.55	29.99	0.9978	Complies
		242/61	20.00	0.55	20.55	29.99	0.9978	Complies
48	5240	52/37	19.07	0.55	19.62	29.99	0.9978	Complies
		52/38	19.57	0.55	20.12	29.99	0.9978	Complies
		52/40	19.51	0.55	20.06	29.99	0.9978	Complies
		106/53	21.41	0.55	21.96	29.99	0.9978	Complies
		106/54	21.70	0.55	22.25	29.99	0.9978	Complies
		242/61	24.40	0.55	24.95	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	52/37	22.45	29.99	0.9978	Complies
		52/38	22.87	29.99	0.9978	Complies
		52/40	22.46	29.99	0.9978	Complies
		106/53	22.90	29.99	0.9978	Complies
		106/54	22.82	29.99	0.9978	Complies
		242/61	22.12	29.99	0.9978	Complies
40	5200	52/37	22.82	29.99	0.9978	Complies
		52/38	22.79	29.99	0.9978	Complies
		52/40	22.87	29.99	0.9978	Complies
		106/53	25.45	29.99	0.9978	Complies
		106/54	25.76	29.99	0.9978	Complies
		242/61	23.95	29.99	0.9978	Complies
48	5240	52/37	23.02	29.99	0.9978	Complies
		52/38	23.43	29.99	0.9978	Complies
		52/40	23.23	29.99	0.9978	Complies
		106/53	25.35	29.99	0.9978	Complies
		106/54	24.95	29.99	0.9978	Complies
		242/61	27.75	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	52/37	16.70	1.15	17.85	29.99	0.9978	Complies
		52/40	17.40	1.15	18.55	29.99	0.9978	Complies
		52/44	16.58	1.15	17.73	29.99	0.9978	Complies
		106/53	16.84	1.15	17.99	29.99	0.9978	Complies
		106/54	17.63	1.15	18.78	29.99	0.9978	Complies
		106/56	17.44	1.15	18.59	29.99	0.9978	Complies
		242/61	18.12	1.15	19.27	29.99	0.9978	Complies
		242/62	17.22	1.15	18.37	29.99	0.9978	Complies
		484/65	16.21	1.15	17.36	29.99	0.9978	Complies
46	5230	52/37	19.54	1.15	20.69	29.99	0.9978	Complies
		52/40	19.32	1.15	20.47	29.99	0.9978	Complies
		52/44	19.41	1.15	20.56	29.99	0.9978	Complies
		106/53	21.31	1.15	22.46	29.99	0.9978	Complies
		106/54	21.85	1.15	23.00	29.99	0.9978	Complies
		106/56	21.48	1.15	22.63	29.99	0.9978	Complies
		242/61	24.91	1.15	26.06	29.99	0.9978	Complies
		242/62	24.87	1.15	26.02	29.99	0.9978	Complies
		484/65	24.70	1.15	25.85	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	52/37	15.72	1.15	16.87	29.99	0.9978	Complies
		52/40	16.60	1.15	17.75	29.99	0.9978	Complies
		52/44	15.68	1.15	16.83	29.99	0.9978	Complies
		106/53	15.74	1.15	16.89	29.99	0.9978	Complies
		106/54	16.71	1.15	17.86	29.99	0.9978	Complies
		106/56	16.63	1.15	17.78	29.99	0.9978	Complies
		242/61	17.26	1.15	18.41	29.99	0.9978	Complies
		242/62	16.46	1.15	17.61	29.99	0.9978	Complies
		484/65	15.59	1.15	16.74	29.99	0.9978	Complies
46	5230	52/37	18.80	1.15	19.95	29.99	0.9978	Complies
		52/40	18.75	1.15	19.90	29.99	0.9978	Complies
		52/44	18.84	1.15	19.99	29.99	0.9978	Complies
		106/53	20.68	1.15	21.83	29.99	0.9978	Complies
		106/54	20.83	1.15	21.98	29.99	0.9978	Complies
		106/56	20.66	1.15	21.81	29.99	0.9978	Complies
		242/61	24.08	1.15	25.23	29.99	0.9978	Complies
		242/62	24.22	1.15	25.37	29.99	0.9978	Complies
		484/65	23.72	1.15	24.87	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	52/37	20.40	29.99	0.9978	Complies
		52/40	21.18	29.99	0.9978	Complies
		52/44	20.32	29.99	0.9978	Complies
		106/53	20.49	29.99	0.9978	Complies
		106/54	21.36	29.99	0.9978	Complies
		106/56	21.22	29.99	0.9978	Complies
		242/61	21.88	29.99	0.9978	Complies
		242/62	21.02	29.99	0.9978	Complies
		484/65	20.08	29.99	0.9978	Complies
46	5230	52/37	23.35	29.99	0.9978	Complies
		52/40	23.21	29.99	0.9978	Complies
		52/44	23.30	29.99	0.9978	Complies
		106/53	25.17	29.99	0.9978	Complies
		106/54	25.53	29.99	0.9978	Complies
		106/56	25.25	29.99	0.9978	Complies
		242/61	28.68	29.99	0.9978	Complies
		242/62	28.72	29.99	0.9978	Complies
		484/65	28.40	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	106/53	16.36	1.25	17.61	29.99	0.9978	Complies
		106/56	17.06	1.25	18.31	29.99	0.9978	Complies
		106/60	15.96	1.25	17.21	29.99	0.9978	Complies
		242/61	16.03	1.25	17.28	29.99	0.9978	Complies
		242/63	16.53	1.25	17.78	29.99	0.9978	Complies
		242/64	16.33	1.25	17.58	29.99	0.9978	Complies
		484/65	15.36	1.25	16.61	29.99	0.9978	Complies
		484/66	15.26	1.25	16.51	29.99	0.9978	Complies
		996/67	23.97	1.25	25.22	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	106/53	15.53	1.25	16.78	29.99	0.9978	Complies
		106/56	16.32	1.25	17.57	29.99	0.9978	Complies
		106/60	15.15	1.25	16.40	29.99	0.9978	Complies
		242/61	14.94	1.25	16.19	29.99	0.9978	Complies
		242/63	15.49	1.25	16.74	29.99	0.9978	Complies
		242/64	16.15	1.25	17.40	29.99	0.9978	Complies
		484/65	14.21	1.25	15.46	29.99	0.9978	Complies
		484/66	14.38	1.25	15.63	29.99	0.9978	Complies
		996/67	24.59	1.25	25.84	29.99	0.9978	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	106/53	20.22	29.99	0.9978	Complies
		106/56	20.97	29.99	0.9978	Complies
		106/60	19.83	29.99	0.9978	Complies
		242/61	19.78	29.99	0.9978	Complies
		242/63	20.30	29.99	0.9978	Complies
		242/64	20.50	29.99	0.9978	Complies
		484/65	19.08	29.99	0.9978	Complies
		484/66	19.10	29.99	0.9978	Complies
		996/67	28.55	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	52/37	20.70	0.55	21.25	29.99	0.9978	Complies
		52/38	20.36	0.55	20.91	29.99	0.9978	Complies
		52/40	20.32	0.55	20.87	29.99	0.9978	Complies
		106/53	20.86	0.55	21.41	29.99	0.9978	Complies
		106/54	20.80	0.55	21.35	29.99	0.9978	Complies
		242/61	20.87	0.55	21.42	29.99	0.9978	Complies
157	5785	52/37	20.76	0.55	21.31	29.99	0.9978	Complies
		52/38	20.93	0.55	21.48	29.99	0.9978	Complies
		52/40	21.25	0.55	21.80	29.99	0.9978	Complies
		106/53	19.45	0.55	20.00	29.99	0.9978	Complies
		106/54	19.32	0.55	19.87	29.99	0.9978	Complies
		242/61	20.27	0.55	20.82	29.99	0.9978	Complies
165	5825	52/37	16.48	0.55	17.03	29.99	0.9978	Complies
		52/38	16.03	0.55	16.58	29.99	0.9978	Complies
		52/40	15.91	0.55	16.46	29.99	0.9978	Complies
		106/53	16.05	0.55	16.60	29.99	0.9978	Complies
		106/54	16.13	0.55	16.68	29.99	0.9978	Complies
		242/61	19.91	0.55	20.46	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	52/37	20.73	0.55	21.28	29.99	0.9978	Complies
		52/38	20.74	0.55	21.29	29.99	0.9978	Complies
		52/40	20.65	0.55	21.20	29.99	0.9978	Complies
		106/53	20.23	0.55	20.78	29.99	0.9978	Complies
		106/54	20.90	0.55	21.45	29.99	0.9978	Complies
		242/61	20.73	0.55	21.28	29.99	0.9978	Complies
157	5785	52/37	21.14	0.55	21.69	29.99	0.9978	Complies
		52/38	21.35	0.55	21.90	29.99	0.9978	Complies
		52/40	20.92	0.55	21.47	29.99	0.9978	Complies
		106/53	19.02	0.55	19.57	29.99	0.9978	Complies
		106/54	19.30	0.55	19.85	29.99	0.9978	Complies
		242/61	20.55	0.55	21.10	29.99	0.9978	Complies
165	5825	52/37	15.88	0.55	16.43	29.99	0.9978	Complies
		52/38	16.80	0.55	17.35	29.99	0.9978	Complies
		52/40	16.12	0.55	16.67	29.99	0.9978	Complies
		106/53	15.82	0.55	16.37	29.99	0.9978	Complies
		106/54	16.75	0.55	17.30	29.99	0.9978	Complies
		242/61	20.47	0.55	21.02	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	52/37	24.27	29.99	0.9978	Complies
		52/38	24.11	29.99	0.9978	Complies
		52/40	24.05	29.99	0.9978	Complies
		106/53	24.12	29.99	0.9978	Complies
		106/54	24.41	29.99	0.9978	Complies
		242/61	24.36	29.99	0.9978	Complies
157	5785	52/37	24.51	29.99	0.9978	Complies
		52/38	24.70	29.99	0.9978	Complies
		52/40	24.65	29.99	0.9978	Complies
		106/53	22.80	29.99	0.9978	Complies
		106/54	22.87	29.99	0.9978	Complies
		242/61	23.97	29.99	0.9978	Complies
165	5825	52/37	19.75	29.99	0.9978	Complies
		52/38	19.99	29.99	0.9978	Complies
		52/40	19.58	29.99	0.9978	Complies
		106/53	19.50	29.99	0.9978	Complies
		106/54	20.01	29.99	0.9978	Complies
		242/61	23.76	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	52/37	21.02	1.15	22.17	29.99	0.9978	Complies
		52/40	21.07	1.15	22.22	29.99	0.9978	Complies
		52/44	20.51	1.15	21.66	29.99	0.9978	Complies
		106/53	20.96	1.15	22.11	29.99	0.9978	Complies
		106/54	21.21	1.15	22.36	29.99	0.9978	Complies
		106/56	21.24	1.15	22.39	29.99	0.9978	Complies
		242/61	20.79	1.15	21.94	29.99	0.9978	Complies
		242/62	20.53	1.15	21.68	29.99	0.9978	Complies
		484/65	18.86	1.15	20.01	29.99	0.9978	Complies
159	5795	52/37	19.14	1.15	20.29	29.99	0.9978	Complies
		52/40	18.59	1.15	19.74	29.99	0.9978	Complies
		52/44	17.59	1.15	18.74	29.99	0.9978	Complies
		106/53	20.47	1.15	21.62	29.99	0.9978	Complies
		106/54	20.67	1.15	21.82	29.99	0.9978	Complies
		106/56	20.50	1.15	21.65	29.99	0.9978	Complies
		242/61	19.48	1.15	20.63	29.99	0.9978	Complies
		242/62	19.68	1.15	20.83	29.99	0.9978	Complies
		484/65	18.92	1.15	20.07	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	52/37	20.10	1.15	21.25	29.99	0.9978	Complies
		52/40	19.84	1.15	20.99	29.99	0.9978	Complies
		52/44	20.18	1.15	21.33	29.99	0.9978	Complies
		106/53	19.77	1.15	20.92	29.99	0.9978	Complies
		106/54	20.41	1.15	21.56	29.99	0.9978	Complies
		106/56	20.50	1.15	21.65	29.99	0.9978	Complies
		242/61	20.32	1.15	21.47	29.99	0.9978	Complies
		242/62	19.26	1.15	20.41	29.99	0.9978	Complies
		484/65	17.92	1.15	19.07	29.99	0.9978	Complies
159	5795	52/37	18.69	1.15	19.84	29.99	0.9978	Complies
		52/40	18.97	1.15	20.12	29.99	0.9978	Complies
		52/44	18.52	1.15	19.67	29.99	0.9978	Complies
		106/53	19.67	1.15	20.82	29.99	0.9978	Complies
		106/54	20.29	1.15	21.44	29.99	0.9978	Complies
		106/56	19.70	1.15	20.85	29.99	0.9978	Complies
		242/61	18.07	1.15	19.22	29.99	0.9978	Complies
		242/62	17.98	1.15	19.13	29.99	0.9978	Complies
		484/65	18.08	1.15	19.23	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	52/37	24.75	29.99	0.9978	Complies
		52/40	24.66	29.99	0.9978	Complies
		52/44	24.51	29.99	0.9978	Complies
		106/53	24.57	29.99	0.9978	Complies
		106/54	24.99	29.99	0.9978	Complies
		106/56	25.05	29.99	0.9978	Complies
		242/61	24.73	29.99	0.9978	Complies
		242/62	24.11	29.99	0.9978	Complies
		484/65	22.58	29.99	0.9978	Complies
159	5795	52/37	23.09	29.99	0.9978	Complies
		52/40	22.95	29.99	0.9978	Complies
		52/44	22.24	29.99	0.9978	Complies
		106/53	24.25	29.99	0.9978	Complies
		106/54	24.65	29.99	0.9978	Complies
		106/56	24.28	29.99	0.9978	Complies
		242/61	23.00	29.99	0.9978	Complies
		242/62	23.08	29.99	0.9978	Complies
		484/65	22.68	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 1

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	106/53	25.28	1.25	26.53	29.99	0.9978	Complies
		106/56	25.55	1.25	26.80	29.99	0.9978	Complies
		106/60	25.37	1.25	26.62	29.99	0.9978	Complies
		242/61	25.11	1.25	26.36	29.99	0.9978	Complies
		242/63	25.13	1.25	26.38	29.99	0.9978	Complies
		242/64	25.16	1.25	26.41	29.99	0.9978	Complies
		484/65	24.86	1.25	26.11	29.99	0.9978	Complies
		484/66	24.73	1.25	25.98	29.99	0.9978	Complies
		996/67	24.26	1.25	25.51	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Ant. 2

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	106/53	24.99	1.25	26.24	29.99	0.9978	Complies
		106/56	25.13	1.25	26.38	29.99	0.9978	Complies
		106/60	25.21	1.25	26.46	29.99	0.9978	Complies
		242/61	24.49	1.25	25.74	29.99	0.9978	Complies
		242/63	24.62	1.25	25.87	29.99	0.9978	Complies
		242/64	24.49	1.25	25.74	29.99	0.9978	Complies
		484/65	24.17	1.25	25.42	29.99	0.9978	Complies
		484/66	24.05	1.25	25.30	29.99	0.9978	Complies
		996/67	23.88	1.25	25.13	29.99	0.9978	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_Total

Channel	Frequency (MHz)	RU configuration	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	106/53	29.40	29.99	0.9978	Complies
		106/56	29.60	29.99	0.9978	Complies
		106/60	29.55	29.99	0.9978	Complies
		242/61	29.07	29.99	0.9978	Complies
		242/63	29.14	29.99	0.9978	Complies
		242/64	29.10	29.99	0.9978	Complies
		484/65	28.79	29.99	0.9978	Complies
		484/66	28.66	29.99	0.9978	Complies
		996/67	28.33	29.99	0.9978	Complies

APPENDIX F - POWER SPECTRAL DENSITY

Non-Beamforming

Test Mode	UNII-1_TX AX (HE20) Mode_ Ant. 1	RU configuration	52/38

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	13.55	0.55	14.10	16.99	Complies
40	5200	13.46	0.55	14.01	16.99	Complies
48	5240	13.44	0.55	13.99	16.99	Complies

CH36

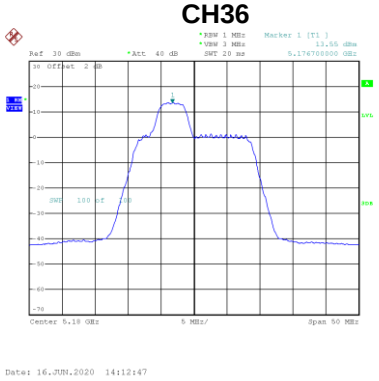

CH40

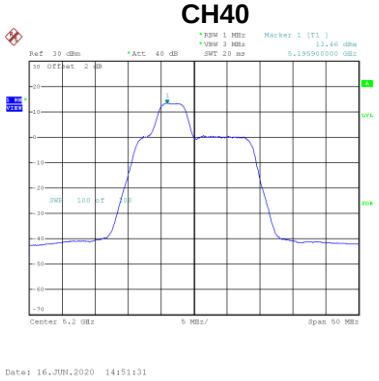

CH48

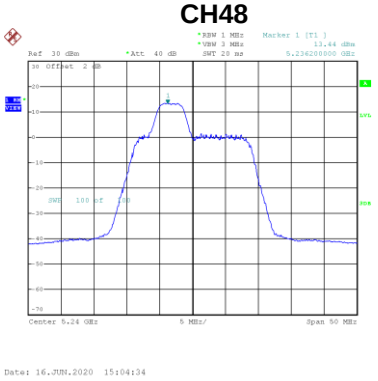

Test Mode	UNII-1_TX AX (HE20) Mode_ Ant. 2	RU configuration	52/38

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	13.00	0.55	13.55	16.99	Complies
40	5200	12.80	0.55	13.35	16.99	Complies
48	5240	12.83	0.55	13.38	16.99	Complies

CH36

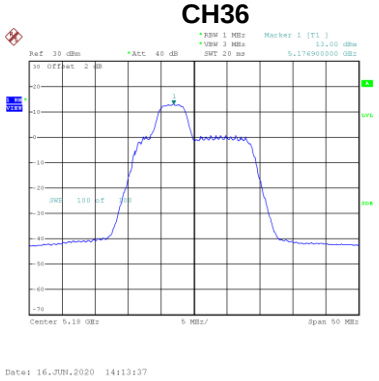

CH40

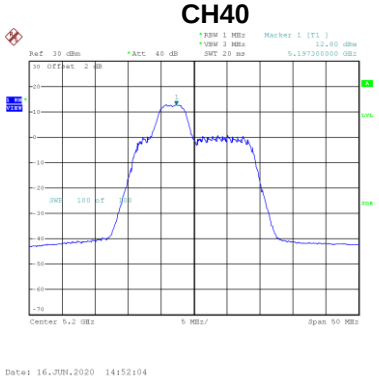

CH48

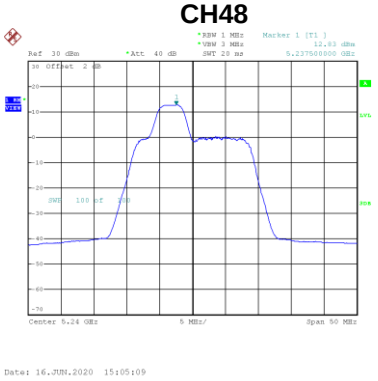

Test Mode	UNII-1_TX AX (HE20) Mode_ Total	RU configuration	52/38

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	16.84	16.99	Complies
40	5200	16.70	16.99	Complies
48	5240	16.70	16.99	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_ Ant. 1	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	13.48	0.55	14.03	16.99	Complies
40	5200	13.56	0.55	14.11	16.99	Complies
48	5240	13.66	0.55	14.21	16.99	Complies

CH36

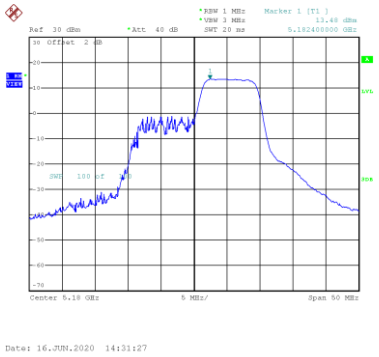

CH40

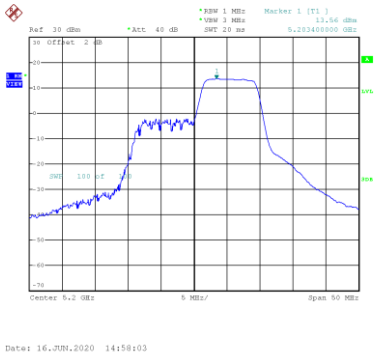

CH48

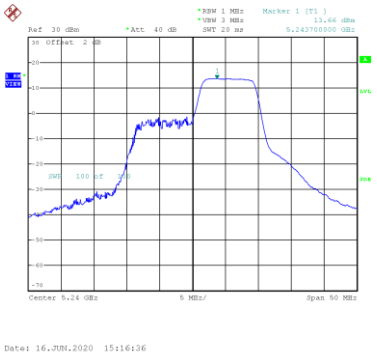

Test Mode	UNII-1_TX AX (HE20) Mode_ Ant. 2	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	12.98	0.55	13.53	16.99	Complies
40	5200	13.08	0.55	13.63	16.99	Complies
48	5240	12.87	0.55	13.42	16.99	Complies

CH36

CH40

CH48

Test Mode	UNII-1_TX AX (HE20) Mode_ Total	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	16.80	16.99	Complies
40	5200	16.89	16.99	Complies
48	5240	16.84	16.99	Complies

Test Mode	UNII-1_TX AX (HE20) Mode_ Ant. 1	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	13.46	0.55	14.01	16.99	Complies
40	5200	13.39	0.55	13.94	16.99	Complies
48	5240	12.36	0.55	12.91	16.99	Complies

CH36

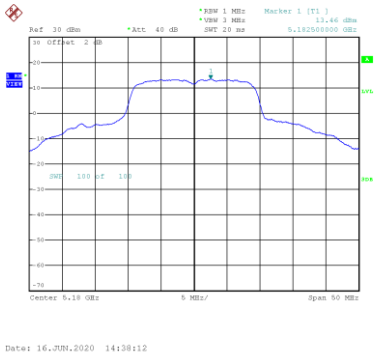

CH40

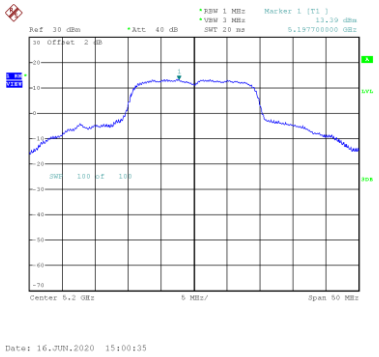

CH48

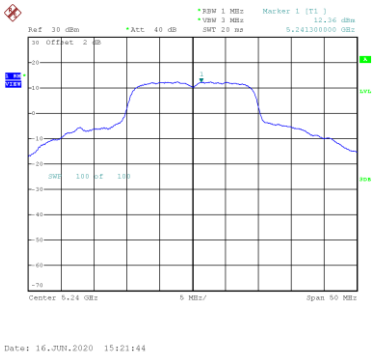

Test Mode	UNII-1_TX AX (HE20) Mode_ Ant. 2	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	12.43	0.55	12.98	16.99	Complies
40	5200	12.18	0.55	12.73	16.99	Complies
48	5240	11.65	0.55	12.20	16.99	Complies

CH36

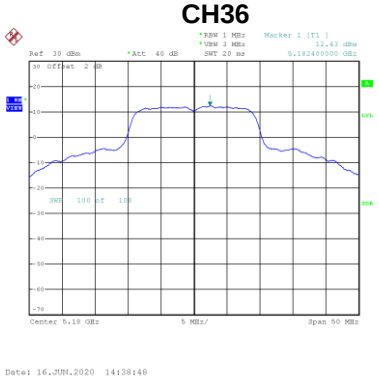

CH40

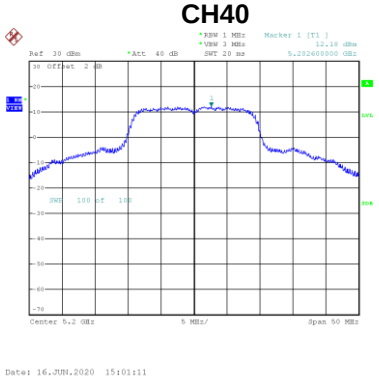

CH48

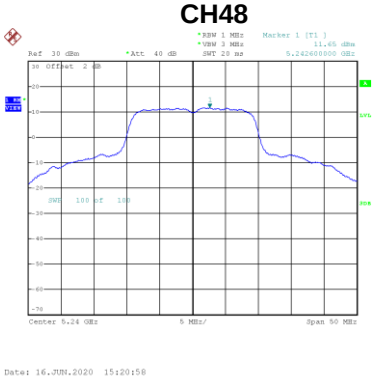

Test Mode	UNII-1_TX AX (HE20) Mode_ Total	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	16.53	16.99	Complies
40	5200	16.39	16.99	Complies
48	5240	15.58	16.99	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 1	RU configuration	52/37

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	13.15	1.15	14.30	16.99	Complies
46	5230	13.40	1.15	14.55	16.99	Complies

CH38

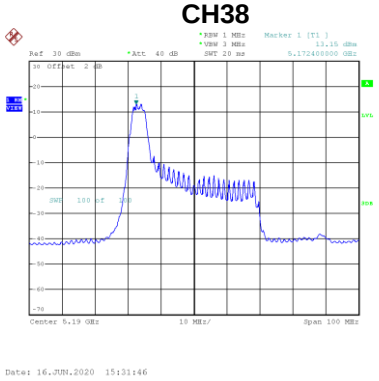

CH46

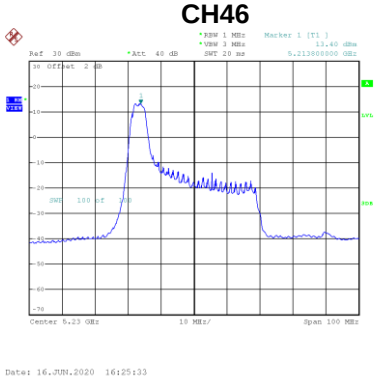

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 2	RU configuration	52/37

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	11.88	1.15	13.03	16.99	Complies
46	5230	11.62	1.15	12.77	16.99	Complies

CH38

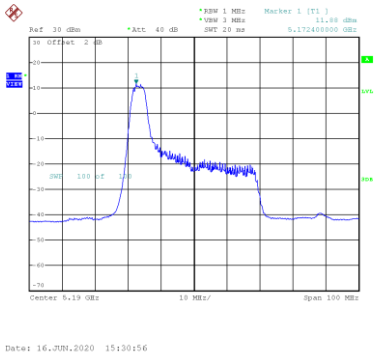

CH46

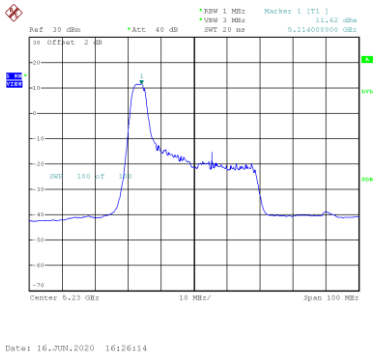

Test Mode	UNII-1_TX AX (HE40) Mode_ Total	RU configuration	52/37

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	16.73	16.99	Complies
46	5230	16.76	16.99	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 1	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	13.37	1.15	14.52	16.99	Complies
46	5230	13.22	1.15	14.37	16.99	Complies

CH38

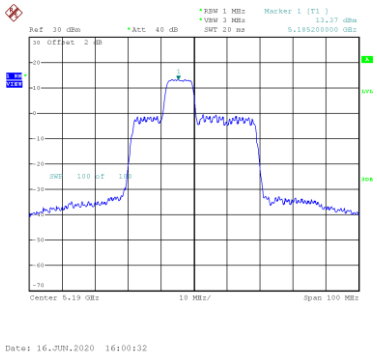

CH46

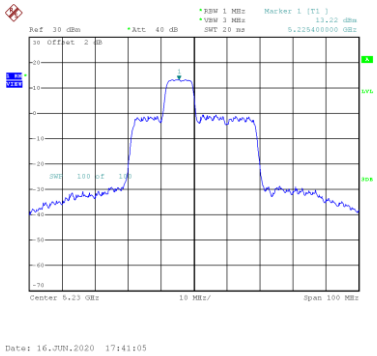

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 2	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	11.61	1.15	12.76	16.99	Complies
46	5230	11.88	1.15	13.03	16.99	Complies

CH38

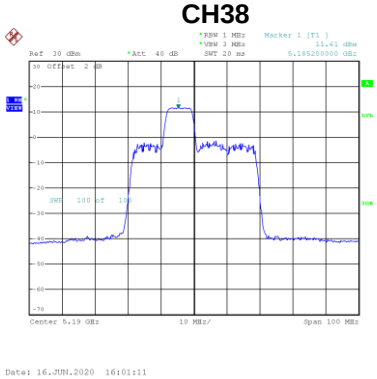

CH46

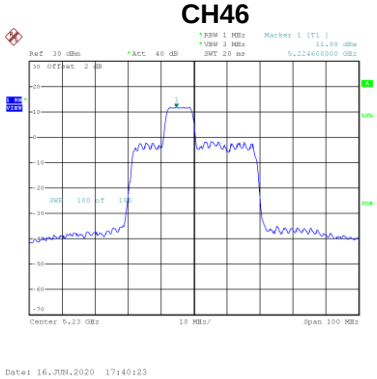

Test Mode	UNII-1_TX AX (HE40) Mode_ Total	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	16.74	16.99	Complies
46	5230	16.77	16.99	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 1	RU configuration	242/62

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	13.09	1.15	14.24	16.99	Complies
46	5230	13.33	1.15	14.48	16.99	Complies

CH38

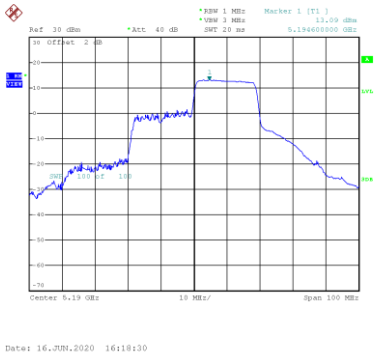

CH46

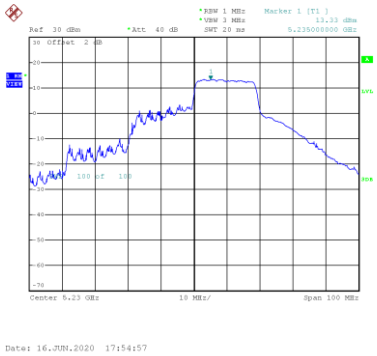

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 2	RU configuration	242/62

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	11.98	1.15	13.13	16.99	Complies
46	5230	11.62	1.15	12.77	16.99	Complies

CH38

CH46

Test Mode	UNII-1_TX AX (HE40) Mode_ Total	RU configuration	242/62

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	16.73	16.99	Complies
46	5230	16.72	16.99	Complies

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 1	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	10.83	1.15	11.98	16.99	Complies
46	5230	10.06	1.15	11.21	16.99	Complies

CH38

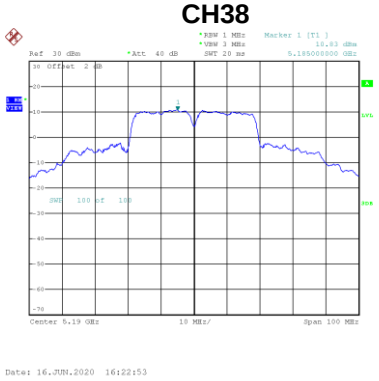

CH46

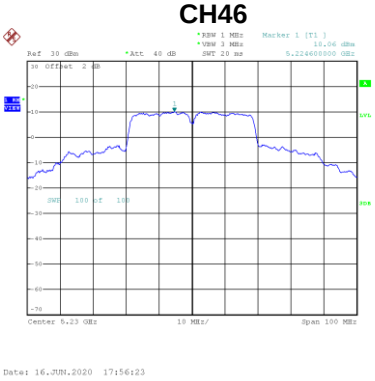

Test Mode	UNII-1_TX AX (HE40) Mode_ Ant. 2	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	9.93	1.15	11.08	16.99	Complies
46	5230	8.87	1.15	10.02	16.99	Complies

CH38

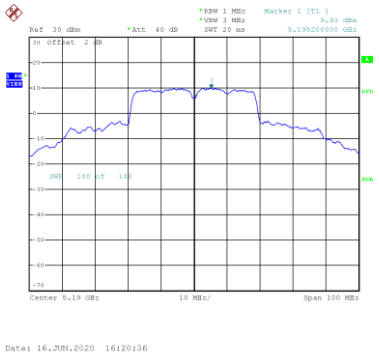

CH46

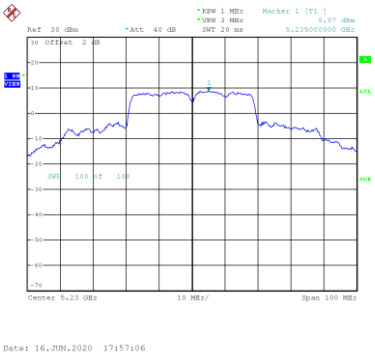

Test Mode	UNII-1_TX AX (HE40) Mode_ Total	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	14.57	16.99	Complies
46	5230	13.67	16.99	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 1	RU configuration	106/56

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	12.76	1.25	14.01	16.99	Complies

CH42

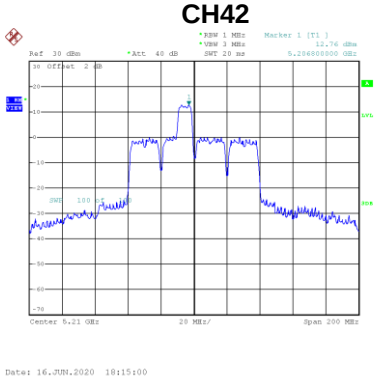

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 2	RU configuration	106/56

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	12.47	1.25	13.72	16.99	Complies

CH42

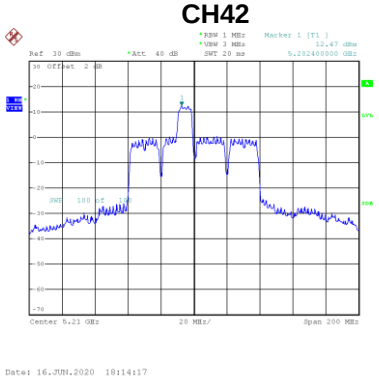

Test Mode	UNII-1_TX AX (HE80) Mode_ Total	RU configuration	106/56

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	16.88	16.99	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 1	RU configuration	242/64

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	11.33	1.25	12.58	16.99	Complies

CH42

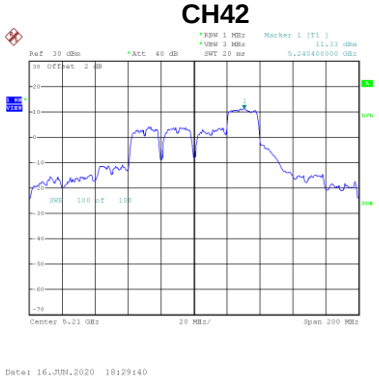

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 2	RU configuration	242/64

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	9.87	1.25	11.12	16.99	Complies

CH42

Test Mode	UNII-1_TX AX (HE80) Mode_ Total	RU configuration	242/64

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	14.92	16.99	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 1	RU configuration	484/66

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	8.81	1.25	10.06	16.99	Complies

CH42

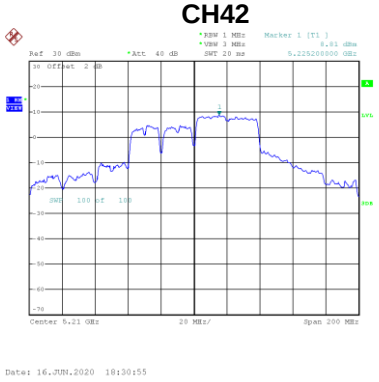

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 2	RU configuration	484/66

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	7.31	1.25	8.56	16.99	Complies

CH42

Test Mode	UNII-1_TX AX (HE80) Mode_ Total	RU configuration	484/66

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	12.38	16.99	Complies

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 1	RU configuration	996/67

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	7.2	1.25	8.45	16.99	Complies

CH42

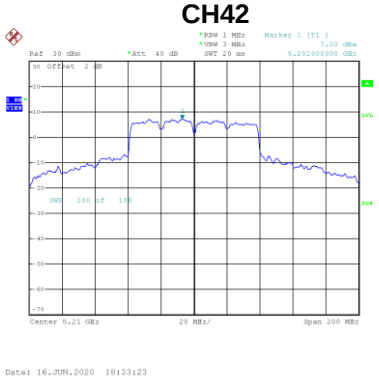

Test Mode	UNII-1_TX AX (HE80) Mode_ Ant. 2	RU configuration	996/67

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	6.11	1.25	7.36	16.99	Complies

CH42

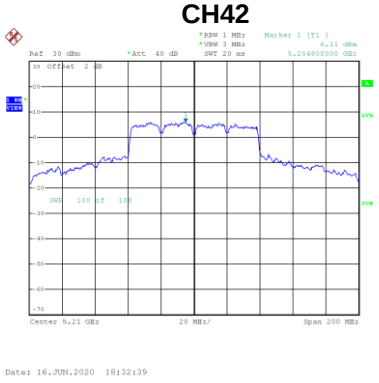

Test Mode	UNII-1_TX AX (HE80) Mode_ Total	RU configuration	996/67

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	10.95	16.99	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_ Ant. 1	RU configuration	52/38

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	15.39	0.55	15.94	29.99	Complies
157	5785	13.93	0.55	14.48	29.99	Complies
165	5825	15.39	0.55	15.94	29.99	Complies

CH149

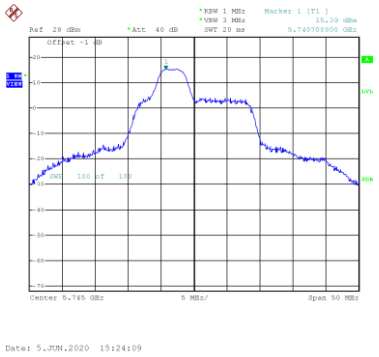

CH157

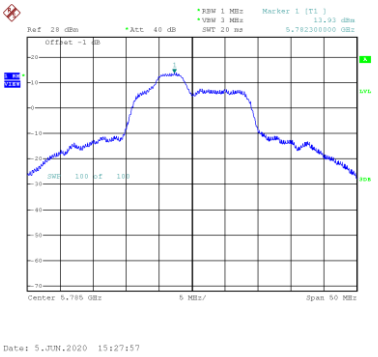

CH165

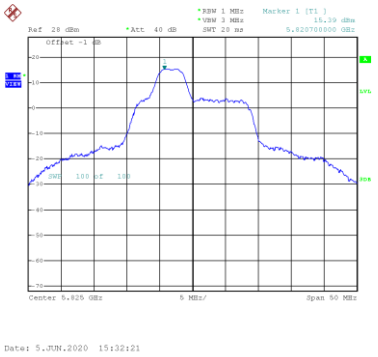

Test Mode	UNII-3_TX AX (HE20) Mode_ Ant. 2	RU configuration	52/38

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	16.15	0.55	16.70	29.99	Complies
157	5785	16.22	0.55	16.77	29.99	Complies
165	5825	16.33	0.55	16.88	29.99	Complies

CH149

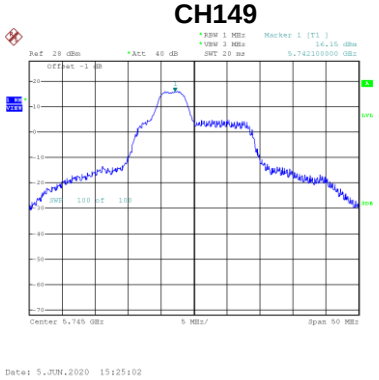

CH157

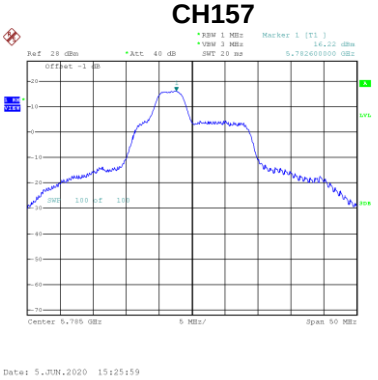

CH165

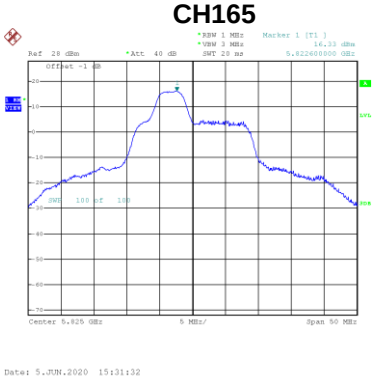

Test Mode	UNII-3_TX AX (HE20) Mode_ Total	RU configuration	52/38

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
149	5745	19.35	29.99	Complies
157	5785	18.78	29.99	Complies
165	5825	19.44	29.99	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_ Ant. 1	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	13.96	0.55	14.51	29.99	Complies
157	5785	14.01	0.55	14.56	29.99	Complies
165	5825	14.06	0.55	14.61	29.99	Complies

CH149

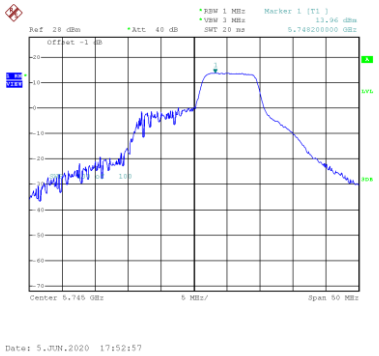

CH157

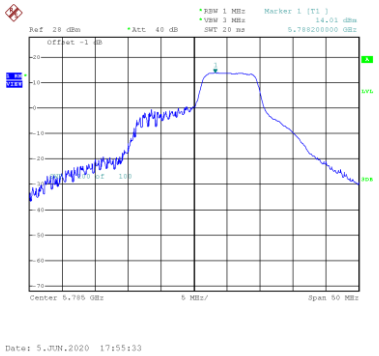

CH165

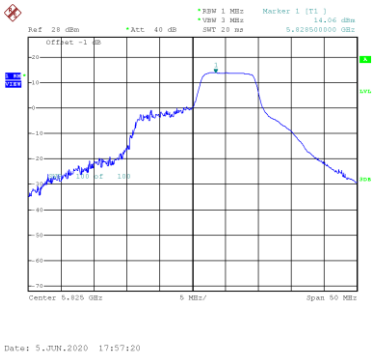

Test Mode	UNII-3_TX AX (HE20) Mode_ Ant. 2	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	14.41	0.55	14.96	29.99	Complies
157	5785	14.39	0.55	14.94	29.99	Complies
165	5825	14.47	0.55	15.02	29.99	Complies

CH149

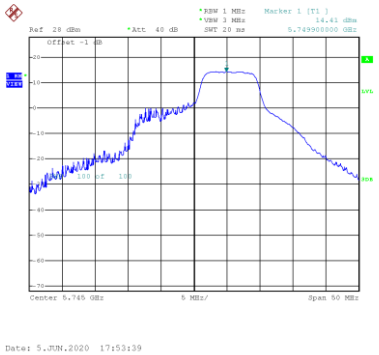

CH157

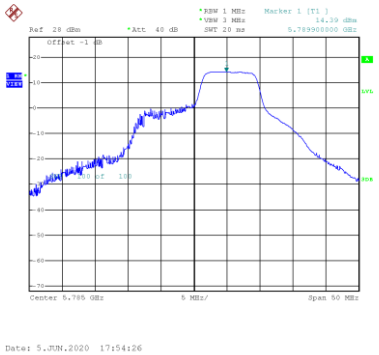

CH165

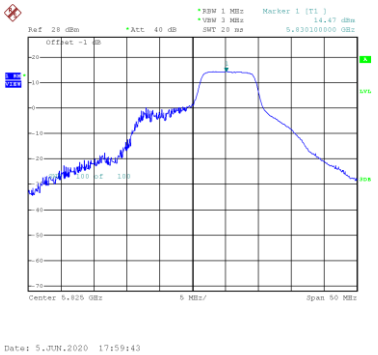

Test Mode	UNII-3_TX AX (HE20) Mode_ Total	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
149	5745	17.75	29.99	Complies
157	5785	17.76	29.99	Complies
165	5825	17.83	29.99	Complies

Test Mode	UNII-3_TX AX (HE20) Mode_ Ant. 1	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	9.94	0.55	10.49	29.99	Complies
157	5785	9.82	0.55	10.37	29.99	Complies
165	5825	10.36	0.55	10.91	29.99	Complies

CH149

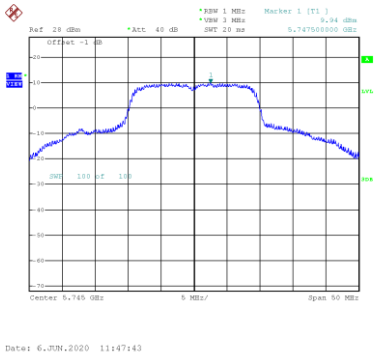

CH157

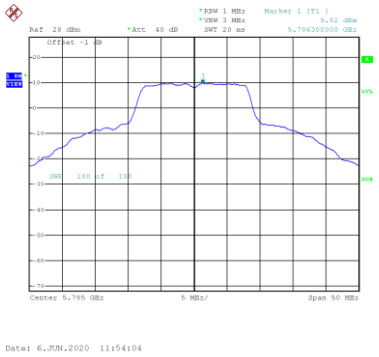

CH165

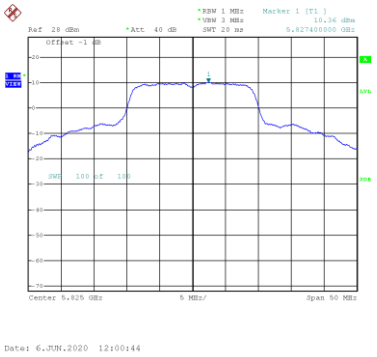

Test Mode	UNII-3_TX AX (HE20) Mode_ Ant. 2	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	10.07	0.55	10.62	29.99	Complies
157	5785	10.40	0.55	10.95	29.99	Complies
165	5825	9.99	0.55	10.54	29.99	Complies

CH149

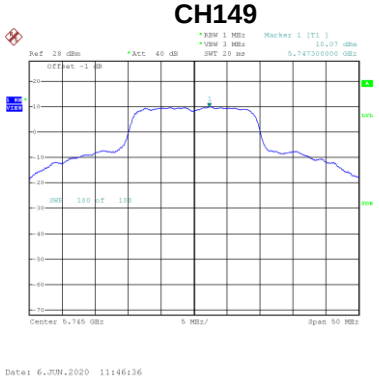

CH157

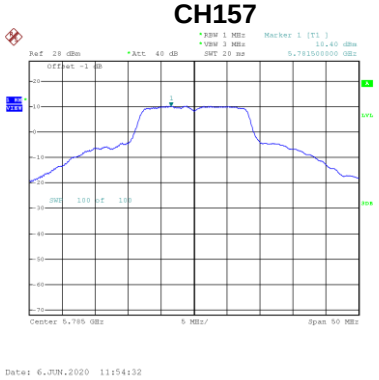

CH165

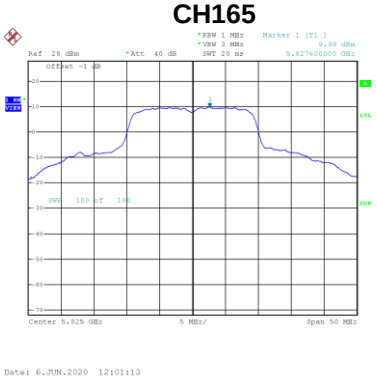

Test Mode	UNII-3_TX AX (HE20) Mode_ Total	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
149	5745	13.56	29.99	Complies
157	5785	13.68	29.99	Complies
165	5825	13.74	29.99	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 1	RU configuration	52/40

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	14.21	1.15	15.36	29.99	Complies
159	5795	16.25	1.15	17.40	29.99	Complies

CH151

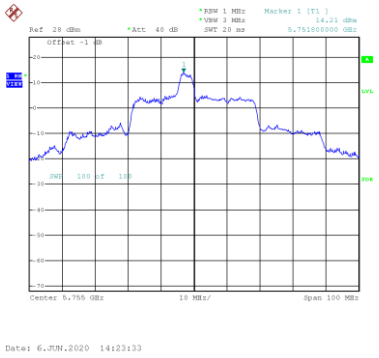

CH159



Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 2	RU configuration	52/40

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	13.74	1.15	14.89	29.99	Complies
159	5795	15.62	1.15	16.77	29.99	Complies

CH151

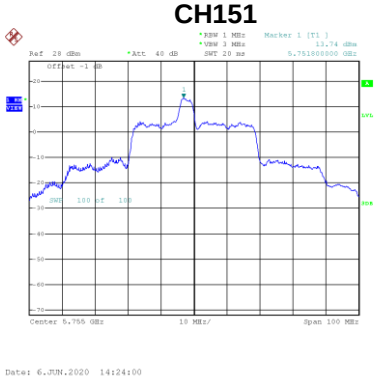

CH159

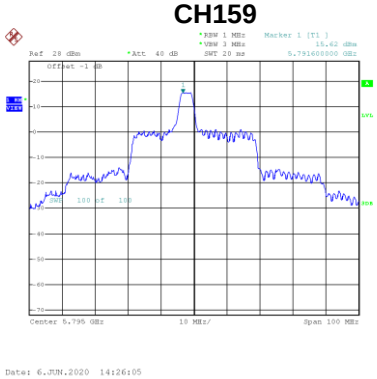

Test Mode	UNII-3_TX AX (HE40) Mode_ Total	RU configuration	52/40

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
151	5755	18.15	29.99	Complies
159	5795	20.11	29.99	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 1	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	13.30	1.15	14.45	29.99	Complies
159	5795	13.80	1.15	14.95	29.99	Complies

CH151

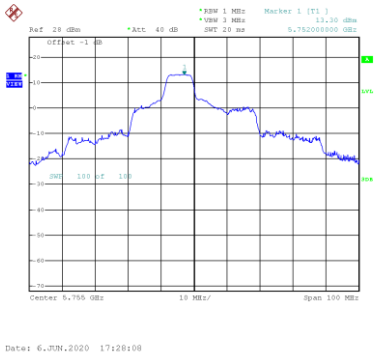

CH159

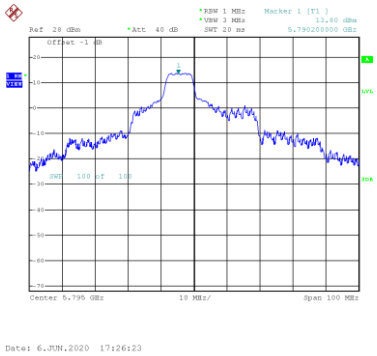

Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 2	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	13.39	1.15	14.54	29.99	Complies
159	5795	13.55	1.15	14.70	29.99	Complies

CH151

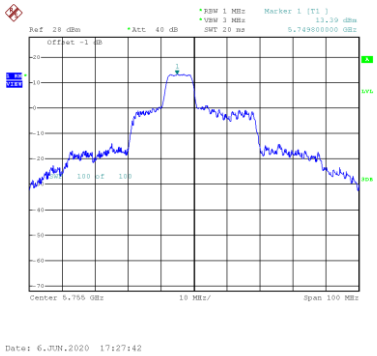

CH159

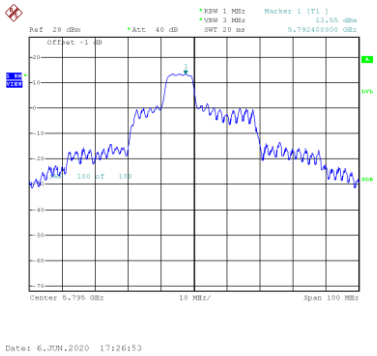

Test Mode	UNII-3_TX AX (HE40) Mode_ Total	RU configuration	106/54

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
151	5755	17.51	29.99	Complies
159	5795	17.84	29.99	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 1	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	9.91	1.15	11.06	29.99	Complies
159	5795	9.84	1.15	10.99	29.99	Complies

CH151



CH159



Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 2	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	9.45	1.15	10.60	29.99	Complies
159	5795	9.52	1.15	10.67	29.99	Complies

CH151

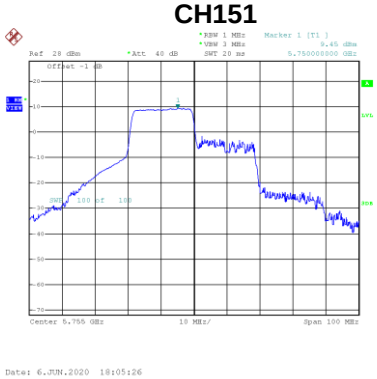

CH159

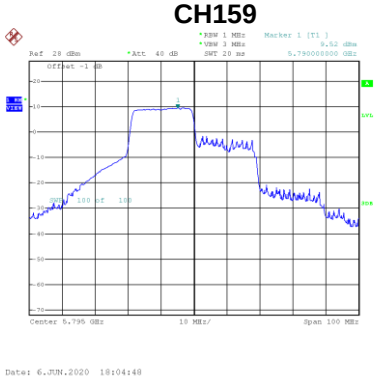

Test Mode	UNII-3_TX AX (HE40) Mode_ Total	RU configuration	242/61

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
151	5755	13.85	29.99	Complies
159	5795	13.85	29.99	Complies

Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 1	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	5.63	1.15	6.78	29.99	Complies
159	5795	5.84	1.15	6.99	29.99	Complies

CH151

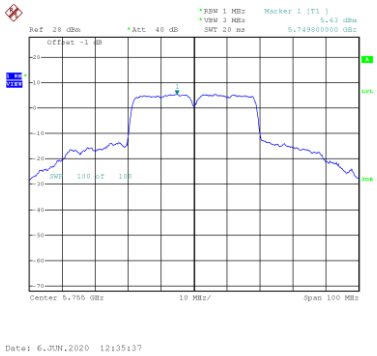

CH159

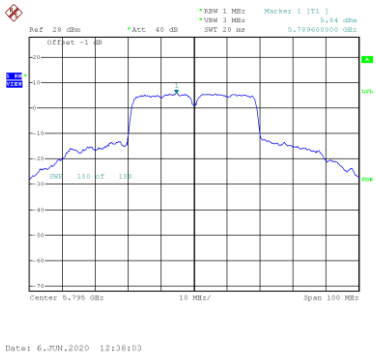

Test Mode	UNII-3_TX AX (HE40) Mode_ Ant. 2	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	4.92	1.15	6.07	29.99	Complies
159	5795	5.17	1.15	6.32	29.99	Complies

CH151

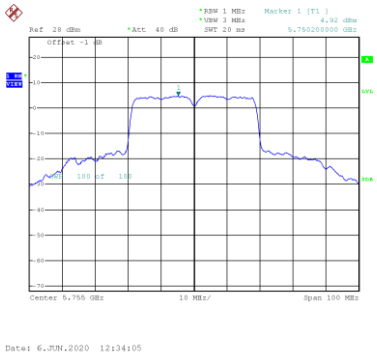

CH159

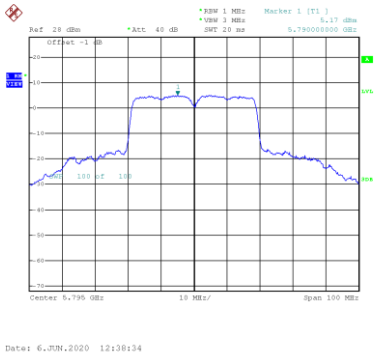

Test Mode	UNII-3_TX AX (HE40) Mode_ Total	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
151	5755	9.45	29.99	Complies
159	5795	9.68	29.99	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 1	RU configuration	106/56

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	12.32	1.25	13.57	29.99	Complies

CH155

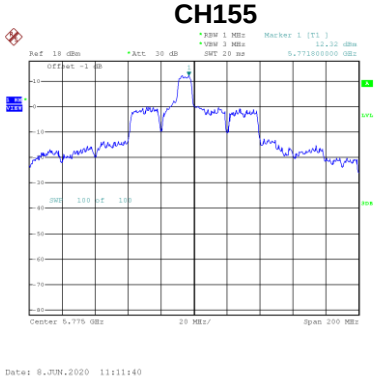

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 2	RU configuration	106/56

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	12.23	1.25	13.48	29.99	Complies

CH155

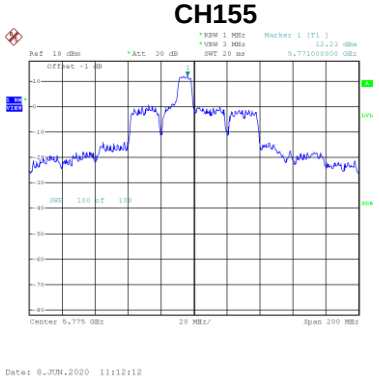

Test Mode	UNII-3_TX AX (HE80) Mode_ Total	RU configuration	106/56

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
155	5775	16.53	29.99	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 1	RU configuration	242/63

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	8.40	1.25	9.65	29.99	Complies

CH155

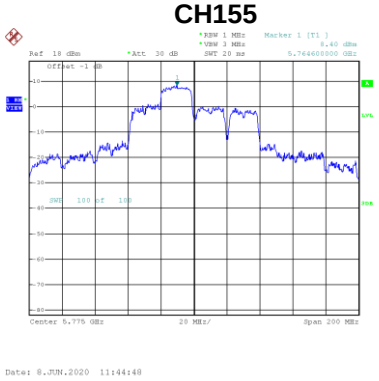

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 2	RU configuration	242/63

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	8.21	1.25	9.46	29.99	Complies

CH155

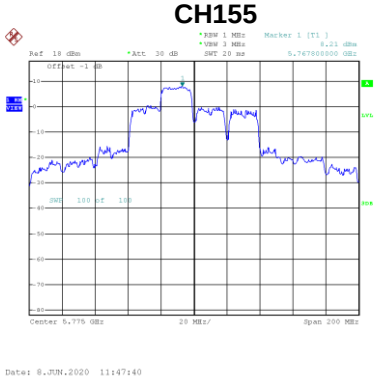

Test Mode	UNII-3_TX AX (HE80) Mode_ Total	RU configuration	242/63

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
155	5775	12.57	29.99	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 1	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	5.33	1.25	6.58	29.99	Complies

CH155

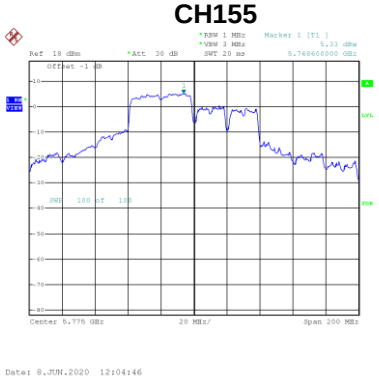

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 2	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	5.74	1.25	6.99	29.99	Complies

CH155

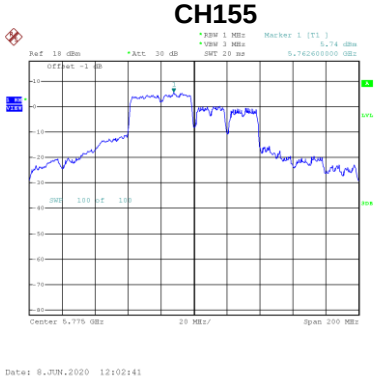

Test Mode	UNII-3_TX AX (HE80) Mode_ Total	RU configuration	484/65

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
155	5775	9.80	29.99	Complies

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 1	RU configuration	996/67

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	3.53	1.25	4.78	29.99	Complies

CH155

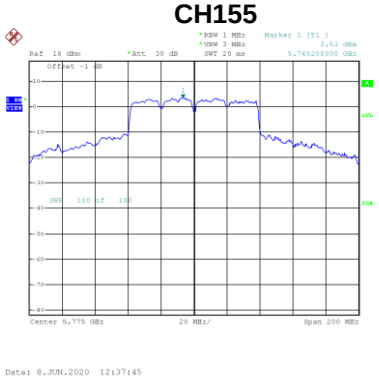

Test Mode	UNII-3_TX AX (HE80) Mode_ Ant. 2	RU configuration	996/67

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	3.44	1.25	4.69	29.99	Complies

CH155

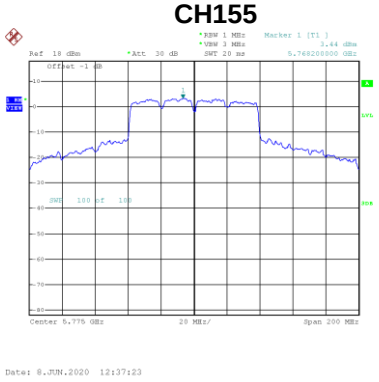

Test Mode	UNII-3_TX AX (HE80) Mode_ Total	RU configuration	996/67

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/MHz)	Result
155	5775	7.74	29.99	Complies

End of Test Report