

Test Report No.:  
**FCC2021-0028-RF1**

## RF Test Report

**EUT** : Smart Button  
**MODEL** : WS101-915M  
**BRAND NAME** : Milesight  
**APPLICANT** : Xiamen Milesight IoT Co., Ltd.  
**Classification Of Test** : N/A

**CVC Testing Technology Co., Ltd.**



Test Report No.:FCC2021-0028-RF1

Page 2 of 39

|                                                                                                                                               |                                                                                                                                                  |                                                                                                                                                    |                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| <b>Client</b>                                                                                                                                 | Name : Xiamen Milesight IoT Co., Ltd.<br>Address : 4/F,NO. 63-2 Wanghai Road, 2nd Software Park,Xiamen ,China                                    |                                                                                                                                                    |                       |
| <b>Manufacturer</b>                                                                                                                           | Name : Xiamen Milesight IoT Co., Ltd.<br>Address : 4/F,NO. 63-2 Wanghai Road, 2nd Software Park,Xiamen ,China                                    |                                                                                                                                                    |                       |
| <b>Equipment Under Test</b>                                                                                                                   | Name : Smart Button<br>Model/Type: WS101-915M<br>Trade mark : Milesight<br>SerialNO.:N/A<br>Sampe NO.:6-1                                        |                                                                                                                                                    |                       |
| Date of Receipt.                                                                                                                              | 2021.09.8                                                                                                                                        | Date of Testing                                                                                                                                    | 2021.09.08~2021.11.04 |
| <b>Test Specification</b>                                                                                                                     |                                                                                                                                                  | <b>Test Result</b>                                                                                                                                 |                       |
| FCC Part 15, Subpart C, Section 15.247                                                                                                        |                                                                                                                                                  | PASS                                                                                                                                               |                       |
| <b>Evaluation of Test Result</b>                                                                                                              | The equipment under test was found to comply with the requirements of the standards applied.<br><br><b>Issue Date: 2021.11.05</b>                |                                                                                                                                                    |                       |
| Tested by:<br><br><b>Xu ZhenFei</b><br>Name      Signature | Reviewed by:<br><br><b>Liu YongHai</b><br>Name      Signature | Approved by:<br><br><b>Chen HuaWen</b><br>Name      Signature |                       |
| <b>Other Aspects: NONE.</b>                                                                                                                   |                                                                                                                                                  |                                                                                                                                                    |                       |
| Abbreviations:OK, Pass= passed      Fail = failed      N/A= not applicable      EUT= equipment, sample(s) under tested                        |                                                                                                                                                  |                                                                                                                                                    |                       |

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



## TABLE OF CONTENTS

|          |                                                        |           |
|----------|--------------------------------------------------------|-----------|
| <b>1</b> | <b>SUMMARY OF TEST RESULTS.....</b>                    | <b>6</b>  |
| 1.1      | LIST OF TEST AND MEASUREMENT INSTRUMENTS.....          | 7         |
| 1.2      | MEASUREMENT UNCERTAINTY.....                           | 7         |
| 1.3      | TEST LOCATION.....                                     | 7         |
| <b>2</b> | <b>GENERAL INFORMATION.....</b>                        | <b>8</b>  |
| 2.1      | GENERAL PRODUCT INFORMATION.....                       | 8         |
| 2.2      | OTHER INFORMATION.....                                 | 9         |
| 2.3      | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... | 10        |
| 2.4      | GENERAL DESCRIPTION OF APPLIED STANDARDS.....          | 12        |
| 2.5      | DESCRIPTION OF SUPPORT UNITS.....                      | 12        |
| <b>3</b> | <b>TEST TYPES AND RESULTS.....</b>                     | <b>13</b> |
| 3.1      | RADIATED EMISSIONS.....                                | 13        |
| 3.1.1    | Limits.....                                            | 13        |
| 3.1.2    | Measurement procedure.....                             | 13        |
| 3.1.3    | Test setup.....                                        | 14        |
| 3.1.4    | Test results.....                                      | 16        |
| 3.2      | NUMBER OF HOPPING FREQUENCY USED.....                  | 21        |
| 3.2.1    | Limits.....                                            | 21        |
| 3.2.2    | Measurement procedure.....                             | 21        |
| 3.2.3    | Test setup.....                                        | 21        |
| 3.2.4    | Test result.....                                       | 22        |
| 3.3      | DWELL TIME ON EACH CHANNEL.....                        | 23        |
| 3.3.1    | Limits.....                                            | 23        |
| 3.3.2    | Measurement procedure.....                             | 23        |
| 3.3.3    | Test setup.....                                        | 23        |
| 3.3.4    | Test result.....                                       | 24        |
| 3.4      | 20dB EMISSION BANDWIDTH.....                           | 25        |
| 3.4.1    | Limits.....                                            | 25        |
| 3.4.2    | Measurement procedure.....                             | 25        |
| 3.4.3    | Test setup.....                                        | 25        |
| 3.4.4    | Test result.....                                       | 26        |
| 3.5      | HOPPING CHANNEL SEPARATION.....                        | 27        |
| 3.5.1    | Limits.....                                            | 27        |
| 3.5.2    | Measurement procedure.....                             | 27        |
| 3.5.3    | Test setup.....                                        | 27        |
| 3.5.4    | Test result.....                                       | 28        |
| 3.6      | CONDUCTED OUTPUT POWER.....                            | 29        |
| 3.6.1    | Limits.....                                            | 29        |
| 3.6.2    | Measurement procedure.....                             | 29        |
| 3.6.3    | Test setup.....                                        | 29        |
| 3.6.4    | Test result.....                                       | 30        |
| 3.7      | POWER SPECTRAL DENSITY MEASUREMENT.....                | 31        |
| 3.7.1    | Limits.....                                            | 31        |
| 3.7.2    | Measurement procedure.....                             | 31        |
| 3.7.3    | Test setup.....                                        | 31        |
| 3.7.4    | Test result.....                                       | 32        |



|       |                                       |    |
|-------|---------------------------------------|----|
| 3.8   | OUT OF BAND EMISSION MEASUREMENT..... | 33 |
| 3.8.1 | <i>Limits</i> .....                   | 33 |
| 3.8.2 | <i>Measurement procedure</i> .....    | 33 |
| 3.8.3 | <i>Test setup</i> .....               | 33 |
| 3.8.4 | <i>Test result</i> .....              | 34 |
| 4     | PHOTOGRAPHS OF TEST SETUP.....        | 36 |
| 5     | PHOTOGRAPHS OF THE EUT.....           | 37 |
|       | APPENDIX A.....                       | 38 |



## RELEASE CONTROL RECORD

| ISSUE NO.        | REASON FOR CHANGE | DATE ISSUED |
|------------------|-------------------|-------------|
| FCC2021-0028-RF1 | Original release  | 2021.11.05  |



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

### APPLIED STANDARD: FCC Part 15, Subpart C

| FCC STANDARD SECTION        | TEST TYPE AND LIMIT                         | RESULT | REMARK                         |
|-----------------------------|---------------------------------------------|--------|--------------------------------|
| 15.207                      | AC Power Conducted Emission                 | N/A    | Power form battery             |
| 15.247(a)(1) (i)            | Number of Hopping Frequency Used            | PASS   | Meet the requirement of limit. |
| 15.247(a)(1)                | Hopping Channel Separation                  | PASS   | Meet the requirement of limit. |
| 15.247(a)(1) (i)            | 20dB EMISSION BANDWIDTH                     | PASS   | Meet the requirement of limit. |
| 15.247(f)                   | Average time of Occupancy for hybrid System | PASS   | Meet the requirement of limit. |
| 15.247(b)                   | Conducted Output Power                      | PASS   | Meet the requirement of limit. |
| 15.247(e)(f)                | Power Spectral Density                      | PASS   | Meet the requirement of limit. |
| 15.247(d),<br>15.209,15.205 | Radiated Emissions                          | PASS   | Meet the requirement of limit. |
| 15.247(d)                   | Out of band Emission Measurement            | PASS   | Meet the requirement of limit. |
| 15.203                      | Antenna Requirement                         | PASS   | No antenna connector is used.  |



## 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Refer to Appendix A.

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| No. | ITEM                        | FREQUENCY     | UNCERTAINTY |
|-----|-----------------------------|---------------|-------------|
| 1   | Conducted Emissions         | 9kHz~30MHz    | ±2.66dB     |
| 2   | Radiated Spurious Emissions | 9KHz ~ 30MHz  | ±0.769dB    |
|     |                             | 30MHz ~ 1GMHz | ±0.877dB    |
|     |                             | 1GHz ~ 18GHz  | ±0.777dB    |
|     |                             | 18GHz ~ 40GHz | ±1.315dB    |

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

## 1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology Co., Ltd

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: [office@cvc.org.cn](mailto:office@cvc.org.cn)

Test Firm Registration Number: 937273

CN Number: 26239 Wireless Test Site Registration Number: CN0103



## 2 GENERAL INFORMATION

### 2.1 GENERAL PRODUCT INFORMATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>PRODUCT</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Smart Button                        |
| <b>BRAND</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Milesight                           |
| <b>MODEL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | WS101-915M                          |
| <b>ADDITIONAL MODEL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                          | N/A                                 |
| <b>FCC ID</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2AYHY-WS101                         |
| <b>POWER SUPPLY</b>                                                                                                                                                                                                                                                                                                                                                                                                                                              | DC 3.6V(ER14335*1*3.6V) From Battey |
| <b>MODULATION TYPE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                           | Chirp Spread Spectrum               |
| <b>OPERATING FREQUENCY</b>                                                                                                                                                                                                                                                                                                                                                                                                                                       | Hybrid 125kHz, 902.3MHz~914.9MHz    |
| <b>NUMBER OF CHANNEL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                         | 64                                  |
| <b>PEAK OUTPUT POWER</b>                                                                                                                                                                                                                                                                                                                                                                                                                                         | 21.77dBm (Max. Measured)            |
| <b>ANTENNA TYPE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                              | Spring Antenna , 1dBi Gain          |
| <b>I/O PORTS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Refer to user's manual              |
| <b>CABLE SUPPLIED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                            | N/A                                 |
| Remark:<br><ol style="list-style-type: none"><li>For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</li><li>For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.</li><li>EUT photo refer to the report (Report NO.: FCC2021-0028-E).</li><li>The EUT have SISO function, provides 1 completed transmitter and 1 receiver.</li></ol> |                                     |



## 2.2 OTHER INFORMATION

| Operation Frequency Each of Channel |                |         |                |         |                |         |                |
|-------------------------------------|----------------|---------|----------------|---------|----------------|---------|----------------|
| CHANNEL                             | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) | CHANNEL | FREQ.<br>(MHz) |
| 0                                   | 902.3          | 18      | 905.9          | 36      | 909.5          | 54      | 913.1          |
| 1                                   | 902.5          | 19      | 906.1          | 37      | 909.7          | 55      | 913.3          |
| 2                                   | 902.7          | 20      | 906.3          | 38      | 909.9          | 56      | 913.5          |
| 3                                   | 902.9          | 21      | 906.5          | 39      | 910.1          | 57      | 913.7          |
| 4                                   | 903.1          | 22      | 906.7          | 40      | 910.3          | 58      | 913.9          |
| 5                                   | 903.3          | 23      | 906.9          | 41      | 910.5          | 59      | 914.1          |
| 6                                   | 903.5          | 24      | 907.1          | 42      | 910.7          | 60      | 914.3          |
| 7                                   | 903.7          | 25      | 907.3          | 43      | 910.9          | 61      | 914.5          |
| 8                                   | 903.9          | 26      | 907.5          | 44      | 911.1          | 62      | 914.7          |
| 9                                   | 904.1          | 27      | 907.7          | 45      | 911.3          | 63      | 914.9          |
| 10                                  | 904.3          | 28      | 907.9          | 46      | 911.5          |         |                |
| 11                                  | 904.5          | 29      | 908.1          | 47      | 911.7          |         |                |
| 12                                  | 904.7          | 30      | 908.3          | 48      | 911.9          |         |                |
| 13                                  | 904.9          | 31      | 908.5          | 49      | 912.1          |         |                |
| 14                                  | 905.1          | 32      | 908.7          | 50      | 912.3          |         |                |
| 15                                  | 905.3          | 33      | 908.9          | 51      | 912.5          |         |                |
| 16                                  | 905.5          | 34      | 909.1          | 52      | 912.7          |         |                |
| 17                                  | 905.7          | 35      | 909.3          | 53      | 912.9          |         |                |

## 2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

The worst case was found when positioned on xaxis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

| EUT CONFIGURE MODE | APPLICABLE TEST ITEMS |        |     |      | DESCRIPTION |
|--------------------|-----------------------|--------|-----|------|-------------|
|                    | RSE<1G                | RSE≥1G | PLC | APCM |             |
| A                  | √                     | √      | -   | √    | LORA link   |

Where **RSE<1G**: Radiated Emission below 1GHz.

**RSE≥1G**: Radiated Emission above 1GHz.

**PLC**: Power Line Conducted Emission.

**APCM**: Antenna Port Conducted Measurement.

### RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE       | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-------------|
| A                  | 0 to 63           | 0              | Chirp Spread Spectrum | DR0         |

For the test results, only the worst case was shown in test report.

### RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE       | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-------------|
| A                  | 0 to 63           | 0,36,63        | Chirp Spread Spectrum | DR0         |



## **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE       | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-------------|
| A                  | 0 to 63           | 0,36,63        | Chirp Spread Spectrum | DR0         |

## **TEST CONDITION:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | TEST VOLTAGE (SYSTEM)     | TESTED BY  |
|---------------|--------------------------|---------------------------|------------|
| RSE<1G        | 25deg. C, 55%RH          | DC 3.6V From Full Battery | Li JiaLing |
| RSE≥1G        | 25deg. C, 55%RH          | DC 3.6V From Full Battery | Li JiaLing |
| PLC           | -                        | -                         | -          |
| APCM          | 25deg. C, 60%RH          | DC 3.6V From Full Battery | Liu ShiWei |



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

**FCC PART 15, Subpart C. Section 15.247**  
**KDB 558074 D01 15.247 Meas Guidance v05r02**  
**ANSI C63.10-2020**

All test items have been performed and recorded as per the above standards

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Training the tests:

| Support Equipment |             |                   |            |                      |                    |                |             |
|-------------------|-------------|-------------------|------------|----------------------|--------------------|----------------|-------------|
| NO                | Description | Brand             | Model No.  | Serial Number        | Supplied by        |                |             |
| 1                 | Laptop      | Lenovo            | V14        | PFNXB1628023         | Lab                |                |             |
|                   |             |                   |            |                      |                    |                |             |
| Support Cable     |             |                   |            |                      |                    |                |             |
| NO                | Description | Quantity (Number) | Length (m) | Detachable (Yes/ No) | Shielded (Yes/ No) | Cores (Number) | Supplied by |
| 1                 | N/A         | N/A               | N/A        | N/A                  | N/A                | N/A            | N/A         |
|                   |             |                   |            |                      |                    |                |             |



## 3 TEST TYPES AND RESULTS

### 3.1 RADIATED EMISSIONS

#### 3.1.1 Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

| FREQUENCIES (MHz) | FIELD STRENGTH<br>(Microvolts/Meter) | MEASUREMENT DISTANCE<br>(Meters) |
|-------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                          | 300                              |
| 0.490 ~ 1.705     | 24000/F(kHz)                         | 30                               |
| 1.705 ~ 30.0      | 30                                   | 30                               |
| 30 ~ 88           | 100                                  | 3                                |
| 88 ~ 216          | 150                                  | 3                                |
| 216 ~ 960         | 200                                  | 3                                |
| Above 960         | 500                                  | 3                                |

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 3.1.2 Measurement procedure


- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

### 3.1.3 Test setup


Below 30MHz Test Setup:

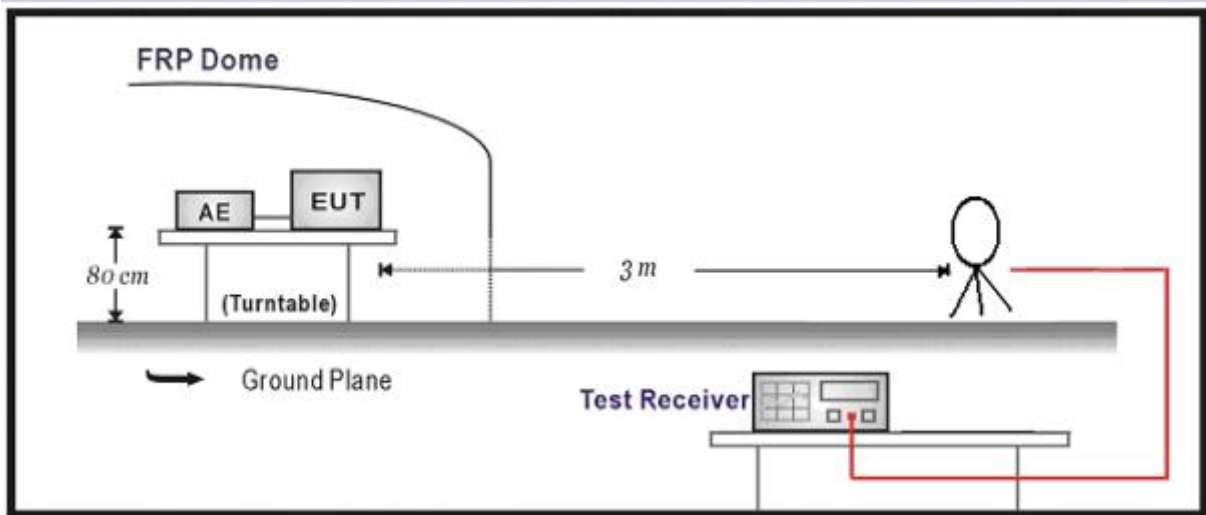

Below 1GHz Test Setup:

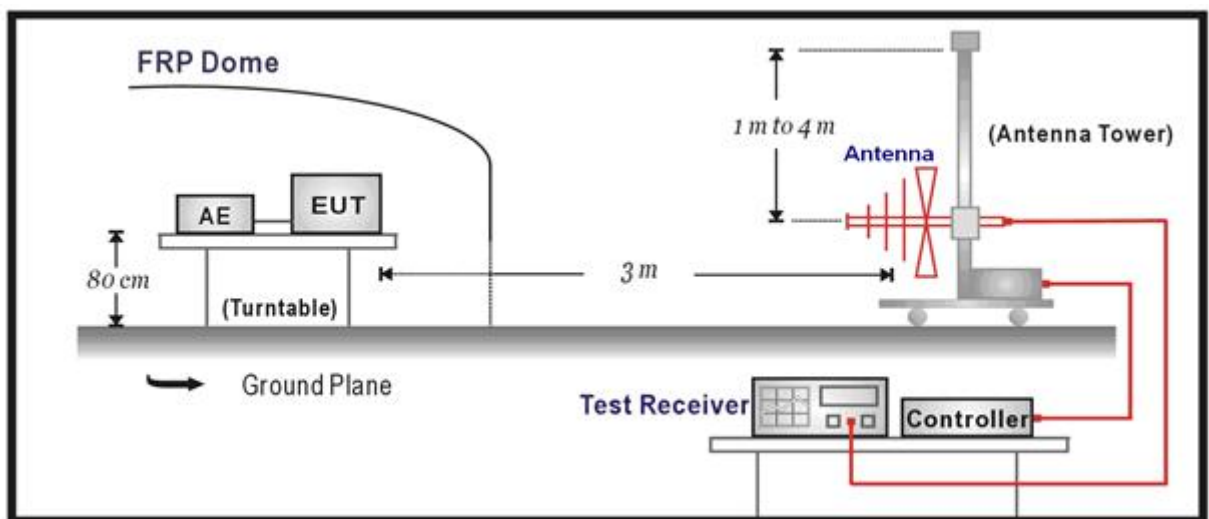


Above 1GHz Test Setup:

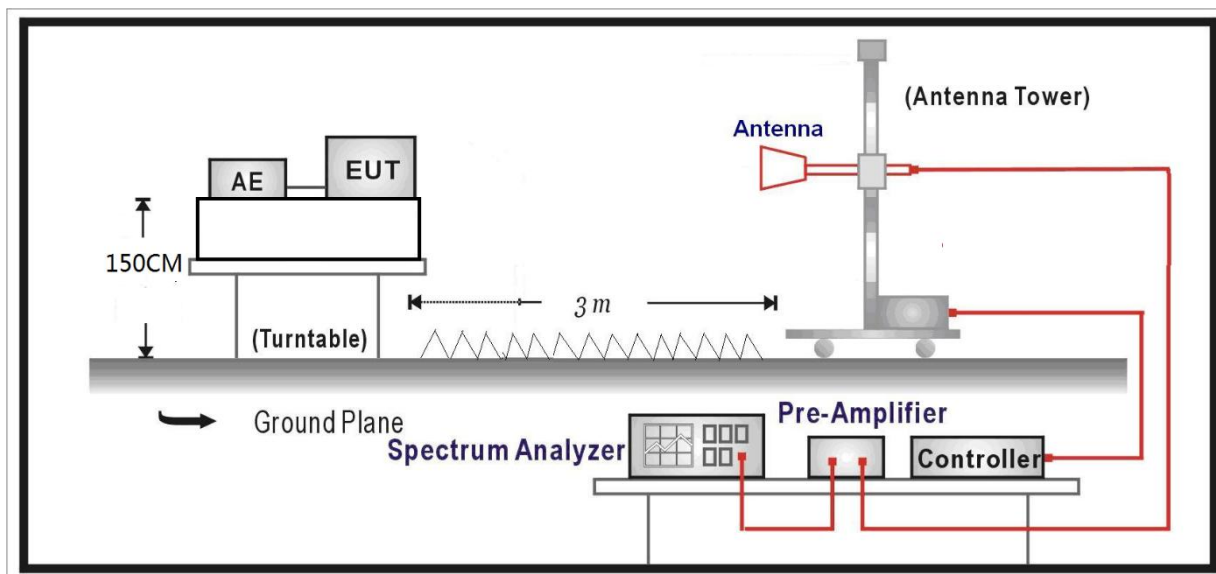

## 3.1.4 Test results


BELOW 1GHz WORST-CASE DATA:

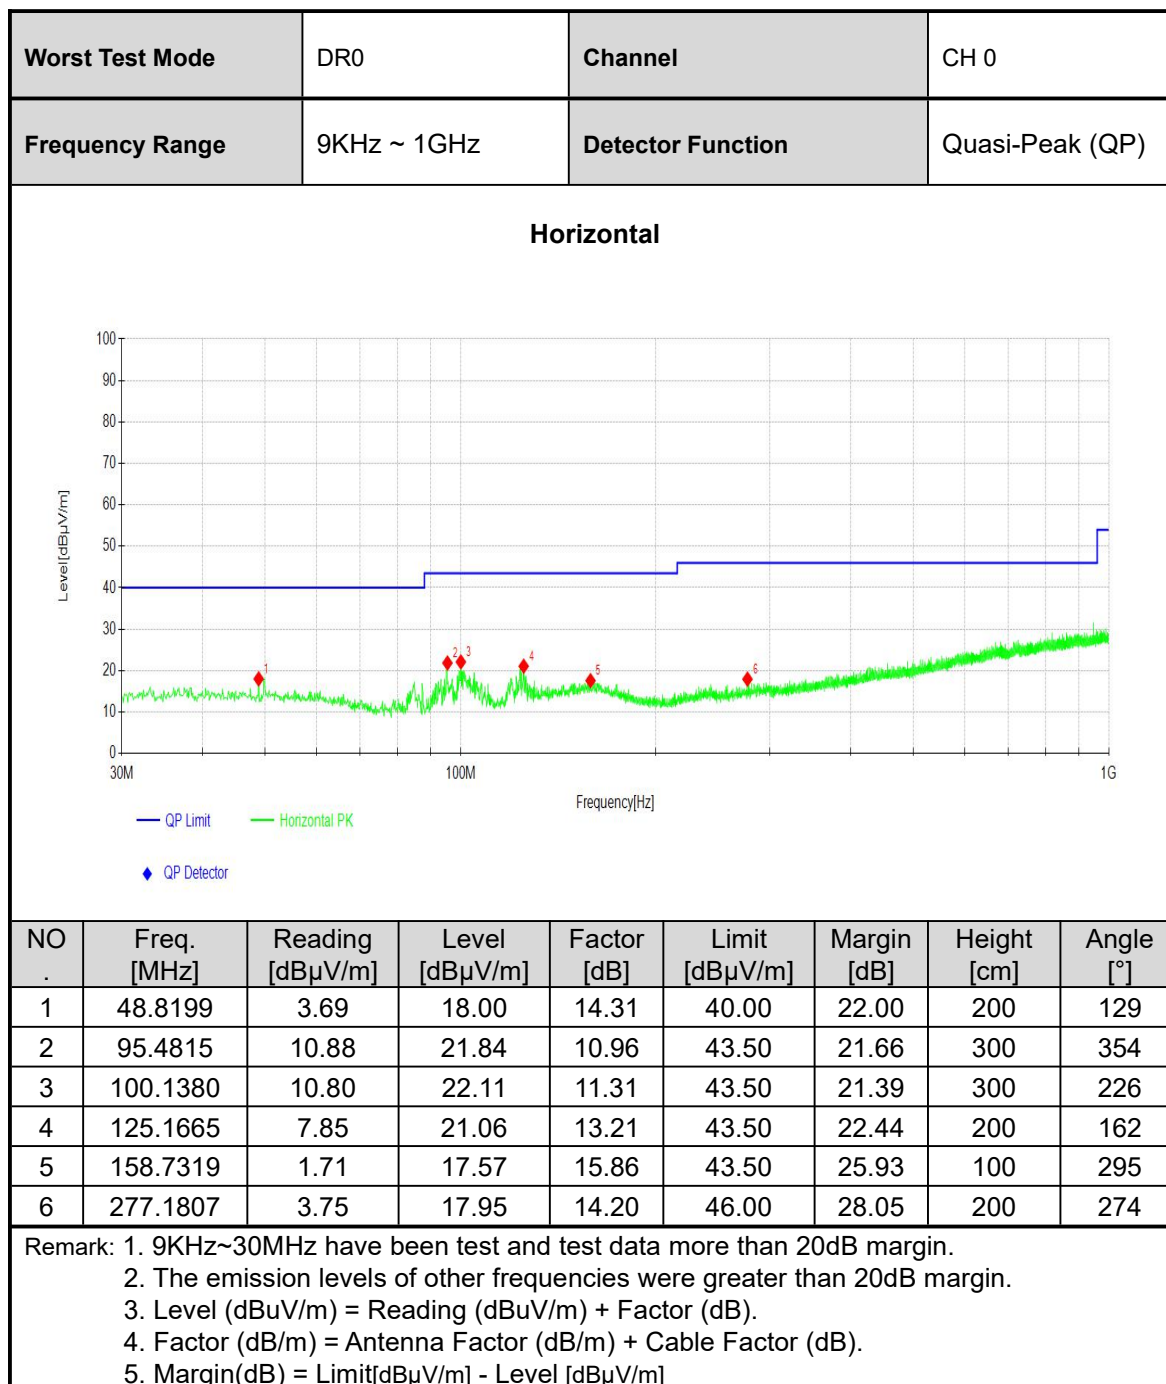



|                 |             |                   |                 |
|-----------------|-------------|-------------------|-----------------|
| Worst Test Mode | DR0         | Channel           | CH 0            |
| Frequency Range | 9KHz ~ 1GHz | Detector Function | Quasi-Peak (QP) |

## Vertical

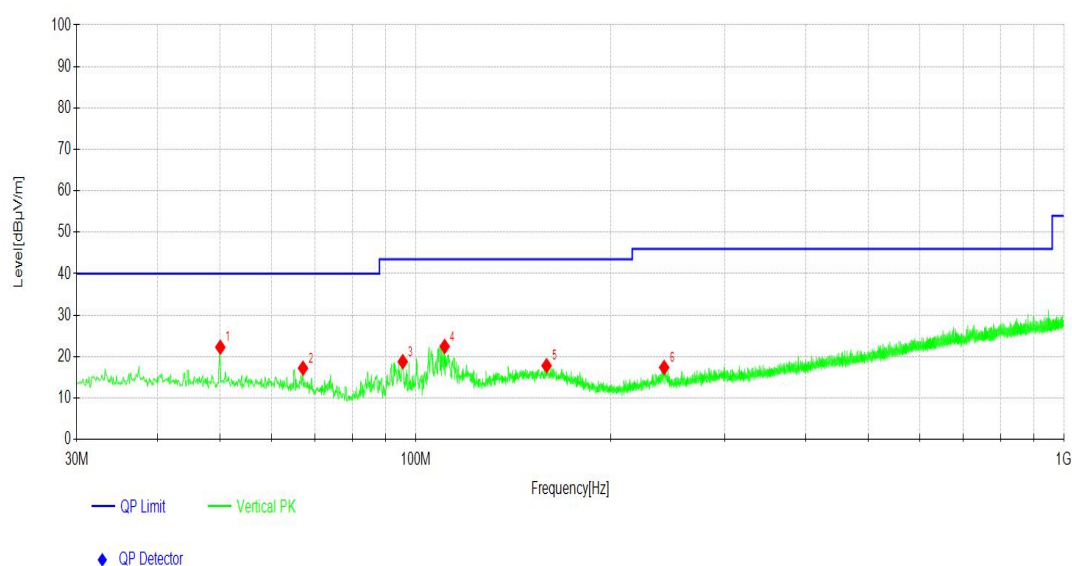

| NO | Freq. [MHz] | Reading [dBμV/m] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] |
|----|-------------|------------------|----------------|-------------|----------------|-------------|-------------|-----------|
| 1  | 49.9840     | 8.00             | 22.27          | 14.27       | 40.00          | 17.73       | 100         | 349       |
| 2  | 67.0577     | 4.81             | 17.21          | 12.40       | 40.00          | 22.79       | 300         | 338       |
| 3  | 95.5786     | 7.81             | 18.78          | 10.97       | 43.50          | 24.72       | 300         | 247       |
| 4  | 110.9061    | 10.52            | 22.45          | 11.93       | 43.50          | 21.05       | 300         | 128       |
| 5  | 159.3139    | 1.93             | 17.81          | 15.88       | 43.50          | 25.69       | 300         | 96        |
| 6  | 241.8692    | 4.03             | 17.39          | 13.36       | 46.00          | 28.61       | 300         | 0         |

Remark: 1. 9KHz~30MHz have been test and test data more than 20dB margin.

2. The emission levels of other frequencies were greater than 20dB margin.

3. Level (dBμV/m) = Reading (dBμV/m) + Factor (dB).

4. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

5. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



## ABOVE 1GHz DATA

|                                                                                                                                                                                                                                                              |                |                     |                   |                   |                   |                |                |              |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------|-------------------|-------------------|-------------------|----------------|----------------|--------------|--------|
| Channel                                                                                                                                                                                                                                                      |                | CH 0                |                   | Frequency         |                   | 902.3MHz       |                |              |        |
| Frequency Range                                                                                                                                                                                                                                              |                | 1GHz~9.3G           |                   | Detector Function |                   | PK/AV          |                |              |        |
| Horizontal                                                                                                                                                                                                                                                   |                |                     |                   |                   |                   |                |                |              |        |
| NO                                                                                                                                                                                                                                                           | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Factor<br>[dB]    | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Remark |
| 1                                                                                                                                                                                                                                                            | 1804.6         | 45.54               | 53.27             | 7.73              | 74.00             | 20.73          | 181            | 259          | PK     |
| 2                                                                                                                                                                                                                                                            | 1804.6         | 43.19               | 50.92             | 7.73              | 54.00             | 3.08           | 181            | 93           | AV     |
| 3                                                                                                                                                                                                                                                            | 2706.9         | 31.73               | 42.93             | 11.20             | 54.00             | 11.07          | 166            | 142          | AV     |
| 4                                                                                                                                                                                                                                                            | 2706.9         | 37.18               | 48.42             | 11.24             | 74.00             | 25.58          | 166            | 0            | PK     |
| 5                                                                                                                                                                                                                                                            | 3609.2         | 37.58               | 52.44             | 14.86             | 74.00             | 21.56          | 211            | 9            | PK     |
| 6                                                                                                                                                                                                                                                            | 3609.2         | 32.89               | 47.75             | 14.86             | 54.00             | 6.25           | 211            | 157          | AV     |
| Vertical                                                                                                                                                                                                                                                     |                |                     |                   |                   |                   |                |                |              |        |
| NO                                                                                                                                                                                                                                                           | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Factor<br>[dB]    | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Remark |
| 1                                                                                                                                                                                                                                                            | 1804.6         | 44.42               | 52.15             | 7.73              | 74.00             | 21.85          | 156            | 250          | PK     |
| 2                                                                                                                                                                                                                                                            | 1804.6         | 41.67               | 49.40             | 7.73              | 54.00             | 4.60           | 156            | 3            | AV     |
| 3                                                                                                                                                                                                                                                            | 2706.9         | 37.78               | 48.98             | 11.20             | 54.00             | 5.02           | 205            | 162          | AV     |
| 4                                                                                                                                                                                                                                                            | 2706.9         | 40.98               | 52.18             | 11.20             | 74.00             | 21.82          | 205            | 117          | PK     |
| 5                                                                                                                                                                                                                                                            | 3609.2         | 36.15               | 51.01             | 14.86             | 74.00             | 22.99          | 175            | 121          | PK     |
| 6                                                                                                                                                                                                                                                            | 3609.2         | 31.06               | 45.92             | 14.86             | 54.00             | 8.08           | 175            | 108          | AV     |
| Remark: 1. The emission levels of other frequencies were greater than 20dB margin.<br>2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).<br>3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).<br>4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m] |                |                     |                   |                   |                   |                |                |              |        |



|                                                                                                                                                                                                                                                              |                |                     |                   |                   |                   |                |                |              |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------|-------------------|-------------------|-------------------|----------------|----------------|--------------|--------|
| Channel                                                                                                                                                                                                                                                      |                | CH 36               |                   | Frequency         |                   | 909.5MHz       |                |              |        |
| Frequency Range                                                                                                                                                                                                                                              |                | 1GHz~9.3G           |                   | Detector Function |                   | PK/AV          |                |              |        |
| Horizontal                                                                                                                                                                                                                                                   |                |                     |                   |                   |                   |                |                |              |        |
| NO                                                                                                                                                                                                                                                           | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Factor<br>[dB]    | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Remark |
| 1                                                                                                                                                                                                                                                            | 1819           | 38.75               | 46.55             | 7.80              | 74.00             | 27.45          | 163            | 59           | PK     |
| 2                                                                                                                                                                                                                                                            | 1819           | 34.00               | 41.80             | 7.80              | 54.00             | 12.20          | 163            | 183          | AV     |
| 3                                                                                                                                                                                                                                                            | 2728.5         | 36.60               | 47.62             | 11.02             | 74.00             | 26.38          | 211            | 57           | PK     |
| 4                                                                                                                                                                                                                                                            | 2728.5         | 31.93               | 43.13             | 11.20             | 54.00             | 10.87          | 211            | 143          | AV     |
| 5                                                                                                                                                                                                                                                            | 3638           | 35.55               | 50.41             | 14.86             | 74.00             | 23.59          | 208            | 122          | PK     |
| 6                                                                                                                                                                                                                                                            | 3638           | 31.54               | 46.40             | 14.86             | 54.00             | 7.60           | 208            | 21           | AV     |
| Vertical                                                                                                                                                                                                                                                     |                |                     |                   |                   |                   |                |                |              |        |
| NO                                                                                                                                                                                                                                                           | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Factor<br>[dB]    | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Remark |
| 1                                                                                                                                                                                                                                                            | 1819           | 39.38               | 47.18             | 7.80              | 74.00             | 26.82          | 192            | 54           | PK     |
| 2                                                                                                                                                                                                                                                            | 1819           | 35.52               | 43.32             | 7.80              | 54.00             | 10.68          | 192            | 221          | AV     |
| 3                                                                                                                                                                                                                                                            | 2728.5         | 37.49               | 48.69             | 11.20             | 54.00             | 5.31           | 219            | 45           | AV     |
| 4                                                                                                                                                                                                                                                            | 2728.5         | 40.64               | 51.84             | 11.20             | 74.00             | 22.16          | 219            | 120          | PK     |
| 5                                                                                                                                                                                                                                                            | 3638           | 31.79               | 46.65             | 14.86             | 54.00             | 7.35           | 201            | 207          | AV     |
| 6                                                                                                                                                                                                                                                            | 3638           | 36.21               | 51.07             | 14.86             | 74.00             | 22.93          | 201            | 167          | PK     |
| Remark: 1. The emission levels of other frequencies were greater than 20dB margin.<br>2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).<br>3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).<br>4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m] |                |                     |                   |                   |                   |                |                |              |        |



|                                                                                                                                                                                                                                                              |                |                     |                   |                   |                   |                |                |              |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------|-------------------|-------------------|-------------------|----------------|----------------|--------------|--------|
| Channel                                                                                                                                                                                                                                                      |                | CH 63               |                   | Frequency         |                   | 914.2MHz       |                |              |        |
| Frequency Range                                                                                                                                                                                                                                              |                | 1GHz~9.3G           |                   | Detector Function |                   | PK/AV          |                |              |        |
| Horizontal                                                                                                                                                                                                                                                   |                |                     |                   |                   |                   |                |                |              |        |
| NO                                                                                                                                                                                                                                                           | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Factor<br>[dB]    | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Remark |
| 1                                                                                                                                                                                                                                                            | 1829.8         | 38.65               | 46.51             | 7.86              | 74.00             | 27.49          | 167            | 138          | PK     |
| 2                                                                                                                                                                                                                                                            | 1829.8         | 34.87               | 42.73             | 7.86              | 54.00             | 11.27          | 167            | 223          | AV     |
| 3                                                                                                                                                                                                                                                            | 2744.7         | 31.71               | 42.91             | 11.20             | 54.00             | 11.09          | 130            | 199          | AV     |
| 4                                                                                                                                                                                                                                                            | 2744.7         | 35.91               | 47.88             | 11.97             | 74.00             | 26.12          | 130            | 63           | PK     |
| 5                                                                                                                                                                                                                                                            | 3659.6         | 36.14               | 50.93             | 14.79             | 74.00             | 23.07          | 222            | 258          | PK     |
| 6                                                                                                                                                                                                                                                            | 3659.6         | 31.58               | 46.44             | 14.86             | 54.00             | 7.56           | 222            | 174          | AV     |
| Vertical                                                                                                                                                                                                                                                     |                |                     |                   |                   |                   |                |                |              |        |
| NO                                                                                                                                                                                                                                                           | Freq.<br>[MHz] | Reading<br>[dBμV/m] | Level<br>[dBμV/m] | Factor<br>[dB]    | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Remark |
| 1                                                                                                                                                                                                                                                            | 1829.8         | 44.55               | 52.28             | 7.73              | 74.00             | 21.72          | 148            | 21           | PK     |
| 2                                                                                                                                                                                                                                                            | 1829.8         | 41.77               | 49.50             | 7.73              | 54.00             | 4.50           | 148            | 165          | AV     |
| 3                                                                                                                                                                                                                                                            | 2744.7         | 40.52               | 51.62             | 11.10             | 74.00             | 22.38          | 217            | 182          | PK     |
| 4                                                                                                                                                                                                                                                            | 2744.7         | 38.27               | 49.47             | 11.20             | 54.00             | 4.53           | 217            | 18           | AV     |
| 5                                                                                                                                                                                                                                                            | 3659.6         | 37.10               | 51.96             | 14.86             | 74.00             | 22.04          | 135            | 248          | PK     |
| 6                                                                                                                                                                                                                                                            | 3659.6         | 31.61               | 46.47             | 14.86             | 54.00             | 7.53           | 135            | 112          | AV     |
| Remark: 1. The emission levels of other frequencies were greater than 20dB margin.<br>2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB).<br>3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).<br>4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m] |                |                     |                   |                   |                   |                |                |              |        |

## 3.2 NUMBER OF HOPPING FREQUENCY USED


### 3.2.1 Limits

At least 50 channels frequencies, and should be equally spaced.

### 3.2.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were completed.


### 3.2.3 Test setup

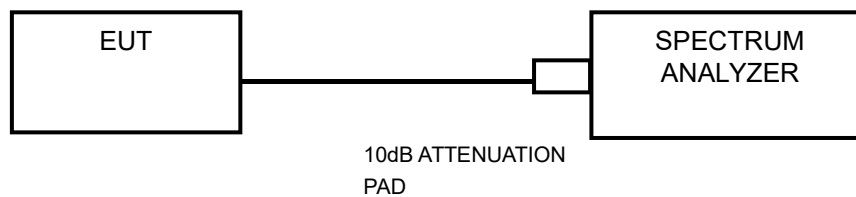



## 3.2.4 Test result

There are 64 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

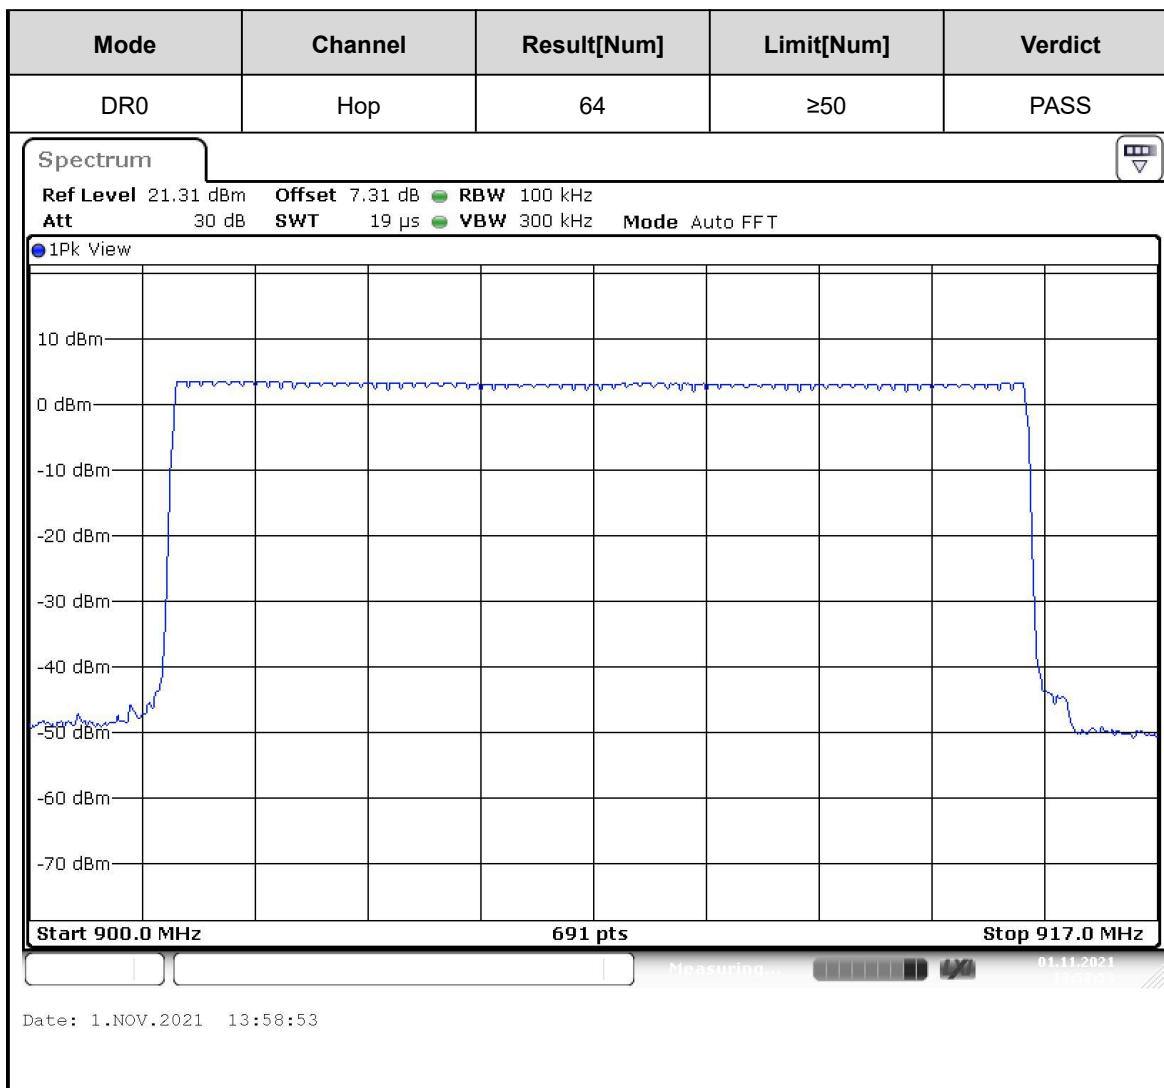

### 3.3 DWELL TIME ON EACH CHANNEL


#### 3.3.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 3.3.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.


#### 3.3.3 Test setup

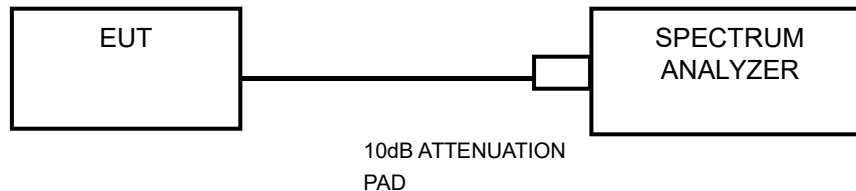



## 3.3.4 Test result

| Mode | Number of Hopping Channel | Number of transmission in a period(channel number*0.4 sec) | Length of transmission time (msec) | Result (sec) | Limit (sec) | Verdict |
|------|---------------------------|------------------------------------------------------------|------------------------------------|--------------|-------------|---------|
| DR0  | 64                        | 25.6                                                       | 0.371                              | 0.371        | ≤0.4        | PASS    |

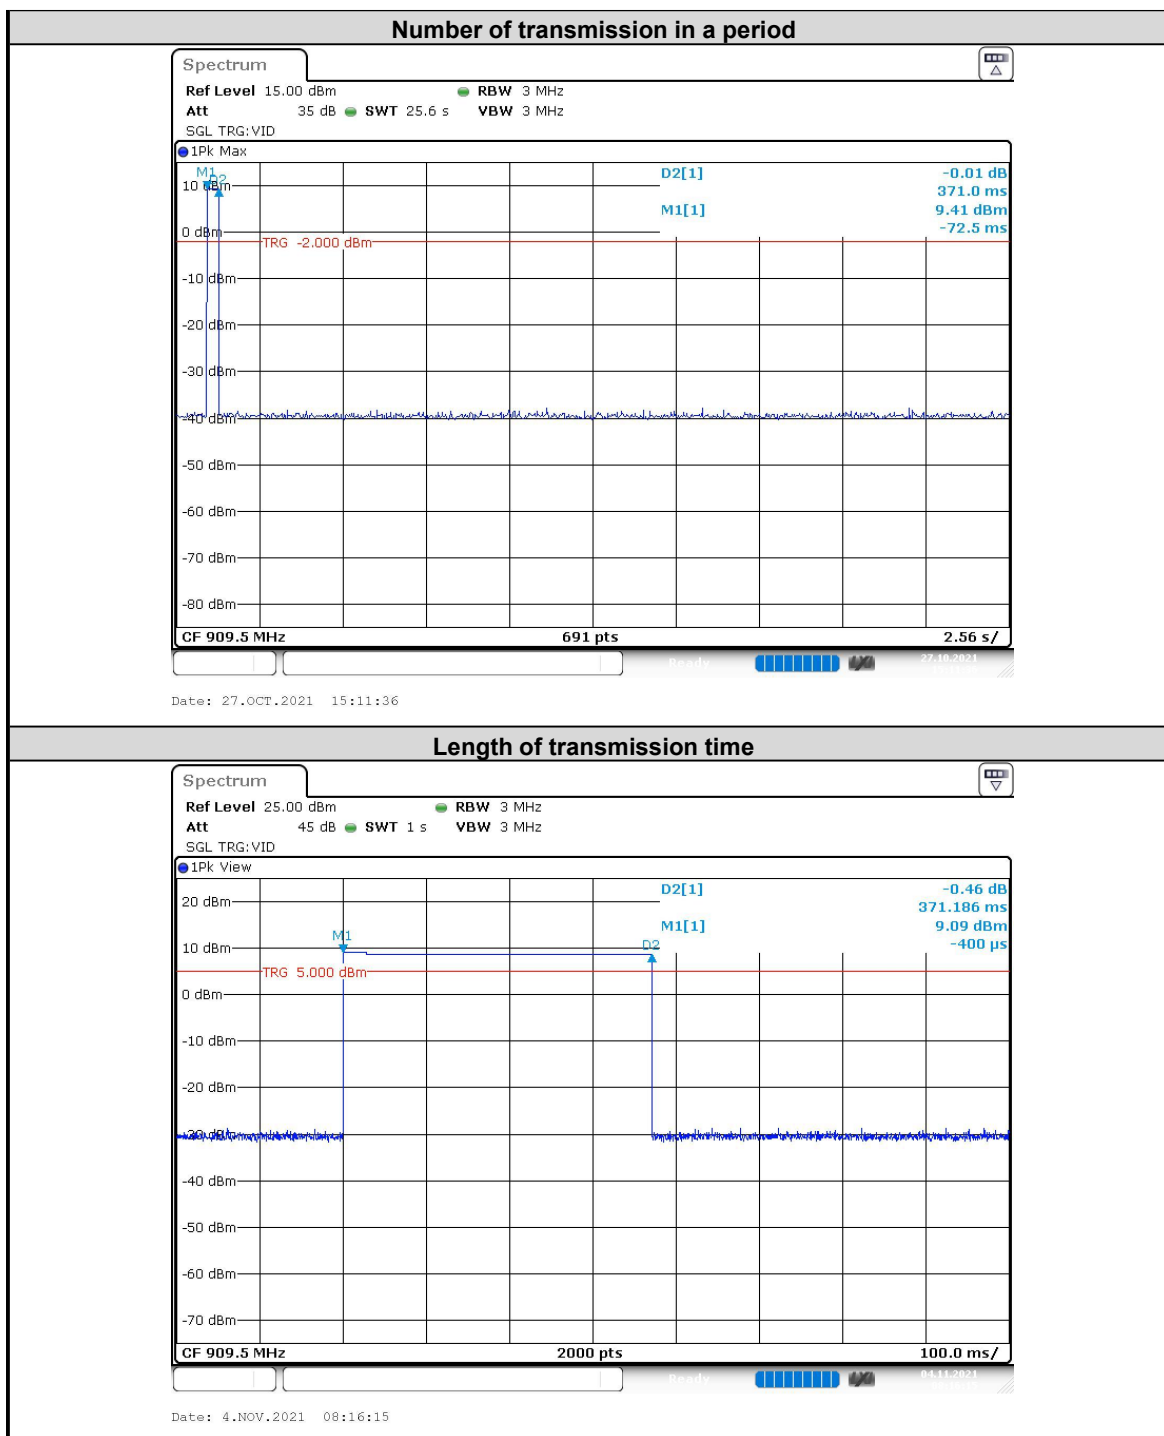

### 3.4 20dB EMISSION BANDWIDTH


#### 3.4.1 Limits

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz

#### 3.4.2 Measurement procedure

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.


#### 3.4.3 Test setup

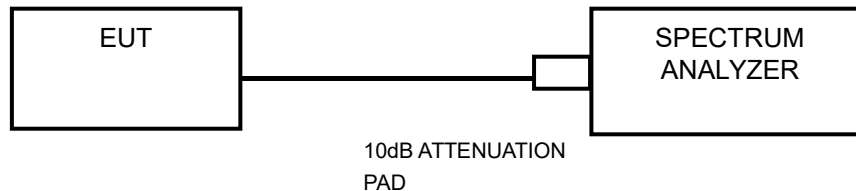



## 3.4.4 Test result

| Mode | Channel | Channel Frequency (MHz) | 20dB Emission Bandwidth(kHz) | Limit (kHz) |
|------|---------|-------------------------|------------------------------|-------------|
| DH0  | 0       | 902.3                   | 139.125                      | ≤250        |
|      | 36      | 909.5                   | 139.500                      | ≤250        |
|      | 63      | 914.9                   | 139.500                      | ≤250        |

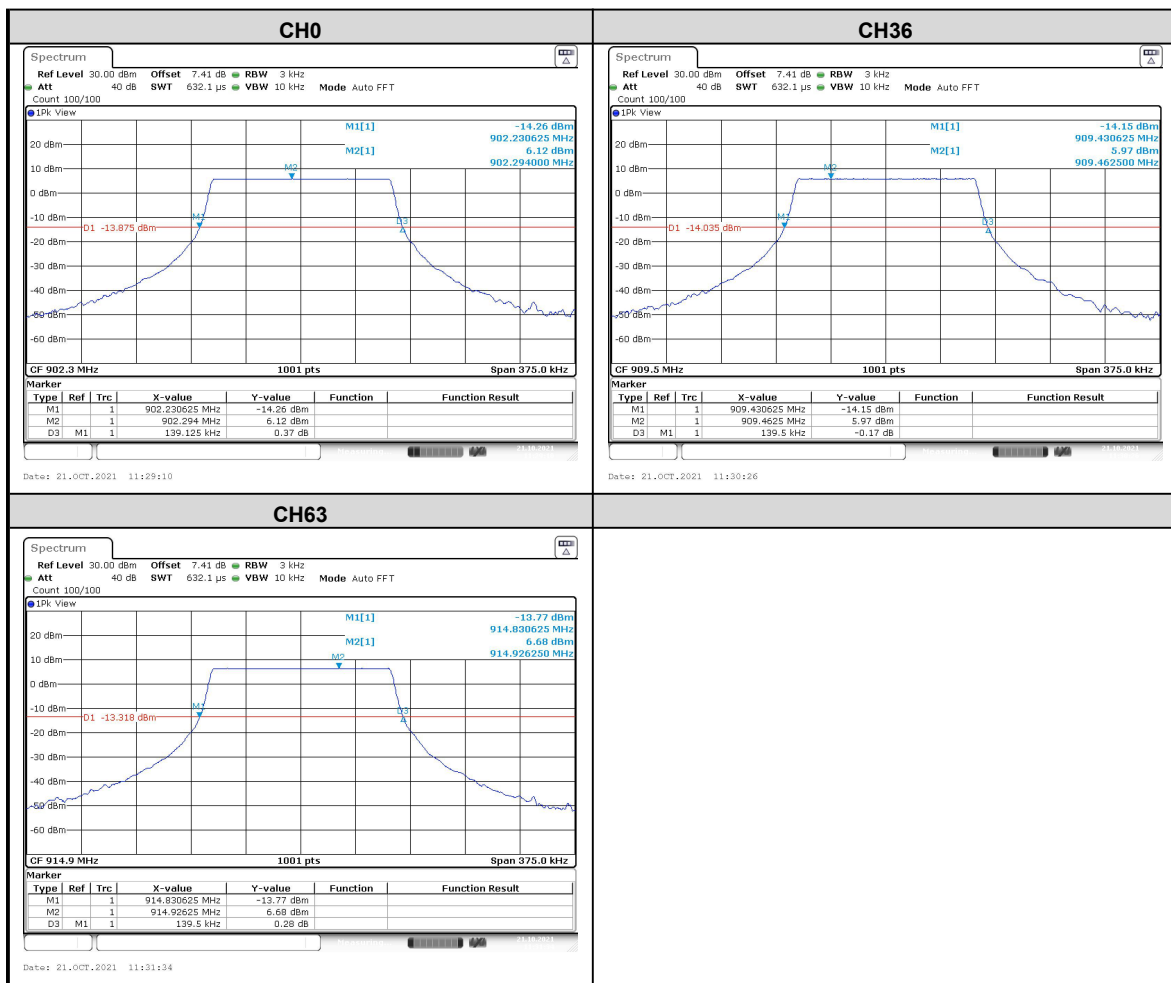

### 3.5 HOPPING CHANNEL SEPARATION


#### 3.5.1 Limits

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

#### 3.5.2 Measurement procedure

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW)  $\geq$  RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

#### 3.5.3 Test setup

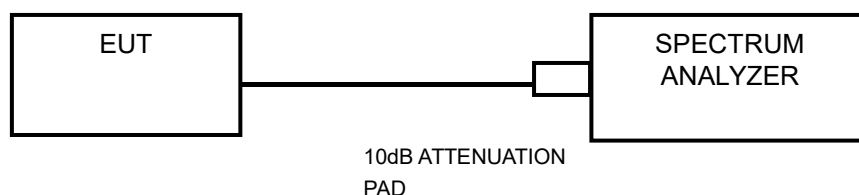




## 3.5.4 Test result

| Mode | Adjacent Channel Separation (kHz) | Minimum Limit 20dB Bandwidth (kHz) | Verdict |
|------|-----------------------------------|------------------------------------|---------|
| DR0  | 200.00                            | 139.125                            | PASS    |

### Test Plot:

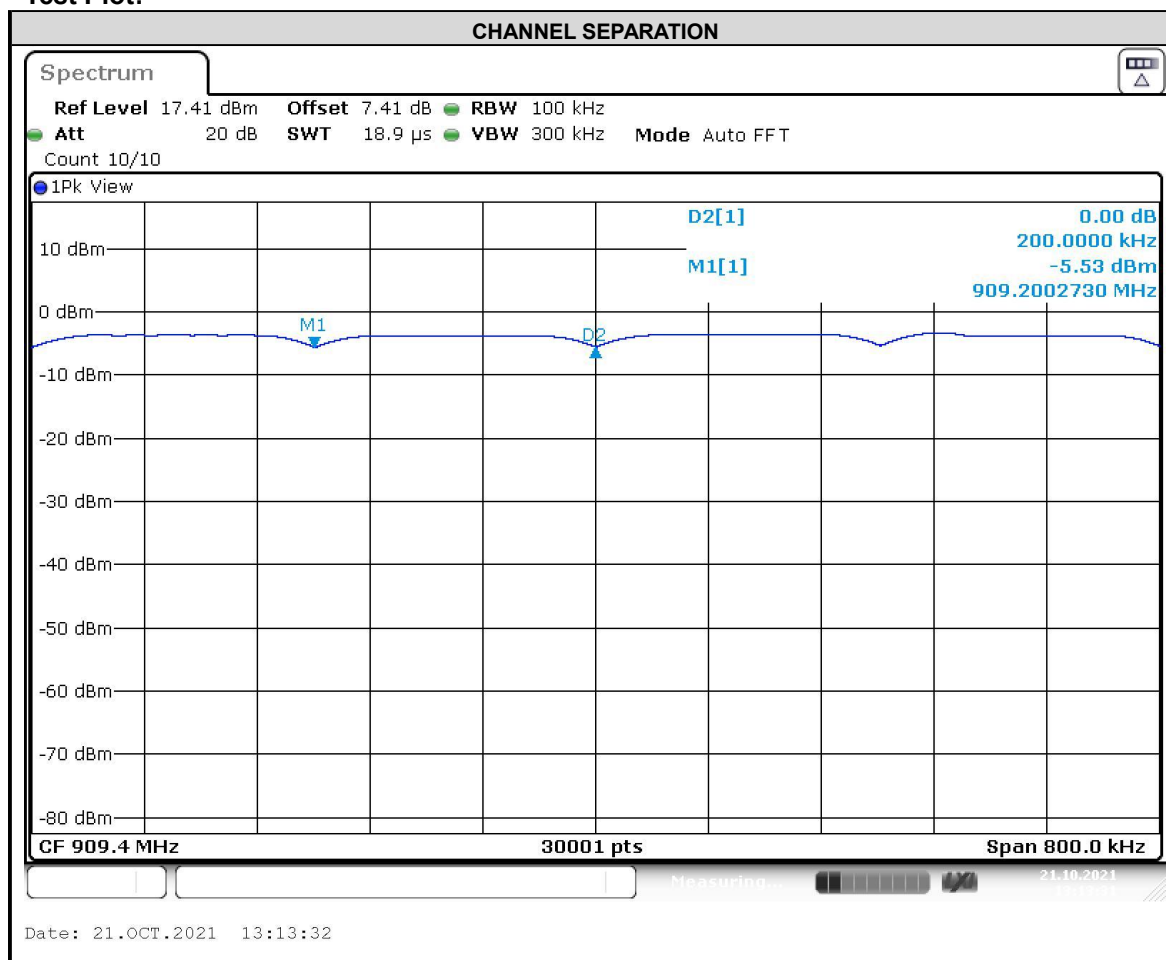

### 3.6 CONDUCTED OUTPUT POWER


#### 3.6.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### 3.6.2 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

#### 3.6.3 Test setup

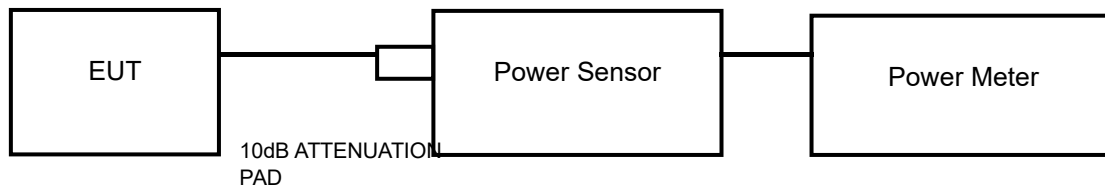



## 3.6.4 Test result

### PEAK OUTPUT POWER

#### GFSK

| CHANNEL | Channel Frequency (MHz) | Peak Power (dBm) | Peak Power (mW) | Peak Power Limit (mW) | Verdict |
|---------|-------------------------|------------------|-----------------|-----------------------|---------|
| 0       | 902.3                   | 21.10            | 128.82          | 1000                  | PASS    |
| 36      | 909.5                   | 21.19            | 131.52          | 1000                  | PASS    |
| 63      | 914.9                   | 21.77            | 150.31          | 1000                  | PASS    |

### AVERAGE OUTPUT POWER(For reference)

| Mode | Channel Frequency (MHz) | Average Power (dBm) | Average Power (mW) | Average Power Limit (mW) | Verdict |
|------|-------------------------|---------------------|--------------------|--------------------------|---------|
| 0    | 902.3                   | 7.07                | 5.09               | 1000                     | PASS    |
| 36   | 909.5                   | 6.66                | 4.63               | 1000                     | PASS    |
| 63   | 914.9                   | 6.78                | 4.76               | 1000                     | PASS    |

### 3.7 POWER SPECTRAL DENSITY MEASUREMENT


#### 3.7.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

#### 3.7.2 Measurement procedure

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set RBW to: 3KHz
4. Set VBW  $\geq 3 \times$  RBW.
5. Detector = peak
6. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
7. Sweep time = auto couple.
8. Use the peak marker function to determine the maximum amplitude level.

#### 3.7.3 Test setup

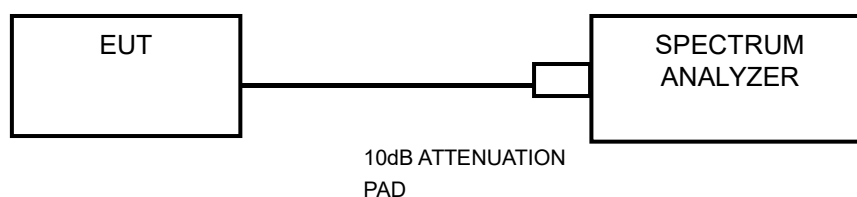




## 3.7.4 Test result

| CHANNEL | CHANNEL<br>FREQUENCY<br>(MHz) | PSD(dBm/3kHz) | Limit<br>(dBm/3kHz) | PASS / FAIL |
|---------|-------------------------------|---------------|---------------------|-------------|
| 0       | 902.3                         | 5.99          | 8                   | PASS        |
| 36      | 909.5                         | 6.16          | 8                   | PASS        |
| 63      | 914.9                         | 6.63          | 8                   | PASS        |

### Test Plot:

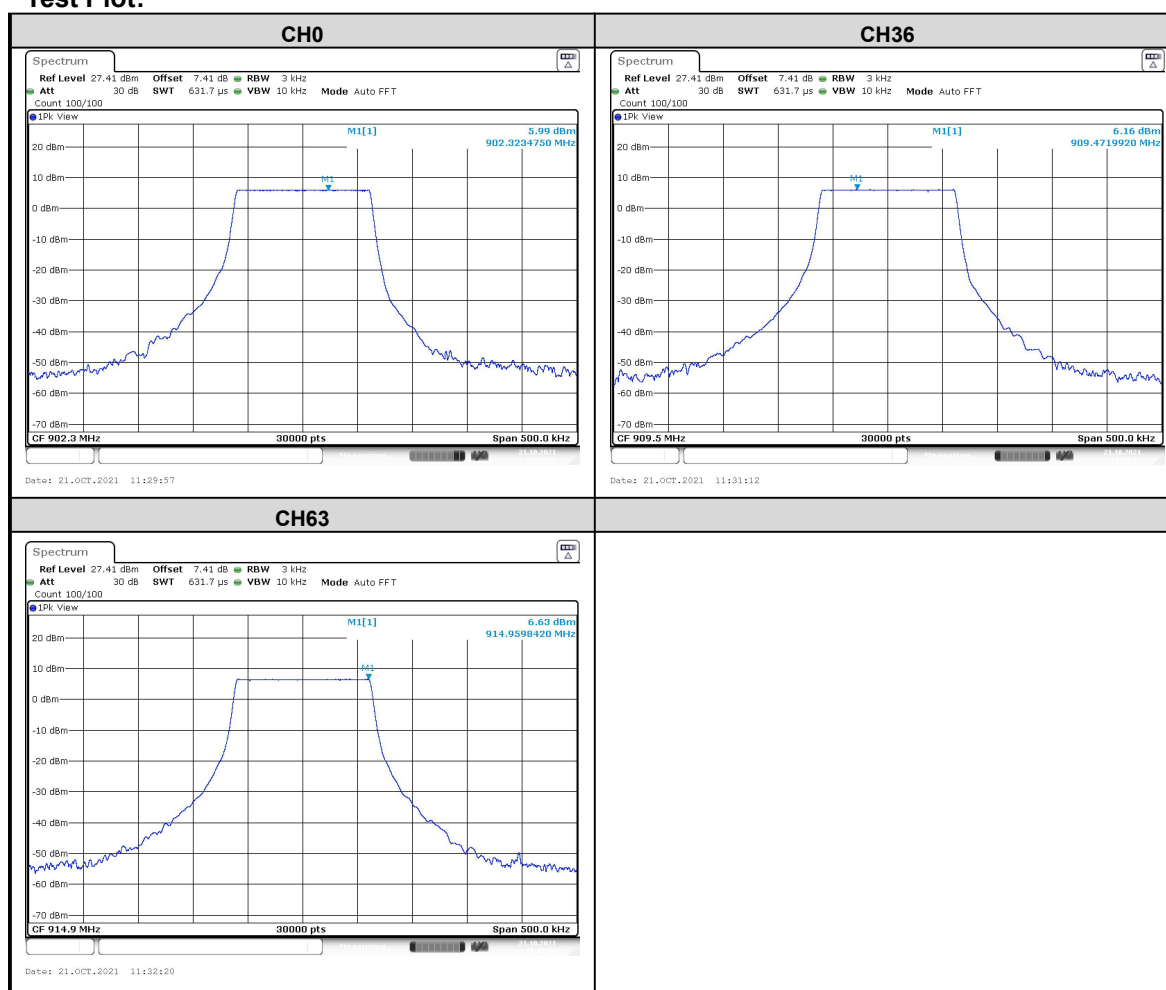

### 3.8 OUT OF BAND EMISSION MEASUREMENT


#### 3.8.1 Limits

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

#### 3.8.2 Measurement procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.


#### 3.8.3 Test setup

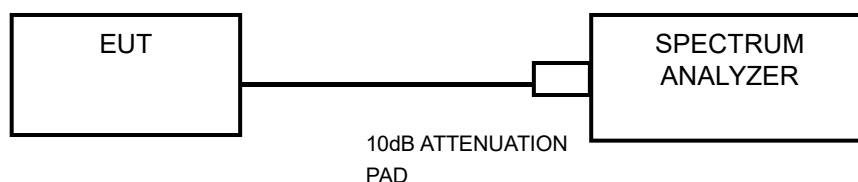

## 3.8.4 Test result


The spectrum plots are attached on the following images.

### DR0

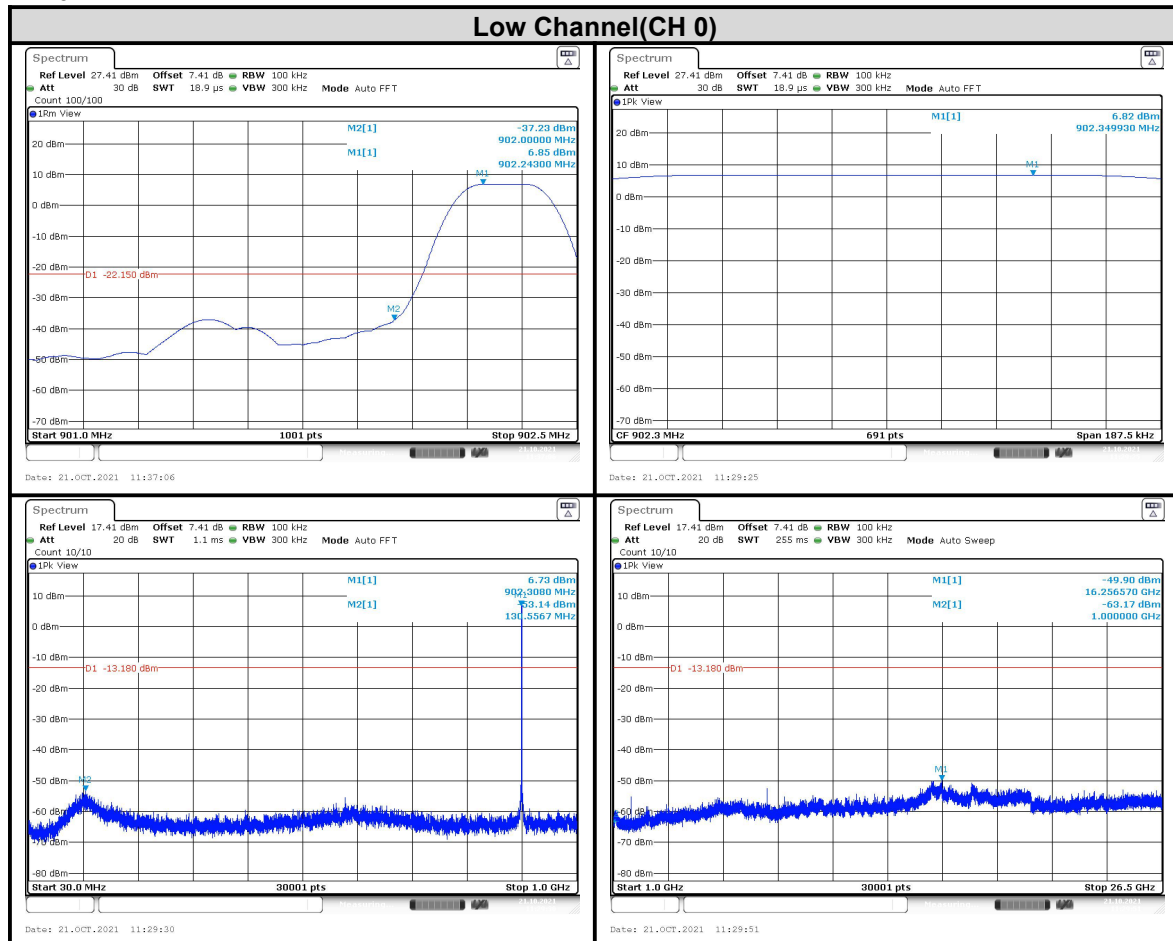




## DR0

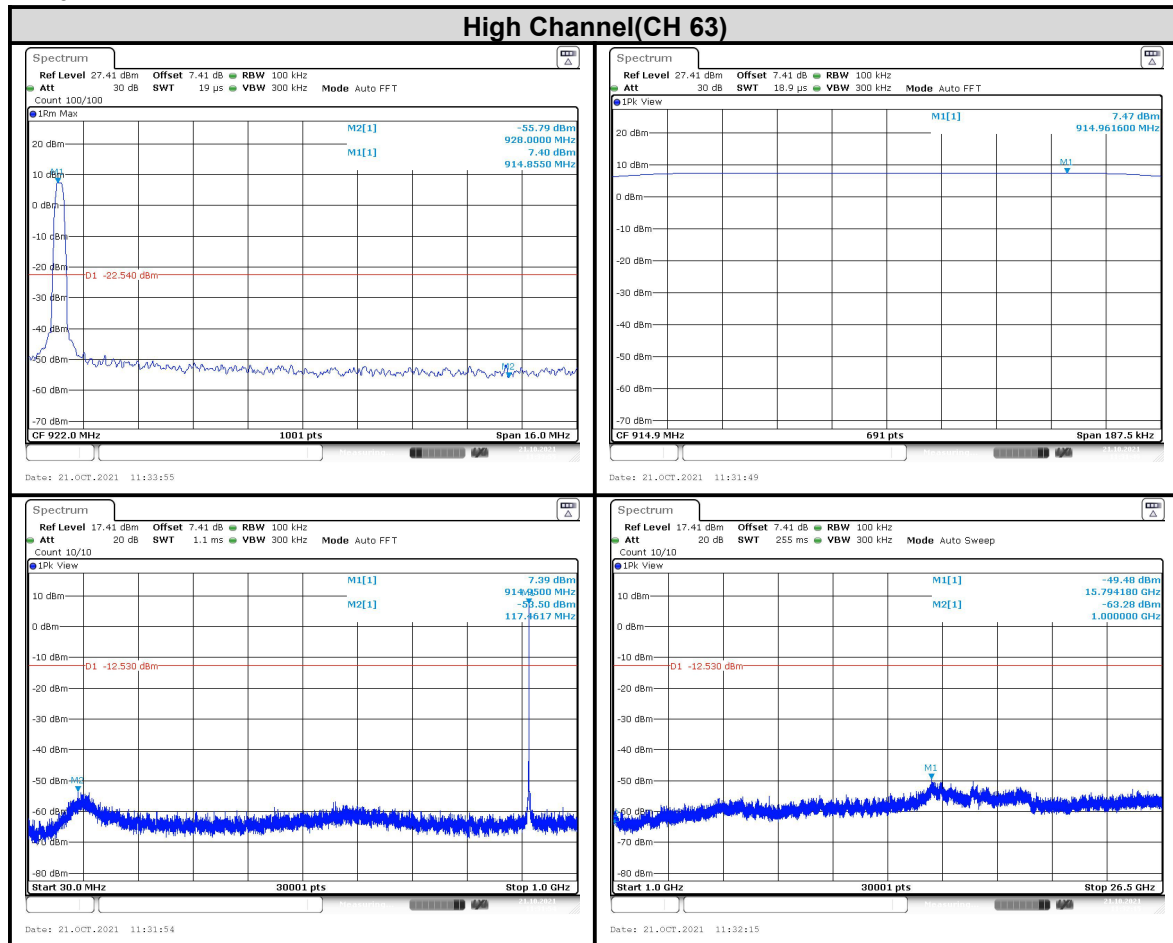

## DR0-HOPPING

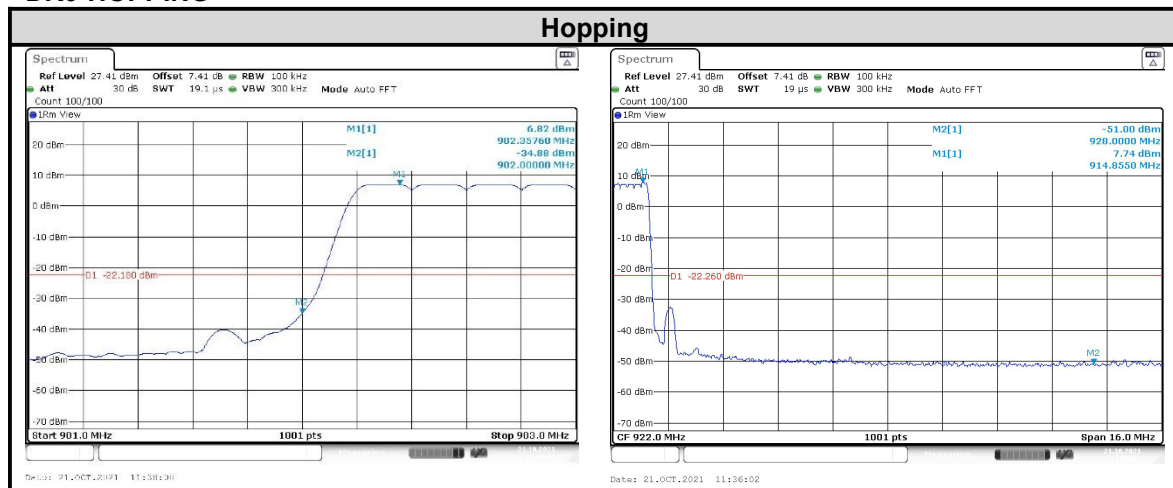



#### **4 PHOTOGRAPHS OF TEST SETUP**

Please refer to the attached file (Test Photos).



## **5 PHOTOGRAPHS OF THE EUT**

Please refer to the attached file (External Photos report and Internal Photos).



## Appendix A

| Antenna Port Conducted Test   |           |               |              |            |
|-------------------------------|-----------|---------------|--------------|------------|
| Equipment                     | Model No. | Serial Number | Manufacturer | Cal. Due   |
| Communication Shielded Room 2 | 4m*3m*3m  | CRTDSWKS44301 | CRT          | 2023/04/25 |
| Spectrum Analyzer             | FSV40     | 101580        | R&S          | 2022/06/30 |
| Comprehensive Test Instrument | CMW270    | 100304        | R&S          | 2021/12/08 |
| Analog Signal Generator       | SMB100A   | 181858        | R&S          | 2022/06/30 |
| Vector Signal Generator       | SGT100A   | 111661        | R&S          | 2022/06/30 |
| RF Radio Frequency Switch     | JS0806-2  | 19H9080187    | Tonscend     | 2022/06/30 |
| Programmable DC Power Supply  | E3644A    | MY58036222    | KEYSIGHT     | 2022/04/22 |

| Radiated Emission Test - 3M Chamber |                                  |               |              |            |
|-------------------------------------|----------------------------------|---------------|--------------|------------|
| Equipment                           | Model No.                        | Serial Number | Manufacturer | Cal. Due   |
| 3m Semi-Anechoic Chamber            | FACT-4                           | ST08035       | ETS          | 2024/12/12 |
| Spectrum Analyzer                   | N9010B                           | MY57470323    | KEYSIGHT     | 2022/03/05 |
| EMI Test Receiver                   | N9038A-508                       | MY532290079   | Agilent      | 2022/03/05 |
| Broadband Antenna                   | VULB 9163                        | 9163-530      | SCHWARZBECK  | 2022/06/26 |
| Waveguide Horn Antenna              | HF906                            | 360306/008    | R&S          | 2022/03/05 |
| Waveguide Horn Antenna              | BBHA9170                         | 00949         | SCHWARZBECK  | 2022/03/05 |
| Preamplifier                        | BBV 9721                         | 9721-050      | SCHWARZBECK  | 2022/06/30 |
| 5G Bandstop Filters                 | WRCJV12-4900-5100-5900-6100-50EE | 1             | WI           | 2021/12/16 |
| Comprehensive tester                | CMW500                           | 159000        | R&S          | 2022/01/04 |



### Important

- (1) The test report is valid with the official seal of the laboratory and the signatures of Test engineer, Author and Reviewer simultaneously.
- (2) The test report is invalid if altered.
- (3) Any photocopies or part photocopies in the test report are forbidden without the written permission from the laboratory.
- (4) Objections to the test report must be submitted to the laboratory within 15 days.
- (5) Generally, commission test is responsible for the tested samples only.

*Address of the laboratory:*

*CVC Testing Technology Co., Ltd.*

*Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China*

*Post Code: 510663      Tel: 020-32293888*

*FAX: 020-32293889      E-mail: office@cvc.org.cn*