

Measurement Results

1-0981/20-01-03_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Andreas Kurzkurt
Testing Manager
Radio Communications & EMC

Table of Content

EUT Summary	3
1. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode	4
2. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode	6
3. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode	8
4. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode	10
5. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode	12
6. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode	14
7. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode	16
8. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode	18
9. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode	20
10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode	22
11. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode	25
12. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode	28
13. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode	31
14. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode	34
15. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode	37
16. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode	40
17. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode	43
18. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode	46
19. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode	49
20. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode	51
21. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode	53
22. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode	55
23. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode	57
24. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode	59
25. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode	61
26. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode	63
27. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode	65

EUT Summary

EUT DEFINITION	
Manufacturer	MEC electronics Entwicklung und Produktion GmbH
Type	Display Unit
Kind	DM1ALM
Serial Number Setup Number	1264999921080002
Version SW FW HW	NI NI NI
Comment 1 2	
Temperature [°C] Min Nom Max	-20 20 55
Voltage [V] Min Nom Max @Current Max [A]	5V

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

1. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode


Test References	
TC Start	16.03.2021 10:02:23
Ambit Temp [°C] Humidity [rel%]	24.2 29
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2412 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.85 16.35 15	
Start [MHz] Stop [MHz]	2392.000 2432.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	8008	kHz	PASS

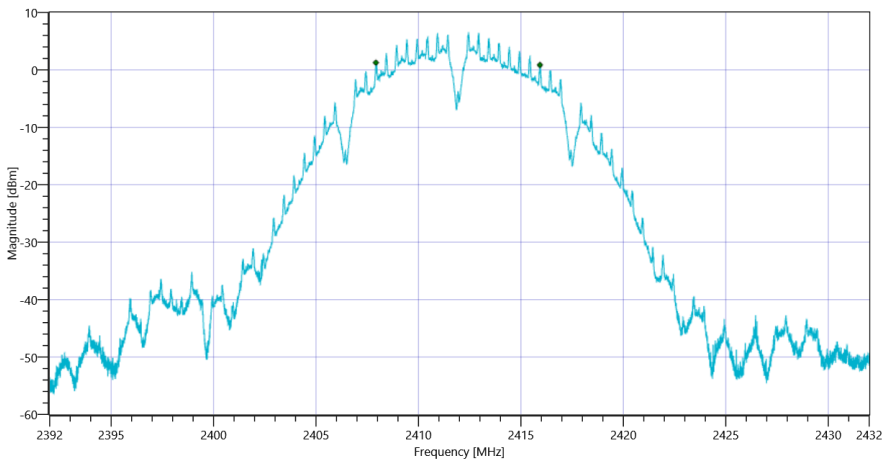

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode_16032021_100257.png

TEST FINISHED	
General Verdict	PASS

2. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode


Test References	
TC Start	16.03.2021 10:13:03
Ambit Temp [°C] Humidity [rel%]	24.4 28
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2437 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.55 16.22 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	8048	kHz	PASS

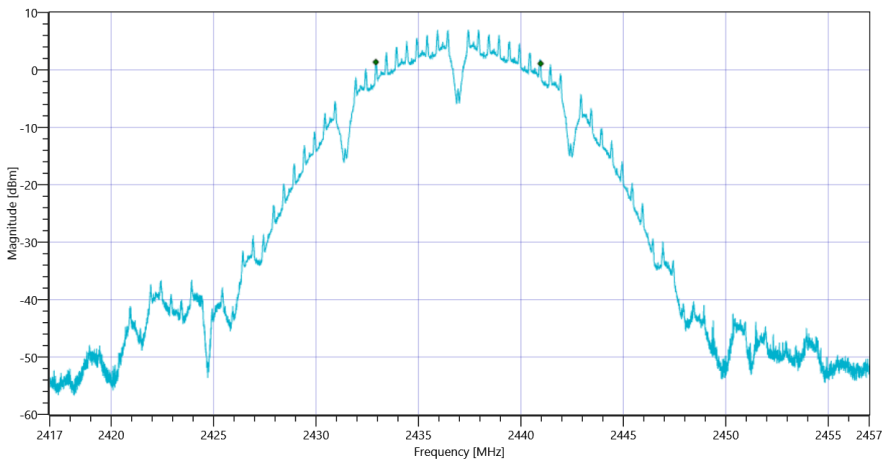

TEST FINISHED	
General Verdict	PASS

3. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode


Test References	
TC Start	16.03.2021 10:23:51
Ambit Temp [°C] Humidity [rel%]	24.5 27
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2462 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.97 16.12 15	
Start [MHz] Stop [MHz]	2442.000 2482.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	8048	kHz	PASS

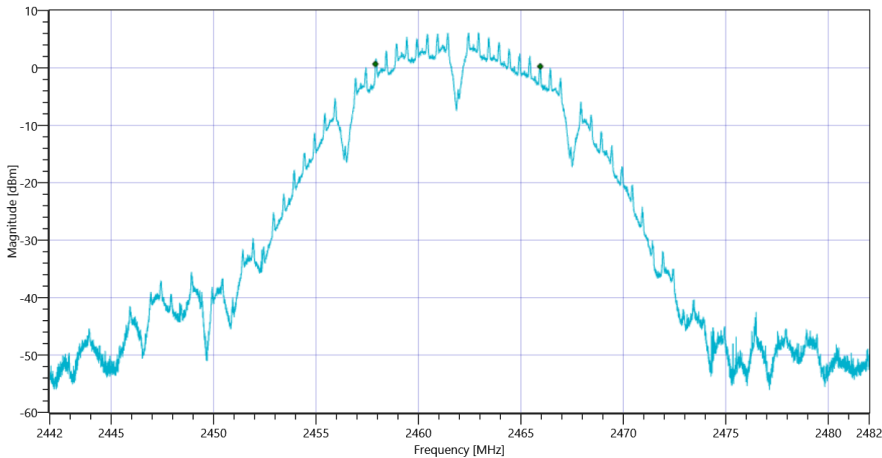

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 b-mode_16032021_102424.png

TEST FINISHED	
General Verdict	PASS

4. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode


Test References	
TC Start	16.03.2021 10:34:39
Ambit Temp [°C] Humidity [rel%]	24.5 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2412 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.08 16.35 15	
Start [MHz] Stop [MHz]	2392.000 2432.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15116	kHz	PASS

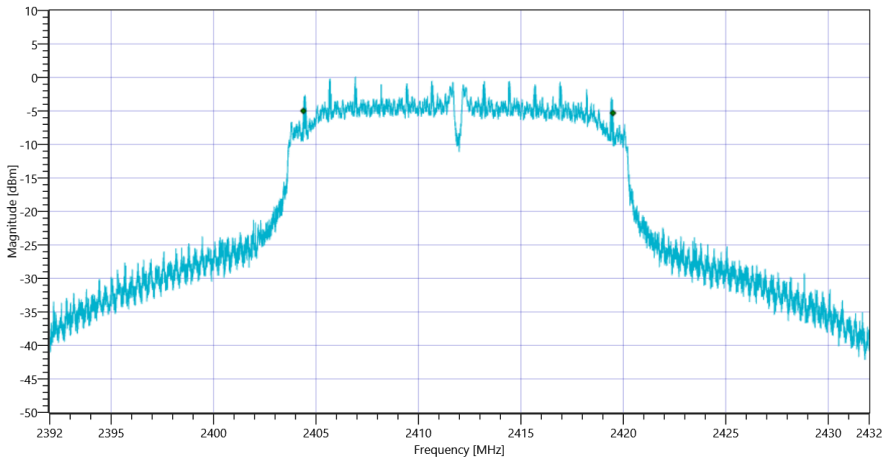

TEST FINISHED	
General Verdict	PASS

5. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode


Test References	
TC Start	16.03.2021 10:47:38
Ambit Temp [°C] Humidity [rel%]	24.5 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2437 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.71 16.22 15	
Start [MHz] Stop [MHz]	2417.000 2457.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15104	kHz	PASS

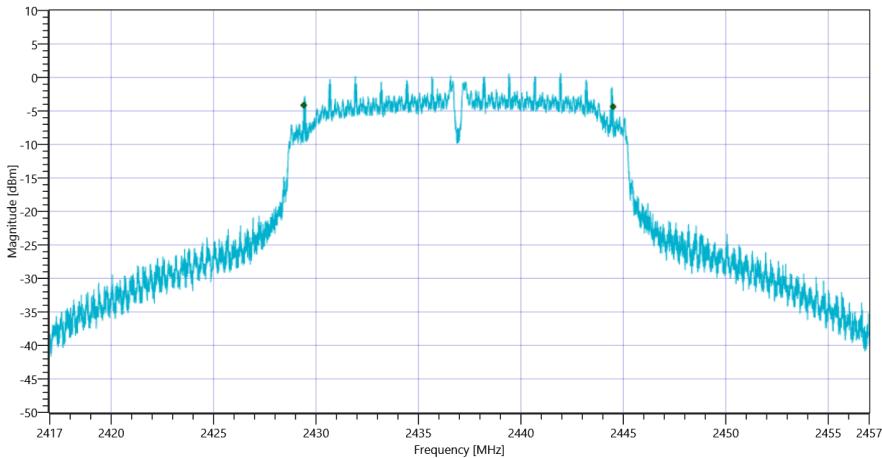

TEST FINISHED	
General Verdict	PASS

6. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 g-mode


Test References	
TC Start	16.03.2021 10:58:12
Ambit Temp [°C] Humidity [rel%]	24.6 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2462 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.97 16.12 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15084	kHz	PASS

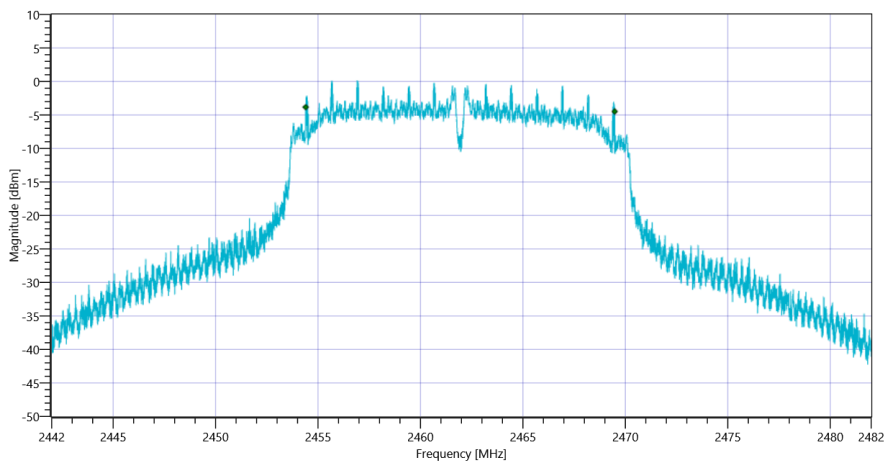

TEST FINISHED	
General Verdict	PASS

7. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	16.03.2021 11:09:03
Ambit Temp [°C] Humidity [rel%]	24.6 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2412 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.33 16.35 15	
Start [MHz] Stop [MHz]	2392.000 2432.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15112	kHz	PASS

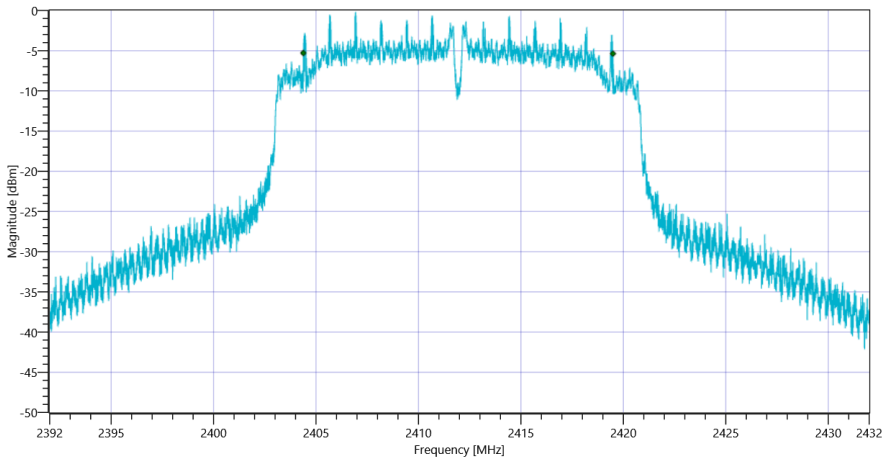

TEST FINISHED	
General Verdict	PASS

8. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	16.03.2021 11:19:43
Ambit Temp [°C] Humidity [rel%]	24.7 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2437 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.38 16.22 15	
Start [MHz] Stop [MHz]	2417.000 2457.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15116	kHz	PASS

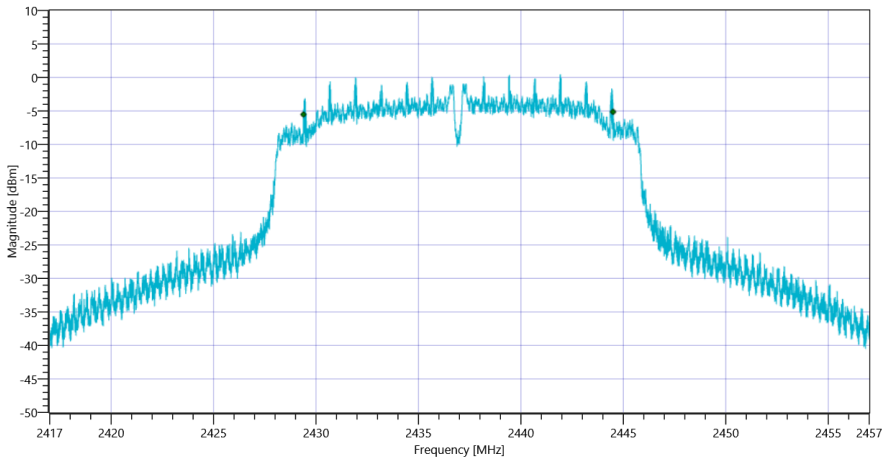

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode_16032021_112016.png

TEST FINISHED	
General Verdict	PASS

9. FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	16.03.2021 11:31:56
Ambit Temp [°C] Humidity [rel%]	24.7 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2462 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.92 16.12 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	15104	kHz	PASS

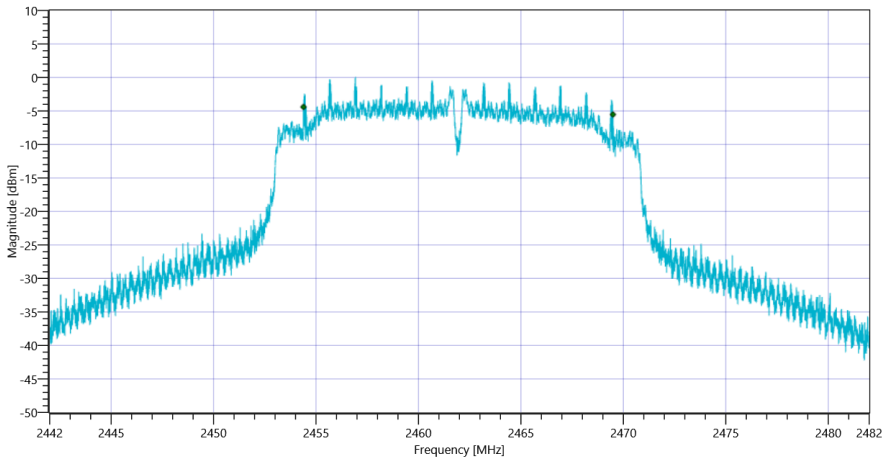

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ WLAN2G4 nHT20-mode_16032021_113229.png

TEST FINISHED	
General Verdict	PASS

10. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

Test References	
TC Start	16.03.2021 10:03:49
Ambit Temp [°C] Humidity [rel%]	24.2 29
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60



Test at TX 2412 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.84 16.35 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	12770.723	kHz	INFO
T1 99%	2400.000000	---	2405.5886	MHz	PASS
T2 99%	---	2483.500000	2418.3594	MHz	PASS

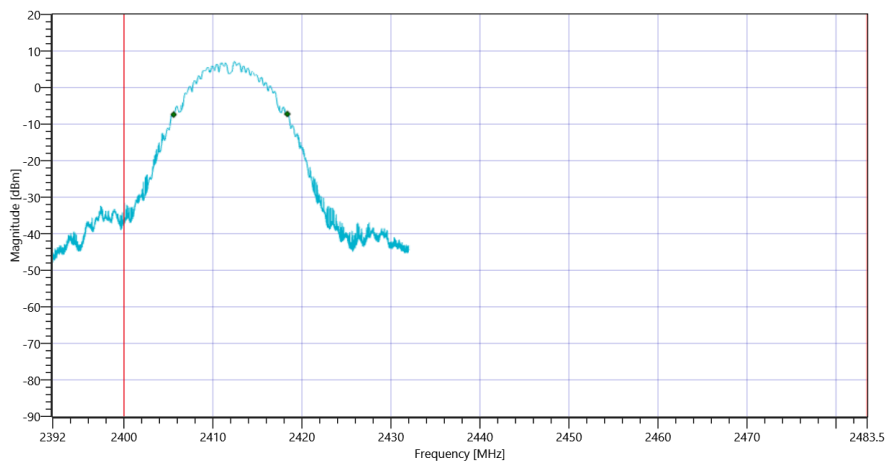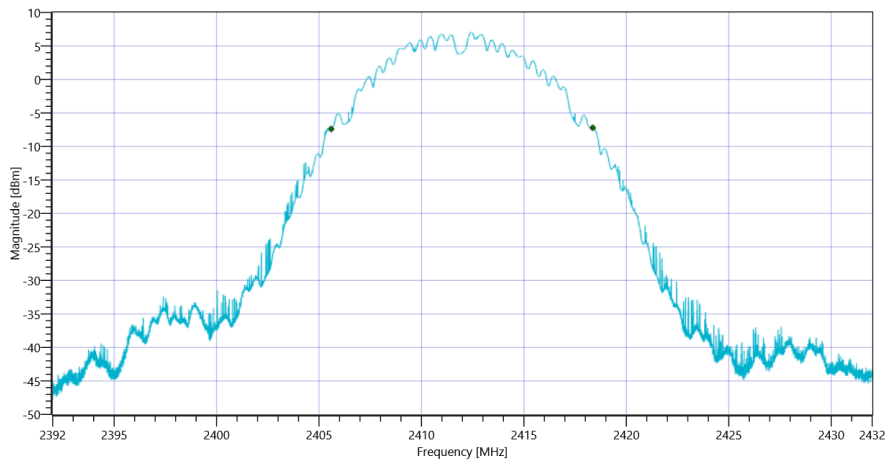


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15200	kHz	INFO
T1 20dB	2400.000000	---	2404.2640	MHz	PASS
T2 20dB	---	2483.500000	2419.4640	MHz	PASS

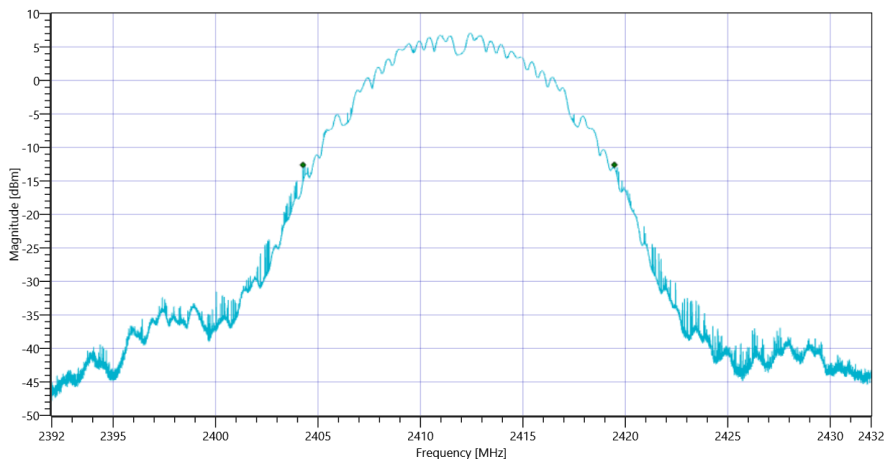

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_100436.png

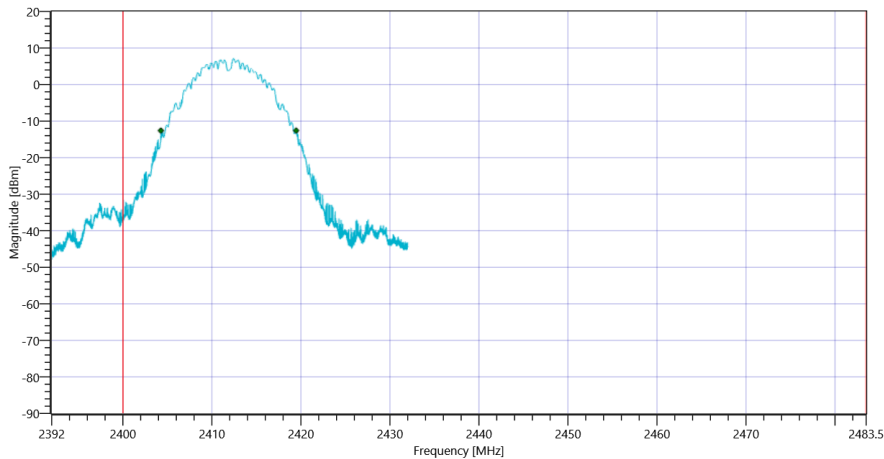

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_100442.png

TEST FINISHED	
General Verdict	PASS

11. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

Test References	
TC Start	16.03.2021 10:14:27
Ambit Temp [°C] Humidity [rel%]	24.4 28
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60



Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.57 16.22 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	12902.710	kHz	INFO
T1 99%	2400.000000	---	2430.5446	MHz	PASS
T2 99%	---	2483.500000	2443.4474	MHz	PASS

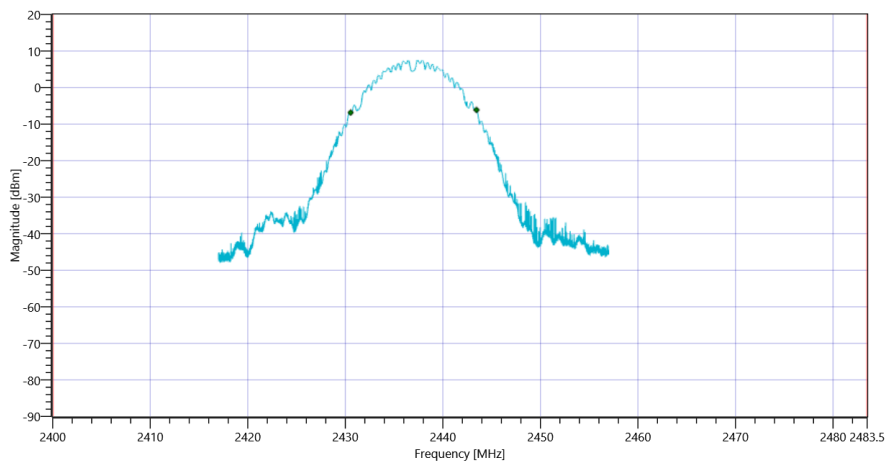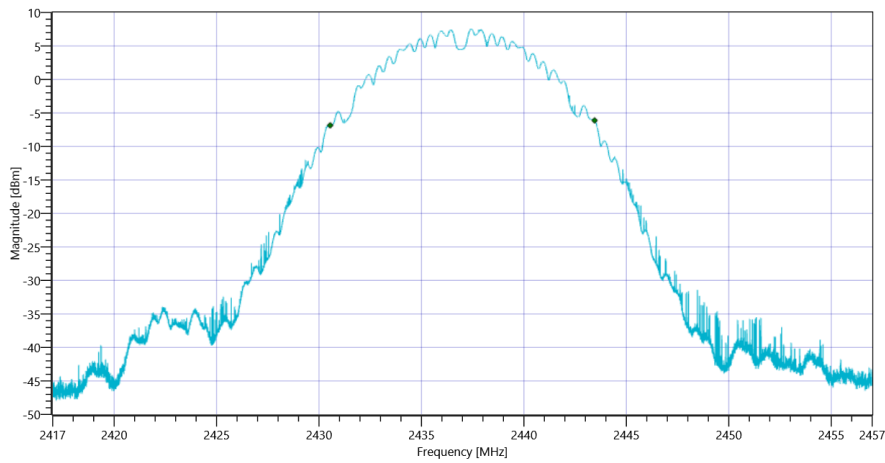


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15200	kHz	INFO
T1 20dB	2400.000000	---	2429.3480	MHz	PASS
T2 20dB	---	2483.500000	2444.5480	MHz	PASS

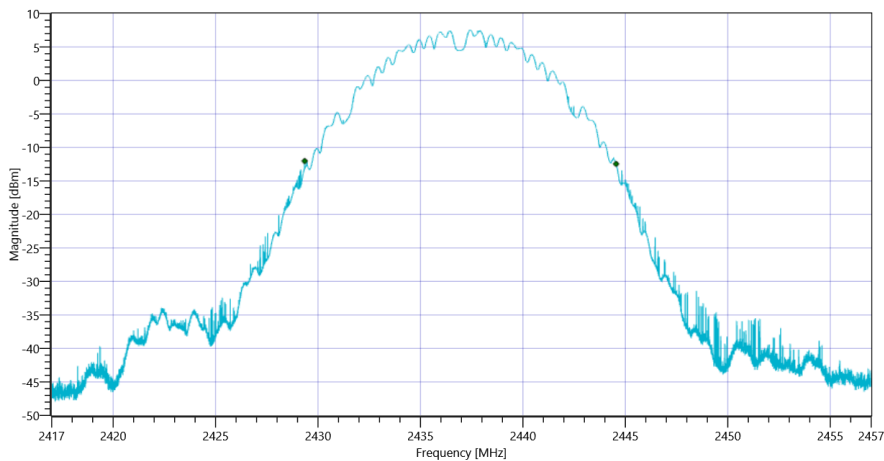

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_101513.png

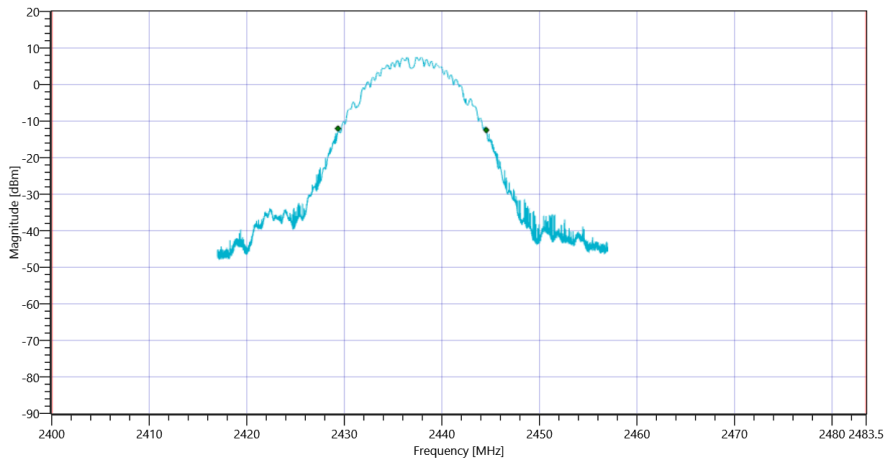

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_101520.png

TEST FINISHED	
General Verdict	PASS

12. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode

Test References	
TC Start	16.03.2021 10:25:15
Ambit Temp [°C] Humidity [rel%]	24.5 27
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2462 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.01 16.12 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	12834.717	kHz	INFO
T1 99%	2400.000000	---	2455.5326	MHz	PASS
T2 99%	---	2483.500000	2468.3674	MHz	PASS

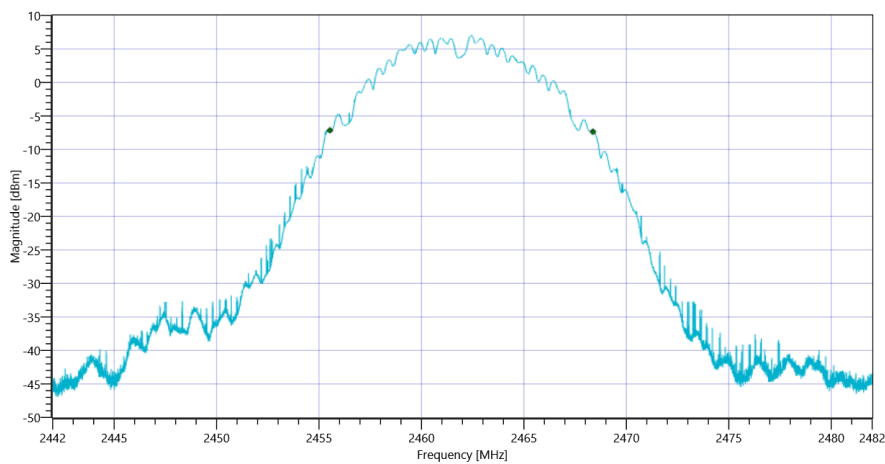


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode 99PCT_16032021_102546.png

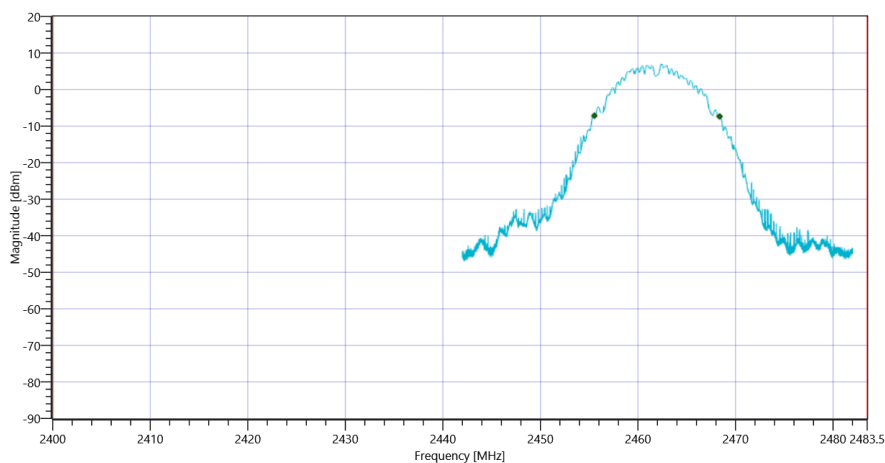


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_102553.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15424	kHz	INFO
T1 20DB	2400.000000	---	2454.1440	MHz	PASS
T2 20dB	---	2483.500000	2469.5680	MHz	PASS

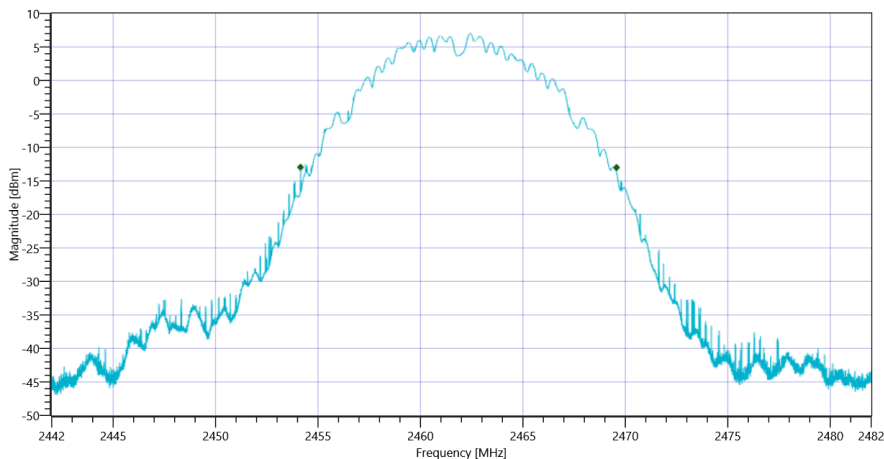

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_102601.png

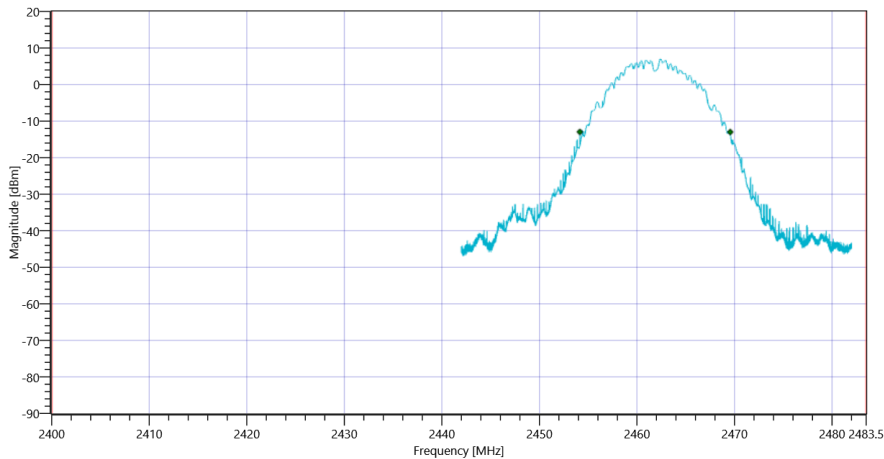

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 b-mode_16032021_102609.png

TEST FINISHED	
General Verdict	PASS

13. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

Test References	
TC Start	16.03.2021 10:36:05
Ambit Temp [°C] Humidity [rel%]	24.5 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2412 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.54 16.35 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17702.230	kHz	INFO
T1 99%	2400.000000	---	2402.9769	MHz	PASS
T2 99%	---	2483.500000	2420.6791	MHz	PASS

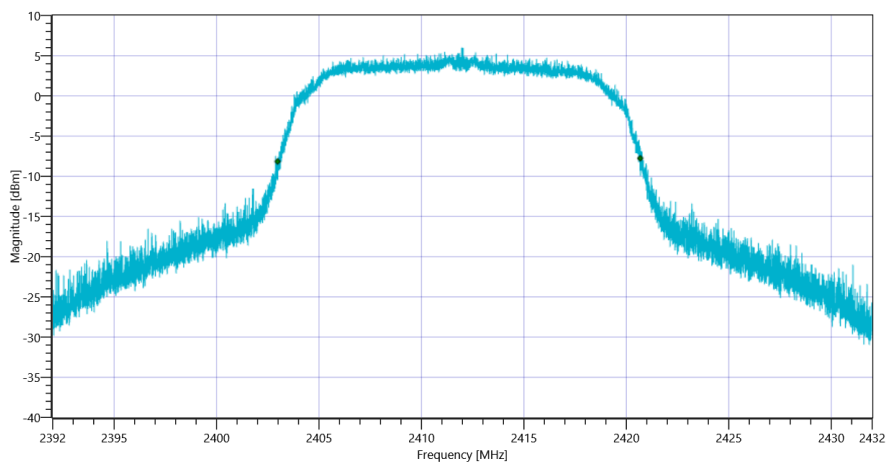



Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 99PCT_16032021_103636.png

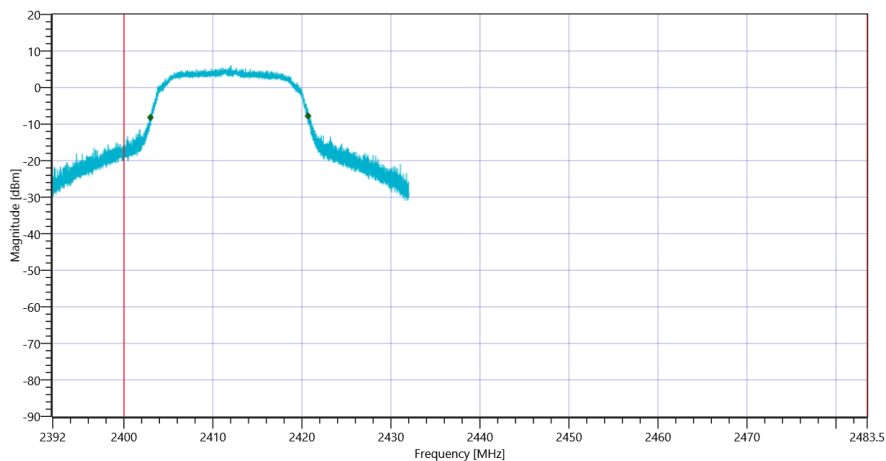

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode_16032021_103642.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	22788	kHz	INFO
T1 20dB	2400.000000	---	2400.4040	MHz	PASS
T2 20dB	---	2483.500000	2423.1920	MHz	PASS

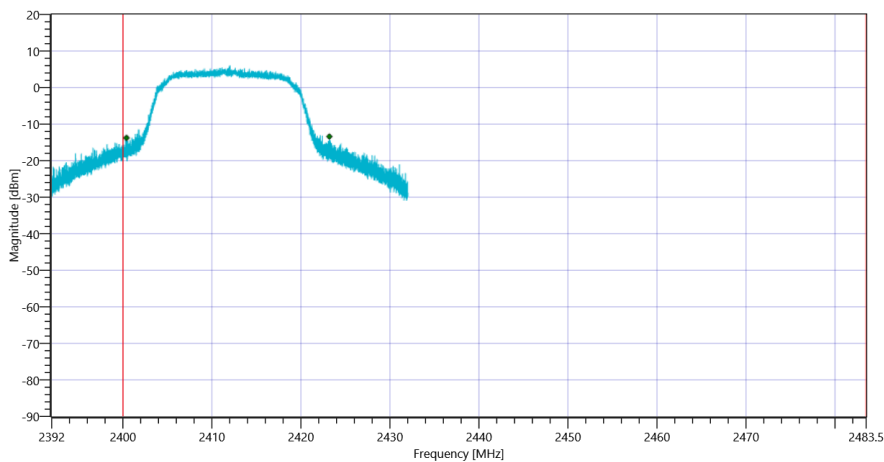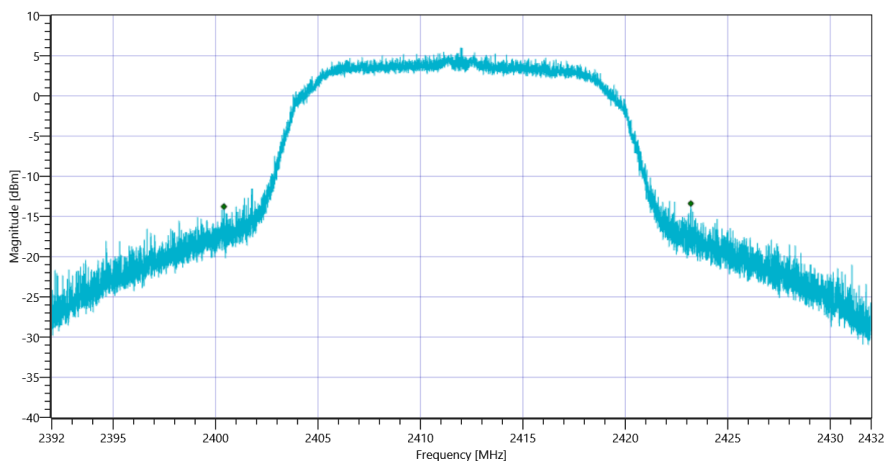

TEST FINISHED

General Verdict

PASS

14. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

Test References	
TC Start	16.03.2021 10:49:02
Ambit Temp [°C] Humidity [rel%]	24.6 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2437 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.83 16.22 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17638.236	kHz	INFO
T1 99%	2400.000000	---	2428.2409	MHz	PASS
T2 99%	---	2483.500000	2445.8791	MHz	PASS

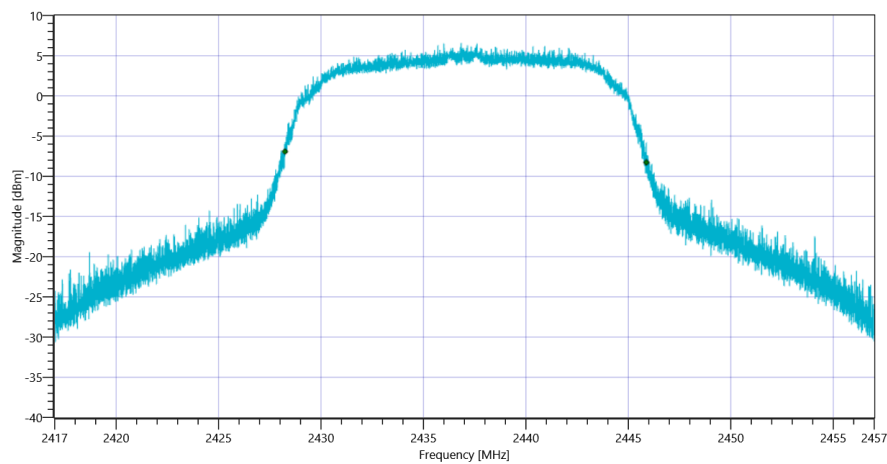


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 99PCT_16032021_104933.png

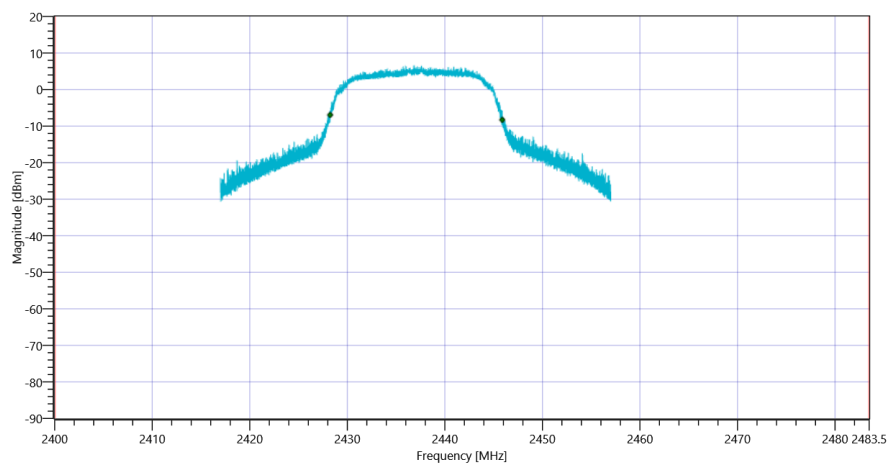


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode_16032021_104940.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	22448	kHz	INFO
T1 20dB	2400.000000	---	2426.6080	MHz	PASS
T2 20dB	---	2483.500000	2449.0560	MHz	PASS

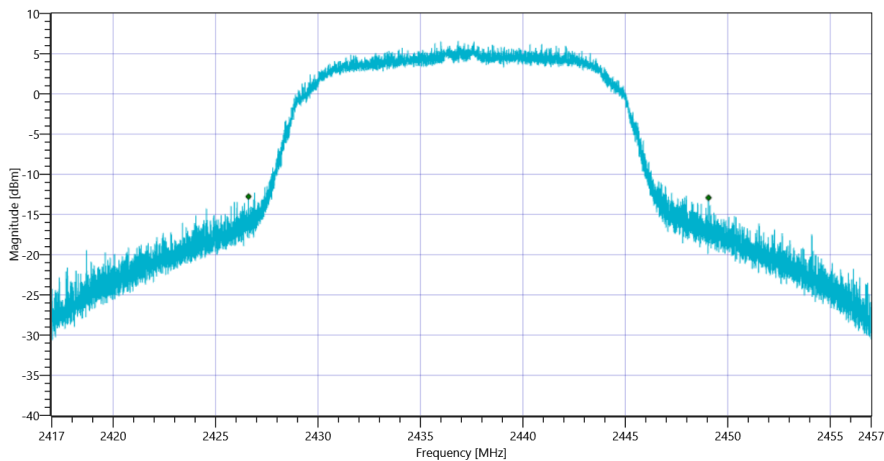

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 20dB_16032021_104949.png

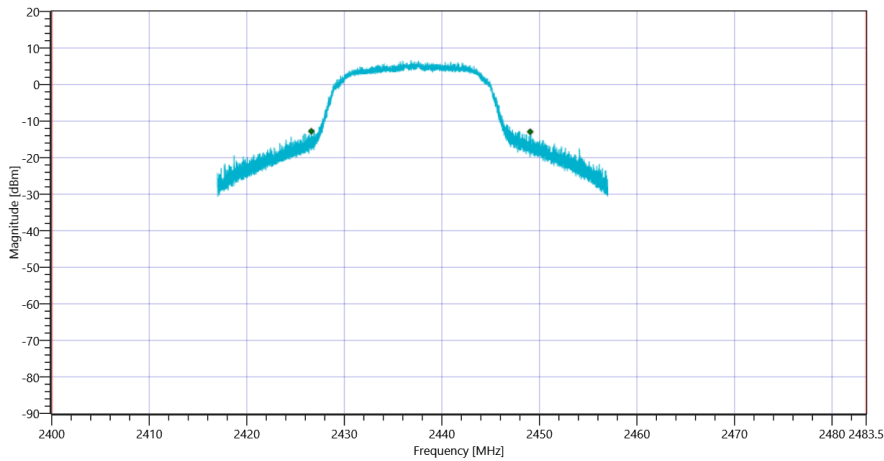

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode_16032021_104956.png

TEST FINISHED	
General Verdict	PASS

15. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode

Test References	
TC Start	16.03.2021 10:59:37
Ambit Temp [°C] Humidity [rel%]	24.6 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2462 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.16 16.12 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17710.229	kHz	INFO
T1 99%	2400.000000	---	2452.8689	MHz	PASS
T2 99%	---	2483.500000	2470.5791	MHz	PASS

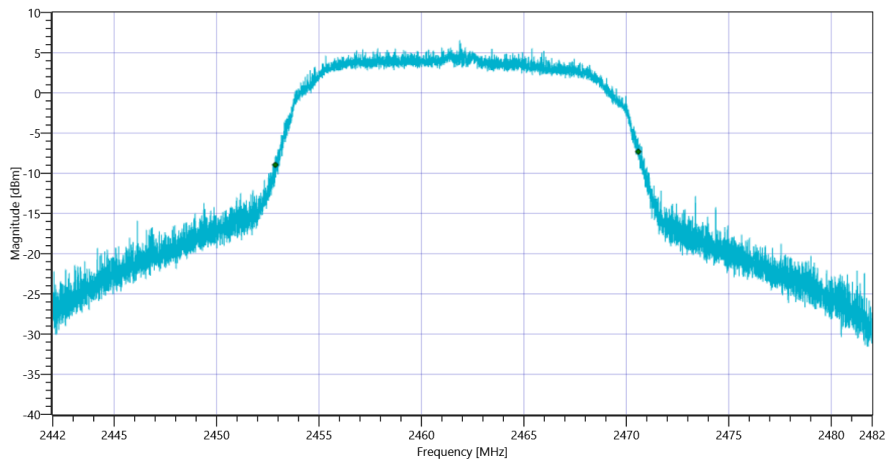


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 99PCT_16032021_110008.png

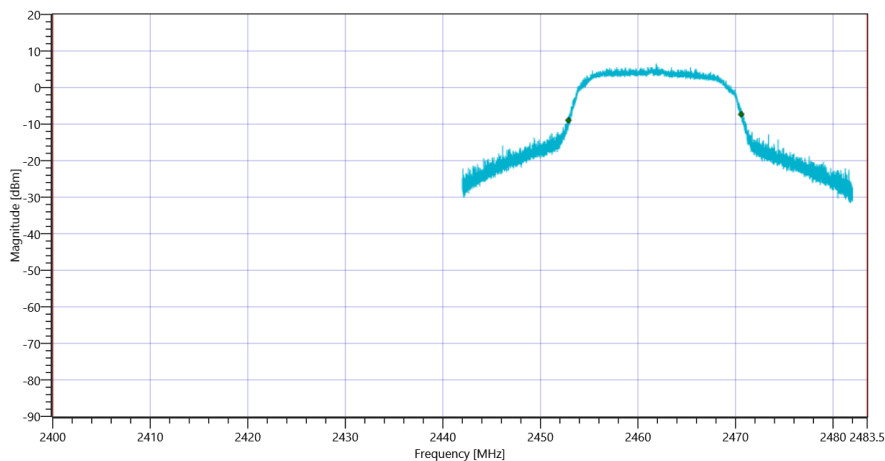


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode_16032021_110015.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	22416	kHz	INFO
T1 20dB	2400.000000	---	2450.9600	MHz	PASS
T2 20dB	---	2483.500000	2473.3760	MHz	PASS

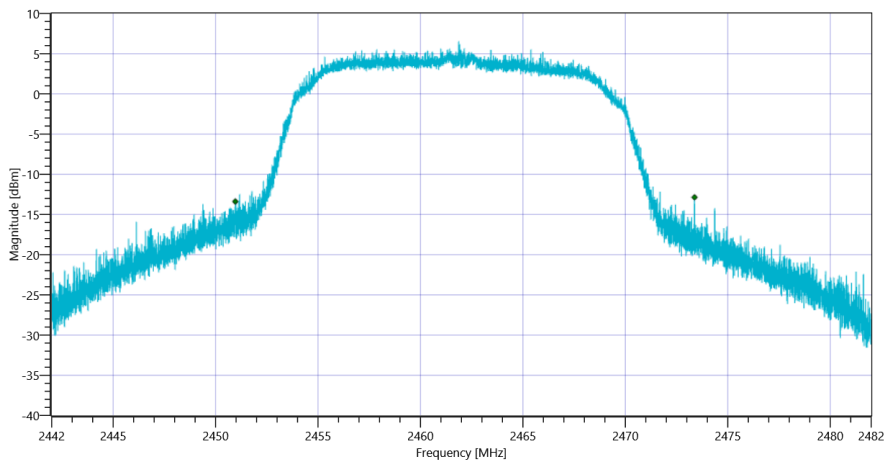

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode 20dB_16032021_110023.png

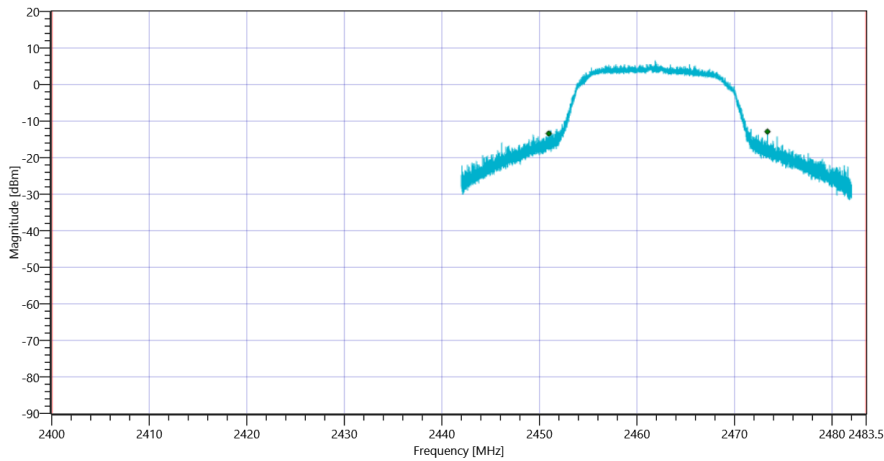

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 g-mode_16032021_110030.png

TEST FINISHED	
General Verdict	PASS

16. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode

Test References	
TC Start	16.03.2021 11:10:29
Ambit Temp [°C] Humidity [rel%]	24.7 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60



Test at TX 2412 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.21 16.35 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	18354.165	kHz	INFO
T1 99%	2400.000000	---	2402.6649	MHz	PASS
T2 99%	---	2483.500000	2421.0191	MHz	PASS

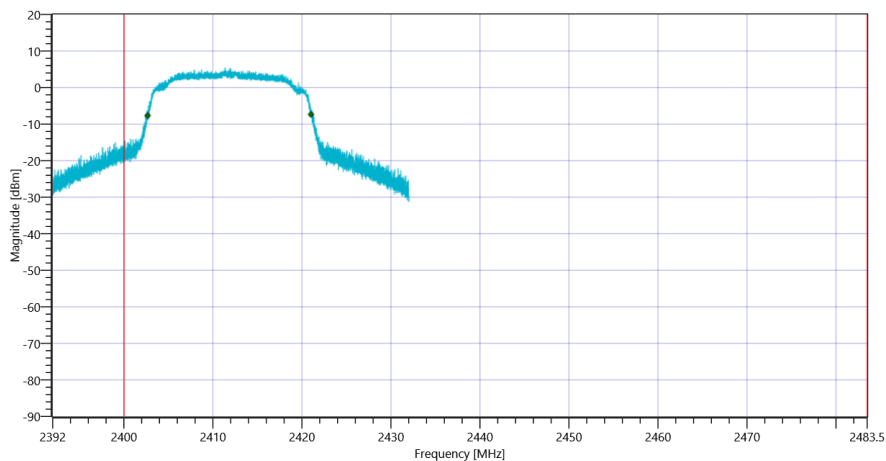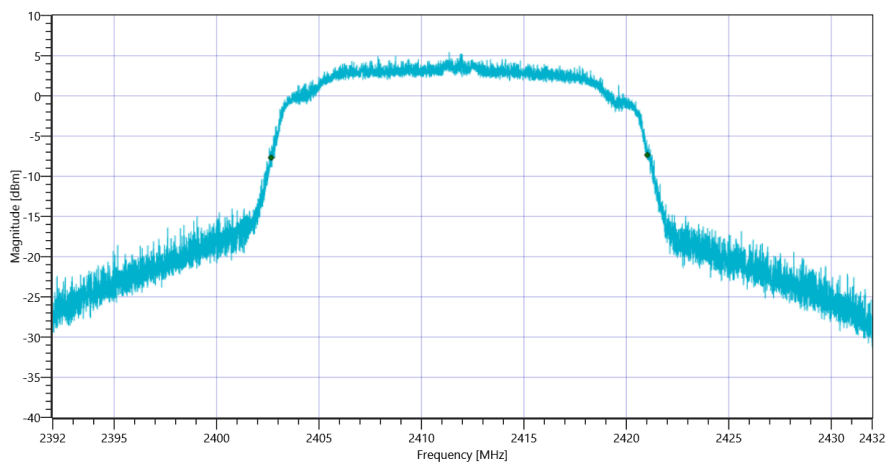


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	21796	kHz	INFO
T1 20dB	2400.000000	---	2400.1320	MHz	PASS
T2 20dB	---	2483.500000	2421.9280	MHz	PASS

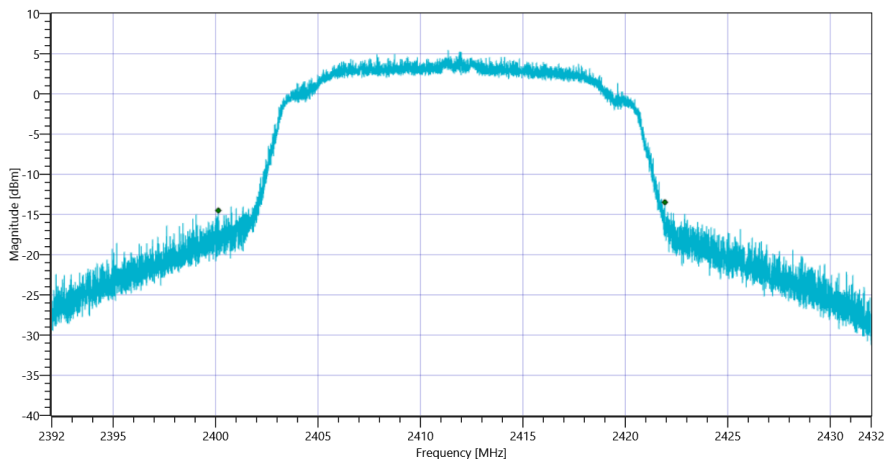

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode 20dB_16032021_111116.png

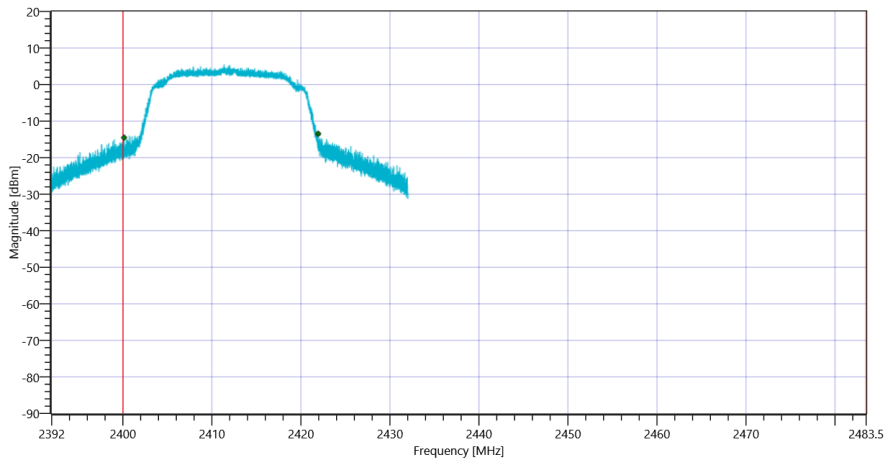

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode_16032021_111123.png

TEST FINISHED	
General Verdict	PASS

17. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode

Test References	
TC Start	16.03.2021 11:21:08
Ambit Temp [°C] Humidity [rel%]	24.7 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60



Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.94 16.22 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	18266.173	kHz	INFO
T1 99%	2400.000000	---	2427.8929	MHz	PASS
T2 99%	---	2483.500000	2446.1591	MHz	PASS

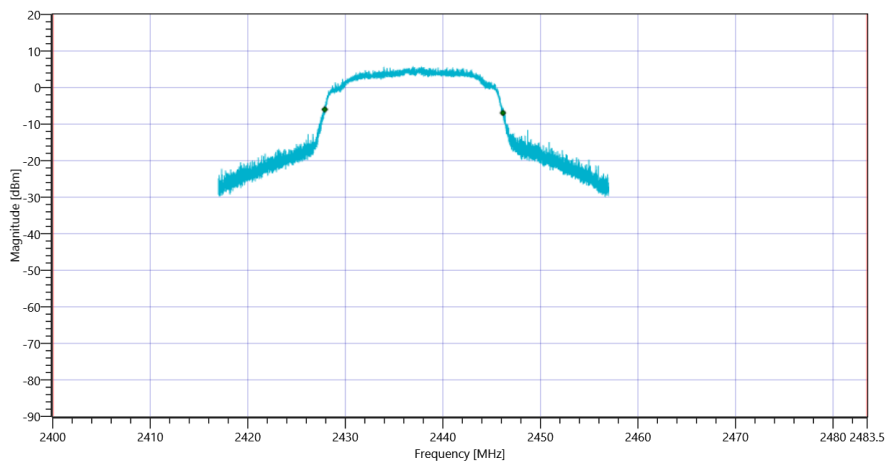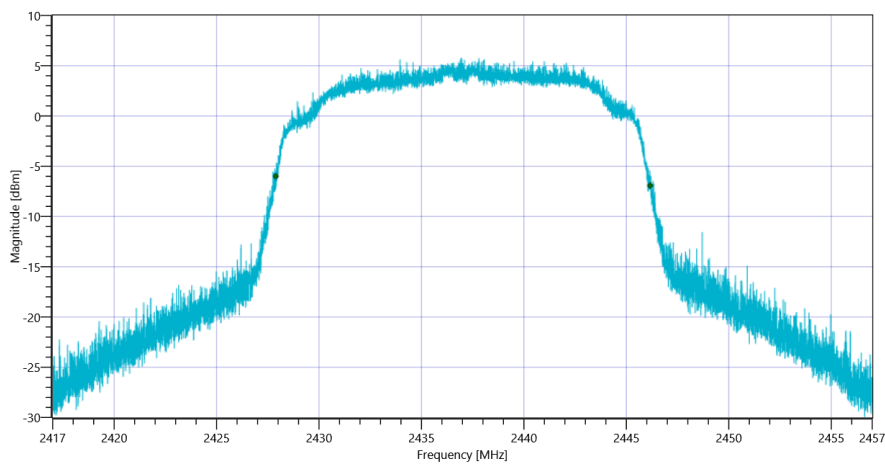


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	22856	kHz	INFO
T1 20DB	2400.000000	---	2426.1920	MHz	PASS
T2 20dB	---	2483.500000	2449.0480	MHz	PASS

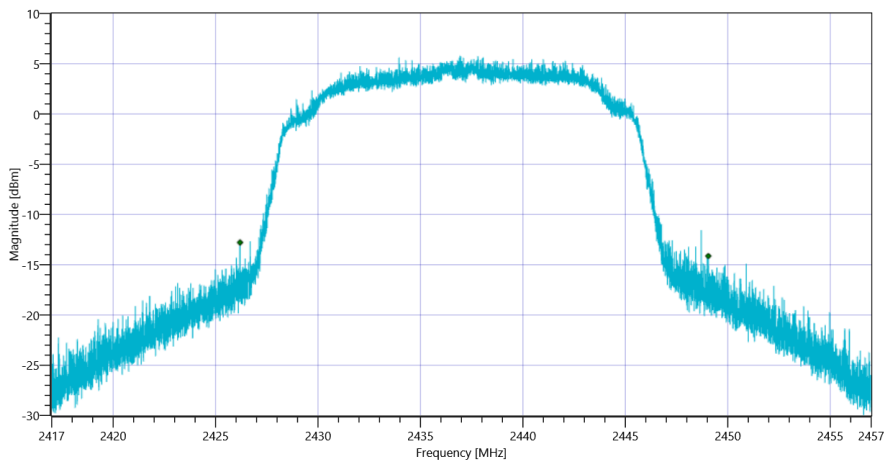

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode 20dB_16032021_112154.png

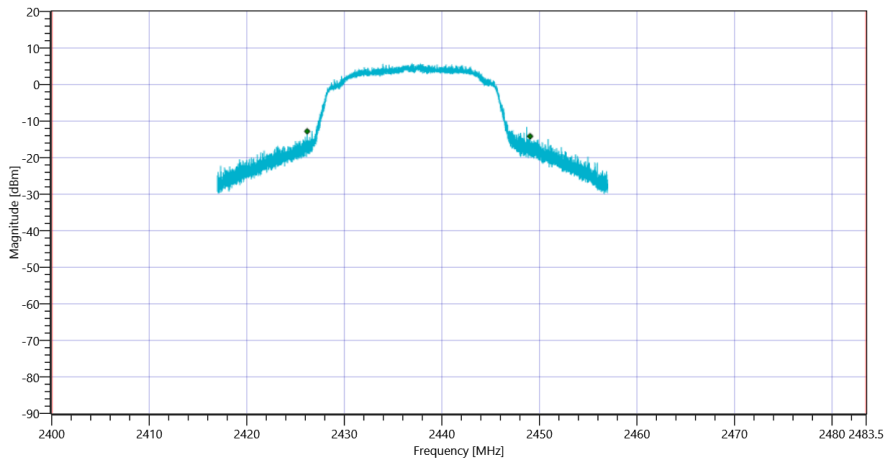

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode_16032021_112202.png

TEST FINISHED	
General Verdict	PASS

18. FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode

Test References	
TC Start	16.03.2021 11:33:21
Ambit Temp [°C] Humidity [rel%]	24.7 24
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60



Test at TX 2462 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.33 16.12 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	18362.164	kHz	INFO
T1 99%	2400.000000	---	2452.5809	MHz	PASS
T2 99%	---	2483.500000	2470.9431	MHz	PASS

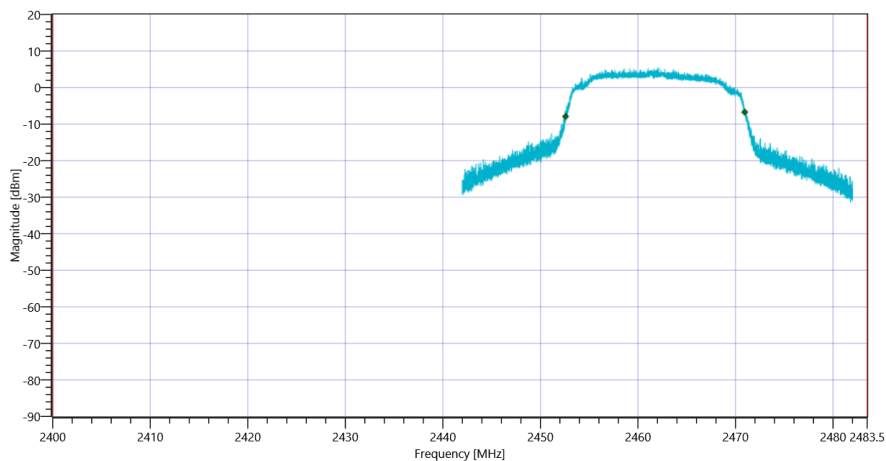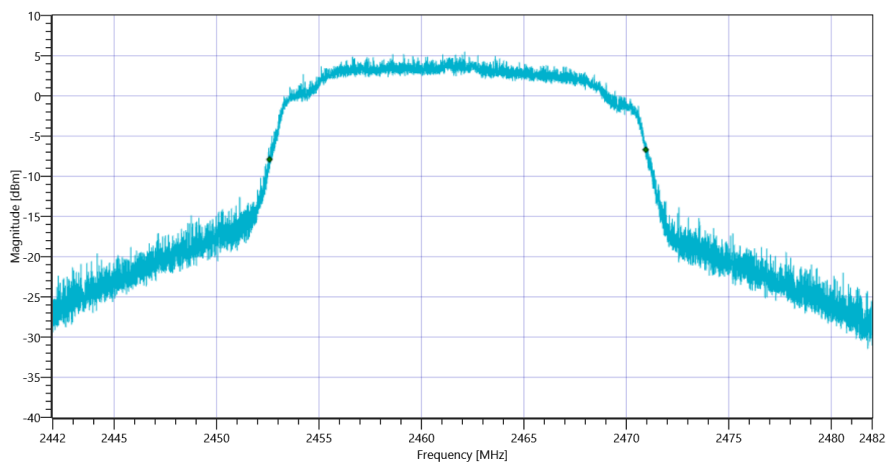


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	22452	kHz	INFO
T1 20DB	2400.000000	---	2450.1120	MHz	PASS
T2 20dB	---	2483.500000	2472.5640	MHz	PASS

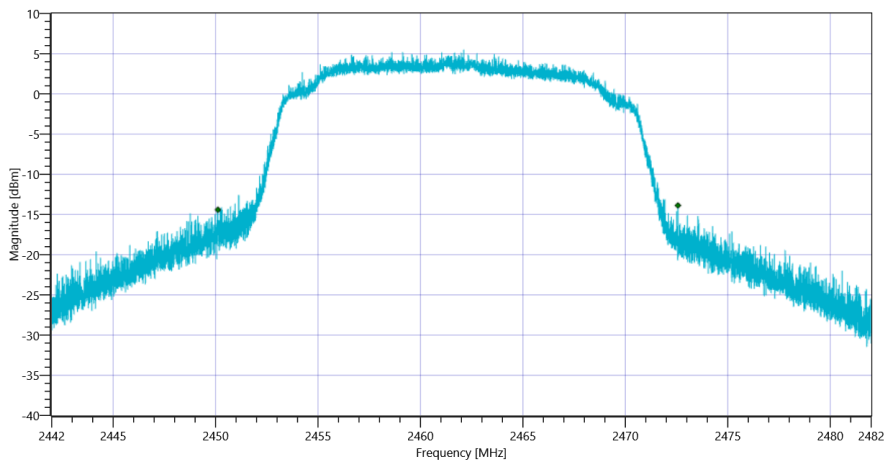

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode 20dB_16032021_113408.png

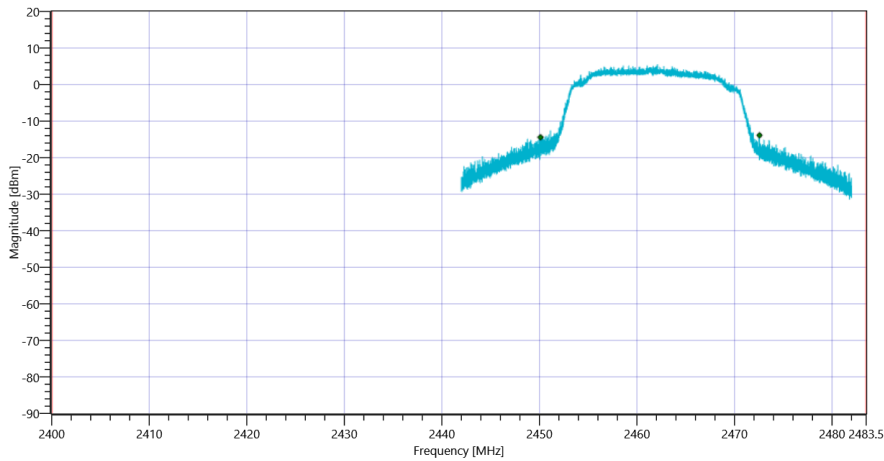

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ WLAN2G4 nHT20-mode_16032021_113415.png

TEST FINISHED	
General Verdict	PASS

19. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode


Test References	
TC Start	16.03.2021 10:03:03
Ambit Temp [°C] Humidity [rel%]	24.2 29
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2412 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.82 16.35 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-7.96	dBm/3KHz	PASS

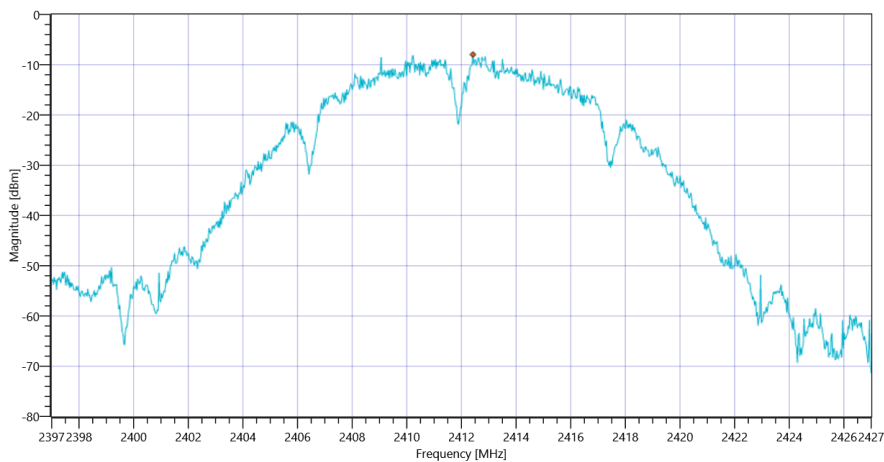

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode_16032021_100344.png

TEST FINISHED	
General Verdict	PASS

20. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode


Test References	
TC Start	16.03.2021 10:13:41
Ambit Temp [°C] Humidity [rel%]	24.4 28
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2437 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.56 16.22 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-7.24	dBm/3KHz	PASS

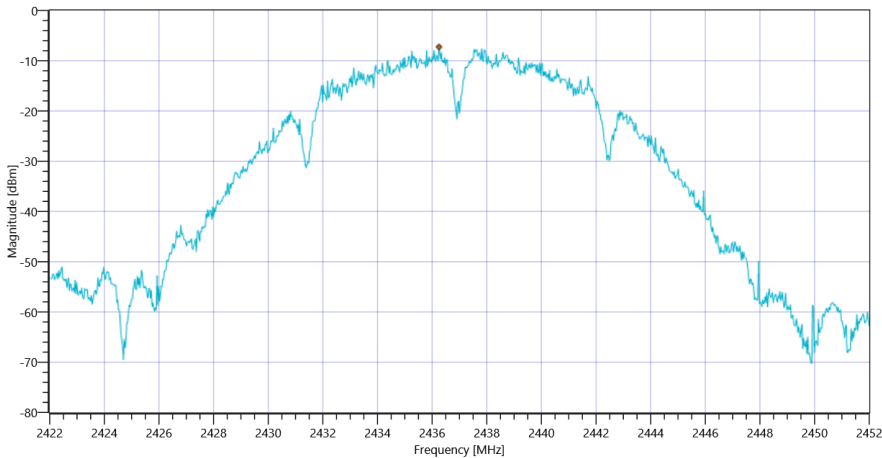

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode_16032021_101422.png

TEST FINISHED	
General Verdict	PASS

21. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode


Test References	
TC Start	16.03.2021 10:24:30
Ambit Temp [°C] Humidity [rel%]	24.5 27
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2462 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.96 16.12 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-7.7	dBm/3KHz	PASS

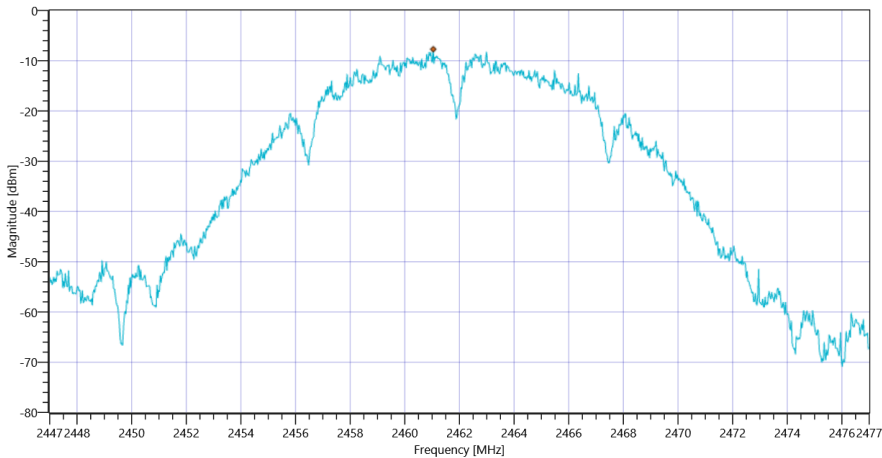

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 b-mode_16032021_102510.png

TEST FINISHED	
General Verdict	PASS

22. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode


Test References	
TC Start	16.03.2021 10:35:19
Ambit Temp [°C] Humidity [rel%]	24.6 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2412 MHz

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.07 16.35 15		
Start [MHz] Stop [MHz]			2397.000 2427.000		
RBW [MHz] VBW [MHz]			0.003000 0.010000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			1000 20 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.77	dBm/3KHz	PASS

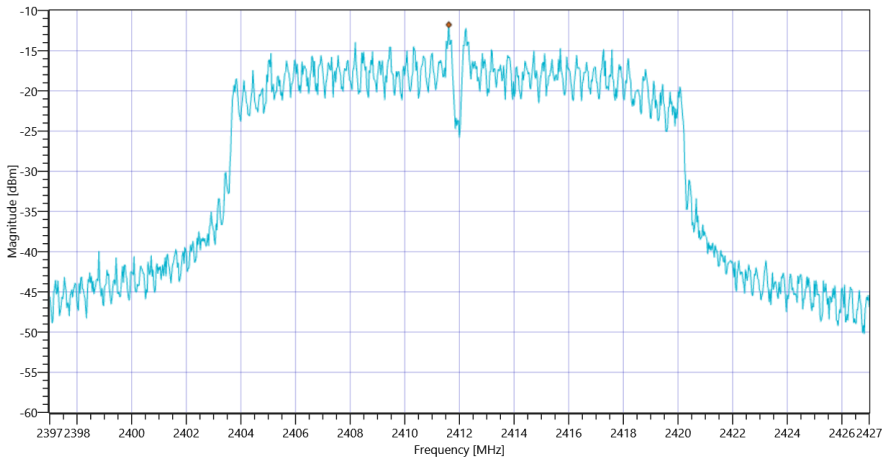

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_16032021_103559.png

TEST FINISHED	
General Verdict	PASS

23. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode


Test References	
TC Start	16.03.2021 10:48:16
Ambit Temp [°C] Humidity [rel%]	24.6 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2437 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.02 16.22 15	
Start [MHz] Stop [MHz]	2422.000 2452.000	
RBW [MHz] VBW [MHz]	0.003000 0.010000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.78	dBm/3KHz	PASS

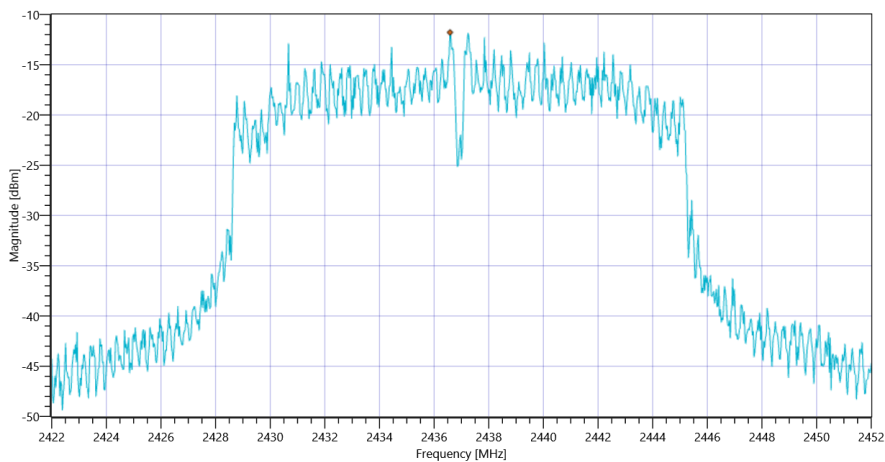

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode_16032021_104857.png

TEST FINISHED	
General Verdict	PASS

24. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 g-mode


Test References	
TC Start	16.03.2021 10:58:50
Ambit Temp [°C] Humidity [rel%]	24.6 26
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2462 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.92 16.12 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-12.01	dBm/3KHz	PASS

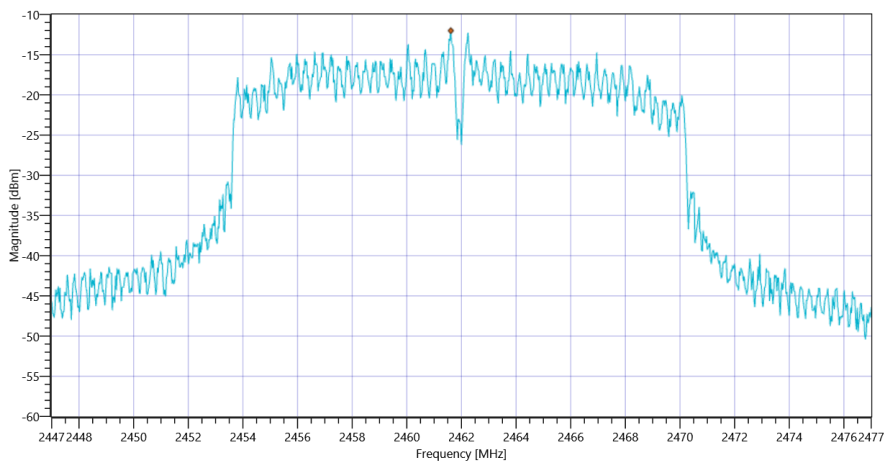

TEST FINISHED	
General Verdict	PASS

25. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	16.03.2021 11:09:43
Ambit Temp [°C] Humidity [rel%]	24.6 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2412 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.27 16.35 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-11.91	dBm/3KHz	PASS

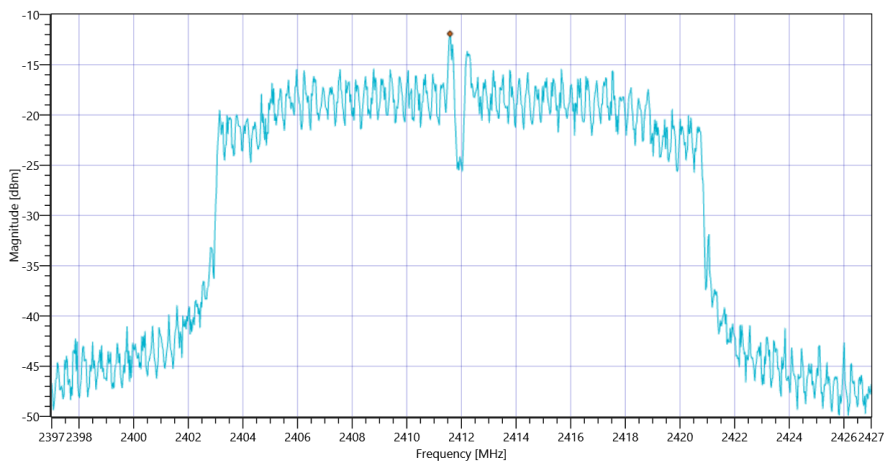

TEST FINISHED	
General Verdict	PASS

26. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	16.03.2021 11:20:22
Ambit Temp [°C] Humidity [rel%]	24.7 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2437 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.74 16.22 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-12.43	dBm/3KHz	PASS

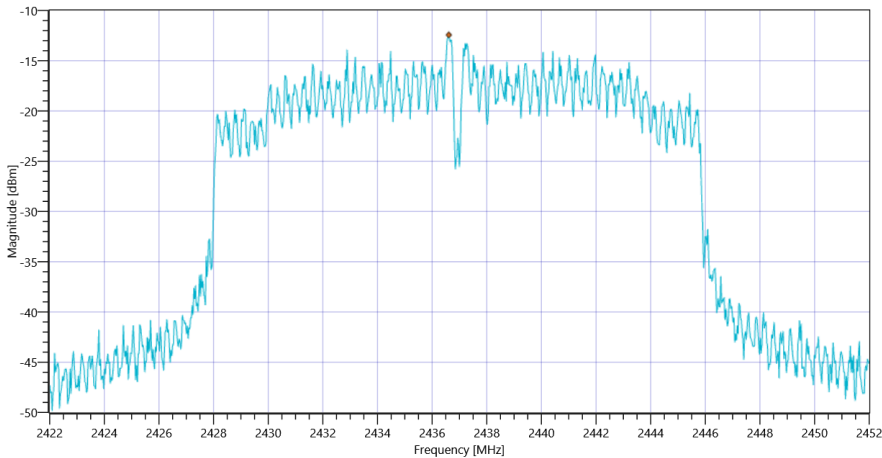

TEST FINISHED	
General Verdict	PASS

27. FCC Part 15.247 Peak Power Spectral Density DTS ~ WLAN2G4 nHT20-mode


Test References	
TC Start	16.03.2021 11:32:35
Ambit Temp [°C] Humidity [rel%]	24.7 25
System Version	2.0.0.4
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.7
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60

Test at TX 2462 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.58 16.12 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-13.07	dBm/3KHz	PASS

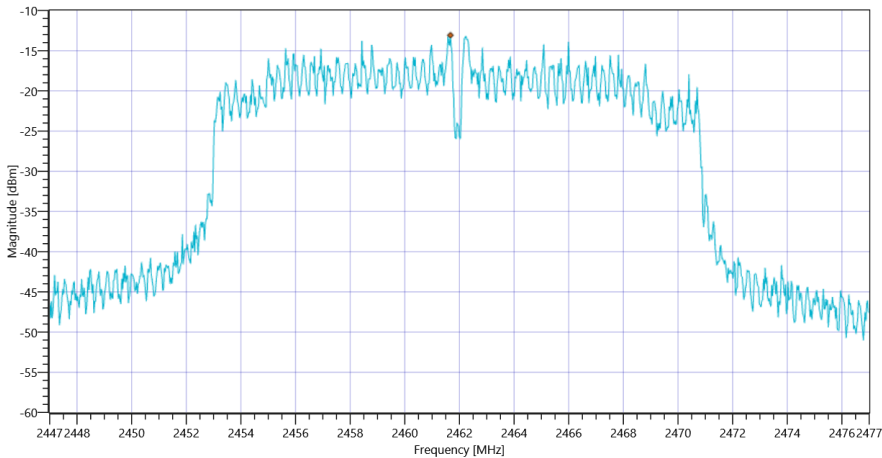

TEST FINISHED	
General Verdict	PASS

- END OF DOCUMENT -