


TEST REPORT

Applicant: INFINIX MOBILITY LIMITED
Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL
CENTRE 19-25 SHAN MEI STREET FOTAN NT
HONGKONG
Equipment Type: Mobile phone
Model Name: X6837
Brand Name: Infinix
FCC ID: 2AIZN-YY5-X6837
Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)
Sample Arrival Date: Sep. 27, 2023
Test Date: Oct. 11, 2023 - Nov. 06, 2023
Date of Issue: Nov. 17, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Nov. 17, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments.....	9
4.2	Test Equipment List.....	9
4.3	Test Software List.....	10
4.4	Measurement Uncertainty.....	11
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example.....	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Output Power	17
5.3	Occupied Bandwidth.....	19
5.4	Conducted Spurious Emission.....	20
5.5	Band Edge (Authorized-band band-edge).....	22

5.6	Conducted Emission.....	24
5.7	Radiated Spurious Emission.....	25
5.8	Band Edge (Restricted-band band-edge).....	30
5.9	Power Spectral density (PSD)	31
ANNEX A	TEST RESULT	32
A.1	Output Power	32
A.2	Occupied Bandwidth.....	36
A.3	Conducted Spurious Emissions	46
A.4	Band Edge (Authorized-band band-edge).....	60
A.5	Conducted Emissions	66
A.6	Radiated Emission.....	68
A.7	Band Edge (Restricted-band band-edge).....	88
A.8	Power Spectral Density (PSD).....	94
ANNEX B	TEST SETUP PHOTOS	100
ANNEX C	EUT EXTERNAL PHOTOS.....	100
ANNEX D	EUT INTERNAL PHOTOS.....	100

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	INFINIX MOBILITY LIMITED
Address	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG

2.2 Manufacturer Information

Manufacturer	INFINIX MOBILITY LIMITED
Address	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile phone
Model Name Under Test	X6837
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	168.6mmx76.6mmx8.25mm
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/13/17/25/26/66 LTE TDD Band 38/41 Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) U-NII-1/2A/2C/3, GPS, GLONASS, BeiDou, Galileo, FM Receiver, NFC
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.	
Modulation Type	DSSS, OFDM	
Product Type	☐ Mobile ☒ Portable ☐ Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	N/A	
Categorization as Correlated or Completely Uncorrelated	N/A	
Antenna Type	ANT-14 ANT-12	PIFA Antenna
Antenna Gain	ANT-14 ANT-12	1.35 dBi -4.63 dBi
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20) was tested in this report.	

Mode	Antenna		
	SISO-ANT14	SISO-ANT12	MIMO
802.11b	√	√	--
802.11g	√	√	--
802.11n20	√	√	--
Note: All the configurations were tested, but only the worst data was shown in this report.			

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20	1/6/6.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
4	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	54% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.2°C to +25.0°C
Working Voltage of the EUT	NV (Normal Voltage)	3.87V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2023.05.16	2024.05.15
Power Sensor	KEYSIGHT	U2063XA	MY58000251	2023.07.12	2024.07.11
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.12.28	2023.12.27
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2023.09.05	2024.09.04
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2023.06.19	2024.06.18
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2021.05.19	2024.05.08
Test Antenna-Horn	A-INFO	LB- 180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2022.02.19	2024.08.15
Amplifier	COM-MV	ZT30- 1000M	07210897	2023.09.05	2024.09.04
Amplifier	COM-MV	LSCX_LNA 1-12G-01	7210214	2023.09.05	2024.09.04
Amplifier	COM-MV	XKu_LNA7- 18G-01	7210209	2023.09.05	2024.09.04
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2022.12.07	2023.12.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2023.09.05	2024.09.04
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	00883	2022.04.01	2025.03.31
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	130	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2023.09.05	2024.09.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m* 2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

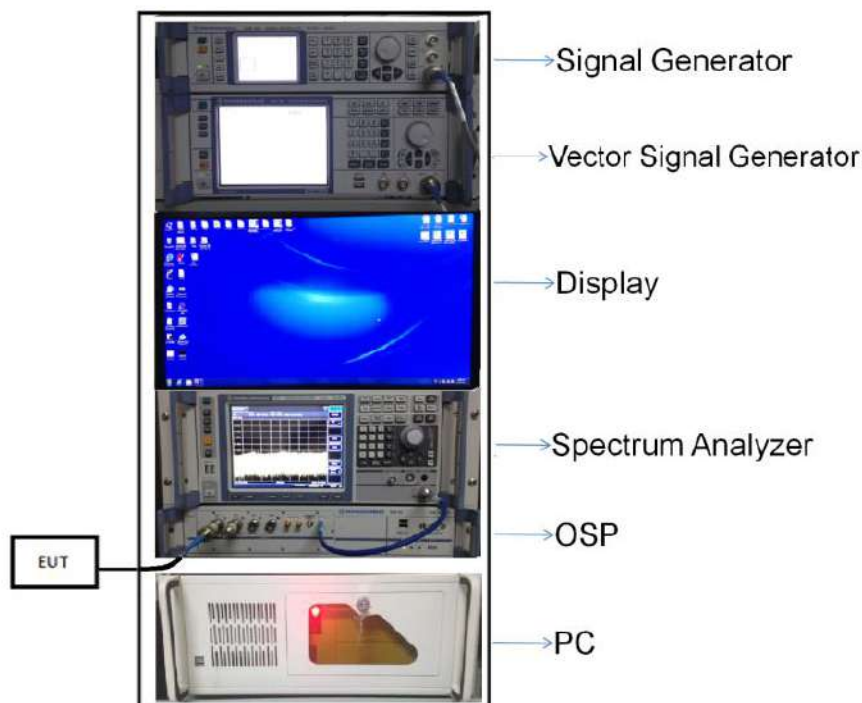


(Diagram 1)

4.5.2 For AC Power Supply Port Test

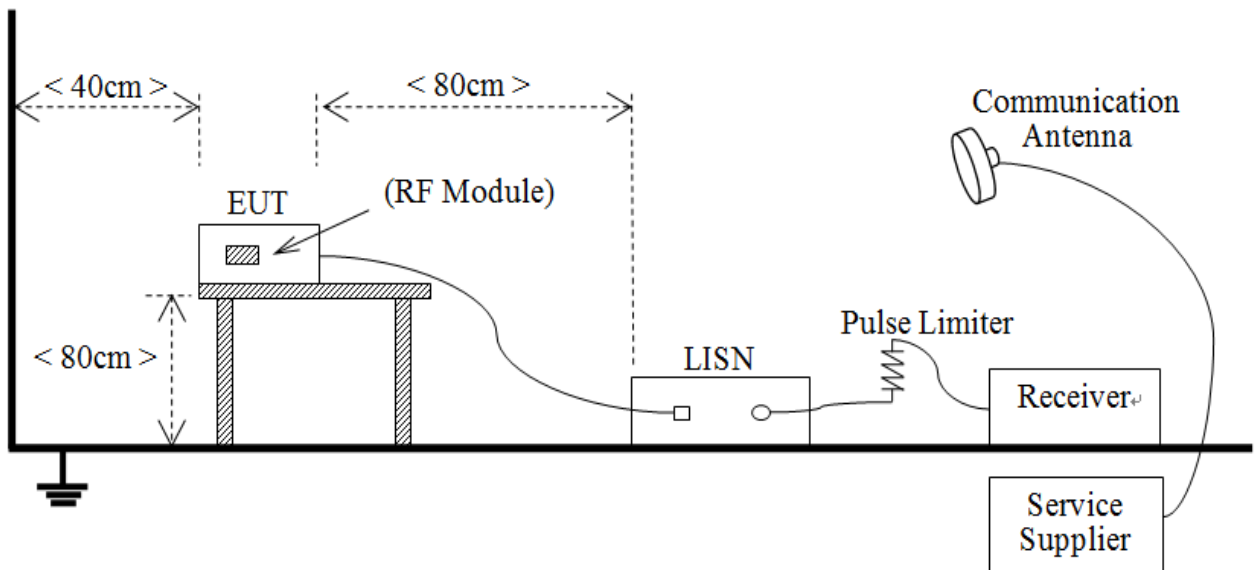


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

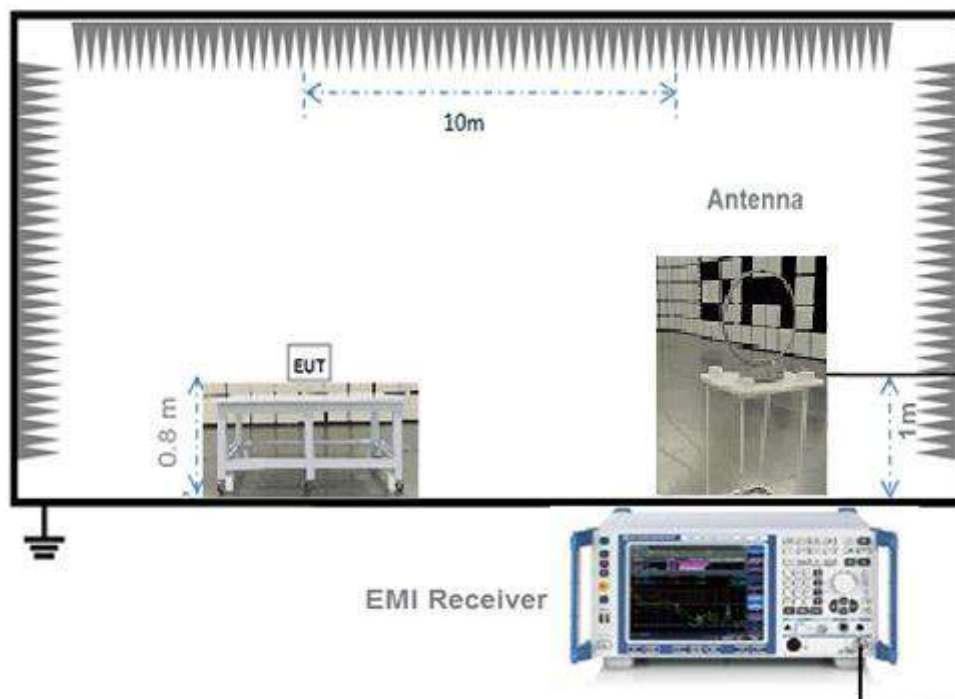


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

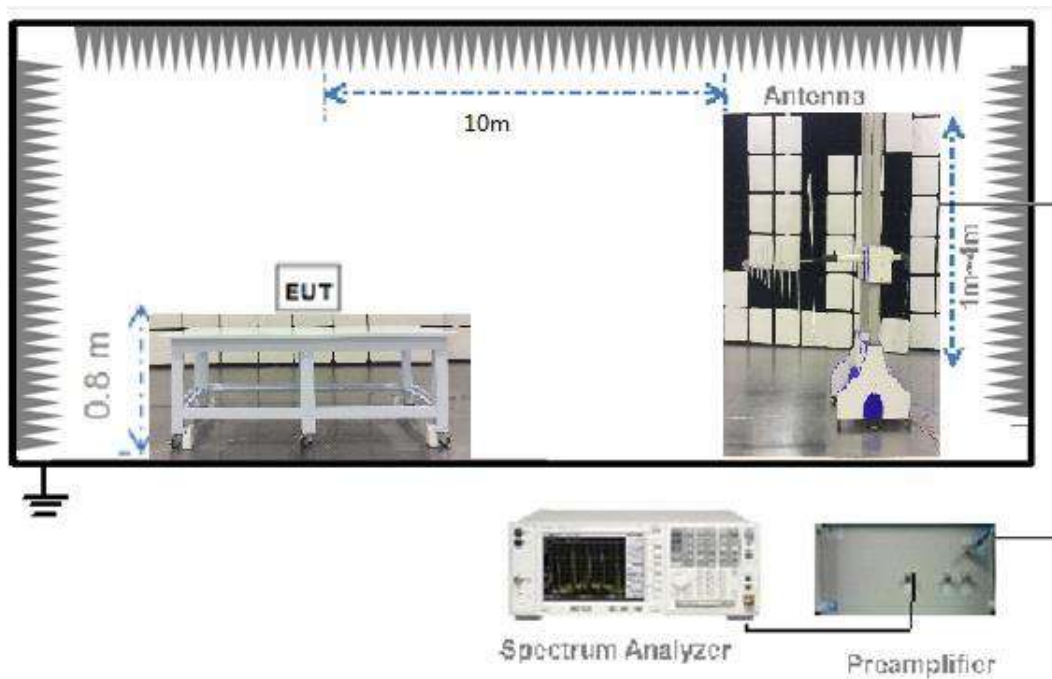

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

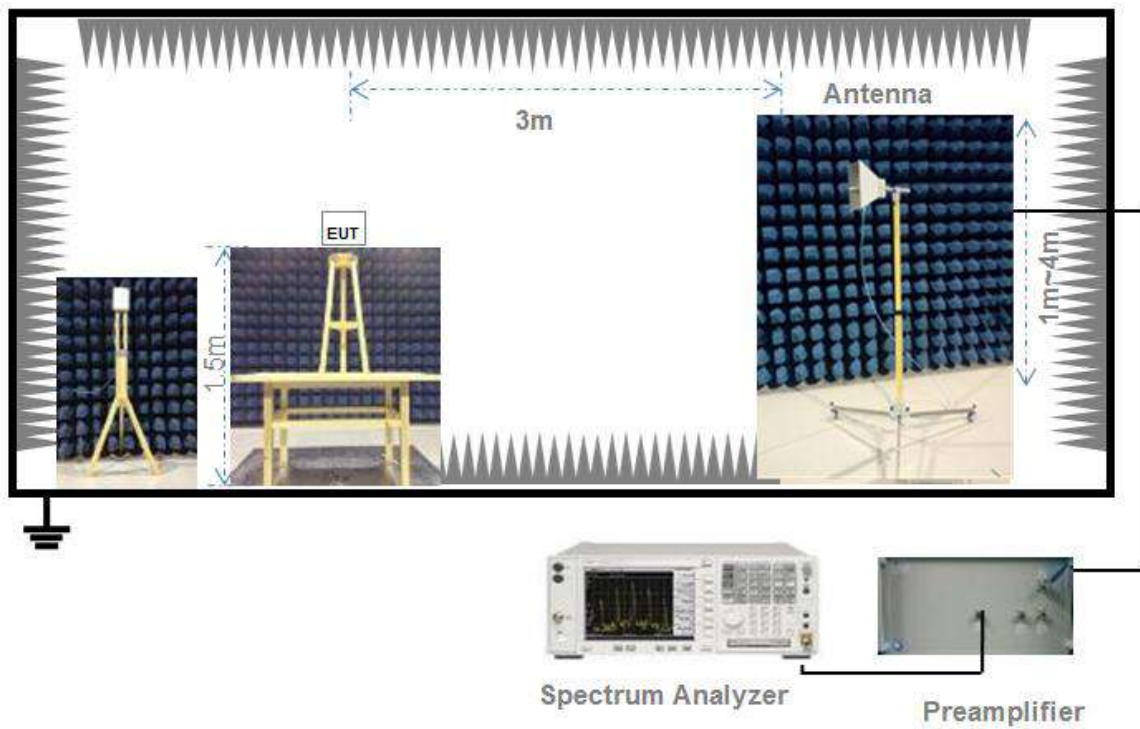

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed

using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as

described in Section 6.0.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
802.11b	8.377	8.407	99.64%
802.11g	1.388	1.426	97.34%
802.11n-20 MHz	1.297	1.335	97.15%

ANT-12

Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.39	109.40	30	1000	Pass
Middle	20.83	121.06			Pass
High	20.64	115.88			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.44	220.80	30	1000	Pass
Middle	24.75	298.54			Pass
High	24.35	272.27			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	23.47	222.33	30	1000	Pass
Middle	24.44	277.97			Pass
High	23.53	225.42			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.91	61.80	30	1000	Pass
Middle	18.32	67.92			Pass
High	18.42	69.50			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.94	31.19	30	1000	Pass
Middle	17.11	51.40			Pass
High	16.96	49.66			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.49	28.12	30	1000	Pass
Middle	16.99	50.00			Pass
High	15.51	35.56			Pass

ANT-14**Peak Power Test Data****802.11b Mode:**

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.84	12.13	30	1000	Pass
Middle	10.81	12.05			Pass
High	10.96	12.47			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.72	59.16	30	1000	Pass
Middle	17.44	55.46			Pass
High	17.88	61.38			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.80	75.86	30	1000	Pass
Middle	18.64	73.11			Pass
High	18.48	70.47			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.33	6.81	30	1000	Pass
Middle	8.37	6.87			Pass
High	8.58	7.21			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.36	6.85	30	1000	Pass
Middle	8.32	6.79			Pass
High	8.45	7.00			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	8.32	6.79	30	1000	Pass
Middle	8.34	6.82			Pass
High	8.41	6.93			Pass

A.2 Occupied Bandwidth

Test Data

ANT-12

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	8.150000	12.955000	≥ 500
Middle	8.150000	12.944000	≥ 500
High	8.650000	13.023000	≥ 500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.500000	17.215000	≥ 500
Middle	15.550000	17.274000	≥ 500
High	15.400000	17.352000	≥ 500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.400000	18.095000	≥ 500
Middle	15.200000	18.220000	≥ 500
High	16.050000	18.222000	≥ 500

ANT-14**802.11b Mode:**

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	8.100000	12.747000	≥500
Middle	8.150000	12.671000	≥500
High	8.150000	12.823000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.200000	16.919000	≥500
Middle	15.200000	17.160000	≥500
High	15.600000	17.053000	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.200000	17.860000	≥500
Middle	15.200000	18.083000	≥500
High	15.200000	17.983000	≥500

Test Plots

ANT-12

6 dB Bandwidth

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL

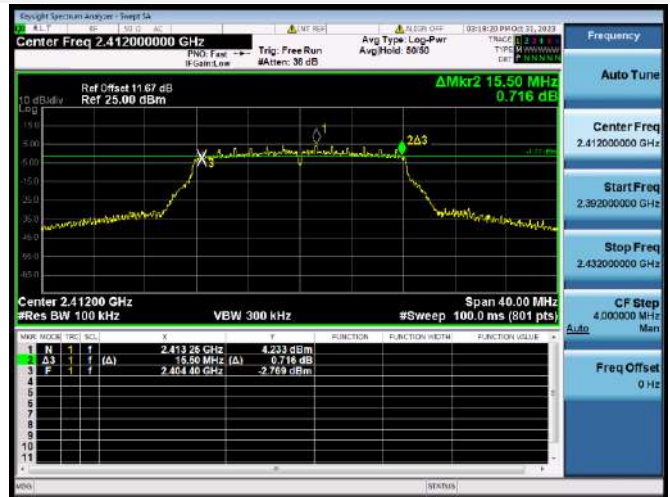

802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL



99% Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL




ANT-14

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL

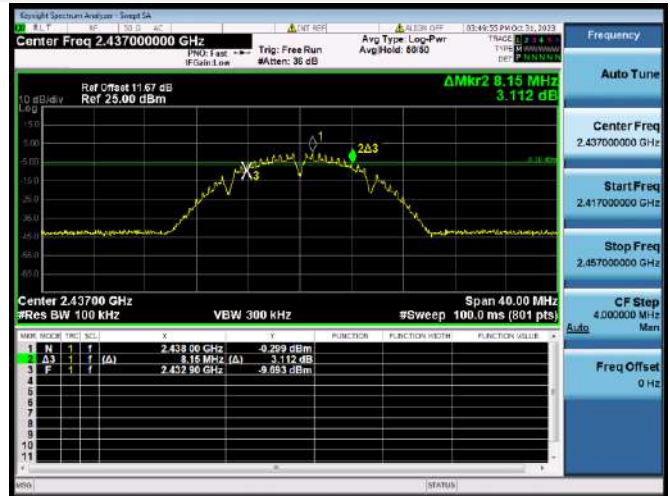


802.11b HIGH CHANNEL




802.11g LOW CHANNEL




802.11g MIDDLE CHANNEL

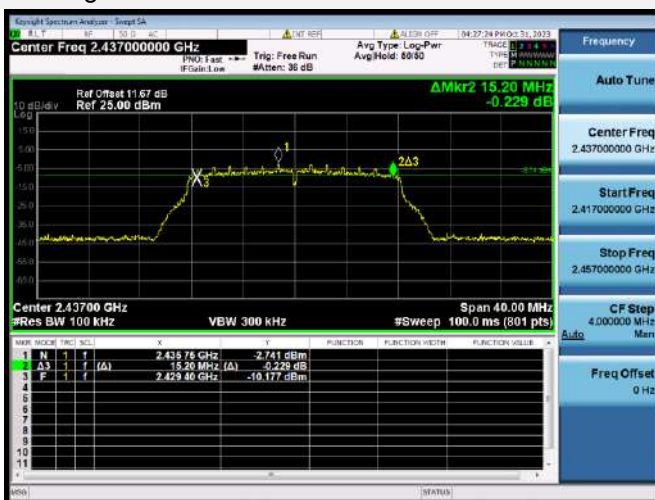


802.11g HIGH CHANNEL

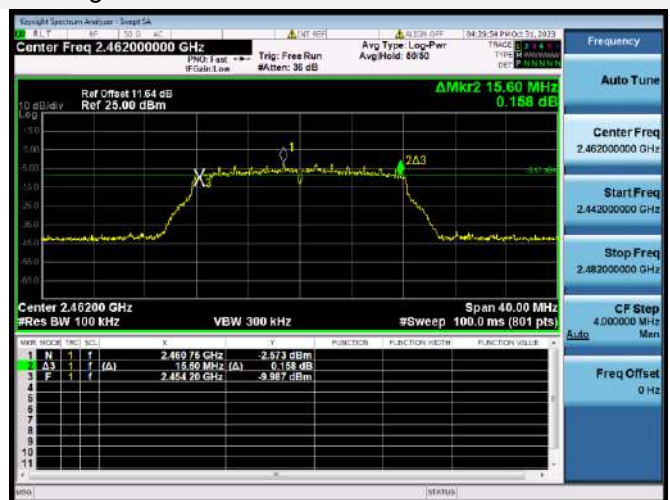

802.11n-20 MHz LOW CHANNEL

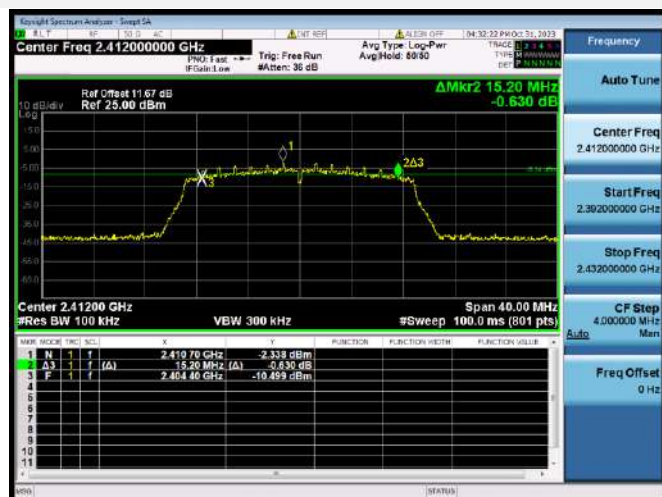

802.11n-20 MHz MIDDLE CHANNEL

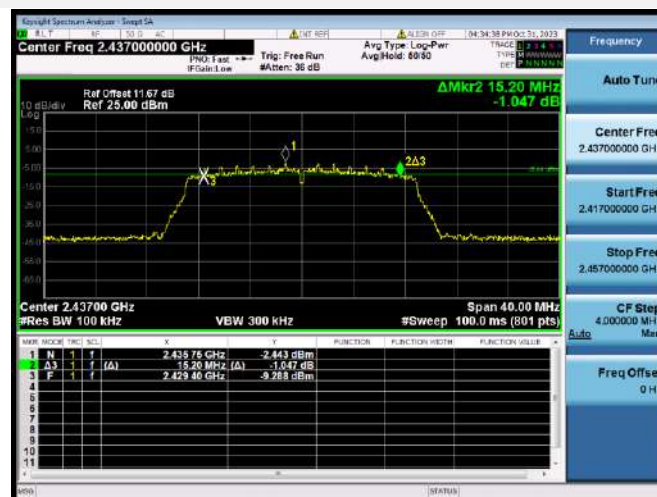

802.11n-20 MHz HIGH CHANNEL



99% Bandwidth

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

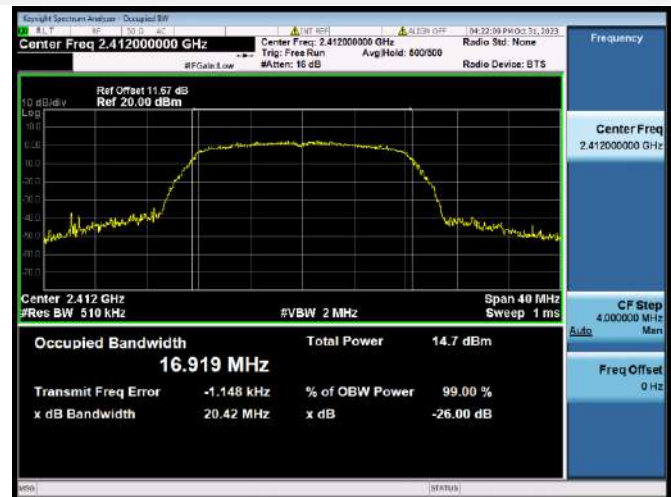

802.11g MIDDLE CHANNEL

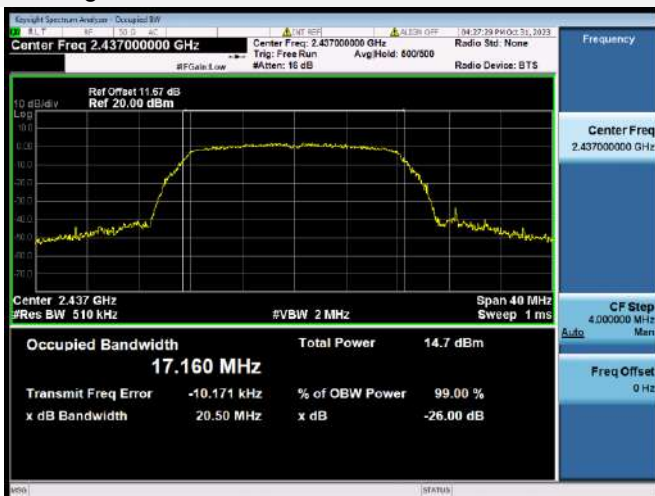

802.11g HIGH CHANNEL

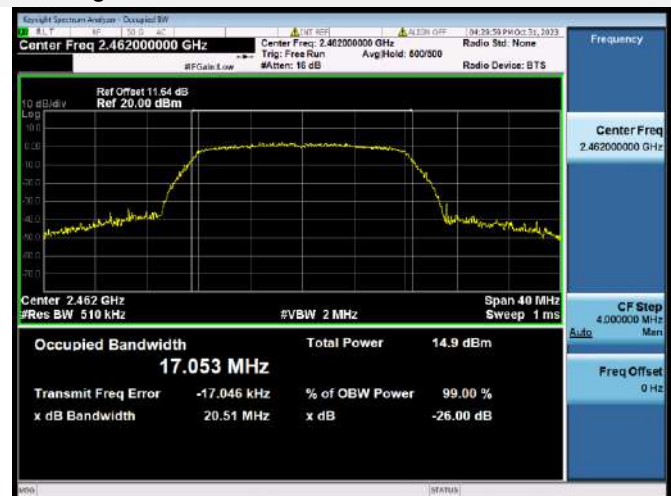

802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL



A.3 Conducted Spurious Emissions

Test Data

ANT-12

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.69	8.90	-11.10	Pass
Middle	-35.32	9.69	-10.31	Pass
High	-35.93	9.26	-10.74	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.04	4.91	-15.09	Pass
Middle	-35.70	6.52	-13.48	Pass
High	-36.32	6.27	-13.73	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.37	4.47	-15.53	Pass
Middle	-36.36	6.58	-13.43	Pass
High	-36.52	5.16	-14.85	Pass

ANT-14**802.11b Mode:**

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.21	0.03	-19.97	Pass
Middle	-36.82	0.25	-19.75	Pass
High	-35.69	0.07	-19.93	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.40	-1.94	-21.94	Pass
Middle	-36.29	-2.35	-22.35	Pass
High	-35.01	-1.87	-21.87	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.83	-1.88	-21.88	Pass
Middle	-34.80	-2.09	-22.09	Pass
High	-35.95	-1.84	-21.84	Pass


Test Plots

ANT-12

802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

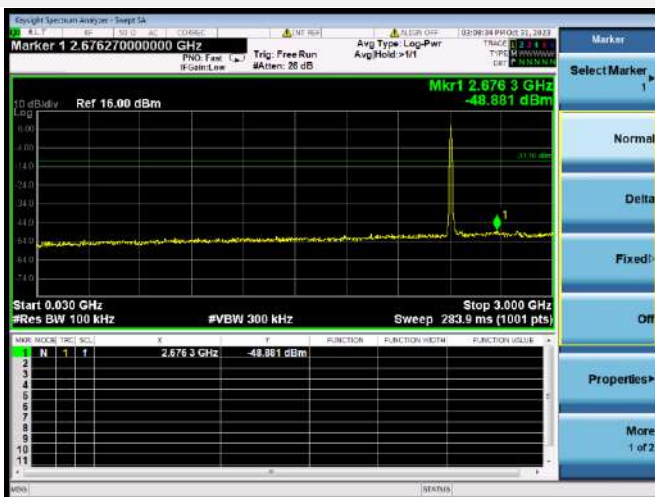


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

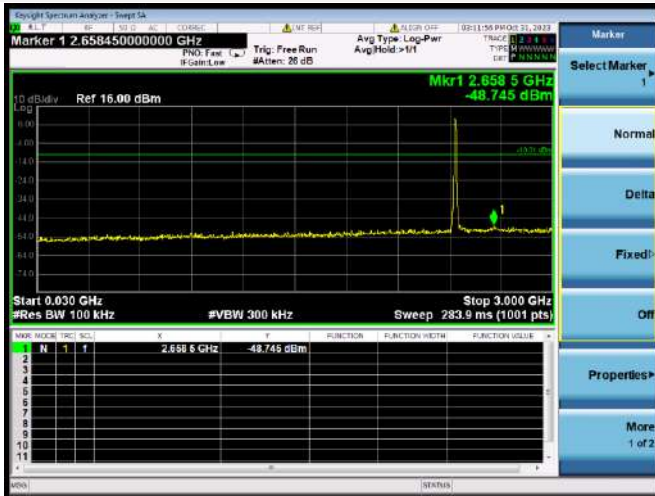


802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

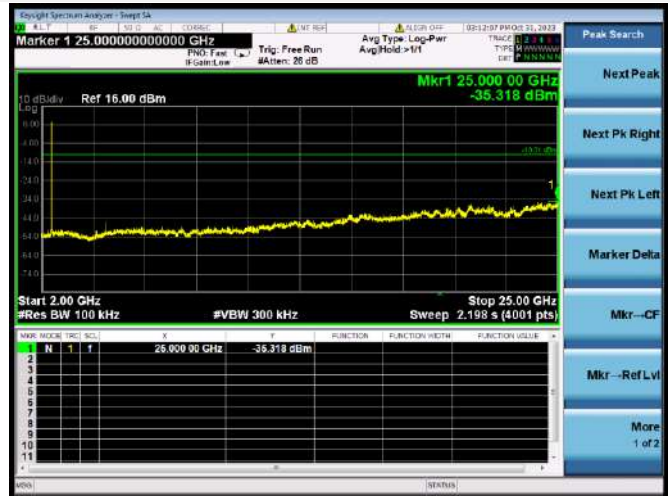


802.11b HIGH CHANNEL CARRIER LEVEL




802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

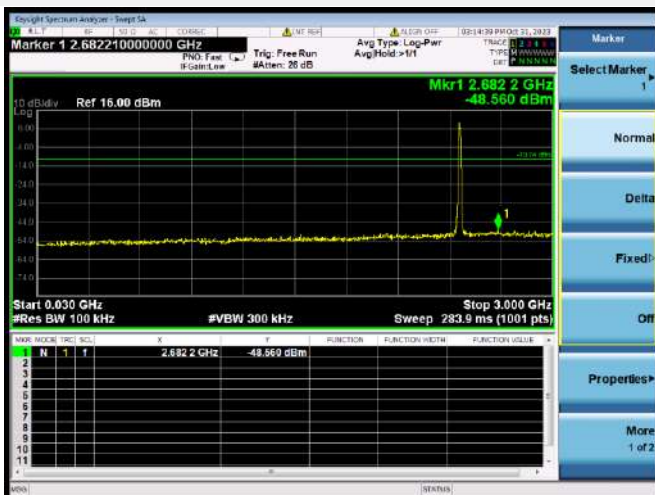


802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

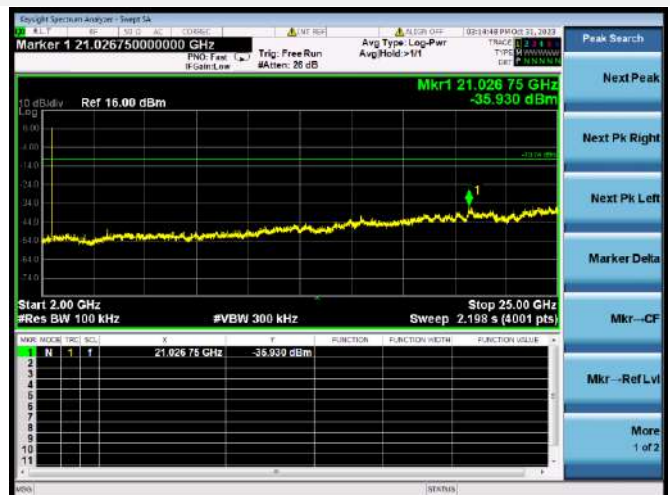

802.11g LOW CHANNEL CARRIER LEVEL

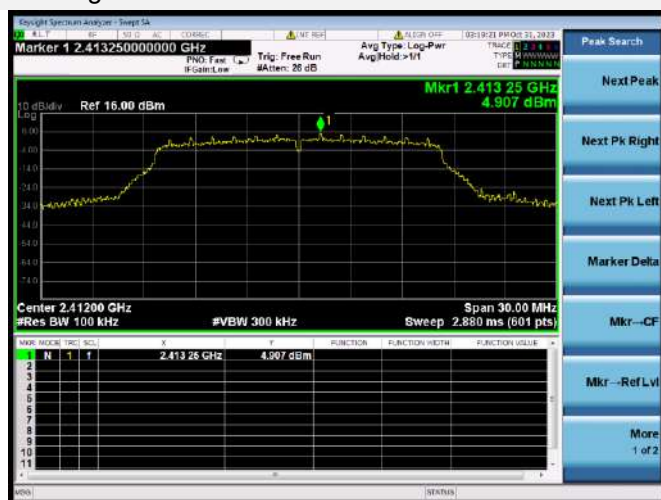


802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

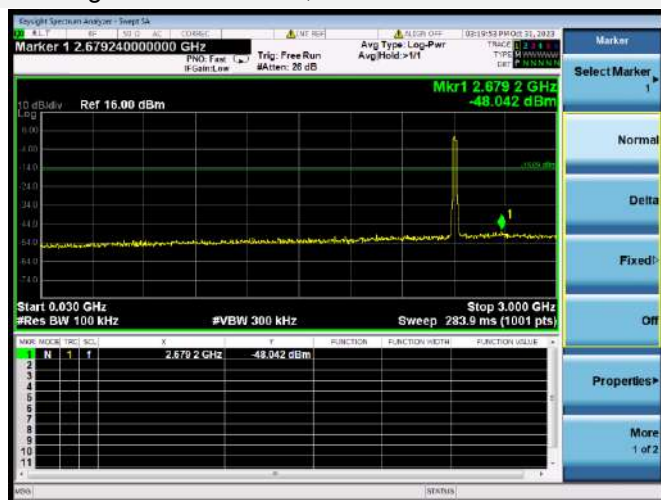


802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11g MIDDLE CHANNEL CARRIER LEVEL

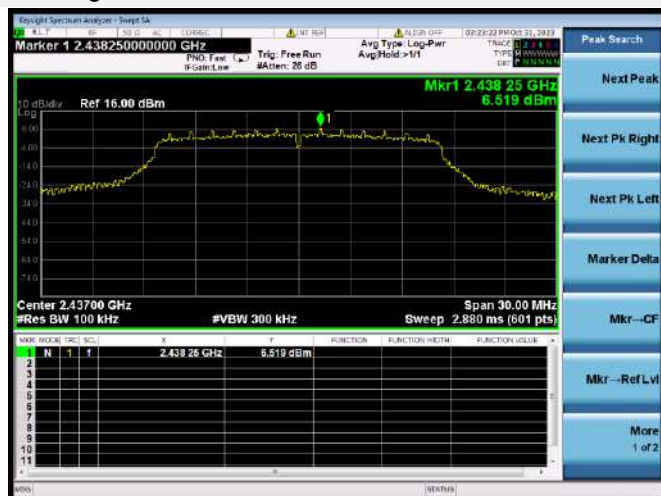


802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

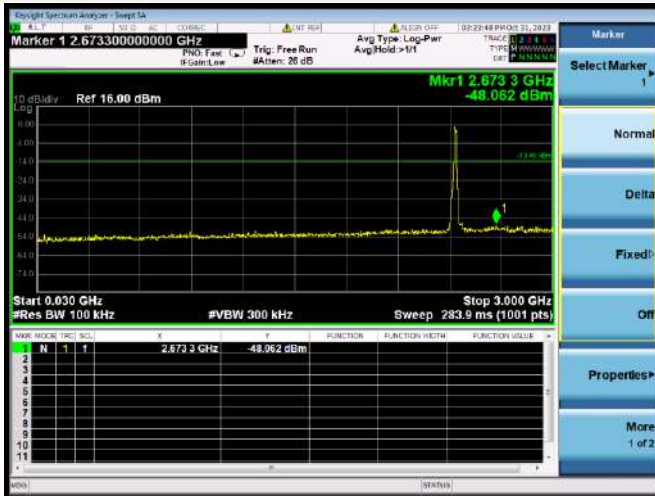


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11g HIGH CHANNEL CARRIER LEVEL

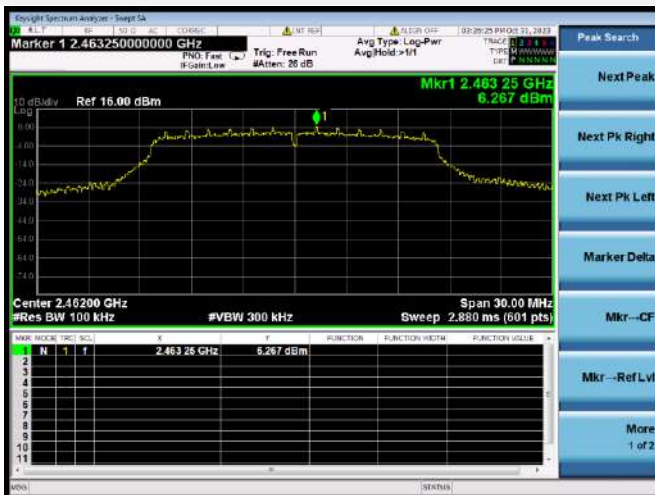



802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

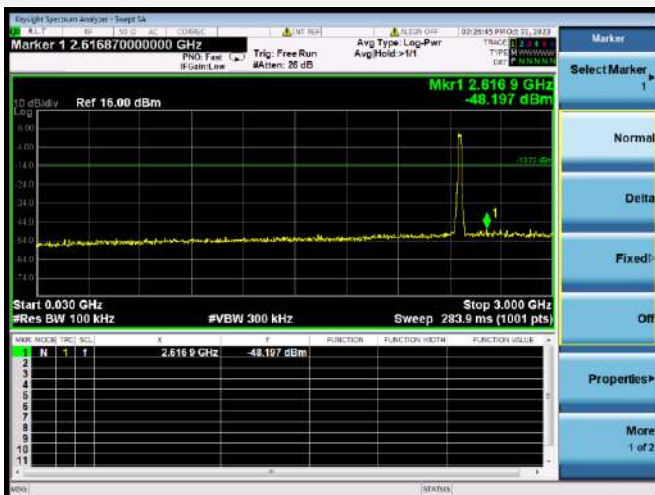


802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

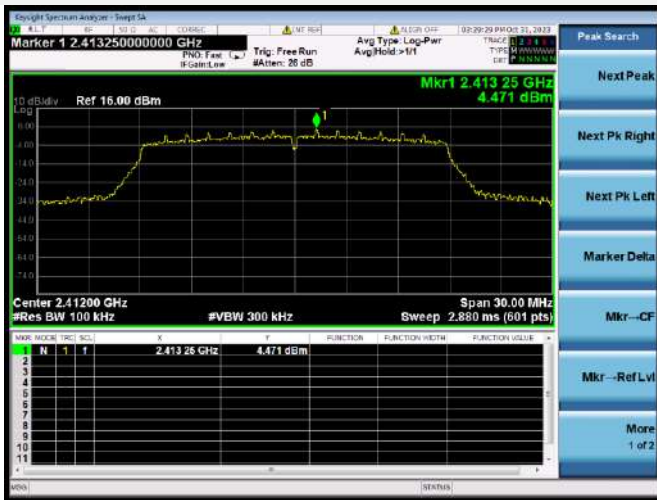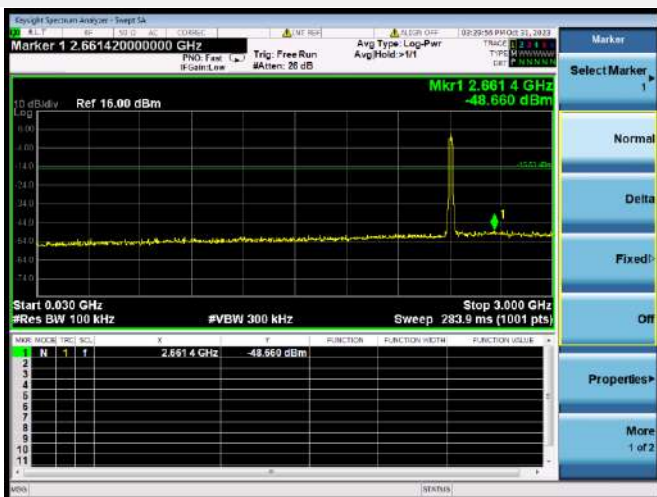802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

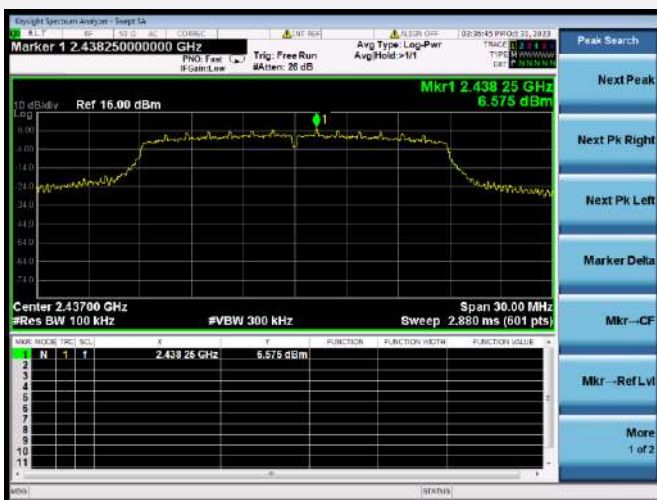


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

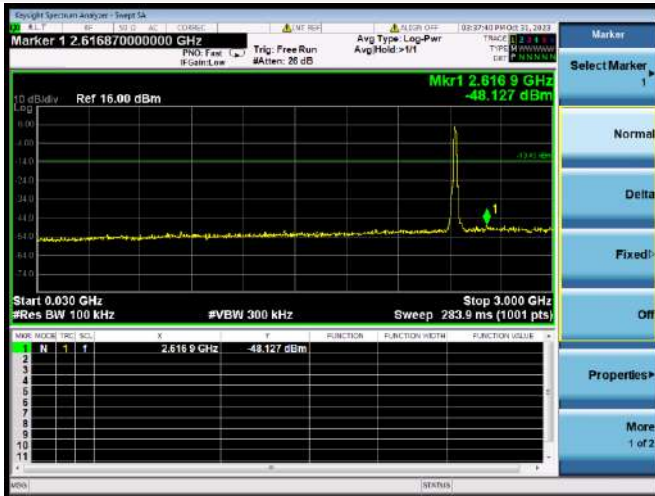


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

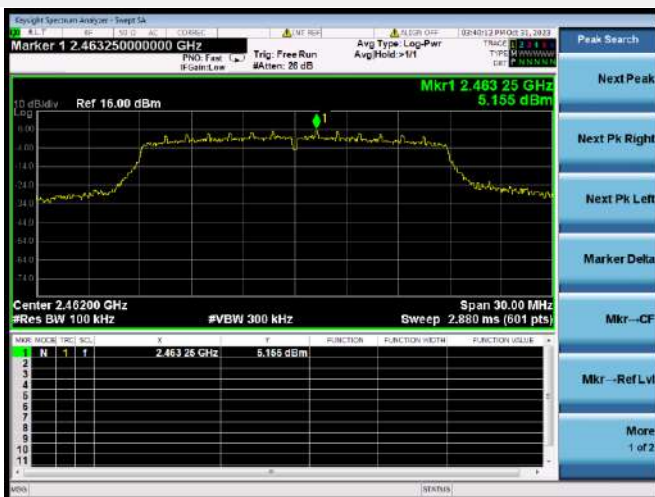

802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

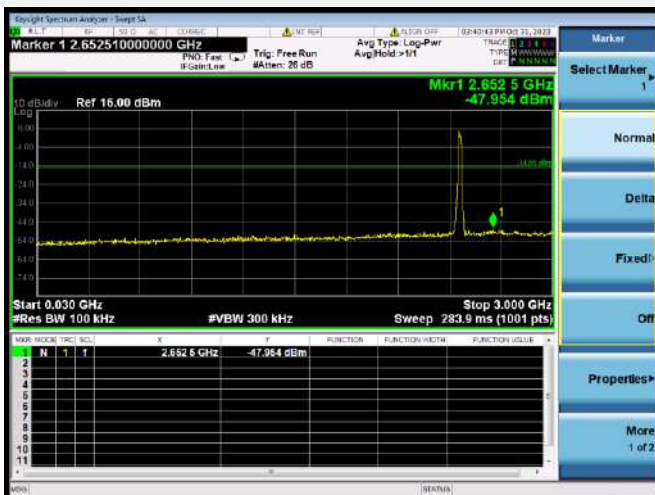

802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




ANT-14

802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

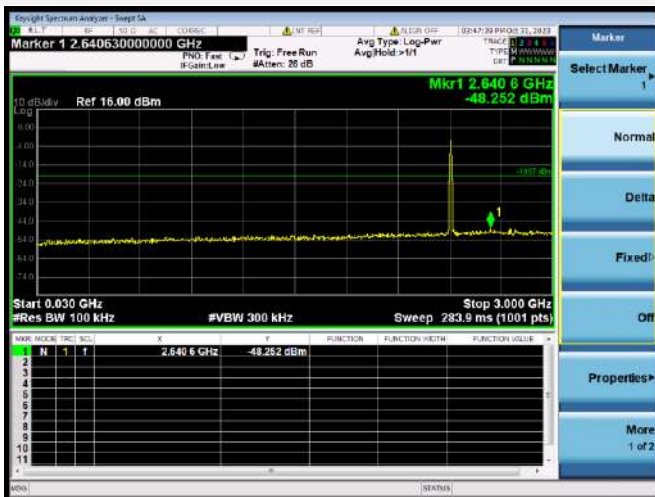

802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11b MIDDLE CHANNEL CARRIER LEVEL



Rohde & Schwarz Spectrum Analyzer - Sweep 5A
 2.807 GHz 100 kHz 16.00 dBm 100.00 dBm
 Marker 1 2.8069500000000 GHz
 PWR: Peak IF Gain: Low Trig: Free Run Avg/Hold: 26 dB
 Avg Type: Log-Pwr Avg/Hold: 1/1
 01/20/17 09:03:31, 2017
 TRACE 1 2.807 GHz
 TYPE: WVMWAVE Def: 0.150000
 Marker Select Marker
 Normal
 Delta
 Fixed
 Off
 Properties
 More 1 of 2
 10 dBmV Log
 Ref 16.00 dBm
 Mkr1 2.807 0 GHz -48.108 dBm
 Start 0.030 GHz Stop 3.000 GHz
 Res BW 100 kHz #VBW 300 kHz Sweep 283.9 ms (1001 pts)
 NAME MODEL FREQ SCF S F FUNCTION FUNCTION HEIGHT FUNCTION VALUE
 1 N 1 1 2.807 0 GHz -48.108 dBm
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 VOA STATUS

Thought Spectrum Analyzer - Sweep 5A
 100.000000 GHz 0.000000 dBm 0.000000 dBm
 Marker 1 21.0900000000000 GHz PWD: Fast Trig: Free Run Avg Type: Log-Pwr
 IF Gain: Low #Att: 26 dB Avg/Hold: >Ht

08/30/99 P003 31, 2073
 TRACE 1 2 3 4 5
 TYPE M W W W W W
 DEF 1 1 1 1 1 1 1

Peak Search
 Next Peak
 Next Pk Right
 Next Pk Left
 Marker Delta
 Mkr--CF
 Mkr--Ref Lvl
 More
 1 of 2

10 dBm
 -74 dBm
 Ref 16.00 dBm
 Mkr1 21.090 00 GHz
 -36.819 dBm
 -36.819 dBm
 Start 2.00 GHz Stop 25.00 GHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 2.198 s (4001 pts)

MARK	MODE	FREQ	SQL	dBm	FUNCTION	FUNCTION	HEATM	FUNCTION	CELLS
1	N	1	1	21.0900 GHz	-36.819 dBm				
2									
3									
4									
5									
6									
7									
8									
9									
10									
11									

VEO [STATUS]

The screenshot displays the Knight Spectrum Analyzer interface. At the top, the title bar reads "Knight Spectrum Analyzer - Sweep 5A". The main window is divided into several sections:

- Header Section:**
 - Marker 1 2.462500000000 GHz
 - Trig: Free Run
 - Avg Type: Log-Pwr
 - Span: 30.00 MHz
 - Resolution: 100 kHz
 - Sweep: 2.880 ms (601 pts)
- Plot Area:**
 - Y-axis: 10 dB/Div, Log
 - X-axis: Frequency (GHz)
 - Center: 2.46200 GHz
 - Span: 30.00 MHz
 - Resolution: 100 kHz
 - Sweep: 2.880 ms (601 pts)
 - Marker 1: 2.462 50 GHz, 0.071 dBm
- Table Section:**

Marker	Freq (GHz)	Power (dBm)	Function	Function Name	Function Value
1	2.462 50 GHz	0.071 dBm			
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					

Skyight Spectrum Analyzer - Sweep SA

File Edit View Settings Window Help

Marker 1 2.646570000000 GHz

PN0 Fee IF Gain Low

Trig: Free Run #Atten: 20 dB

Avg Type: Log-Pwr Avg Hold >10

0.05343 W (0.001 W)

Trace 2 2.646570000000 GHz

TYPE: A AMWave DEF: 2.646570000000 GHz

Marker

Select Marker 1

Normal

Delta

Fixed

Off

Properties

More 1 of 2

10 dB/div

Ref 15.00 dBm

Mkr1 2.646 GHz -48.701 dBm

Start 0.030 GHz

Stop 3.000 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 283.9 ms (1001 pts)

Marker	Index	Freq (GHz)	Amplitude (dBm)	Function	Function Width	Function Value
1	1	2.646 GHz	-48.701 dBm			
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						

VIEW STATUS

Keysight Spectrum Analyzer - Sweep SA

Auto Manual PNO: Fast Trig: Free Run Avg Type: Log-Pwr Peak Search

Marker 1 21.136000000000 GHz #VBW 300 kHz Sweep 2.198 s (4001 pts)


Mkr1 21.136 00 GHz -35.688 dBm

MARK INDEX	FRQ (GHz)	A	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	21.136 00	-35.688				

802.11g LOW CHANNEL CARRIER LEVEL



802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

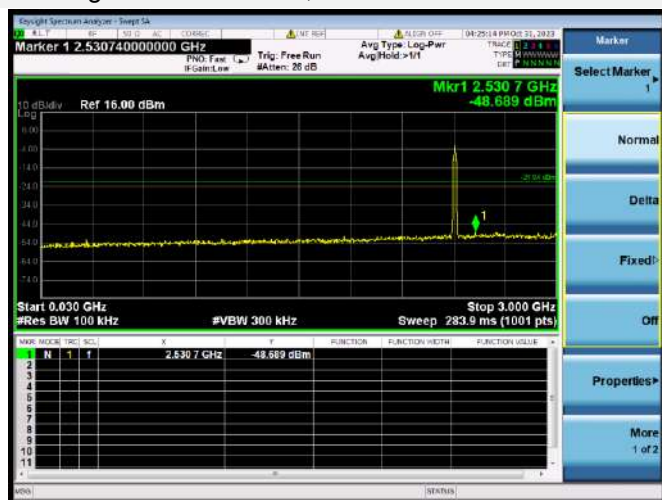


802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11g MIDDLE CHANNEL CARRIER LEVEL



802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

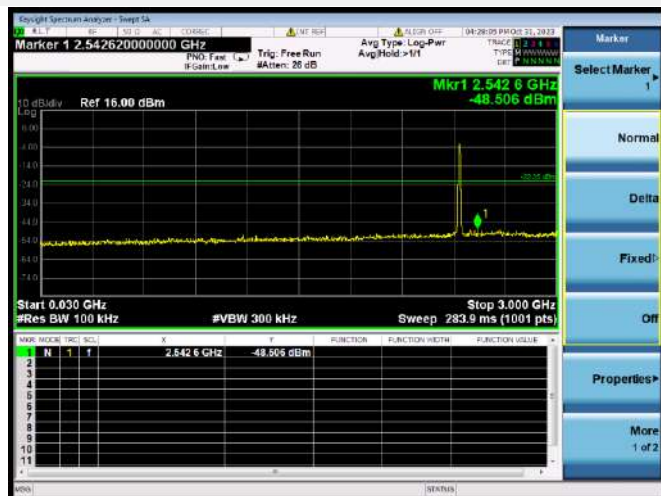


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

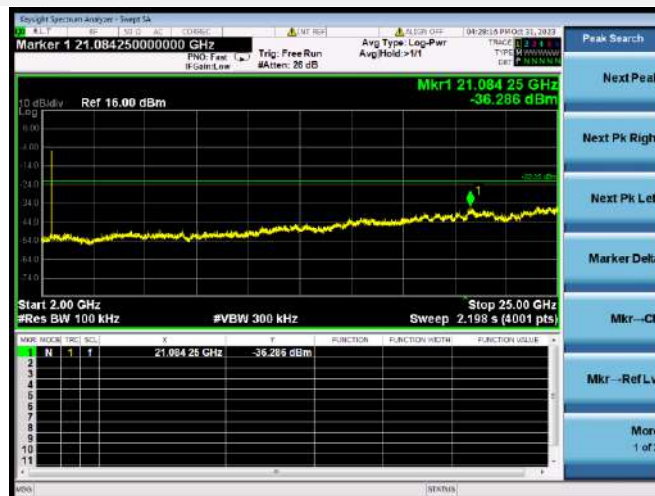

802.11g HIGH CHANNEL CARRIER LEVEL





802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

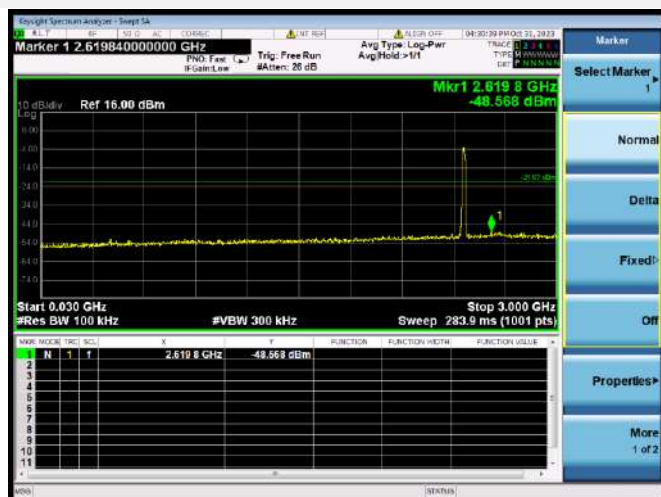

802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

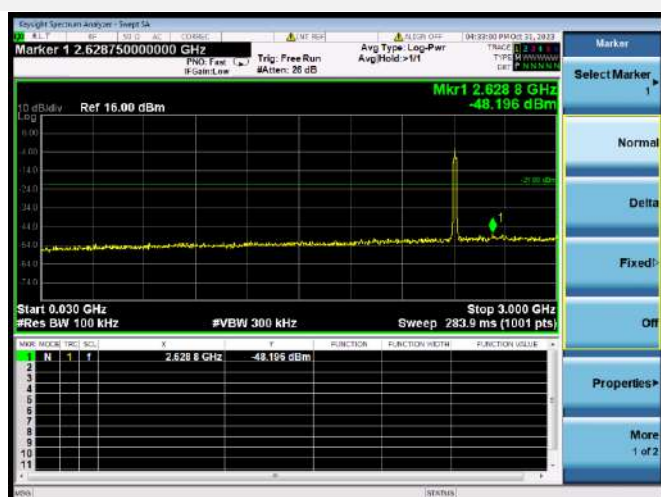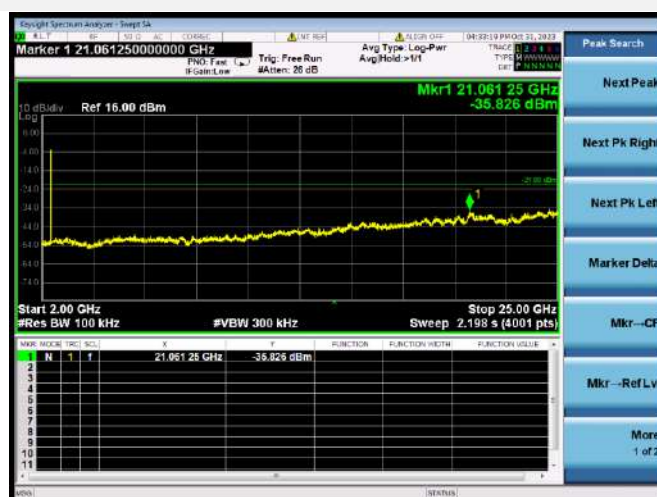802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz

802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL



802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

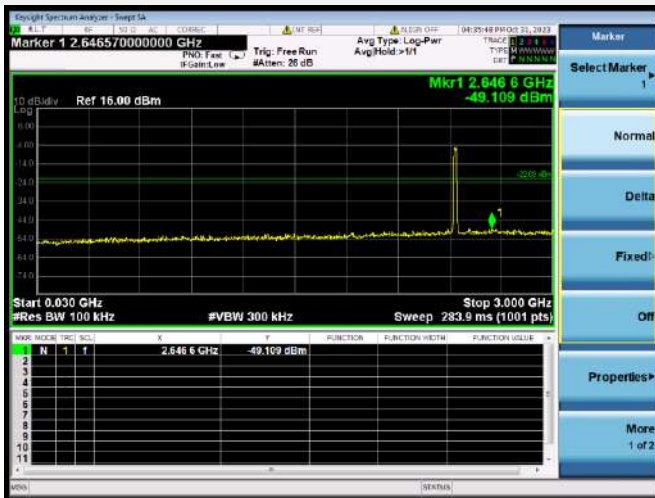


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

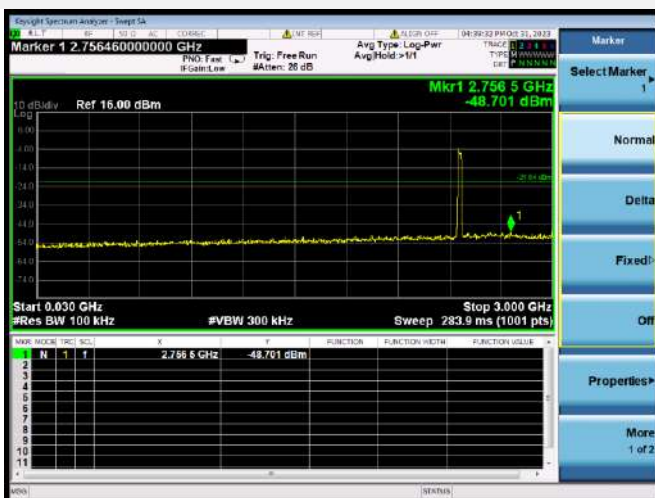

802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



A.4 Band Edge (Authorized-band band-edge)

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Test Data

ANT-12

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-38.04	8.90	-11.10	Pass
High Channel	-44.90	9.26	-10.74	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-29.69	4.91	-15.09	Pass
High Channel	-38.91	6.27	-13.73	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-31.90	4.47	-15.53	Pass
High Channel	-40.50	5.16	-14.85	Pass

ANT-14**802.11b Mode:**

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.03	0.03	-19.97	Pass
High Channel	-45.23	0.07	-19.93	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-42.75	-1.94	-21.94	Pass
High Channel	-46.08	-1.87	-21.87	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-42.19	-1.88	-21.88	Pass
High Channel	-46.09	-1.84	-21.84	Pass

Test Plots

ANT-12

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

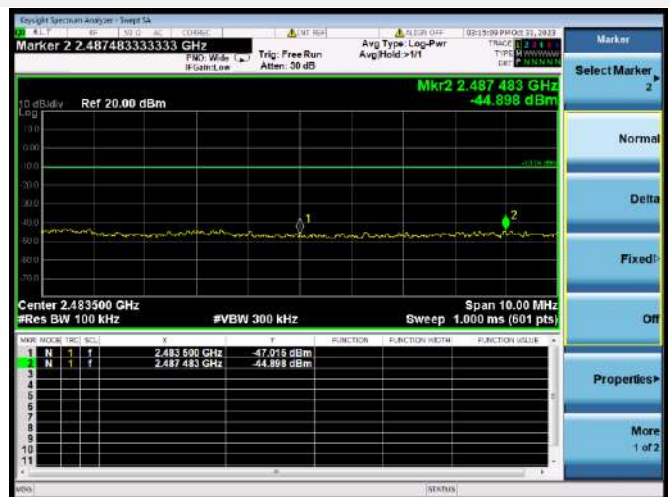


802.11g LOW CHANNEL, CARRIER LEVEL

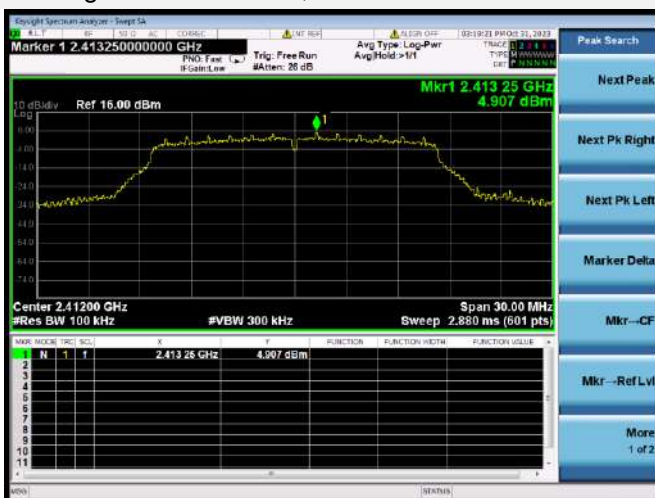

802.11g LOW CHANNEL, BAND EDGE




802.11g HIGH CHANNEL, CARRIER LEVEL

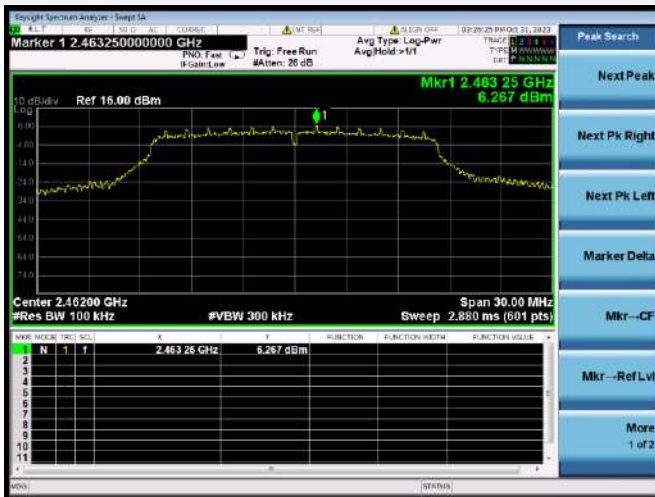

802.11g HIGH CHANNEL, BAND EDGE




802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

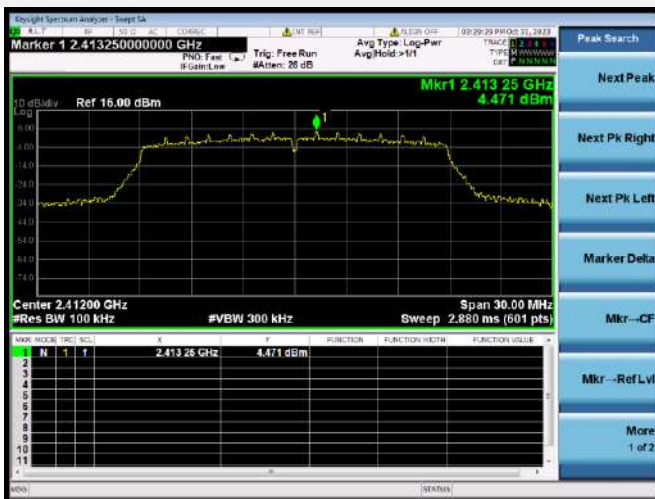


802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

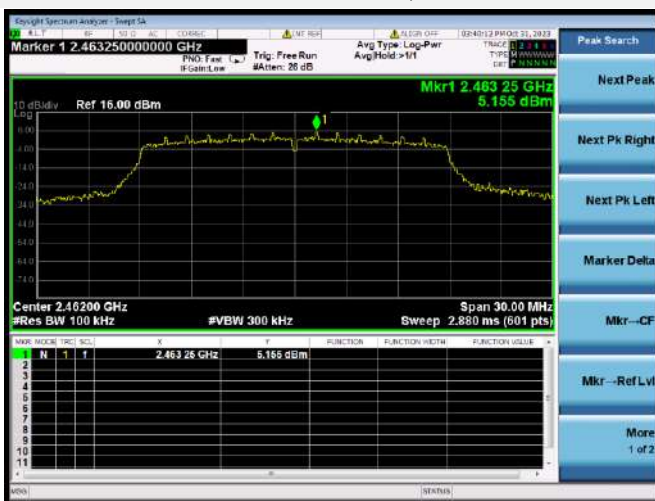

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

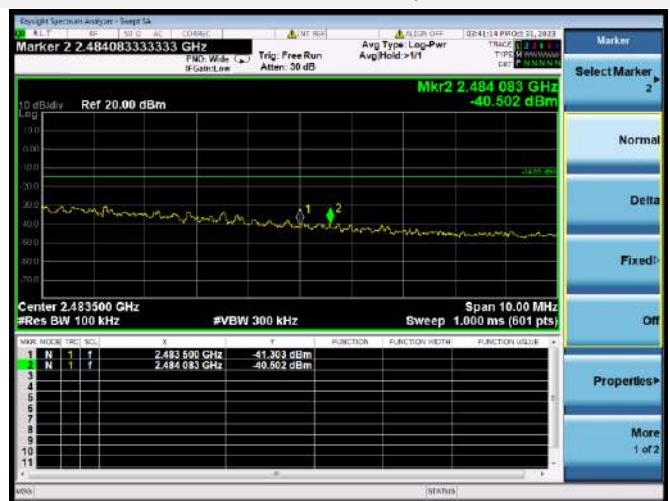

ANT-14

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

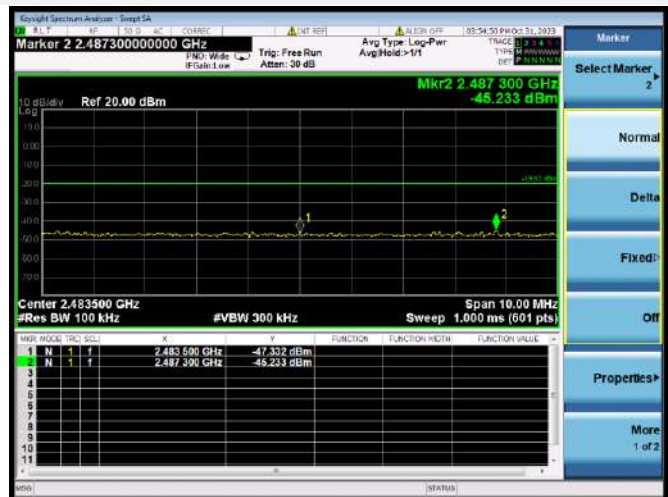


802.11g LOW CHANNEL, CARRIER LEVEL

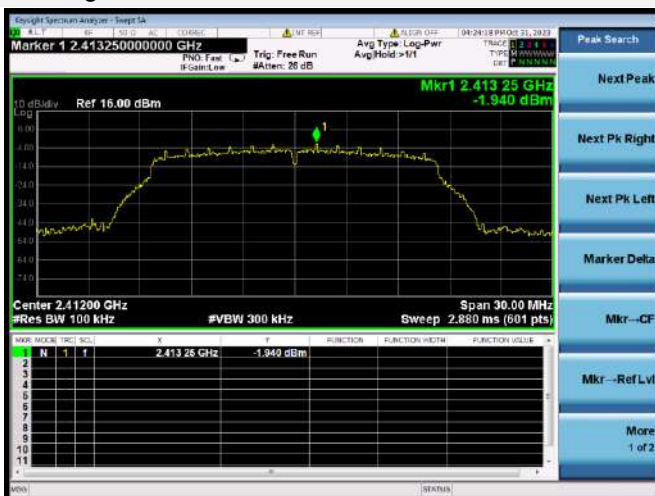


802.11g LOW CHANNEL, BAND EDGE



802.11g HIGH CHANNEL, CARRIER LEVEL

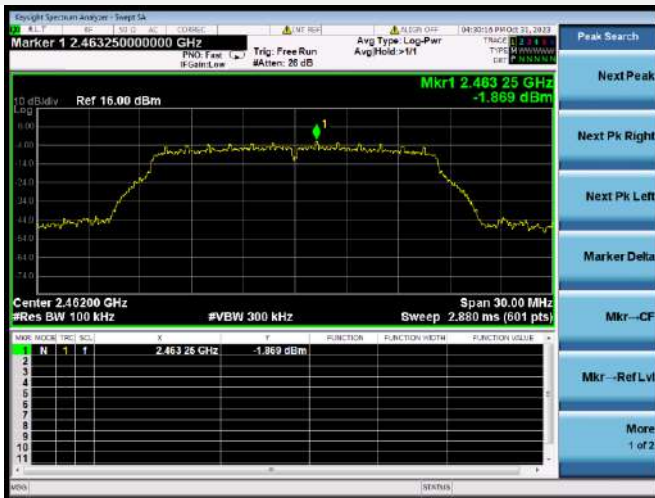

802.11g HIGH CHANNEL, BAND EDGE

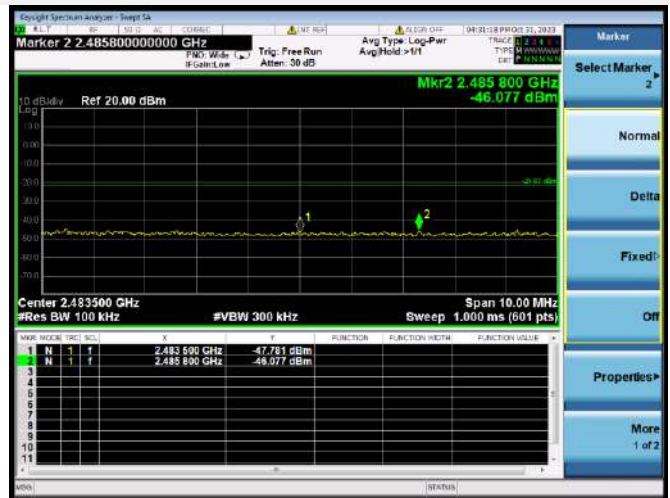

802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL




802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, BAND EDGE

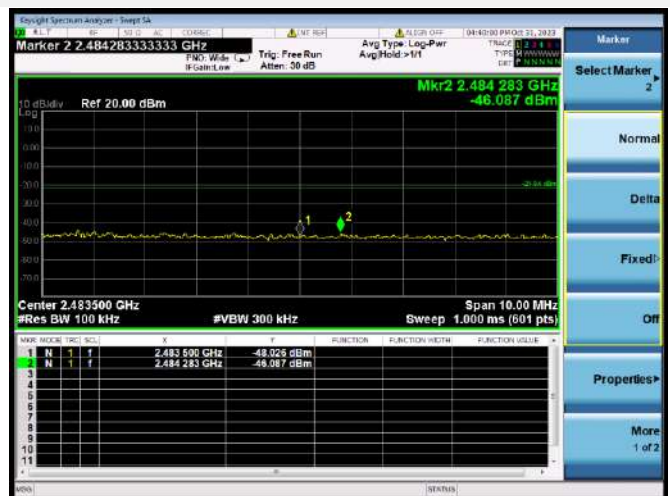

A.5 Conducted Emissions


Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

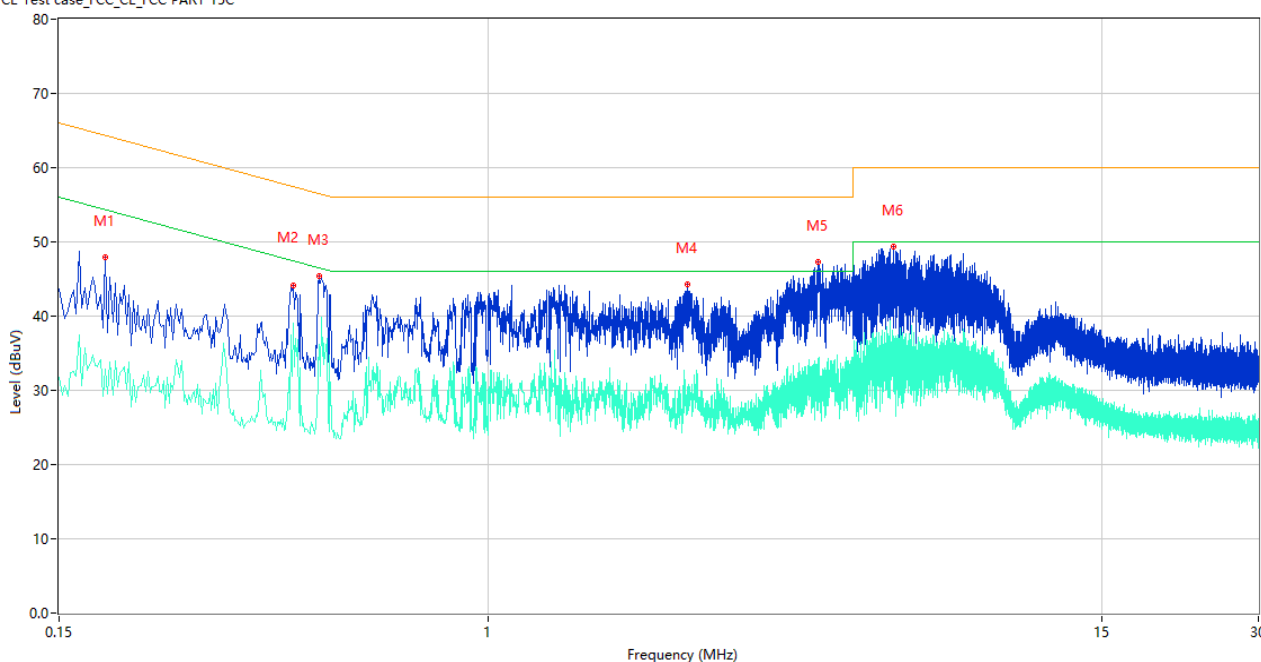

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.184	47.90	9.78	64.30	16.40	Peak	L	Pass
1**	0.184	32.87	9.78	54.30	21.43	AV	L	Pass
2	0.422	44.18	10.32	57.41	13.23	Peak	L	Pass
2**	0.422	39.12	10.32	47.41	8.29	AV	L	Pass
3	0.474	45.35	10.00	56.44	11.09	Peak	L	Pass
3**	0.474	36.16	10.00	46.44	10.28	AV	L	Pass
4	2.414	44.26	10.26	56.00	11.74	Peak	L	Pass
4**	2.414	28.62	10.26	46.00	17.38	AV	L	Pass
5	4.292	47.29	10.42	56.00	8.71	Peak	L	Pass
5**	4.292	34.32	10.42	46.00	11.68	AV	L	Pass
6	5.976	49.35	10.32	60.00	10.65	Peak	L	Pass
6**	5.976	36.47	10.32	50.00	13.53	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

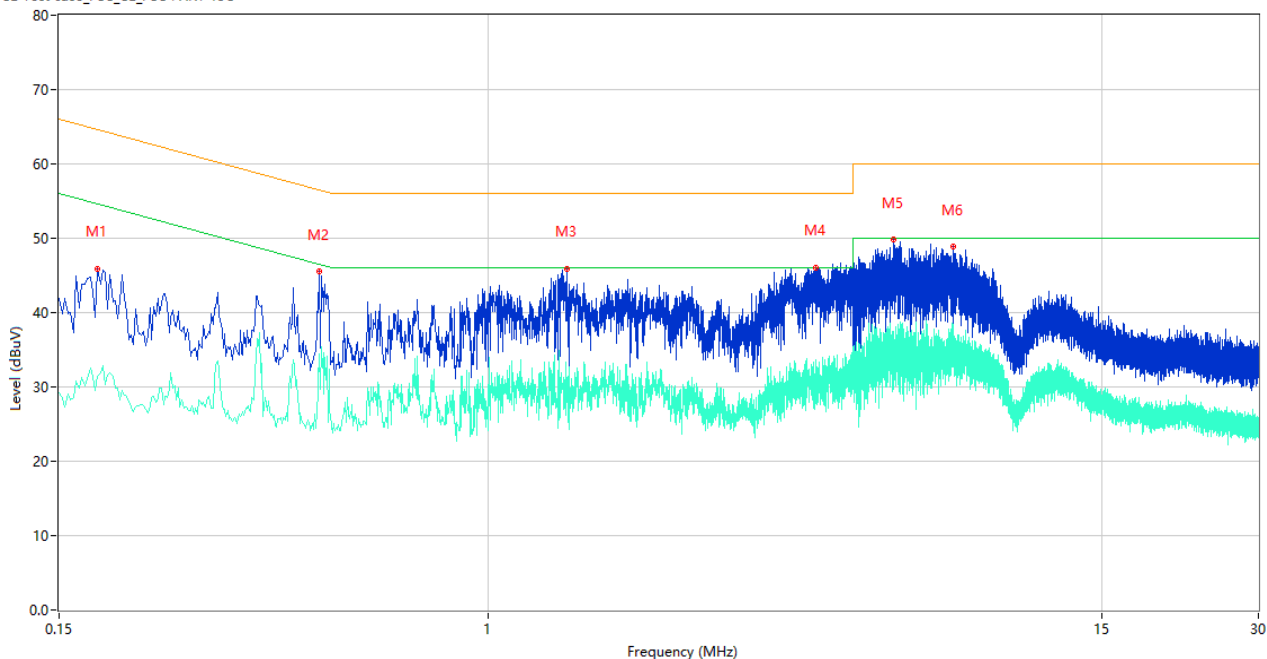

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.178	45.89	9.78	64.58	18.69	Peak	N	Pass
1**	0.178	31.43	9.78	54.58	23.15	AV	N	Pass
2	0.474	45.48	10.00	56.44	10.96	Peak	N	Pass
2**	0.474	34.51	10.00	46.44	11.93	AV	N	Pass
3	1.414	45.89	9.83	56.00	10.11	Peak	N	Pass
3**	1.414	31.32	9.83	46.00	14.68	AV	N	Pass
4	4.244	46.04	9.84	56.00	9.96	Peak	N	Pass
4**	4.244	33.60	9.84	46.00	12.40	AV	N	Pass
5	5.972	49.78	10.31	60.00	10.22	Peak	N	Pass
5**	5.972	35.83	10.31	50.00	14.17	AV	N	Pass
6	7.778	48.84	10.38	60.00	11.16	Peak	N	Pass
6**	7.778	38.39	10.38	50.00	11.61	AV	N	Pass

A.6 Radiated Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

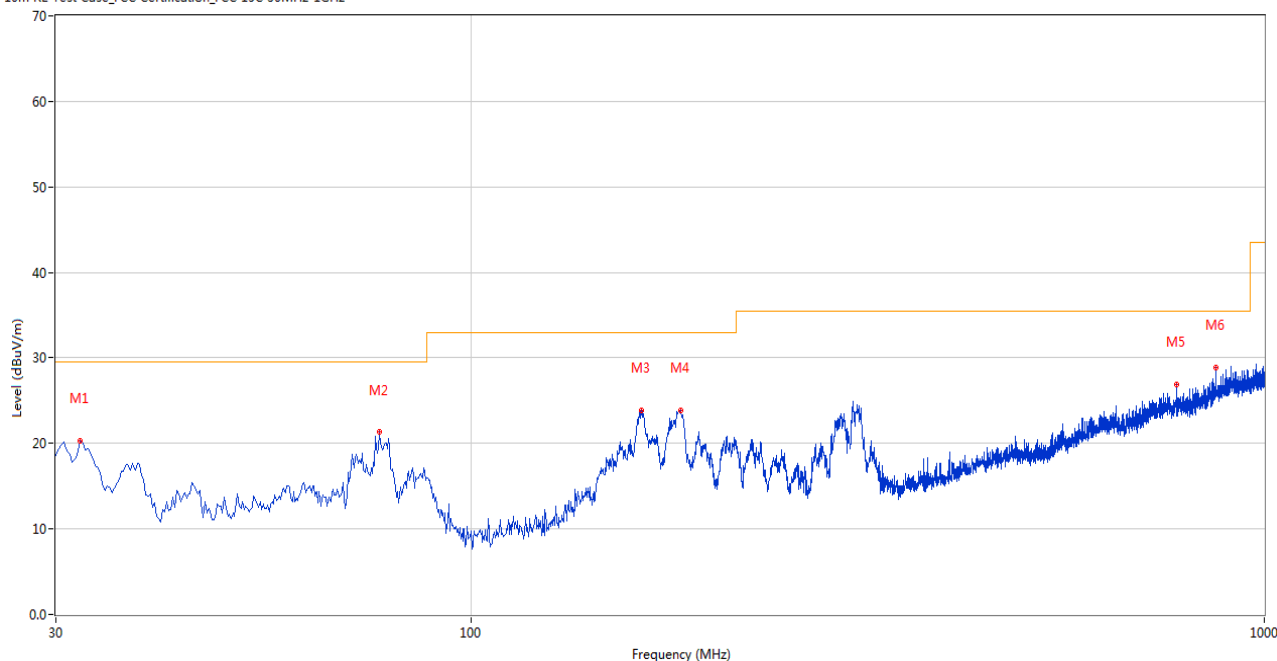

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.182	20.36	-27.57	29.5	9.14	Peak	131.00	100	Vertical	Pass
2	76.791	21.29	-29.63	29.5	8.21	Peak	226.00	200	Vertical	Pass
3	164.069	23.89	-26.05	33.0	9.11	Peak	255.00	100	Vertical	Pass
4	183.707	23.89	-27.63	33.0	9.11	Peak	230.00	100	Vertical	Pass
5	774.531	26.93	-13.06	35.5	8.57	Peak	199.00	200	Vertical	Pass
6	868.355	28.84	-11.36	35.5	6.66	Peak	161.00	200	Vertical	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

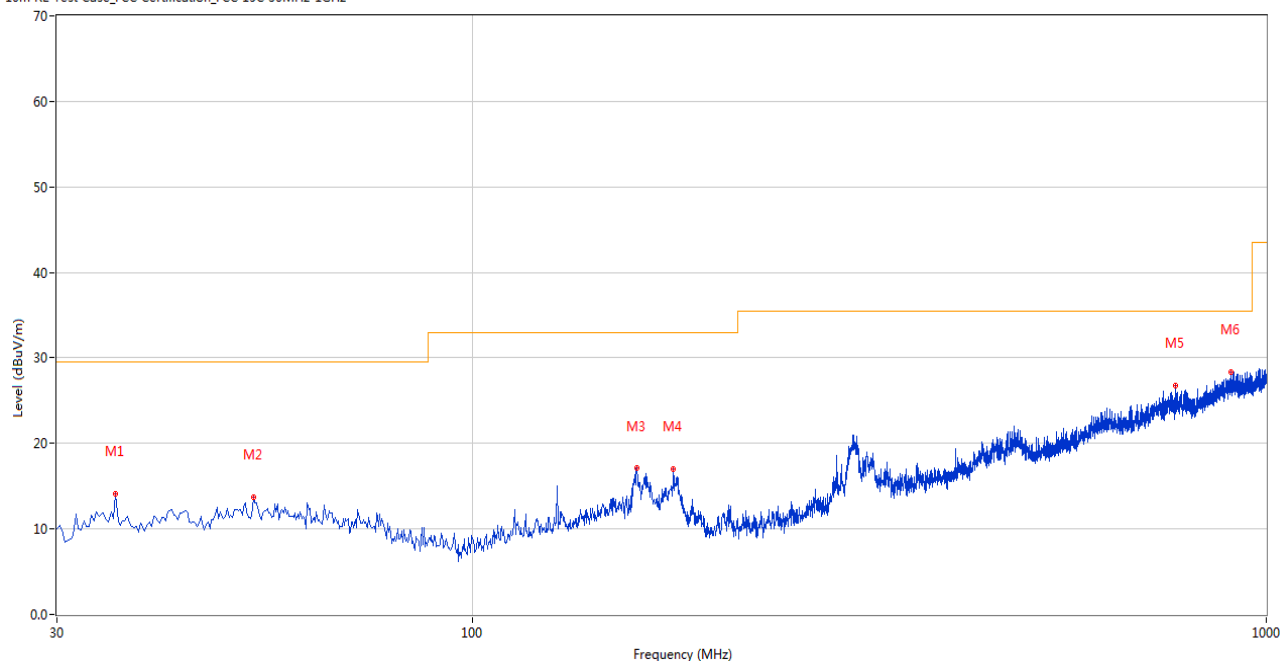

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.576	14.06	-26.70	29.5	15.44	Peak	347.00	100	Horizontal	Pass
2	53.032	13.67	-26.15	29.5	15.83	Peak	360.00	100	Horizontal	Pass
3	161.160	17.07	-25.77	33.0	15.93	Peak	273.00	200	Horizontal	Pass
4	179.343	16.99	-27.21	33.0	16.01	Peak	254.00	200	Horizontal	Pass
5	767.743	26.73	-13.34	35.5	8.77	Peak	0.00	200	Horizontal	Pass
6	902.782	28.32	-10.75	35.5	7.18	Peak	152.00	100	Horizontal	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

ANT-14

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1563.000	41.24	-17.65	74.0	32.76	Peak	154.00	400	Horizontal	Pass
1**	1563.000	31.73	-17.65	54.0	22.27	AV	154.00	400	Horizontal	Pass
2	2410.400	104.87	-13.14	74.0	-30.87	Peak	276.00	150	Horizontal	N/A
2**	2410.400	101.94	-13.14	54.0	-47.94	AV	276.00	150	Horizontal	N/A
3	2996.400	50.32	-10.13	74.0	23.68	Peak	184.00	150	Horizontal	Pass
3**	2996.400	41.52	-10.13	54.0	12.48	AV	184.00	150	Horizontal	Pass
4	4824.200	53.54	-3.66	74.0	20.46	Peak	205.00	150	Horizontal	Pass
4***	4824.200	50.322	-3.66	54.0	3.678	AV	205.00	150	Horizontal	Pass
5	6959.000	52.44	-0.53	74.0	21.56	Peak	74.00	200	Horizontal	Pass
5**	6959.000	42.97	-0.53	54.0	11.03	AV	74.00	200	Horizontal	Pass
6	16096.874	54.10	6.89	74.0	19.90	Peak	235.00	150	Horizontal	Pass
6**	16096.874	46.52	6.89	54.0	7.48	AV	235.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1560.300	42.08	-17.62	74.0	31.92	Peak	19.00	300	Vertical	Pass
1**	1560.300	32.49	-17.62	54.0	21.51	AV	19.00	300	Vertical	Pass
2	2410.800	94.03	-13.12	74.0	-20.03	Peak	0.00	150	Vertical	N/A
2**	2410.800	91.09	-13.12	54.0	-37.09	AV	0.00	150	Vertical	N/A
3	2952.200	50.23	-10.27	74.0	23.77	Peak	180.00	150	Vertical	Pass
3**	2952.200	41.37	-10.27	54.0	12.63	AV	180.00	150	Vertical	Pass
4	4824.000	48.63	-3.66	74.0	25.37	Peak	128.00	150	Vertical	Pass
4**	4824.000	43.83	-3.66	54.0	10.17	AV	128.00	150	Vertical	Pass
5	6984.000	52.76	-0.48	74.0	21.24	Peak	150.00	200	Vertical	Pass
5**	6984.000	44.42	-0.48	54.0	9.58	AV	150.00	200	Vertical	Pass
6	13308.862	51.64	2.29	74.0	22.36	Peak	241.00	150	Vertical	Pass
6**	13308.862	41.22	2.29	54.0	12.78	AV	241.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1521.300	41.29	-17.68	74.0	32.71	Peak	74.00	100	Horizontal	Pass
1**	1521.300	31.86	-17.68	54.0	22.14	AV	74.00	100	Horizontal	Pass
2	2435.800	105.15	-12.44	74.0	-31.15	Peak	255.00	150	Horizontal	N/A
2**	2435.800	102.22	-12.44	54.0	-48.22	AV	255.00	150	Horizontal	N/A
3	2971.900	51.08	-10.55	74.0	22.92	Peak	99.00	200	Horizontal	Pass
3**	2971.900	40.96	-10.55	54.0	13.04	AV	99.00	200	Horizontal	Pass
4	4874.200	52.48	-3.63	74.0	21.52	Peak	213.00	200	Horizontal	Pass
4**	4874.200	48.92	-3.63	54.0	5.08	AV	213.00	200	Horizontal	Pass
5	6884.400	53.45	-0.59	74.0	20.55	Peak	178.00	100	Horizontal	Pass
5**	6884.400	42.70	-0.59	54.0	11.30	AV	178.00	100	Horizontal	Pass
6	17303.325	55.57	6.50	74.0	18.43	Peak	142.00	200	Horizontal	Pass
6**	17303.325	45.78	6.50	54.0	8.22	AV	142.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1502.800	42.21	-17.72	74.0	31.79	Peak	248.00	200	Vertical	Pass
1**	1502.800	32.00	-17.72	54.0	22.00	AV	248.00	200	Vertical	Pass
2	2435.900	94.47	-12.44	74.0	-20.47	Peak	41.00	100	Vertical	N/A
2**	2435.900	91.56	-12.44	54.0	-37.56	AV	41.00	100	Vertical	N/A
3	2987.400	50.38	-10.14	74.0	23.62	Peak	58.00	150	Vertical	Pass
3**	2987.400	41.62	-10.14	54.0	12.38	AV	58.00	150	Vertical	Pass
4	4874.200	48.19	-3.63	74.0	25.81	Peak	4.00	150	Vertical	Pass
4**	4874.200	43.34	-3.63	54.0	10.66	AV	4.00	150	Vertical	Pass
5	6952.600	52.51	-0.53	74.0	21.49	Peak	47.00	300	Vertical	Pass
5**	6952.600	43.39	-0.53	54.0	10.61	AV	47.00	300	Vertical	Pass
6	16058.025	55.02	6.77	74.0	18.98	Peak	176.00	300	Vertical	Pass
6**	16058.025	44.88	6.77	54.0	9.12	AV	176.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1647.400	41.71	-17.77	74.0	32.29	Peak	116.00	200	Horizontal	Pass
1**	1647.400	31.88	-17.77	54.0	22.12	AV	116.00	200	Horizontal	Pass
2	2463.100	105.10	-13.03	74.0	-31.10	Peak	271.00	200	Horizontal	N/A
2**	2463.100	102.27	-13.03	54.0	-48.27	AV	271.00	200	Horizontal	N/A
3	2738.300	49.85	-10.71	74.0	24.15	Peak	323.00	150	Horizontal	Pass
3**	2738.300	40.23	-10.71	54.0	13.77	AV	323.00	150	Horizontal	Pass
4	4924.000	53.72	-3.83	74.0	20.28	Peak	181.00	150	Horizontal	Pass
4**	4924.000	50.14	-3.83	54.0	3.86	AV	181.00	150	Horizontal	Pass
5	6900.400	52.72	-0.42	74.0	21.28	Peak	353.00	200	Horizontal	Pass
5**	6900.400	42.94	-0.42	54.0	11.06	AV	353.00	200	Horizontal	Pass
6	17294.137	55.29	6.51	74.0	18.71	Peak	199.00	400	Horizontal	Pass
6**	17294.137	46.03	6.51	54.0	7.97	AV	199.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1633.100	41.35	-17.71	74.0	32.65	Peak	96.00	400	Vertical	Pass
1**	1633.100	32.73	-17.71	54.0	21.27	AV	96.00	400	Vertical	Pass
2	2463.100	92.44	-13.03	74.0	-18.44	Peak	184.00	150	Vertical	N/A
2**	2463.100	89.57	-13.03	54.0	-35.57	AV	184.00	150	Vertical	N/A
3	2983.400	51.27	-10.23	74.0	22.73	Peak	71.00	200	Vertical	Pass
3**	2983.400	41.04	-10.23	54.0	12.96	AV	71.00	200	Vertical	Pass
4	4924.000	48.66	-3.83	74.0	25.34	Peak	316.00	100	Vertical	Pass
4**	4924.000	44.83	-3.83	54.0	9.17	AV	316.00	100	Vertical	Pass
5	6997.600	52.64	-0.46	74.0	21.36	Peak	61.00	400	Vertical	Pass
5**	6997.600	43.33	-0.46	54.0	10.67	AV	61.00	400	Vertical	Pass
6	16057.500	55.08	6.76	74.0	18.92	Peak	233.00	100	Vertical	Pass
6**	16057.500	45.65	6.76	54.0	8.35	AV	233.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1571.100	41.72	-17.59	74.0	32.28	Peak	197.00	200	Horizontal	Pass
1**	1571.100	31.37	-17.59	54.0	22.63	AV	197.00	200	Horizontal	Pass
2	2413.000	107.30	-13.08	74.0	-33.30	Peak	278.00	150	Horizontal	N/A
2**	2413.000	100.02	-13.08	54.0	-46.02	AV	278.00	150	Horizontal	N/A
3	2980.700	50.25	-10.28	74.0	23.75	Peak	249.00	100	Horizontal	Pass
3**	2980.700	41.55	-10.28	54.0	12.45	AV	249.00	100	Horizontal	Pass
4	4852.400	49.25	-3.51	74.0	24.75	Peak	252.00	400	Horizontal	Pass
4**	4852.400	40.65	-3.51	54.0	13.35	AV	252.00	400	Horizontal	Pass
5	6958.200	52.68	-0.55	74.0	21.32	Peak	252.00	200	Horizontal	Pass
5**	6958.200	43.24	-0.55	54.0	10.76	AV	252.00	200	Horizontal	Pass
6	15999.750	55.49	6.44	74.0	18.51	Peak	142.00	100	Horizontal	Pass
6**	15999.750	45.53	6.44	54.0	8.47	AV	142.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1658.600	42.08	-17.51	74.0	31.92	Peak	249.00	300	Vertical	Pass
1**	1658.600	32.66	-17.51	54.0	21.34	AV	249.00	300	Vertical	Pass
2	2415.100	95.05	-12.99	74.0	-21.05	Peak	20.00	100	Vertical	N/A
2**	2415.100	87.81	-12.99	54.0	-33.81	AV	20.00	100	Vertical	N/A
3	2986.800	50.71	-10.14	74.0	23.29	Peak	262.00	100	Vertical	Pass
3**	2986.800	41.96	-10.14	54.0	12.04	AV	262.00	100	Vertical	Pass
4	4785.400	49.32	-3.67	74.0	24.68	Peak	0.00	150	Vertical	Pass
4**	4785.400	39.52	-3.67	54.0	14.48	AV	0.00	150	Vertical	Pass
5	7229.712	52.59	-2.09	74.0	21.41	Peak	58.00	300	Vertical	Pass
5**	7229.712	38.08	-2.09	54.0	15.92	AV	58.00	300	Vertical	Pass
6	16067.213	55.23	6.86	74.0	18.77	Peak	223.00	300	Vertical	Pass
6**	16067.213	45.73	6.86	54.0	8.27	AV	223.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1664.400	41.15	-17.38	74.0	32.85	Peak	21.00	200	Horizontal	Pass
1**	1664.400	31.50	-17.38	54.0	22.50	AV	21.00	200	Horizontal	Pass
2	2432.500	106.87	-12.48	74.0	-32.87	Peak	220.00	200	Horizontal	N/A
2**	2432.500	98.80	-12.48	54.0	-44.80	AV	220.00	200	Horizontal	N/A
3	2894.700	50.67	-9.89	74.0	23.33	Peak	8.00	150	Horizontal	Pass
3**	2894.700	40.63	-9.89	54.0	13.37	AV	8.00	150	Horizontal	Pass
4	4931.000	49.52	-3.85	74.0	24.48	Peak	359.00	400	Horizontal	Pass
4**	4931.000	39.61	-3.85	54.0	14.39	AV	359.00	400	Horizontal	Pass
5	6966.600	52.76	-0.49	74.0	21.24	Peak	18.00	100	Horizontal	Pass
5**	6966.600	43.84	-0.49	54.0	10.16	AV	18.00	100	Horizontal	Pass
6	17235.864	54.92	6.19	74.0	19.08	Peak	304.00	200	Horizontal	Pass
6**	17235.864	45.15	6.19	54.0	8.85	AV	304.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1693.600	42.13	-17.73	74.0	31.87	Peak	350.00	300	Vertical	Pass
1**	1693.600	32.56	-17.73	54.0	21.44	AV	350.00	300	Vertical	Pass
2	2438.100	96.57	-12.38	74.0	-22.57	Peak	44.00	200	Vertical	N/A
2**	2438.100	88.58	-12.38	54.0	-34.58	AV	44.00	200	Vertical	N/A
3	2962.900	51.48	-10.40	74.0	22.52	Peak	193.00	150	Vertical	Pass
3**	2962.900	41.95	-10.40	54.0	12.05	AV	193.00	150	Vertical	Pass
4	4883.800	49.34	-3.62	74.0	24.66	Peak	52.00	200	Vertical	Pass
4**	4883.800	40.51	-3.62	54.0	13.49	AV	52.00	200	Vertical	Pass
5	7315.675	51.75	-2.72	74.0	22.25	Peak	96.00	100	Vertical	Pass
5**	7315.675	37.75	-2.72	54.0	16.25	AV	96.00	100	Vertical	Pass
6	17242.161	54.74	6.20	74.0	19.26	Peak	324.00	200	Vertical	Pass
6**	17242.161	45.41	6.20	54.0	8.59	AV	324.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1578.900	41.34	-17.52	74.0	32.66	Peak	177.00	200	Horizontal	Pass
1**	1578.900	32.78	-17.52	54.0	21.22	AV	177.00	200	Horizontal	Pass
2	2463.200	107.71	-13.03	74.0	-33.71	Peak	283.00	200	Horizontal	N/A
2**	2463.200	100.42	-13.03	54.0	-46.42	AV	283.00	200	Horizontal	N/A
3	2986.100	50.23	-10.14	74.0	23.77	Peak	317.00	150	Horizontal	Pass
3**	2986.100	41.21	-10.14	54.0	12.79	AV	317.00	150	Horizontal	Pass
4	4987.400	49.61	-3.77	74.0	24.39	Peak	235.00	300	Horizontal	Pass
4**	4987.400	39.49	-3.77	54.0	14.51	AV	235.00	300	Horizontal	Pass
5	6941.800	53.10	-0.39	74.0	20.90	Peak	213.00	400	Horizontal	Pass
5**	6941.800	43.07	-0.39	54.0	10.93	AV	213.00	400	Horizontal	Pass
6	17299.386	55.00	6.55	74.0	19.00	Peak	211.00	300	Horizontal	Pass
6**	17299.386	46.24	6.55	54.0	7.76	AV	211.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1559.800	41.50	-17.61	74.0	32.50	Peak	53.00	400	Vertical	Pass
1**	1559.800	31.91	-17.61	54.0	22.09	AV	53.00	400	Vertical	Pass
2	2460.900	92.80	-13.14	74.0	-18.80	Peak	347.00	100	Vertical	N/A
2**	2460.900	85.32	-13.14	54.0	-31.32	AV	347.00	100	Vertical	N/A
3	2966.300	50.65	-10.52	74.0	23.35	Peak	347.00	150	Vertical	Pass
3**	2966.300	40.79	-10.52	54.0	13.21	AV	347.00	150	Vertical	Pass
4	4828.000	50.35	-3.65	74.0	23.65	Peak	55.00	200	Vertical	Pass
4**	4828.000	39.39	-3.65	54.0	14.61	AV	55.00	200	Vertical	Pass
5	6857.600	52.23	-1.11	74.0	21.77	Peak	326.00	200	Vertical	Pass
5**	6857.600	42.54	-1.11	54.0	11.46	AV	326.00	200	Vertical	Pass
6	17299.913	55.59	6.55	74.0	18.41	Peak	175.00	100	Vertical	Pass
6**	17299.913	46.73	6.55	54.0	7.27	AV	175.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1671.900	41.89	-17.47	74.0	32.11	Peak	110.00	300	Horizontal	Pass
1**	1671.900	31.88	-17.47	54.0	22.12	AV	110.00	300	Horizontal	Pass
2	2413.200	106.76	-13.08	74.0	-32.76	Peak	225.00	200	Horizontal	N/A
2**	2413.200	99.64	-13.08	54.0	-45.64	AV	225.00	200	Horizontal	N/A
3	2982.200	50.45	-10.26	74.0	23.55	Peak	174.00	200	Horizontal	Pass
3**	2982.200	41.68	-10.26	54.0	12.32	AV	174.00	200	Horizontal	Pass
4	4885.600	49.11	-3.64	74.0	24.89	Peak	47.00	100	Horizontal	Pass
4**	4885.600	40.03	-3.64	54.0	13.97	AV	47.00	100	Horizontal	Pass
5	7238.625	52.74	-2.18	74.0	21.26	Peak	155.00	200	Horizontal	Pass
5**	7238.625	38.70	-2.18	54.0	15.30	AV	155.00	200	Horizontal	Pass
6	16012.088	55.62	6.50	74.0	18.38	Peak	196.00	200	Horizontal	Pass
6**	16012.088	44.69	6.50	54.0	9.31	AV	196.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1662.800	41.92	-17.38	74.0	32.08	Peak	190.00	400	Vertical	Pass
1**	1662.800	32.83	-17.38	54.0	21.17	AV	190.00	400	Vertical	Pass
2	2414.700	95.02	-13.03	74.0	-21.02	Peak	15.00	150	Vertical	N/A
2**	2414.700	87.95	-13.03	54.0	-33.95	AV	15.00	150	Vertical	N/A
3	2963.200	50.32	-10.42	74.0	23.68	Peak	6.00	200	Vertical	Pass
3**	2963.200	40.94	-10.42	54.0	13.06	AV	6.00	200	Vertical	Pass
4	4970.200	49.27	-3.91	74.0	24.73	Peak	107.00	100	Vertical	Pass
4**	4970.200	40.03	-3.91	54.0	13.97	AV	107.00	100	Vertical	Pass
5	6979.600	52.42	-0.44	74.0	21.58	Peak	261.00	300	Vertical	Pass
5**	6979.600	43.61	-0.44	54.0	10.39	AV	261.00	300	Vertical	Pass
6	17315.926	55.21	6.29	74.0	18.79	Peak	315.00	200	Vertical	Pass
6**	17315.926	44.66	6.29	54.0	9.34	AV	315.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1675.500	41.59	-17.54	74.0	32.41	Peak	190.00	200	Horizontal	Pass
1**	1675.500	33.05	-17.54	54.0	20.95	AV	190.00	200	Horizontal	Pass
2	2438.100	106.90	-12.38	74.0	-32.90	Peak	261.00	100	Horizontal	N/A
2**	2438.100	99.68	-12.38	54.0	-45.68	AV	261.00	100	Horizontal	N/A
3	2979.100	49.89	-10.29	74.0	24.11	Peak	9.00	150	Horizontal	Pass
3**	2979.100	41.09	-10.29	54.0	12.91	AV	9.00	150	Horizontal	Pass
4	4852.600	49.78	-3.51	74.0	24.22	Peak	169.00	300	Horizontal	Pass
4**	4852.600	39.60	-3.51	54.0	14.40	AV	169.00	300	Horizontal	Pass
5	7311.938	48.95	-2.68	74.0	25.05	Peak	267.00	150	Horizontal	Pass
5**	7311.938	37.48	-2.68	54.0	16.52	AV	267.00	150	Horizontal	Pass
6	17264.212	55.11	6.31	74.0	18.89	Peak	360.00	200	Horizontal	Pass
6**	17264.212	45.79	6.31	54.0	8.21	AV	360.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.600	40.96	-17.74	74.0	33.04	Peak	101.00	400	Vertical	Pass
1**	1600.600	31.40	-17.74	54.0	22.60	AV	101.00	400	Vertical	Pass
2	2431.400	95.40	-12.50	74.0	-21.40	Peak	22.00	100	Vertical	N/A
2**	2431.400	87.67	-12.50	54.0	-33.67	AV	22.00	100	Vertical	N/A
3	2948.100	50.64	-10.41	74.0	23.36	Peak	194.00	200	Vertical	Pass
3**	2948.100	40.80	-10.41	54.0	13.20	AV	194.00	200	Vertical	Pass
4	4893.200	48.97	-3.64	74.0	25.03	Peak	178.00	300	Vertical	Pass
4**	4893.200	40.23	-3.64	54.0	13.77	AV	178.00	300	Vertical	Pass
5	6918.200	52.93	-0.24	74.0	21.07	Peak	279.00	100	Vertical	Pass
5**	6918.200	43.69	-0.24	54.0	10.31	AV	279.00	100	Vertical	Pass
6	11652.901	51.27	2.54	74.0	22.73	Peak	181.00	150	Vertical	Pass
6**	11652.901	42.40	2.54	54.0	11.60	AV	181.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1587.600	41.24	-17.62	74.0	32.76	Peak	360.00	400	Horizontal	Pass
1**	1587.600	31.33	-17.62	54.0	22.67	AV	360.00	400	Horizontal	Pass
2	2464.000	107.55	-13.04	74.0	-33.55	Peak	262.00	200	Horizontal	N/A
2**	2464.000	99.56	-13.04	54.0	-45.56	AV	262.00	200	Horizontal	N/A
3	2722.900	50.04	-10.90	74.0	23.96	Peak	85.00	150	Horizontal	Pass
3**	2722.900	39.53	-10.90	54.0	14.47	AV	85.00	150	Horizontal	Pass
4	4975.800	49.25	-3.89	74.0	24.75	Peak	258.00	100	Horizontal	Pass
4**	4975.800	40.31	-3.89	54.0	13.69	AV	258.00	100	Horizontal	Pass
5	6948.000	52.74	-0.43	74.0	21.26	Peak	4.00	300	Horizontal	Pass
5**	6948.000	43.45	-0.43	54.0	10.55	AV	4.00	300	Horizontal	Pass
6	16096.349	55.06	6.89	74.0	18.94	Peak	261.00	200	Horizontal	Pass
6**	16096.349	46.44	6.89	54.0	7.56	AV	261.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1681.700	41.31	-17.64	74.0	32.69	Peak	8.00	100	Vertical	Pass
1**	1681.700	33.18	-17.64	54.0	20.82	AV	8.00	100	Vertical	Pass
2	2460.400	93.99	-13.16	74.0	-19.99	Peak	68.00	200	Vertical	N/A
2**	2460.400	86.55	-13.16	54.0	-32.55	AV	68.00	200	Vertical	N/A
3	2950.900	49.92	-10.28	74.0	24.08	Peak	335.00	100	Vertical	Pass
3**	2950.900	40.62	-10.28	54.0	13.38	AV	335.00	100	Vertical	Pass
4	4946.200	49.31	-3.87	74.0	24.69	Peak	156.00	100	Vertical	Pass
4**	4946.200	39.59	-3.87	54.0	14.41	AV	156.00	100	Vertical	Pass
5	6912.800	53.03	-0.28	74.0	20.97	Peak	127.00	400	Vertical	Pass
5**	6912.800	43.32	-0.28	54.0	10.68	AV	127.00	400	Vertical	Pass
6	16070.100	54.76	6.88	74.0	19.24	Peak	146.00	200	Vertical	Pass
6**	16070.100	45.59	6.88	54.0	8.41	AV	146.00	200	Vertical	Pass

ANT-12**1 GHz to 18 GHz, ANT H 802.11b Low Channel**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1627.200	41.19	-17.83	74.0	32.81	Peak	160.00	100	Horizontal	Pass
1**	1627.200	32.25	-17.83	54.0	21.75	AV	160.00	100	Horizontal	Pass
2	2413.200	101.06	-13.08	74.0	-27.06	Peak	211.00	150	Horizontal	N/A
2**	2413.200	98.24	-13.08	54.0	-44.24	AV	211.00	150	Horizontal	N/A
3	2955.400	51.02	-10.24	74.0	22.98	Peak	200.00	150	Horizontal	Pass
3**	2955.400	41.47	-10.24	54.0	12.53	AV	200.00	150	Horizontal	Pass
4	4824.000	50.61	-3.66	74.0	23.39	Peak	184.00	150	Horizontal	Pass
4**	4824.000	46.69	-3.66	54.0	7.31	AV	184.00	150	Horizontal	Pass
5	6914.000	53.00	-0.19	74.0	21.00	Peak	46.00	400	Horizontal	Pass
5**	6914.000	44.04	-0.19	54.0	9.96	AV	46.00	400	Horizontal	Pass
6	16075.088	54.98	6.88	74.0	19.02	Peak	163.00	100	Horizontal	Pass
6**	16075.088	46.23	6.88	54.0	7.77	AV	163.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1676.900	41.65	-17.51	74.0	32.35	Peak	0.00	200	Vertical	Pass
1**	1676.900	32.84	-17.51	54.0	21.16	AV	0.00	200	Vertical	Pass
2	2410.900	94.77	-13.12	74.0	-20.77	Peak	9.00	200	Vertical	N/A
2**	2410.900	91.87	-13.12	54.0	-37.87	AV	9.00	200	Vertical	N/A
3	2958.100	51.09	-10.33	74.0	22.91	Peak	177.00	150	Vertical	Pass
3**	2958.100	41.28	-10.33	54.0	12.72	AV	177.00	150	Vertical	Pass
4	4824.200	49.25	-3.66	74.0	24.75	Peak	258.00	150	Vertical	Pass
4**	4824.200	43.70	-3.66	54.0	10.30	AV	258.00	150	Vertical	Pass
5	6894.200	52.83	-0.50	74.0	21.17	Peak	280.00	300	Vertical	Pass
5**	6894.200	43.12	-0.50	54.0	10.88	AV	280.00	300	Vertical	Pass
6	16082.700	54.93	6.88	74.0	19.07	Peak	95.00	100	Vertical	Pass
6**	16082.700	45.39	6.88	54.0	8.61	AV	95.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1658.000	41.40	-17.50	74.0	32.60	Peak	349.00	300	Horizontal	Pass
1**	1658.000	32.91	-17.50	54.0	21.09	AV	349.00	300	Horizontal	Pass
2	2438.100	102.19	-12.38	74.0	-28.19	Peak	207.00	100	Horizontal	N/A
2**	2438.100	99.16	-12.38	54.0	-45.16	AV	207.00	100	Horizontal	N/A
3	2830.700	50.33	-10.67	74.0	23.67	Peak	242.00	150	Horizontal	Pass
3**	2830.700	39.62	-10.67	54.0	14.38	AV	242.00	150	Horizontal	Pass
4	4874.000	48.64	-3.62	74.0	25.36	Peak	250.00	150	Horizontal	Pass
4**	4874.000	42.90	-3.62	54.0	11.10	AV	250.00	150	Horizontal	Pass
5	6709.400	53.00	-1.41	74.0	21.00	Peak	25.00	150	Horizontal	Pass
5**	6709.400	42.37	-1.41	54.0	11.63	AV	25.00	150	Horizontal	Pass
6	16058.550	55.27	6.77	74.0	18.73	Peak	161.00	200	Horizontal	Pass
6**	16058.550	45.35	6.77	54.0	8.65	AV	161.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1559.700	41.46	-17.61	74.0	32.54	Peak	130.00	400	Vertical	Pass
1**	1559.700	31.82	-17.61	54.0	22.18	AV	130.00	400	Vertical	Pass
2	2435.800	93.63	-12.44	74.0	-19.63	Peak	64.00	200	Vertical	N/A
2**	2435.800	90.73	-12.44	54.0	-36.73	AV	64.00	200	Vertical	N/A
3	2974.900	50.68	-10.42	74.0	23.32	Peak	100.00	100	Vertical	Pass
3**	2974.900	41.14	-10.42	54.0	12.86	AV	100.00	100	Vertical	Pass
4	4864.400	49.59	-3.57	74.0	24.41	Peak	273.00	200	Vertical	Pass
4**	4864.400	40.23	-3.57	54.0	13.77	AV	273.00	200	Vertical	Pass
5	6978.600	52.10	-0.43	74.0	21.90	Peak	61.00	300	Vertical	Pass
5**	6978.600	43.64	-0.43	54.0	10.36	AV	61.00	300	Vertical	Pass
6	16062.488	55.23	6.81	74.0	18.77	Peak	164.00	100	Vertical	Pass
6**	16062.488	46.01	6.81	54.0	7.99	AV	164.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1680.300	41.22	-17.60	74.0	32.78	Peak	139.00	400	Horizontal	Pass
1**	1680.300	31.68	-17.60	54.0	22.32	AV	139.00	400	Horizontal	Pass
2	2463.200	102.88	-13.03	74.0	-28.88	Peak	194.00	100	Horizontal	N/A
2**	2463.200	99.99	-13.03	54.0	-45.99	AV	194.00	100	Horizontal	N/A
3	2987.200	49.65	-10.14	74.0	24.35	Peak	250.00	150	Horizontal	Pass
3**	2987.200	40.88	-10.14	54.0	13.12	AV	250.00	150	Horizontal	Pass
4	4924.000	50.14	-3.83	74.0	23.86	Peak	242.00	150	Horizontal	Pass
4**	4924.000	45.33	-3.83	54.0	8.67	AV	242.00	150	Horizontal	Pass
5	6894.000	53.32	-0.50	74.0	20.68	Peak	133.00	100	Horizontal	Pass
5**	6894.000	43.16	-0.50	54.0	10.84	AV	133.00	100	Horizontal	Pass
6	17465.025	55.30	5.27	74.0	18.70	Peak	278.00	400	Horizontal	Pass
6**	17465.025	44.24	5.27	54.0	9.76	AV	278.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1671.500	41.83	-17.49	74.0	32.17	Peak	18.00	300	Vertical	Pass
1**	1671.500	32.28	-17.49	54.0	21.72	AV	18.00	300	Vertical	Pass
2	2463.200	95.20	-13.03	74.0	-21.20	Peak	277.00	200	Vertical	N/A
2**	2463.200	92.34	-13.03	54.0	-38.34	AV	277.00	200	Vertical	N/A
3	2977.900	50.34	-10.37	74.0	23.66	Peak	360.00	150	Vertical	Pass
3**	2977.900	41.56	-10.37	54.0	12.44	AV	360.00	150	Vertical	Pass
4	4924.200	49.12	-3.83	74.0	24.88	Peak	260.00	150	Vertical	Pass
4**	4924.200	44.96	-3.83	54.0	9.04	AV	260.00	150	Vertical	Pass
5	6949.600	52.77	-0.46	74.0	21.23	Peak	355.00	300	Vertical	Pass
5**	6949.600	43.55	-0.46	54.0	10.45	AV	355.00	300	Vertical	Pass
6	16272.487	54.93	6.27	74.0	19.07	Peak	360.00	100	Vertical	Pass
6**	16272.487	44.85	6.27	54.0	9.15	AV	360.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1667.300	41.71	-17.39	74.0	32.29	Peak	12.00	100	Horizontal	Pass
1**	1667.300	32.71	-17.39	54.0	21.29	AV	12.00	100	Horizontal	Pass
2	2411.000	102.44	-13.12	74.0	-28.44	Peak	203.00	150	Horizontal	N/A
2**	2411.000	95.02	-13.12	54.0	-41.02	AV	203.00	150	Horizontal	N/A
3	2961.600	50.41	-10.38	74.0	23.59	Peak	146.00	150	Horizontal	Pass
3**	2961.600	41.24	-10.38	54.0	12.76	AV	146.00	150	Horizontal	Pass
4	4822.400	49.10	-3.65	74.0	24.90	Peak	309.00	200	Horizontal	Pass
4**	4822.400	40.02	-3.65	54.0	13.98	AV	309.00	200	Horizontal	Pass
5	6992.200	52.30	-0.42	74.0	21.70	Peak	186.00	300	Horizontal	Pass
5**	6992.200	43.20	-0.42	54.0	10.80	AV	186.00	300	Horizontal	Pass
6	16102.912	54.79	6.88	74.0	19.21	Peak	314.00	400	Horizontal	Pass
6**	16102.912	45.12	6.88	54.0	8.88	AV	314.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1679.000	42.01	-17.58	74.0	31.99	Peak	332.00	400	Vertical	Pass
1**	1679.000	32.18	-17.58	54.0	21.82	AV	332.00	400	Vertical	Pass
2	2410.200	95.95	-13.14	74.0	-21.95	Peak	20.00	200	Vertical	N/A
2**	2410.200	88.32	-13.14	54.0	-34.32	AV	20.00	200	Vertical	N/A
3	2733.300	50.59	-10.76	74.0	23.41	Peak	312.00	100	Vertical	Pass
3**	2733.300	40.30	-10.76	54.0	13.70	AV	312.00	100	Vertical	Pass
4	4947.800	48.95	-3.89	74.0	25.05	Peak	195.00	100	Vertical	Pass
4**	4947.800	39.46	-3.89	54.0	14.54	AV	195.00	100	Vertical	Pass
5	6907.800	52.24	-0.33	74.0	21.76	Peak	85.00	300	Vertical	Pass
5**	6907.800	43.80	-0.33	54.0	10.20	AV	85.00	300	Vertical	Pass
6	16084.275	54.86	6.88	74.0	19.14	Peak	28.00	100	Vertical	Pass
6**	16084.275	45.56	6.88	54.0	8.44	AV	28.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1516.000	41.52	-17.76	74.0	32.48	Peak	231.00	100	Horizontal	Pass
1**	1516.000	31.08	-17.76	54.0	22.92	AV	231.00	100	Horizontal	Pass
2	2438.100	103.90	-12.38	74.0	-29.90	Peak	201.00	200	Horizontal	N/A
2**	2438.100	96.76	-12.38	54.0	-42.76	AV	201.00	200	Horizontal	N/A
3	2987.400	50.06	-10.14	74.0	23.94	Peak	291.00	150	Horizontal	Pass
3**	2987.400	41.29	-10.14	54.0	12.71	AV	291.00	150	Horizontal	Pass
4	4823.400	49.29	-3.66	74.0	24.71	Peak	164.00	200	Horizontal	Pass
4**	4823.400	39.38	-3.66	54.0	14.62	AV	164.00	200	Horizontal	Pass
5	6594.000	53.01	-1.31	74.0	20.99	Peak	342.00	150	Horizontal	Pass
5**	6594.000	42.88	-1.31	54.0	11.12	AV	342.00	150	Horizontal	Pass
6	16097.401	54.85	6.89	74.0	19.15	Peak	313.00	200	Horizontal	Pass
6**	16097.401	45.83	6.89	54.0	8.17	AV	313.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1579.200	41.43	-17.52	74.0	32.57	Peak	168.00	100	Vertical	Pass
1**	1579.200	32.48	-17.52	54.0	21.52	AV	168.00	100	Vertical	Pass
2	2435.500	95.21	-12.46	74.0	-21.21	Peak	218.00	100	Vertical	N/A
2**	2435.500	87.08	-12.46	54.0	-33.08	AV	218.00	100	Vertical	N/A
3	2976.300	50.29	-10.41	74.0	23.71	Peak	12.00	200	Vertical	Pass
3**	2976.300	40.34	-10.41	54.0	13.66	AV	12.00	200	Vertical	Pass
4	4984.600	48.75	-3.82	74.0	25.25	Peak	57.00	400	Vertical	Pass
4**	4984.600	40.17	-3.82	54.0	13.83	AV	57.00	400	Vertical	Pass
5	6895.600	52.79	-0.51	74.0	21.21	Peak	57.00	200	Vertical	Pass
5**	6895.600	42.49	-0.51	54.0	11.51	AV	57.00	200	Vertical	Pass
6	17101.725	55.03	5.32	74.0	18.97	Peak	62.00	200	Vertical	Pass
6**	17101.725	43.84	5.32	54.0	10.16	AV	62.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1680.200	42.16	-17.60	74.0	31.84	Peak	187.00	200	Horizontal	Pass
1**	1680.200	31.86	-17.60	54.0	22.14	AV	187.00	200	Horizontal	Pass
2	2464.700	104.57	-13.04	74.0	-30.57	Peak	202.00	200	Horizontal	N/A
2**	2464.700	96.25	-13.04	54.0	-42.25	AV	202.00	200	Horizontal	N/A
3	2996.400	50.45	-10.13	74.0	23.55	Peak	59.00	150	Horizontal	Pass
3**	2996.400	42.09	-10.13	54.0	11.91	AV	59.00	150	Horizontal	Pass
4	4968.400	49.10	-3.99	74.0	24.90	Peak	324.00	300	Horizontal	Pass
4**	4968.400	39.86	-3.99	54.0	14.14	AV	324.00	300	Horizontal	Pass
5	6989.800	53.42	-0.42	74.0	20.58	Peak	61.00	100	Horizontal	Pass
5**	6989.800	43.43	-0.42	54.0	10.57	AV	61.00	100	Horizontal	Pass
6	17283.637	54.54	6.44	74.0	19.46	Peak	231.00	400	Horizontal	Pass
6**	17283.637	45.06	6.44	54.0	8.94	AV	231.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1682.300	41.73	-17.66	74.0	32.27	Peak	208.00	400	Vertical	Pass
1**	1682.300	31.32	-17.66	54.0	22.68	AV	208.00	400	Vertical	Pass
2	2463.700	97.97	-13.03	74.0	-23.97	Peak	276.00	100	Vertical	N/A
2**	2463.700	90.78	-13.03	54.0	-36.78	AV	276.00	100	Vertical	N/A
3	2958.200	50.36	-10.33	74.0	23.64	Peak	76.00	150	Vertical	Pass
3**	2958.200	40.64	-10.33	54.0	13.36	AV	76.00	150	Vertical	Pass
4	4877.400	49.87	-3.59	74.0	24.13	Peak	122.00	400	Vertical	Pass
4**	4877.400	39.68	-3.59	54.0	14.32	AV	122.00	400	Vertical	Pass
5	6860.800	52.57	-1.13	74.0	21.43	Peak	57.00	100	Vertical	Pass
5**	6860.800	42.36	-1.13	54.0	11.64	AV	57.00	100	Vertical	Pass
6	16120.500	54.84	6.80	74.0	19.16	Peak	182.00	200	Vertical	Pass
6**	16120.500	45.22	6.80	54.0	8.78	AV	182.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1685.800	42.34	-17.63	74.0	31.66	Peak	133.00	100	Horizontal	Pass
1**	1685.800	32.97	-17.63	54.0	21.03	AV	133.00	100	Horizontal	Pass
2	2413.000	102.40	-13.08	74.0	-28.40	Peak	205.00	150	Horizontal	N/A
2**	2413.000	95.24	-13.08	54.0	-41.24	AV	205.00	150	Horizontal	N/A
3	2996.400	50.42	-10.13	74.0	23.58	Peak	360.00	100	Horizontal	Pass
3**	2996.400	41.26	-10.13	54.0	12.74	AV	360.00	100	Horizontal	Pass
4	4909.800	49.30	-3.61	74.0	24.70	Peak	360.00	300	Horizontal	Pass
4**	4909.800	40.67	-3.61	54.0	13.33	AV	360.00	300	Horizontal	Pass
5	6969.800	52.58	-0.43	74.0	21.42	Peak	332.00	400	Horizontal	Pass
5**	6969.800	44.01	-0.43	54.0	9.99	AV	332.00	400	Horizontal	Pass
6	16035.188	54.91	6.62	74.0	19.09	Peak	162.00	200	Horizontal	Pass
6**	16035.188	45.18	6.62	54.0	8.82	AV	162.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1588.000	41.65	-17.64	74.0	32.35	Peak	262.00	400	Vertical	Pass
1**	1588.000	32.07	-17.64	54.0	21.93	AV	262.00	400	Vertical	Pass
2	2410.900	95.59	-13.12	74.0	-21.59	Peak	16.00	100	Vertical	N/A
2**	2410.900	88.45	-13.12	54.0	-34.45	AV	16.00	100	Vertical	N/A
3	2996.700	50.41	-10.13	74.0	23.59	Peak	164.00	200	Vertical	Pass
3**	2996.700	40.46	-10.13	54.0	13.54	AV	164.00	200	Vertical	Pass
4	4908.000	49.16	-3.58	74.0	24.84	Peak	222.00	200	Vertical	Pass
4**	4908.000	39.90	-3.58	54.0	14.10	AV	222.00	200	Vertical	Pass
5	6895.400	52.75	-0.50	74.0	21.25	Peak	360.00	400	Vertical	Pass
5**	6895.400	43.43	-0.50	54.0	10.57	AV	360.00	400	Vertical	Pass
6	17282.589	55.42	6.43	74.0	18.58	Peak	95.00	100	Vertical	Pass
6**	17282.589	45.54	6.43	54.0	8.46	AV	95.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1672.500	41.51	-17.46	74.0	32.49	Peak	66.00	100	Horizontal	Pass
1**	1672.500	32.57	-17.46	54.0	21.43	AV	66.00	100	Horizontal	Pass
2	2438.200	103.51	-12.38	74.0	-29.51	Peak	207.00	100	Horizontal	N/A
2**	2438.200	96.24	-12.38	54.0	-42.24	AV	207.00	100	Horizontal	N/A
3	2990.500	50.70	-10.23	74.0	23.30	Peak	103.00	100	Horizontal	Pass
3**	2990.500	41.58	-10.23	54.0	12.42	AV	103.00	100	Horizontal	Pass
4	4993.000	49.17	-3.71	74.0	24.83	Peak	112.00	300	Horizontal	Pass
4**	4993.000	39.62	-3.71	54.0	14.38	AV	112.00	300	Horizontal	Pass
5	6951.200	52.76	-0.52	74.0	21.24	Peak	214.00	400	Horizontal	Pass
5**	6951.200	43.06	-0.52	54.0	10.94	AV	214.00	400	Horizontal	Pass
6	17282.849	55.18	6.44	74.0	18.82	Peak	213.00	100	Horizontal	Pass
6**	17282.849	45.67	6.44	54.0	8.33	AV	213.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1678.200	41.39	-17.56	74.0	32.61	Peak	349.00	300	Vertical	Pass
1**	1678.200	32.38	-17.56	54.0	21.62	AV	349.00	300	Vertical	Pass
2	2435.900	93.75	-12.44	74.0	-19.75	Peak	221.00	100	Vertical	N/A
2**	2435.900	86.97	-12.44	54.0	-32.97	AV	221.00	100	Vertical	N/A
3	2977.400	50.90	-10.40	74.0	23.10	Peak	100.00	200	Vertical	Pass
3**	2977.400	41.06	-10.40	54.0	12.94	AV	100.00	200	Vertical	Pass
4	4939.600	48.99	-3.90	74.0	25.01	Peak	0.00	100	Vertical	Pass
4**	4939.600	40.61	-3.90	54.0	13.39	AV	0.00	100	Vertical	Pass
5	6882.800	52.41	-0.62	74.0	21.59	Peak	281.00	200	Vertical	Pass
5**	6882.800	43.09	-0.62	54.0	10.91	AV	281.00	200	Vertical	Pass
6	17304.637	54.74	6.48	74.0	19.26	Peak	80.00	100	Vertical	Pass
6**	17304.637	45.59	6.48	54.0	8.41	AV	80.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1687.400	41.89	-17.65	74.0	32.11	Peak	327.00	100	Horizontal	Pass
1**	1687.400	32.20	-17.65	54.0	21.80	AV	327.00	100	Horizontal	Pass
2	2463.700	104.14	-13.03	74.0	-30.14	Peak	195.00	200	Horizontal	N/A
2**	2463.700	97.03	-13.03	54.0	-43.03	AV	195.00	200	Horizontal	N/A
3	2928.500	50.10	-10.55	74.0	23.90	Peak	353.00	150	Horizontal	Pass
3**	2928.500	40.24	-10.55	54.0	13.76	AV	353.00	150	Horizontal	Pass
4	4929.000	48.92	-3.81	74.0	25.08	Peak	69.00	400	Horizontal	Pass
4**	4929.000	41.10	-3.81	54.0	12.90	AV	69.00	400	Horizontal	Pass
5	6857.600	52.76	-1.11	74.0	21.24	Peak	274.00	200	Horizontal	Pass
5**	6857.600	44.45	-1.11	54.0	9.55	AV	274.00	200	Horizontal	Pass
6	16099.237	55.03	6.89	74.0	18.97	Peak	60.00	100	Horizontal	Pass
6**	16099.237	46.04	6.89	54.0	7.96	AV	60.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1664.000	41.59	-17.38	74.0	32.41	Peak	315.00	200	Vertical	Pass
1**	1664.000	32.57	-17.38	54.0	21.43	AV	315.00	200	Vertical	Pass
2	2463.300	96.91	-13.03	74.0	-22.91	Peak	278.00	200	Vertical	N/A
2**	2463.300	90.02	-13.03	54.0	-36.02	AV	278.00	200	Vertical	N/A
3	2999.700	51.92	-10.12	74.0	22.08	Peak	154.00	200	Vertical	Pass
3**	2999.700	40.87	-10.12	54.0	13.13	AV	154.00	200	Vertical	Pass
4	4930.600	49.11	-3.84	74.0	24.89	Peak	113.00	400	Vertical	Pass
4**	4930.600	40.72	-3.84	54.0	13.28	AV	113.00	400	Vertical	Pass
5	6809.200	52.23	-1.33	74.0	21.77	Peak	39.00	200	Vertical	Pass
5**	6809.200	42.50	-1.33	54.0	11.50	AV	39.00	200	Vertical	Pass
6	17206.198	54.84	6.02	74.0	19.16	Peak	296.00	300	Vertical	Pass
6**	17206.198	44.12	6.02	54.0	9.88	AV	296.00	300	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data and Plots


ANT-14

802.11b LOW CHANNEL

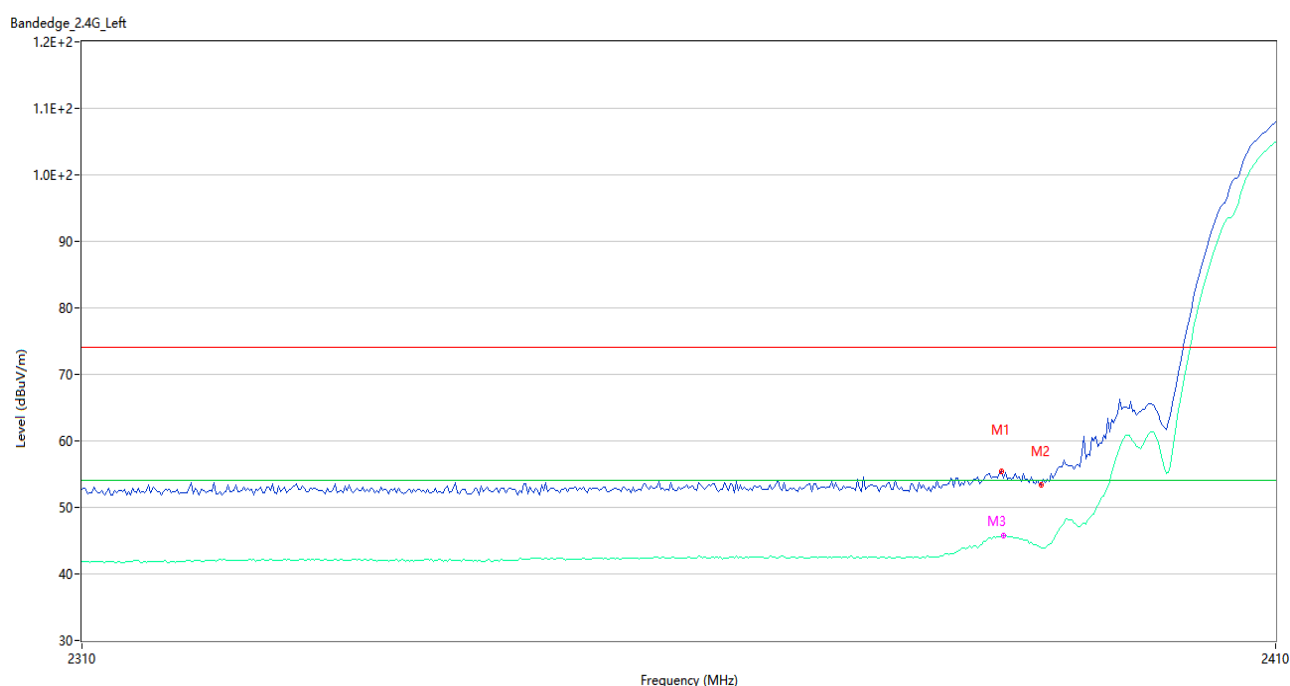


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.667	55.47	-2.21	74.0	18.53	Peak	200.00	200	Horizontal	Pass
1**	2386.667	45.53	-2.21	54.0	8.47	AV	200.00	200	Horizontal	Pass
2	2390.000	53.45	-2.35	74.0	20.55	Peak	218.00	150	Horizontal	Pass
2**	2390.000	43.96	-2.35	54.0	10.04	AV	218.00	150	Horizontal	Pass
3	2386.833	54.36	-2.22	74.0	19.64	Peak	217.00	150	Horizontal	Pass
3**	2386.833	45.68	-2.22	54.0	8.32	AV	217.00	150	Horizontal	Pass

802.11b HIGH CHANNEL

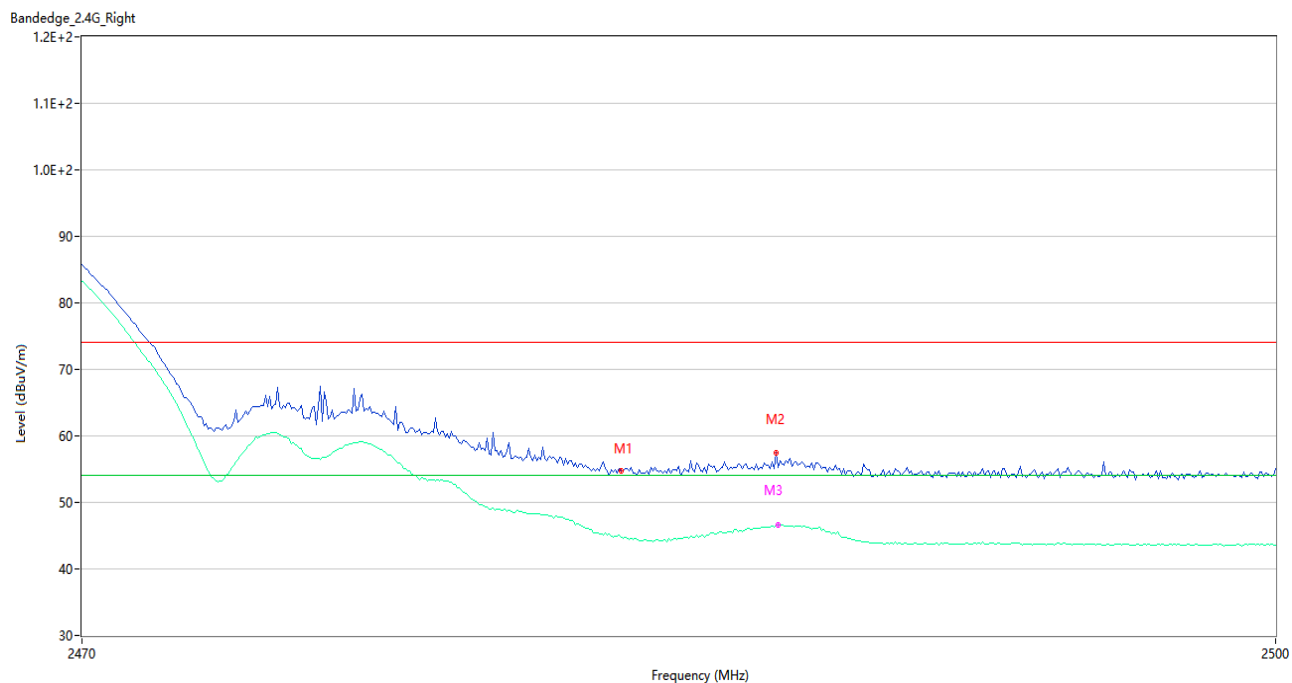


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.78	-0.86	74.0	19.22	Peak	217.00	150	Horizontal	Pass
1**	2483.500	44.80	-0.86	54.0	9.20	AV	217.00	150	Horizontal	Pass
2	2487.400	57.48	-0.81	74.0	16.52	Peak	197.00	150	Horizontal	Pass
2**	2487.400	46.45	-0.81	54.0	7.55	AV	197.00	150	Horizontal	Pass
3	2487.450	55.28	-0.80	74.0	18.72	Peak	231.00	150	Horizontal	Pass
3**	2487.450	46.64	-0.80	54.0	7.36	AV	231.00	150	Horizontal	Pass

802.11g LOW CHANNEL

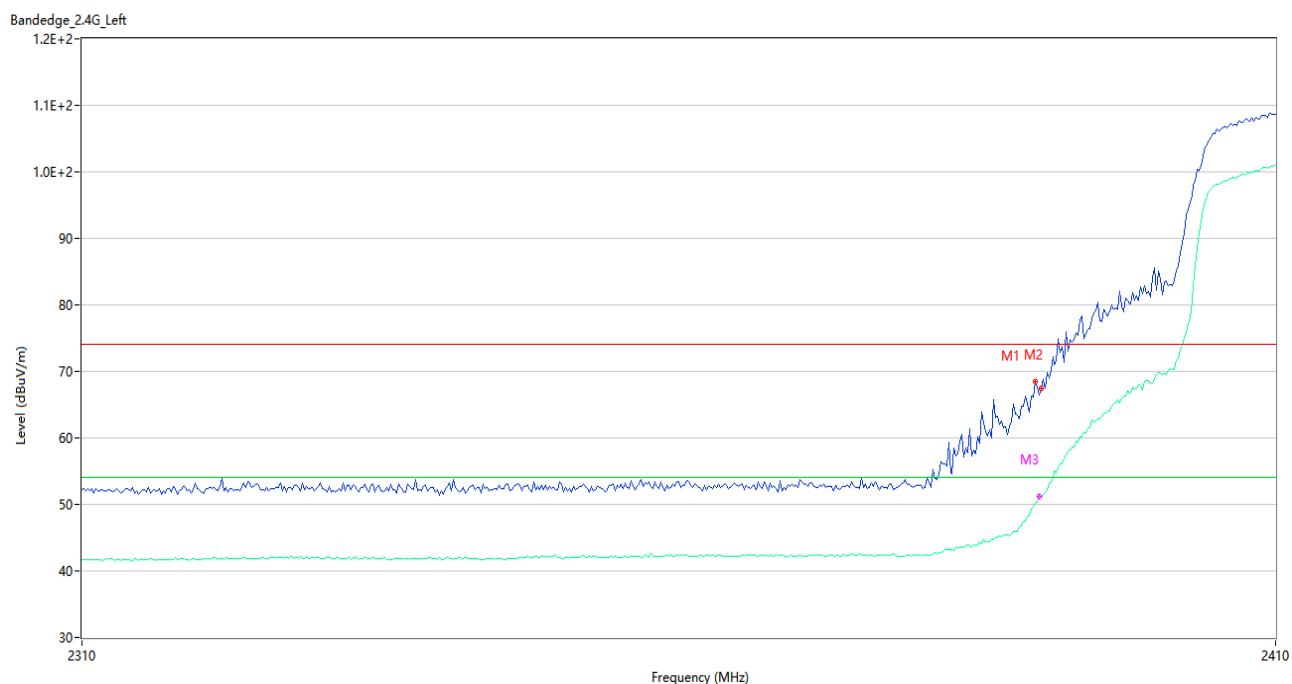


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.500	68.48	-2.33	74.0	5.52	Peak	225.00	200	Horizontal	Pass
1**	2389.500	50.14	-2.33	54.0	3.86	AV	225.00	200	Horizontal	Pass
2	2390.000	67.41	-2.35	74.0	6.59	Peak	193.00	100	Horizontal	Pass
2**	2390.000	51.01	-2.35	54.0	2.99	AV	193.00	100	Horizontal	Pass
3	2389.833	66.43	-2.34	74.0	7.57	Peak	193.00	150	Horizontal	Pass
3**	2389.833	51.11	-2.34	54.0	2.89	AV	193.00	150	Horizontal	Pass

802.11g HIGH CHANNEL

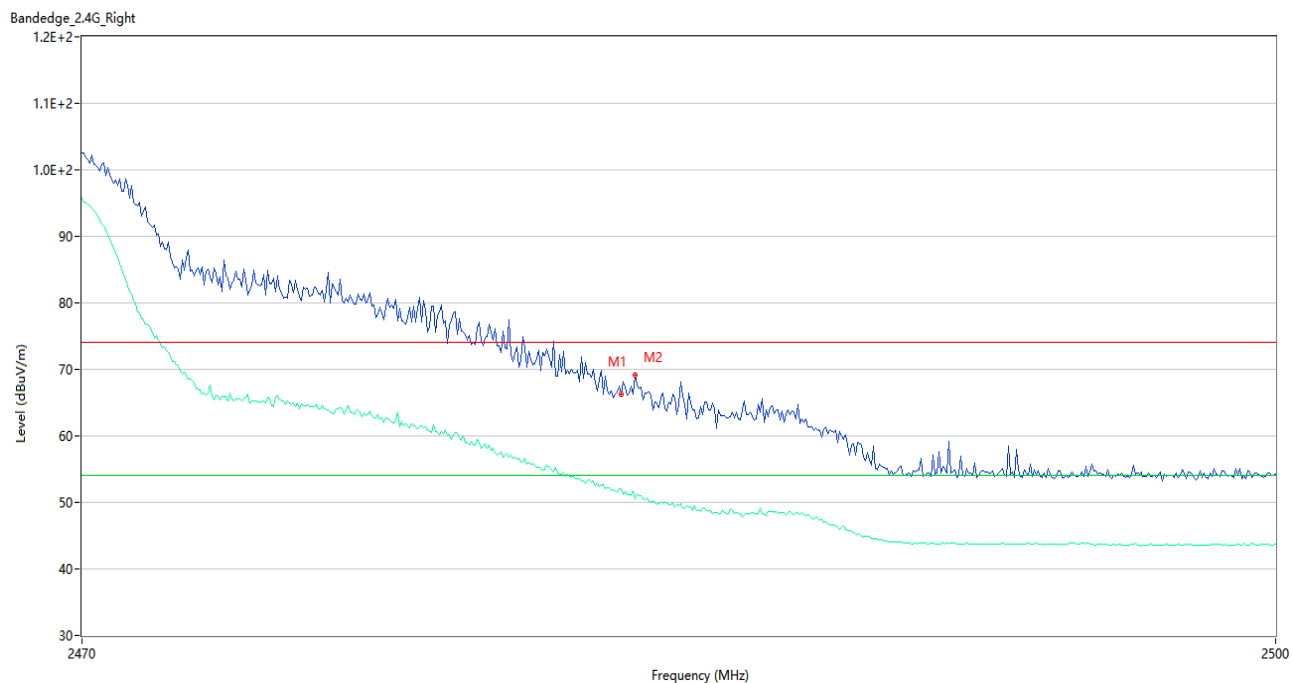


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.25	-0.86	74.0	7.75	Peak	249.00	100	Horizontal	Pass
1**	2483.500	52.00	-0.86	54.0	2.00	AV	249.00	100	Horizontal	Pass
2	2483.850	69.19	-0.85	74.0	4.81	Peak	212.00	100	Horizontal	Pass
2**	2483.850	50.55	-0.85	54.0	3.45	AV	212.00	100	Horizontal	Pass

802.11n20 LOW CHANNEL

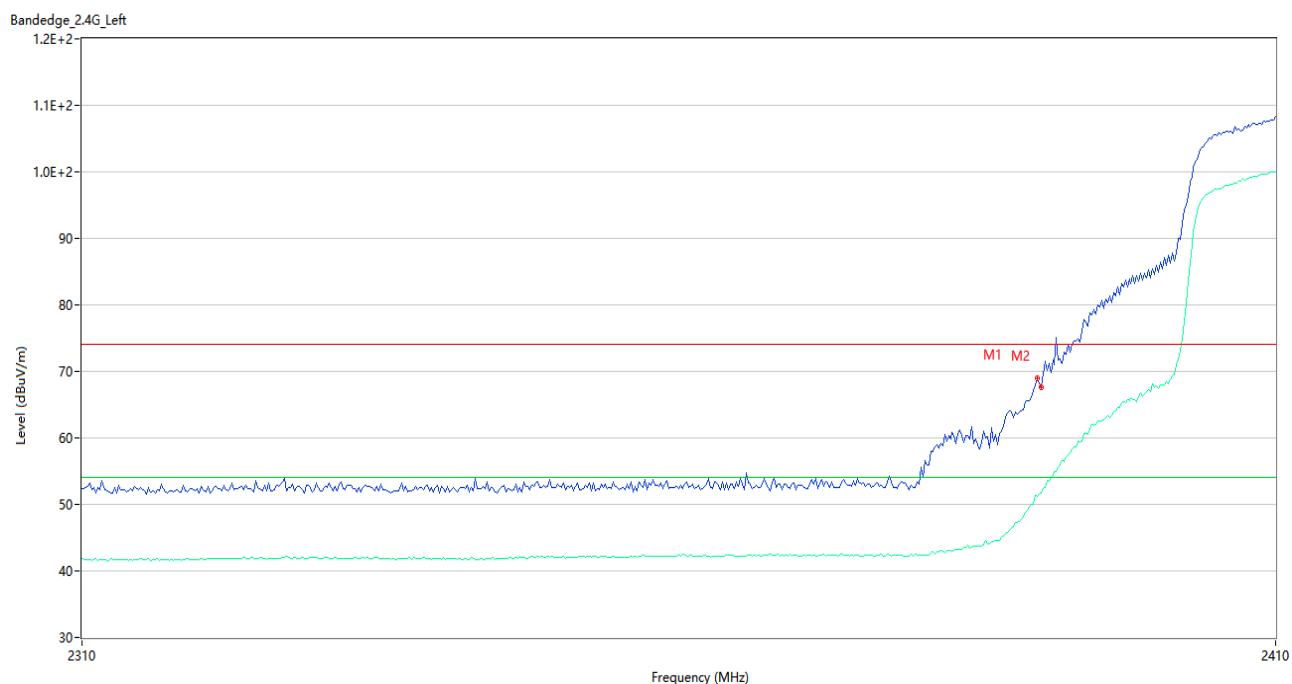

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.667	68.99	-2.34	74.0	5.01	Peak	198.00	100	Horizontal	Pass
1**	2389.667	51.13	-2.34	54.0	2.87	AV	198.00	100	Horizontal	Pass
2	2390.000	67.65	-2.35	74.0	6.35	Peak	211.00	200	Horizontal	Pass
2**	2390.000	51.67	-2.35	54.0	2.33	AV	211.00	200	Horizontal	Pass

802.11n20 HIGH CHANNEL

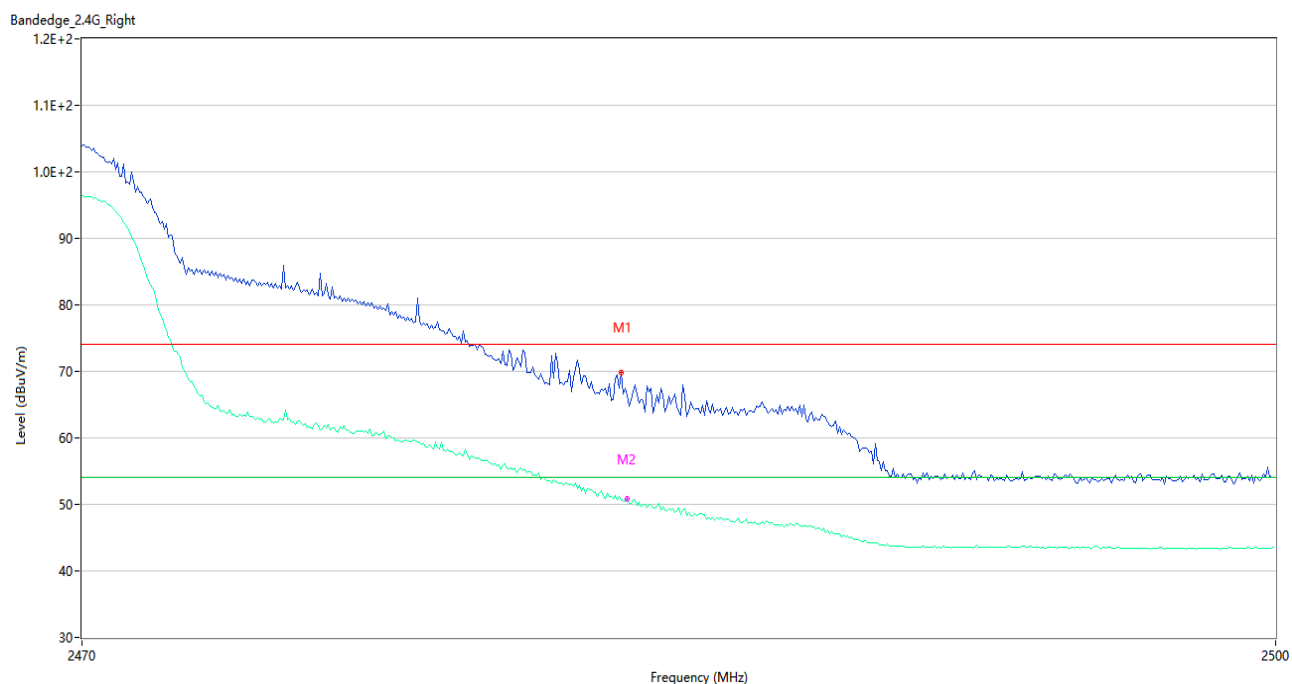

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	69.90	-0.86	74.0	4.10	Peak	194.00	200	Horizontal	Pass
1**	2483.500	50.61	-0.86	54.0	3.39	AV	194.00	200	Horizontal	Pass
2	2483.650	66.47	-0.86	74.0	7.53	Peak	228.00	150	Horizontal	Pass
2**	2483.650	50.91	-0.86	54.0	3.09	AV	228.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

ANT12

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-5.10	8
Middle	-4.99	8
High	-5.04	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.46	8
Middle	-8.20	8
High	-8.73	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-11.69	8
Middle	-8.87	8
High	-10.62	8

ANT14

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-14.25	8
Middle	-14.93	8
High	-13.89	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-16.354	8
Middle	-16.069	8
High	-17.233	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-16.53	8
Middle	-16.82	8
High	-15.89	8

Test Plots

ANT14

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL




802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL

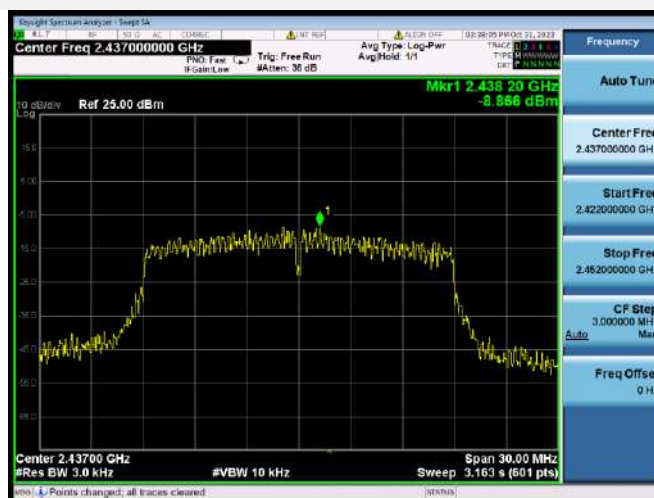

802.11n-20 MHz HIGH CHANNEL



ANT12

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL



802.11g LOW CHANNEL

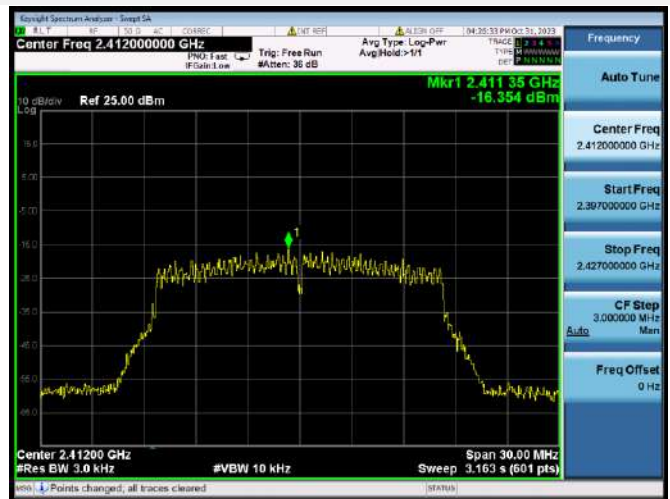

802.11g MIDDLE CHANNEL

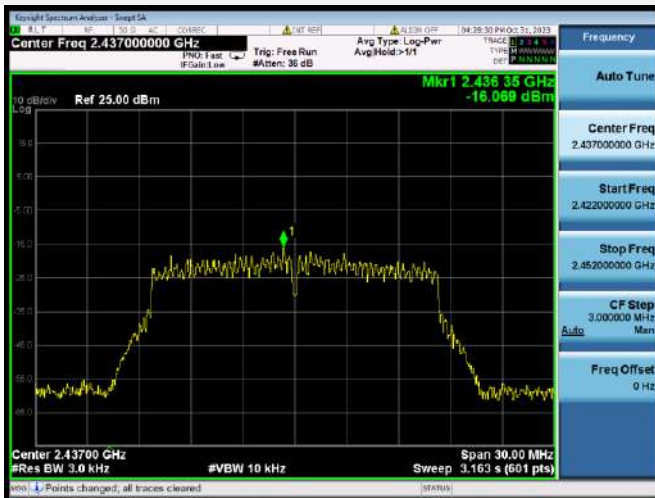

802.11g HIGH CHANNEL




802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL

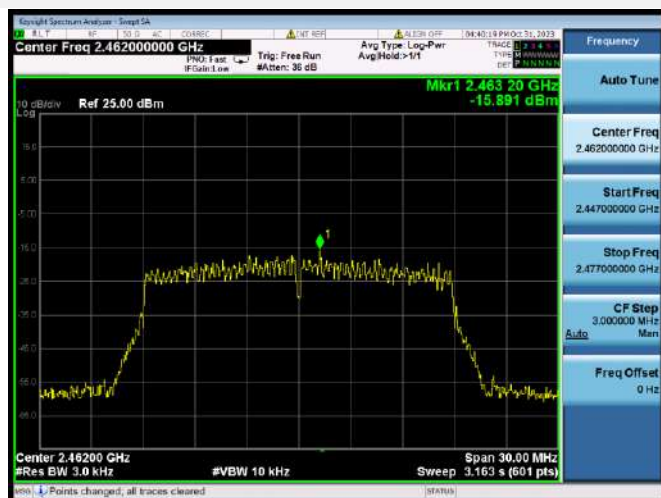

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2391126-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2391126-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2391126-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--