

SPECIFICATION FOR APPROVAL

Date 2023/03/14
File No 23031401
Revision 1.0

Shen zhen Golden-Resource Electronic Co.,Ltd.
17A-03A, Block B, Nanxian Commercial Plaza, Meilong Road,
Longhua New District, Shenzhen

Model NO: PD6N

PART NAME: BT Antenna

SUPPLIER NO:

Date: Q"TY: PCS

CUSTOMER APPROVED BY		
APPROVAL	CHIEF	SUPERVISOR

SUPPLIER SIGNATURE		
APPROVAL	CHECK	DESIGN
ChenGuoqiang	XieLi	ChenXingyi

YJ-RD-F04-A

Spec Item

NO .	Contents	Number of Page	Page Code
1	Spec Cover	1	1
2	Spec Item	1	2
3	Drawing	1	3
4	Antenna Specification	1	4
5	S Parameter	1	5
6	Passive Test	1	6
7	Radiation Pattern	3	7 ~ 9
8	Material Certificate	11	10 ~ 20
9	RoHS Test Report	-	-
10	N/A	N/A	N/A
11	-	-	-
12	-	-	-
13	-	-	-

RoHS
Compatible

CUSTOMER
PART NO

REV.




DESCRIPTION

Initial Issue

DATE

2019.07.26

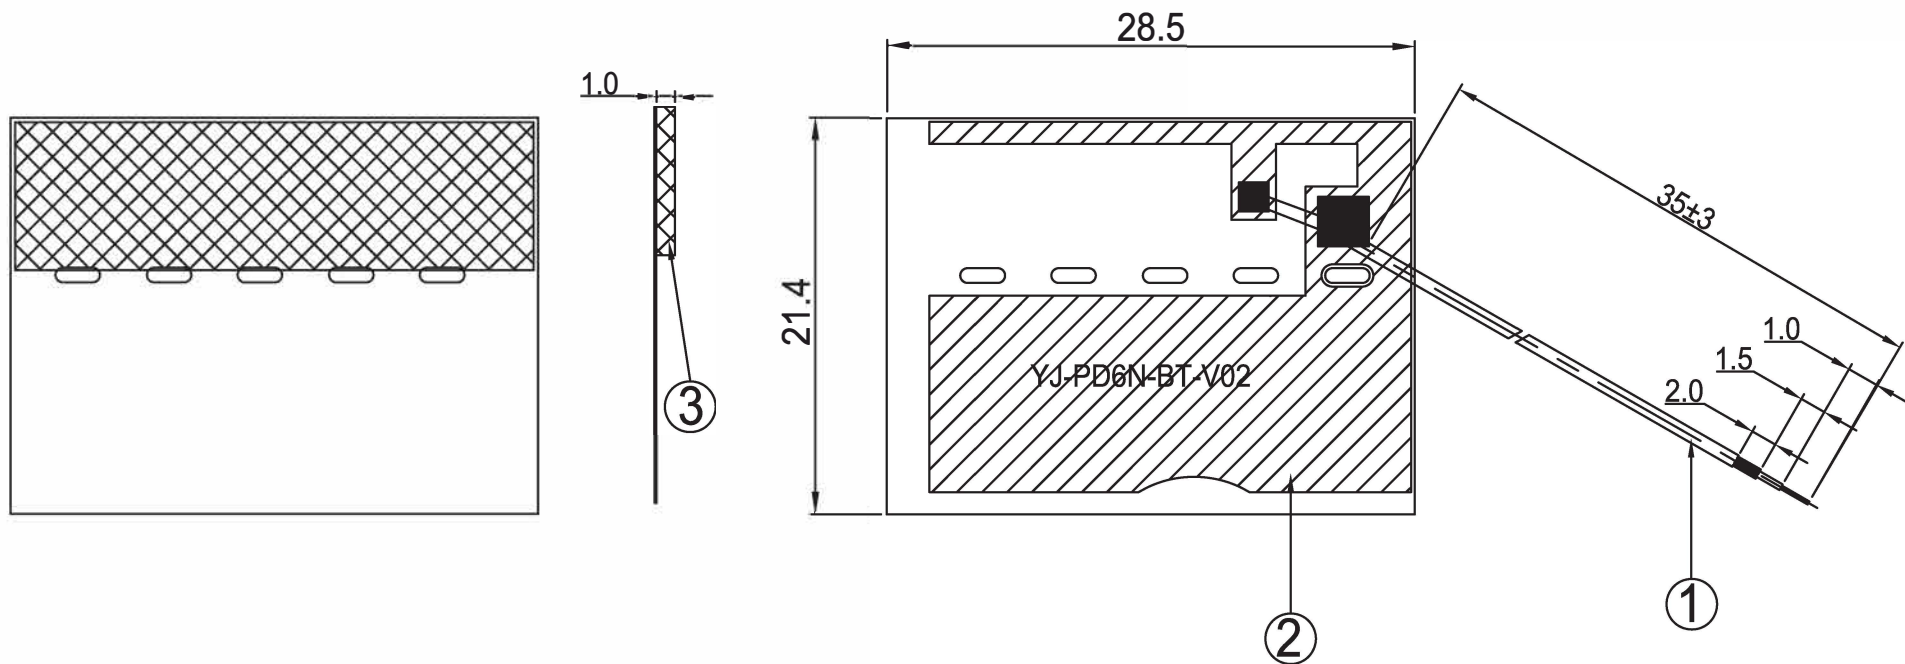

PART NAME: BT Antenna

PART NO.:

DATE: 2019-07-26

APPROVED BY

CHECKED BY

DESIGNED



Tolerance
X.X ±0.50
X.XX±0.15
X° ±3°

BY
ChenGuoQiang

XieLi

ChenXingYi

UNITS: mm

SCALE: 1/1

REVISION: A


3	EVA+Paster	28.0*8.0*1.0MM	EVA+Paster	EVA10235A.P01	1
2	FPC	28.5*21.4MM	FPCB	FPC100XXA.P01	1
1	Coaxial Cable	O.D.1.13 Gray	O.D.1.13	COA100XXA.P01	1
NO	PART NAME	DESCRIPTION	Material	Part Number	Q.TY

Antenna Specification


Electrical Properties	
Frequency	2.4-2.5GHz
Impedance	50 Ohm Nominal
V.S.W.R	3.0 Max
Gain	0.5 dBi
Radiation	Omni-directional
Polarization	Linear
Physical Properties	
Connector	None
Cable Type	O.D.1.13mm
Cable Length	35mm
Cable Color	Gray
Operating Temp.	-40 ~ +85 °C
Storage Temp / Humidity	25±5°C / <70%

Antenna Performance Test

**Agilent
E5071B**

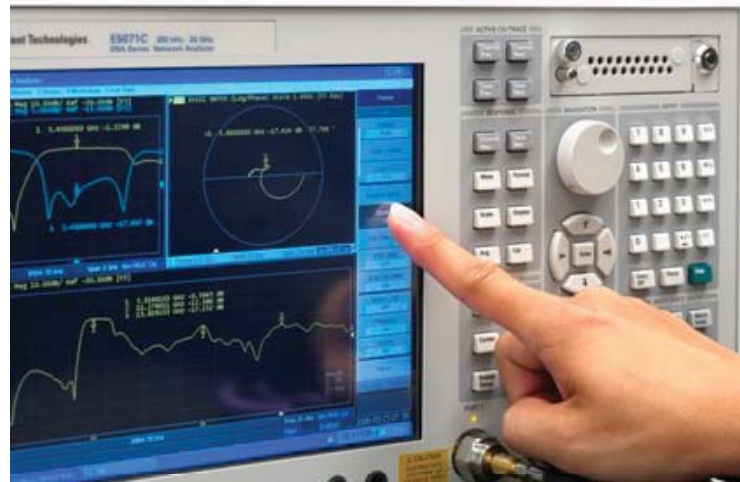


**S
Parameter
Test //
BT**

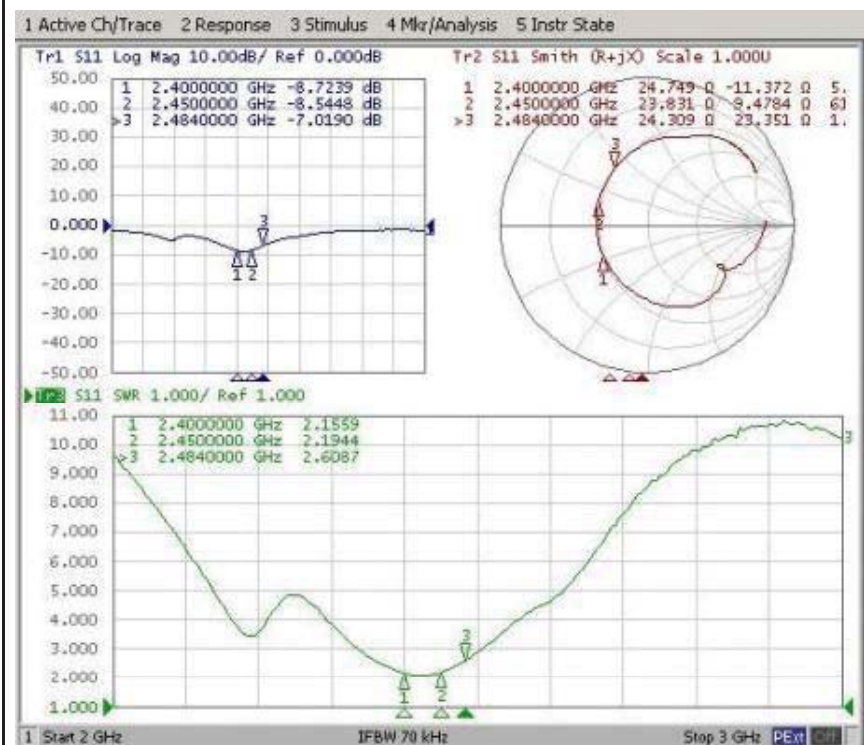


Passive Test For BT			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	71.1	-1.5	0.5
2410	72.5	-1.4	0.4
2420	71.3	-1.5	0.2
2430	72.2	-1.4	-0.2
2440	73.5	-1.3	-0.4
2450	70.0	-1.5	-0.2
2460	72.1	-1.4	-0.3
2470	71.1	-1.5	-0.2
2480	70.1	-1.5	-0.3
2490	69.5	-1.6	-0.3
2500	68.8	-1.6	-0.4

Radiation Pattern For BT Antenna


2400.000MHz

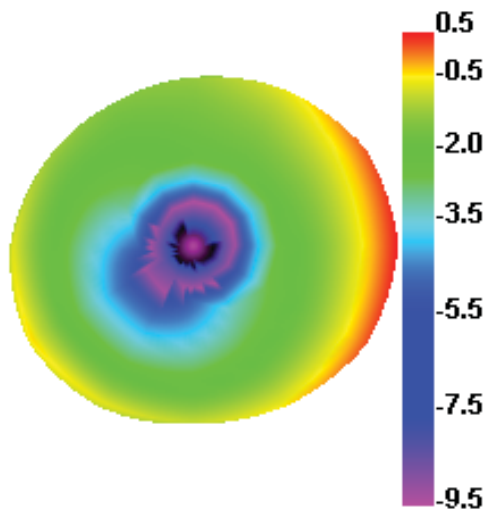


2400.000MHz H

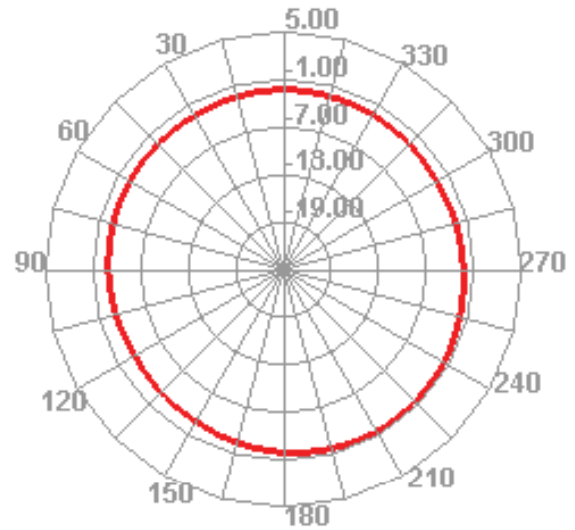

2400.000MHz E1

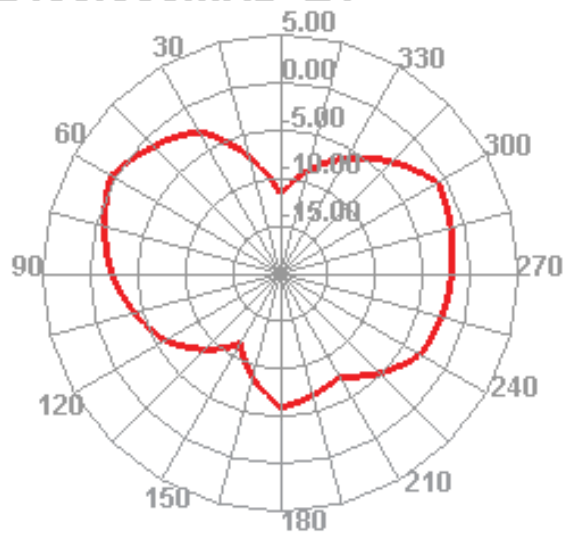


2400.000MHz E2

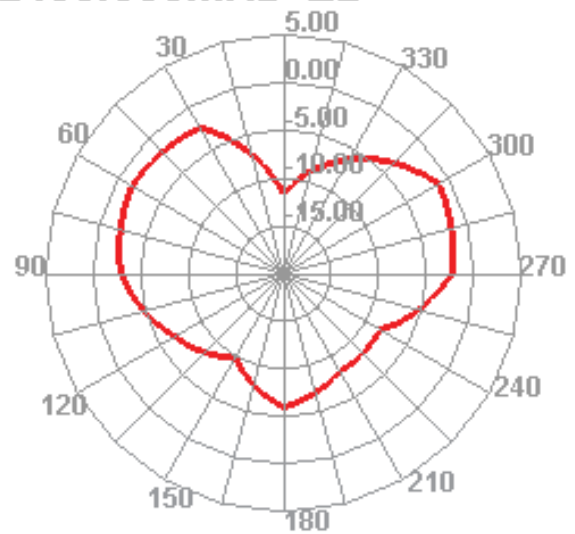


Radiation Pattern For BT Antenna


2450.000MHz

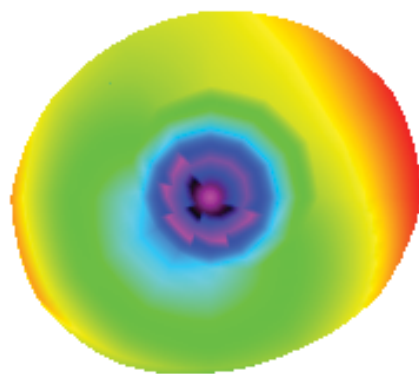


2450.000MHz H

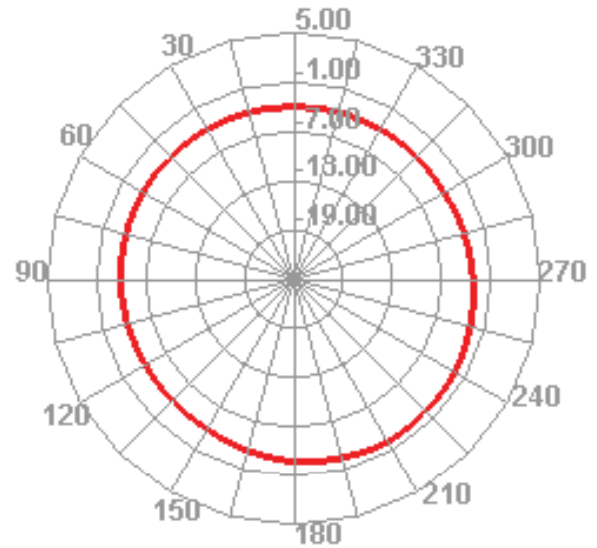

2450.000MHz E1

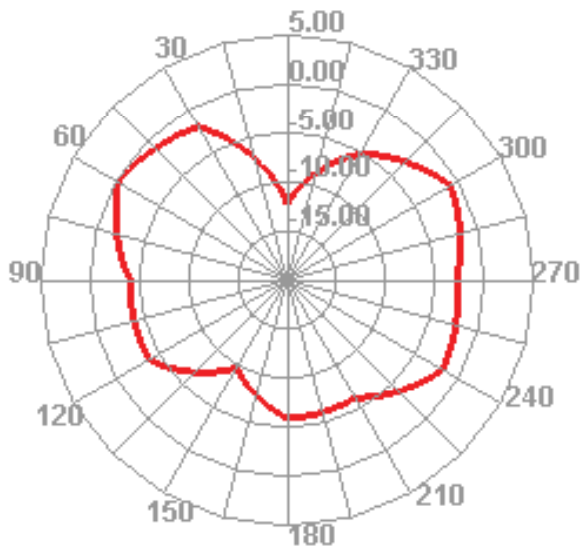


2450.000MHz E2

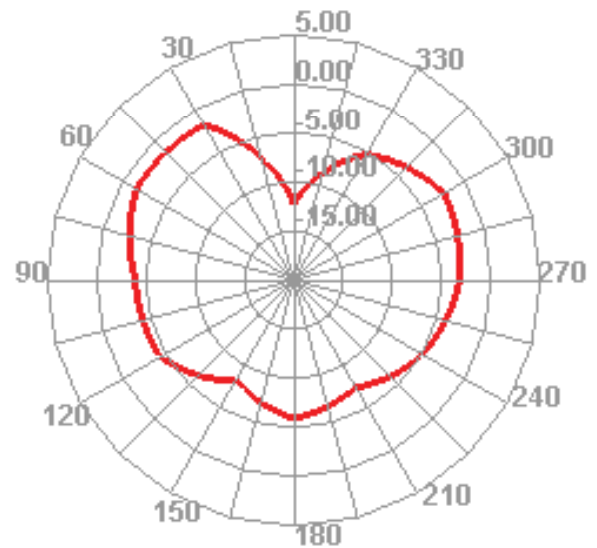


Radiation Pattern For BT Antenna


2500.000MHz

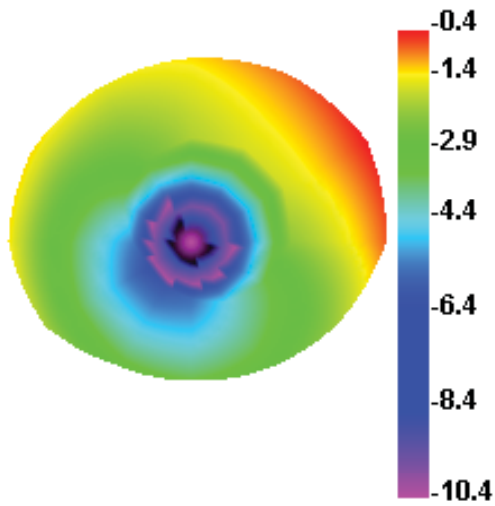

2500.000MHz H

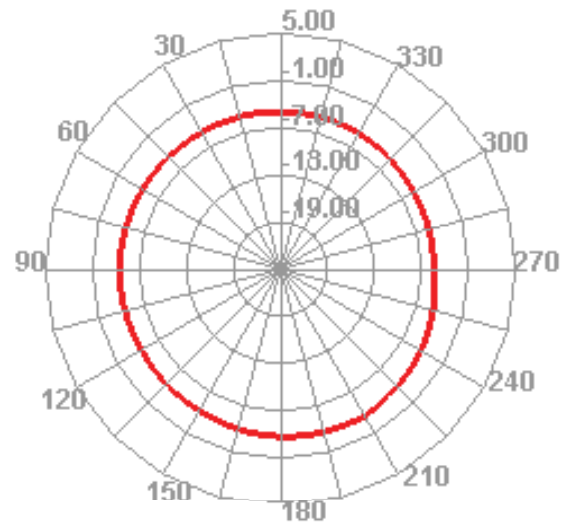

2500.000MHz E1

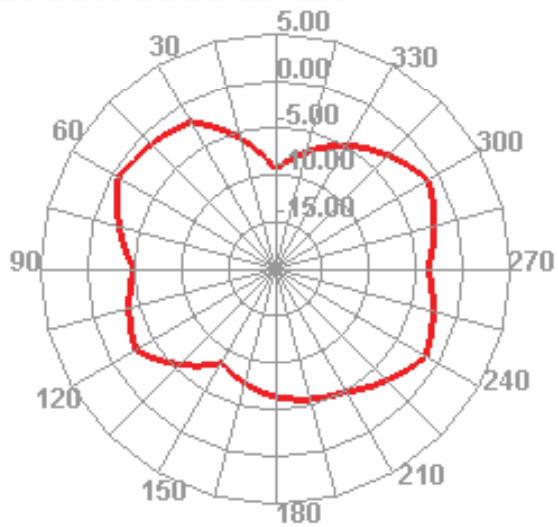

2500.000MHz E2

