


GP-24


2.4GHz Omnidirectional Base Antenna

Specifications

- 2400-2500Mhz
- 802.11b and 802.11g standards
- VSWR: Less than 1.5:1
- Gain: 12dBi
- Length: 5 ft 10 inches
- Weight: 2 lbs 9 oz
- -3dB Beam-width: 5 degrees
- Cross polar rejection: 14dB+
- Max Power: 100 watts
- Max Wind Survival: 135MPH
- Wind Load: 35.3 sq in (.245 sq ft)
- Mast Required: 1.25-2.5 inches
- Connector: Integral N- female
- Radome: One piece white UV stabilized fiberglass.
- Extruded aluminum/stainless steel mounting hardware included

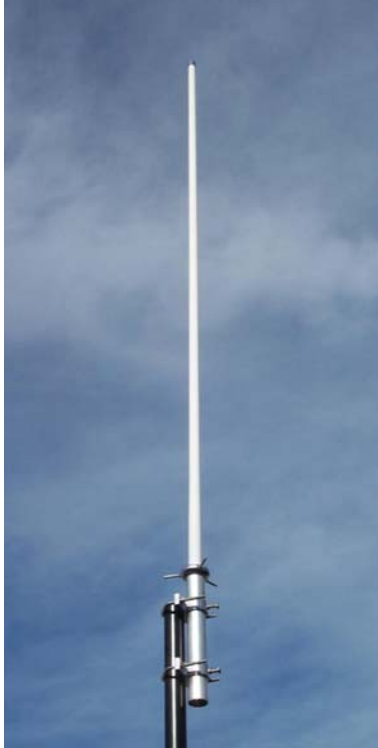

Vertical radiation pattern

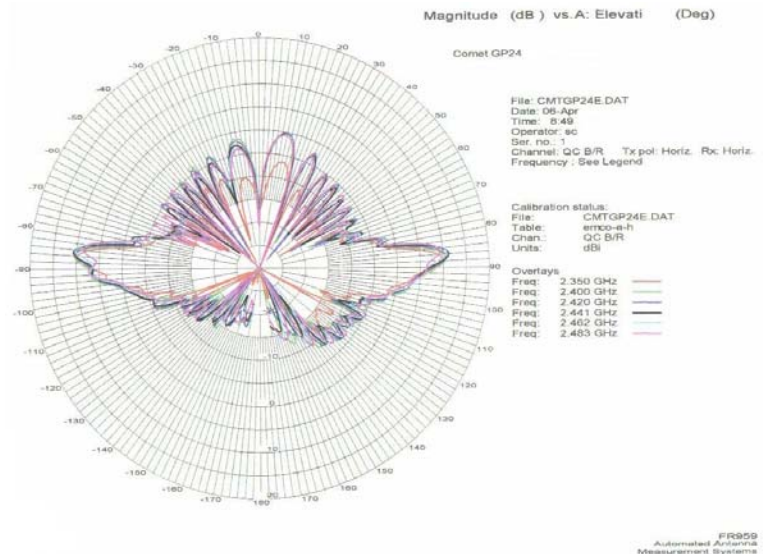

FEATURES

- Extremely high gain omnidirectional pattern for long range point-to-multipoint applications.
- Heavy duty fiberglass radome, 134+ MPH wind survival.
- Extruded aluminum mounting brackets, stainless steel U-bolts/hardware.
- Mounting pipe acts as a shroud to protect the coax to antenna connection from the weather.
- Ideal for the license free 2.4GHz ISM band 802.11b and 802.11g standards.



NCG Company 1275 N. Grove St. Anaheim, CA 92806-2114
Phone: 800.962-2611 Fax: 714.630-4541
email: micks@cometantenna.com