



Report No.: TW2202033-02E File Reference No.: 2022-03-03

Applicant: Shenzhen Bilian Electronic Co.,Ltd.

Product: IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1

USB Combo Module

Model No.: BL-M7663BU4

Trademark: N/A

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility



Manager

Dated: March 03, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

### SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2202033-02E Page 2 of 45

Date: 2022-03-03



## **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

### FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

### Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



# **Test Report Conclusion**

### Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit.	13
7.0	6dB Bandwidth Measurement Bandwidth.	23
8.0	Maximum Peak Output Power	28
9.0	Power Spectral Density Measurement.	30
10.0	Out of Band Measurement.	35
11.0	Antenna Requirement	42
12.0	FCC ID Label.	43
13.0	Photo of Test Setup and EUT View.	44

Date: 2022-03-03



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

### 1.2 Applicant Details

Applicant: Shenzhen Bilian Electronic Co.,Ltd.

Address: Room 501, Building 3, No. 32, Dafu Road, Zhangge Community, Fucheng Street, Longhua

District, Shenzhen City

Telephone: -Fax: --

#### 1.3 Description of EUT

Product: IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB Combo Module

Manufacturer: Shenzhen Bilian Electronic Co.,Ltd.

Address: Room 501, Building 3, No. 32, Dafu Road, Zhangge Community, Fucheng Street,

Longhua District, Shenzhen City

Trademark: N/A Additional Trademark: N/A

Model Number: BL-M7663BU4

Additional Model Number: N/A

Hardware Version: V1.0 Software Version: V1.0

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Input Voltage: DC5.0V

### 1.4 Submitted Sample: 2 Samples

### 1.5 Test Duration

2022-02-15 to 2022-03-03

### 1.6 Test Uncertainty

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2202033-02E Page 5 of 45

Date: 2022-03-03



Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is to governge factor of k=2 and a level of confidence of 95%.

### 1.7 Test Engineer

The sample tested by



Date: 2022-03-03



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2022-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2021-07-02	2024-07-01
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2022-01-14	2023-01-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/F A		2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2022-01-05	2023-01-04

#### 2.2 Automation Test Software

### For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

### For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-03-03



#### 3.0 Technical Details

### 3.1 Summary of test results

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	<b>Conducted Emission Test</b>	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
CC Part 15, Paragraph 15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit:	PASS	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

### 4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


**Table 15.209** 

Date: 2022-03-03



#### **5.0 Power Line Conducted Emission Test**

#### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

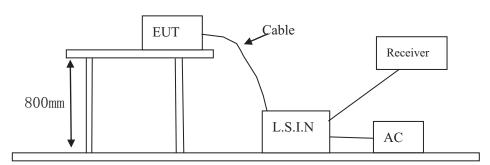

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	Manufacturer	Model	FCC ID
IEEE 802.11a/b/g/n/ac 867Mbps WLAN	Shenzhen Bilian	BL-M7663BU4	2AL6KBL-M7663BU4
+ Bluetooth v5.1 USB Combo Module	Electronic Co.,Ltd.	DL-1/11/003DU4	ZALONDL-MI/003DU4

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2202033-02E Page 9 of 45

Date: 2022-03-03



#### B. Internal Device

Device	Manufacturer	Model	Rating

### C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (d	lB μ V)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2022-03-03



### A: Conducted Emission on Live Terminal (150kHz to 30MHz)


### **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Keep Bluetooth Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

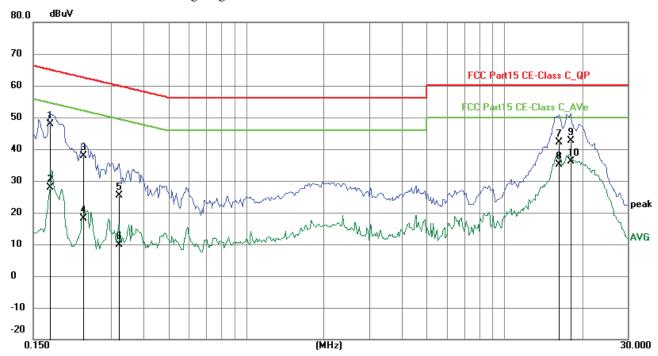

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1740	38.03	9.77	47.80	64.77	-16.97	QP	Р
2	0.1740	18.15	9.77	27.92	54.77	-26.85	AVG	Р
3	0.2341	28.24	9.75	37.99	62.30	-24.31	QP	Р
4	0.2341	8.50	9.75	18.25	52.30	-34.05	AVG	Р
5	0.3217	15.68	9.76	25.44	59.66	-34.22	QP	Р
6	0.3217	0.22	9.76	9.98	49.66	-39.68	AVG	Р
7	16.1858	31.75	10.45	42.20	60.00	-17.80	QP	Р
8	16.1858	24.62	10.45	35.07	50.00	-14.93	AVG	Р
9	18.0579	32.04	10.56	42.60	60.00	-17.40	QP	Р
10	18.0579	25.61	10.56	36.17	50.00	-13.83	AVG	Р

Date: 2022-03-03



### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Keep Bluetooth Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

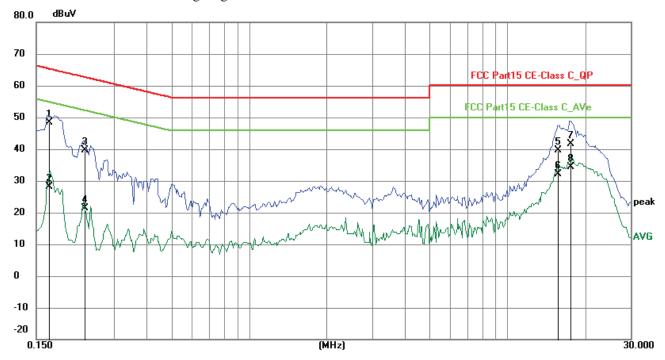

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1677	38.58	9.77	48.35	65.07	-16.72	QP	Р
2	0.1677	18.24	9.77	28.01	55.07	-27.06	AVG	Р
3	0.2304	29.95	9.75	39.70	62.44	-22.74	QP	Р
4	0.2304	11.74	9.75	21.49	52.44	-30.95	AVG	Р
5	15.7179	29.27	10.42	39.69	60.00	-20.31	QP	Р
6	15.7179	21.76	10.42	32.18	50.00	-17.82	AVG	Р
7	17.5677	31.00	10.53	41.53	60.00	-18.47	QP	Р
8	17.5677	23.81	10.53	34.34	50.00	-15.66	AVG	Р

Page 12 of 45

Report No.: TW2202033-02E

Date: 2022-03-03




#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**


For radiated emissions from 9kHz to 30MHz

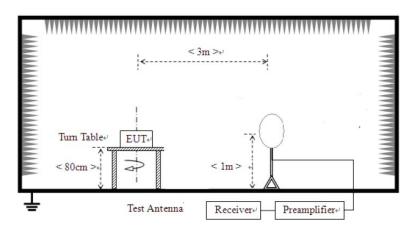


Date: 2022-03-03



For radiated emissions from 30MHz to1GHz

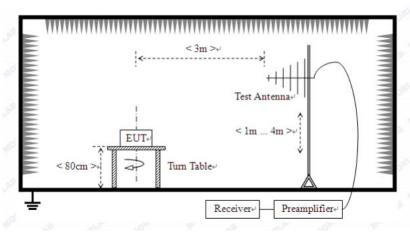

For radiated emissions above 1GHz

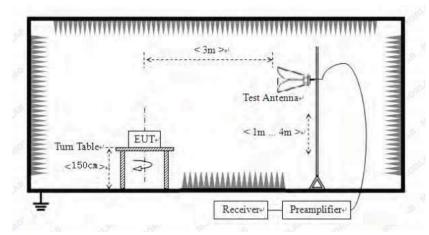

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2202033-02E Page 14 of 45

Date: 2022-03-03



### Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Date: 2022-03-03



#### **Test result**

#### General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition:** Keep Bluetooth Transmitting

**Results:** Pass

### Test Figure:

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(0)	(cm)		
1	228.800	22.91	-12.72	46.0	-23.09	Peak	91.00	100	Horizontal	Pass
2	399.720	24.19	-8.57	46.0	-21.81	Peak	191.00	100	Horizontal	Pass
3	425.176	24.85	-8.21	46.0	-21.15	Peak	11.00	100	Horizontal	Pass
4	799.745	29.17	-2.97	46.0	-16.83	Peak	93.00	100	Horizontal	Pass

Date: 2022-03-03



#### Test result

#### General Radiated Emission Data and Harmonics Radiated Emission Data

#### Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

**Results:** Pass

### Test Figure:

FCC. FCC Part 15C Class B 30MHz-1GHz

70

40

30

30

50

100

Frequency (MHz)

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	399.720	24.22	-8.57	46.0	-21.78	Peak	116.00	100	Vertical	Pass
2	446.996	23.18	-8.06	46.0	-22.82	Peak	312.00	100	Vertical	Pass
3	597.066	28.98	-5.09	46.0	-17.02	Peak	64.00	100	Vertical	Pass
4	798.775	29.84	-3.01	46.0	-16.16	Peak	168.00	100	Vertical	Pass

Report No.: TW2202033-02E Page 17 of 45


Date: 2022-03-03



### Test Figures above 1GHz:

Please refer to the following test plots for details:

#### Low Channel: Horizontal

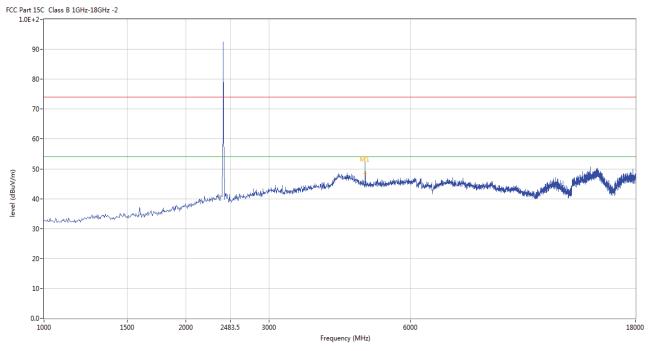

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	54.03	3.12	74.0	-19.97	Peak	151.00	100	Horizontal	Pass
1**	4802.799	48.36	3.12	54.0	-5.64	AV	151.00	100	Horizontal	Pass


Page 18 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



#### Low Channel: Vertical

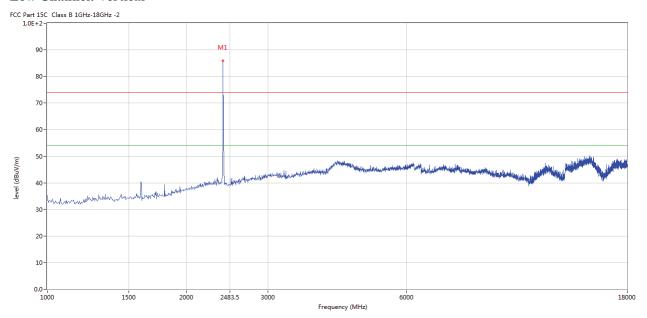


Page 19 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



#### Middle Channel: Horizontal

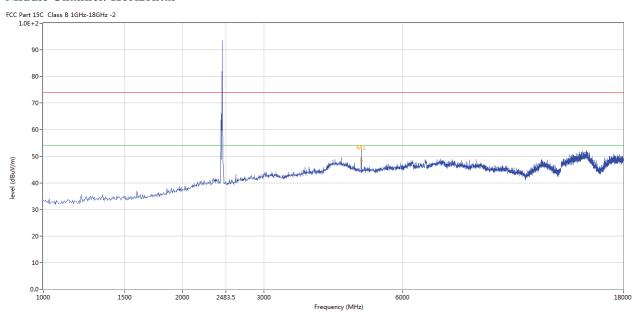

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	4879.280	53.78	3.20	74.0	-20.22	Peak	153.00	100	Horizontal	Pass
1**	4879.280	48.31	3.20	54.0	-5.69	AV	153.00	100	Horizontal	Pass


Page 20 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



#### Middle Channel: Vertical

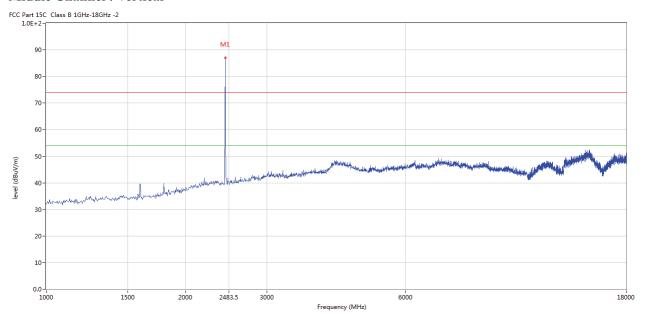


Page 21 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



### **High Channel: Horizontal**

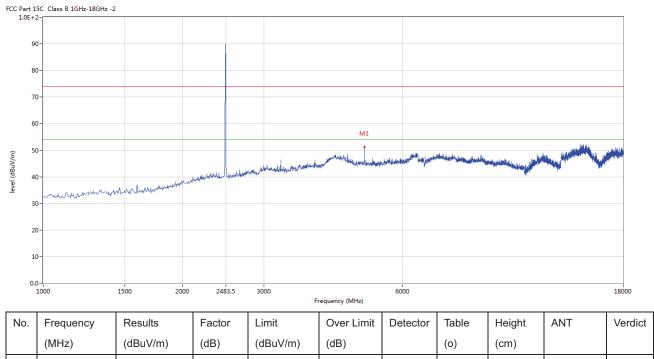

ſ	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
ſ	1	4960.010	51.31	3.36	74.0	-22.69	Peak	219.00	100	Horizontal	Pass


Page 22 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



### **High Channel: Vertical**

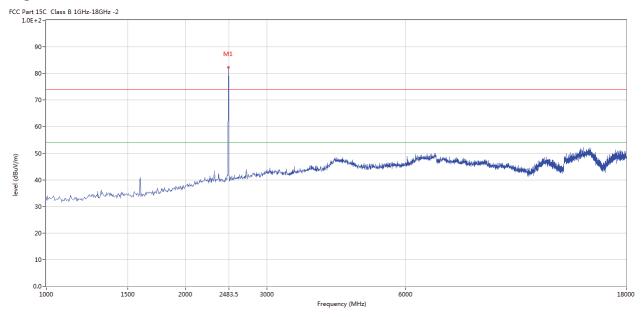

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 23 of 45


Report No.: TW2202033-02E

Date: 2022-03-03



### 7.0 6dB Bandwidth Measurement

### 7.1 Test Setup



#### 7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

### 7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW)  $\geq$  3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 7.4 Test Result

Report No.: TW2202033-02E Page 24 of 45

Date: 2022-03-03



#### 6dB BW

uD D II				
EUT	1	y/n/ac 867Mbps WLAN + USB Combo Module	Model	BL-M7663BU4
Mode	Keep	Transmitting	Input Voltage	DC5.0V
Temperat	ure 2	4 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Lir (kHz)	mit Pass/ Fail
Low	2402	697	500	Pass
Middle	2440	697	500	Pass
High	2480	697	500	Pass

Page 25 of 45

Report No.: TW2202033-02E


Date: 2022-03-03



### Test Figure:

Date:

### 1. Condition: Low Channel

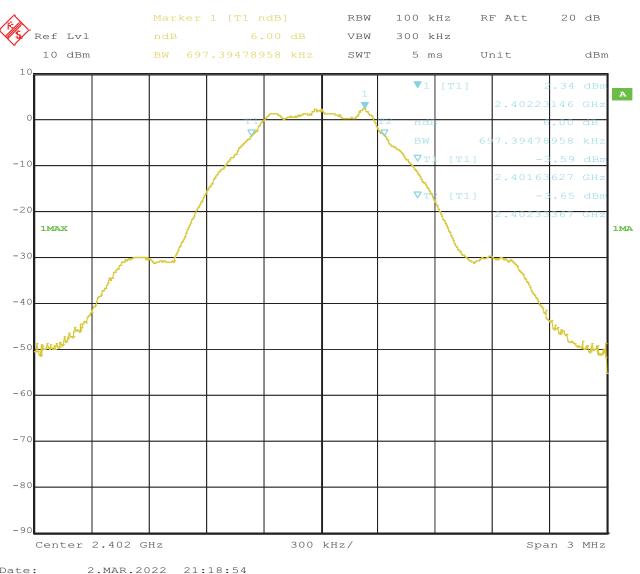


Page 26 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



#### 2. Condition: Middle Channel

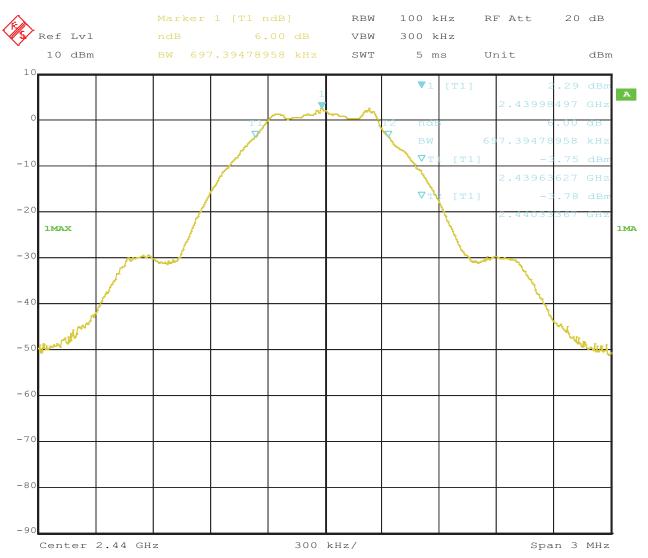


Date: 2.MAR.2022 21:17:22

Report No.: TW2202033-02E Page 27 of 45

Date: 2022-03-03



### 3. High Channel

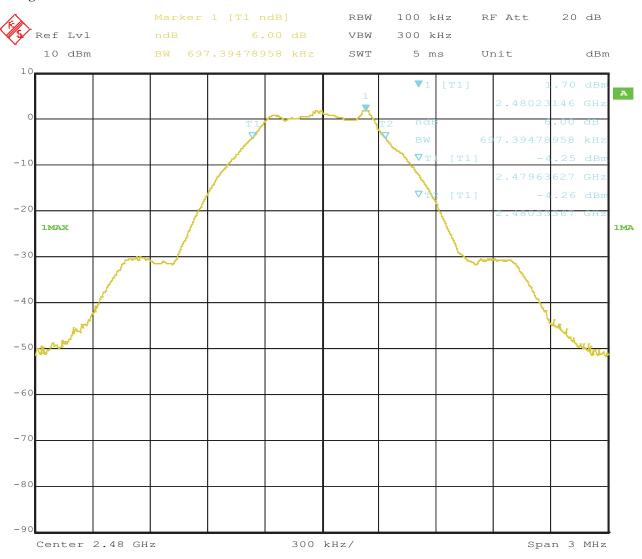

Date: 2.MAR.2022 21:16:45


Report No.: TW2202033-02E Page 28 of 45

Date: 2022-03-03



### 8. Maximum Output Power

### 8.1 Test Setup



#### 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### **8.3 Test Procedure**

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: TW2202033-02E Page 29 of 45

Date: 2022-03-03



#### **8.4Test Results**

EUT			z/n/ac 867Mbps WLAN + USB Combo Module	Model		BL	-M7663BU4
Mode		Keep	Transmitting	Input Volta	ge		DC5.0V
Temperatu	re	2	4 deg. C,	Humidity	7		56% RH
Channel	Cł	nannel Frequency	Max. Power Output	(dBm)		Power imit	Pass/ Fail
Chamier		(MHz)	Peak			lBm)	
Low		2402	4.28			30	Pass
Middle		2440	4.16			30	Pass
High		2480	3.71			30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

Page 30 of 45


Report No.: TW2202033-02E

Date: 2022-03-03



### 9. Power Spectral Density Measurement

### 9.1 Test Setup



#### 9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

#### 9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW  $\geq$  30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be  $\leq 8 \text{ dBm/3kHz}$ .

Report No.: TW2202033-02E Page 31 of 45

Date: 2022-03-03



#### 9.4Test Result

EUT		C	867Mbps WLAN + Combo Module		Model	BL-M7663BU4
Mode		Keep Transı	nitting	In	put Voltage	DC5.0V
Temperatur	е	24 deg.	C,		Humidity	56% RH
Channel	Peak Power Reading (dBm)	Cable Loss (dB)	Final Power Spects Density (dBm/10kHz)	ral	Maximum Limit (dBm/3kHz)	Pass/ Fail
Low	-6.88	0.2	-6.68		8	Pass
Middle	-7.01	0.2	-6.81		8	Pass
High	-7.39	0.2	-7.19		8	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 32 of 45


Report No.: TW2202033-02E

Date: 2022-03-03



### Test Figure:

### 1. Condition: Low Channel

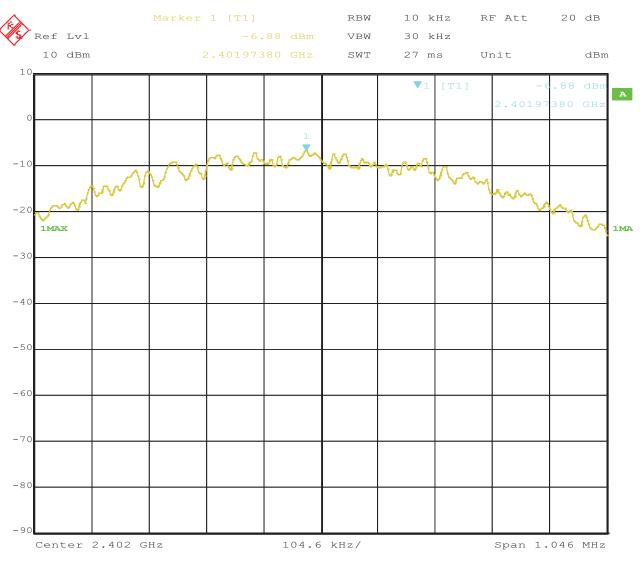

Date: 2.MAR.2022 21:21:56


Page 33 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



#### 2. Condition: Middle Channel

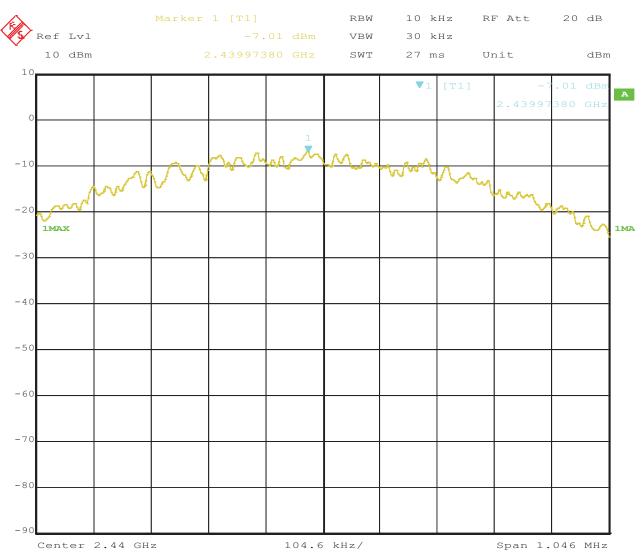

Date: 2.MAR.2022 21:21:25


Page 34 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



### 3. High Channel

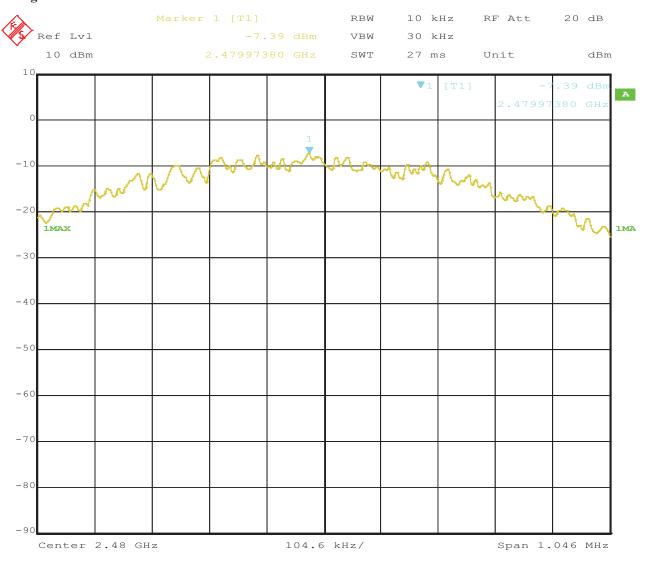

Date: 2.MAR.2022 21:20:38


Page 35 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



## 10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

#### 10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### **10.3 Test Procedure**

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

#### 10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 36 of 45

Report No.: TW2202033-02E


Date: 2022-03-03



### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB Combo Module	Model	BL-M7663BU4
Mode	Keep Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

### **Test Figure:**

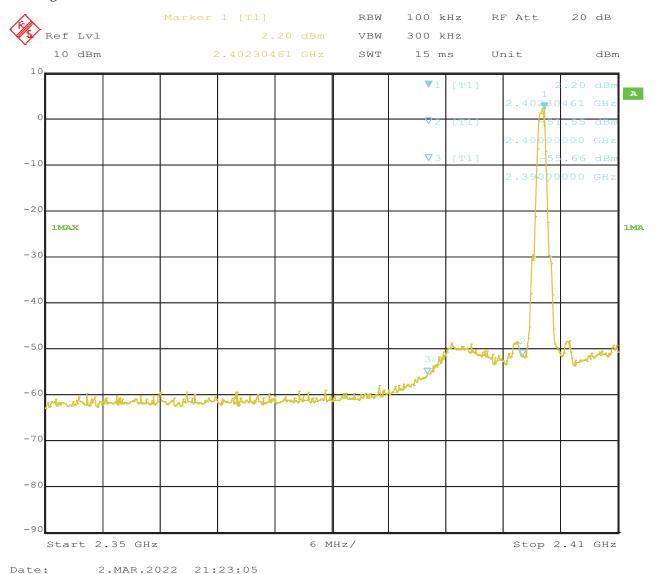

Page 37 of 45

Report No.: TW2202033-02E


Date: 2022-03-03



### 10.4 Band-edge Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB Combo Module	Model	BL-M7663BU4
Mode	Keeping Transmitting	Input Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

## **Test Figure:**

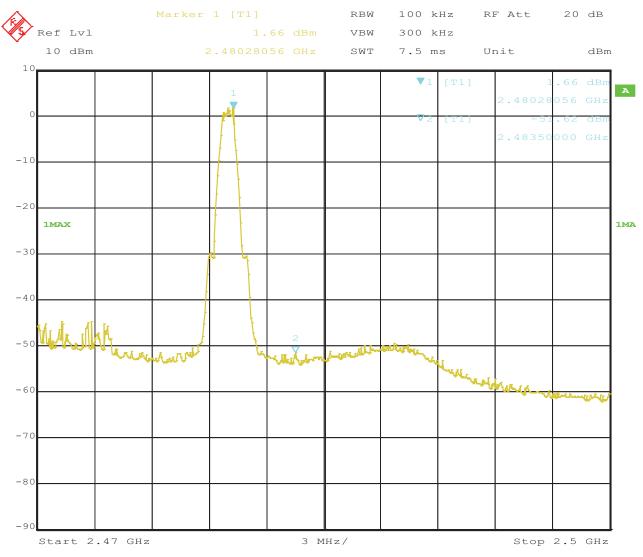

Date: 2.MAR.2022 21:25:16

Report No.: TW2202033-02E Page 38 of 45

Date: 2022-03-03



#### 10.4 Restrict Band Measurement

	EUT			n/ac 867Mbps USB Combo		N	Model		BL-M7663	BU4
	Mode	Bittette		ransmitting	1410daic	Inpu	t Voltage	;	DC5.0V	J
Те	mperature			deg. C,			ımidity		56% RI	-I
Те	est Result:		]	Pass						
1.0E+	15C Class B 1GHz-18GHz 2- 10-	-2								
5		de Afficia na common de altra por de la common de la commo	ll tool health grip who we have be	ught dies the step in prompte in 1900 see, as	ikakasasi nelajakasi pradelikasi	M1	johnne sille de die de	** House de par	Why	n de como
. 5		delffersærsssærskellige het here plan he here	li and a sold sold grip who was to the	uzel-deka (da <u>planeastaren bere 1</u> 800aa. ar	المراحية والمراجع المادية	M. T. Walter Hard Market Marke	idense Alle of the first hand to have been been been been been been been be	***	WHAT	ride warv
5		derleten an en sement de lette de set de lette de la description d	li tari kalifaliketi yili saksi da	usalidaka (diplomonomentaria) Principus	يفرعون والمراجع والمراجع والمناوية	MAT I MANAGEMENT OF THE PROPERTY OF THE PROPER	jirgelijah terakelan kila	* House	When	eride water
5 4 3	0	derleten nersemment delten der det den eine der der der der der der der der der de	ll-tool-kall-talkephysioseks;,,de	usalisha da shakarararaka a Parasi a sa	ياد المنافقة	M.1	inglighte in the south	*Hand	wheel and the second	g de con
5 4 3 2 1	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	derlegen and secure to the desire desired by the second secure to the second second second second second second	ll contablishing phonos such		Frequency (MHz)	Manufactured black think the	identification of the second	**	W House	2410
. 5 . 4 . 3 . 2	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	Results (dBuV/m)	Factor (dB)			Detector	Table (o)	Height (cm)	ANT	

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2202033-02E Page 39 of 45

Date: 2022-03-03



#### **10.4** Restrict Band Measurement

	EUT		_	c 867Mbps W B Combo Mo		M	lodel		BL-M766	63BU4
	Mode		Keep Tran	nsmitting		Input	Voltage		DC5.	0V
Те	emperature		24 de	eg. C,		Hu	midity		56% I	RH
Т	est Result:		Pa	SS						
C Part 1.0E-	15C Class B 1GHz-18GHz +2-	-2								
9	90-							$\sim$		
	80-								\	
	70-								1	
								/	\	
								/	\	
	60-									
	50-					.				
	50-	alee laskisha a saasa la saa	akhikabay aykabahayasa	بالإنجاب والمتلافل عداقا للإلاال	hadddahaaa habaallaa kaadd				V. Appeld	hiptoria.
	50-	al coulombibles, and subscribe to an	allel in the mid-ball income	والمعادلة	rallelphas a populous reads	Market	المالية	All Assessed	No.	hadipositiva
	50- 40- <u>1) ka abbata ay ini abb</u>	al you hand the hand the say	allel to describe to tener	يميدن أيفارن والمراف ألماني والمراف والمراف والمرافع المرافع والمرافع والمرافع والمرافع والمرافع والمرافع والم	ivallelphanaineanteristrate	dele Marie	المراما	All Assessed	Moreld	hydronia.
	50- 40-1, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4, 14-4	al coulombishes and subscribe to an	diditivalent super de la constitución de la constit	ينوشون أستان المتحافظ	keillelydssegindyssikeistenske	de la Maria	أربيا المالية المجازية	Alfr. s. grand	V <sub>ert</sub>	hydroren et
. !	50- 40- <u>1) ka abbata ay ini ab</u>	al you hardest him and the major the way	allel to describe the trees	endered zieholdelighenden (Abbehende zu zu zuschieb	veillelydd ac air ddigwydd ac arfel	ululu and the state of the stat	براه امخاله براه المهادي	All Marie Ma	Version	hydyraeta
	30	alicante de la constitución de con	did its decimbed in sec	sodat O kidd dd son a lleb bon a frai a saesid	ke Mehod za jado jednoj živado	delete by the Marie	المهالم المعالم	Alfr. s. grand	V <sub>ert</sub>	m V
:	40-11-11-11-11-11-11-11-11-11-11-11-11-11	algoritation of the second	allality described types		quency (MHz)	Market Market	policy of the state of the stat	Althorage and the second of th	March	2410
:	30	Results	Factor			Detector	Table	Height	ANT	2410
:	30			Fre	quency (MHz)			Height (cm)	1999	m V

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.


Report No.: TW2202033-02E Page 40 of 45

Date: 2022-03-03



#### 10.4 Restrict Band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB Combo Module	Model	BL-M7663BU4		
Mode	Keep Transmitting	Input Voltage	DC5.0V		
Temperature	Temperature 24 deg. C,		56% RH		
Test Result:	Pass				

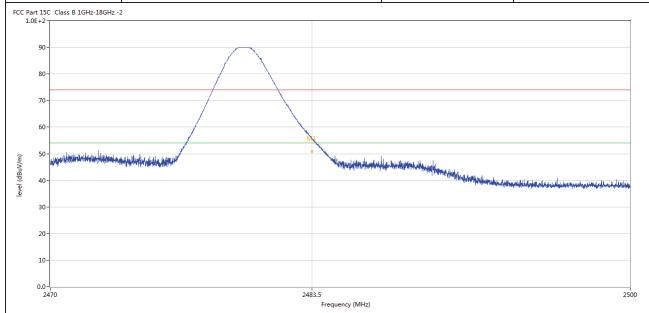

	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(0)	(cm)		
	1	2483.497	55.86	-3.57	74.0	-18.14	Peak	146.00	100	Horizontal	Pass
1**   2483.497   50.76   -3.57   54.0   -3.24   AV   146.00   100   Hc	1**	2483.497	50.76	-3.57	54.0	-3.24	AV	146.00	100	Horizontal	Pass


Report No.: TW2202033-02E Page 41 of 45

Date: 2022-03-03



#### 10.4 Restrict Band Measurement

EUT	IEEE 802.11a/b/g/n/ac 867Mbps WLAN + Bluetooth v5.1 USB Combo Module	Model	BL-M7663BU4		
Mode	Keep Transmitting	Input Voltage	DC5.0V		
Temperature	Temperature 24 deg. C,		56% RH		
Test Result:	Pass				

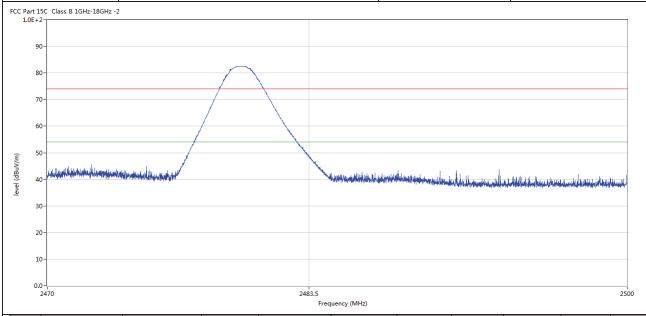

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2483.474	48.82	-3.57	74.0	-25.18	Peak	192.00	100	Vertical	Pass

Date: 2022-03-03



Page 42 of 45

### 11.0 Antenna Requirement

### 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 11.2 Antenna Connected construction

Ceramic antenna used. The gain of the antennas is 2.0dBi (Get from the antenna specification provided the manufacturer)

Report No.: TW2202033-02E Page 43 of 45

Date: 2022-03-03




#### 12.0 FCC ID Label

### FCC ID: 2AL6KBL-M7663BU4

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

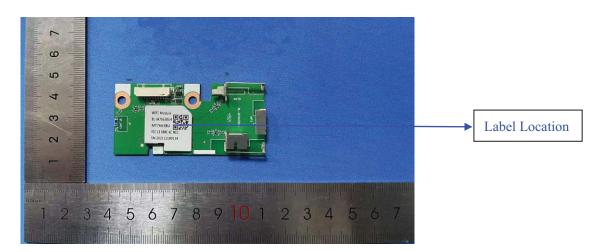

Page 44 of 45

Report No.: TW2202033-02E

Date: 2022-03-03



#### 13.0 **Photo of testing**


Conducted Emission Test Setup:



Date: 2022-03-03



### Radiated Emission Test Setup:

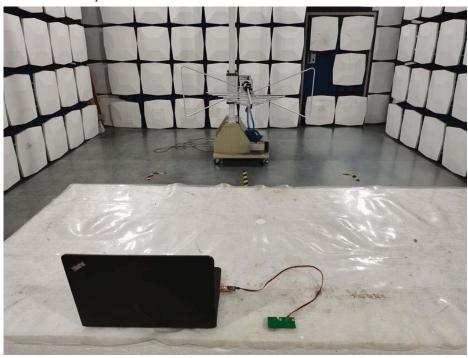



Photographs - EUT

Please refer test report TW2202033-01E

## End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.