

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/3

System Check_Head_5250MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_5G_241203 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.793$ S/m; $\epsilon_r = 36.65$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.46, 4.11, 5.36) @ 5250 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.6 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.17 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 4.18 W/kg; SAR(10 g) = 1.2 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 10.5 W/kg

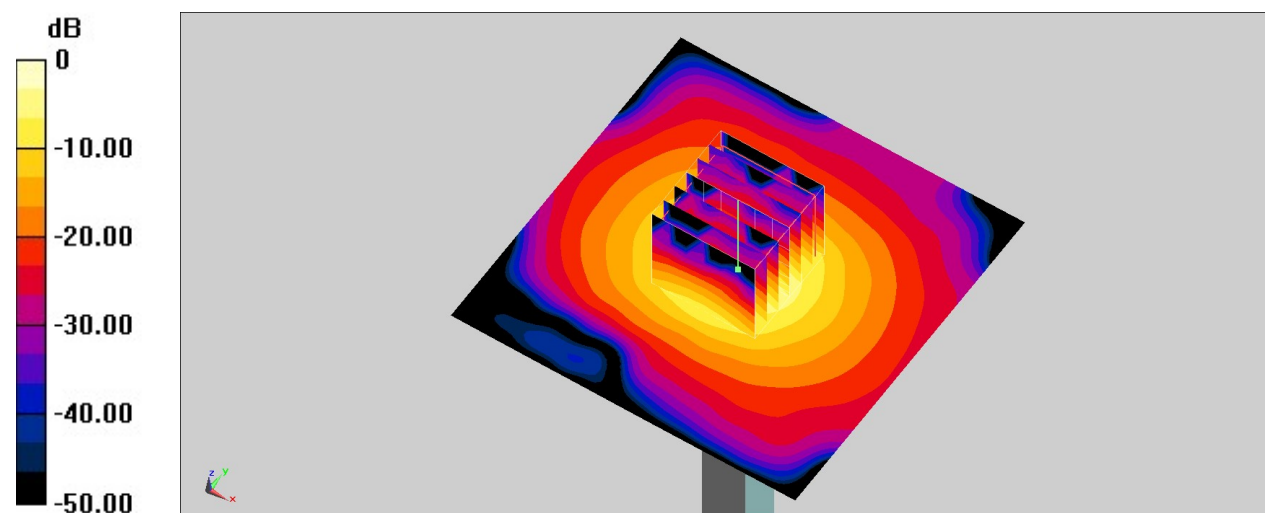

0 dB = 10.5 W/kg = 10.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/7

System Check_Head_5250MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_5G_241207 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.685$ S/m; $\epsilon_r = 36.393$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.46, 4.11, 5.36) @ 5250 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.3 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.17 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 4.09 W/kg; SAR(10 g) = 1.17 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 10.3 W/kg

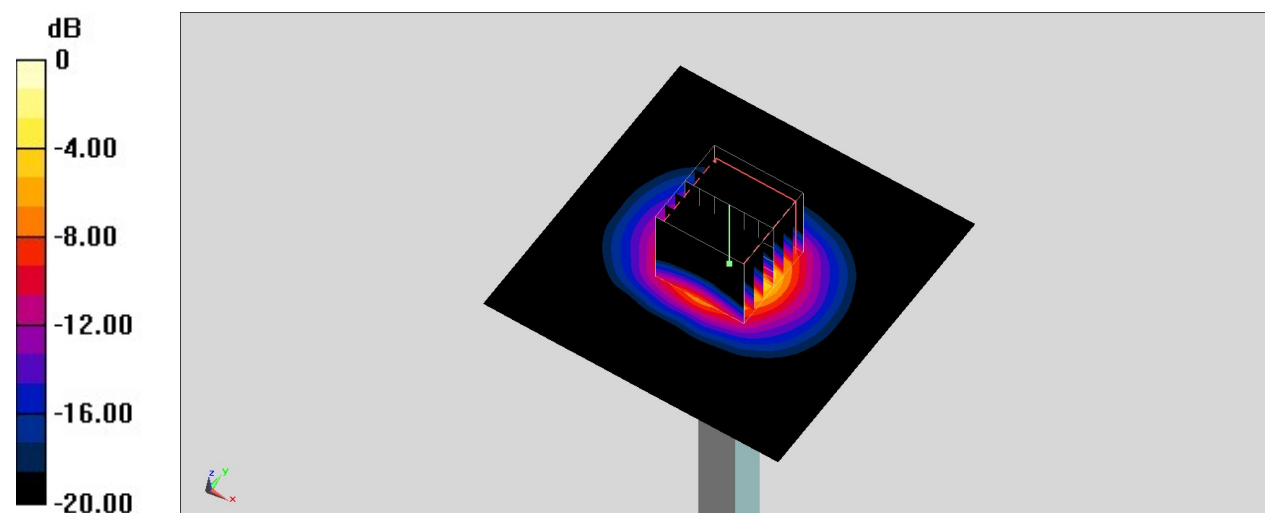

0 dB = 10.3 W/kg = 10.13 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/11

System Check_Head_5250MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5250 MHz

Medium: HSL_5G_241211 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.828$ S/m; $\epsilon_r = 36.787$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.46, 4.11, 5.36) @ 5250 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.6 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.28 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 1.21 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 10.5 W/kg

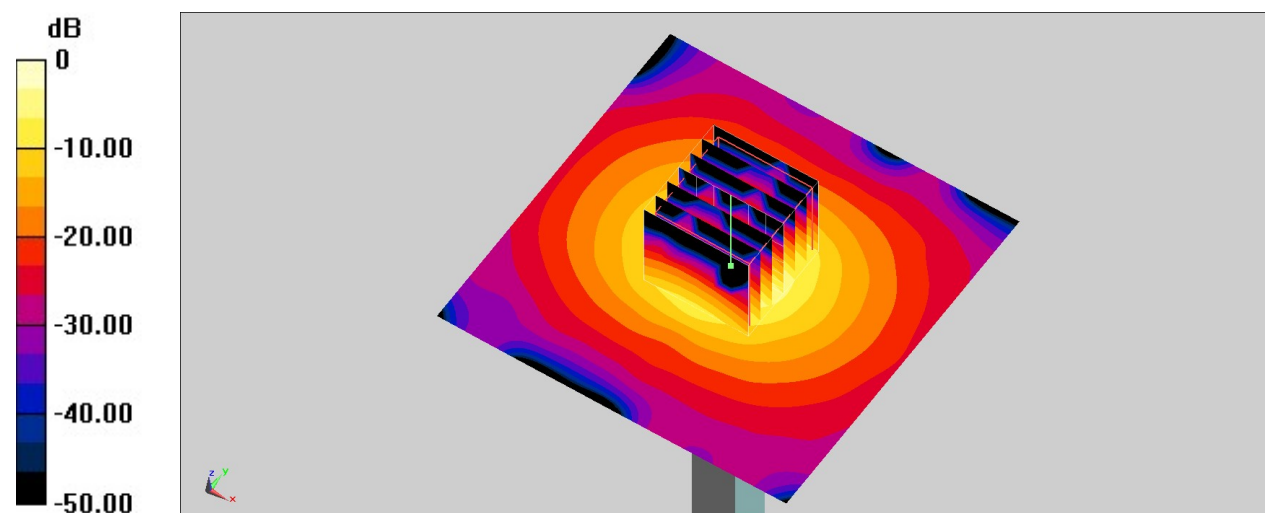

0 dB = 10.5 W/kg = 10.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/20

System Check_Head_5600MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5600 MHz

Medium: HSL_5G_241120 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.92$ S/m; $\epsilon_r = 34.508$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(3.96, 3.67, 4.73) @ 5600 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.66 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 48.24 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 3.75 W/kg; SAR(10 g) = 1.11 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 9.59 W/kg

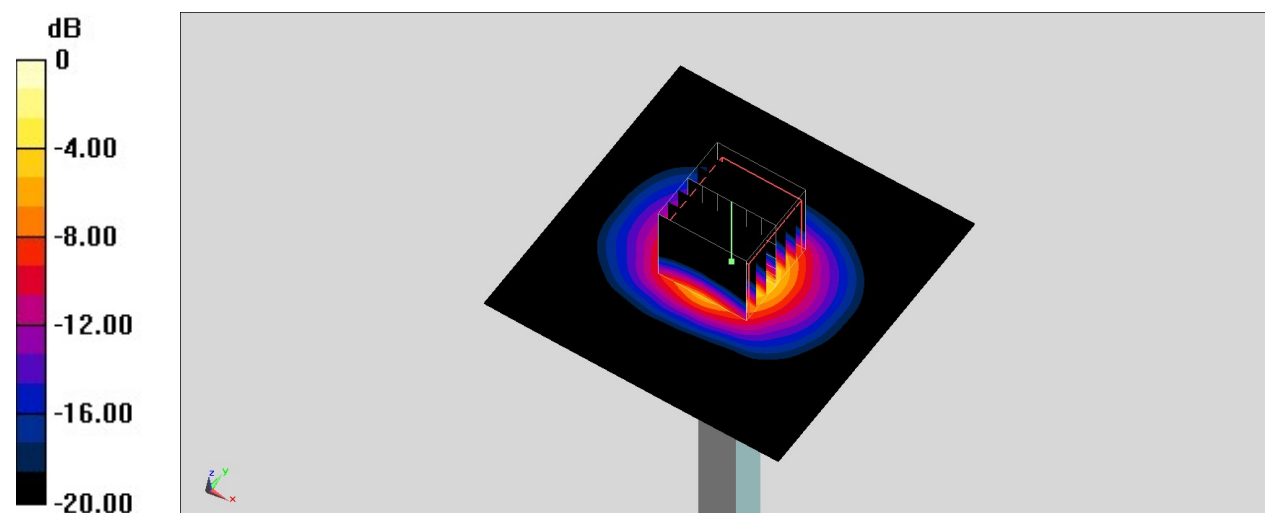

0 dB = 9.59 W/kg = 9.82 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/7

System Check_Head_5600MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5600 MHz

Medium: HSL_5G_241207 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.913$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(3.96, 3.67, 4.73) @ 5600 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.8 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 52.09 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 4.43 W/kg; SAR(10 g) = 1.25 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 11.7 W/kg

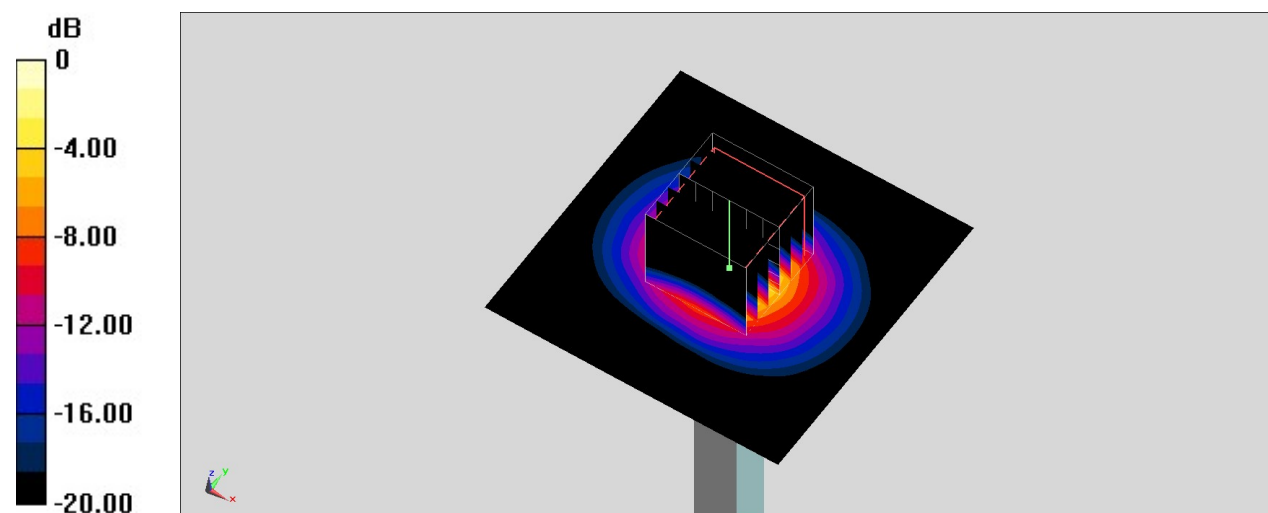

0 dB = 11.7 W/kg = 10.68 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/11

System Check_Head_5600MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5600 MHz

Medium: HSL_5G_241211 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.176$ S/m; $\epsilon_r = 36.327$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(3.96, 3.67, 4.73) @ 5600 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.2 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 48.24 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.95 W/kg; SAR(10 g) = 1.16 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 10.1 W/kg

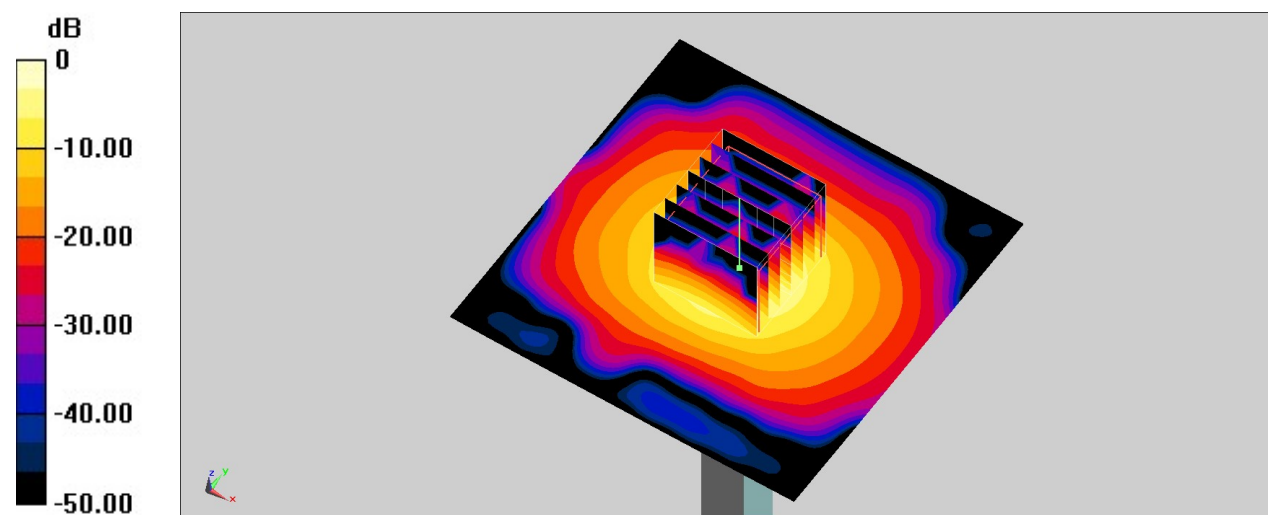

0 dB = 10.1 W/kg = 10.04 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/11/21

System Check_Head_5800MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5800 MHz

Medium: HSL_5G_241121 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.119$ S/m; $\epsilon_r = 34.567$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.03, 3.72, 4.8) @ 5800 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.1 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.00 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 3.9 W/kg; SAR(10 g) = 1.14 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 10.1 W/kg

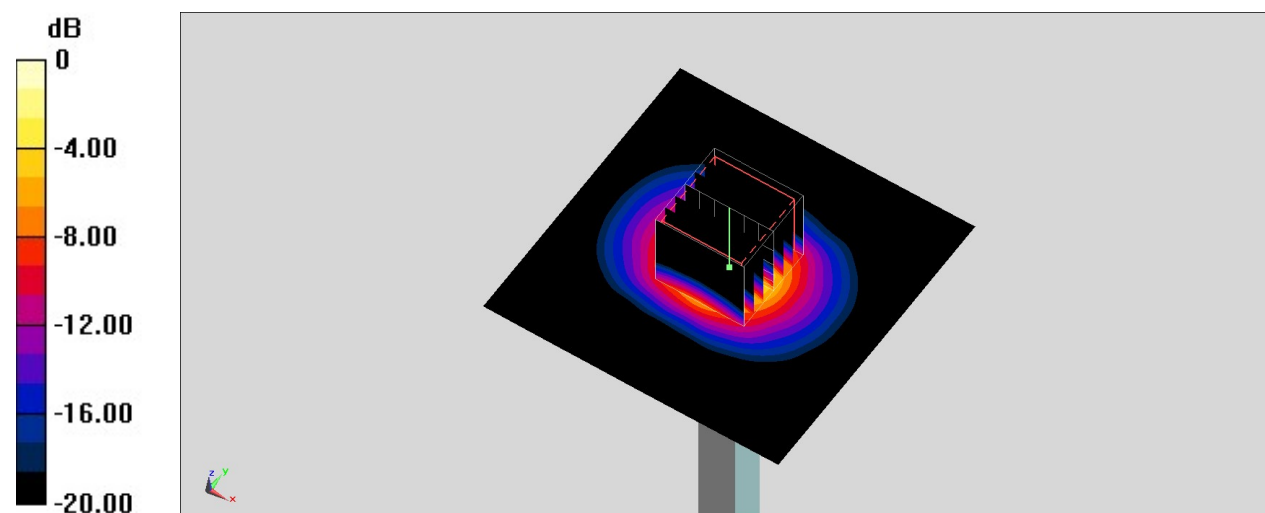

0 dB = 10.1 W/kg = 10.04 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/3

System Check_Head_5800MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5800 MHz

Medium: HSL_5G_241203 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 35.953$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.03, 3.72, 4.8) @ 5800 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.6 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.00 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 4.08 W/kg; SAR(10 g) = 1.19 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 10.5 W/kg

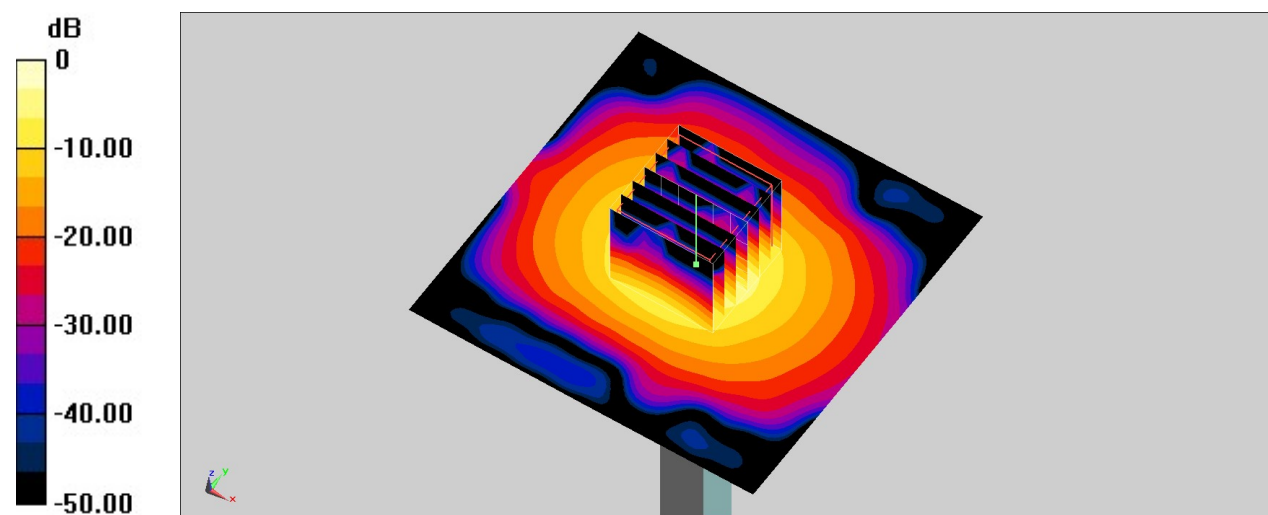

0 dB = 10.5 W/kg = 10.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/7

System Check_Head_5800MHz**DUT: D5GHzV2-1171**

Communication System: CW; Frequency: 5800 MHz

Medium: HSL_5G_241207 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.244$ S/m; $\epsilon_r = 35.676$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.03, 3.72, 4.8) @ 5800 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.4 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.00 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 3.99 W/kg; SAR(10 g) = 1.16 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 10.3 W/kg

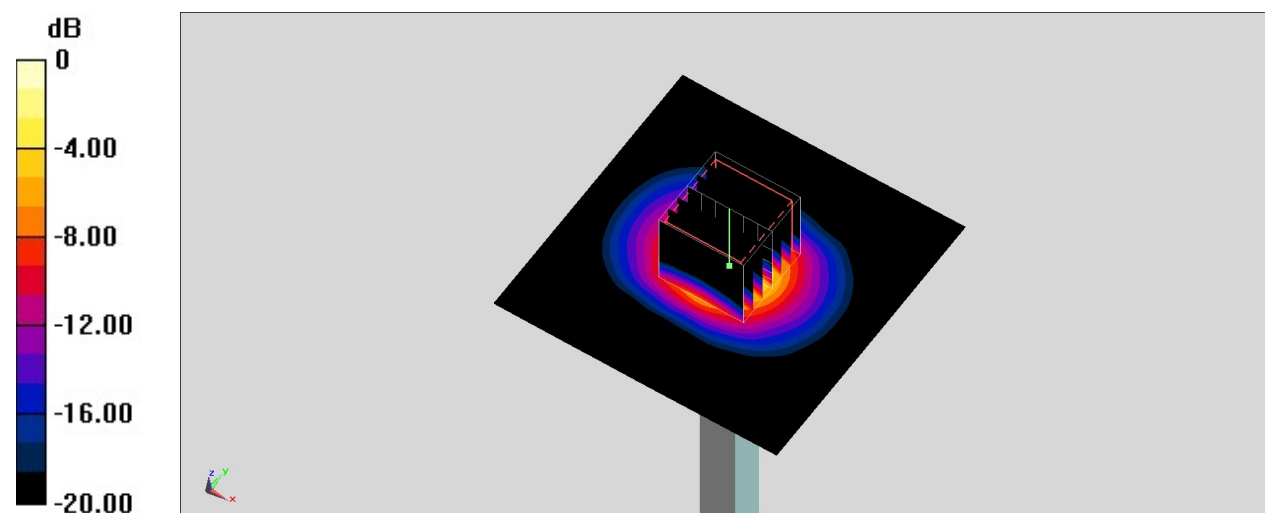

0 dB = 10.3 W/kg = 10.13 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2024/12/11

System Check_Head_5800MHz

DUT: D5GHzV2-1171

Communication System: CW; Frequency: 5800 MHz

Medium: HSL_5G_241211 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.399$ S/m; $\epsilon_r = 36.09$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.03, 3.72, 4.8) @ 5800 MHz; Calibrated: 2024/4/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1512; Calibrated: 2024/3/14
- Phantom: ELI V4.0_Right; Type: QD OVA 001 BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Pin=50mW/Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.7 W/kg

Pin=50mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.00 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 4.11 W/kg; SAR(10 g) = 1.2 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 10.6 W/kg

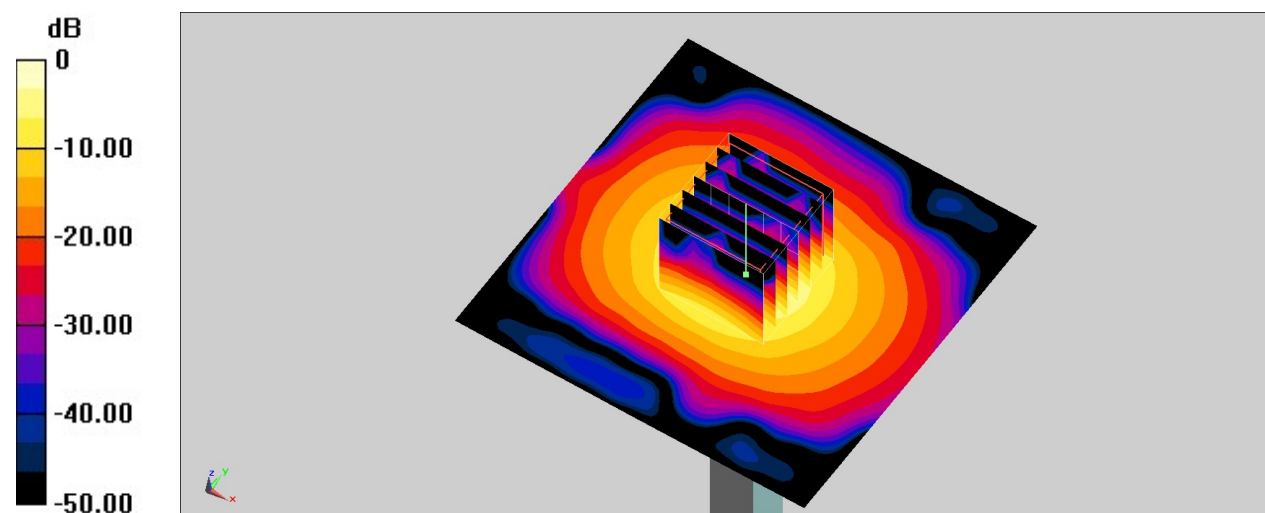

0 dB = 10.6 W/kg = 10.25 dBW/kg

Date: 2024-11-19

System Check_Head_6500MHz**DUT: D6.5GHzV2 - SN1003**

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_6G_241119 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.10$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.25, 4.81, 6.16); Calibrated: 2024-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2024-03-14
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: , 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 25.4 W/kg; SAR (10g) = 4.61 W/kg;


Pin=20.0dBm/Zoom Scan (23.8 mm x 23.8 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 27.0 W/kg; SAR (8g) = 6.06 W/kg; SAR (10g) = 4.97 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.8 %

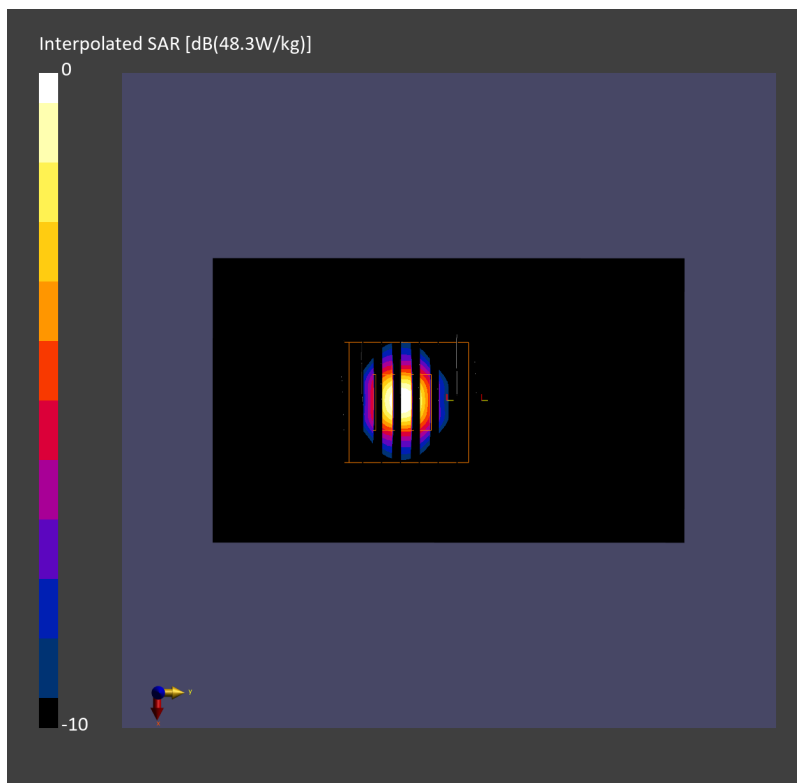psAPD (1.0cm², sq) = 270 [W/m²]; psAPD (4.0cm², sq) = 121 [W/m²]

Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	100.0 x 100.0 x 172.0	3.2.0.1840	5G Verification Source

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 10.00	10000.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2024–03–12	DAE4 Sn854, 2024–08–14

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Date	2024–11–24
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	55.4
psPDtot+ [W/m ²]	55.7
H _{max} [A/m]	0.449
E _{max} [V/m]	154
max _(Stot) [W/m ²]	66.2
Power Drift [dB]	0.03
IPDn	95.5

