


## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\9  
**Memo:** BLE 1M 2440 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

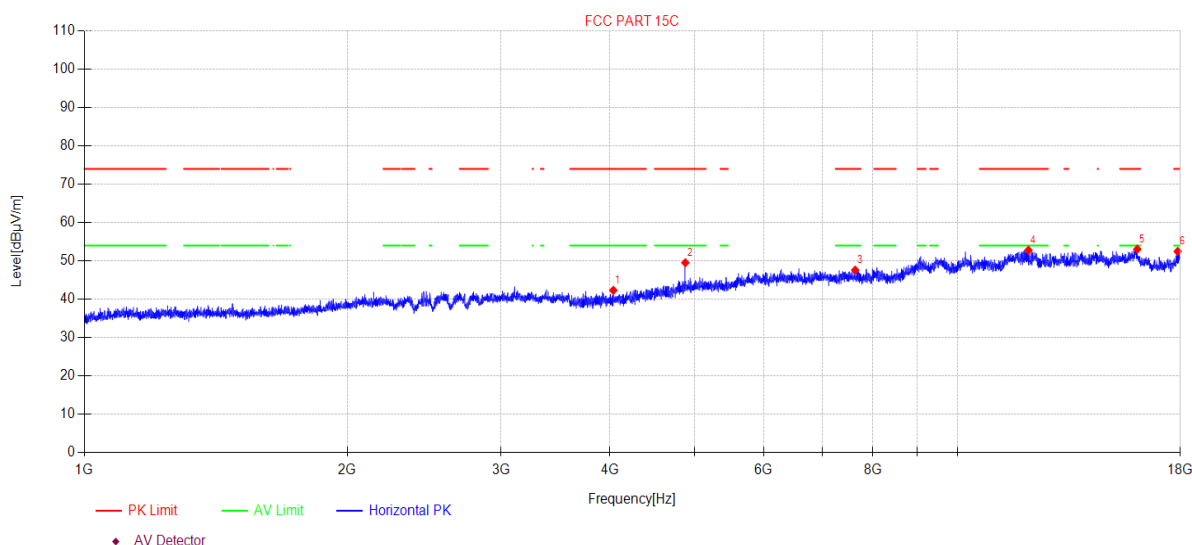

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4035.15     | 47.04            | 5.92            | 30.77               | -41.39   | 42.34          | 74.00          | 31.66       | PK       | Horizontal |
| 2    | 4878.91     | 50.48            | 7.63            | 32.56               | -41.14   | 49.53          | 74.00          | 24.47       | PK       | Horizontal |
| 3    | 7636.08     | 44.49            | 7.65            | 36.47               | -41.00   | 47.61          | 74.00          | 26.39       | PK       | Horizontal |
| 4    | 12058.94    | 42.18            | 10.54           | 39.02               | -38.96   | 52.78          | 74.00          | 21.22       | PK       | Horizontal |
| 5    | 16067.39    | 40.00            | 15.61           | 37.83               | -40.39   | 53.05          | 74.00          | 20.95       | PK       | Horizontal |
| 6    | 17875.58    | 39.13            | 12.98           | 41.03               | -40.65   | 52.49          | 74.00          | 21.51       | PK       | Horizontal |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\10  
**Memo:** BLE 1M 2440 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

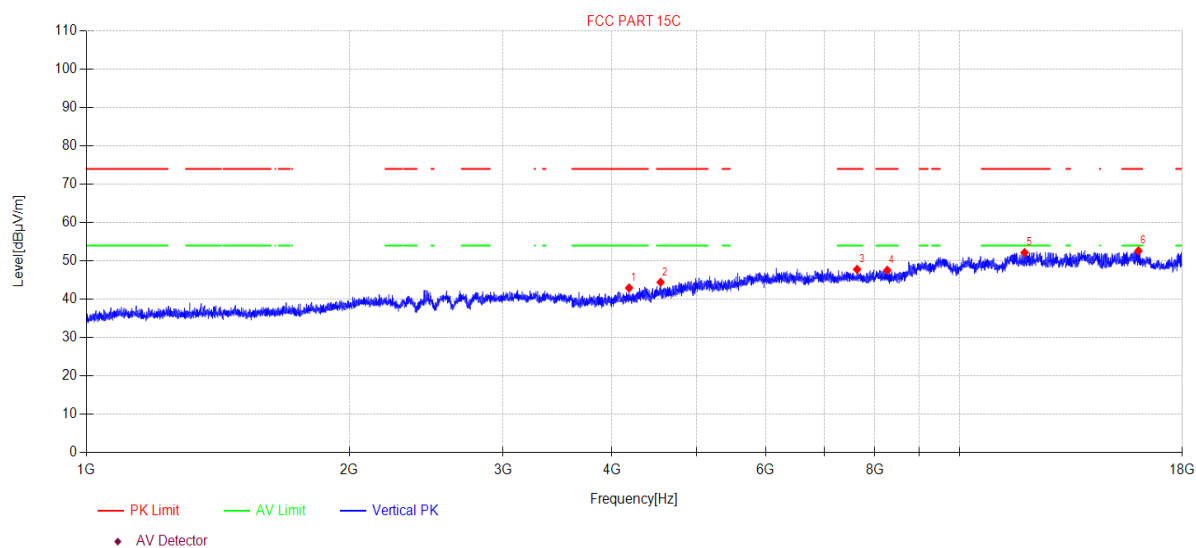

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4184.80     | 47.00            | 6.22            | 31.07               | -41.34   | 42.95          | 74.00          | 31.05       | PK       | Vertical |
| 2    | 4546.71     | 47.04            | 6.95            | 31.69               | -41.24   | 44.44          | 74.00          | 29.56       | PK       | Vertical |
| 3    | 7633.87     | 44.67            | 7.65            | 36.47               | -41.00   | 47.79          | 74.00          | 26.21       | PK       | Vertical |
| 4    | 8267.74     | 43.03            | 7.96            | 37.14               | -40.57   | 47.56          | 74.00          | 26.44       | PK       | Vertical |
| 5    | 11875.64    | 42.04            | 10.43           | 38.80               | -39.10   | 52.17          | 74.00          | 21.83       | PK       | Vertical |
| 6    | 16034.91    | 39.42            | 15.74           | 37.87               | -40.40   | 52.63          | 74.00          | 21.37       | PK       | Vertical |

### Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\11  
**Memo:** BLE 1M 2480 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

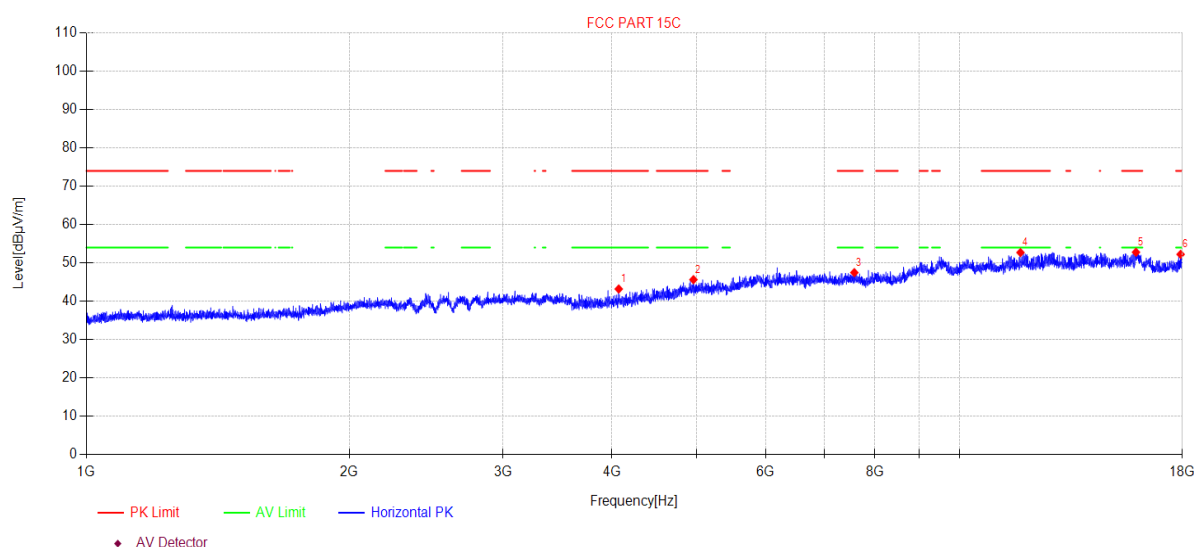

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4071.46     | 47.76            | 5.99            | 30.84               | -41.38   | 43.21          | 74.00          | 30.79       | PK       | Horizontal |
| 2    | 4958.51     | 46.16            | 7.79            | 32.80               | -41.11   | 45.64          | 74.00          | 28.36       | PK       | Horizontal |
| 3    | 7578.91     | 44.43            | 7.65            | 36.40               | -41.00   | 47.48          | 74.00          | 26.52       | PK       | Horizontal |
| 4    | 11745.93    | 42.91            | 10.31           | 38.80               | -39.31   | 52.71          | 74.00          | 21.29       | PK       | Horizontal |
| 5    | 15928.68    | 39.54            | 15.56           | 38.04               | -40.35   | 52.79          | 74.00          | 21.21       | PK       | Horizontal |
| 6    | 17916.96    | 38.58            | 13.03           | 41.30               | -40.67   | 52.24          | 74.00          | 21.76       | PK       | Horizontal |


### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\12  
**Memo:** BLE 1M 2480 L

### Test Graph

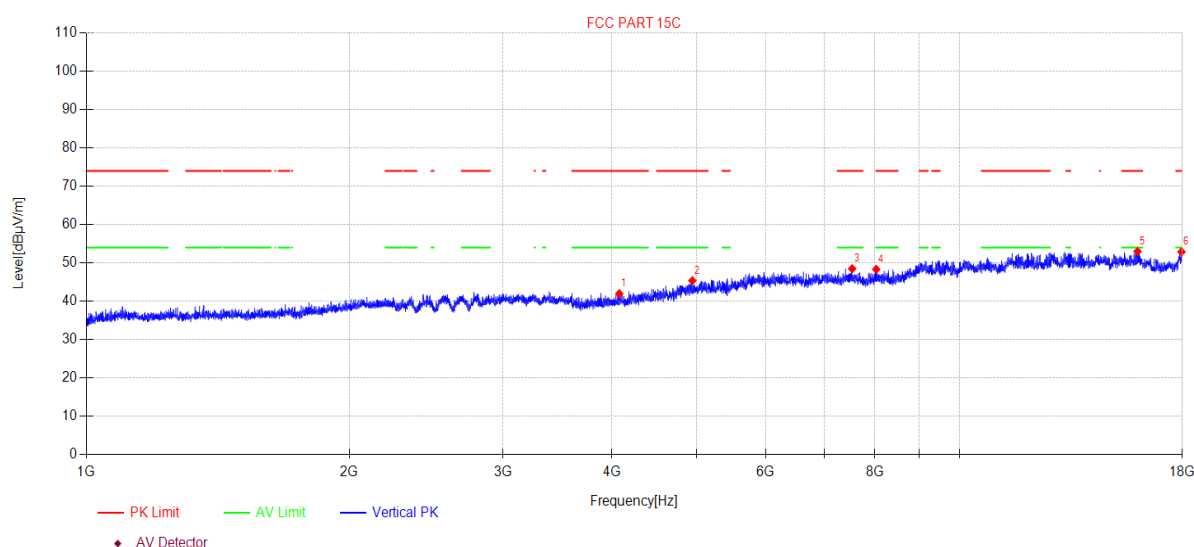

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4077.35     | 46.49            | 6.01            | 30.85               | -41.38   | 41.97          | 74.00          | 32.03       | PK       | Vertical |
| 2    | 4944.20     | 45.96            | 7.76            | 32.78               | -41.12   | 45.38          | 74.00          | 28.62       | PK       | Vertical |
| 3    | 7535.23     | 45.44            | 7.65            | 36.40               | -41.00   | 48.49          | 74.00          | 25.51       | PK       | Vertical |
| 4    | 8029.90     | 44.57            | 7.71            | 37.00               | -40.95   | 48.33          | 74.00          | 25.67       | PK       | Vertical |
| 5    | 15993.26    | 39.63            | 15.85           | 37.91               | -40.40   | 52.99          | 74.00          | 21.01       | PK       | Vertical |
| 6    | 17958.43    | 38.94            | 13.08           | 41.55               | -40.68   | 52.89          | 74.00          | 21.11       | PK       | Vertical |

### Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\13  
**Memo:** BLE 2M 2404 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

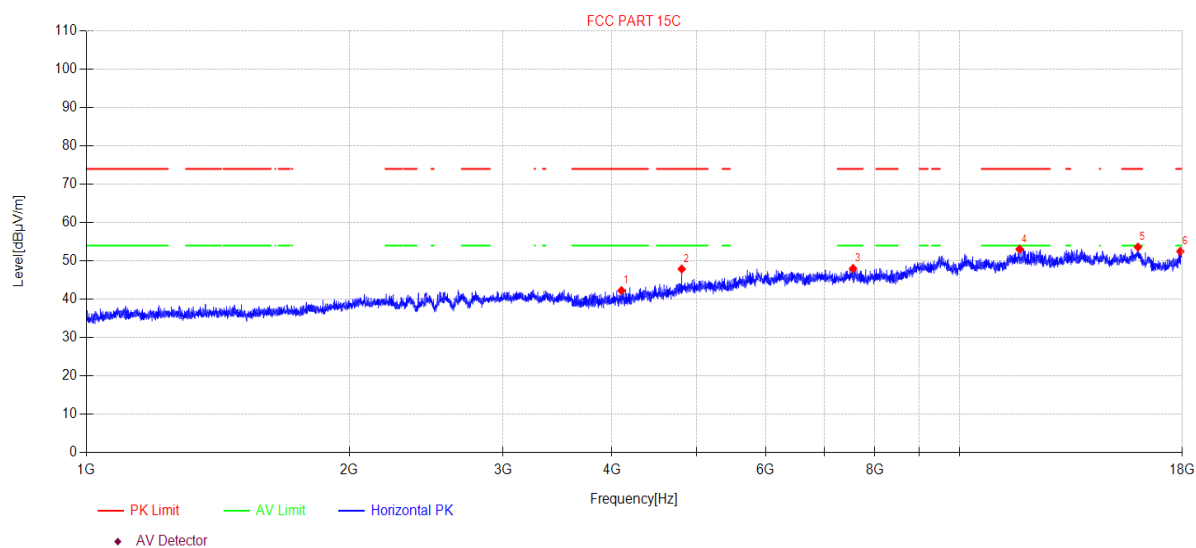

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4100.99     | 46.70            | 6.05            | 30.90               | -41.37   | 42.28          | 74.00          | 31.72       | PK       | Horizontal |
| 2    | 4807.52     | 49.23            | 7.48            | 32.33               | -41.16   | 47.88          | 74.00          | 26.12       | PK       | Horizontal |
| 3    | 7552.68     | 44.96            | 7.65            | 36.40               | -41.00   | 48.01          | 74.00          | 25.99       | PK       | Horizontal |
| 4    | 11718.80    | 43.32            | 10.29           | 38.80               | -39.35   | 53.06          | 74.00          | 20.94       | PK       | Horizontal |
| 5    | 16011.76    | 40.28            | 15.83           | 37.89               | -40.40   | 53.60          | 74.00          | 20.40       | PK       | Horizontal |
| 6    | 17906.60    | 38.89            | 13.02           | 41.24               | -40.66   | 52.49          | 74.00          | 21.51       | PK       | Horizontal |

### Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\14  
**Memo:** BLE 2M 2404 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

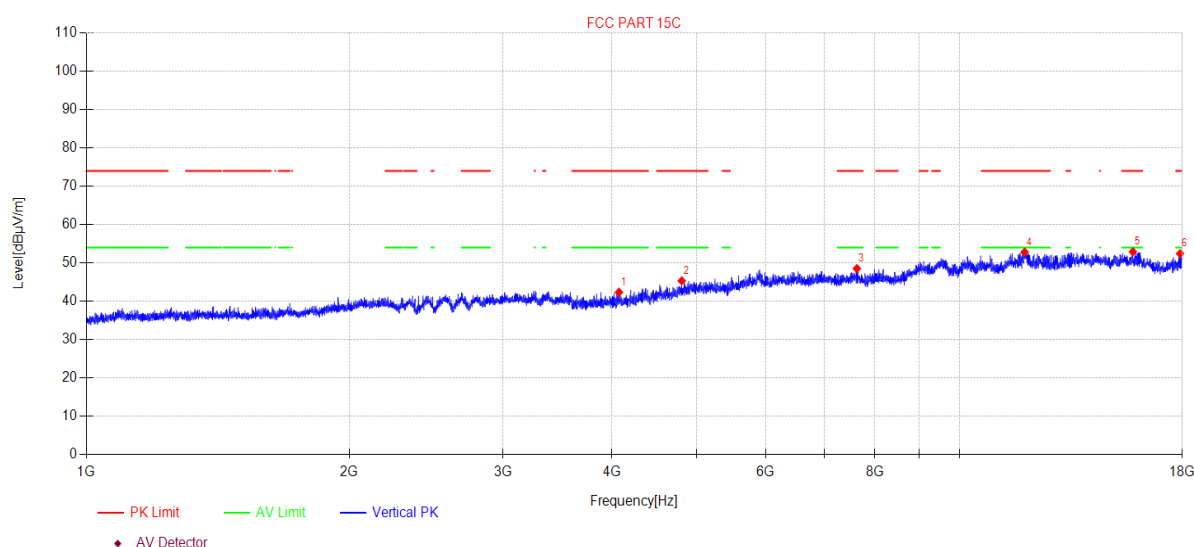

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4073.82     | 46.89            | 6.00            | 30.85               | -41.38   | 42.36          | 74.00          | 31.64       | PK       | Vertical |
| 2    | 4807.52     | 46.70            | 7.48            | 32.33               | -41.16   | 45.35          | 74.00          | 28.65       | PK       | Vertical |
| 3    | 7629.46     | 45.41            | 7.65            | 36.46               | -41.00   | 48.52          | 74.00          | 25.48       | PK       | Vertical |
| 4    | 11875.64    | 42.69            | 10.43           | 38.80               | -39.10   | 52.82          | 74.00          | 21.18       | PK       | Vertical |
| 5    | 15800.30    | 39.99            | 14.98           | 38.20               | -40.26   | 52.91          | 74.00          | 21.09       | PK       | Vertical |
| 6    | 17891.09    | 38.93            | 13.00           | 41.14               | -40.66   | 52.41          | 74.00          | 21.59       | PK       | Vertical |


### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\15  
**Memo:** BLE 2M 2440 L

### Test Graph

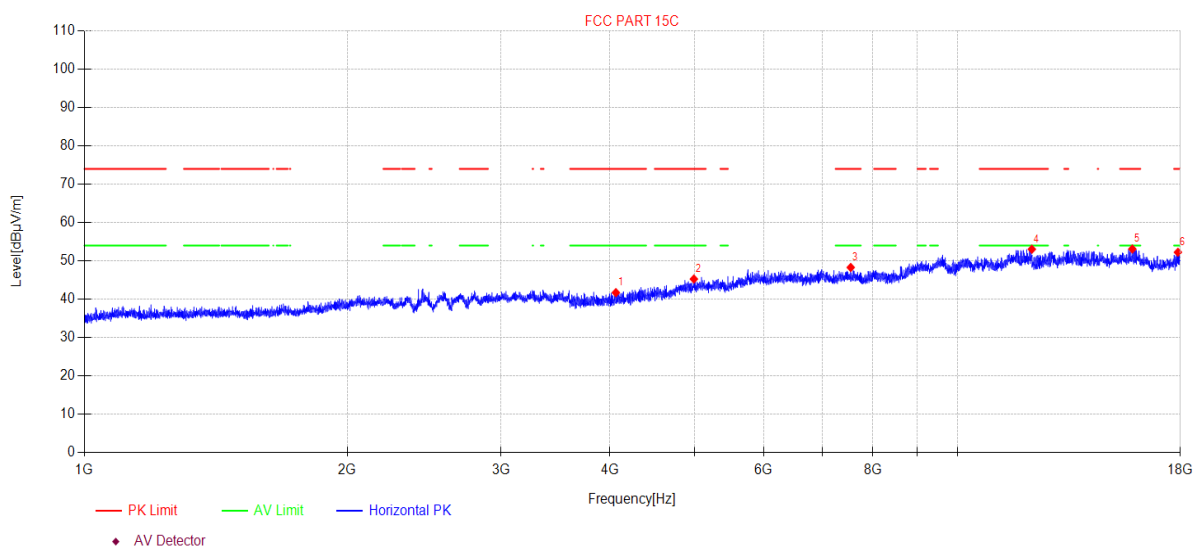

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4062.06     | 46.32            | 5.98            | 30.82               | -41.38   | 41.74          | 74.00          | 32.26       | PK       | Horizontal |
| 2    | 4990.14     | 45.73            | 7.85            | 32.80               | -41.10   | 45.28          | 74.00          | 28.72       | PK       | Horizontal |
| 3    | 7546.13     | 45.25            | 7.65            | 36.40               | -41.00   | 48.30          | 74.00          | 25.70       | PK       | Horizontal |
| 4    | 12167.46    | 42.48            | 10.54           | 39.10               | -39.07   | 53.05          | 74.00          | 20.95       | PK       | Horizontal |
| 5    | 15859.78    | 40.02            | 15.24           | 38.14               | -40.30   | 53.10          | 74.00          | 20.90       | PK       | Horizontal |
| 6    | 17885.92    | 38.82            | 12.99           | 41.10               | -40.65   | 52.26          | 74.00          | 21.74       | PK       | Horizontal |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\16  
**Memo:** BLE 2M 2440 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

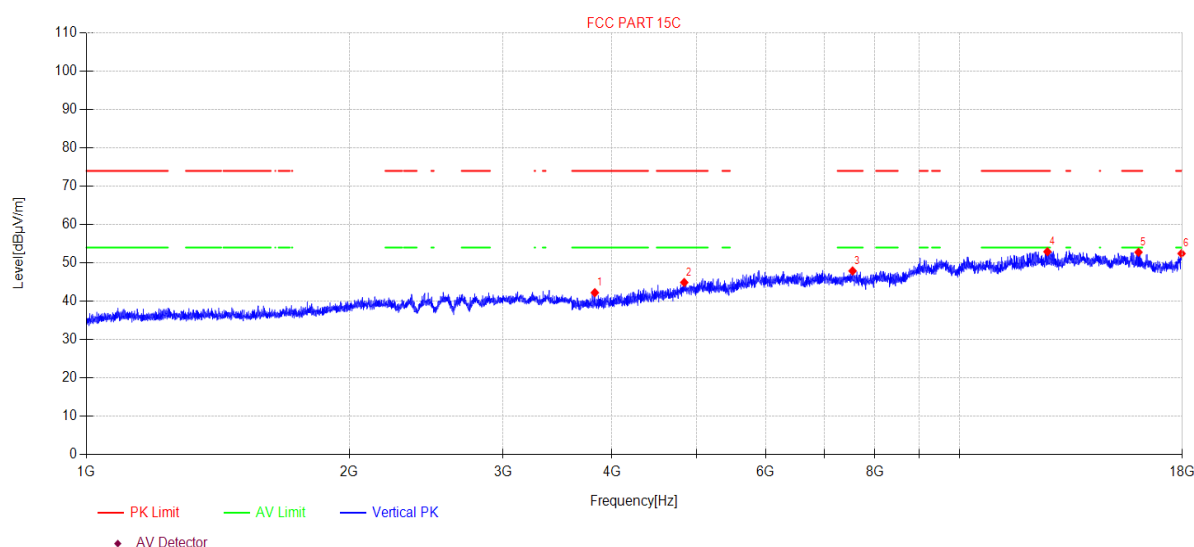

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 3822.86     | 47.38            | 5.81            | 30.35               | -41.29   | 42.25          | 74.00          | 31.75       | PK       | Vertical |
| 2    | 4839.59     | 46.05            | 7.55            | 32.46               | -41.15   | 44.91          | 74.00          | 29.09       | PK       | Vertical |
| 3    | 7543.95     | 44.85            | 7.65            | 36.40               | -41.00   | 47.90          | 74.00          | 26.10       | PK       | Vertical |
| 4    | 12611.42    | 42.67            | 10.54           | 39.22               | -39.51   | 52.92          | 74.00          | 21.08       | PK       | Vertical |
| 5    | 16034.91    | 39.57            | 15.74           | 37.87               | -40.40   | 52.78          | 74.00          | 21.22       | PK       | Vertical |
| 6    | 17963.62    | 38.46            | 13.09           | 41.58               | -40.69   | 52.44          | 74.00          | 21.56       | PK       | Vertical |

### Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\17  
**Memo:** BLE 2M 2478 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

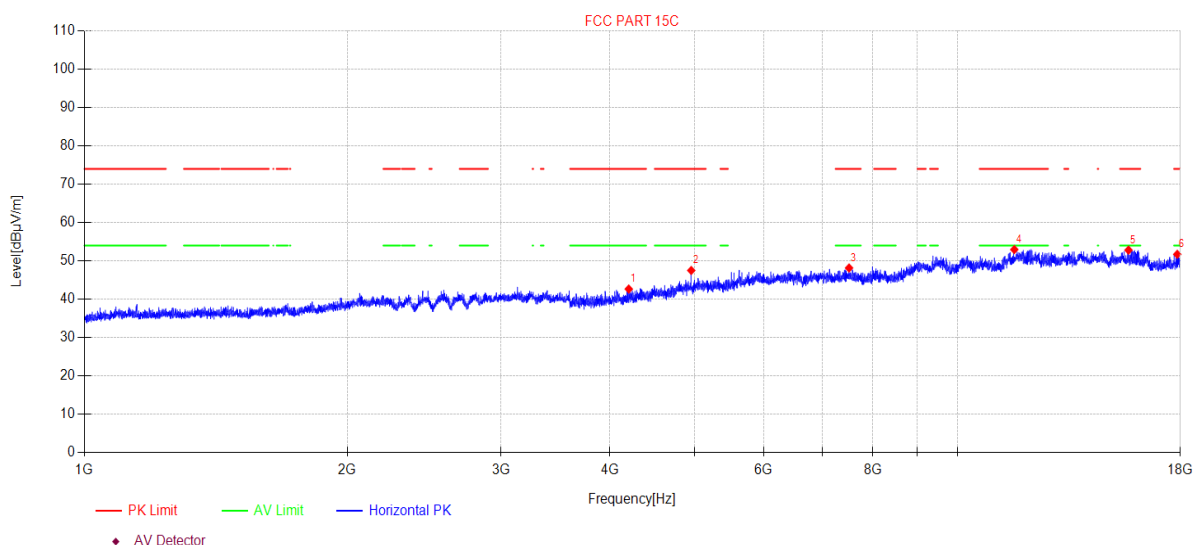

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4202.98     | 46.64            | 6.26            | 31.11               | -41.34   | 42.67          | 74.00          | 31.33       | PK       | Horizontal |
| 2    | 4955.65     | 48.05            | 7.78            | 32.80               | -41.11   | 47.52          | 74.00          | 26.48       | PK       | Horizontal |
| 3    | 7513.49     | 45.11            | 7.65            | 36.40               | -41.00   | 48.16          | 74.00          | 25.84       | PK       | Horizontal |
| 4    | 11617.64    | 43.40            | 10.20           | 38.88               | -39.51   | 52.97          | 74.00          | 21.03       | PK       | Horizontal |
| 5    | 15700.16    | 40.18            | 14.52           | 38.30               | -40.19   | 52.81          | 74.00          | 21.19       | PK       | Horizontal |
| 6    | 17854.93    | 38.52            | 12.96           | 40.88               | -40.64   | 51.72          | 74.00          | 22.28       | PK       | Horizontal |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\18  
**Memo:** BLE 2M 2478 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

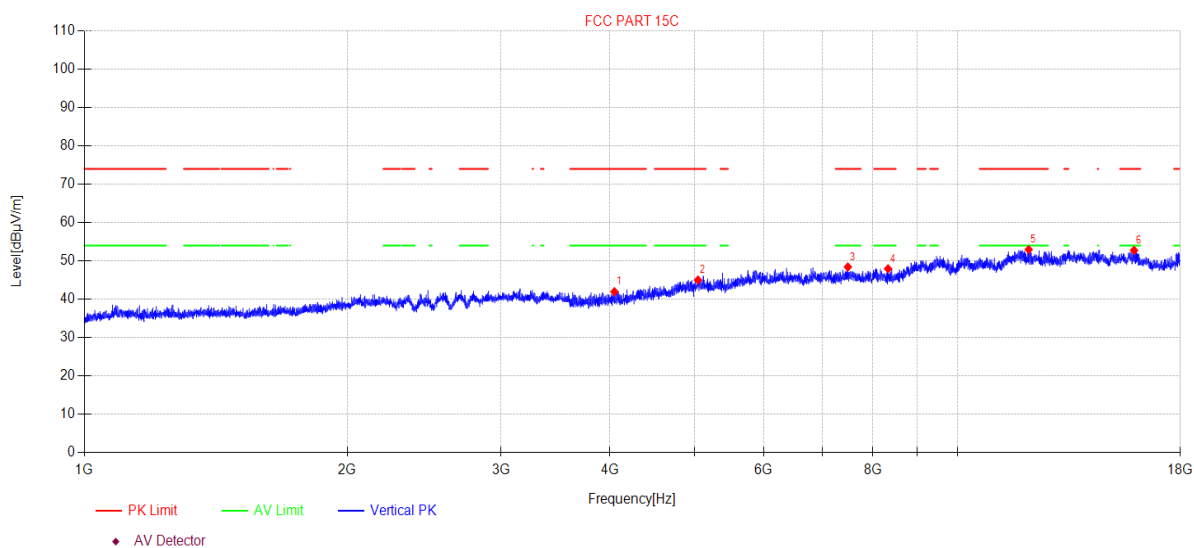

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4046.83     | 46.63            | 5.94            | 30.79               | -41.39   | 41.97          | 74.00          | 32.03       | PK       | Vertical |
| 2    | 5045.25     | 45.28            | 7.93            | 32.89               | -41.08   | 45.02          | 74.00          | 28.98       | PK       | Vertical |
| 3    | 7489.64     | 45.36            | 7.64            | 36.42               | -41.00   | 48.42          | 74.00          | 25.58       | PK       | Vertical |
| 4    | 8327.69     | 43.22            | 8.02            | 37.20               | -40.48   | 47.96          | 74.00          | 26.04       | PK       | Vertical |
| 5    | 12065.91    | 42.34            | 10.54           | 39.03               | -38.97   | 52.94          | 74.00          | 21.06       | PK       | Vertical |
| 6    | 15933.28    | 39.49            | 15.58           | 38.03               | -40.35   | 52.75          | 74.00          | 21.25       | PK       | Vertical |


### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\45  
**Memo:** BLE 1M 2402 R

### Test Graph

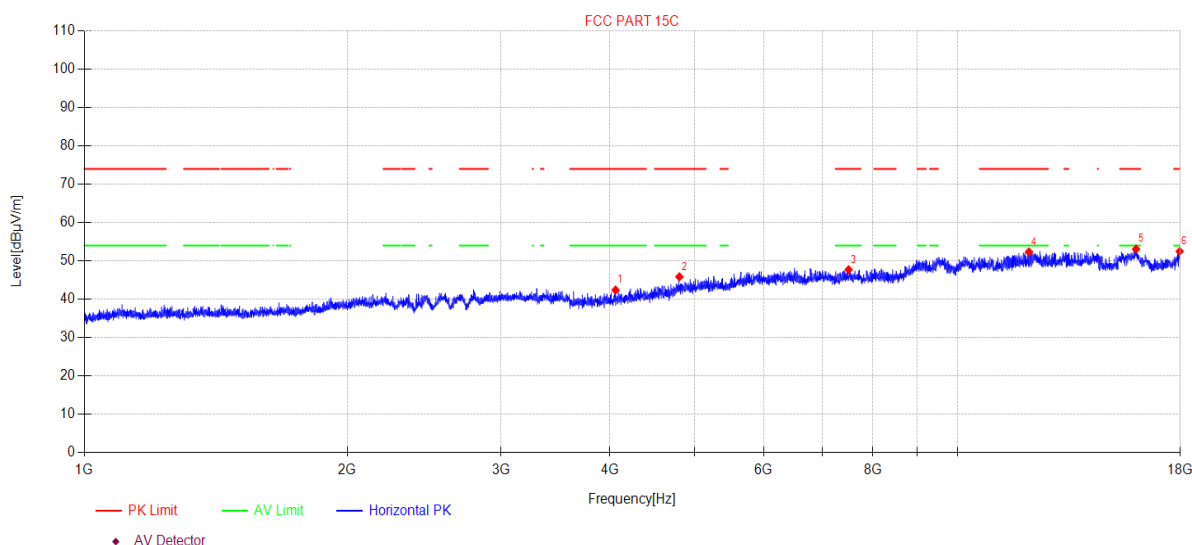

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4058.54     | 47.00            | 5.97            | 30.82               | -41.38   | 42.41          | 74.00          | 31.59       | PK       | Horizontal |
| 2    | 4803.36     | 47.25            | 7.47            | 32.31               | -41.16   | 45.87          | 74.00          | 28.13       | PK       | Horizontal |
| 3    | 7504.81     | 44.67            | 7.65            | 36.40               | -41.00   | 47.72          | 74.00          | 26.28       | PK       | Horizontal |
| 4    | 12076.38    | 41.74            | 10.54           | 39.05               | -38.98   | 52.35          | 74.00          | 21.65       | PK       | Horizontal |
| 5    | 16016.39    | 39.79            | 15.82           | 37.88               | -40.40   | 53.09          | 74.00          | 20.91       | PK       | Horizontal |
| 6    | 17968.81    | 38.48            | 13.09           | 41.61               | -40.69   | 52.49          | 74.00          | 21.51       | PK       | Horizontal |

### Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\46  
**Memo:** BLE 1M 2402 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

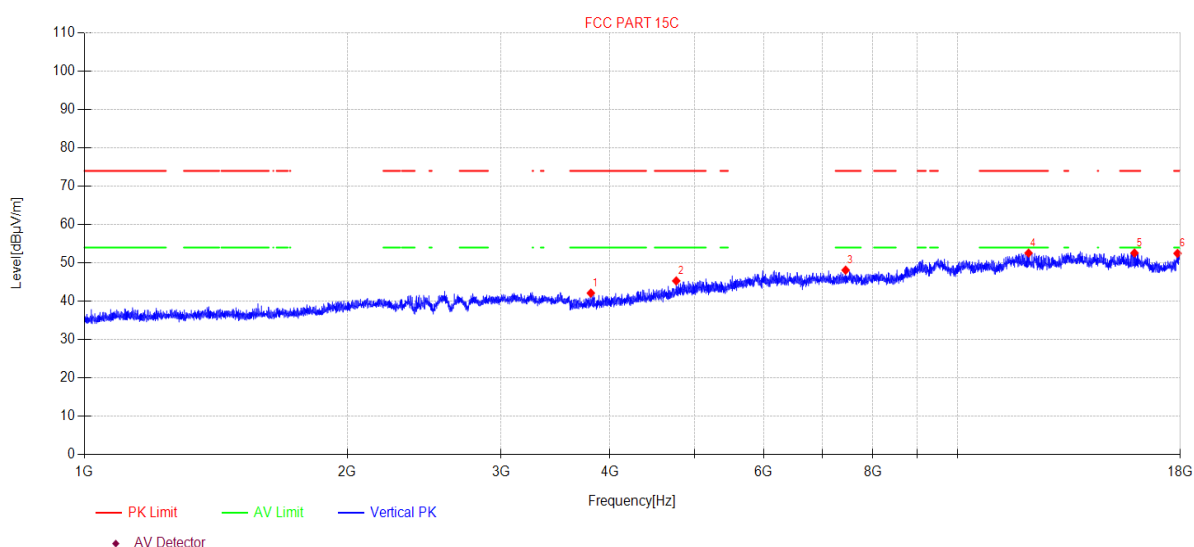

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 3803.02     | 47.30            | 5.81            | 30.31               | -41.28   | 42.14          | 74.00          | 31.86       | PK       | Vertical |
| 2    | 4763.27     | 46.95            | 7.39            | 32.15               | -41.17   | 45.32          | 74.00          | 28.68       | PK       | Vertical |
| 3    | 7446.47     | 44.97            | 7.64            | 36.50               | -41.00   | 48.11          | 74.00          | 25.89       | PK       | Vertical |
| 4    | 12062.43    | 41.96            | 10.54           | 39.02               | -38.96   | 52.56          | 74.00          | 21.44       | PK       | Vertical |
| 5    | 15951.71    | 39.29            | 15.66           | 38.00               | -40.37   | 52.58          | 74.00          | 21.42       | PK       | Vertical |
| 6    | 17865.25    | 39.20            | 12.97           | 40.96               | -40.65   | 52.48          | 74.00          | 21.52       | PK       | Vertical |


### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\47  
**Memo:** BLE 1M 2440 R

### Test Graph

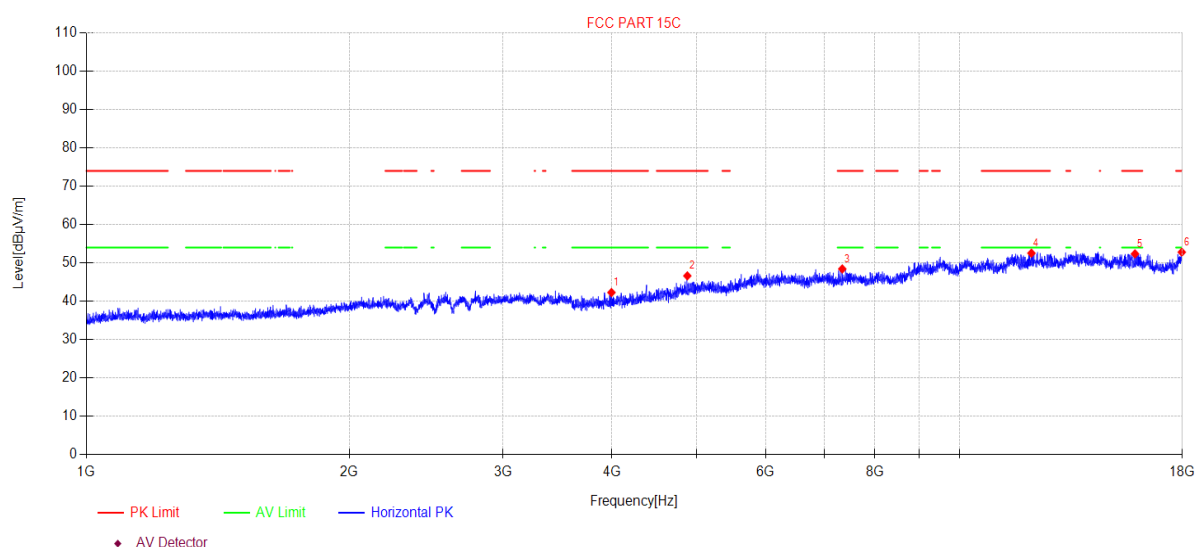

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 3994.54     | 47.15            | 5.85            | 30.69               | -41.40   | 42.29          | 74.00          | 31.71       | PK       | Horizontal |
| 2    | 4878.91     | 47.58            | 7.63            | 32.56               | -41.14   | 46.63          | 74.00          | 27.37       | PK       | Horizontal |
| 3    | 7341.76     | 45.30            | 7.63            | 36.50               | -41.00   | 48.43          | 74.00          | 25.57       | PK       | Horizontal |
| 4    | 12090.35    | 41.91            | 10.54           | 39.08               | -38.99   | 52.54          | 74.00          | 21.46       | PK       | Horizontal |
| 5    | 15887.30    | 39.20            | 15.37           | 38.11               | -40.32   | 52.36          | 74.00          | 21.64       | PK       | Horizontal |
| 6    | 17974.01    | 38.75            | 13.10           | 41.64               | -40.69   | 52.80          | 74.00          | 21.20       | PK       | Horizontal |


### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\48  
**Memo:** BLE 1M 2440 R

### Test Graph

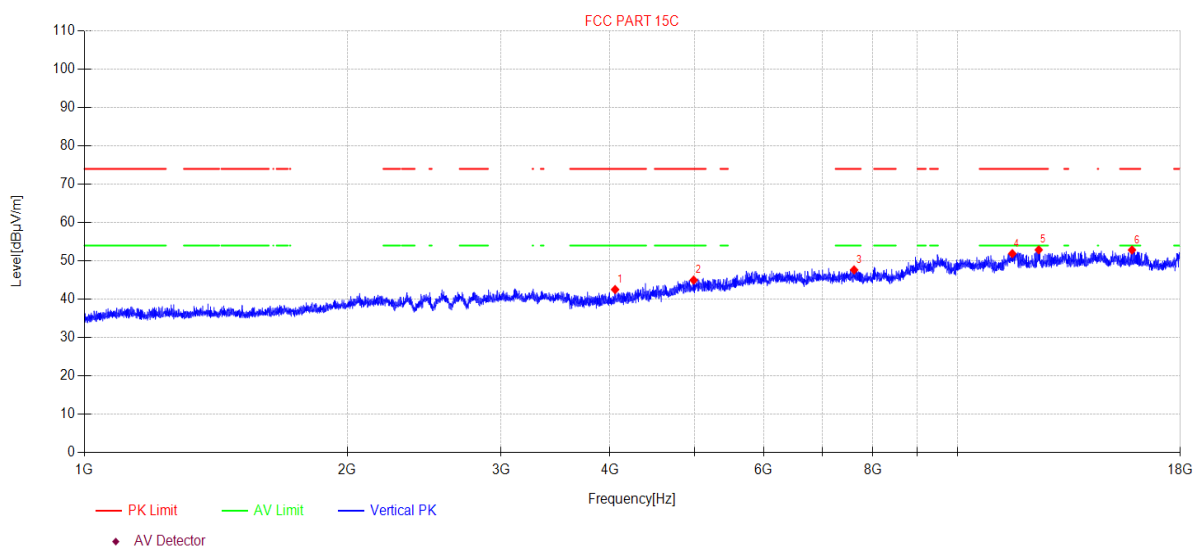

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4053.85     | 47.15            | 5.96            | 30.81               | -41.38   | 42.54          | 74.00          | 31.46       | PK       | Vertical |
| 2    | 4987.26     | 45.45            | 7.84            | 32.80               | -41.10   | 44.99          | 74.00          | 29.01       | PK       | Vertical |
| 3    | 7614.04     | 44.57            | 7.65            | 36.43               | -41.00   | 47.65          | 74.00          | 26.35       | PK       | Vertical |
| 4    | 11557.36    | 42.42            | 10.15           | 38.94               | -39.61   | 51.90          | 74.00          | 22.10       | PK       | Vertical |
| 5    | 12391.03    | 42.54            | 10.54           | 39.10               | -39.29   | 52.89          | 74.00          | 21.11       | PK       | Vertical |
| 6    | 15846.03    | 39.81            | 15.18           | 38.15               | -40.29   | 52.85          | 74.00          | 21.15       | PK       | Vertical |


### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\49  
**Memo:** BLE 1M 2480 R

### Test Graph

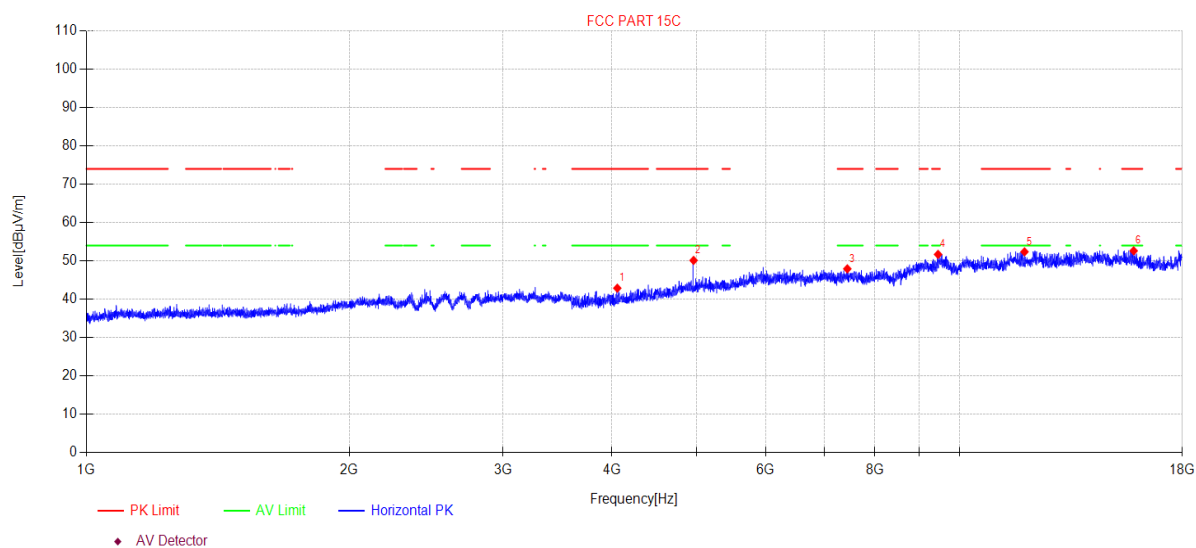

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4056.19     | 47.51            | 5.96            | 30.81               | -41.38   | 42.90          | 74.00          | 31.10       | PK       | Horizontal |
| 2    | 4959.95     | 50.65            | 7.79            | 32.80               | -41.11   | 50.13          | 74.00          | 23.87       | PK       | Horizontal |
| 3    | 7440.02     | 44.79            | 7.64            | 36.50               | -41.00   | 47.93          | 74.00          | 26.07       | PK       | Horizontal |
| 4    | 9451.49     | 44.42            | 8.82            | 38.40               | -39.94   | 51.70          | 74.00          | 22.30       | PK       | Horizontal |
| 5    | 11872.20    | 42.25            | 10.43           | 38.80               | -39.10   | 52.38          | 74.00          | 21.62       | PK       | Horizontal |
| 6    | 15832.30    | 39.62            | 15.12           | 38.17               | -40.28   | 52.63          | 74.00          | 21.37       | PK       | Horizontal |


### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\50  
**Memo:** BLE 1M 2480 R

### Test Graph

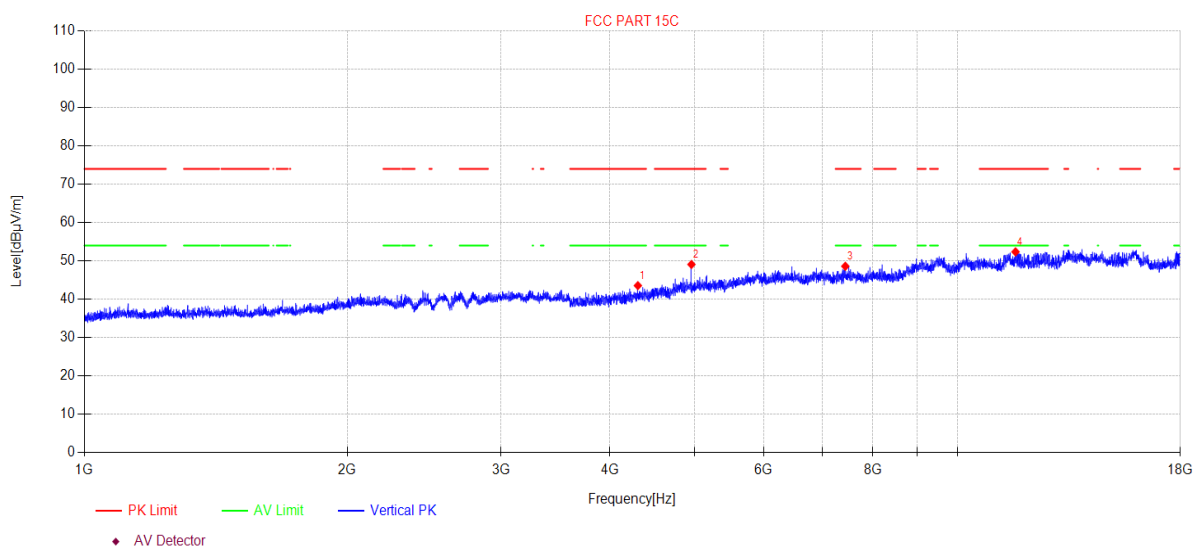

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4305.02     | 47.09            | 6.47            | 31.31               | -41.31   | 43.56          | 74.00          | 30.44       | PK       | Vertical |
| 2    | 4958.51     | 49.60            | 7.79            | 32.80               | -41.11   | 49.08          | 74.00          | 24.92       | PK       | Vertical |
| 3    | 7440.02     | 45.46            | 7.64            | 36.50               | -41.00   | 48.60          | 74.00          | 25.40       | PK       | Vertical |
| 4    | 11654.63    | 42.73            | 10.23           | 38.85               | -39.45   | 52.36          | 74.00          | 21.64       | PK       | Vertical |


### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\51  
**Memo:** BLE 2M 2404 R

### Test Graph

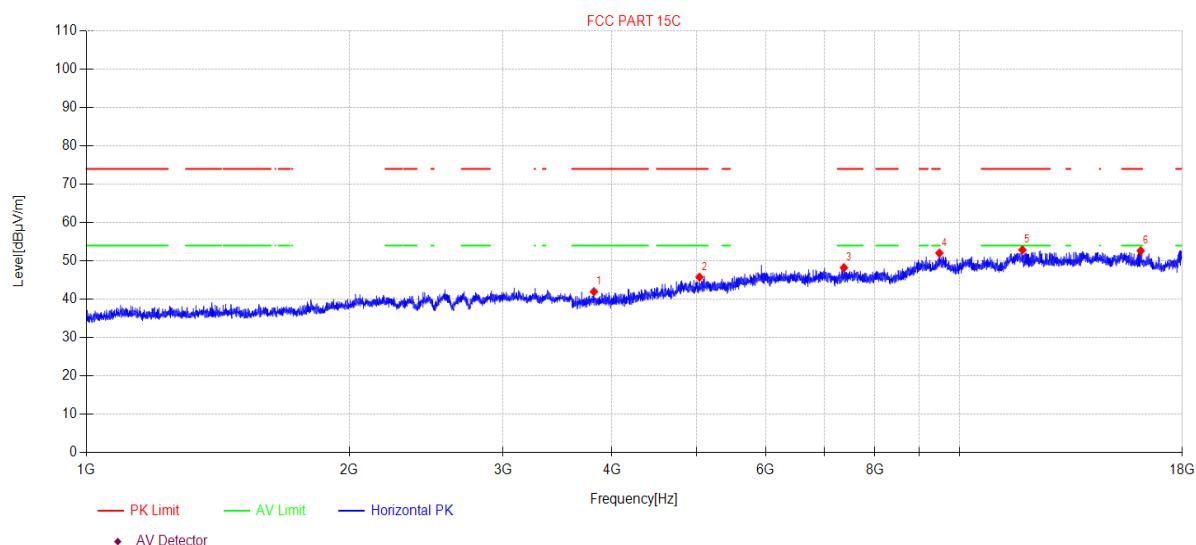

| Suspected Data List |             |                  |                 |                     |          |                |                |             |          |            |
|---------------------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| N O.                | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1                   | 3814.03     | 47.14            | 5.81            | 30.33               | -41.29   | 41.99          | 74.00          | 32.01       | PK       | Horizontal |
| 2                   | 5037.96     | 46.06            | 7.92            | 32.88               | -41.08   | 45.78          | 74.00          | 28.22       | PK       | Horizontal |
| 3                   | 7373.66     | 45.08            | 7.64            | 36.50               | -41.00   | 48.22          | 74.00          | 25.78       | PK       | Horizontal |
| 4                   | 9484.32     | 44.80            | 8.83            | 38.40               | -39.98   | 52.05          | 74.00          | 21.95       | PK       | Horizontal |
| 5                   | 11807.19    | 42.91            | 10.37           | 38.80               | -39.21   | 52.87          | 74.00          | 21.13       | PK       | Horizontal |
| 6                   | 16127.87    | 39.88            | 15.37           | 37.77               | -40.39   | 52.63          | 74.00          | 21.37       | PK       | Horizontal |

### Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\52  
**Memo:** BLE 2M 2404 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

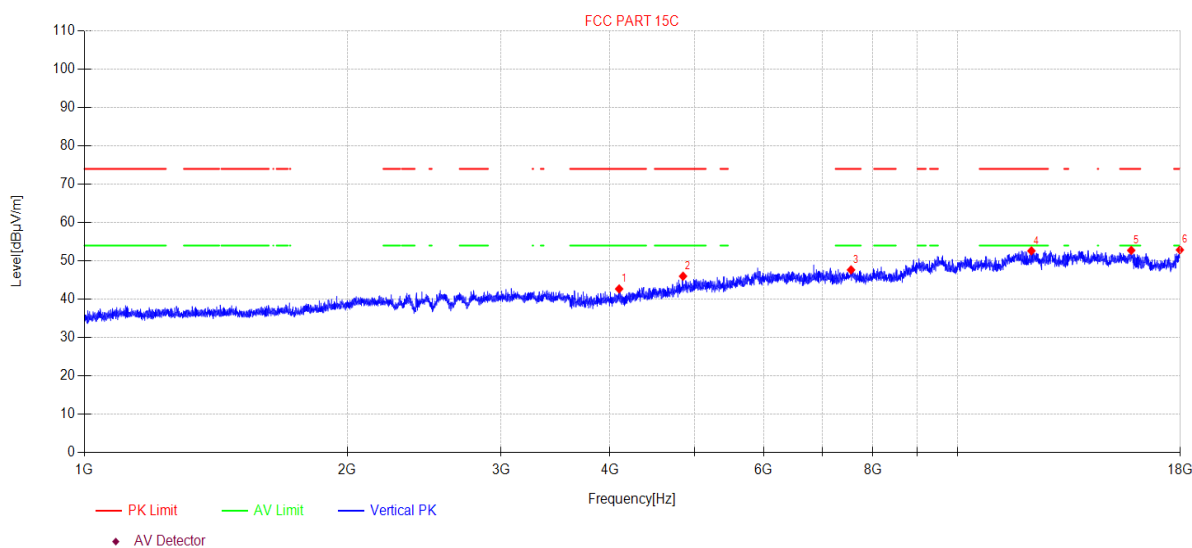

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 4097.43     | 47.13            | 6.05            | 30.89               | -41.37   | 42.70          | 74.00          | 31.30       | PK       | Vertical |
| 2    | 4849.39     | 47.09            | 7.57            | 32.50               | -41.15   | 46.01          | 74.00          | 27.99       | PK       | Vertical |
| 3    | 7552.68     | 44.61            | 7.65            | 36.40               | -41.00   | 47.66          | 74.00          | 26.34       | PK       | Vertical |
| 4    | 12153.41    | 42.03            | 10.54           | 39.10               | -39.05   | 52.62          | 74.00          | 21.38       | PK       | Vertical |
| 5    | 15814.01    | 39.79            | 15.04           | 38.19               | -40.27   | 52.75          | 74.00          | 21.25       | PK       | Vertical |
| 6    | 17979.20    | 38.77            | 13.11           | 41.68               | -40.69   | 52.87          | 74.00          | 21.13       | PK       | Vertical |


### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31**Tested By:** Bairong**EUT:** TWS Earbuds**Model Number:** Epic Lab Edition**Test Mode:** TX Mode**Power Supply:** Battery**Condition:** Temp:23.2°C;Humi:58.3%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\53**Memo:** BLE 2M 2440 R

### Test Graph

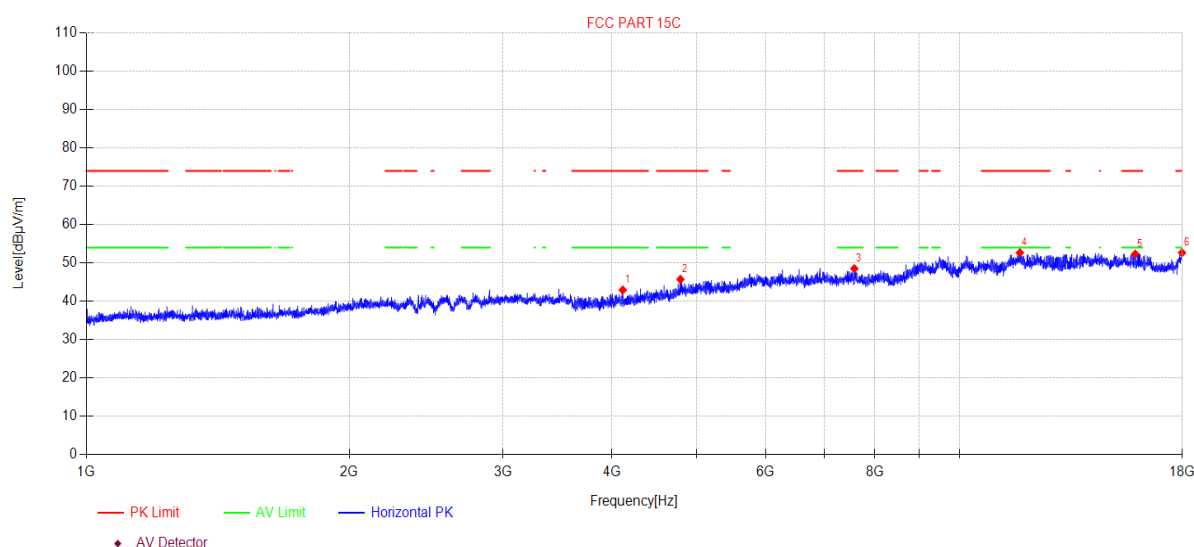

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 4115.23     | 47.30            | 6.08            | 30.93               | -41.37   | 42.94          | 74.00          | 31.06       | PK       | Horizontal |
| 2    | 4790.88     | 47.17            | 7.45            | 32.26               | -41.16   | 45.72          | 74.00          | 28.28       | PK       | Horizontal |
| 3    | 7578.91     | 45.44            | 7.65            | 36.40               | -41.00   | 48.49          | 74.00          | 25.51       | PK       | Horizontal |
| 4    | 11728.97    | 42.88            | 10.30           | 38.80               | -39.33   | 52.65          | 74.00          | 21.35       | PK       | Horizontal |
| 5    | 15896.49    | 39.12            | 15.41           | 38.10               | -40.33   | 52.30          | 74.00          | 21.70       | PK       | Horizontal |
| 6    | 17984.40    | 38.53            | 13.11           | 41.71               | -40.69   | 52.66          | 74.00          | 21.34       | PK       | Horizontal |


**Note:**

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\54  
**Memo:** BLE 2M 2440 R

### Test Graph

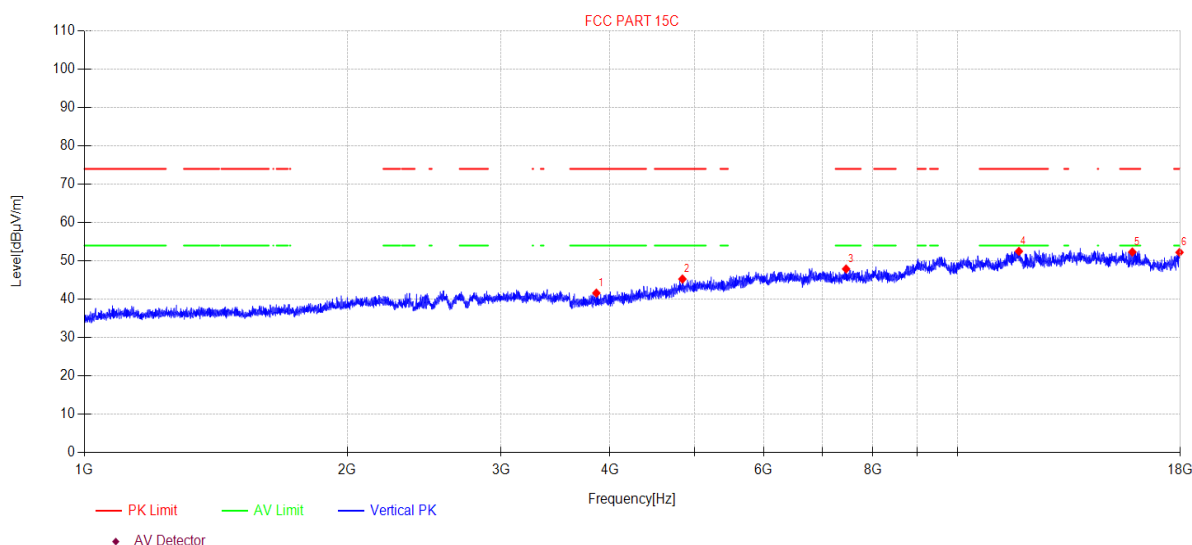

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 3858.38     | 46.70            | 5.82            | 30.42               | -41.32   | 41.62          | 74.00          | 32.38       | PK       | Vertical |
| 2    | 4842.38     | 46.41            | 7.55            | 32.47               | -41.15   | 45.28          | 74.00          | 28.72       | PK       | Vertical |
| 3    | 7455.09     | 44.78            | 7.64            | 36.49               | -41.00   | 47.91          | 74.00          | 26.09       | PK       | Vertical |
| 4    | 11759.51    | 42.65            | 10.33           | 38.80               | -39.28   | 52.50          | 74.00          | 21.50       | PK       | Vertical |
| 5    | 15859.78    | 39.24            | 15.24           | 38.14               | -40.30   | 52.32          | 74.00          | 21.68       | PK       | Vertical |
| 6    | 17963.62    | 38.25            | 13.09           | 41.58               | -40.69   | 52.23          | 74.00          | 21.77       | PK       | Vertical |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\55  
**Memo:** BLE 2M 2478 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

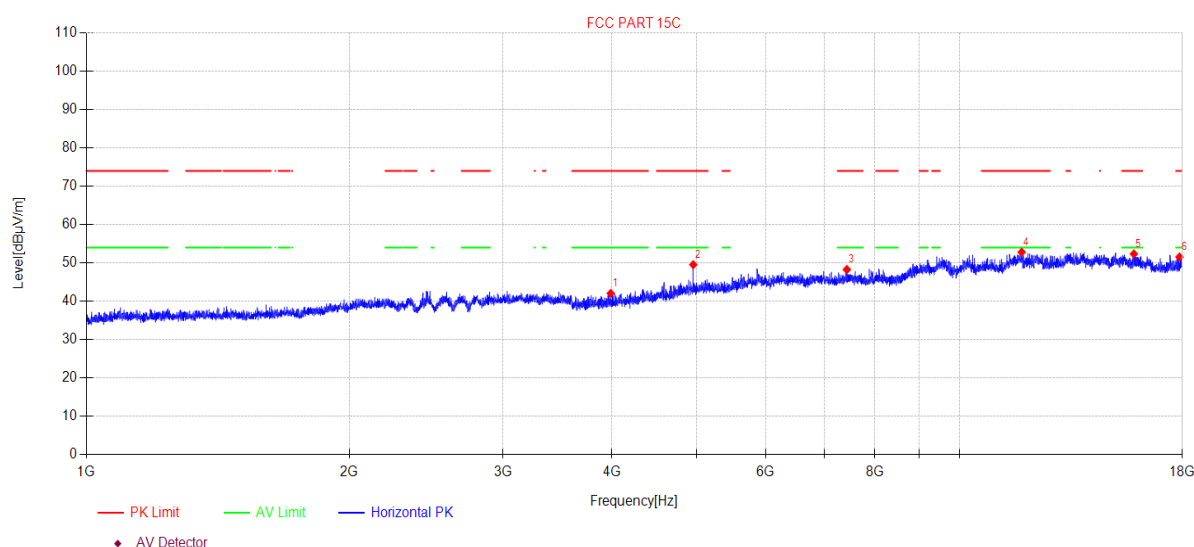

### Suspected Data List

| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1    | 3986.46     | 46.92            | 5.85            | 30.67               | -41.39   | 42.05          | 74.00          | 31.95       | PK       | Horizontal |
| 2    | 4955.65     | 50.08            | 7.78            | 32.80               | -41.11   | 49.55          | 74.00          | 24.45       | PK       | Horizontal |
| 3    | 7431.42     | 45.13            | 7.64            | 36.50               | -41.00   | 48.27          | 74.00          | 25.73       | PK       | Horizontal |
| 4    | 11783.33    | 42.90            | 10.35           | 38.80               | -39.25   | 52.80          | 74.00          | 21.20       | PK       | Horizontal |
| 5    | 15841.45    | 39.31            | 15.16           | 38.16               | -40.29   | 52.34          | 74.00          | 21.66       | PK       | Horizontal |
| 6    | 17865.25    | 38.26            | 12.97           | 40.96               | -40.65   | 51.54          | 74.00          | 22.46       | PK       | Horizontal |


### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31      **Tested By:** Bairong  
**EUT:** TWS Earbuds      **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode      **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3%      **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\56  
**Memo:** BLE 2M 2478 R

### Test Graph

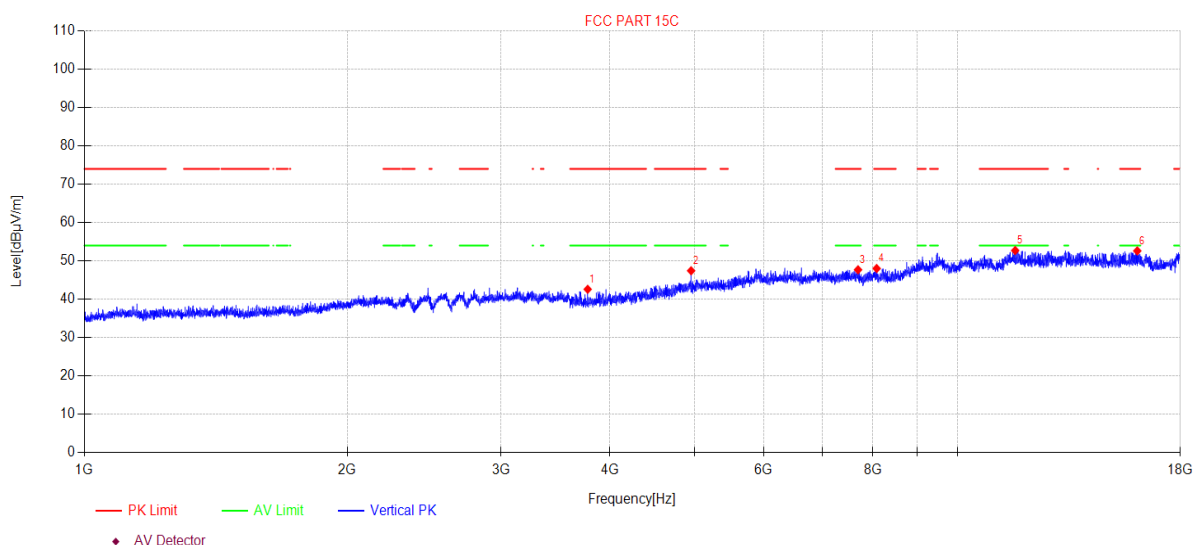

### Suspected Data List


| N O. | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1    | 3771.28     | 47.88            | 5.80            | 30.19               | -41.26   | 42.61          | 74.00          | 31.39       | PK       | Vertical |
| 2    | 4954.22     | 47.96            | 7.78            | 32.80               | -41.11   | 47.43          | 74.00          | 26.57       | PK       | Vertical |
| 3    | 7693.67     | 44.44            | 7.66            | 36.59               | -41.00   | 47.69          | 74.00          | 26.31       | PK       | Vertical |
| 4    | 8081.11     | 44.13            | 7.77            | 37.00               | -40.87   | 48.03          | 74.00          | 25.97       | PK       | Vertical |
| 5    | 11644.53    | 43.11            | 10.22           | 38.86               | -39.47   | 52.72          | 74.00          | 21.28       | PK       | Vertical |
| 6    | 16067.39    | 39.56            | 15.61           | 37.83               | -40.39   | 52.61          | 74.00          | 21.39       | PK       | Vertical |

### Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 12. Emissions in Restricted Frequency Bands

### 12.1. Block diagram of test setup

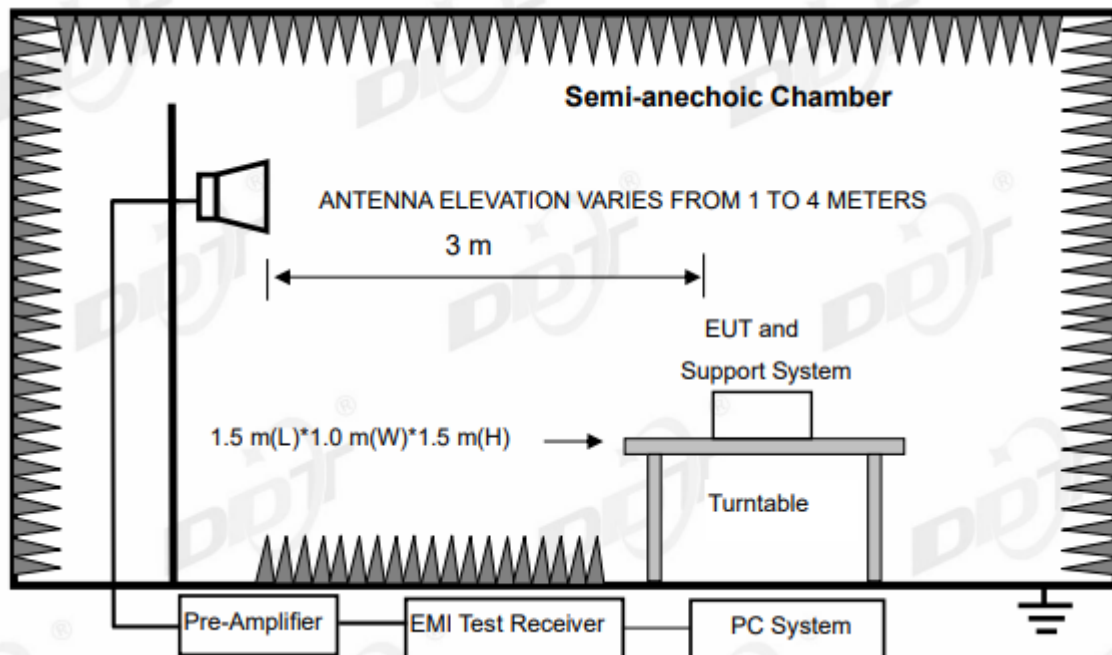

### 12.2. Limit

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

### 12.3. Test procedure

Same with Radiated Emission except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

### 12.4. Test result


Pass. (See below detailed test result)

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\25  
**Memo:** BLE 1M 2402 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

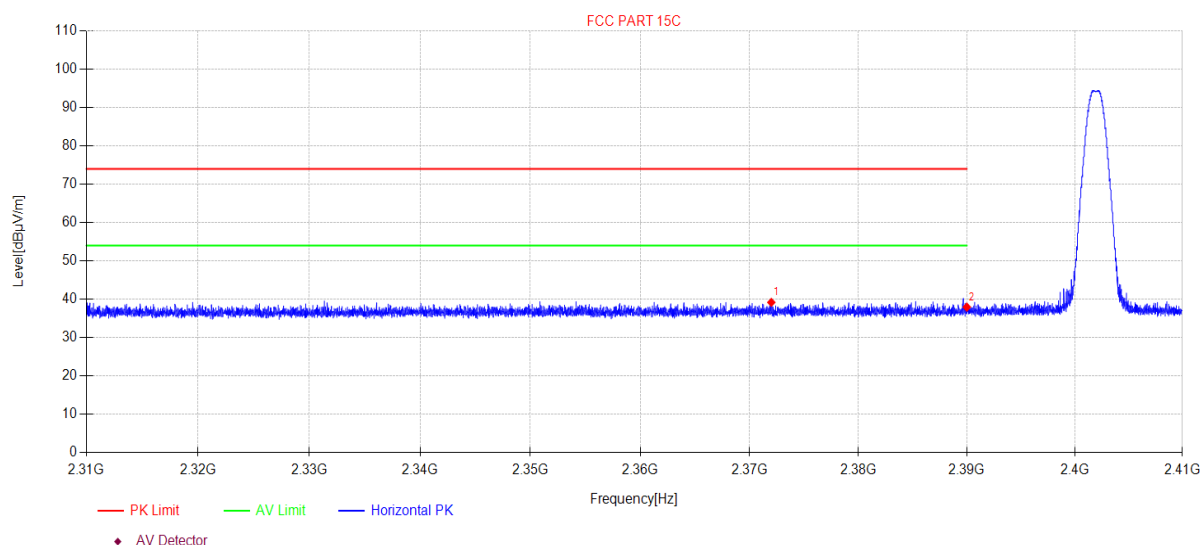

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2372.00     | 48.02            | 3.85            | 27.44               | -40.11   | 39.20          | 74.00          | 34.80       | PK       | Horizontal |
| 2  | 2390.00     | 46.74            | 3.87            | 27.48               | -40.13   | 37.96          | 74.00          | 36.04       | PK       | Horizontal |

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\26  
**Memo:** BLE 1M 2402 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

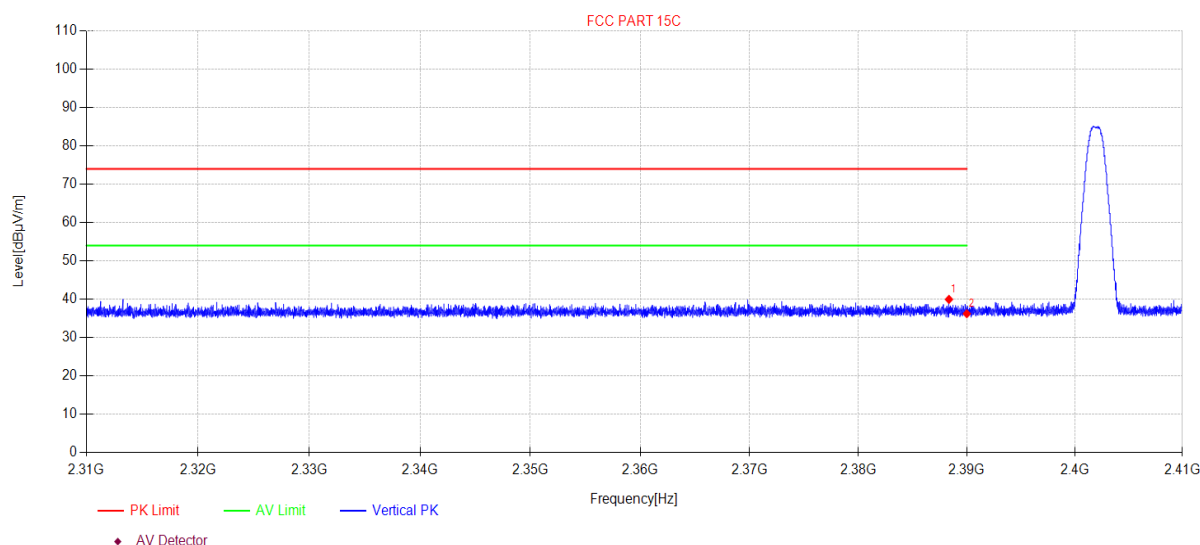

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2388.35     | 48.75            | 3.87            | 27.48               | -40.13   | 39.97          | 74.00          | 34.03       | PK       | Vertical |
| 2  | 2390.00     | 45.02            | 3.87            | 27.48               | -40.13   | 36.24          | 74.00          | 37.76       | PK       | Vertical |

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\27  
**Memo:** BLE 2M 2404 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

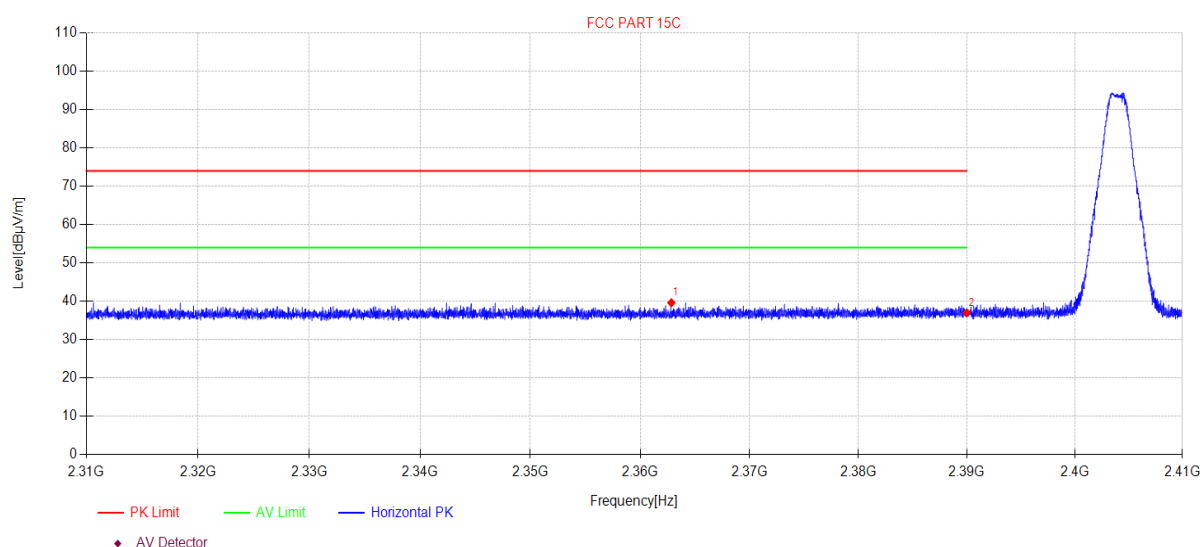

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2362.85     | 48.45            | 3.85            | 27.43               | -40.10   | 39.63          | 74.00          | 34.37       | PK       | Horizontal |
| 2  | 2390.00     | 45.78            | 3.87            | 27.48               | -40.13   | 37.00          | 74.00          | 37.00       | PK       | Horizontal |

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\28  
**Memo:** BLE 2M 2404 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

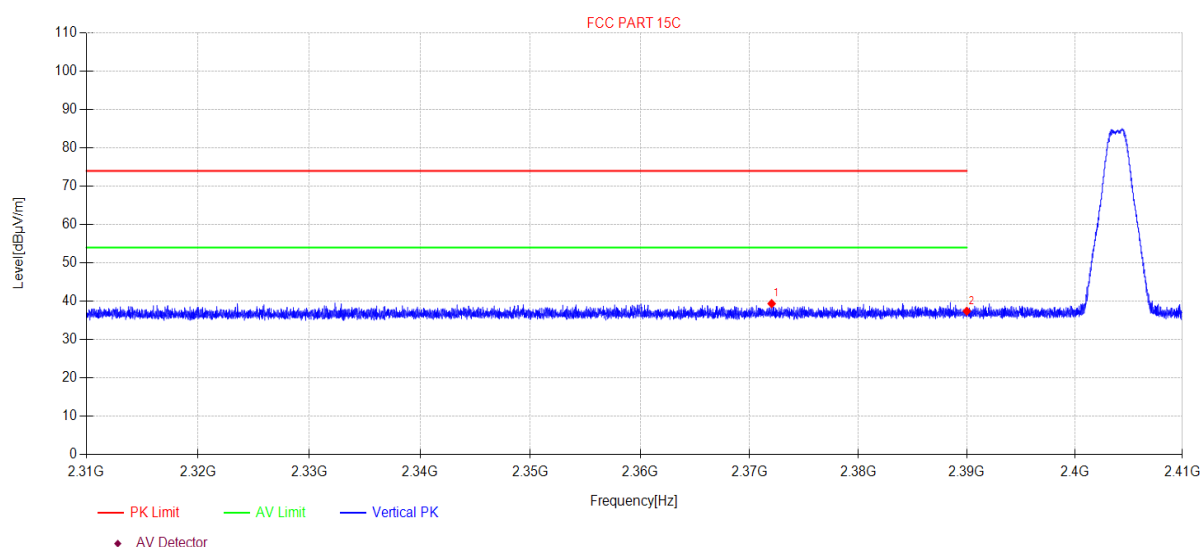

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2372.03     | 48.21            | 3.85            | 27.44               | -40.11   | 39.39          | 74.00          | 34.61       | PK       | Vertical |
| 2  | 2390.00     | 46.21            | 3.87            | 27.48               | -40.13   | 37.43          | 74.00          | 36.57       | PK       | Vertical |

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\35  
**Memo:** BLE 1M 2480 L

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

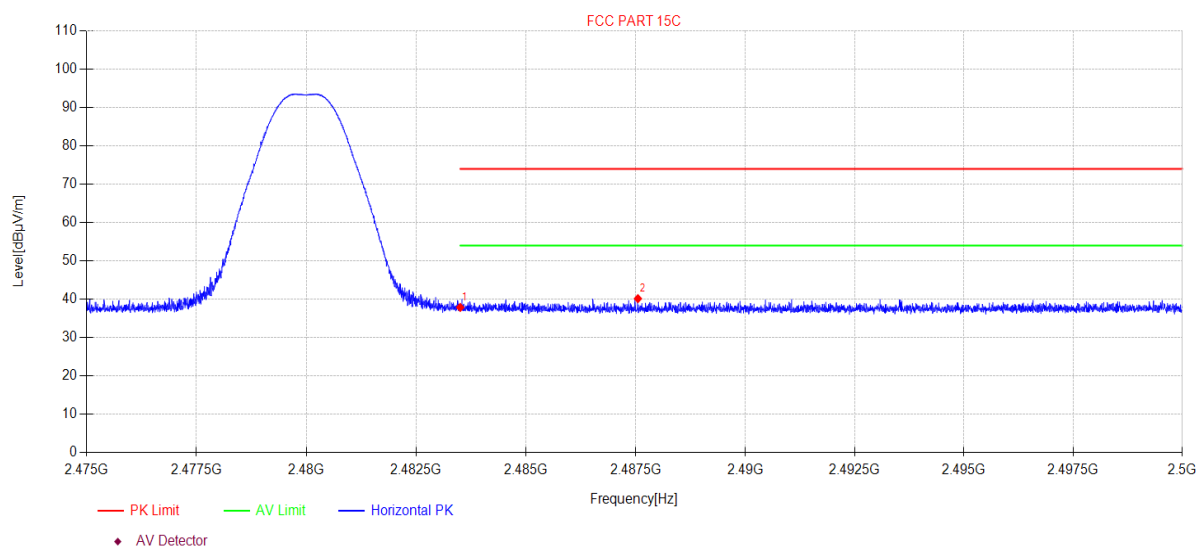

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2483.50     | 46.44            | 3.94            | 27.73               | -40.23   | 37.88          | 74.00          | 36.12       | PK       | Horizontal |
| 2  | 2487.55     | 48.72            | 3.94            | 27.75               | -40.24   | 40.17          | 74.00          | 33.83       | PK       | Horizontal |


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\36  
**Memo:** BLE 1M 2480 L

### Test Graph

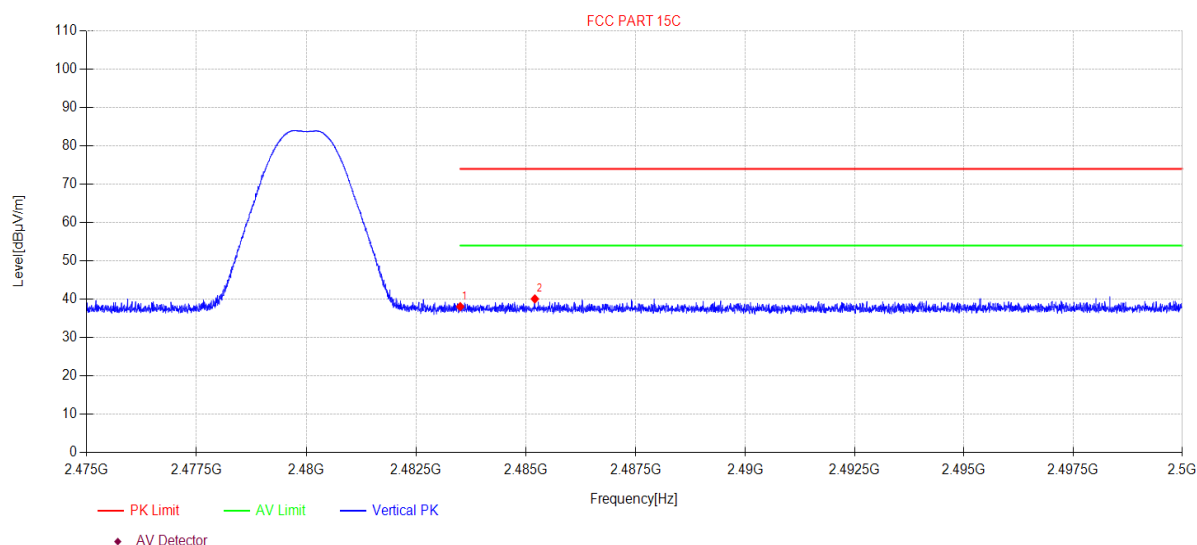

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2483.50     | 46.66            | 3.94            | 27.73               | -40.23   | 38.10          | 74.00          | 35.90       | PK       | Vertical |
| 2  | 2485.20     | 48.64            | 3.94            | 27.74               | -40.23   | 40.09          | 74.00          | 33.91       | PK       | Vertical |

### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-07-31

Tested By: Bairong

EUT: TWS Earbuds

Model Number: Epic Lab Edition

Test Mode: TX Mode

Power Supply: Battery


Condition: Temp:23.2°C;Humi:58.3%

Test Site: DDT 3# Chamber

File Path: d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\37

Memo: BLE 2M 2478 L

### Test Graph

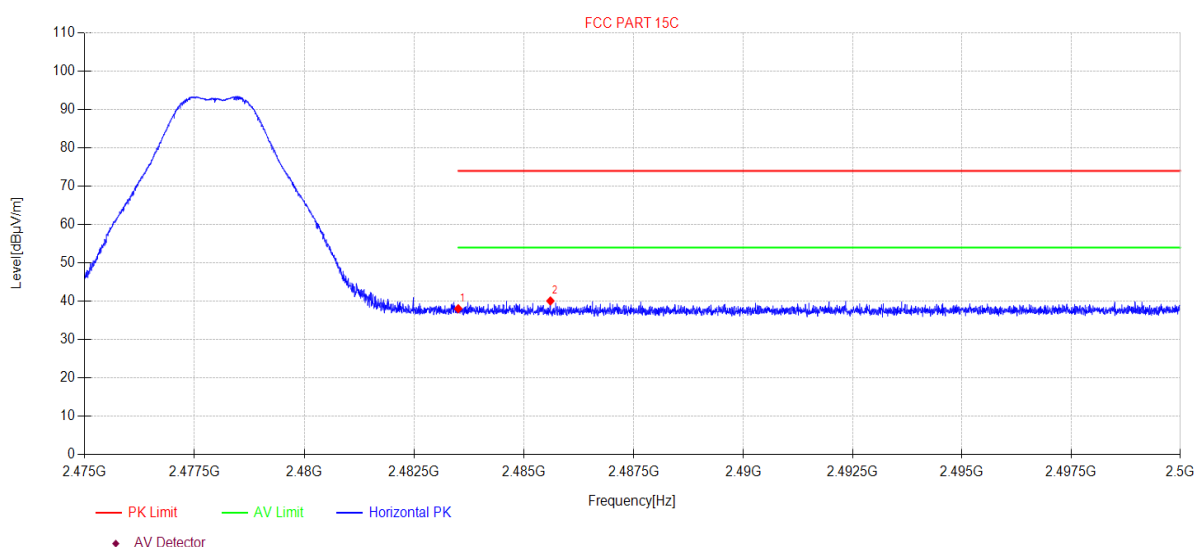

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2483.50     | 46.63            | 3.94            | 27.73               | -40.23   | 38.07          | 74.00          | 35.93       | PK       | Horizontal |
| 2  | 2485.60     | 48.64            | 3.94            | 27.74               | -40.23   | 40.09          | 74.00          | 33.91       | PK       | Horizontal |


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\38  
**Memo:** BLE 2M 2478 L

### Test Graph

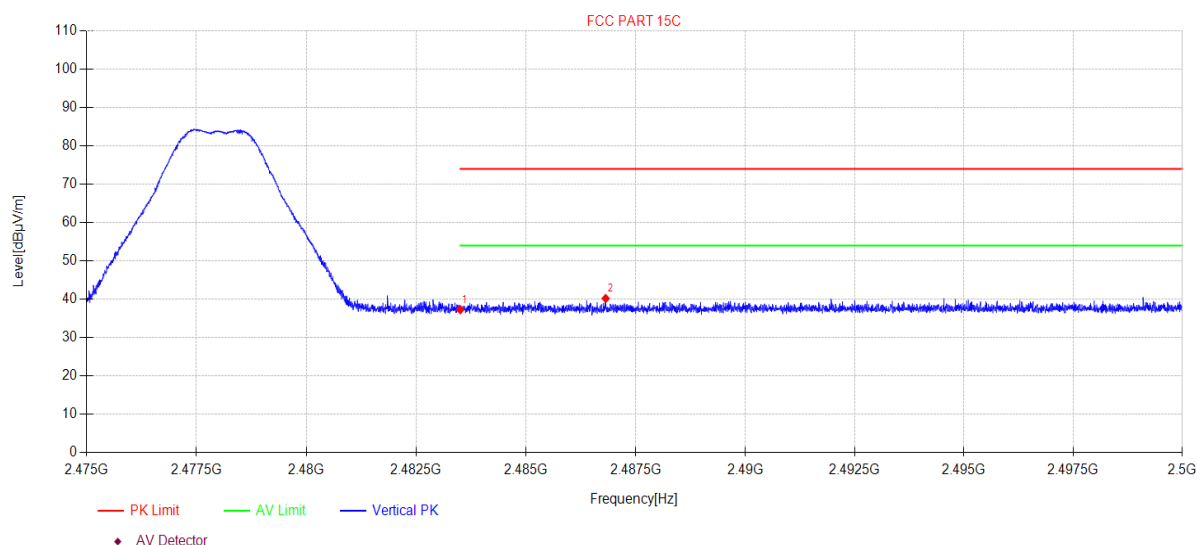

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2483.50     | 45.84            | 3.94            | 27.73               | -40.23   | 37.28          | 74.00          | 36.72       | PK       | Vertical |
| 2  | 2486.82     | 48.77            | 3.94            | 27.75               | -40.24   | 40.22          | 74.00          | 33.78       | PK       | Vertical |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\63  
**Memo:** BLE 1M 2402 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

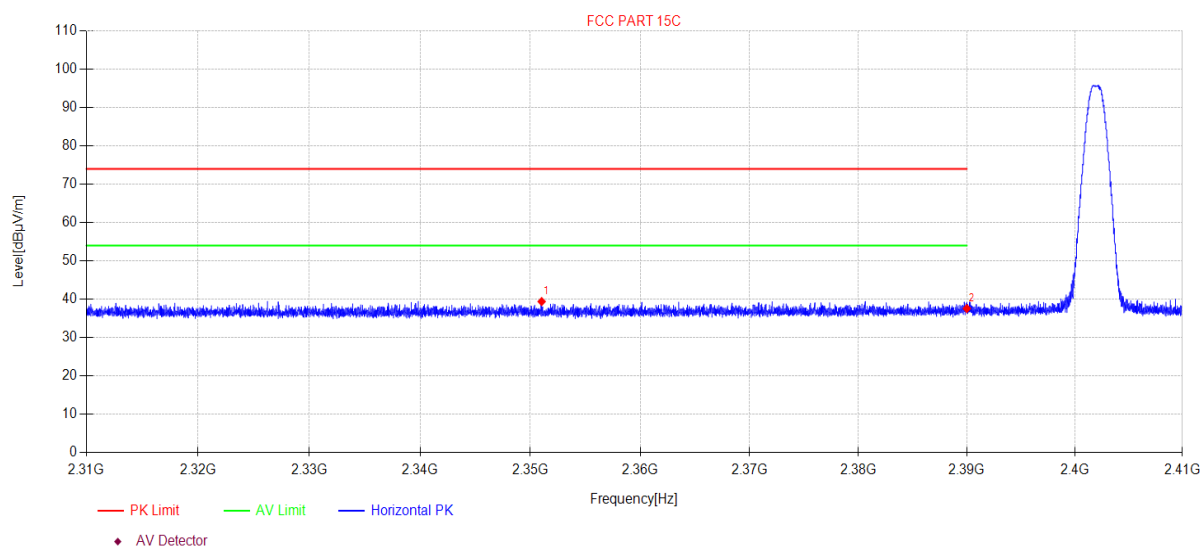

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2351.03     | 48.26            | 3.84            | 27.40               | -40.09   | 39.41          | 74.00          | 34.59       | PK       | Horizontal |
| 2  | 2390.00     | 46.37            | 3.87            | 27.48               | -40.13   | 37.59          | 74.00          | 36.41       | PK       | Horizontal |


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\64  
**Memo:** BLE 1M 2402 R

### Test Graph

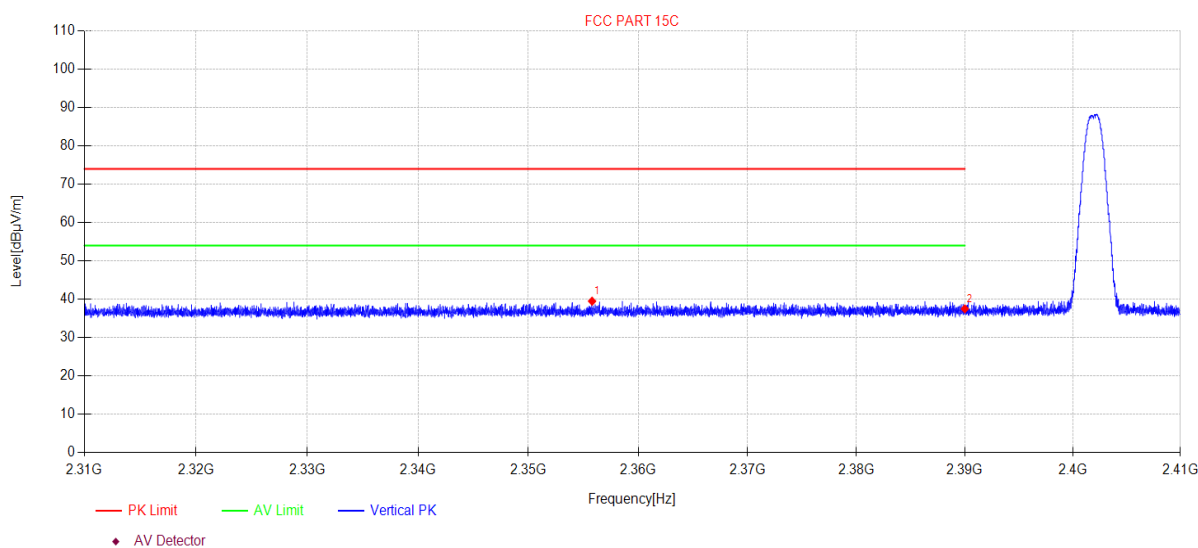

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2355.80     | 48.35            | 3.84            | 27.41               | -40.09   | 39.51          | 74.00          | 34.49       | PK       | Vertical |
| 2  | 2390.00     | 46.30            | 3.87            | 27.48               | -40.13   | 37.52          | 74.00          | 36.48       | PK       | Vertical |

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\65  
**Memo:** BLE 2M 2404 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

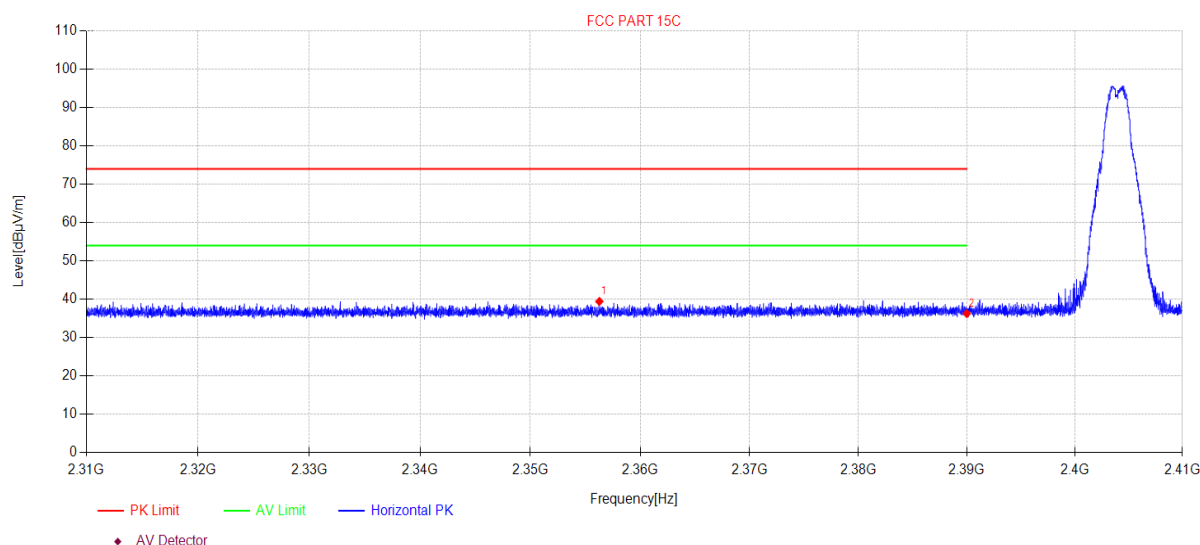

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2356.28     | 48.28            | 3.84            | 27.41               | -40.09   | 39.44          | 74.00          | 34.56       | PK       | Horizontal |
| 2  | 2390.00     | 45.06            | 3.87            | 27.48               | -40.13   | 36.28          | 74.00          | 37.72       | PK       | Horizontal |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\66  
**Memo:** BLE 2M 2404 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

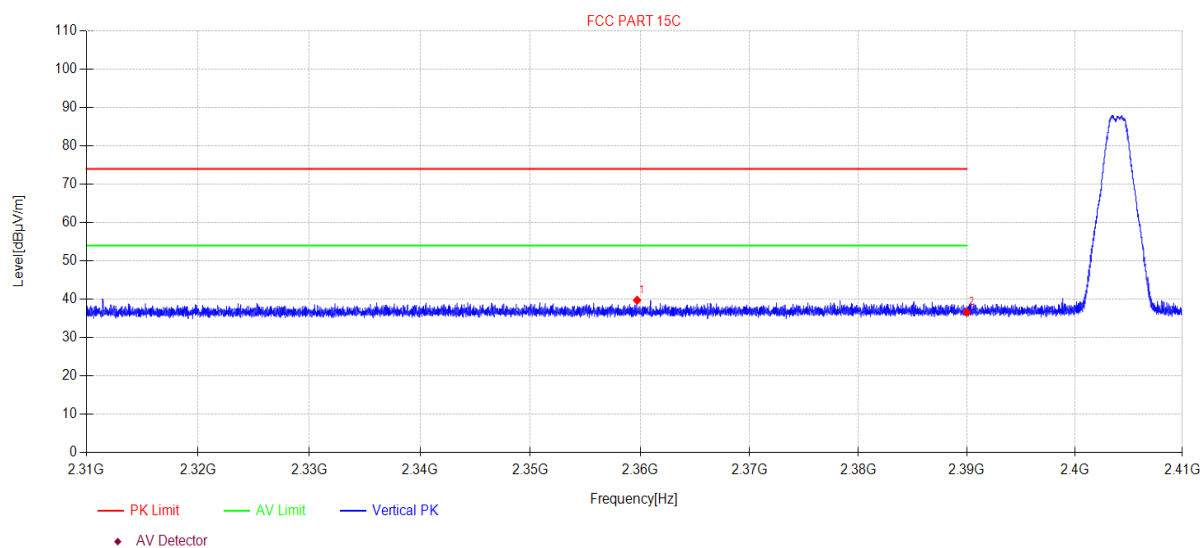

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2359.72     | 48.59            | 3.84            | 27.42               | -40.10   | 39.75          | 74.00          | 34.25       | PK       | Vertical |
| 2  | 2390.00     | 45.41            | 3.87            | 27.48               | -40.13   | 36.63          | 74.00          | 37.37       | PK       | Vertical |

### Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31  
**EUT:** TWS Earbuds  
**Test Mode:** TX Mode  
**Condition:** Temp:23.2°C;Humi:58.3%  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\73  
**Memo:** BLE 1M 2480 R

**Tested By:** Bairong  
**Model Number:** Epic Lab Edition  
**Power Supply:** Battery  
**Test Site:** DDT 3# Chamber

### Test Graph

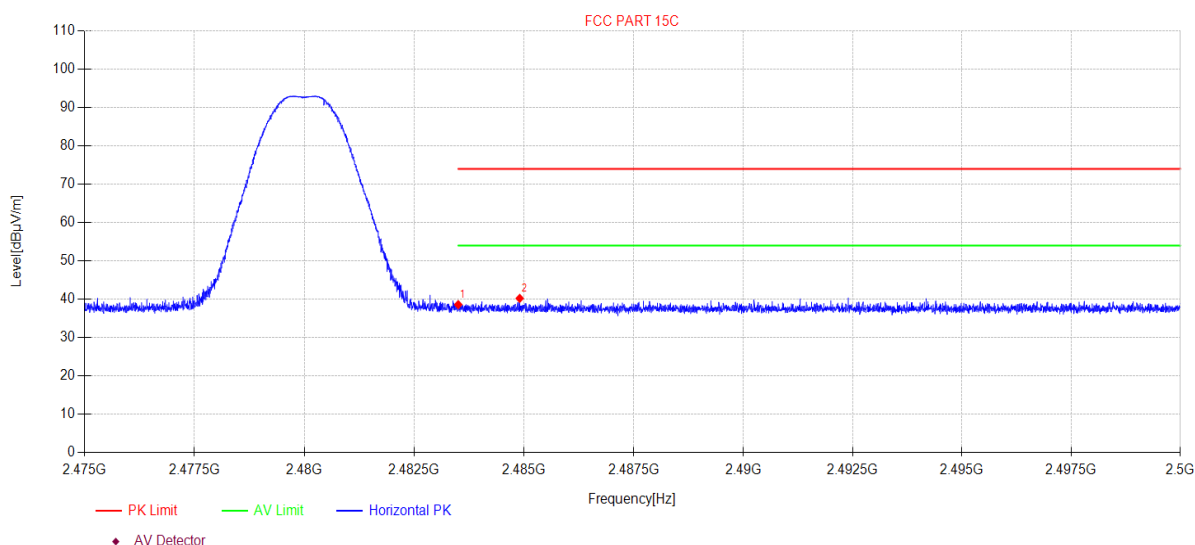

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| 1  | 2483.50     | 47.17            | 3.94            | 27.73               | -40.23   | 38.61          | 74.00          | 35.39       | PK       | Horizontal |
| 2  | 2484.90     | 48.78            | 3.94            | 27.74               | -40.23   | 40.23          | 74.00          | 33.77       | PK       | Horizontal |


### Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\74  
**Memo:** BLE 1M 2480 R

### Test Graph

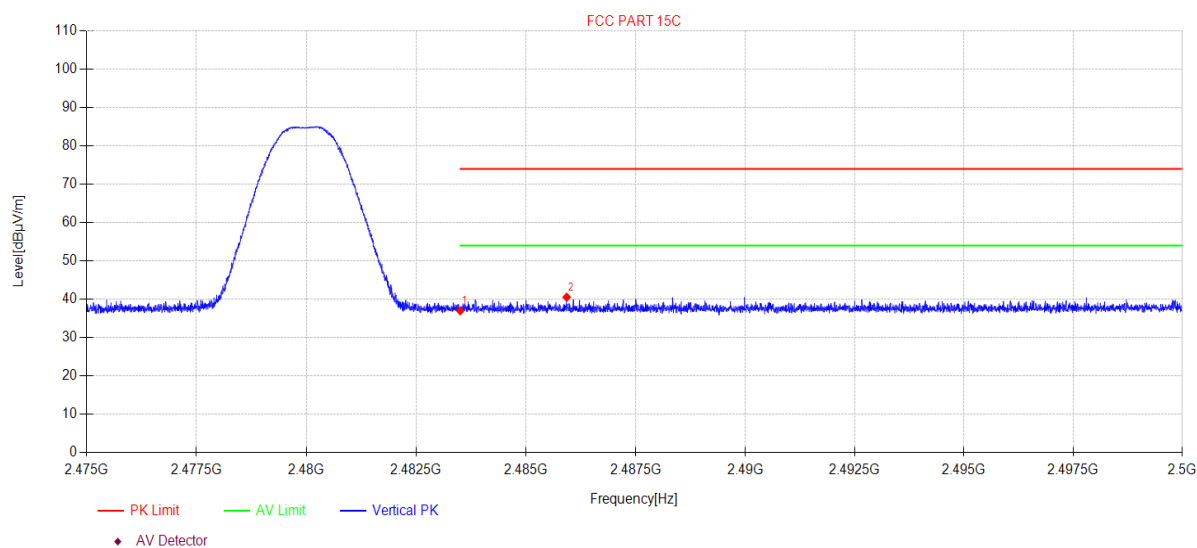

### Suspected Data List

| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2483.50     | 45.56            | 3.94            | 27.73               | -40.23   | 37.00          | 74.00          | 37.00       | PK       | Vertical |
| 2  | 2485.93     | 49.09            | 3.94            | 27.74               | -40.23   | 40.54          | 74.00          | 33.46       | PK       | Vertical |


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\75  
**Memo:** BLE 2M 2478 R

### Test Graph

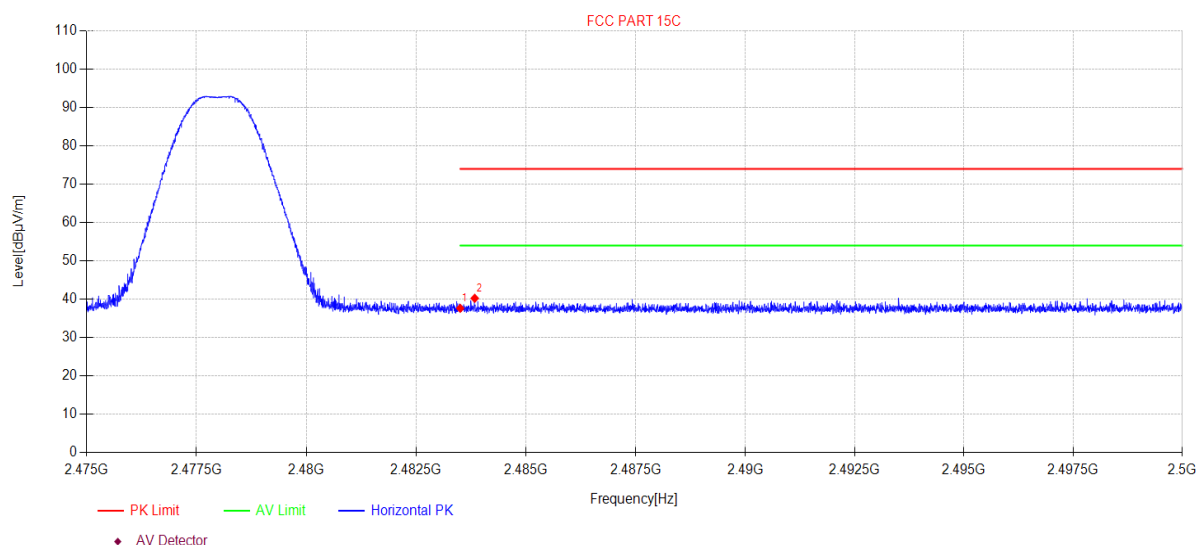

| Suspected Data List |             |                  |                 |                     |          |                |                |             |          |            |
|---------------------|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|------------|
| NO                  | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1                   | 2483.50     | 46.21            | 3.94            | 27.73               | -40.23   | 37.65          | 74.00          | 36.35       | PK       | Horizontal |
| 2                   | 2483.83     | 48.81            | 3.94            | 27.74               | -40.23   | 40.26          | 74.00          | 33.74       | PK       | Horizontal |


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2023-07-31 **Tested By:** Bairong  
**EUT:** TWS Earbuds **Model Number:** Epic Lab Edition  
**Test Mode:** TX Mode **Power Supply:** Battery  
**Condition:** Temp:23.2°C;Humi:58.3% **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2023 report data\Q23071128-2E Epic Lab Edition\FCC ABOVE 1G\76  
**Memo:** BLE 2M 2478 R

### Test Graph

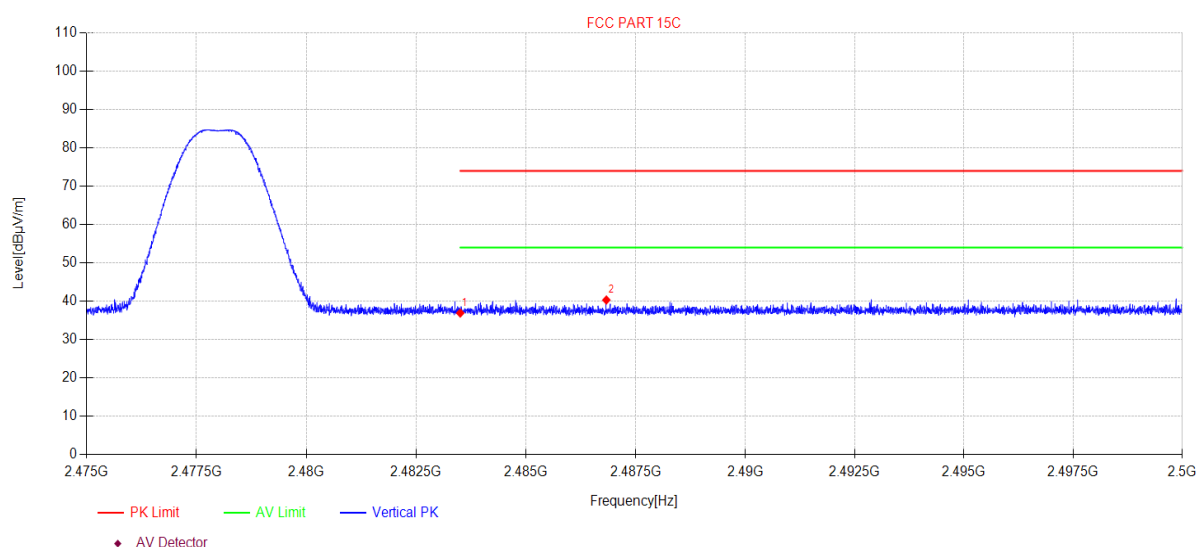

### Suspected Data List


| NO | Freq. [MHz] | Reading [dBμV/m] | Cable loss [dB] | Antenna Factor [dB] | AMP [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|----|-------------|------------------|-----------------|---------------------|----------|----------------|----------------|-------------|----------|----------|
| 1  | 2483.50     | 45.49            | 3.94            | 27.73               | -40.23   | 36.93          | 74.00          | 37.07       | PK       | Vertical |
| 2  | 2486.83     | 48.89            | 3.94            | 27.75               | -40.24   | 40.34          | 74.00          | 33.66       | PK       | Vertical |

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

### 13. Power Line Conducted Emission

#### 13.1. Block diagram of test setup

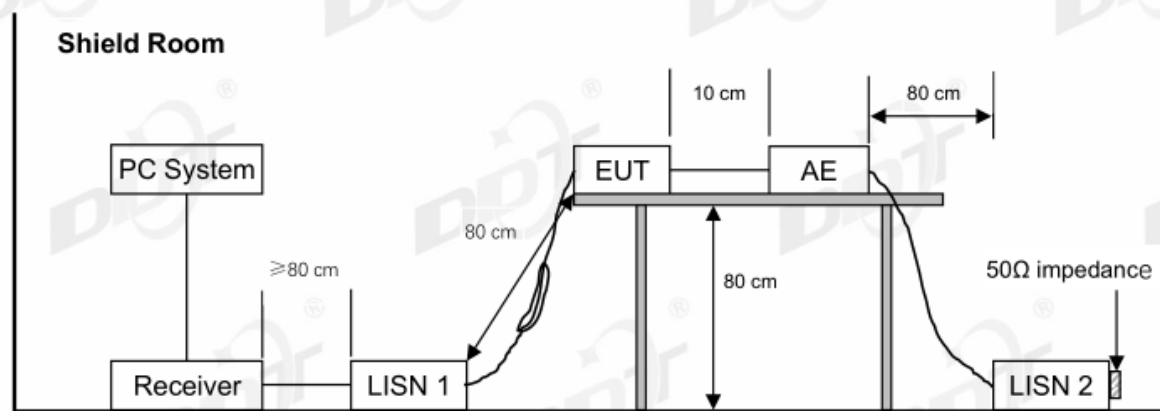

#### 13.2. Power line conducted emission limits

| Frequency         | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
|-------------------|----------------------------------|-------------------------------|
| 150 kHz ~ 500 kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500 kHz ~ 5 MHz   | 56                               | 46                            |
| 5 MHz ~ 30 MHz    | 60                               | 50                            |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

#### 13.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### 13.4. Test result

**Pass. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

## TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room

D:\2023 report data\Q23071128-2E\FCC CE.EM6

Test Date : 2023-08-03

Tested By : Junchang Du

EUT : TWS Earbuds

Model Number : Epic Lab Edition

Power Supply : AC 120V/60Hz


Test Mode : TX mode

Condition : Temp:21.6°C,Humi:58.6%

LISN : 2022 ENV216 2#/NEUTRAL

Memo : BLE 1M

Data: 6

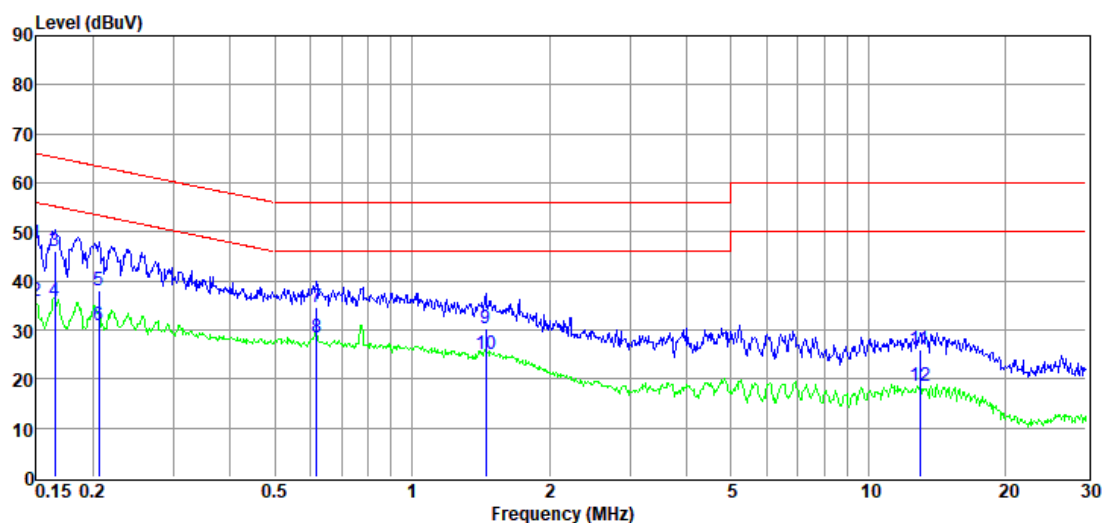

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Limiter<br>Factor<br>(dB) | Result<br>Level<br>(dBμV) | Limit<br>Line<br>(dBμV) | Over<br>Limit<br>(dB) | Detector | Phase   |
|----------------|----------------|-------------------------|------------------------|-----------------------|------------------------------------|---------------------------|-------------------------|-----------------------|----------|---------|
| 1              | 0.15           | 27.66                   | 9.70                   | 0.19                  | 10.15                              | 47.70                     | 66.00                   | -18.30                | QP       | NEUTRAL |
| 2              | 0.15           | 15.75                   | 9.70                   | 0.19                  | 10.15                              | 35.79                     | 56.00                   | -20.21                | Average  | NEUTRAL |
| 3              | 0.17           | 25.91                   | 9.73                   | 0.19                  | 10.15                              | 45.98                     | 65.21                   | -19.23                | QP       | NEUTRAL |
| 4              | 0.17           | 15.94                   | 9.73                   | 0.19                  | 10.15                              | 36.01                     | 55.21                   | -19.20                | Average  | NEUTRAL |
| 5              | 0.21           | 18.04                   | 9.80                   | 0.19                  | 10.15                              | 38.18                     | 63.36                   | -25.18                | QP       | NEUTRAL |
| 6              | 0.21           | 10.67                   | 9.80                   | 0.19                  | 10.15                              | 30.81                     | 53.36                   | -22.55                | Average  | NEUTRAL |
| 7              | 0.62           | 14.65                   | 9.80                   | 0.26                  | 10.00                              | 34.71                     | 56.00                   | -21.29                | QP       | NEUTRAL |
| 8              | 0.62           | 8.43                    | 9.80                   | 0.26                  | 10.00                              | 28.49                     | 46.00                   | -17.51                | Average  | NEUTRAL |
| 9              | 1.45           | 10.30                   | 9.85                   | 0.35                  | 9.80                               | 30.30                     | 56.00                   | -25.70                | QP       | NEUTRAL |
| 10             | 1.45           | 4.99                    | 9.85                   | 0.35                  | 9.80                               | 24.99                     | 46.00                   | -21.01                | Average  | NEUTRAL |
| 11             | 12.99          | 5.74                    | 9.61                   | 0.39                  | 10.13                              | 25.87                     | 60.00                   | -34.13                | QP       | NEUTRAL |
| 12             | 12.99          | -1.55                   | 9.61                   | 0.39                  | 10.13                              | 18.58                     | 50.00                   | -31.42                | Average  | NEUTRAL |

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.


## TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 5# Shield Room

D:\2023 report data\Q23071128-2E\FCC CE.EM6

**Test Date** : 2023-08-03**Tested By** : Junchang Du**EUT** : TWS Earbuds**Model Number** : Epic Lab Edition**Power Supply** : AC 120V/60Hz**Test Mode** : TX mode**Condition** : Temp:21.6°C,Humi:58.6%**LISN** : 2022 ENV216 2#/LINE**Memo** : BLE 1M

Data: 8

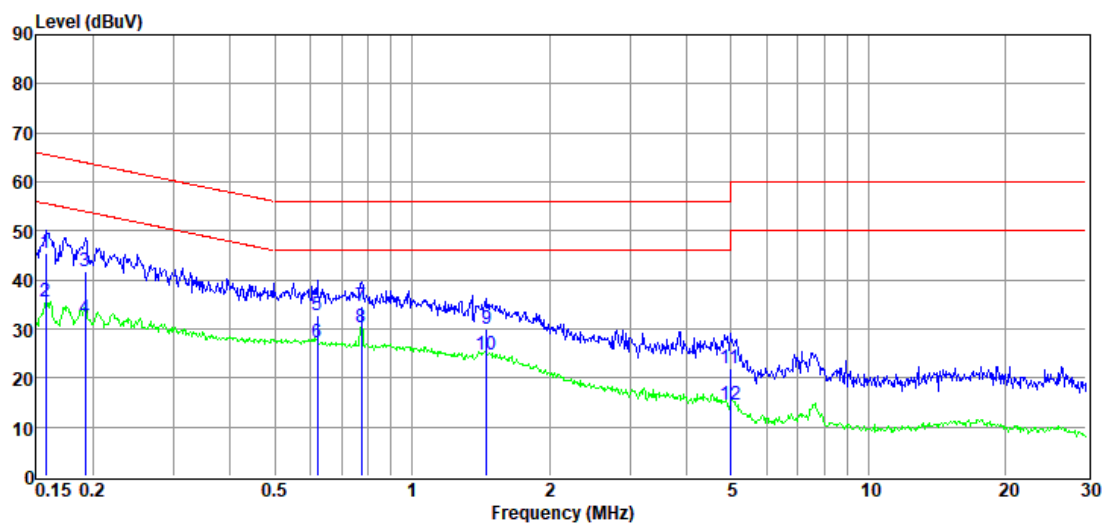

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|-------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |       |
| 1      | 0.16  | 25.32      | 9.80        | 0.19       | 10.15                | 45.46        | 65.60      | -20.14     | QP       | LINE  |
| 2      | 0.16  | 15.58      | 9.80        | 0.19       | 10.15                | 35.72        | 55.60      | -19.88     | Average  | LINE  |
| 3      | 0.19  | 21.54      | 9.80        | 0.19       | 10.15                | 41.68        | 63.93      | -22.25     | QP       | LINE  |
| 4      | 0.19  | 12.17      | 9.80        | 0.19       | 10.15                | 32.31        | 53.93      | -21.62     | Average  | LINE  |
| 5      | 0.62  | 12.84      | 9.80        | 0.26       | 10.00                | 32.90        | 56.00      | -23.10     | QP       | LINE  |
| 6      | 0.62  | 7.29       | 9.80        | 0.26       | 10.00                | 27.35        | 46.00      | -18.65     | Average  | LINE  |
| 7      | 0.78  | 14.73      | 9.77        | 0.28       | 9.94                 | 34.72        | 56.00      | -21.28     | QP       | LINE  |
| 8      | 0.78  | 10.30      | 9.77        | 0.28       | 9.94                 | 30.29        | 46.00      | -15.71     | Average  | LINE  |
| 9      | 1.46  | 10.28      | 9.54        | 0.35       | 9.80                 | 29.97        | 56.00      | -26.03     | QP       | LINE  |
| 10     | 1.46  | 5.06       | 9.54        | 0.35       | 9.80                 | 24.75        | 46.00      | -21.25     | Average  | LINE  |
| 11     | 4.98  | 2.03       | 9.46        | 0.37       | 9.99                 | 21.85        | 56.00      | -34.15     | QP       | LINE  |
| 12     | 4.98  | -5.37      | 9.46        | 0.37       | 9.99                 | 14.45        | 46.00      | -31.55     | Average  | LINE  |

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.


## TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 5# Shield Room

D:\2023 report data\Q23071128-2E\FCC CE.EM6

**Test Date** : 2023-08-03**Tested By** : Junchang Du**EUT** : TWS Earbuds**Model Number** : Epic Lab Edition**Power Supply** : AC 120V/60Hz**Test Mode** : TX mode**Condition** : Temp:21.6°C,Humi:58.6%**LISN** : 2022 ENV216 2#/LINE**Memo** : BLE 2M

Data: 10

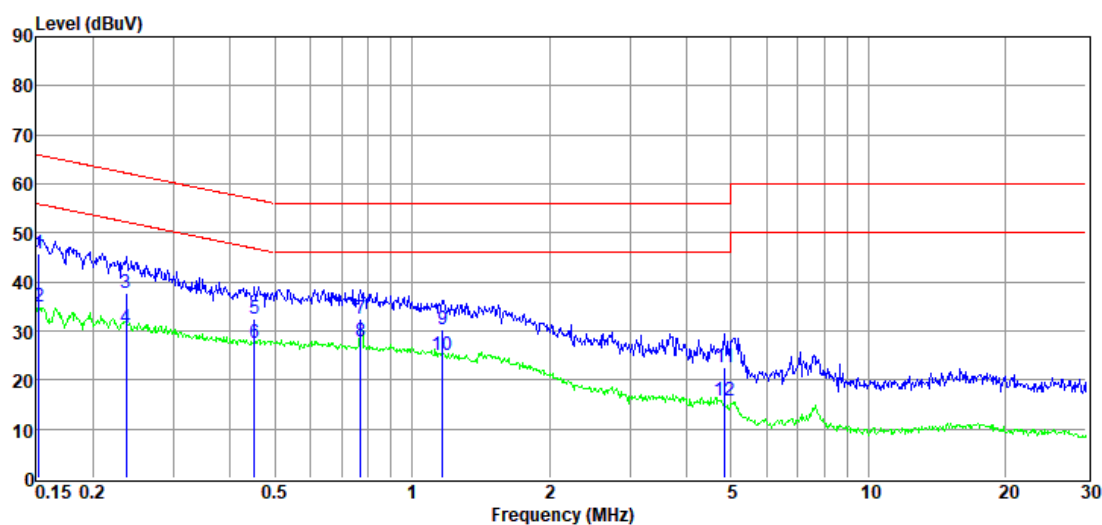

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Limiter<br>Factor<br>(dB) | Result<br>Level<br>(dBμV) | Limit<br>Line<br>(dBμV) | Over<br>Limit<br>(dB) | Detector | Phase |
|----------------|----------------|-------------------------|------------------------|-----------------------|------------------------------------|---------------------------|-------------------------|-----------------------|----------|-------|
| 1              | 0.15           | 25.55                   | 9.80                   | 0.19                  | 10.15                              | 45.69                     | 65.87                   | -20.18                | QP       | LINE  |
| 2              | 0.15           | 14.83                   | 9.80                   | 0.19                  | 10.15                              | 34.97                     | 55.87                   | -20.90                | Average  | LINE  |
| 3              | 0.24           | 17.66                   | 9.80                   | 0.21                  | 10.13                              | 37.80                     | 62.22                   | -24.42                | QP       | LINE  |
| 4              | 0.24           | 10.40                   | 9.80                   | 0.21                  | 10.13                              | 30.54                     | 52.22                   | -21.68                | Average  | LINE  |
| 5              | 0.45           | 12.50                   | 9.80                   | 0.25                  | 10.06                              | 32.61                     | 56.85                   | -24.24                | QP       | LINE  |
| 6              | 0.45           | 7.46                    | 9.80                   | 0.25                  | 10.06                              | 27.57                     | 46.85                   | -19.28                | Average  | LINE  |
| 7              | 0.77           | 12.37                   | 9.77                   | 0.28                  | 9.94                               | 32.36                     | 56.00                   | -23.64                | QP       | LINE  |
| 8              | 0.77           | 7.87                    | 9.77                   | 0.28                  | 9.94                               | 27.86                     | 46.00                   | -18.14                | Average  | LINE  |
| 9              | 1.17           | 10.34                   | 9.63                   | 0.34                  | 9.85                               | 30.16                     | 56.00                   | -25.84                | QP       | LINE  |
| 10             | 1.17           | 5.34                    | 9.63                   | 0.34                  | 9.85                               | 25.16                     | 46.00                   | -20.84                | Average  | LINE  |
| 11             | 4.85           | 2.86                    | 9.44                   | 0.37                  | 9.98                               | 22.65                     | 56.00                   | -33.35                | QP       | LINE  |
| 12             | 4.85           | -4.17                   | 9.44                   | 0.37                  | 9.98                               | 15.62                     | 46.00                   | -30.38                | Average  | LINE  |

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.


## TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 5# Shield Room

D:\2023 report data\Q23071128-2E\FCC CE.EM6

**Test Date** : 2023-08-03**Tested By** : Junchang Du**EUT** : TWS Earbuds**Model Number** : Epic Lab Edition**Power Supply** : AC 120V/60Hz**Test Mode** : TX mode**Condition** : Temp:21.6°C,Humi:58.6%**LISN** : 2022 ENV216 2#/NEUTRAL**Memo** : BLE 2M

Data: 12

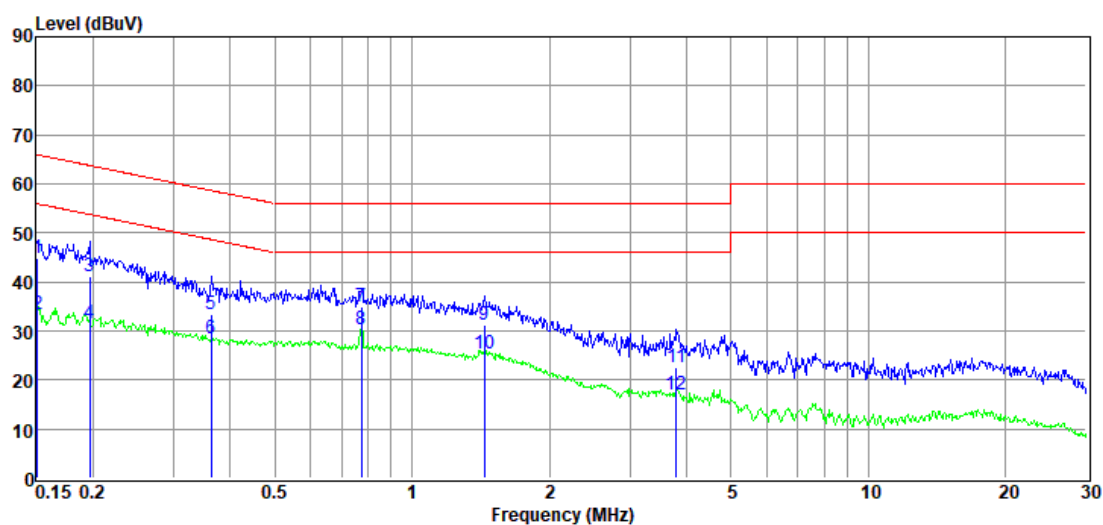

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Limiter<br>Factor<br>(dB) | Result<br>Level<br>(dBμV) | Limit<br>Line<br>(dBμV) | Over<br>Limit<br>(dB) | Detector | Phase   |
|----------------|----------------|-------------------------|------------------------|-----------------------|------------------------------------|---------------------------|-------------------------|-----------------------|----------|---------|
| 1              | 0.15           | 24.74                   | 9.70                   | 0.19                  | 10.15                              | 44.78                     | 65.96                   | -21.18                | QP       | NEUTRAL |
| 2              | 0.15           | 13.30                   | 9.70                   | 0.19                  | 10.15                              | 33.34                     | 55.96                   | -22.62                | Average  | NEUTRAL |
| 3              | 0.20           | 21.00                   | 9.79                   | 0.19                  | 10.15                              | 41.13                     | 63.76                   | -22.63                | QP       | NEUTRAL |
| 4              | 0.20           | 11.54                   | 9.79                   | 0.19                  | 10.15                              | 31.67                     | 53.76                   | -22.09                | Average  | NEUTRAL |
| 5              | 0.36           | 13.41                   | 9.80                   | 0.24                  | 10.08                              | 33.53                     | 58.65                   | -25.12                | QP       | NEUTRAL |
| 6              | 0.36           | 8.30                    | 9.80                   | 0.24                  | 10.08                              | 28.42                     | 48.65                   | -20.23                | Average  | NEUTRAL |
| 7              | 0.78           | 14.82                   | 9.83                   | 0.28                  | 9.94                               | 34.87                     | 56.00                   | -21.13                | QP       | NEUTRAL |
| 8              | 0.78           | 10.24                   | 9.83                   | 0.28                  | 9.94                               | 30.29                     | 46.00                   | -15.71                | Average  | NEUTRAL |
| 9              | 1.44           | 11.15                   | 9.85                   | 0.35                  | 9.80                               | 31.15                     | 56.00                   | -24.85                | QP       | NEUTRAL |
| 10             | 1.44           | 5.39                    | 9.85                   | 0.35                  | 9.80                               | 25.39                     | 46.00                   | -20.61                | Average  | NEUTRAL |
| 11             | 3.80           | 2.38                    | 9.80                   | 0.36                  | 9.91                               | 22.45                     | 56.00                   | -33.55                | QP       | NEUTRAL |
| 12             | 3.80           | -3.08                   | 9.80                   | 0.36                  | 9.91                               | 16.99                     | 46.00                   | -29.01                | Average  | NEUTRAL |

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## 14. Antenna Requirements


### 14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 14.2. Result

The antenna used for this product is FPC antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the left side transmit antenna is -4.99 dBi and right side is -1.42 dBi.

## 15. Test Setup Photograph

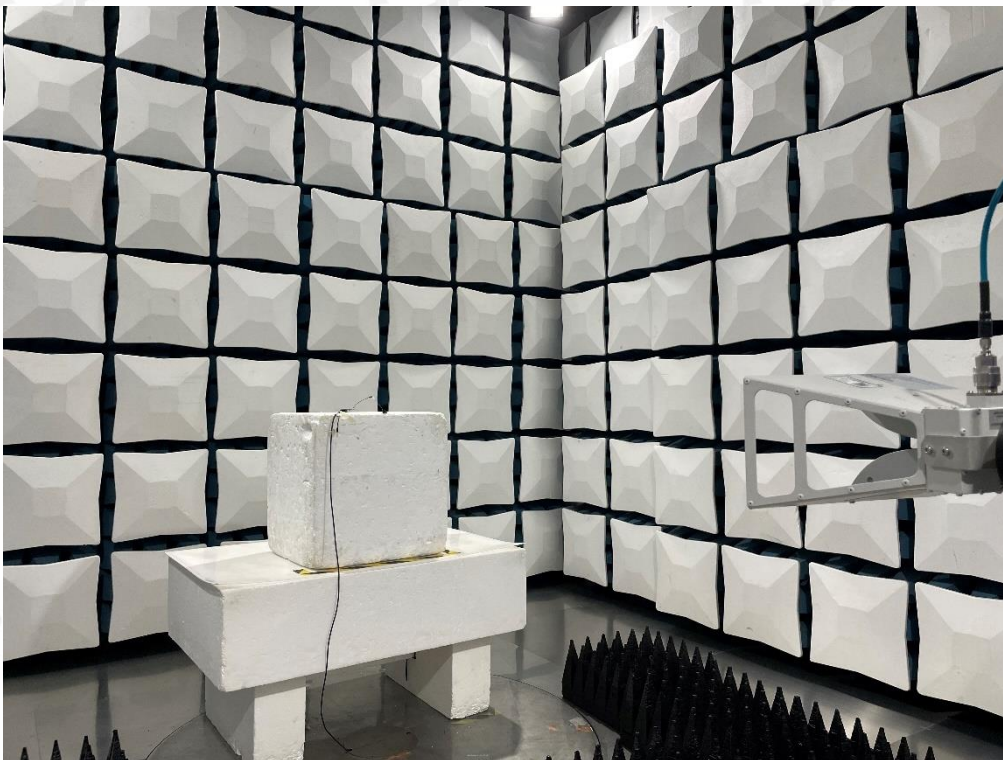



## 16. Photos of the EUT

Please refer to appendix I.

**END OF REPORT**