

























TEAMBMPRO.COM





POWERING YOUR ADVENTURES

With over 50 years' experience in power solutions combined with manufacturing and design facilities in Melbourne, Australia, BMPRO are the leading experts in RV power and control management.

Inspired by the great outdoors, we have created a range of rugged, smart and reliable products to power your adventures.

Our range of battery, power and RV management control systems gives you peace of mind when you are on the road, so that you can relax in even the most far flung destinations, knowing you have control over your power needs.

To learn more about the BMPRO range of products, please visit our website **teambmpro.com**



SAFETY PRECAUTIONS

Please read the Safety Precautions before installing or using the system. Be sure to observe all precautions without fail. Failure to observe these instructions properly may result in personal damage, or personal injury which depending on the circumstances may be serious and cause loss of life.

WARNING



Correct installation is the most critical factor in ensuring the safe use of the system. If every consideration of these instructions has been satisfied, the system will be safe to operate.



Do not drop or vigorously shake the product as this may cause damage. Do not shock the product or its accessories as this may cause the product to fail, catch fire or explode.



Stay away from magnetic equipment. Radiation may erase the information stored on this product, causing it to become inoperative.



Electricity and water do not mix. Keep this product and your battery dry and do not expose it to water or water vapor. Do not operate this product or battery near any sort of liquid. Do not operate this product with wet hands.



Do not use this product in environments that are excessively hot, cold, dusty or humid or where it will be exposed to magnetic fields or long periods of sunshine. Such exposure may cause the product or your battery to fail, catch fire or explode.



Clean the housing of this product lightly with a dry or moist cotton cloth. Do not use alcohol, thinners, benzene or any other chemical cleaner.



The system is a high precision electronic product. It contains no user-serviceable parts inside. Do not try to dismantle, modify or repair it yourself. Disassembly, service or repair by an unauthorized person will void the warranty.



Before using this product, check that cable connections to the battery are of correct polarity. To protect against accidental short circuit, ensure that the shrouding supplied with the batteries are always fitted to the battery terminals.



Do not install this product in the same compartment where flammable materials, such as petrol is stored.



Product specifications are subject to change and improve without notice.

INFORMATION FOR THE USER

This device complies with Part 15 of the FCC Rules, and Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:


- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including what may have cause undesired operation.



Any changes or modification are not approved by BMPRO and will void compliance of the product and the user's authority to operate this equipment.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1. L'appareil ne doit pas produire de brouillage;
- 2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement



Tout changement ou modification non expressément approuvé par BMPRO pourrait annuler la conformité du produit et le pouvoir de l'utilisateur d'utiliser cet équipement.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency and energy. If not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

CONTENTS

SAFETY PRECAUTIONS					
ABOUT THE SYSTEM					
SMARTCONNECT					
BLEXTENDER					
ADDITIONAL MOTOR CONTROL					
DESCRIPTION OF PARTS					
DISPLAY (MODEL DEPENDENT)					
DISPLAY NAVIGATION (MODEL DEPENDENT)					
CONTROLLER (MODEL DEPENDENT)					
CONTROL PANEL MENU FUNCTIONS (MODEL DEPENDENT) .					
PAIRING TO THE NODE					
PAIRING TO THE NODE WITH A DISPLAY (MODEL DEPENDENT)					
PAIRING TO THE NODE WITH A CONTROLLER (MODEL DEPENDE	NT)			. 18
BMPRO CLOUD (MODEL DEPENDENT)		÷		i.	20
CONNECTING TO THE BMPRO CLOUD					. 20
CLOUD CONTROL					
WINEGARD					. 22
THE APP	÷	÷	į.	i.	25
COMPATIBLE DEVICES					. 25
APP HOME SCREEN					. 25
TANKS SCREEN					. 26
LEVELING AND MOTORS SCREENS					. 27
CLIMATE SCREEN					. 31
LIGHTS SCREEN					.32

MANUAL PART **036481**REV **6.0**Designed by BMPRO, one of Australia's leading power solution experts, the BMPRO range of products are proudly Australian made in Melbourne, Victoria and represent a high-quality product that will provide years of service.



DISCLAIMER: BMPRO accepts no liability for any loss or damage which may occur from the improper or unsafe use of its products. Warranty is only valid if the unit has not been modified or misused by the customer.

ENERGY CENTER
BATTERY MONITORING
GENERATOR (MODEL DEPENDENT)
AUTOMATIC GENERATOR START
FUEL
ENERGY CENTER SETTINGS
SOLAR CONTROLLER
SOLAR CONTROLLER SETTINGS
GENERAL SETTINGS
SENSOR SETTINGS
UNIT CONVERSION
DIAGNOSTICS
VOICE CONTROL (MODEL DEPENDENT)
UPDATING FIRMWARE (MODEL DEPENDENT)
SWITCH (MODEL DEPENDENT)
CHECKING THE BATTERY IN YOUR SWITCH
REPLACING THE BATTERY IN YOUR SWITCH
FAQS AND TROUBLESHOOTING
PAIRING WITH THE NODE
APP
CONTROLLER (MODEL DEPENDENT)
SWITCH (MODEL DEPENDENT)
APPENDICES
SPECIFICATIONS
LIMITED WARRANTY TERMS AND CONDITIONS

ABOUT THE SYSTEM

The system brings smart home technology to your RV, taking control and management of your RV features to new horizons!

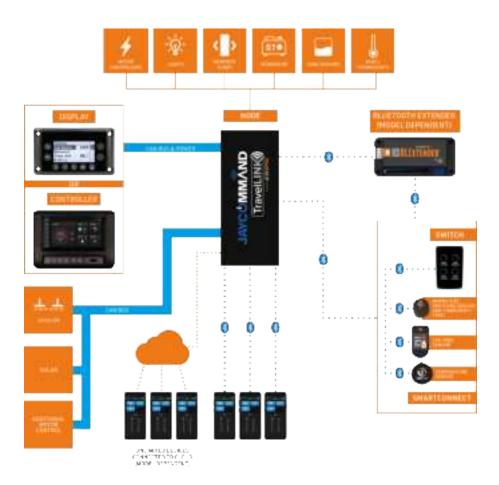


FIGURE 1: System Diagram

Node

The heart of the system, the Node, is an RV management system that powers and monitors your RV features and accessories. The Node communicates via RV-C to the Display or Controller (depending on your model) and Bluetooth Low Energy with your smartphone, to receive the commands to control power to all your RV features and accessories.

Firmware Updates

The Node can be updated over-the-air, meaning you get the latest feature updates without the need to bring your RV to your local RV dealer. The App on your smartphone or Controller (depending on your model) will need to be updated regularly to receive the latest firmware.

Notifications to update the Node firmware may be received after updating the App. These may not be postponed and may start automatically. While the Node is powered, update the Node at the prompt to ensure that the Node is compatible with the App.

For more information, refer to **Updating Firmware (Model Dependent)**.

Display/Controller (Model Dependent)

The sleek, wall-mounted Display or Controller gives you the freedom to monitor and control multiple RV functions.

App

The App allows you to monitor and control your RV on up to 4 personal devices via Bluetooth.

The App is available both for Android and iOS.

Monitor

Water tanks, Temperature, Tire Pressure, Battery and LPG.

Control

Lighting, Slide-outs, Awnings, Jacks, Heating and Cooling Systems, Generators and leveling.

SMARTCONNECT

Your system is SmartConnect ready!

With SmartConnect Bluetooth sensors, you can remotely monitor various aspects of your RV, such as tire pressure, propane tank levels and individual temperatures.

Through the App these sensors are a great addition to enhance your overall experience.

SmartConnect sensors are available through your local RV dealership. For more details, refer to **teambmpro.com/products/smartconnect**

BLEXTENDER

Your system is compatible with BMPRO's BLExtender.

The BLExtender is a Bluetooth range extender, designed to allow you to use your SmartConnect Bluetooth sensors from every corner of your RV without worrying about losing Bluetooth signal.

For more details, refer to teambmpro.com/products/bluetooth-range-extender

ADDITIONAL MOTOR CONTROL

Your system supports additional motor control.

For more information about additional motor control, contact Jayco.

DESCRIPTION OF PARTS

DISPLAY (MODEL DEPENDENT)



FIGURE 2: The Display

1. Page Navigation Button

Move between function screens, eg. From Tanks to Water screen.

2. Menu Navigation Button

Navigate between items within a page, e.g. in the Water page move from Pump to Elec Heater.

3-4. Action Buttons

The function for each of the action buttons changes depending on the selected menu item. These functions will be displayed on the screen, eg. OK, EXT, RET, On, Off.

5. Redundancy Buttons

Turn lights and water pump on or off. The climate button takes you to the main climate page.

Adjusting the Lights

QUICK press toggles between off and the previous stored brightness.

LONG press sets the light brightness to 100%.

DISPLAY NAVIGATION (MODEL DEPENDENT)

Use the Page Navigation Button to move from page to page.

Use the Menu Navigation Button to move between menu items within a page.




FIGURE 3: Tanks Screen

Tanks

The Tanks display shows the levels of fresh, gray and black water tanks. Levels are displayed as:

FULL 2/3 FULL 1/3 FULL **EMPTY**



Water

From the Water screen, the Pump, the Electric and Gas Heaters can be switched on and off. A warning will appear if the Gas Heater fails to

ignite after three attempts.

FIGURE 4: Water Screen


Motors Slide 1 Awning 1 Slide 2 Awning 2 Slide 3 Slide 4

Motor

Press the **EXT** or **RET** Action buttons to control the motors.

This menu list is RV model dependent.

FIGURE 5: Motor Screen



Climate

Room: The ambient room temperature. **Set:** User-controlled temperature setting.

Range: 33°F - 90°F (1°C to 32°C)

Modes: OFF / FAN / COOL / AUTO-COOL / HEAT

PUMP / FURNACE / HEAT-BOTH Fan: Settings: HIGH / LOW

AC Controls are RV model dependent.

NOTE: This indicates a fault with one of the climate outputs or the temperature sensor. A sensor fault is also indicated by no room temperature value being shown, eg. -- F



FIGURE 7: Climate Screen with AC-Fan

If **Furnace Mode** is selected, the AC-Fan option displays.

AC-Fan: Settings: OFF / LOW






FIGURE 9: Settings Screen

Temp. Unit

D-SW 1.2



FIGURE 10: Advanced Screen

Energy

ON: Press and hold the **ON** action button, until the generator turns on.

OFF: Press and hold the **OFF** action button, until the generator turns off.

NOTE: A generator warning will appear if the generator fault LED is actively blinking.

Settings

Pair Device: Press OK to pair to a device.

Advanced: Press OK to go to the Advanced menu.
Temp. Unit: Toggle between Fahrenheit & Celsius.
D-SW: Indicates the software version on the
Display.

Advanced

Forget All Dv: Forget ALL Bluetooth Devices.

Pair Switch: Pair BLE Switches.

Forget All Sw: Forget all BLE Switches.

SW: Node software version.

CONTROLLER (MODEL DEPENDENT)



FIGURE 11: The Controller

1. Controller Home Screen Button

2. Connection Bar

When connected to Bluetooth, the icon will appear on screen.

When connected to the cloud, the icon will appear on screen.

Both icons will appear when both services are available.

3. Settings Icon

Access to the App General Settings.

This button is only available on the Home Screen.

4. Return

Navigate to the previous page.

5. Main screen

Navigate to the Controller's tablet Android screen.

6. Recent Applications

Display a list of recently used / background applications on the Controller.

7. Reset Pinhole

To reset the Controller, vertically insert an item (eg. a paper clip) into the reset pinhole.

NOTE: The item must be inserted vertically as the reset hole is in a plastic housing.

8. Control Panel (Model Dependent)

To provide quick access to lights, water pump and motor operation while the Controller is in use.

9. Lights (Model Dependent)

Turn lights and water pumps on/off:

All Interior Lights

All Exterior Lights

All Lights

or WP Water Pump Control

Adjusting the Lights

QUICK press toggles between off and the previous stored brightness.

LONG press sets the light brightness to 100%.

10. Motor Operation (Model Dependent)

To extend (EXT) and retract (RET) any motors installed in the RV.

NOTE: These buttons are also used during the pairing process between the Node and devices such as the Controller and smartphone.

11. & 13. Navigation Buttons (Model Dependent)

Use navigation buttons to scroll through the Control Panel menu functions. For more information on available functions, refer to the **Control Panel Menu Functions** section.

12. Menu Display (Model Dependent)

Displays the current menu function.



CONTROL PANEL MENU FUNCTIONS (MODEL DEPENDENT)

The menu functions on the Controller's Control Panel allow you to operate various motors, quickly switch off loads and pair or clear the Node.

The following functions apply depending on what is available in your RV.



Awnings

Navigate to the desired awning: A1 (Awning 1)

A2 (Awning 2)

then press EXT or RET to operate.



Slide-outs

Navigate to the desired slide-out:

S1 (Slide-out 1)

S2 (Slide-out 2)

S3 (Slide-out 3)

S4 (Slide-out 4)

S5 (Slide-out 5)

S6 (Slide-out 6)

then press EXT or RET to operate.



Pairing

To pair the Node with the Controller, your own smartphone, or to clear the Node of any pairings.

For more information, see Pairing to the Node with a Controller and FAQs and Troubleshooting.



Jacks

Navigate to the desired Jack:
J1 (Landing Jack)

J2 (Front Stabilizing Jack)

J3 (Rear Stabilizing Jack) then press **EXT** or **RET** to operate.



Ramp Door

Navigate to the desired ramp door, then press **EXT** or **RET** to operate.



Off

Navigate to **OF**, then press **EXT** to turn power OFF to all appliances.

The OF function will not shutdown generators connected to the Node. Navigate to the OF function, then press **EXT** to confirm that power to all accessories should be turned off.

Note: The Controller will turn off after 10 seconds. The Controller can be turned back on by pressing any of the Light buttons on the Control Panel.

PAIRING TO THE NODE

PAIRING TO THE NODE WITH A DISPLAY (MODEL DEPENDENT)

Pairing your smartphone to the Node is simple. The App will guide you through the process.

The Node can be paired to a total of four devices.

- 1. Launch the App on your phone and choose the device installed in your RV
- 2. Press the Page Navigation Button to navigate to the Settings page.
- **3.** When "Pair Device" is highlighted, press the **OK** function button and your smartphone will begin pairing to the Node.



FIGURE 12: Pairing to the NODE

When your smartphone is paired with the Node, the Bluetooth icon is displayed on the App home screen.



For additional support, refer to the **FAQs and Troubleshooting** section.

PAIRING TO THE NODE WITH A CONTROLLER (MODEL DEPENDENT)

Pairing your Controller, smartphone or tablet to the Node is done in three easy steps. The App will guide you through the pairing process.

NOTE: The Controller will have been paired to your Node at the factory. You should only need to pair your own device or smartphone to the Node.

While the Node can be paired to a total of four devices (including the Controller), you can only pair one device at a time to the Node.

- 1. Launch the App on your phone.
- 2. Using the < or > buttons on the Controller, navigate to the PA menu item.



FIGURE 13: Navigate to the 'PA' menu item

3. When 'PA' appears on the display, press the EXT button to start the pairing process to the Node. 'PA' will blink for a maximum of 30 seconds or until a device is connected.



FIGURE 14: Start the Pairing Process

4. When pairing is successful, you will be taken to the App home screen and the Bluetooth icon will be visible.



FIGURE 15: Pairing Successful

CONGRATULATIONS, YOU'RE CONNECTED!

For additional support, refer to the FAQs and Troubleshooting section.

Cannot Pair to the Node

If you are pairing a mobile device to the Node and pairing fails, or "--" appears on screen, it is mostly likely that four devices are connected to the Node simultaneously. To resolve this, either:

- Close the app on one of the devices that are connected to the Node and try again, or
- Clear the memory of the Node of all the previously paired devices.



FIGURE 16: Pairing Failure

BMPRO CLOUD (MODEL DEPENDENT)



You can only connect to the BMPRO Cloud if your RV is equipped with a Controller.

Systems with a Controller have cloud control, which allows you to remotely connect, monitor and control your RV from your smart device.

CONNECTING TO THE BMPRO CLOUD

To connect to the BMPRO Cloud for the first time:

- 1. Connect your Controller to the Internet via Wi-Fi.
- 2. Launch the App.
- 3. From the App home screen, press the Settings icon.
- 4. Press Remote Connection.
- 5. Press Create account.

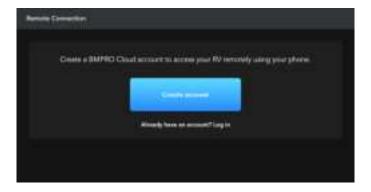


FIGURE 17: Create a BMPRO account

6. Enter your full name, email address and a password of your choice.



WARNING

Keep your password in a safe place and only share details with others if you want them to access and control your RV!

- 7. Press Create account.
- **8.** An email will be sent to your account to verify your email address. Click on the link provided in the email to complete verification.
- Now connect your smart device using your BMPRO account details to get started.

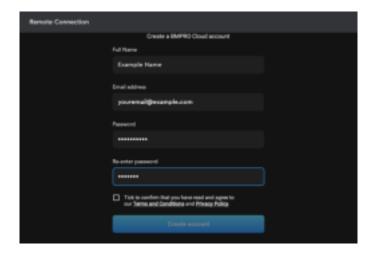


FIGURE 18: Enter Your Details

Account Not Verified

If the email address was not verified, the following message will appear:



FIGURE 19: Email Not Verified

Press **RESEND VERIFICATION EMAIL** to complete the email verification process.

Forgot Your Password

If you have forgotten your Cloud account password, press **Forgot your password** in the login page, enter your email address and press **SEND EMAIL**.

CLOUD CONTROL

To control the RV from cloud:

- 1. Launch the App on your smart device.
- Press Log in to BMPRO Cloud, or in General Settings, press Remote Connection.
- 3. Enter your email address and password.

Use cloud control to remotely monitor and control features in your RV.

For your safety and for the prevention of unintentional damage, the leveling, motor controls and the water pump ON switch can not be controlled from the cloud.

WINEGARD



You can only set up Winegard if your RV is equipped with a Controller.

To set up Winegard:

- 1. Go to the Settings menu.
- 2. Scroll down and press Winegard Settings.

Logging into Winegard network

- 1. Press the search button to search for the available networks.
- 2. Select the desired network and enter the password or enter the network name and password. If your network is not seen, make sure the Winegard is turned on and scan again.
- 3. After the network name and password are entered correctly, press Join.



FIGURE 20: Winegard login

Internet Preferences

You can select from the following options:

- 4G: Connect to a 4G network. SIM card required.
- WiFi: Connect to an external WiFi network.
- Internet OFF: No internet source selected.



FIGURE 21: Winegard Internet Preferences

Winegard Status

The current status of the Winegard is displayed on the Winegard tile in the General Settings area.

- **SETUP:** This is seen when no Winegard network has been connected previously. Press the tile to connect to a Winegard network.
- UNAVAILABLE: This means that the Winegard network is not available and may be seen during a transition from one mode to another. If Unavailable is displayed for a long time, check that the Winegard module is ON.
- **FETCHING INFO, CONFIGURING:** This may be seen during a transition from one mode to another, e.g. changing from WiFi to 4G.
- 4G: This is seen when the Winegard is set to 4G. The status of the network is also displayed, e.g. Connected to 4G/LTE "NetworkName Data Plan"
- WiFi: This is seen when the Winegard is set to WiFi. The status of the network is also displayed, e.g. Connected to WiFi "NetworkName"
- Internet OFF: This is seen when the Winegard is set to WiFi. The status of the network is also displayed Internet is off.

WiFi Properties

To log in to a WiFi network:

- 1. Press the Search button for a list of available networks and select your desired network.
- 2. If your network is not seen, make sure the Winegard is turned on and scan again. After the network name and password are entered correctly, press Join.



FIGURE 22: Logging into WiFi

Save and/or forget WiFi Network

After the WiFi credentials are entered, the WiFi network will be saved.

- Press Join to connect last saved network.
- Press X to delete the saved network.



FIGURE 23: WiFi Credentials

THE APP

Download the **JAYCOMMAND/TravelLINK powered by BMPRO** app to your smartphone or tablet and enjoy the freedom to monitor and control the onboard features of your RV remotely.

If your system has a Display, the App allows you to access more features of your connected RV that otherwise may not be available.



WARNING

Available features on the App may vary depending on your RV model.

COMPATIBLE DEVICES

The App is compatible with Android 6.0 or later and iOS 11 or later.









FIGURE 24: QR Codes

APP HOME SCREEN

The App home screen provides a general overview of the key features of your RV. It also provides a quick way to control specific RV lights and the RV's climate system, direct from the home screen.





FIGURE 25: App Home Screen

TANKS SCREEN

You can control the water pump, electric, gas heaters and tank heaters from the Tanks screen, if applicable.

The Tanks screen displays the levels of your fresh, gray and black water tanks. The water levels displayed are: Empty, 1/3, 2/3 and Full.





FIGURE 26: Tanks Screen

LEVELING AND MOTORS SCREENS

The Leveling and Motors Screens control the Slide-outs, Awnings, Landing Legs and Jacks. It contains controls for certain Leveling Systems installed in the RV.

NOTE: All Jayco-approved leveling systems are compatible.



Before operating any motors, ensure the area is free from obstacles and other hazards. Please ensure that any persons near the RV are not in any danger from moving parts.

Leveling Control

If equipped, the leveller can be controlled from the Controller (model dependent) or your smartphone. Individual jack controls and zero point calibration are also available on some models.





FIGURE 27: Leveling Screen





FIGURE 28: Jack Control

Zero Point Calibration (Model Dependent)

If your model supports zero point leveling, you can perform zero point calibration from the **Motor Settings** screen in the Settings menu.





FIGURE 29: Zero Point Leveling

For more information on zero point calibration, refer to the **Zero Point Calibration Sequence help guide**.

FIGURE 30: Zero Point Calibration Sequence help guide QR code



Note: Depending on the type of leveling system installed, the tongue jack may not be available.

Leveling Faults

If a fault occurs with the leveling system, a pop-up will appear. To clear the fault, follow the instructions in the pop-up and press **OK**.




FIGURE 31: Fault Error Message

Motor Control

Only one motor may be operated at a time. Once a motor is in operation, motor control will be disabled in any other device running the App. This does not include the leveling system.





FIGURE 32: Motors Screen

To operate motors on your own device, swipe to unlock the Motors screen.



FIGURE 33: Swipe to Unlock

Motor Lockout Feature



The motor lockout feature is only available if your RV is equipped with a Controller.

Systems with a Controller will automatically lockout the motor if a high input is detected on the brakes. This will be shown on the Node at pin 64.

The motor cannot be turned back on until the lockout is disabled.

If the motor is locked, the App will show a pop-up.

The motor can be turned back on by:

- Using the redundancy switches on the Controller.
- Sending leveling commands with the leveller.

CLIMATE SCREEN

The Climate Screen allows you to control the temperature inside your RV. The zones that appear depend on the vehicle configuration.

Choose from Cool, Cool Auto or Heat to adjust the temperature between $33^{\circ}F - 90^{\circ}F$ ($1^{\circ}C - 32^{\circ}C$).

Cool & Cool Auto

Cool will run the fan continuously and cycle the compressor, as it needs to achieve the target temperature.

Cool Auto is similar, but will only turn on the fan when the compressor is operating.

There may be a three minute delay in turning the compressor on.





FIGURE 34: Cool / Cool Auto Screen

Fan

The fan can be operated for air circulation in each zone.





FIGURE 35: Fan Mode Screen

Heat

If available, the RV may be heated from the furnace, heat pump or a combination of both. The furnace can only be controlled from the Main Climate Zone.

To set the temperature:

- 1. Turn climate on.
- 2. Select your mode of operation.
- **3.** Adjust the temperature to your desired setting (if available in the selected mode).
- **4.** If the mode is set to Furnace, you can then set the main A/C fan to off or low.

There may be a three minute delay in turning the Heat pump on.

To prevent unwanted circulation of cool air, in furnace mode the main A/C fan will wait 60 seconds before coming on to allow time for the furnace to heat the RV.

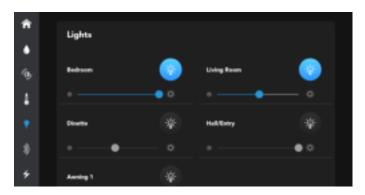




FIGURE 36: Heat Mode Screen

LIGHTS SCREEN

Lights can be turned on and off from the light screen. Brightness can also be adjusted on certain lights.






FIGURE 37: Lights Screen

ENERGY CENTER

BATTERY MONITORING

Battery Monitoring allows you to monitor RV and/or chassis voltages. If no RV and chassis batteries are connected, the App will monitor the system voltage of the Node.

If the voltage drops below 12V, a warning will appear on the screen.





FIGURE 38: Energy Center Display

GENERATOR (MODEL DEPENDENT)

Using the Generator over Bluetooth

To turn on the generator using Bluetooth, press and hold the **Start Generator** button until the generator starts. The App will also show the running status of the generator. To stop the generator, press and hold the **Stop Generator** button until the generator stops.

Using the Generator over the Cloud (Model Dependent)

To turn on the generator over the cloud, press the **Start Generator** button. A confirmation message will appear. Swipe right on the **Swipe to Enable** button to start the generator.

Generator Fault

If the Generator Status section in the App indicates a fault:

- 1. Press the **Stop Generator** button.
- 2. Fix the fault with the generator.
- 3. Press the Start Generator button.

If the fault has been fixed, when you next turn the generator on from the App, the Generator Status section will display "No fault".

Generator Lockout (Model Dependent)

The generator will be automatically locked out if a high input is detected on the brakes. This will be shown on the Node at pin 64.

The generator cannot be turned back on until the lockout is disabled.

The App will not show a pop-up if the generator is locked out.

The lockout can be disabled by:

- Using the redundancy switches on the Controller.
- Sending leveling commands with the leveller.

AUTOMATIC GENERATOR START

You can keep your battery and climate levels steady by using Automatic Generator Start (AGS).

AGS will keep your levels steady by automatically turning your generator on or off.

To use AGS, you may need to update the App on your smartphone.

If AGS is enabled, the App will attempt to start the generator a total of four times to try and keep levels steady.

If there are four failed starts, the App will stop attempting to start the generator.

If the generator fails to start, please consult your generator's owner's manual.

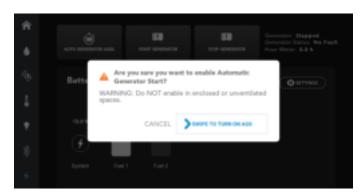




FIGURE 39: Automatic Generator Start

FUEL

The fuel level is monitored and displayed in 8 levels.

A warning is displayed if the fuel level is empty.

Fuel Pump Running Indicator

If applicable, a running indicator will be displayed under Fuel 1 whenever you turn the pump on.

ENERGY CENTER SETTINGS

The Energy Center Settings are used to set the parameters to control AGS usage.

To access Energy Center Settings:

1. From the App home screen, press the Settings button



2. Press Energy Center Settings.



FIGURE 40: Energy Center Settings

Use AGS to Support

This setting is used to determine if AGS will support battery levels, climate or both.

- Battery Levels: the generator will turn on and run until the battery is charged to the set target voltage.
- Climate: the generator will turn on so the air conditioner can run. If the temperature of the RV climbs above the set point in the Climate screen, AGS will turn the generator on and the generator will run until the temperature comes back down to the set point.
- **Both:** the generator will turn on and run until both the battery and climate levels reach the set points.



FIGURE 41: Use AGS to Support

Battery Levels

Used to nominate the minimum battery voltage level which will automatically start battery charging from the generator. Battery charging will stop when the target voltage is reached.

AGS monitors both system voltage and RV battery voltage and uses the greater of the two to determine whether to turn the generator on or off.



FIGURE 42: Battery Levels

Run Time Limits

Used to set the minimum time the generator will continue to run for after the target battery voltage and/or temperature is reached.

The maximum time is the total run time that the generator will operate to reach the target battery voltage and/or temperature. If targets are not reached and the generator run time exceeds the maximum run time limit set in the Energy Settings, the generator will automatically turn off.

. (a) (i) (i) (b) (ii) (ii)

FIGURE 43: Run Time Limits

Charles

FIGURE 44: Quiet Time

Quiet Time

Used to choose the hours when the generator will always be turned off, even if AGS has been enabled.



If you are using Quiet Time, ensure that the time is correct on your RV. For help setting the time, refer to **FAQs and Troubleshooting**.

SOLAR CONTROLLER

When solar is connected to a compatible RVC controller, the Solar Controller screen allows you to view the status of any connected solar panels.



FIGURE 45: Solar Controller Tablet Screen

Solar Controller

This section displays the input voltage and current from the solar panel and the output voltage and current of the battery.

Solar Temperature

This section displays the solar controller regulator and battery temperature.

If no battery sensor is present, the battery temperature can be hidden from view.

The temperature can be displayed in either °F or °C, depending on what preference has been set in the App's General Settings.

Solar History

This section displays the total electric charge produced in ampere hours for today, yesterday, and two days ago, and the total charge produced over the last seven days.

Electric charge is displayed in ampere hours.

The total power generation is displayed in kilowatt-hours.

Clear History

The Clear History button will clear all the solar history, including the total power generation and total operating days.



FIGURE 46: Solar Controller Mobile Screen

SOLAR CONTROLLER SETTINGS

The Solar Controller Settings are used to configure the Solar Controller to your liking.

To access Solar Controller Settings:

1. From the App home screen, press the Settings icon



2. Press Solar Controller Settings.

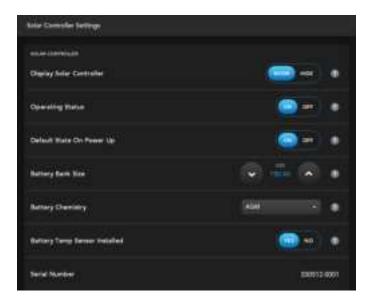


FIGURE 47: Solar Controller Settings Tablet Screen

Display Solar Controller

Allows you to toggle Solar Controller information to be hidden if you do not want it to be displayed in the App.

If Solar Controller information is hidden, you can toggle it to be displayed.

Operating Status

Displays the current operating status of the Solar Controller.

Default State On Power Up

Displays the default state of the Solar Controller when powered up.

Battery Bank Size

Allows you to set your battery bank size.

Battery Chemistry

Displays your battery chemistry.

Battery Temp Sensor Installed

Displays if a battery temperature sensor is installed.

Serial Number

Displays the Solar Controller serial number.

Make

Displays the Solar Controller make.

Model

Displays the Solar Controller model number.



FIGURE 48: Solar Controller Settings Mobile Screen

GENERAL SETTINGS

General Settings may be accessed by pressing the Settings icon in the App home screen.

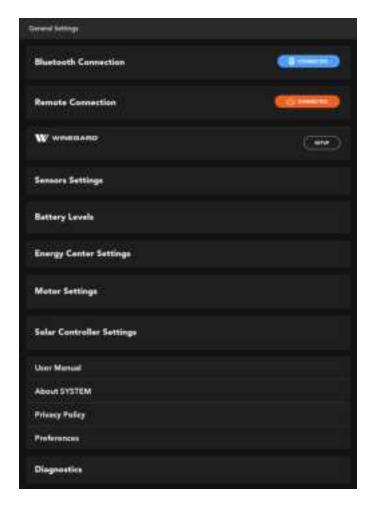


FIGURE 49: General Settings Tablet Screen

From General Settings, you can:

- Check the Bluetooth Connection between the Node and your smartphone.
- Establish a Remote Connection to the BMPRO Cloud.
 - For more information, refer to the section **Cloud Control**.
- Enter the Winegard network name and password to connect to the internet (model dependent). For more information, refer to the section Winegard.
- Set Sensors Settings, allowing for the setting of tire pressure sensor underpressure and overtemperature limits, and the toggling of sensors on and off.
- Check the wireless Battery Levels of any installed Switch.
 - For more information, refer to the section Checking the Battery in Your Switch.
- Set Motor Settings, which depending on the level of controller installed, can be used to set zeropoint calibration (model dependent).
- View Energy Center Settings.
 For more information, refer to the section Energy Center Settings.
- View Solar Controller Settings.
 For more information, refer to the section Solar Controller Settings.
- Access a digital version of the User Manual.
- View information **About SYSTEM**: all about the system, Node Firmware version, App version, etc.
- View the BMPRO Privacy Policy.
- Set your unit Preferences for temperature and pressure.
- View the Diagnostics page, showing any detected faults.

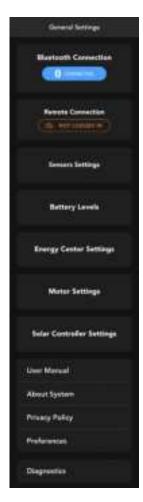


FIGURE 50: General Settings Mobile Screen

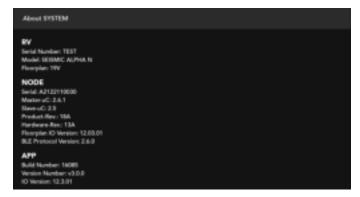




FIGURE 51: About SYSTEM Screen





FIGURE 52: Preferences Screen

SENSOR SETTINGS

The Sensors Settings page allows you to configure warning limits for any connected SmartConnect sensors, and allows you to toggle the sensor displays on or off.

For more information about SmartConnect sensors, refer to the **SmartConnect user manual**.

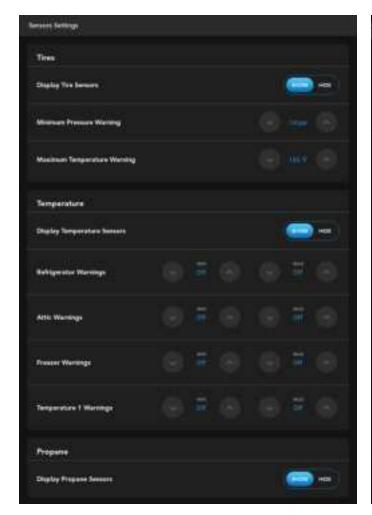




FIGURE 53: Sensors Settings



UNIT CONVERSION

To change the temperature unit, go to the settings menu on the App home screen and press **Preferences**.

From there, the temperature unit can be toggled between Fahrenheit and Celsius.

DIAGNOSTICS

The diagnostics page will display any detected faults in the system.

To clear circuit faults, remove the suspected short and toggle the suspected output to clear the fault indicator.

1. For lights, tank heaters, water heaters, water pumps, electric heaters or gas heaters, if a short occurs on these outputs, a red fault indicator will appear.

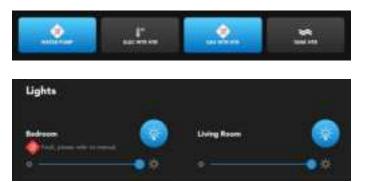


FIGURE 55: Red Fault Indicator

2. The gas water heater has its own warning output. If it signals a fault, a warning will appear on the gas water heater button.



FIGURE 56: Gas Water Heater Warning

- 3. The motor outputs do not indicate a warning if the wires are shorted.
- 4. If a fault occurs on a Climate output (e.g. the compressor output), a fault icon will appear in the zone. To clear the Climate fault, diagnose that Climate zone, remove the short, turn the Climate off and then turn it back on to reset the fault display.

The Diagnostics page will display any faults detected on the Solar Controller.

The following types of faults will be displayed in the Diagnostics page if detected:

- Battery Over Voltage
- Battery Under Voltage
- Battery Over Temperature
- Battery Under Temperature
- Solar Controller Over Temperature
- Solar Array Over Voltage
- Solar Array Short Circuit

NOTE: If Solar Controller information is set to be hidden in the Solar Controller settings, no solar faults will display in the Diagnostics page.





FIGURE 57: Solar Controller Diagnostics

VOICE CONTROL (MODEL DEPENDENT)

Selected sysems are compatible with Jayco's voice control system.

Once the voice control system has been installed in a central place in your RV, give it a command by saying "Jayco".

Below are a few examples of what you can do:

Jayco, all lights on!

All lights on your RV turn on.

Jayco, main A/C on!

The main A/C in the RV will turn on.

Jayco, movie mode!

Dimmable lights in your RV will be dimmed to 50%.

For more information about Jayco voice control, refer to the Jayco voice control manual.

UPDATING FIRMWARE (MODEL DEPENDENT)

MARNING

The App will only check the Node's firmware version if your RV is equipped with a Controller.

If a Controller is part of your system, the Node will check the app revision that is installed on the Controller.

If the Node has a higher firmware version than what is embedded in the App, a yellow information icon will display in the top toolbar of the App.



FIGURE 58: Firmware Update Available

To update the firmware:

- 1. Press the yellow information icon.
- 2. Follow the instructions in the App.

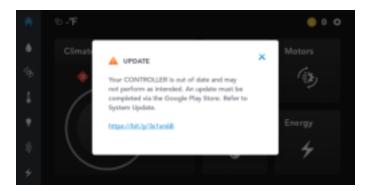


FIGURE 59: Firmware Update Pop-up

SWITCH (MODEL DEPENDENT)

The Switch communicates via Bluetooth to the Node, giving you additional control of RV features.

NOTE: Any Switch you install in your RV has been paired to the Node at the factory and is ready for immediate use. If a Switch isn't responding, it may need to be repaired. Refer to **FAQs and Troubleshooting** for more information.

CHECKING THE BATTERY IN YOUR SWITCH

The Switch is powered by a standard CR2032 3V Lithium Cell coin battery.

To check if the battery needs replacing:

- 1. From the App home screen, press the Settings icon
- 2. Press Battery Levels.
- 3. Press any button on the Switch you are checking.

Once the button has been pressed, the App will refresh with the Switch battery status.



FIGURE 60: Battery Powered Wall Switches Settings. LOW indicates that the battery in the wall switch needs replacing.

REPLACING THE BATTERY IN YOUR SWITCH

To replace the battery, unclip the Switch Button Pad. Using a flathead screwdriver, pry open the Switch Button Pad and remove the battery from the holder. Insert the new battery in the holder with the positive side facing up.



FIGURE 61: Accessing the battery in the Switch

FAQS AND TROUBLESHOOTING

PAIRING WITH THE NODE

1. I tried pairing my phone to the Node, but it didn't connect?

If pairing fails, before you attempt to pair your smartphone again:

- 1. Toggle the smartphone's Bluetooth off and on.
- 2. Toggle the smartphone's Airplane mode on and off.
- 3. Restart the App.
- 4. Cycle power to the Node off and on.

2. I tried pairing my phone to the Node but the Display failed?

If your system has a Display, and the Display failed when pairing with the Node, this indicates the Node is already paired to four devices and cannot support any more devices.

In this case, unpair one of the connected devices and try again.

Alternatively, clear all previously paired devices and pair your smartphone and the Display again.

3. I tried pairing my phone to the Node but the Controller displays --?

If your system has a Controller, and the Controller displays -- when pairing with the Node, this indicates the Node is already paired to four devices and cannot support any more devices.

In this case, unpair one of the connected devices and try again.

Alternatively, clear all previously paired devices and pair your smartphone and the Controller again.

4. How do I unpair the Node from my device?



- 2. Press Bluetooth Connection.
- 3. Press Unpair RV.

If you have a Controller installed in your RV, you can also clear the Node's memory of all paired devices.



Clearing the Node memory will also clear the pairing between the Node and Controller. After clearing, the Controller will need to be paired to the Node again.

- **4.** Navigate to the **PA** function on the Controller display.
- 5. Press and hold EXT until the number 1 scrolls across the Controller display.



FIGURE 62: Clearing Devices

The Node is now clear of all connected devices.

6. Pair the Controller and your device to the Node again. Refer to Pairing to the Node with a Controller.

ΔPP

1. How do I update the App on my smartphone?

Most smartphones allow automatic updates.

To confirm your App is up-to-date, try the following:

- 1. Verify the mobile network or WiFi connection on your smartphone.
- 2. Launch your App store app. (Google Play Store or Apple App Store)
- 3. Search for the JAYCOMMAND/TravelLINK powered by BMPRO app.
- 4. Verify there is no option to update. If the option to update is available, press **Update** and allow the App to download and install on your device.

2. How do I update the App on my Controller?

If your system has a Controller, it is set up to automatically receive App updates and will automatically update whenever a new release is available. To allow this to happen, make sure that you are:

- 1. Connected to the internet.
- 2. Logged into your Google account.

CONTROLLER (MODEL DEPENDENT)

1. How do I create a Google Account on my Controller?

If your system has a Controller, and you don't have a Google Account, you can create one by pressing the Google Play icon on the Controller main screen and following the prompts.

2. How do I change the date and time on my Controller?

If your system has a Controller, and you need to change the date and time:

- 1. Tap the Main screen icon to return to the Controller main screen.
- 2. Press the Settings icon
- 3. Press Systems.
- 4. Press Date & Time.
- 5. Adjust the date, time or timezone to your needs.

3. The Controller is displaying the code 88 and is unusable, what do I do?

The Controller will display **88** on its menu display if there is a system error which prevents the use of the system.

If you encounter an **88** error, please contact your RV dealership for further assistance.



FIGURE 63: 88 Error

SWITCH (MODEL DEPENDENT)

1. I've replaced the Switch in my RV, but it doesn't work?

You may need to pair the Switch to the Node before you can use the Switch.

The instructions are different depending on if you have a Display or a Controller as part of your system.

If you have a **Display**:

- 1. Using the button on the Display, navigate to the **Settings** menu.
- 2. Using the button on the Display, navigate down to Advanced.
- 3. In the Advanced setting menu, use the Sulton to navigate down to Pair Switch
- 4. Press the **OK** action button to put the node into Switch pairing mode.
- **5.** While in paring mode, press any TWO buttons at the SAME TIME on the switch you want to pair.

If you have a Controller:

1. Using the < > buttons on the Controller, navigate to the PA menu item.



2. When 'PA' appears on the display, press the **RET** button to start the pairing process between the Switch and the Node.



FIGURE 65: Press RET

- 3. Press any two buttons on the Switch at the same time.
- **4.** Press **EXT** on the Controller to accept the pairing of the Switch to the Node.



FIGURE 66: Press EXT

APPENDICES

SPECIFICATIONS

SPECIFICATIONS	
NODE SPECIFICATIONS	
Input Voltage Range	8V to 15V DC
Ambient Temperature	-4°F to 140°F (-20°C to 60°C)
IP Rating	IP20
Approvals	FCC 47 CR15, CAN ICES-3 (B) / NMB-3 (B), IEC 61000-4-2 Level III, IEC60068-2-27 Table A.1, IEC 60068-2-64 Spectrum A.3 Category 1
CONTROLLER SPECIFICATIONS	
Input Voltage Range	8V to 15V DC
Ambient Temperature	-4°F to 140°F (-20°C to 60°C)
IP Rating	IP40
Approvals	FCC 47 CR15.109, CAN ICES-3 (B) / NMB-3 (B), IEC 61000-4-2 Level III, IEC60068-2-27 Table A.1, IEC 60068-2-64 Spectrum A.3 Category 1
DISPLAY SPECIFICATIONS	
Input Voltage Range	8V to 15V DC
Ambient Temperature	-4°F to 140°F (-20°C to 60°C)
IP Rating	IP40
Approvals	FCC 47 CR15, CAN ICES-3 (B) / NMB-3 (B), IEC 61000-4-2 Level III, IEC60068-2-27 Table A.1, IEC 60068-2-64 Spectrum A.3 Category 1
SWITCH SPECIFICATIONS	
Input Battery	2.2V to 3.0V CR2032
IP Rating	IP40
Approvals	FCC 47 CFR 15, CAN ICES-3 (B) / NMB-3 (B), IEC 61000-4-2 Level III, IEC60068-2-27 Table A.1, IEC 60068-2-64 Spectrum A.3 Category 1

LIMITED WARRANTY TERMS AND CONDITIONS

Registering your BMPRO product is an important step to ensure that you receive all the benefits you are entitled to. Please visit **teambmpro.com** to complete the online registration form for your new product today.

What this Limited Warranty Covers

This warranty covers any defect or malfunction in your BMPRO product. Under this warranty you are entitled to have such goods replaced, repaired or refunded.

What this Limited Warranty Does Not Cover

This warranty does not extend to product failures or defects caused by, or associated with, but not limited to:

- Failure to install or maintain correctly, unsuitable physical or operating environment, accident, acts of God, hazard, misuse, unauthorized repair, modification or alteration, natural disaster, corrosive environment, insect or vermin infestation and failure to comply with any additional instructions supplied with the product.
- BMPRO may seek reimbursement of any costs incurred when a product is found to be in proper working order or damaged as a result of any of the warranty exclusions listed above.
- BMPRO will not be liable for any costs, charges or expenses incurred in the process of returning a product to initiate a warranty claim.

How Long the Warranty Lasts

BMPRO warrants products against defects for a period of two years, commencing from the original date of purchase.

Claims Process

Proof of purchase is required before the product can be deemed to be within the warranty period.

To enquire or make a claim under this warranty, please follow these steps:

- A. Prior to returning a BMPRO product, please email service@teambmpro.com to obtain a Return Material Authorisation (RMA) number.
- B. Package and send the product to:

BMPRO WARRANTY DEPARTMENT UNIT 1 821 E WINDSOR AVE ELKHART IN 46514

Please mark RMA details on the outside of the packaging.

C. Please ensure the package also includes: a copy of the proof of purchase, a detailed description of the fault and your contact details including phone number and return address.

How State Law Applies

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

