


Prüfbericht-Nr.: Test report no.:	CN236VRK 001	Auftrags-Nr.: Order no.:	168414963	Seite 1 von 21 Page 1 of 21
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-02-21	
Auftraggeber: Client:	SZ DJI Osmo Technology Co., Ltd. 4F, Jingkou Community Comprehensive Service Building, No. 83 Bishui Road North, Guangming Street, Guangming District, Shenzhen, P. R. China			
Prüfgegenstand: Test item:	DJI Video Receiver			
Bezeichnung / Typ-Nr.: Identification / Type no.:	RX3			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
Wareneingangsdatum: Date of sample receipt:	2023-02-24	Please refer to photo documents		
Prüfmuster-Nr.: Test sample no.:	A003420327-002-004 A003418528-006			
Prüfzeitraum: Testing period:	2023-02-24 to 2023-03-16			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	 Hardy Suo		genehmigt von: authorized by:	 Lin Lin
Datum: Date:	2023-04-05		Ausstellungsdatum: Issue date:	2023-04-05
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2ANDR-RX32303 IC: 23060-RX32303, HVIN: RX3 This report is for 2.4GHz SDR.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.: CN236VRK 001
Test Report No.:

Seite 2 von 21
Page 2 of 21

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.5	SUBMITTED DOCUMENTS	11
4	TEST SET-UP AND OPERATION MODES	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>15</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>16</i>
5.1.4	<i>6dB Bandwidth</i>	<i>17</i>
5.1.5	<i>99% Bandwidth</i>	<i>18</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>19</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>20</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	21
7	LIST OF TABLES	21

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 2.4GHz SDR

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2023-10-10
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2023-10-10
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2023-10-10
DC power supply	Keysight	E3642A	MY61276100	2023-10-10
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2023-10-10
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2023-10-10
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-08-02
Signal Analyzer	R&S	FSV 40	101439	2023-08-01
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2023-08-01
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-08-02
Amplifier	R&S	SCU-18F	180070	2023-08-02
Amplifier	R&S	SCU40A	100475	2023-08-02
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2023-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A

Prüfbericht - Nr.: CN236VRK 001

Test Report No.:

Seite 6 von 21

Page 6 of 21

3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22
--------------------------	-----------	--------	--------------	------------

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 4.17 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 4.17 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a DJI Video Receiver. It supports 2.4GHz SDR & 5.8GHz SDR transceiver and 5.2/5.3/5.6/ 5.8GHz SDR Receiver functions.

*remark: SDR means specific defined radio, and cannot changes radio specification via software/firmware by end-users.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	DJI Video Receiver
Type Designation:	RX3
Trademark:	DJI
Operating Temperature Range:	-10 °C ~ 45 °C
Operating Voltage:	Rechargeable Battery operated (DC 7.6V@4920mAh) or External DC Power Supply (DC 6V to DC 18V)
Testing Voltage:	External battery or External DC Power Supply
Radiofrequency operating mode	1) 2.4GHz SDR: operating within 2400-2483.5MHz, supports 1.4MHz/3MHz/10MHz/20MHz/40MHz Bandwidth 2) 5.2GHz SDR(RX only): operating within 5150-5250MHz, supports 20MHz/40MHz Bandwidth 3) 5.3GHz SDR(RX only): operating within 5250-5350MHz, supports 20MHz/40MHz Bandwidth 4) 5.6GHz SDR(RX only): operating within 5470-5725MHz, supports 20MHz/40MHz Bandwidth 5) 5.8GHz SDR: operating within 5725-5850MHz, supports 1.4MHz/3MHz/10MHz/20MHz/40MHz Bandwidth Remark: 5.2GHz SDR (5150-5250MHz) operating radio-frequency band not supports for Canada market.
Technical Specification of 2.4GHz SDR	
Operating Frequency	2403.5-2469.5MHz for 1.4MHz Bandwidth 2405.12-2471.12MHz for 1.4MHz Bandwidth (CA mode) 2405.5-2468.5MHz for 3MHz Bandwidth 2408.2-2471.2MHz for 3MHz Bandwidth (CA mode) 2407.5-2467.5MHz for 10MHz Bandwidth 2412.5-2462.5MHz for 20MHz Bandwidth 2422.5-2452.5MHz for 40MHz Bandwidth
Type of Modulation	OFDM (QPSK, 16QAM, 64QAM)
Channel Number	34 channels for 1.4MHz Bandwidth 34 channels for 1.4MHz Bandwidth (CA mode) 22 channels for 3MHz Bandwidth 22 channels for 3MHz Bandwidth (CA mode)

	61 channels for 10MHz Bandwidth 51 channels for 20MHz Bandwidth 31 channels for 40MHz Bandwidth
Channel Separation	2MHz for 1.4MHz Bandwidth 2MHz for 1.4MHz Bandwidth (CA mode) 3MHz for 3MHz Bandwidth 3MHz for 3MHz Bandwidth (CA mode) 1MHz for 10MHz Bandwidth 1MHz for 20MHz Bandwidth 1MHz for 40MHz Bandwidth
Antenna Type	External Antenna
Antenna Number	2Tx4Rx for MIMO mode (ANT0+ANT1, or ANT0+ANT3, or ANT2+ANT1, or ANT2+ANT3) *MIMO only
Antenna Gain	2.5dBi for ANT0 2.5dBi for ANT1 2.5dBi for ANT2 2.5dBi for ANT3
The type of wideband data transmission equipment	Non-FHSS

Table 3: RF Channel and Frequency of 2.4GHz SDR

2.4GHz 1.4MHz Bandwidth (2403.5MHz-2469.5MHz)			
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2403.5	18	2437.5
2	2405.5	19	2439.5
3	2407.5	20	2441.5
4	2409.5	21	2443.5
5	2411.5	22	2445.5
6	2413.5	23	2447.5
7	2415.5	24	2449.5
8	2417.5	25	2451.5
9	2419.5	26	2453.5
10	2421.5	27	2455.5
11	2423.5	28	2457.5
12	2425.5	29	2459.5
13	2427.5	30	2461.5
14	2429.5	31	2463.5
15	2431.5	32	2465.5
16	2433.5	33	2467.5
17	2435.5	34	2469.5

2.4GHz 1.4MHz Bandwidth (CA Mode) (2405.12MHz-2471.12MHz)			
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2405.12	18	2439.12
2	2407.12	19	2441.12
3	2409.12	20	2443.12
4	2411.12	21	2445.12
5	2413.12	22	2447.12
6	2415.12	23	2449.12
7	2417.12	24	2451.12
8	2419.12	25	2453.12
9	2421.12	26	2455.12
10	2423.12	27	2457.12
11	2425.12	28	2459.12
12	2427.12	29	2461.12
13	2429.12	30	2463.12
14	2431.12	31	2465.12
15	2433.12	32	2467.12
16	2435.12	33	2469.12
17	2437.12	34	2471.12

2.4GHz 3MHz Bandwidth (2405.5MHz-2468.5MHz)			
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2405.5	12	2438.5
2	2408.5	13	2441.5
3	2411.5	14	2444.5
4	2414.5	15	2447.5
5	2417.5	16	2450.5
6	2420.5	17	2453.5
7	2423.5	18	2456.5
8	2426.5	19	2459.5
9	2429.5	20	2462.5
10	2432.5	21	2465.5
11	2435.5	22	2468.5

2.4GHz 3MHz Bandwidth (CA mode) (2408.2MHz-2471.2MHz)			
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2408.2	12	2441.2
2	2411.2	13	2444.2
3	2414.2	14	2447.2
4	2417.2	15	2450.2
5	2420.2	16	2453.2

Prüfbericht - Nr.: CN236VRK 001
Test Report No.:

Seite 10 von 21

Page 10 of 21

6	2423.2	17	2456.2
7	2426.2	18	2459.2
8	2429.2	19	2462.2
9	2432.2	20	2465.2
10	2435.2	21	2468.2
11	2438.2	22	2471.2

2.4GHz 10MHz Bandwidth (2407.5MHz-2467.5MHz)							
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2407.5	17	2423.5	33	2439.5	49	2455.5
2	2408.5	18	2424.5	34	2440.5	50	2456.5
3	2409.5	19	2425.5	35	2441.5	51	2457.5
4	2410.5	20	2426.5	36	2442.5	52	2458.5
5	2411.5	21	2427.5	37	2443.5	53	2459.5
6	2412.5	22	2428.5	38	2444.5	54	2460.5
7	2413.5	23	2429.5	39	2445.5	55	2461.5
8	2414.5	24	2430.5	40	2446.5	56	2462.5
9	2415.5	25	2431.5	41	2447.5	57	2463.5
10	2416.5	26	2432.5	42	2448.5	58	2464.5
11	2417.5	27	2433.5	43	2449.5	59	2465.5
12	2418.5	28	2434.5	44	2450.5	60	2466.5
13	2419.5	29	2435.5	45	2451.5	61	2467.5
14	2420.5	30	2436.5	46	2452.5		
15	2421.5	31	2437.5	47	2453.5		
16	2422.5	32	2438.5	48	2454.5		

2.4GHz 20MHz Bandwidth (2412.5MHz-2462.5MHz)					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2412.5	18	2429.5	35	2446.5
2	2413.5	19	2430.5	36	2447.5
3	2414.5	20	2431.5	37	2448.5
4	2415.5	21	2432.5	38	2449.5
5	2416.5	22	2433.5	39	2450.5
6	2417.5	23	2434.5	40	2451.5
7	2418.5	24	2435.5	41	2452.5
8	2419.5	25	2436.5	42	2453.5
9	2420.5	26	2437.5	43	2454.5
10	2421.5	27	2438.5	44	2455.5
11	2422.5	28	2439.5	45	2456.5
12	2423.5	29	2440.5	46	2457.5
13	2424.5	30	2441.5	47	2458.5
14	2425.5	31	2442.5	48	2459.5

15	2426.5	32	2443.5	49	2460.5
16	2427.5	33	2444.5	50	2461.5
17	2428.5	34	2445.5	51	2462.5

2.4GHz 40MHz Bandwidth (2422.5MHz-2452.5MHz)					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2422.5	12	2433.5	23	2444.5
2	2423.5	13	2434.5	24	2445.5
3	2424.5	14	2435.5	25	2446.5
4	2425.5	15	2436.5	26	2447.5
5	2426.5	16	2437.5	27	2448.5
6	2427.5	17	2438.5	28	2449.5
7	2428.5	18	2439.5	29	2450.5
8	2429.5	19	2440.5	30	2451.5
9	2430.5	20	2441.5	31	2452.5
10	2431.5	21	2442.5		
11	2432.5	22	2443.5		

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 2.4GHz SDR wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Normal Operation
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Circuit Diagram
- Bill of Material
- Instruction Manual
- Rating Label

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model RX3 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
DC power Supply	Topward	3303D	809332	0-30 Volts, 0-3 Amps

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

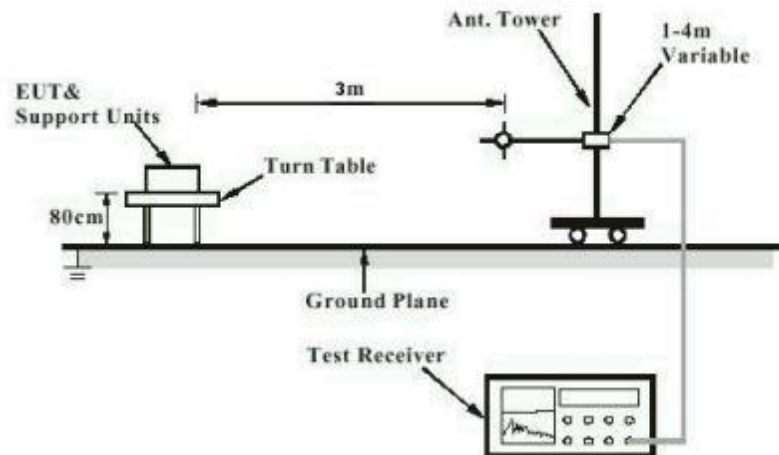


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


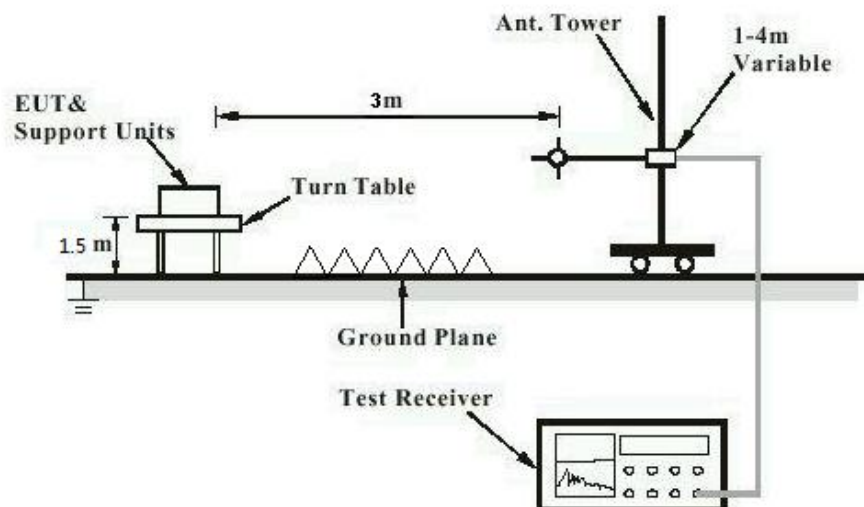


Diagram of Measurement Configuration for Conducted Transmitter Measurement

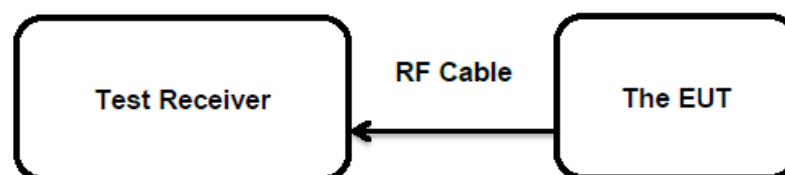

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has external antennas, the maximum uncorrelated antenna gain is 2.5dBi, and the antenna connector is designed unique, refer to EUT photos for details.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(b)(3) RSS-247 Clause 5.4(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 1.0 Watts
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-02-24 to 2023-03-16
Input voltage	: Full Battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Table 5: Test Result of Maximum Peak Conducted Output Power

Test Mode	Test Channel (MHz)	Measured Average Power (MIMO mode)		Limit (W)
		(dBm)	(W)	
1.4MHz BW	2403.5	26.98	0.4989	< 1.0
	2435.5	26.57	0.4539	
	2469.5	24.94	0.3119	
1.4MHz BW CA	2405.12	26.57	0.4539	
	2437.12	27.06	0.5082	
	2471.12	22.73	0.1875	
3MHz BW	2405.5	27.18	0.5224	
	2435.5	26.81	0.4797	
	2468.5	24.74	0.2979	
3MHz BW CA	2408.2	27.27	0.5333	
	2438.2	26.93	0.4932	
	2471.2	23.69	0.2339	
10MHz BW	2407.5	17.06	0.0508	
	2437.5	16.78	0.0476	
	2467.5	15.59	0.0362	
20MHz BW	2412.5	15.03	0.0318	
	2437.5	16.49	0.0446	
	2462.5	13.33	0.0215	
40MHz BW	2422.5	13.70	0.0234	
	2437.5	16.46	0.0443	
	2452.5	13.08	0.0203	
Max. e.i.r.p.=27.27dBm+2.5dBi=29.77dBm, which is less than 36dBm=4W.				

Note:

- 1) The cable loss is taken into account in results.
 - 2) Antenna gain(G) of 2.4GHz SDR: 2.5dBi (uncorrelated antenna gain)
- e.i.r.p.= $P_{(\text{Peak power})} + G$, which is far below the 4 W

Prüfbericht - Nr.: CN236VRK 001

Test Report No.:

Seite 16 von 21

Page 16 of 21

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(e) RSS-247 Clause 5.2(b)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-02-24 to 2023-03-16
Input voltage	: Full Battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN236VRK 001

Test Report No.:

Seite 17 von 21

Page 17 of 21

5.1.4 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard	:	FCC Part 15.247(a)(2) RSS-247 Clause 5.2(a)
Basic standard	:	ANSI C63.10: 2013
Limits	:	> 500 KHz
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2023-02-24 to 2023-03-16
Input voltage	:	Full Battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.5 °C
Relative humidity	:	53 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN236VRK 001

Test Report No.:

Seite 18 von 21

Page 18 of 21

5.1.5 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: RSS-Gen Clause 6.6
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-02-24 to 2023-03-16
Input voltage	: Full Battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN236VRK 001

Test Report No.:

Seite 19 von 21

Page 19 of 21

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-02-24 to 2023-03-16
Input voltage	: Full Battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.5 °C
Relative humidity	: 53 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN236VRK 001

Test Report No.:

Seite 20 von 21

Page 20 of 21

5.1.7 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 5
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-03-03 to 2023-03-08
Input voltage	: Full Battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Technical Specification of EUT	7
Table 3: RF Channel and Frequency of 2.4GHz SDR	8
Table 4: Auxiliary Equipment Used during Test	12
Table 5: Test Result of Maximum Peak Conducted Output Power	15