



Model: **REA20v2**

High Power AC1200 Wi-Fi Range Extender

Designed in the USA by Amped Wireless
Assembled in Taiwan

S/N:

MAC (2.4GHz):

MAC (5GHz):

WPS Pin:

For product support, installation guides, software updates
and frequently asked questions, please visit:
<http://www.ampedwireless.com/support/>

This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Factory Default Settings:

To reset to factory default settings, hold down the reset button for 5-10 seconds.

Login Settings

Web Menu: <http://setup.ampedwireless.com> IP Address: 192.168.1.240

Wi-Fi Settings

SSID (2.4GHz): Amped_REA20_2.4

SSID (5GHz): Amped_REA20_5.0

Power Rating: DC 12V 1.5A

LED INDICATORS



FCC ID: ZTT-REA20V2
IC: 10233A-REA20V2



Model: **REA20v2**

High Power AC1200 Wi-Fi Range Extender

Designed in the USA by Amped Wireless
Assembled in Taiwan

S/N:

MAC (2.4GHz):

MAC (5GHz):

WPS Pin:

For product support, installation guides, software updates
and frequently asked questions, please visit:
<http://www.ampedwireless.com/support/>

This device complied with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Factory Default Settings:

To reset to factory default settings, hold down the reset button for 5-10 seconds.

Login Settings

Web Menu: <http://setup.ampedwireless.com> IP Address: 192.168.1.240

Wi-Fi Settings


SSID (2.4GHz): Amped_REA20_2.4 SSID (5GHz): Amped_REA20_5.0

Power Rating: DC 12V 2.5A

LED INDICATORS



FCC ID: ZTT-REA20V2
IC: 10233A-REA20V2

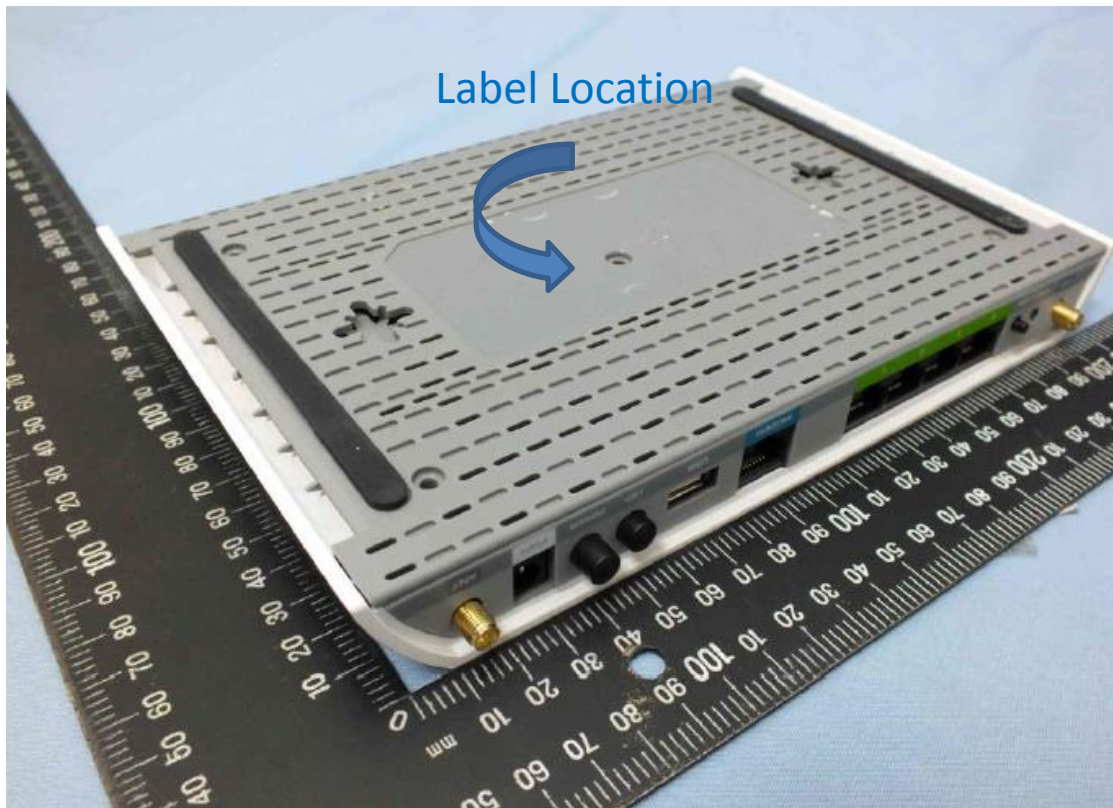

FCC ID: ZTT-REA20V2

IC: 10233A-REA20V2