Radio Satellite Communication Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of

20 Pages Page 1 (20)

Akkreditiertes Prüflaboratorium

DAR-Registriernummer: TTI-P-G 166/98

Test report no.: 2_1957-A/99 FCC Rule 15.209 / USA IFG

Radio Satellite Communication Untertürkheimer Straße 6-10 . D-66117 Saarbrücken Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of

20 Pages Page 1 (20)

Akkreditiertes Prüflaboratorium

DAR-Registriernummer: TTI-P-G 166/98

Test report no.: 2_1957-A/99 FCC Rule 15.209 / USA IFG

Test report no.: 2_1957-A/99 Issue Date: 02.05.2000 Page 3 (20)

1.2 Testing laboratory

CETECOM ICT Services GmbH 66117 Saarbrücken Untertürkheimer Straße 6 - 10 Deutschland Telefone: + 49 681 598 - 9000 Telefax : + 49 681 598 - 9075 E-mail : Michael.Berg@ict.cetecom.de Internet : www.cetecom.de Accredited testing laboratory DAR-registration number : TTI-P-G-166/98

1.3 Details of applicant

Name	:	Scheidt & Bachmann
Street	:	Breite Straße 132
City	:	D-41238 Mönchengladbach
Country	:	Germany
Telephone	:	+49(0)2166 / 266-0
Telefax	:	+49(0)2166 / 266-212
Contact	:	Mr. Reiner Adams
Telephone:		+49(0)2166 / 266-571

1.4 Application details

Date of receipt of application	: 21.02.2000
Date of receipt of test item	: 25,03,2000
Date of test	: 27.03.2000

1.5 Test item

Type of equipment	:	Transponder system
Type designation	:	IFG
Manufacturer	:	
Street	:	
City	:	
Country	:	
Serial number	:	PCB-No.: 0335660, 0335546, 0336413
Additional informations:	:	
Frequency	:	125 kHz / 00H0NON
Number of channels	:	1
Antenna	:	print antenna (<<0,05m²)
Power supply	:	8V DC ext.
Type of equipment	:	Category I Class 1
Carrier power	:	0,58 µW EIRP

1.6 Test standards: FCC Rule Part 15.209

Test report no.: 2_1957-A/99 Issue Date: 02.05.2000 Page 6 (20)

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

SUBCLAUSE	PARAMETER TO BE MEASURED	PAGE
	Transmitter parameters	
§ 15.209	Field strength of fundamental	7
§ 15.209	Emissions radiated outside of the specified frequency bands	8
§ 15.207	Conducted limits	10
	Test equipment listing	12

Photographs of the equipment 14

Test report no.: 2_1957-A/99 Issue Date: 02.05.2000

Equipment under test : IFG Ambient temperature : 23°C Relative humidity : 51%

FIELD STRENGTH OF FUNDAMENTIAL

SUBCLAUSE § 15.209

Page 7 (20)

Polarisation of the measurements for the larger power level .: vertical Measurement distance 300 m

TEST CONDITIONS		FIELD STRENGTH (µV/m)		
Frequency (MHz)		0.125		
T _{nom} (23)°C	V _{nom} (8,0)V	17.78		
Maximum deviation from output power under extreme test conditions (dBc)		1,1		
Measurement uncertainty			±3dB	

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24

Measurements were made with a loop antenna at 10 meters and extrapolated to 300 meters based on an inverse square law relationship.

Test report no.: 2_1957-A/99

Issue Date: 02.05.2000 Page 8 (20)

Equipment under test : IFG Ambient temperature : 23°C Relative humidity : 51%

EMISSIONS RADIATED

SUBCLAUSE §15.209

Transmitter operating

Modulated/Unmodulated* *(Delete whichever is inappropriate)

Measurement distance see table

	setupitement distance see table							
	SPURIOUS EMISSIONS LEVEL (µV/m)							
	0.125 MHz	Z.						
f	Detector	Level	f	Detector	Level	f	Detector	Level
(MHz)		(µV/m)	(MHz)		(µV/m)	(MHz)		(µV/m)
40,22	Peak	31,2						
48,67	Peak	26,8						
Measur	Measurement uncertainty ± 3dB							

Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference numbers see test equipment listing) 17 - 24


Test report no.: 2_1957-A/99

Issue Date: 02.05.2000 Page 9 (20)

Equipment under test : IFG Ambient temperature : 23°C Relative humidity : 51%

EMISSIONS RADIATED

SUBCLAUSE §15.209

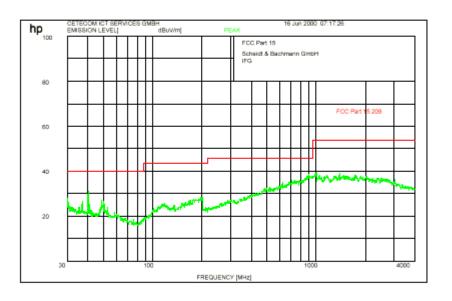


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference numbers see test equipment listing) 17 - 24

Test report no.: 2_1957-A/99 Issue Date: 02.05.2000 Page 10 (20)

Equipment under test : IFG Ambient temperature : 23°C Relative humidity : 51 %

CONDUCTED EMISSIONS

§ 15.207

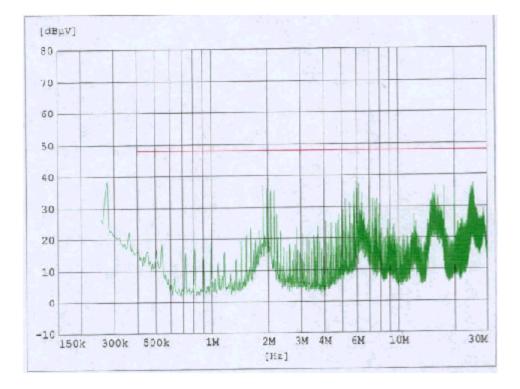

Technical specification : 15.207 Limit

2511111	
0.45 to 30 MHz	250 μV / 47.96 dBμV

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED (for reference numbers see test equipment listing) 51 - 63

Test report no.: 2_1957-A/99 Issue Date: 02.05.2000 Page 11 (20)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No Instrument/Ancilla 01 Spectrum Analyze 02 Analyzer Display 03 Oscilloscope 04 Radio Analyzer 05 System Power Supp 06 Signal Generator 07 Signal Generator 08 Funktionsgenerator 09 Regeltrenntrafo	er 8566 A 8566 A 7633 CMTA 54 ply 6038 A 8111 A	Manufacturer Hewlett-Packard Hewlett-Packard Tektronix Rohde & Schwarz Hewlett-Packard Hewlett-Packard	Serial No. 1925A00257 1925A00860 230054 894 043/010 2848A07027
02 Analyzer Display 03 Oscilloscope 04 Radio Analyzer 05 System Power Sup 06 Signal Generator 07 Signal Generator 08 Funktionsgenerator	8566 A 7633 CMTA 54 ply 6038 A 8111 A	Hewlett-Packard Tektronix Rohde & Schwarz Hewlett-Packard	1925A00860 230054 894 043/010
03 Oscilloscope 04 Radio Analyzer 05 System Power Supp 06 Signal Generator 07 Signal Generator 08 Funktionsgenerator	7633 CMTA 54 ply 6038 A 8111 A	Tektronix Rohde & Schwarz Hewlett-Packard	230054 894 043/010
04 Radio Analyzer 05 System Power Supp 06 Signal Generator 07 Signal Generator 08 Funktionsgenerator	CMTA 54 ply 6038 A • 8111 A	Rohde & Schwarz Hewlett-Packard	894 043/010
05 System Power Supp 06 Signal Generator 07 Signal Generator 08 Funktionsgenerator	oly 6038 A 8111 A	Hewlett-Packard	
06 Signal Generator 07 Signal Generator 08 Funktionsgenerator	8111 A		2848A07027
07 Signal Generator 08 Funktionsgenerator		Hewlett-Packard	
08 Funktionsgenerate	- 8662 A		2215G00867
		Hewlett-Packard	2224A01012
09 Regeltrenntrafo	or AFGU	Rohde & Schwarz	862 480/032
	MPL	Erfi	91350
10 Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11 Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12 Power-Meter	436 A	Hewlett-Packard	2101A12378
13 Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14 Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15 Modulationsmete	r 9008	Racal-Dana	2647
16 Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17 Absorber Schirmkal	oine	MWB	87400/002
18 Spectrum Analyze	er 85660 B	Hewlett-Packard	2747A05306
19 Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20 Quasi Peak Adapt	er 85650 A	Hewlett-Packard	2811A01131
21 RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22 Biconical Antenn	e 3104	Emco	3758
23 Log. Per. Antenn	e 3146	Emco	2130
24 Double Ridge Hor	n 3115	Emco	3088
25 EMI-Testreceive	r ESAI	Rohde & Schwarz	863 180/013
26 EMI-Analyzer-Disp	lay ESAI-D	Rohde & Schwarz	862 771/008
27 Biconical Antenn	e HK 116	Rohde & Schwarz	888 945/013
28 Log. Per. Antenn	e HL 223	Rohde & Schwarz	825 584/002
29 Relais-Switch-Un		Rohde & Schwarz	375 339/002
30 Highpass	HM985955	FSY Microwave	001
31 Amplifier	P42-GA29	Tron-Tech	B 23602
32 Absorber Schirmka		Frankonia	
33 Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34 EMI Test Recieve		Rohde & Schwarz	827 063/010
35 EMI Test Receive		Rohde & Schwarz	829 808/010

Test report no.: 2_1957-A/99 Issue Date: 02.05.2000 Page 12 (20)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Туре	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn	3115	EMCO	9107-3696
	Antenne 1-26.5 GHz			
50	Microw. Sys. Amplifier	8317A	Hewlett Packard	3123A00105
	0.5- 26.5 GHz			
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				