


# TEST REPORT

Report No.	CISRR25032219104
Project No.	CISR250322191
FCC ID	2BOH9-Y40812A
Applicant	YUYAO SUNNY OPTICAL INTELLIGENCE TECHNOLOGY CO.,LTD.
Address	No.1898,Shinan West Road,Yuyao,Zhejiang China
Manufacturer	YUYAO SUNNY OPTICAL INTELLIGENCE TECHNOLOGY CO.,LTD.
Address	No.1898,Shinan West Road,Yuyao,Zhejiang China
Product Name	LUCI PIN
Trade Mark	N/A
Model/Type reference	Y40812A-210-01-00_PIN
Listed Model(s)	N/A
Standard	47 CFR Part 15E
Test date	March 22, 2025 to April 15, 2025
Issue date	April 15, 2025
Test result	Complied



Prepared by: Rory Huang



Approved by: Genry Long

The test results relate only to the tested samples.

The test report should not be reproduced except in full without the written approval of Shenzhen Bangce Testing Technology Co., Ltd.

## Contents

<b>1. REPORT VERSION .....</b>	<b>3</b>
<b>2. TEST DESCRIPTION .....</b>	<b>4</b>
<b>3. SUMMARY .....</b>	<b>5</b>
3.1. Product Description * .....	5
3.2. Radio Specification Description * .....	5
3.3. Modification of EUT .....	5
3.4. Deviation from standards .....	5
3.5. Testing Site .....	6
<b>4. TEST CONFIGURATION .....</b>	<b>7</b>
4.1. Test frequency list .....	7
4.2. Descriptions of test mode .....	7
4.3. Support unit used in test configuration .....	8
4.4. Test sample information .....	8
4.5. Environmental conditions .....	8
4.6. Equipment Used during the Test .....	9
<b>5. TEST RESULTS .....</b>	<b>11</b>
5.1. Evaluation Results (Evaluation) .....	11
5.1.1. Antenna requirement .....	11
5.2. Radio Spectrum Matter Test Results (RF) .....	12
5.2.1. Conducted Emission at AC power line .....	12
5.2.2. Duty Cycle .....	21
5.2.3. Emission bandwidth and occupied bandwidth .....	22
5.2.4. Maximum conducted output power .....	24
5.2.5. Power spectral density .....	26
5.2.6. Band edge emissions (Conducted) .....	28
5.2.7. Band edge emissions (Radiated) .....	31
5.2.8. Undesirable emission limits (below 1GHz) .....	37
5.2.9. Undesirable emission limits (above 1GHz) .....	48
<b>6. TEST SETUP PHOTOS .....</b>	<b>55</b>
<b>7. EXTERNAL AND INTERNAL PHOTOS .....</b>	<b>57</b>
7.1. External Photos .....	57
7.2. Internal Photos .....	57
<b>8. APPENDIX REPORT .....</b>	<b>57</b>

## 1. REPORT VERSION

Version No.	Issue date	Description
00	April 15, 2025	Original

## 2. TEST DESCRIPTION

No.	Test Item	Standard Requirement	Result
1	Antenna requirement	Part 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.207(a)	Pass
3	Duty Cycle		Pass
4	Emission bandwidth and occupied bandwidth	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. 47 CFR Part 15.407(e)	Pass
5	Maximum conducted output power	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)	Pass
6	Power spectral density	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)	Pass
7	Band edge emissions (Conducted)	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass
8	Band edge emissions (Radiated)	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass
9	Undesirable emission limits (below 1GHz)	47 CFR Part 15.407(b)(9)	Pass
10	Undesirable emission limits (above 1GHz)	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass

**Note:**

- The measurement uncertainty is not included in the test result.
- A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW;

### 3. SUMMARY

#### 3.1. Product Description \*

Main unit information:	
Product Name:	LUCI PIN
Trade Mark:	N/A
Model No.:	Y40812A-210-01-00_PIN
Listed Model(s):	N/A
Model difference:	N/A
Power supply:	input: DC 5V
Hardware version:	V01
Software version:	V1.2.0
Accessory unit (AU) information:	
Battery:	DC 3.7V

#### 3.2. Radio Specification Description \*

Modulation type:	802.11a/n/ac: OFDM(BPSK, QPSK, 16QAM, 64QAM,256QAM);
Operation frequency:	5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz.
Channel separation:	802.11a: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM);
Antenna type:	FPC antenna+copper axis
Antenna gain:	2.99dBi
Device Type:	Client Devices

Note:

\*: Since the above information is provided by the applicant relevant results or conclusions of this report are only made for these information , Bangce is not responsible for the authenticity, integrity and results of the information and/or the validity of the conclusion.

#### 3.3. Modification of EUT

No modifications are made to the EUT during all test items.

#### 3.4. Deviation from standards

None

### 3.5. Testing Site

Laboratory Name	Shenzhen Bangce Testing Technology Co., Ltd.
Laboratory Location	101, building 10, Yunli Intelligent Park, Shutianpu community, Matian Street, Guangming District, Shenzhen, Guangdong, China
Contact information	Tel: 86-755-2319 6848, email: <a href="mailto:service@cis-cn.net">service@cis-cn.net</a> Website: <a href="http://www.cis-cn.net/">http://www.cis-cn.net/</a>
FCC registration number	736346
FCC designation number	CN1372

## 4. TEST CONFIGURATION

### 4.1. Test frequency list

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	5180	5200	5240
40	5190	/	5230
80	/	5210	/

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	5260	5300	5320
40	5270	/	5310
80	/	5290	/

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	5500	5580	5700
40	5550	/	5670
80	5530	/	5610

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	5745	5785	5825
40	5755	/	5795
80	/	5775	/

### 4.2. Descriptions of test mode

No	Test mode	Description
TM1	802.11a mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type at lowest, middle and highest channel. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.
TM2	802.11n mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type at lowest, middle and highest channel. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM3	Normal Operating	Keep the EUT works in normal operating mode and connect to companion device
TM4	Charging mode	Keep the EUT in charging status

#### 4.3. Support unit used in test configuration

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Item	Equipment name	Trade Name	Model No.
1	Phone	Huawei	NZONE S7
2	Adapter	Guangdong Sangu Technology Co. Ltd	SG-0501000AU

#### 4.4. Test sample information

Type	Sample No.
Engineer sample	CISR250322191-S01
Normal sample	CISR250322191-S02

#### 4.5. Environmental conditions

Type	Requirement
Temperature:	15~35°C
Relative Humidity:	25~75%
Air Pressure:	860~1060mbar



#### 4.6. Equipment Used during the Test

Conducted Emission at AC power line						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2025-01-08	2026-01-07
2	Artificial power network	Schwarzbeck	NSLK8127	8127-01096	2025-01-08	2026-01-07
3	8-wire Impedance Stabilization Network	Schwarzbeck	NTFM 8158	8158-00337	2025-01-08	2026-01-07
4	Artificial power network	Schwarzbeck	ENV216	/	2025-01-08	2026-01-07

Band edge emissions (Radiated) Undesirable emission limits (below 1GHz) Undesirable emission limits (above 1GHz) Emission bandwidth and occupied bandwidth Band edge emissions (Conducted) Duty Cycle Power spectral density Maximum conducted output power						
Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100853	2025-01-08	2026-01-07
2	Amplifier	Tonscend	TAP9K3G40	AP23A8060270	2025-01-08	2026-01-07
3	Prime amplifier	Tonscend	TAP01018050	AP23A8060280	2025-01-08	2026-01-07
4	9*6*6 anechoic chamber	SKET	9.3*6.3*6	N/A	2024-09-02	2027-09-01
5	Spectrum analyzer	Agilent	N9020A	MY50530263	2025-01-08	2026-01-07
6	Spectrum analyzer	R&S	FSV-40N	102130	2025-01-08	2026-01-07
7	Bilog Antenna	Schwarzbeck	VULB 9163	1463	2023-01-09	2026-01-08
8	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2487	2023-01-09	2026-01-08
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	2023-01-09	2026-01-08
10	RF Cable	Tonscend	Cable 1	/	2025-01-08	2026-01-07
11	RF Cable	Tonscend	Cable 2	/	2025-01-08	2026-01-07
12	RF Cable	SKET	Cable 3	/	2025-01-08	2026-01-07
13	L.I.S.N.#1	Schwarzbeck	NSLK8127	/	2025-01-08	2026-01-07
14	L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	2025-01-08	2026-01-07

15	Horn Antenna	SCHWARZBECK	BBHA917 0	1130	2023-01-09	2026-01-08
16	Preamplifier	Tonscend	TAP1804 0048	AP21C806126	2025-01-08	2026-01-07
17	Variable-frequency power source	Pinhong	PH1110	/	2025-01-08	2026-01-07
18	6dB Attenuator	SKET	DC-6G	/	2025-01-08	2026-01-07
19	Antenna tower	SKT	Bk-4AT- BS	AT202104010 1-V1	2025-01-08	2026-01-07

## **5. TEST RESULTS**

### **5.1. Evaluation Results (Evaluation)**

#### **5.1.1. Antenna requirement**

<b>Test Requirement:</b>	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
--------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

##### **5.1.1.1. Test Result**

Pass

##### **5.1.1.2. Conclusion:**

The EUT antenna is FPC antenna+copper axis(2.99dBi), the directional gain of the antenna less than 6dBi. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## 5.2. Radio Spectrum Matter Test Results (RF)


### 5.2.1. Conducted Emission at AC power line

Test Requirement:	47 CFR Part 15.207(a)		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2020 section 6.2		

#### 5.2.1.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.2 °C	Humidity:	55.3 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

#### 5.2.1.2. Test Setup Diagram

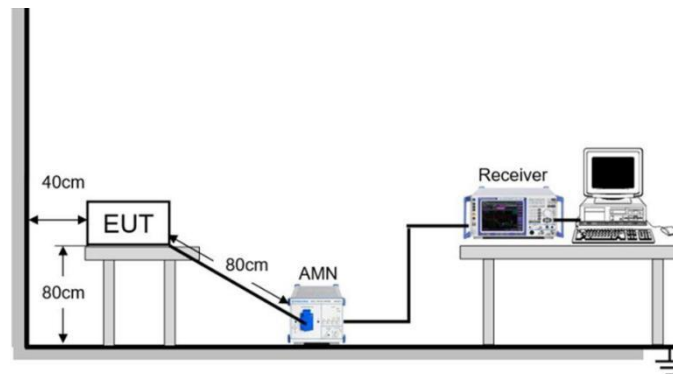

#### 5.2.1.3. Test Result

Pass


#### 5.2.1.4. Test Data

Note:

Have pre-scan all test mode, found TM6 mode which it was worst case, so only show the worst case's data on this report.


5180MHz to 5240MHz:

Mode4 / Line: Line

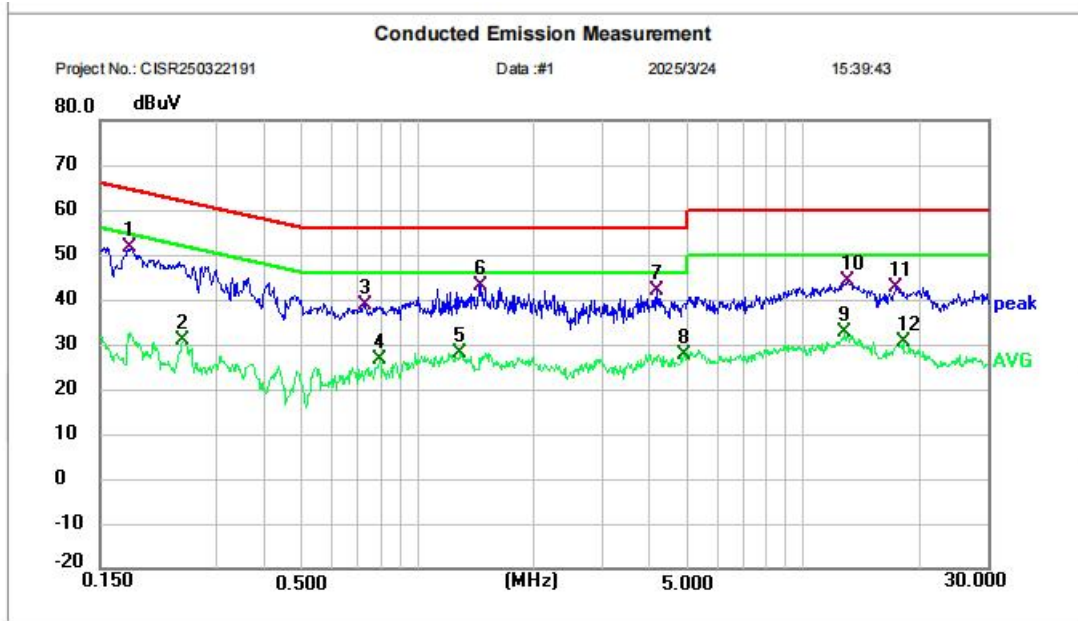

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.180	41.25	10.31	51.56	64.49	-12.93	QP
2	0.246	20.48	10.33	30.81	51.89	-21.08	AVG
3	0.730	28.25	10.41	38.66	56.00	-17.34	QP
4	0.798	16.22	10.42	26.64	46.00	-19.36	AVG
5	1.290	17.60	10.51	28.11	46.00	-17.89	AVG
6	1.462	32.32	10.56	42.88	56.00	-13.12	QP
7	4.186	30.35	11.45	41.80	56.00	-14.20	QP
8	4.914	16.01	11.74	27.75	46.00	-18.25	AVG
9	12.834	17.62	15.09	32.71	50.00	-17.29	AVG
10	13.006	29.07	15.17	44.24	60.00	-15.76	QP
11	17.414	26.85	15.91	42.76	60.00	-17.24	QP
12	18.198	14.59	15.80	30.39	50.00	-19.61	AVG


Mode4 / Line: Neutral

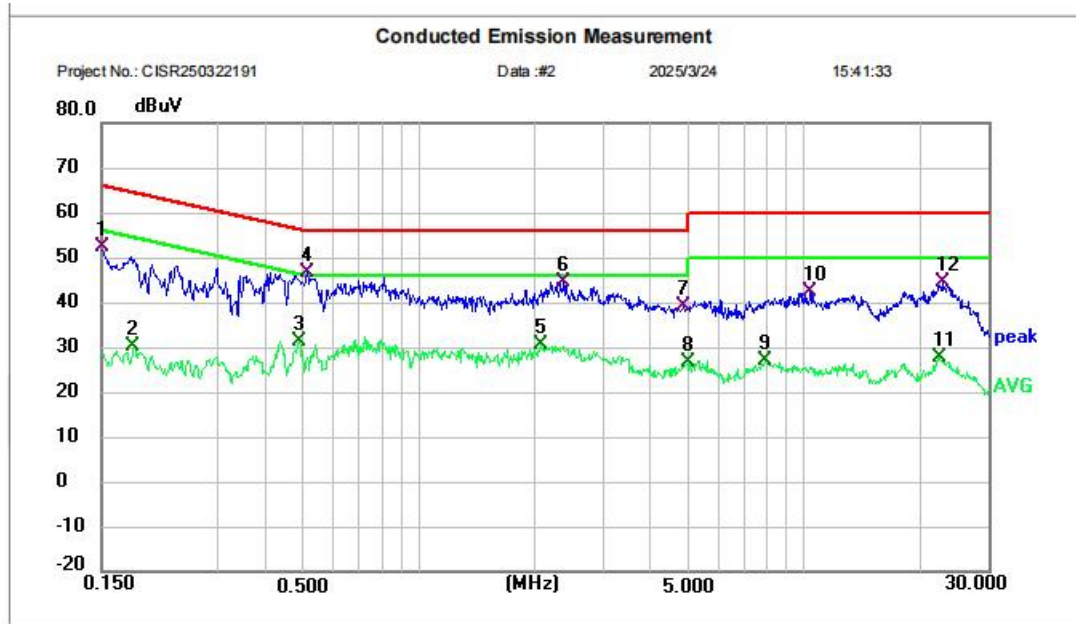

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	41.95	10.33	52.28	66.00	-13.72	QP
2	0.182	19.71	10.32	30.03	54.40	-24.37	AVG
3	0.490	20.97	10.38	31.35	46.17	-14.82	AVG
4 *	0.514	36.33	10.38	46.71	56.00	-9.29	QP
5	2.078	19.94	10.73	30.67	46.00	-15.33	AVG
6	2.382	33.71	10.81	44.52	56.00	-11.48	QP
7	4.894	27.42	11.75	39.17	56.00	-16.83	QP
8	4.998	14.85	11.79	26.64	46.00	-19.36	AVG
9	7.938	13.81	13.04	26.85	50.00	-23.15	AVG
10	10.394	28.68	13.77	42.45	60.00	-17.55	QP
11	22.526	12.16	15.66	27.82	50.00	-22.18	AVG
12	23.006	28.97	15.60	44.57	60.00	-15.43	QP

5260MHz to 5320MHz:


Mode4 / Line: Line

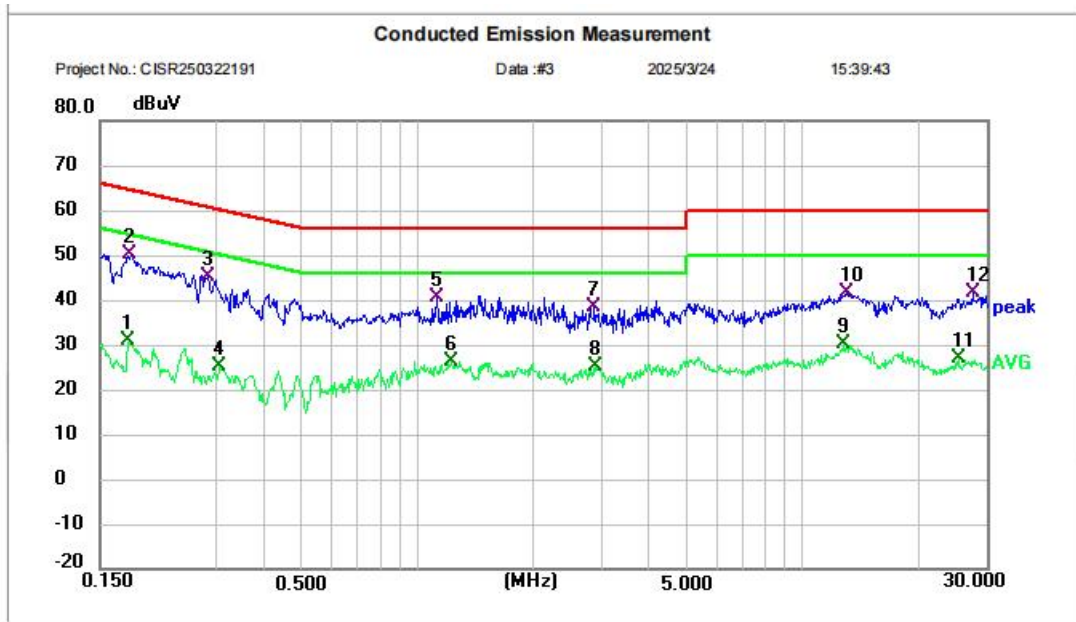

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.178	20.71	10.31	31.02	54.58	-23.56	AVG
2 *	0.180	39.75	10.31	50.06	64.49	-14.43	QP
3	0.285	35.01	10.34	45.35	60.67	-15.32	QP
4	0.306	14.95	10.34	25.29	50.08	-24.79	AVG
5	1.126	29.94	10.46	40.40	56.00	-15.60	QP
6	1.226	15.67	10.49	26.16	46.00	-19.84	AVG
7	2.882	27.33	10.95	38.28	56.00	-17.72	QP
8	2.898	14.14	10.95	25.09	46.00	-20.91	AVG
9	12.834	15.12	15.09	30.21	50.00	-19.79	AVG
10	13.006	26.57	15.17	41.74	60.00	-18.26	QP
11	25.414	11.93	15.09	27.02	50.00	-22.98	AVG
12	27.574	26.60	14.91	41.51	60.00	-18.49	QP



Mode4 / Line: Neutral

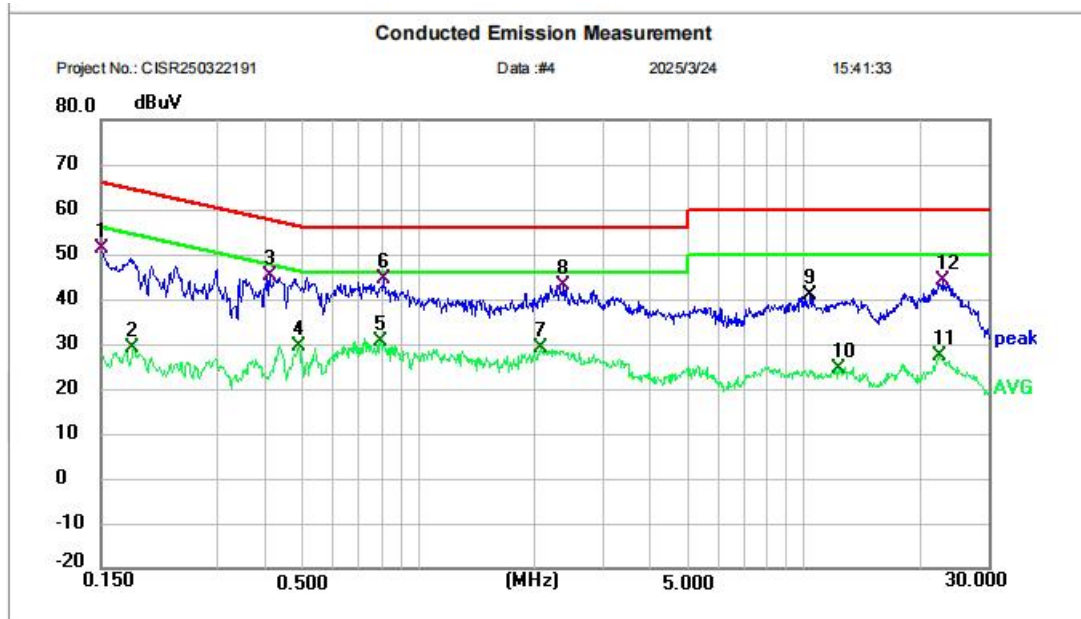


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	40.95	10.33	51.28	66.00	-14.72	QP
2	0.182	18.71	10.32	29.03	54.40	-25.37	AVG
3	0.410	34.87	10.34	45.21	57.65	-12.44	QP
4	0.490	18.97	10.38	29.35	46.17	-16.82	AVG
5	0.798	20.11	10.41	30.52	46.00	-15.48	AVG
6 *	0.814	34.05	10.42	44.47	56.00	-11.53	QP
7	2.078	18.44	10.73	29.17	46.00	-16.83	AVG
8	2.382	32.21	10.81	43.02	56.00	-12.98	QP
9	10.394	27.18	13.77	40.95	60.00	-19.05	peak
10	12.326	9.90	14.58	24.48	50.00	-25.52	AVG
11	22.526	11.66	15.66	27.32	50.00	-22.68	AVG
12	23.006	28.47	15.60	44.07	60.00	-15.93	QP




5510MHz to 5670MHz:

Mode4 / Line: Line

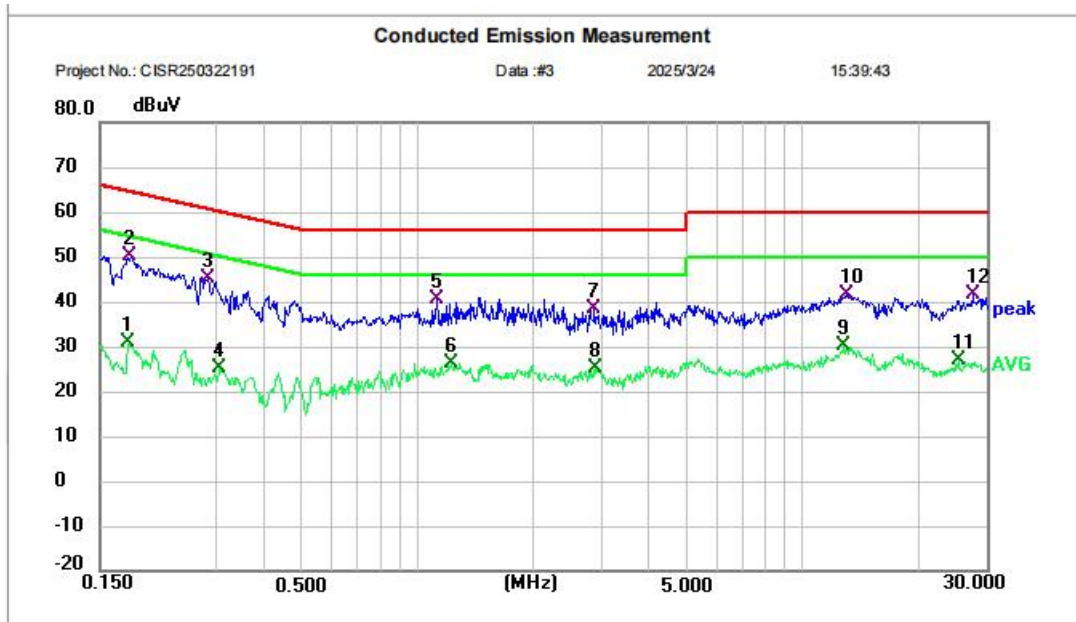

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.178	20.71	10.31	31.02	54.58	-23.56	AVG
2 *	0.180	39.75	10.31	50.06	64.49	-14.43	QP
3	0.285	35.01	10.34	45.35	60.67	-15.32	QP
4	0.306	14.95	10.34	25.29	50.08	-24.79	AVG
5	1.126	29.94	10.46	40.40	56.00	-15.60	QP
6	1.226	15.67	10.49	26.16	46.00	-19.84	AVG
7	2.882	27.33	10.95	38.28	56.00	-17.72	QP
8	2.898	14.14	10.95	25.09	46.00	-20.91	AVG
9	12.834	15.12	15.09	30.21	50.00	-19.79	AVG
10	13.006	26.57	15.17	41.74	60.00	-18.26	QP
11	25.414	11.93	15.09	27.02	50.00	-22.98	AVG
12	27.574	26.60	14.91	41.51	60.00	-18.49	QP


Mode4 / Line: Neutral

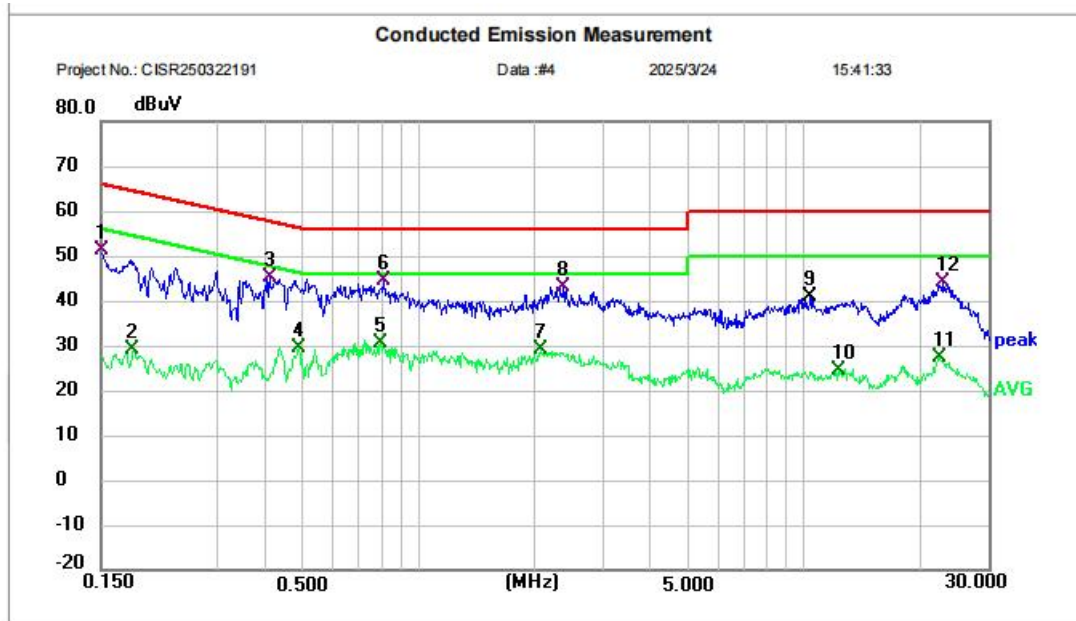

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	40.95	10.33	51.28	66.00	-14.72	QP
2	0.182	18.71	10.32	29.03	54.40	-25.37	AVG
3	0.410	34.87	10.34	45.21	57.65	-12.44	QP
4	0.490	18.97	10.38	29.35	46.17	-16.82	AVG
5	0.798	20.11	10.41	30.52	46.00	-15.48	AVG
6 *	0.814	34.05	10.42	44.47	56.00	-11.53	QP
7	2.078	18.44	10.73	29.17	46.00	-16.83	AVG
8	2.382	32.21	10.81	43.02	56.00	-12.98	QP
9	10.394	27.18	13.77	40.95	60.00	-19.05	peak
10	12.326	9.90	14.58	24.48	50.00	-25.52	AVG
11	22.526	11.66	15.66	27.32	50.00	-22.68	AVG
12	23.006	28.47	15.60	44.07	60.00	-15.93	QP


5755MHz to 5795MHz:

Mode4 / Line: Line

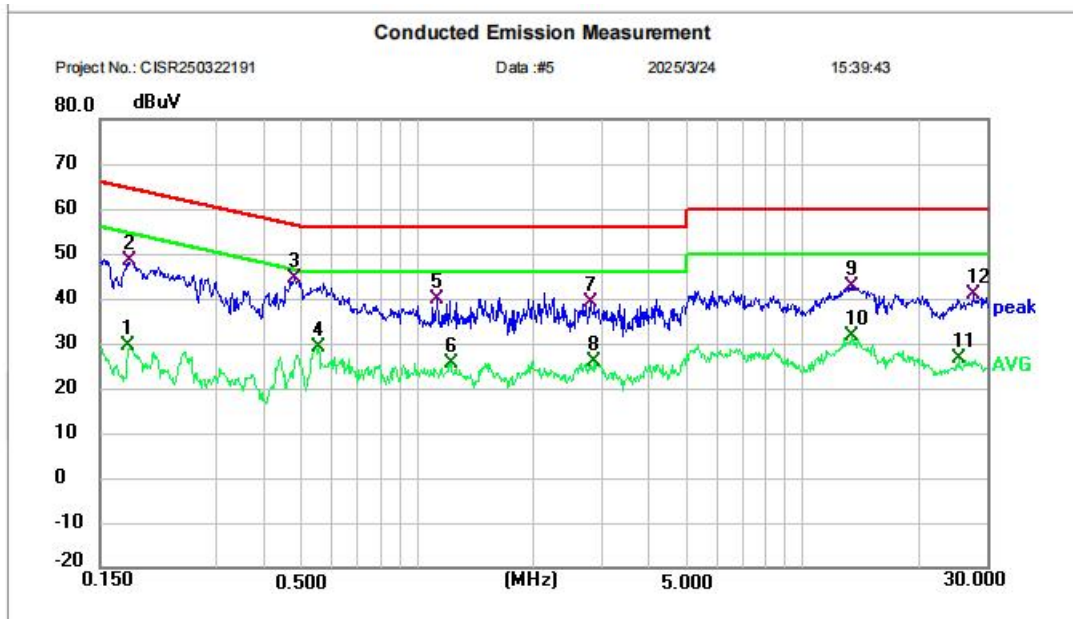

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.178	19.21	10.31	29.52	54.58	-25.06	AVG
2	0.180	38.25	10.31	48.56	64.49	-15.93	QP
3 *	0.482	34.02	10.36	44.38	56.30	-11.92	QP
4	0.554	18.64	10.38	29.02	46.00	-16.98	AVG
5	1.126	29.44	10.46	39.90	56.00	-16.10	QP
6	1.226	15.17	10.49	25.66	46.00	-20.34	AVG
7	2.810	28.28	10.93	39.21	56.00	-16.79	QP
8	2.862	14.89	10.94	25.83	46.00	-20.17	AVG
9	13.350	27.40	15.36	42.76	60.00	-17.24	QP
10	13.350	16.08	15.36	31.44	50.00	-18.56	AVG
11	25.414	11.43	15.09	26.52	50.00	-23.48	AVG
12	27.574	26.10	14.91	41.01	60.00	-18.99	QP

Mode4 / Line: Neutral

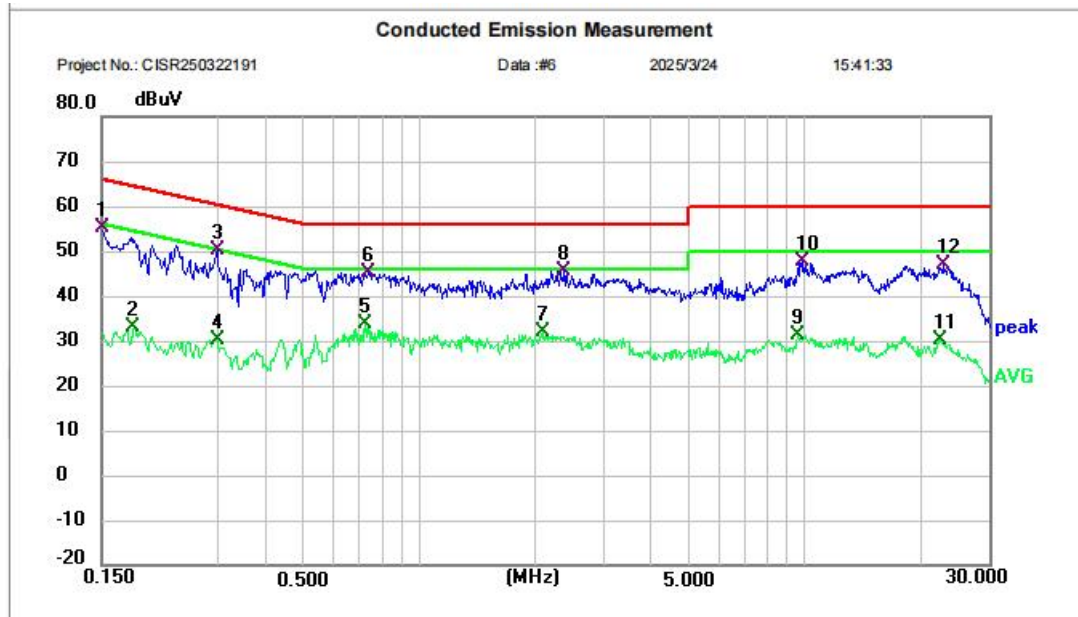

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	44.95	10.33	55.28	66.00	-10.72	QP
2	0.182	22.71	10.32	33.03	54.40	-21.37	AVG
3 *	0.298	39.78	10.35	50.13	60.30	-10.17	QP
4	0.298	19.84	10.35	30.19	50.30	-20.11	AVG
5	0.726	23.40	10.40	33.80	46.00	-12.20	AVG
6	0.738	34.65	10.41	45.06	56.00	-10.94	QP
7	2.106	21.15	10.74	31.89	46.00	-14.11	AVG
8	2.382	34.71	10.81	45.52	56.00	-10.48	QP
9	9.582	17.61	13.50	31.11	50.00	-18.89	AVG
10	9.878	33.96	13.58	47.54	60.00	-12.46	QP
11	22.526	14.66	15.66	30.32	50.00	-19.68	AVG
12	23.006	31.47	15.60	47.07	60.00	-12.93	QP

### 5.2.2. Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Limit:	No limits, only for report use.
Test Method:	ANSI C63.10-2020 section 12.2 (b)
Procedure:	i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW $\geq$ RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ , where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.

#### 5.2.2.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.1 °C	Humidity:	55.8 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2				
Final test mode:	TM1, TM2				

#### 5.2.2.2. Test Setup Diagram



#### 5.2.2.3. Test Result

Pass

#### 5.2.2.4. Test Data

Please Refer to Appendix for Details.



### 5.2.3. Emission bandwidth and occupied bandwidth

Test Requirement:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: 47 CFR Part 15.407(e)
Test Limit:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020, section 6.9 & 12.5 KDB 789033 D02, Clause C.2
Procedure:	<p>Emission bandwidth:</p> <ol style="list-style-type: none"> <li>Set RBW = approximately 1% of the emission bandwidth.</li> <li>Set the VBW &gt; RBW.</li> <li>Detector = peak.</li> <li>Trace mode = max hold.</li> <li>Measure the maximum width of the emission that is 26 dB down from the peak of the emission.</li> </ol> <p>Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</p> <p>Occupied bandwidth:</p> <ol style="list-style-type: none"> <li>The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.</li> <li>The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.</li> <li>Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than <math>[10 \log (OBW/RBW)]</math> below the reference level. Specific guidance is given in 4.1.5.2.</li> <li>Step a) through step c) might require iteration to adjust within the specified range.</li> <li>Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.</li> <li>Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.</li> <li>If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.</li> <li>The occupied bandwidth shall be reported by providing plot(s) of the measuring</li> </ol>

instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 5.2.3.1. E.U.T. Operation

##### Operating Environment:

Temperature:	22.1 °C	Humidity:	55.8 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2				
Final test mode:	TM1, TM2				

#### 5.2.3.2. Test Setup Diagram



#### 5.2.3.3. Test Result

Pass

#### 5.2.3.4. Test Data

Please Refer to Appendix for Details.

#### 5.2.4. Maximum conducted output power

Test Requirement:	<p>47 CFR Part 15.407(a)(1)(i)  47 CFR Part 15.407(a)(1)(ii)  47 CFR Part 15.407(a)(1)(iii)  47 CFR Part 15.407(a)(1)(iv)  47 CFR Part 15.407(a)(2)  47 CFR Part 15.407(a)(3)(i)</p>
Test Limit:	<p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.  If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.  If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.  Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power.  For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi.  Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.  If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or <math>11 \text{ dBm} + 10 \log B</math>, where B is the 26 dB emission bandwidth in megahertz.  If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.  If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.  However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point</p>



	operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2020, section 12.4
Procedure:	Refer to ANSI C63.10-2020 section 12.4

#### 5.2.4.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.1 °C	Humidity:	55.8 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2				
Final test mode:	TM1, TM2				

#### 5.2.4.2. Test Setup Diagram



#### 5.2.4.3. Test Result

Pass

#### 5.2.4.4. Test Data

Please Refer to Appendix for Details.

### 5.2.5. Power spectral density

Test Requirement:	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	<p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>

Test Method:	ANSI C63.10-2020, section 12.6
Procedure:	Refer to ANSI C63.10-2020, section 12.6

#### 5.2.5.1. E.U.T. Operation

Operating Environment:					
Temperature:	22.1 °C	Humidity:	55.8 %	Atmospheric Pressure:	103 kPa
Pre test mode:	TM1, TM2				
Final test mode:	TM1, TM2				

#### 5.2.5.2. Test Setup Diagram



#### 5.2.5.3. Test Result

Pass

#### 5.2.5.4. Test Data

Please Refer to Appendix for Details.

### 5.2.6. Band edge emissions (Conducted)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )	
13.36-13.41				
<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.				
<sup>2</sup> Above 38.6				
The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §				

	<p>15.35 apply to these measurements.</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	<p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not</p>																								

exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.  
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

#### 5.2.6.1. E.U.T. Operation

##### Operating Environment:

Temperature:	22.1 °C	Humidity:	55.8 %	Atmospheric Pressure:	103 kPa
--------------	---------	-----------	--------	-----------------------	---------

Pre test mode:	TM1, TM2
----------------	----------

Final test mode:	TM1, TM2
------------------	----------

#### 5.2.6.2. Test Setup Diagram



#### 5.2.6.3. Test Result

Pass

#### 5.2.6.4. Test Data

Please Refer to Appendix for Details.

### 5.2.7. Band edge emissions (Radiated)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )	
13.36-13.41				
<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.				
<sup>2</sup> Above 38.6				
The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §				



	<p>15.35 apply to these measurements.</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	<p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not</p>																								



exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.  
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

#### 5.2.7.1. E.U.T. Operation


##### Operating Environment:

Temperature:	23 °C	Humidity:	55.2 %	Atmospheric Pressure:	102 kPa
--------------	-------	-----------	--------	-----------------------	---------

Pre test mode:	TM1, TM2, TM3, TM4
----------------	--------------------

Final test mode:	TM1, TM2, TM3, TM4
------------------	--------------------

#### 5.2.7.2. Test Setup Diagram

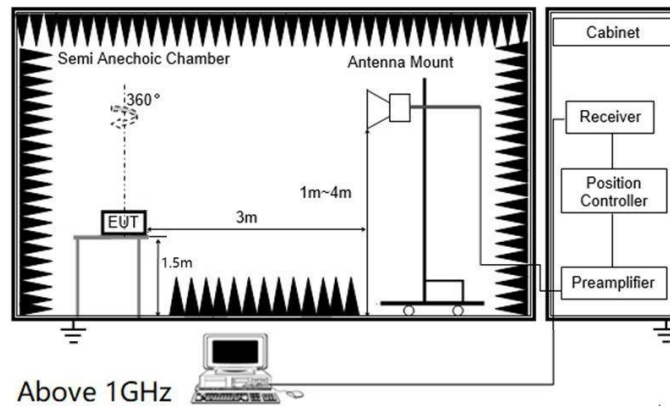

#### 5.2.7.3. Test Result

Pass

#### 5.2.7.4. Test Data

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit - Level
- 3) Average measurement was not performed if peak level is lower than average limit
- 4) The other emission levels were very low against the limit.
- 5) Have pre-scan all test channel, found 11a mode which it was worst case, so only show the worst case' s data on this report.

##### Test channel:CH36 5180

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5150.00	70.38	28.62	4.08	38.62	-5.92	64.46	74	9.54	Peak	Horizontal
5150.00	51.48	28.62	4.08	38.62	-5.92	45.56	54	8.44	Average	Horizontal
5150.00	69.13	28.62	4.08	38.62	-5.92	63.21	74	10.79	Peak	Vertical
5150.00	49.98	28.62	4.08	38.62	-5.92	44.06	54	9.94	Average	Vertical

##### Test channel:CH48 5240

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5350.00	69.50	29.45	3.91	40.17	-6.81	62.69	74	11.31	Peak	Horizontal
5350.00	50.33	29.45	3.91	40.17	-6.81	43.52	54	10.48	Average	Horizontal
5350.00	68.25	29.45	3.91	40.17	-6.81	61.44	74	12.56	Peak	Vertical
5350.00	50.80	29.45	3.91	40.17	-6.81	43.99	54	10.01	Average	Vertical

##### Test channel:CH52 5260

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5150.00	70.00	28.62	4.08	38.62	-5.92	64.08	74	9.92	Peak	Horizontal
5150.00	51.38	28.62	4.08	38.62	-5.92	45.46	54	8.54	Average	Horizontal
5150.00	69.12	28.62	4.08	38.62	-5.92	63.20	74	10.80	Peak	Vertical
5150.00	50.22	28.62	4.08	38.62	-5.92	44.30	54	9.70	Average	Vertical

## Test channel:CH64 5320

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5350.00	69.96	29.45	3.91	40.17	-6.81	63.15	74	10.85	Peak	Horizontal
5350.00	49.74	29.45	3.91	40.17	-6.81	42.93	54	11.07	Average	Horizontal
5350.00	68.21	29.45	3.91	40.17	-6.81	61.40	74	12.60	Peak	Vertical
5350.00	50.66	29.45	3.91	40.17	-6.81	43.85	54	10.15	Average	Vertical

## Test channel:CH100 5500

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5470.00	69.89	28.62	4.08	38.62	-5.92	63.97	74	10.03	Peak	Horizontal
5470.00	51.25	28.62	4.08	38.62	-5.92	45.33	54	8.67	Average	Horizontal
5470.00	68.84	28.62	4.08	38.62	-5.92	62.92	74	11.08	Peak	Vertical
5470.00	49.95	28.62	4.08	38.62	-5.92	44.03	54	9.97	Average	Vertical

## Test channel:CH140 5700

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5725.00	70.20	29.45	3.91	40.17	-6.81	63.39	74	10.61	Peak	Horizontal
5725.00	49.46	29.45	3.91	40.17	-6.81	42.65	54	11.35	Average	Horizontal
5725.00	68.58	29.45	3.91	40.17	-6.81	61.77	74	12.23	Peak	Vertical
5725.00	50.37	29.45	3.91	40.17	-6.81	43.56	54	10.44	Average	Vertical

## Test channel:CH149 5745

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5725.00	70.36	28.62	4.08	38.62	-5.92	64.44	74	9.56	Peak	Horizontal
5725.00	51.85	28.62	4.08	38.62	-5.92	45.93	54	8.07	Average	Horizontal
5725.00	68.77	28.62	4.08	38.62	-5.92	62.85	74	11.15	Peak	Vertical
5725.00	49.85	28.62	4.08	38.62	-5.92	43.93	54	10.07	Average	Vertical

## Test channel:CH165 5825

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
5850.00	69.57	29.45	3.91	40.17	-6.81	62.76	74	11.24	Peak	Horizontal
5850.00	50.14	29.45	3.91	40.17	-6.81	43.33	54	10.67	Average	Horizontal
5850.00	67.77	29.45	3.91	40.17	-6.81	60.96	74	13.04	Peak	Vertical
5850.00	51.31	29.45	3.91	40.17	-6.81	44.50	54	9.50	Average	Vertical

### 5.2.8. Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(9)																								
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.																								
	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:																								
	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																						
	0.009-0.490	2400/F(kHz)	300																						
	0.490-1.705	24000/F(kHz)	30																						
	1.705-30.0	30	30																						
	30-88	100 **	3																						
	88-216	150 **	3																						
	216-960	200 **	3																						
Above 960	500	3																							
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.																									
In the emission table above, the tighter limit applies at the band edges.																									
The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																									
Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.5																								
Procedure:	Below 1GHz:																								
	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.																								
	b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.																								
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.																								
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.																								
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																								
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.																								
	g. Test the EUT in the lowest channel, the middle channel, the Highest channel.																								
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.																								
	i. Repeat above procedures until all frequencies measured was complete.																								
Remark:																									
1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor																									
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when																									

testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Above 1GHz:

- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.


Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

#### 5.2.8.1. E.U.T. Operation

Operating Environment:					
Temperature:	23 °C	Humidity:	55.2 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

### 5.2.8.2. Test Setup Diagram

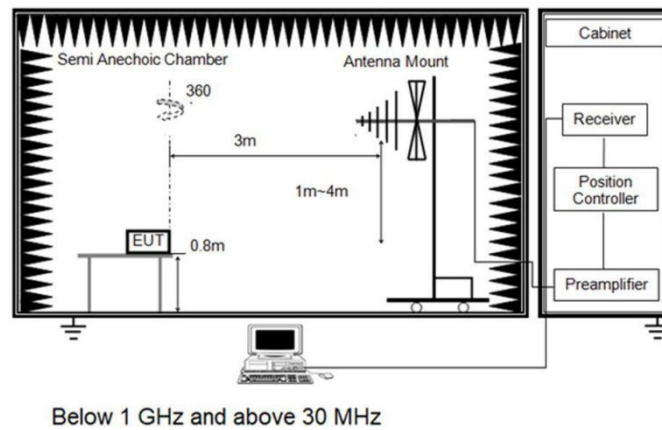

### 5.2.8.3. Test Result

Pass

#### 5.2.8.4. Test Data

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.
- 4) The other emission levels were very low against the limit.
- 5) This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

#### For 9 kHz ~ 30 MHz


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

#### For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found 11a mode which it was worst case, so only show the worst case's data on this report.

5180MHz to 5240MH:


Mode1 / Polarization: Horizontal

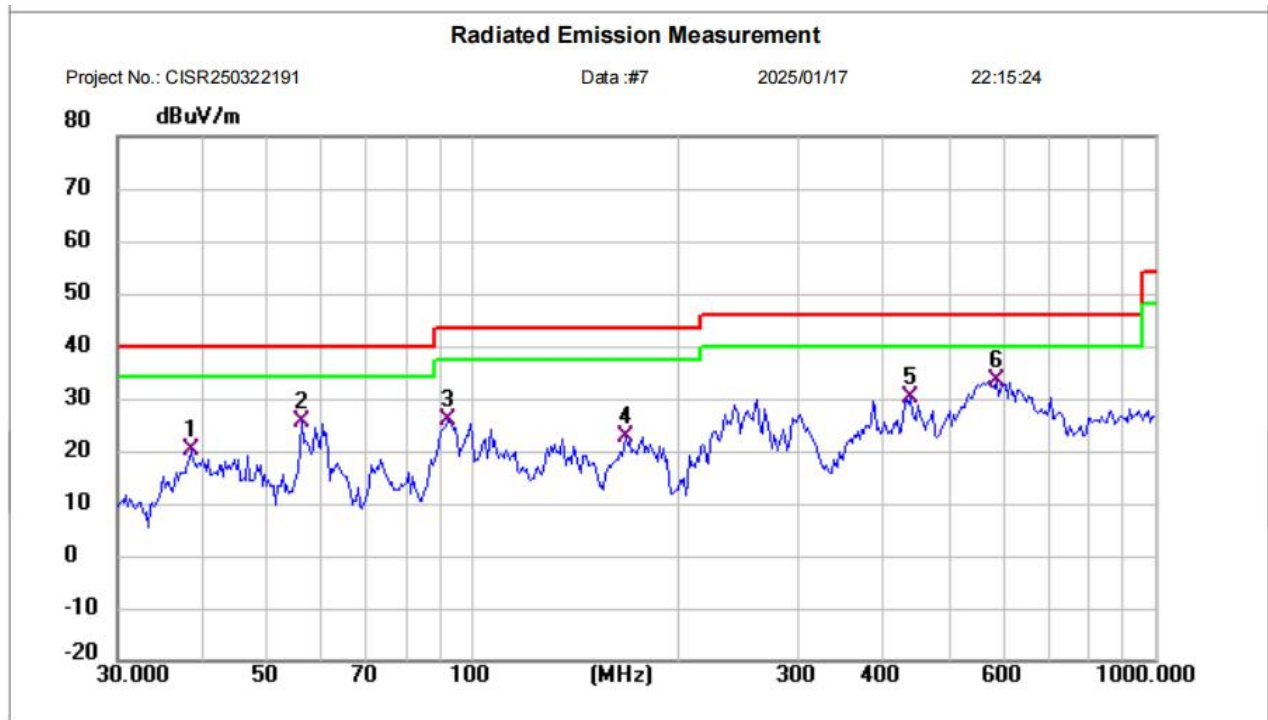

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.616	51.26	-31.07	20.19	40.00	-19.81	QP
2	56.001	55.99	-30.37	25.62	40.00	-14.38	QP
3	91.495	58.87	-33.07	25.80	43.50	-17.70	QP
4	167.237	55.30	-32.56	22.74	43.50	-20.76	QP
5	437.120	54.07	-23.83	30.24	46.00	-15.76	QP
6 *	586.844	53.00	-19.65	33.35	46.00	-12.65	QP




Mode1 / Polarization: Vertical

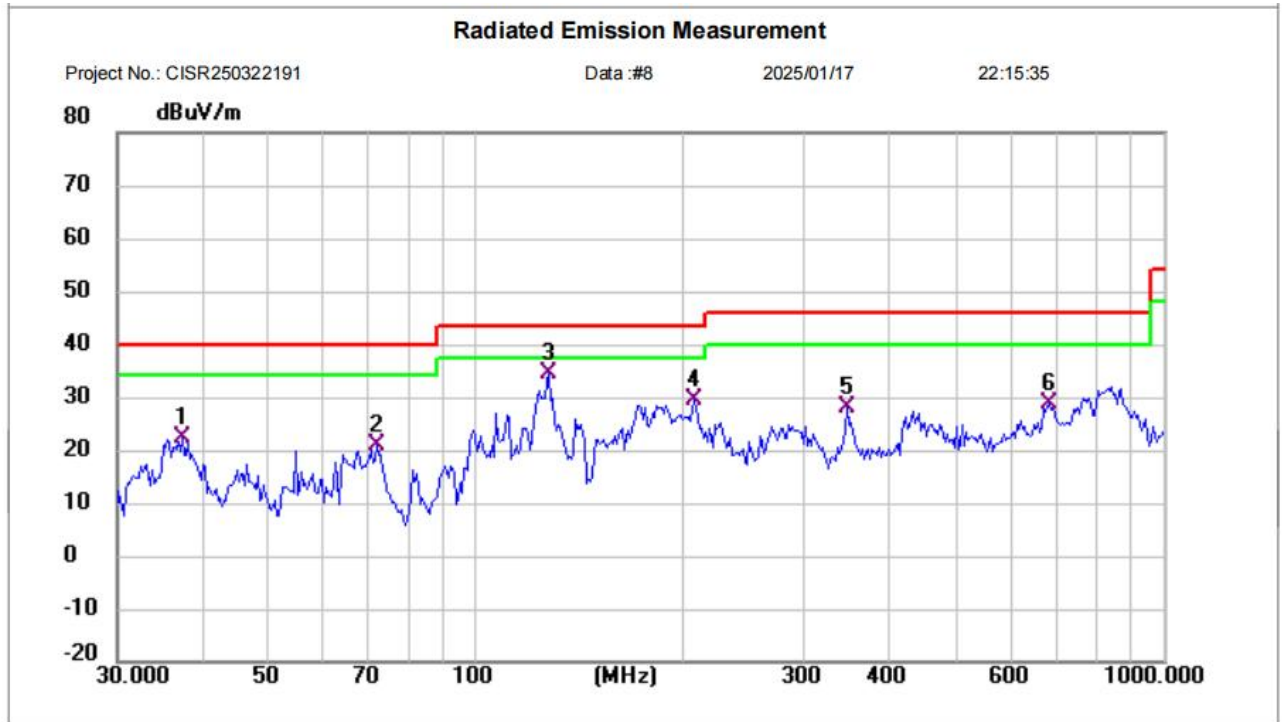

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.285	53.81	-31.38	22.43	40.00	-17.57	QP
2	71.581	54.19	-33.32	20.87	40.00	-19.13	QP
3 *	127.218	67.61	-33.32	34.29	43.50	-9.21	QP
4	207.850	59.10	-29.66	29.44	43.50	-14.06	QP
5	346.809	53.56	-25.69	27.87	46.00	-18.13	QP
6	679.960	46.21	-17.45	28.76	46.00	-17.24	QP


5260MHz to 5320MHz:

Mode1 / Polarization: Horizontal

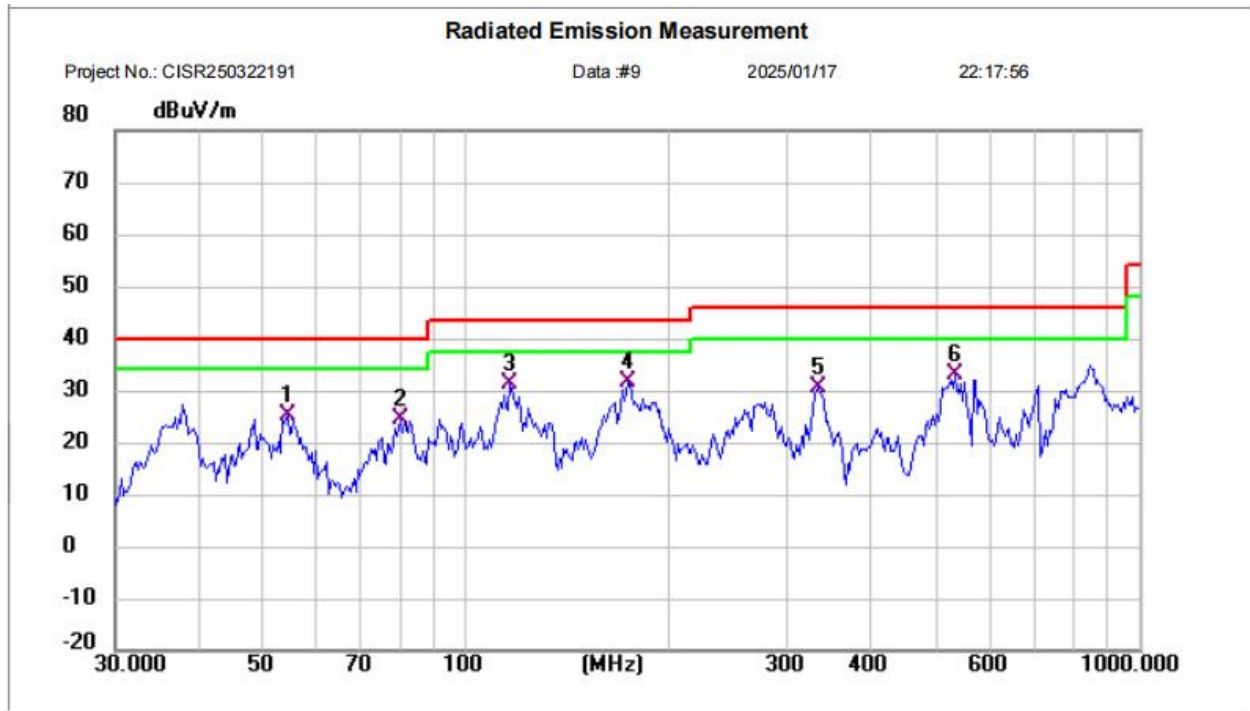

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	54.071	55.25	-30.06	25.19	40.00	-14.81	QP
2	79.521	59.51	-34.89	24.62	40.00	-15.38	QP
3	116.132	62.99	-31.67	31.32	43.50	-12.18	QP
4 *	173.205	63.56	-32.01	31.55	43.50	-11.95	QP
5	332.519	56.87	-26.23	30.64	46.00	-15.36	QP
6	531.963	54.13	-21.00	33.13	46.00	-12.87	QP


Mode1 / Polarization: Vertical

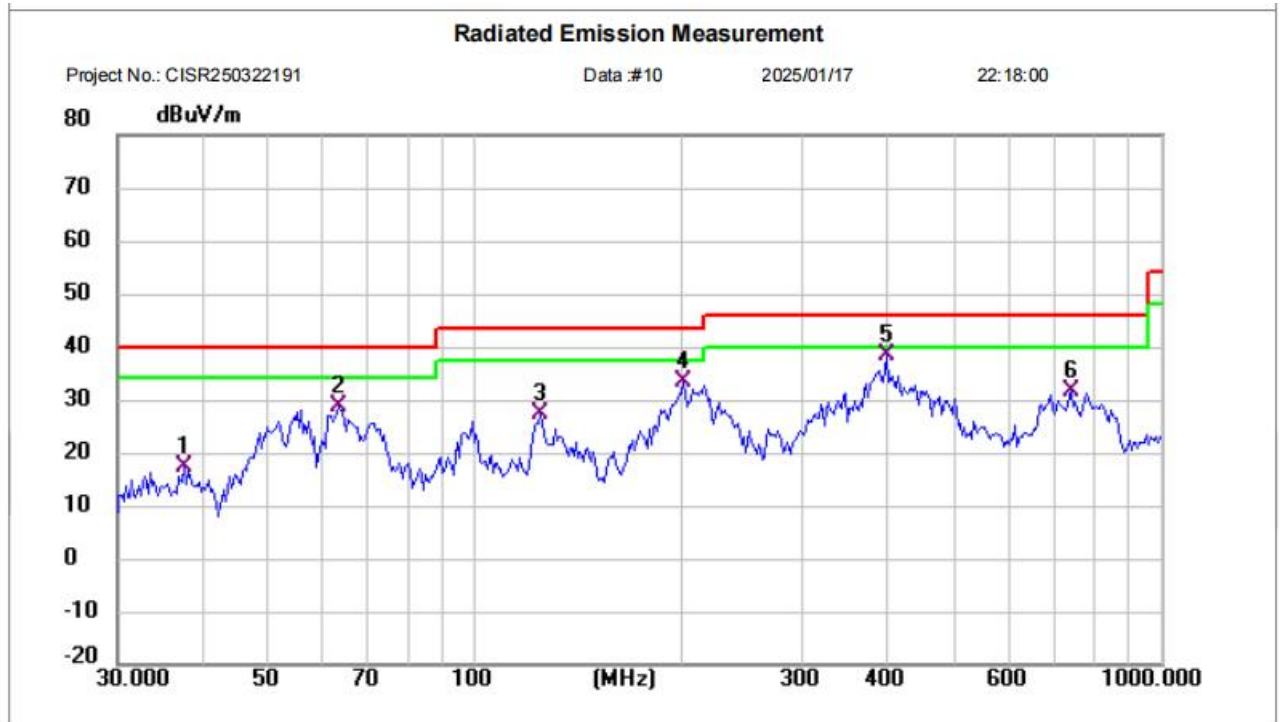

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.548	48.77	-31.31	17.46	40.00	-22.54	QP
2	63.092	60.24	-31.33	28.91	40.00	-11.09	QP
3	124.569	60.04	-32.70	27.34	43.50	-16.16	QP
4	200.688	63.21	-29.83	33.38	43.50	-10.12	QP
5 *	399.030	63.17	-24.88	38.29	46.00	-7.71	QP
6	739.660	48.75	-16.99	31.76	46.00	-14.24	QP


5510MHz to 5670MHz:

Mode1 / Polarization: Horizontal

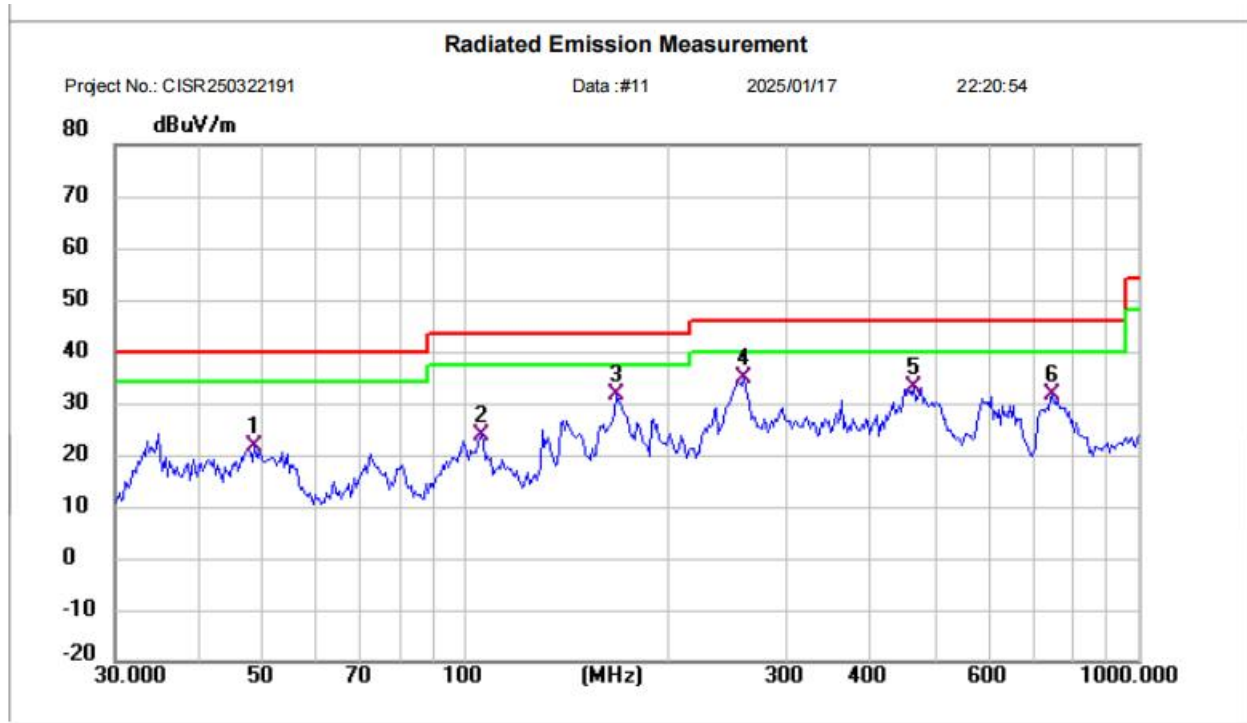

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	48.332	50.94	-29.19	21.75	40.00	-18.25	QP
2	105.272	54.46	-30.79	23.67	43.50	-19.83	QP
3	167.237	64.22	-32.56	31.66	43.50	-11.84	QP
4 *	258.326	63.09	-28.28	34.81	46.00	-11.19	QP
5	462.346	56.15	-23.03	33.12	46.00	-12.88	QP
6	744.866	48.64	-17.08	31.56	46.00	-14.44	QP


Mode1 / Polarization: Vertical

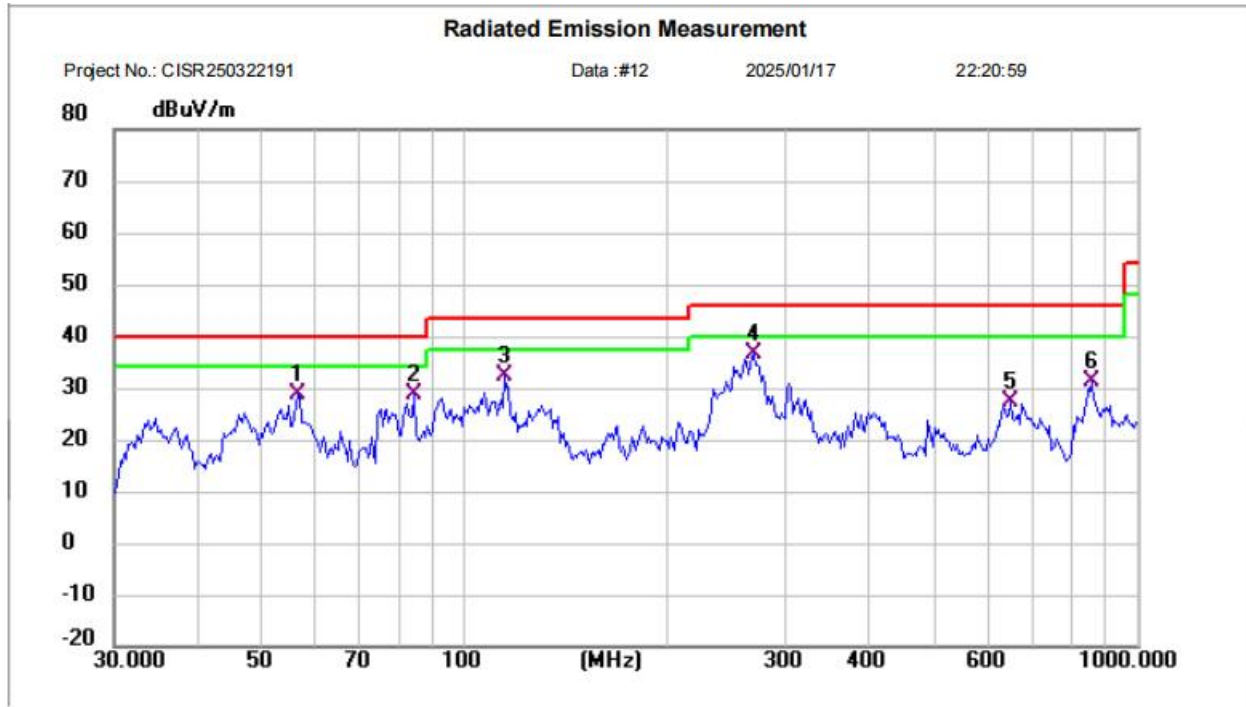

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	56.395	59.22	-30.40	28.82	40.00	-11.18	QP
2	84.110	62.74	-34.10	28.64	40.00	-11.36	QP
3	114.515	63.87	-31.42	32.45	43.50	-11.05	QP
4 *	269.428	64.86	-28.28	36.58	46.00	-9.42	QP
5	647.385	45.66	-18.33	27.33	46.00	-18.67	QP
6	857.024	46.68	-15.54	31.14	46.00	-14.86	QP

5755MHz to 5795MHz:


Mode1 / Polarization: Horizontal

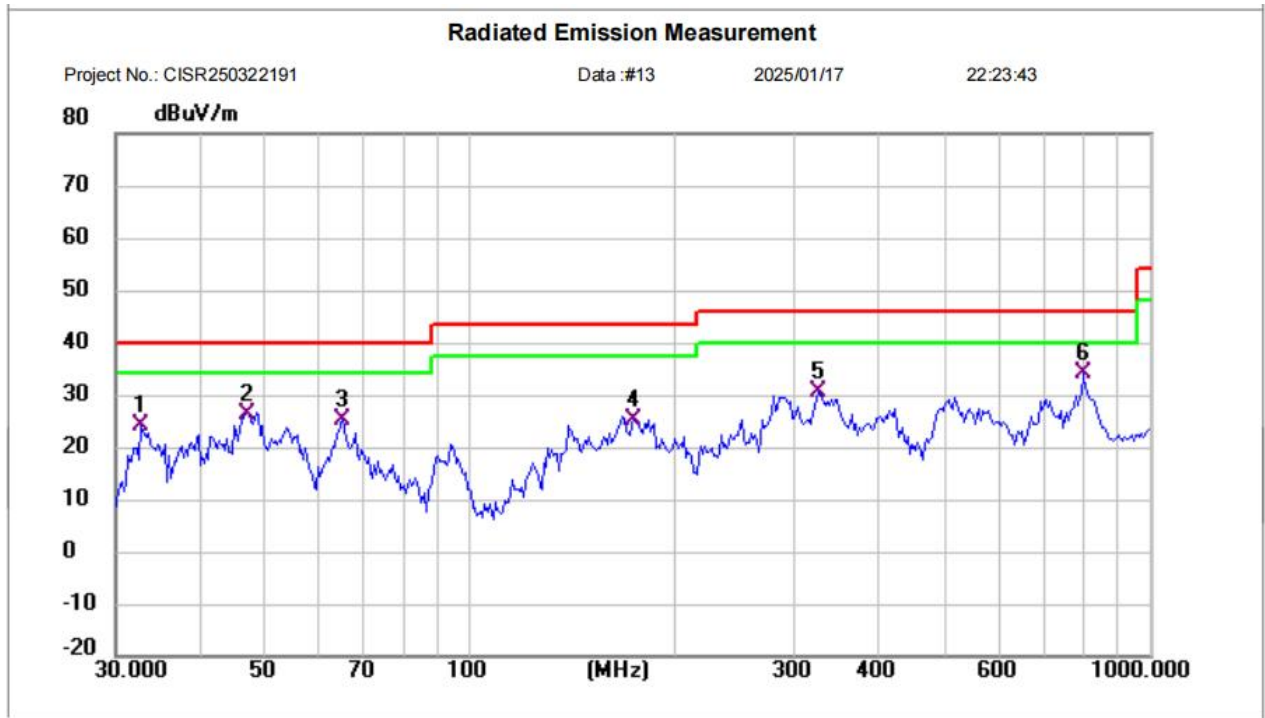

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.634	56.00	-31.90	24.10	40.00	-15.90	QP
2	46.995	55.49	-29.24	26.25	40.00	-13.75	QP
3	64.886	57.04	-31.69	25.35	40.00	-14.65	QP
4	173.205	57.23	-32.01	25.22	43.50	-18.28	QP
5	325.596	56.92	-26.56	30.36	46.00	-15.64	QP
6 *	798.980	50.69	-16.47	34.22	46.00	-11.78	QP



Mode1 / Polarization: Vertical

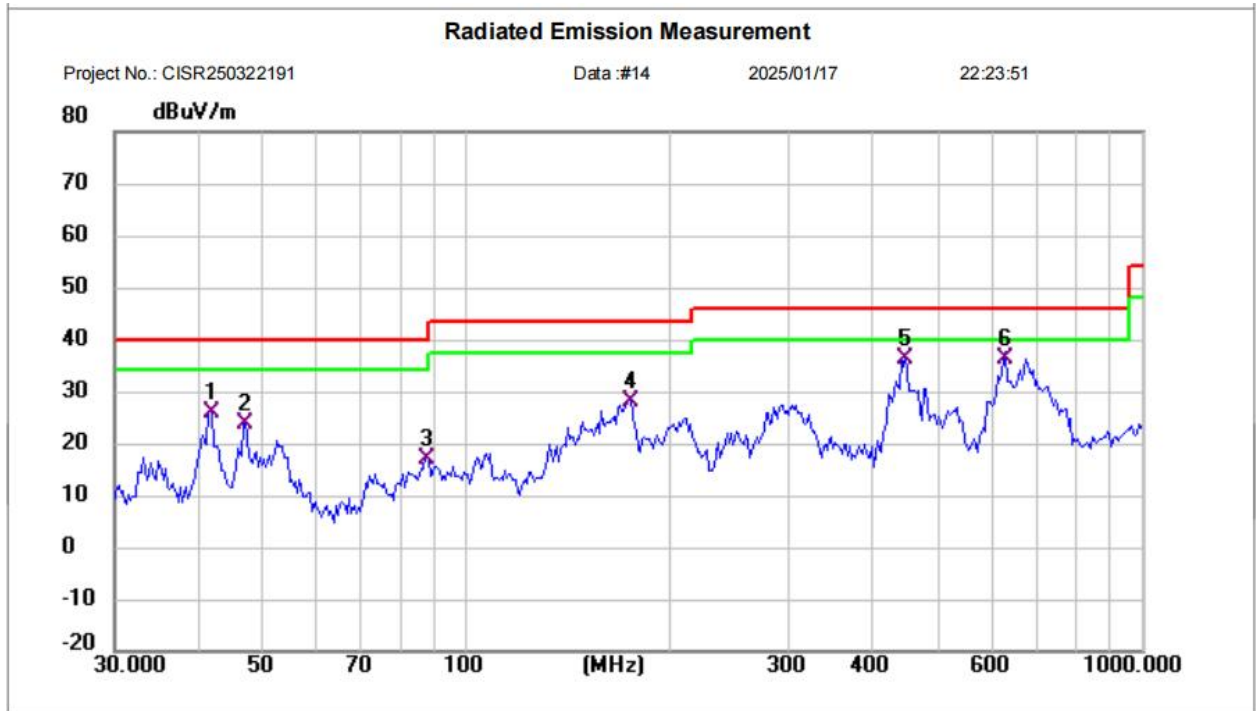

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.713	56.22	-30.27	25.95	40.00	-14.05	QP
2	46.995	53.12	-29.24	23.88	40.00	-16.12	QP
3	87.112	50.82	-33.71	17.11	40.00	-22.89	QP
4	174.424	60.06	-31.97	28.09	43.50	-15.41	QP
5 *	446.414	59.86	-23.51	36.35	46.00	-9.65	QP
6	629.477	54.80	-18.65	36.15	46.00	-9.85	QP

### 5.2.9. Undesirable emission limits (above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(3) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
	12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
	13.36-13.41			
	<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.			
<sup>2</sup> Above 38.6				
The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above				



	<p>1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	<p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported</p>																								

3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

#### 5.2.9.1. E.U.T. Operation


##### Operating Environment:

Temperature:	23 °C	Humidity:	55.2 %	Atmospheric Pressure:	102 kPa
--------------	-------	-----------	--------	-----------------------	---------

Pre test mode:	TM1, TM2, TM3, TM4
----------------	--------------------

Final test mode:	TM1, TM2, TM3, TM4
------------------	--------------------

#### 5.2.9.2. Test Setup Diagram

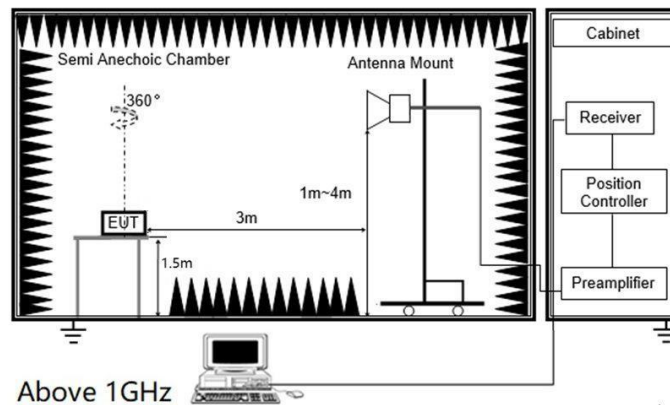

#### 5.2.9.3. Test Result

Pass

### 5.2.9.4. Test Data

#### For 1 GHz ~ 40 GHz

Have pre-scan all test channel, found 11a mode which it was worst case, so only show the worst case's data on this report.

#### Test channel:CH36

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
15.54	69.40	31.33	4.23	38.62	-3.06	66.34	74	7.66	Peak	Horizontal
15.54	49.74	31.33	4.23	38.62	-3.06	46.68	54	7.32	Average	Horizontal
15.54	64.98	31.33	4.23	38.62	-3.06	61.92	74	12.08	Peak	Vertical
15.54	51.36	31.33	4.23	38.62	-3.06	48.30	54	5.70	Average	Vertical

#### Test channel:CH40

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
15.60	70.56	30.26	4.09	38.29	-3.94	66.62	74	7.38	Peak	Horizontal
15.60	50.66	30.26	4.09	38.29	-3.94	46.72	54	7.28	Average	Horizontal
15.60	66.75	30.26	4.09	38.29	-3.94	62.81	74	11.19	Peak	Vertical
15.60	50.70	30.26	4.09	38.29	-3.94	46.76	54	7.24	Average	Vertical

#### Test channel:CH48

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
15.72	64.58	31.97	4.11	38.47	-2.39	62.19	74	11.81	Peak	Horizontal
15.72	50.51	31.97	4.11	38.47	-2.39	48.12	54	5.88	Average	Horizontal
15.72	67.38	31.97	4.11	38.47	-2.39	64.99	74	9.01	Peak	Vertical
15.72	51.34	31.97	4.11	38.47	-2.39	48.95	54	5.05	Average	Vertical

## Test channel:CH52

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
10.52	68.87	31.33	4.23	38.62	-3.06	65.81	74	8.19	Peak	Horizontal
10.52	49.32	31.33	4.23	38.62	-3.06	46.26	54	7.74	Average	Horizontal
10.52	65.31	31.33	4.23	38.62	-3.06	62.25	74	11.75	Peak	Vertical
10.52	50.98	31.33	4.23	38.62	-3.06	47.92	54	6.08	Average	Vertical

## Test channel:CH60

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
10.60	70.57	30.26	4.09	38.29	-3.94	66.63	74	7.37	Peak	Horizontal
10.60	50.44	30.26	4.09	38.29	-3.94	46.50	54	7.50	Average	Horizontal
10.60	67.27	30.26	4.09	38.29	-3.94	63.33	74	10.67	Peak	Vertical
10.60	50.68	30.26	4.09	38.29	-3.94	46.74	54	7.26	Average	Vertical

## Test channel:CH64

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
10.64	64.01	31.97	4.11	38.47	-2.39	61.62	74	12.38	Peak	Horizontal
10.64	50.50	31.97	4.11	38.47	-2.39	48.11	54	5.89	Average	Horizontal
10.64	67.28	31.97	4.11	38.47	-2.39	64.89	74	9.11	Peak	Vertical
10.64	51.60	31.97	4.11	38.47	-2.39	49.21	54	4.79	Average	Vertical

## Test channel:CH100

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
11.00	69.03	31.33	4.23	38.62	-3.06	65.97	74	8.03	Peak	Horizontal
11.00	49.65	31.33	4.23	38.62	-3.06	46.59	54	7.41	Average	Horizontal
11.00	64.91	31.33	4.23	38.62	-3.06	61.85	74	12.15	Peak	Vertical
11.00	51.24	31.33	4.23	38.62	-3.06	48.18	54	5.82	Average	Vertical

## Test channel:CH116

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
11.16	70.13	30.26	4.09	38.29	-3.94	66.19	74	7.81	Peak	Horizontal
11.16	50.64	30.26	4.09	38.29	-3.94	46.70	54	7.30	Average	Horizontal
11.16	67.26	30.26	4.09	38.29	-3.94	63.32	74	10.68	Peak	Vertical
11.16	50.90	30.26	4.09	38.29	-3.94	46.96	54	7.04	Average	Vertical

## Test channel:CH140

Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correc tion Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
11.40	64.72	31.97	4.11	38.47	-2.39	62.33	74	11.67	Peak	Horizontal
11.40	49.76	31.97	4.11	38.47	-2.39	47.37	54	6.63	Average	Horizontal
11.40	67.50	31.97	4.11	38.47	-2.39	65.11	74	8.89	Peak	Vertical
11.40	51.48	31.97	4.11	38.47	-2.39	49.09	54	4.91	Average	Vertical

## Test channel:CH149

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
11.49	69.21	31.33	4.23	38.62	-3.06	66.15	74	7.85	Peak	Horizontal
11.49	48.94	31.33	4.23	38.62	-3.06	45.88	54	8.12	Average	Horizontal
11.49	64.73	31.33	4.23	38.62	-3.06	61.67	74	12.33	Peak	Vertical
11.49	51.58	31.33	4.23	38.62	-3.06	48.52	54	5.48	Average	Vertical

## Test channel:CH157

Freq. (GHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
11.57	70.23	30.26	4.09	38.29	-3.94	66.29	74	7.71	Peak	Horizontal
11.57	51.13	30.26	4.09	38.29	-3.94	47.19	54	6.81	Average	Horizontal
11.57	67.61	30.26	4.09	38.29	-3.94	63.67	74	10.33	Peak	Vertical
11.57	50.73	30.26	4.09	38.29	-3.94	46.79	54	7.21	Average	Vertical

## Test channel:CH165


Freq. (MHz)	Reading (dBuv)	Ant. Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)	Level (dBuv)	Limit (dBu V/m)	Margin (dB)	Remark	Polarity
11.65	64.86	31.97	4.11	38.47	-2.39	62.47	74	11.53	Peak	Horizontal
11.65	49.99	31.97	4.11	38.47	-2.39	47.60	54	6.40	Average	Horizontal
11.65	67.09	31.97	4.11	38.47	-2.39	64.70	74	9.30	Peak	Vertical
11.65	50.85	31.97	4.11	38.47	-2.39	48.46	54	5.54	Average	Vertical

## Notes:

- 1). Measuring frequencies from 9 KHz ~ 40GHz, emissions are attenuated more than 20dB below the permissible limits generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz ~ 40GHz were made with an instrument using Peak detector mode.
- 3). 18~40GHz at least have 20dB margin. No recording in the test report.

## 6. TEST SETUP PHOTOS

Conducted Emission at AC power line

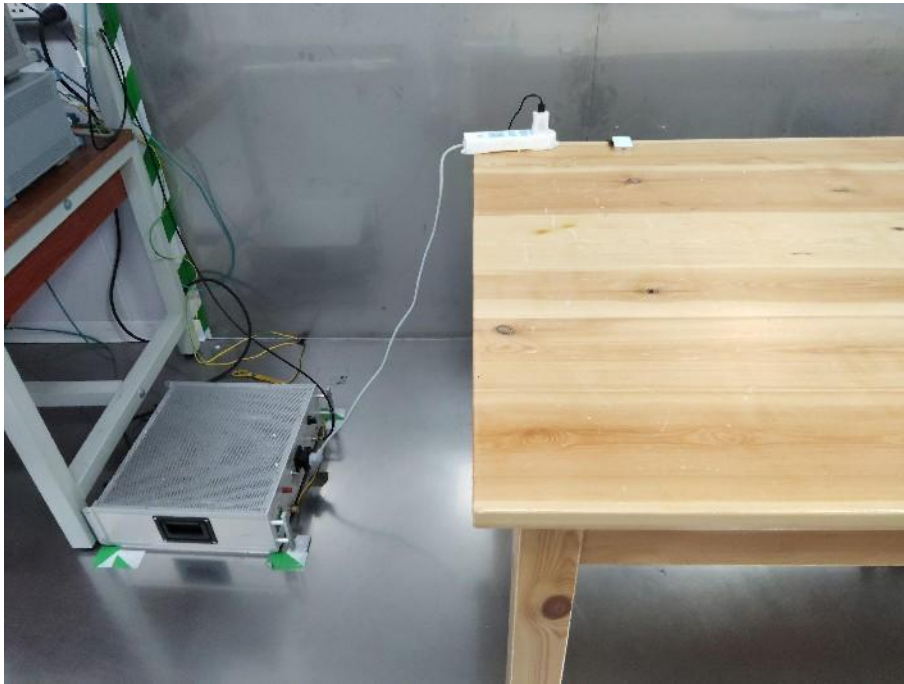


Band edge emissions (Radiated)  
Undesirable emission limits (above 1GHz)





Undesirable emission limits (below 1GHz)

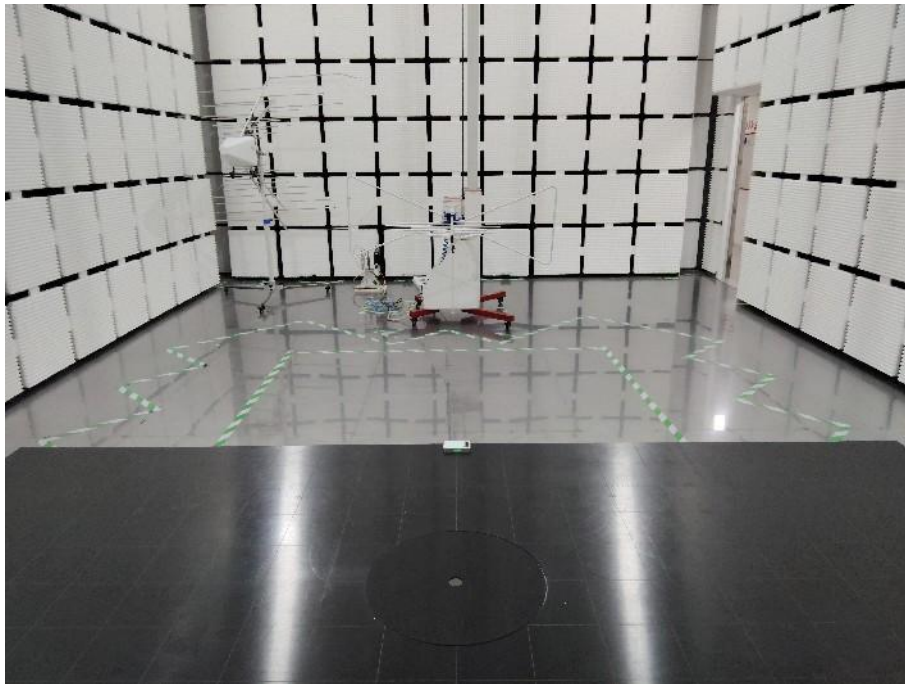



## **7. EXTERNAL AND INTERNAL PHOTOS**

### **7.1. External Photos**

refer to the report CISRR25032219101.

### **7.2. Internal Photos**

refer to the report CISRR25032219101.

## **8. Appendix Report**