



## RF TEST REPORT

**Applicant**      Compal Electronics, Inc.  
**FCC ID**          GKREXCN1  
**Product**        4G LCC Module  
**Brand**            COMPAL  
**Model**            EXC-N1  
**Report No.**      R2209A0845-R4V2  
**Issue Date**      October 20, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2021)/ FCC CFR 47 Part 90S (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Prepared by: Xu Ying*

*Approved by: Xu Kai*

---

**TA Technology (Shanghai) Co., Ltd.**

*Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1. Test Laboratory .....	5
1.1. Notes of the Test Report .....	5
1.2. Test facility .....	5
1.3. Testing Location .....	5
2. General Description of Equipment under Test .....	6
2.1. Applicant and Manufacturer Information .....	6
2.2. General Information .....	6
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case .....	9
5.1. RF Power Output and Effective Radiated Power .....	9
5.2. Occupied Bandwidth .....	10
5.3. Emission Mask .....	11
5.4. Peak-to-Average Power Ratio (PAPR) .....	12
5.5. Frequency Stability .....	13
5.6. Spurious Emissions at Antenna Terminals .....	15
5.7. Radiates Spurious Emission .....	16
6. Test Results .....	19
6.1. RF Power Output and Effective Radiated Power .....	19
6.2. Occupied Bandwidth .....	21
6.3. Emission Mask .....	26
6.4. Peak-to-Average Power Ratio (PAPR) .....	32
6.5. Frequency Stability .....	33
6.6. Spurious Emissions at Antenna Terminals .....	34
6.7. Radiates Spurious Emission .....	38
7. Main Test Instruments .....	40
ANNEX A: The EUT Appearance and Change declaration letter .....	41
ANNEX B: Test Setup Photos .....	42



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	September 28, 2022
Rev.1	Update information.	October 19, 2022
Rev.2	Update description.	October 20, 2022
Note: This revised report (Report No. R2209A0845-R4V2) supersedes and replaces the previously issued report (Report No. R2209A0845-R4V1). Please discard or destroy the previously issued report and dispose of it accordingly.		

### Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046/90.635(b)	PASS
2	Occupied Bandwidth	2.1049/ 90.209	PASS
3	Emission Masks	2.1051 / 90.691	PASS
4	Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 90.213	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 90.691	PASS
7	Radiates Spurious Emission	2.1053 /90.691	PASS
Date of Testing: September 3, 2019 ~ September 24, 2019			
Date of Sample Received: (R2208A0783): August 25, 2022			
Note: 1. PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. 2. All test values duplicated from the report (Report No.: R2208A0783-R4).			



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Compal Electronics, Inc.
Applicant address	No.581 & 581-1, Ruiguang Rd., Neihu District, Taipei, (114) Taiwan
Manufacturer	Compal Electronics, Inc.
Manufacturer address	No.581 & 581-1, Ruiguang Rd., Neihu District, Taipei, (114) Taiwan

### 2.2. General Information

EUT Description			
Model	EXC-N1		
IMEI	863879041726491		
Hardware Version	EXC-N1_MB_V1.01		
Software Version	EXC-N1_4.71.5_EQ101		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna. The Antenna used for testing in this report is the after-market accessory.		
Antenna Gain	1.8dBi		
Test Mode(s)	LTE Band 26;		
Test Modulation	QPSK 16QAM;		
LTE Category	4		
Maximum E.R.P.	LTE Band 26:	22.95dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V	Maximum: 4.2V	
Extreme Temperature	Lowest: -40°C	Highest: +85°C	
Testing Temperature	Lowest: -40°C	Highest: +90°C	
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	814 ~ 824	859 ~ 869
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 90S (2021)**

**FCC CFR47 Part 2 (2021)**

**Reference standard:**

**ANSI C63.26-2015**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 26

Test items	Bandwidth (MHz)					Modulation		RB			Test Channel		
	1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	-	-	O	-	O	-
Emission Mask	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	-	-	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	-	O	O	-	O	O	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.												



## 5. Test Case

### 5.1. RF Power Output and Effective Radiated Power

#### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

#### Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

#### Test Setup

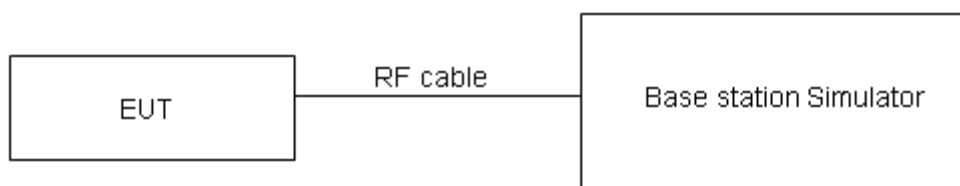

#### Limits

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

Rule Part 90.635(b) specifies that “The maximum output power of the transmitter for mobile stations is 100 watts”.

Limit	≤ 100 W (50 dBm)
-------	------------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB for RF power output,  $k = 2$ ,  $U = 1.19$  dB for ERP.

#### Test Results

Refer to the section 6.1 of this report for test data.

## 5.2. Occupied Bandwidth

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.


RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 26 (1.4MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 26 (3MHz/5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 26 (10MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

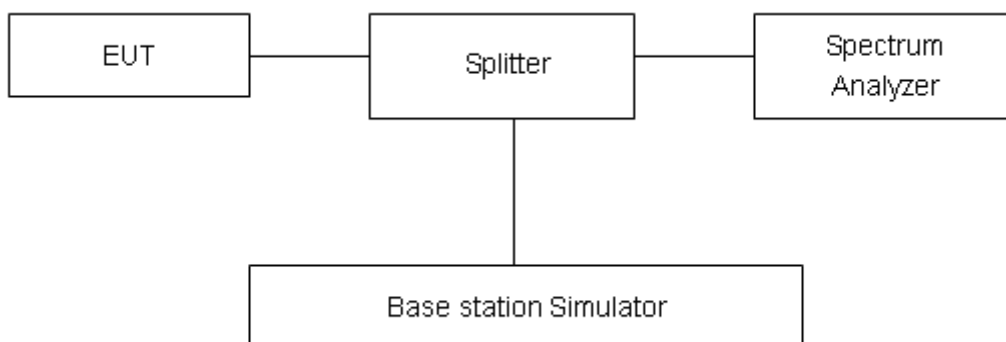

### Limits

No specific occupied bandwidth requirements in part 2.1049.

Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .

### Test Results

Refer to the section 6.2 of this report for test data.

### 5.3. Emission Mask

#### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 15kHz,VBW is set to 51kHz.

Spectrum analyzer plots are included on the following pages.

#### Test Setup

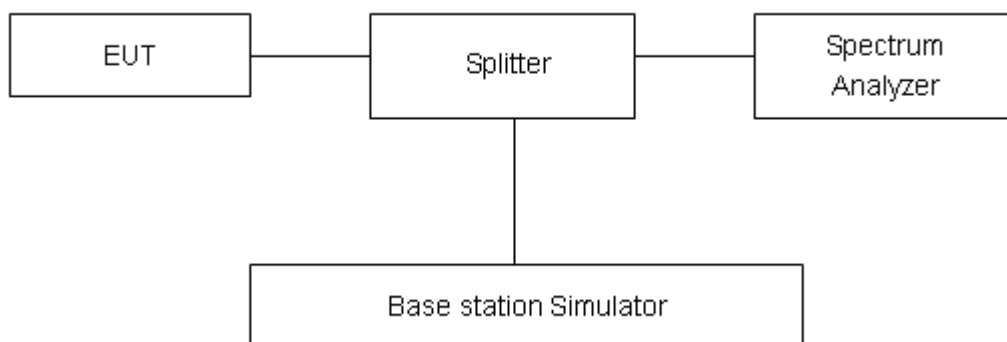

#### Limits

Rule Part 90.691(a) specifies that “ For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.”

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684\text{dB}$ .

#### Test Results

Refer to the section 6.3 of this report for test data.

## 5.4. Peak-to-Average Power Ratio (PAPR)

### Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$PAPR (dB) = PPk (dBm) - PAvg (dBm)$ .

### Test Setup

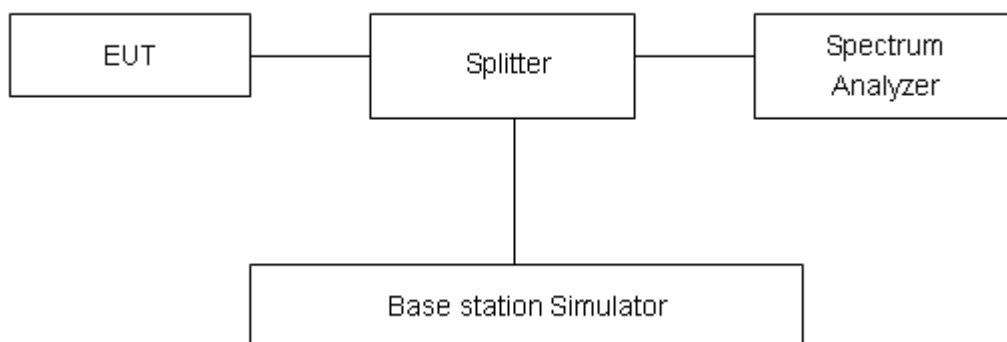

### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

### Test Results

Refer to the section 6.4 of this report for test data.

## 5.5. Frequency Stability

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


#### 2. Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

**Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.2 V, with a nominal voltage of 3.8V.

### Test setup

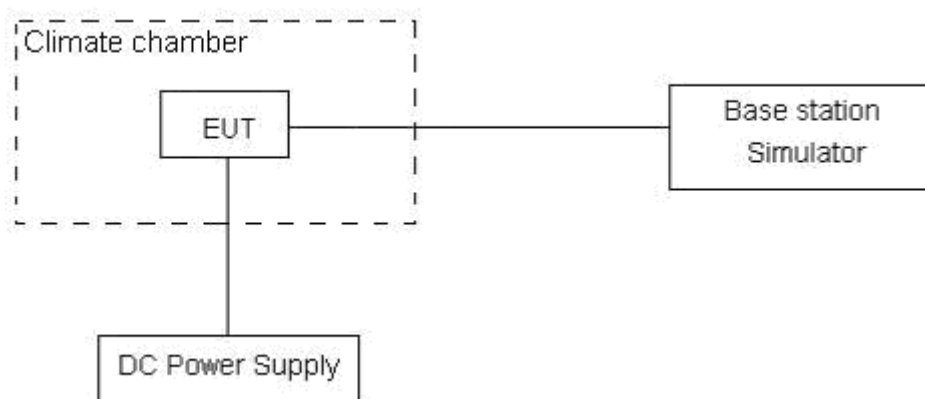

## Limits

According to the Sec. 90.213.(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Minimum Frequency Stability

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
814 ~ 824	1.5	2.5	2.5

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .

## Test Results

Refer to the section 6.5 of this report for test data.

## 5.6. Spurious Emissions at Antenna Terminals


### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

### Test setup

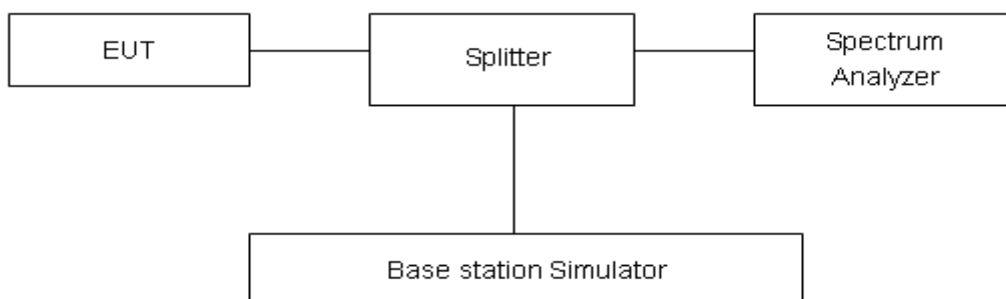

### Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-12.75GHz	1.407 dB

### Test Results

Refer to the section 6.6 of this report for test data.

## 5.7. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26-2015.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz,VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
  
The measurement results are amend as described below:  
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP




= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

## Test setup


### 9KHz~ 30MHz

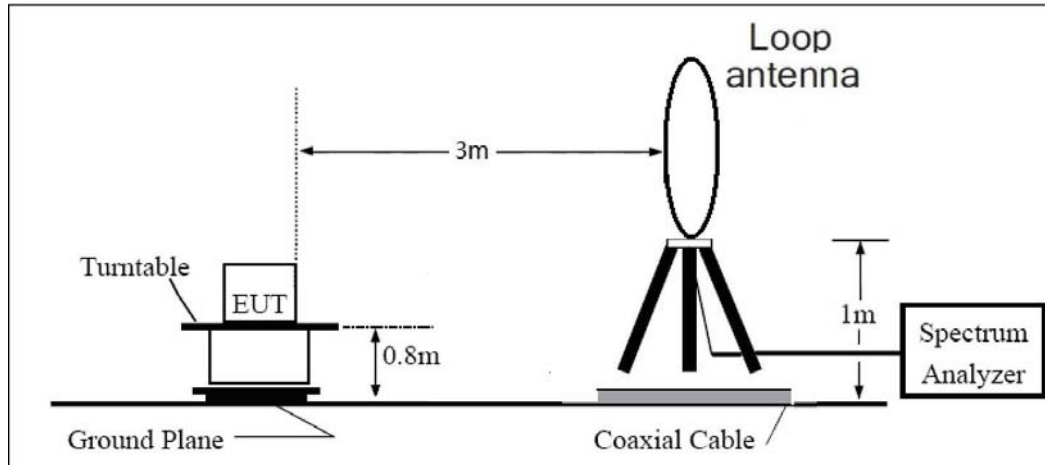

### 30MHz~ 1GHz

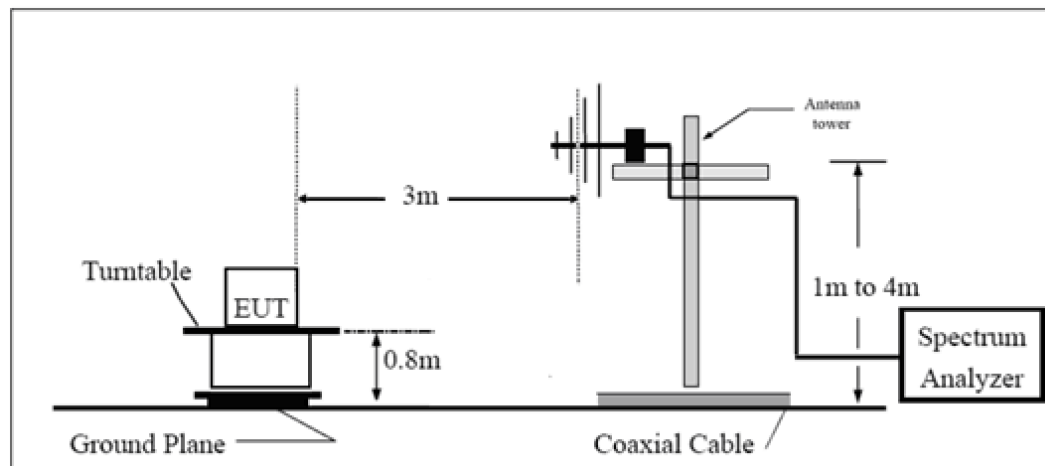

### Above 1GHz

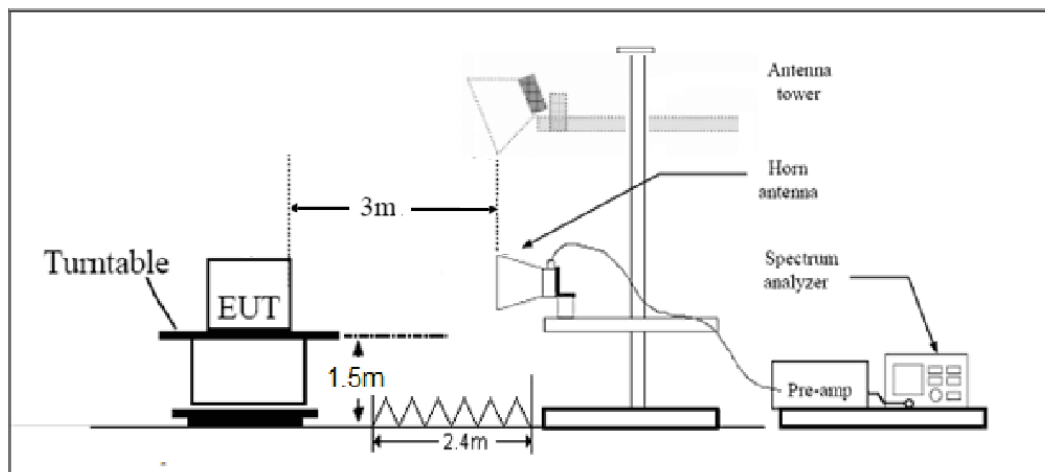

Note: Area side:2.4mX3.6m

## Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.”

Limit	-13 dBm
-------	---------

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

## Test Results

Refer to the section 6.7 of this report for test data.

## 6. Test Results

### 6.1. RF Power Output and Effective Radiated Power

LTE Band 26				Maximum Output Power(dBm)			ERP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				26697/8 14.7	26740/8 19	26783/8 23.3	26697/8 14.7	26740/8 19	26783/8 23.3
1.4MHz	QPSK	1	0	22.91	23.21	23.10	22.56	22.86	22.75
		1	2	23.00	23.19	23.02	22.65	22.84	22.67
		1	5	22.93	23.30	23.15	22.58	22.95	22.8
		3	0	22.16	22.10	22.21	21.81	21.75	21.86
		3	2	22.12	22.14	22.19	21.77	21.79	21.84
		3	3	22.12	22.30	22.18	21.77	21.95	21.83
		6	0	22.09	22.32	22.30	21.74	21.97	21.95
	16QAM	1	0	22.48	21.84	21.66	22.13	21.49	21.31
		1	2	22.62	21.90	21.71	22.27	21.55	21.36
		1	5	22.41	21.95	21.42	22.06	21.60	21.07
		3	0	21.14	21.20	21.24	20.79	20.85	20.89
		3	2	21.08	21.23	21.22	20.73	20.88	20.87
		3	3	21.01	21.46	21.17	20.66	21.11	20.82
		6	0	21.24	21.42	21.51	20.89	21.07	21.16
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				26705/8 15.5	26740/8 19	26775/8 22.5	26705/8 15.5	26740/8 19	26775/8 22.5
3MHz	QPSK	1	0	22.90	23.17	23.08	22.55	22.82	22.73
		1	7	22.98	23.18	22.99	22.63	22.83	22.64
		1	14	22.90	23.25	23.11	22.55	22.90	22.76
		8	0	22.14	22.06	22.18	21.79	21.71	21.83
		8	4	22.09	22.09	22.15	21.74	21.74	21.8
		8	7	22.09	22.27	22.14	21.74	21.92	21.79
		15	0	22.07	22.28	22.25	21.72	21.93	21.9
	16QAM	1	0	22.43	21.82	21.64	22.08	21.47	21.29
		1	7	22.60	21.87	21.69	22.25	21.52	21.34
		1	14	22.38	21.91	21.39	22.03	21.56	21.04
		8	0	21.11	21.18	21.21	20.76	20.83	20.86




		8	4	21.05	21.18	21.18	20.70	20.83	20.83
		8	7	20.99	21.42	21.14	20.64	21.07	20.79
		15	0	21.21	21.37	21.47	20.86	21.02	21.12
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				26715/8 16.5	26740/8 19	26765/8 22.5	26715/8 16.5	26740/8 19	26765/8 22.5
5MHz	QPSK	1	0	22.87	23.13	23.05	22.52	22.78	22.70
		1	13	22.97	23.14	22.97	22.62	22.79	22.62
		1	24	22.88	23.24	23.08	22.53	22.89	22.73
		12	0	22.11	22.01	22.14	21.76	21.66	21.79
		12	6	22.07	22.05	22.12	21.72	21.70	21.77
		12	13	22.06	22.22	22.10	21.71	21.87	21.75
		25	0	22.04	22.23	22.21	21.69	21.88	21.86
	16QAM	1	0	22.41	21.78	21.59	22.06	21.43	21.24
		1	13	22.56	21.85	21.65	22.21	21.50	21.3
		1	24	22.36	21.88	21.37	22.01	21.53	21.02
		12	0	21.08	21.14	21.18	20.73	20.79	20.83
		12	6	21.02	21.16	21.15	20.67	20.81	20.8
		12	13	20.96	21.37	21.10	20.61	21.02	20.75
		25	0	21.19	21.33	21.44	20.84	20.98	21.09
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				/	26740/8 19	/	/	26740/8 19	/
10MHz	QPSK	1	0	/	22.91	/	/	22.56	/
		1	25	/	23.20	/	/	22.85	/
		1	49	/	23.12	/	/	22.77	/
		25	0	/	21.82	/	/	21.47	/
		25	13	/	21.83	/	/	21.48	/
		25	25	/	21.84	/	/	21.49	/
		50	0	/	21.93	/	/	21.58	/
	16QAM	1	0	/	21.46	/	/	21.11	/
		1	25	/	21.35	/	/	21.00	/
		1	49	/	21.45	/	/	21.10	/
		25	0	/	21.10	/	/	20.75	/
		25	13	/	21.14	/	/	20.79	/
		25	25	/	21.21	/	/	20.86	/
		50	0	/	21.03	/	/	20.68	/

## 6.2. Occupied Bandwidth


LTE Band 26						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	26697	814.7	1.1227	1.349
			26740	819	1.1250	1.359
			26783	823.3	1.1263	1.336
		3	26705	815.5	2.7511	3.058
			26740	819	2.7382	3.063
			26775	822.5	2.7393	3.051
		5	26715	816.5	4.5044	4.969
			26740	819	4.5042	4.986
			26765	821.5	4.5113	5.040
		10	26740	819	8.9915	10.06
	16QAM	1.4	26697	814.7	1.1214	1.334
			26740	819	1.1212	1.332
			26783	823.3	1.1111	1.344
		3	26705	815.5	2.7386	3.056
			26740	819	2.7260	3.057
			26775	822.5	2.7409	3.065
		5	26715	816.5	4.522	4.990
			26740	819	4.5206	5.028
			26765	821.5	4.5002	4.981
		10	26740	819	8.9881	9.984




## LTE Band 26 QPSK 1.4MHz CH Low

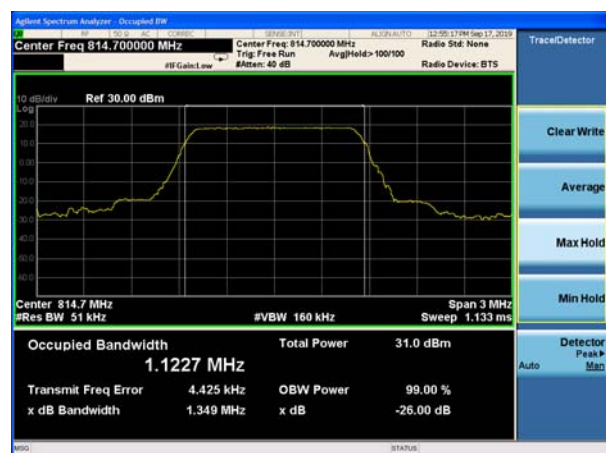


## LTE Band 26 QPSK 3MHz CH Low

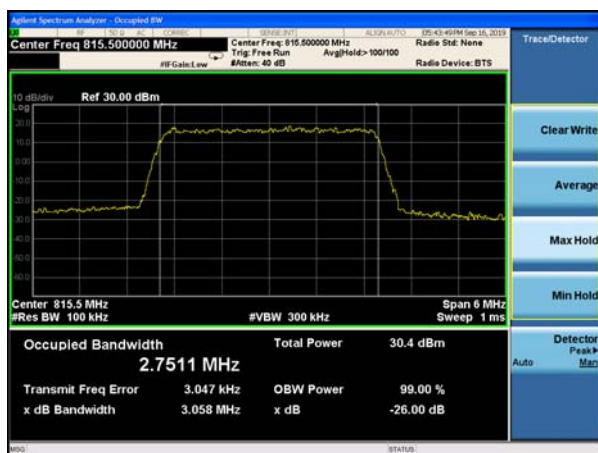


## LTE Band 26 QPSK 1.4MHz CH Middle

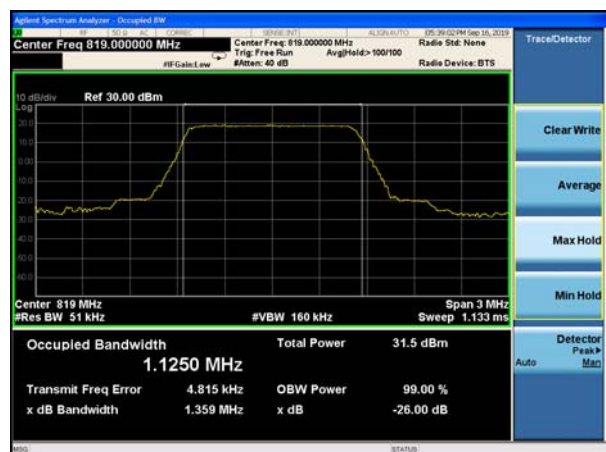


## LTE Band 26 QPSK 3MHz CH Middle

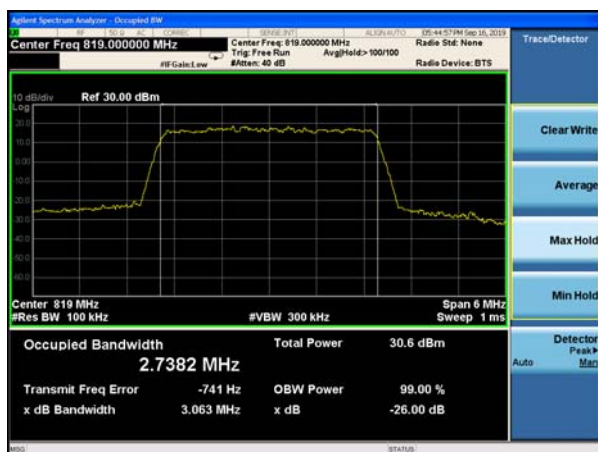


## LTE Band 26 QPSK 1.4MHz CH High

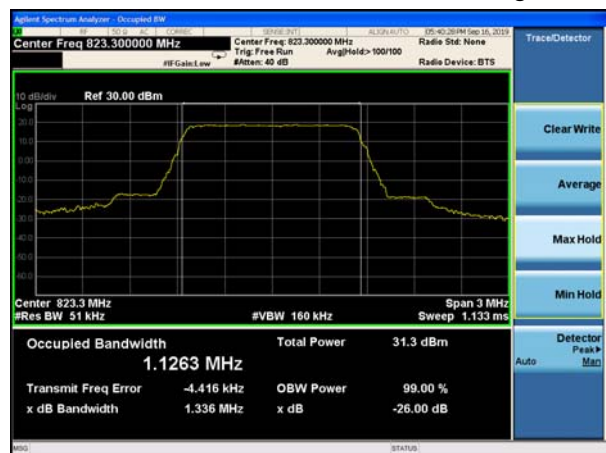


## LTE Band 26 QPSK 3MHz CH High

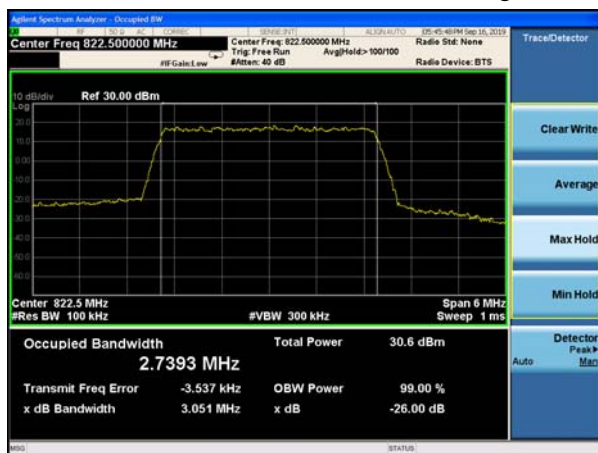

## LTE Band 26 QPSK 5MHz CH Middle

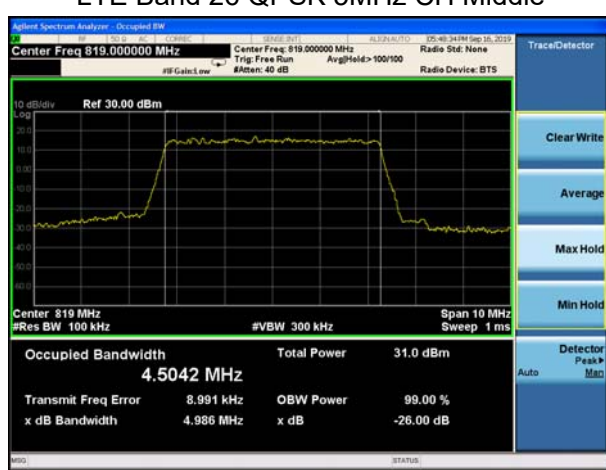


## LTE Band 26 QPSK 10MHz CH Middle

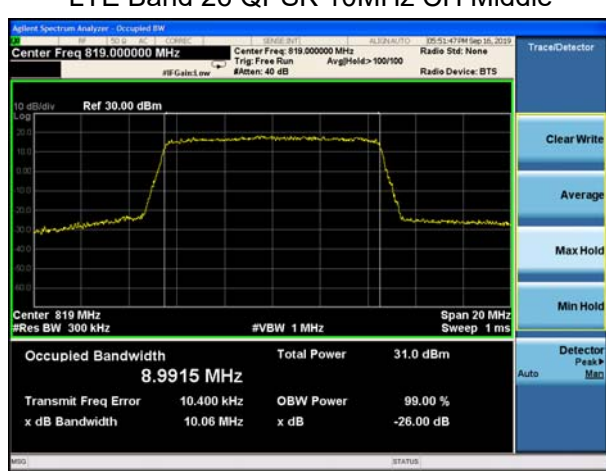







LTE Band 26 16QAM 1.4MHz CH Low

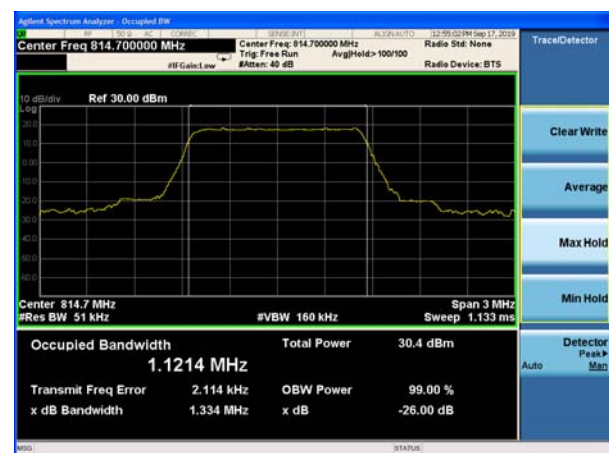


LTE Band 26 16QAM 3MHz CH Low

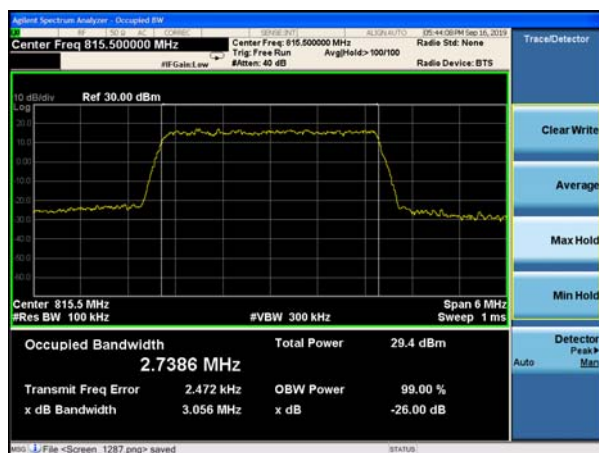


LTE Band 26 16QAM 1.4MHz CH Middle

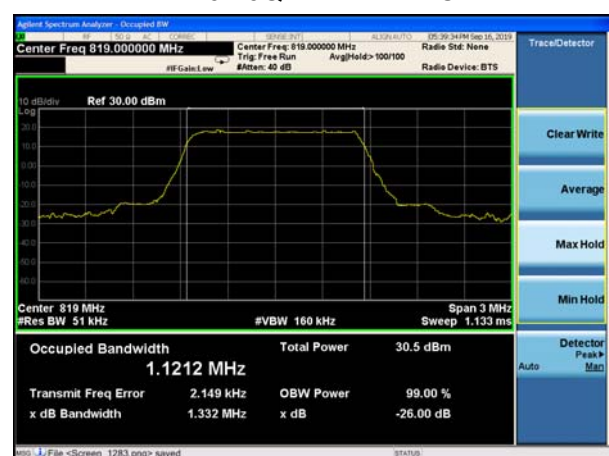


LTE Band 26 16QAM 3MHz CH Middle

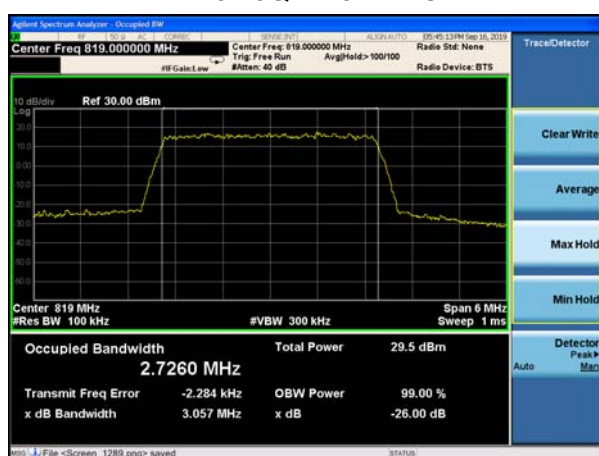

LTE Band 26 16QAM 1.4MHz CH High

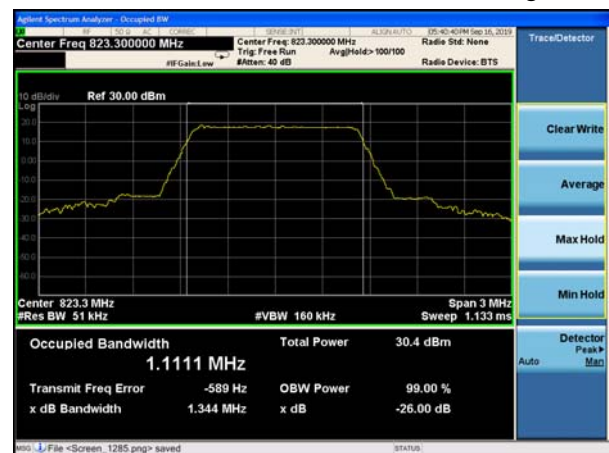


LTE Band 26 16QAM 3MHz CH High

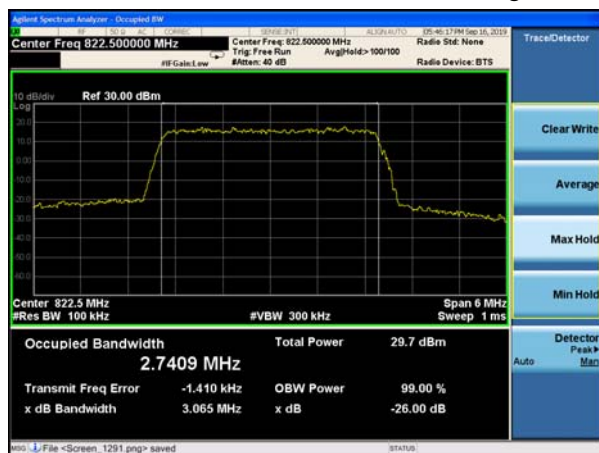




LTE Band 26 16QAM 5MHz CH Middle

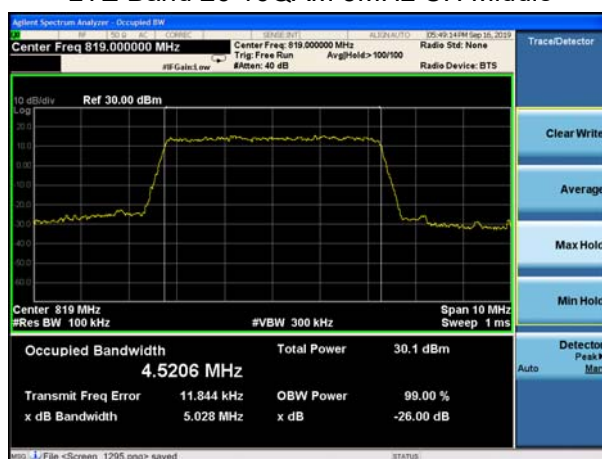


## LTE Band 26 16QAM 10MHz CH Middle

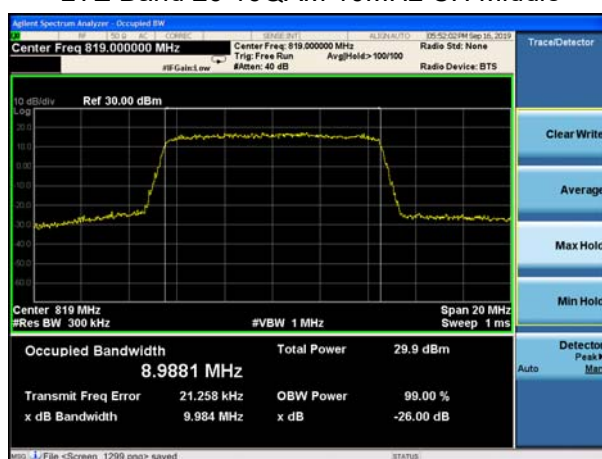

### 6.3. Emission Mask


LTE Band 26 QPSK 1.4MHz CH-Low 1RB

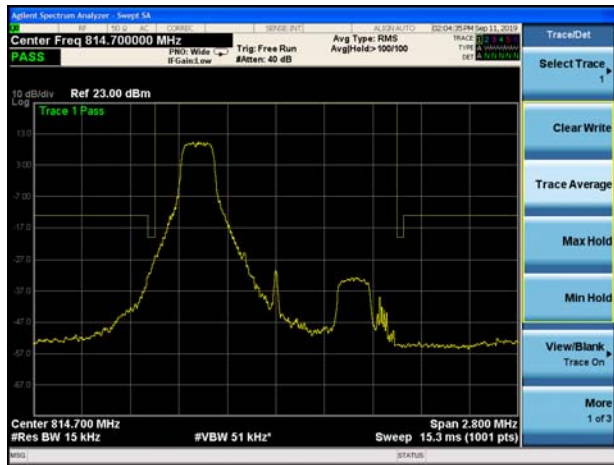


LTE Band 26 QPSK 1.4MHz CH-High 1RB




LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

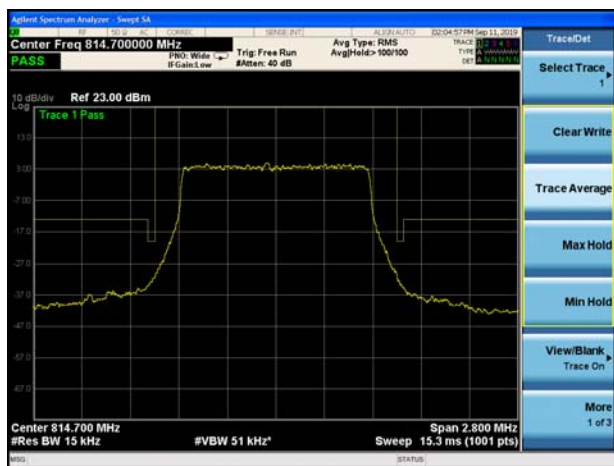


LTE Band 26 QPSK 1.4MHz CH-High 100%RB

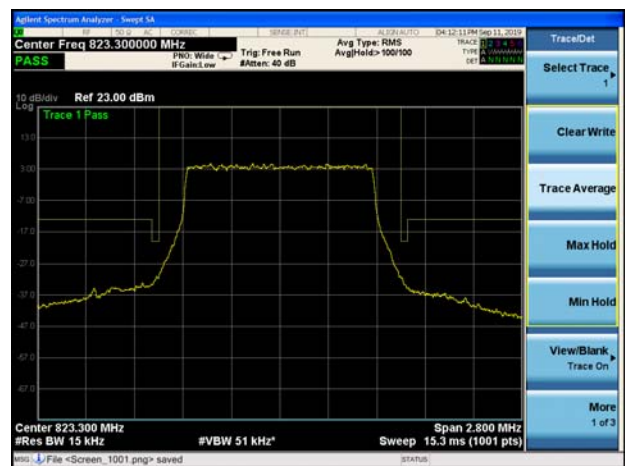

LTE Band 26 QPSK 3MHz CH-Low 1RB

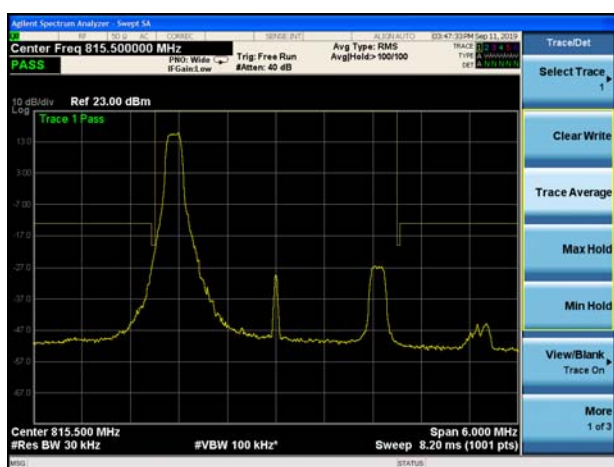


LTE Band 26 QPSK 3MHz CH-High 1RB

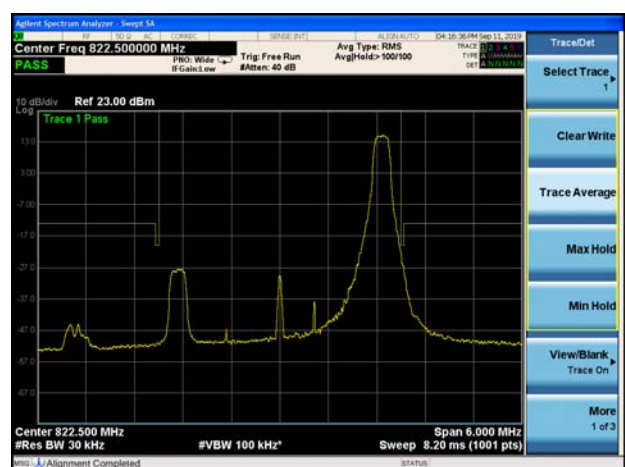




LTE Band 26 QPSK 3MHz CH-Low 100%RB

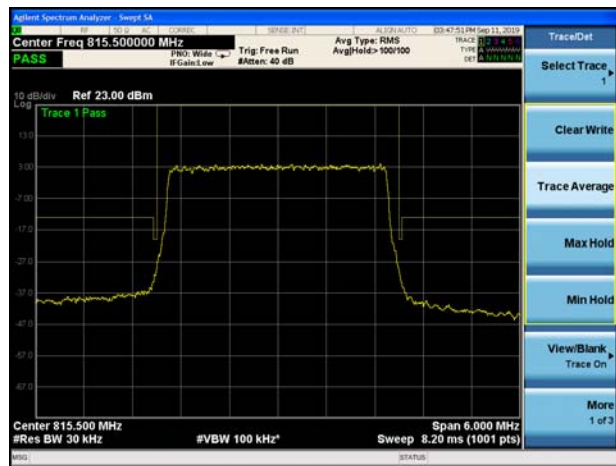


LTE Band 26 QPSK 3MHz CH-High 100%RB




LTE Band 26 QPSK 5MHz CH-Low 1RB

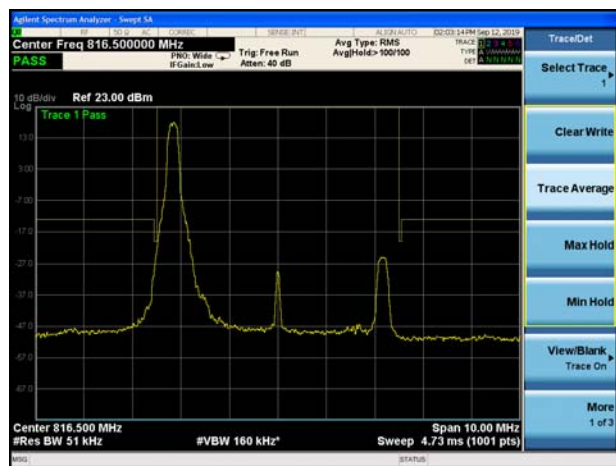

LTE Band 26 QPSK 5MHz CH-High 1RB

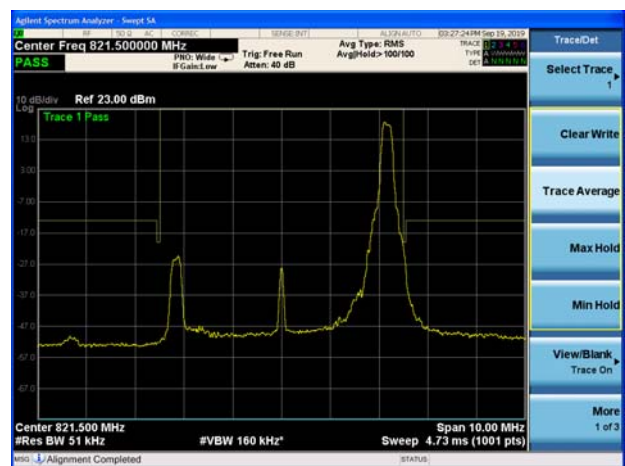

LTE Band 26 QPSK 5MHz CH-Low 100%RB

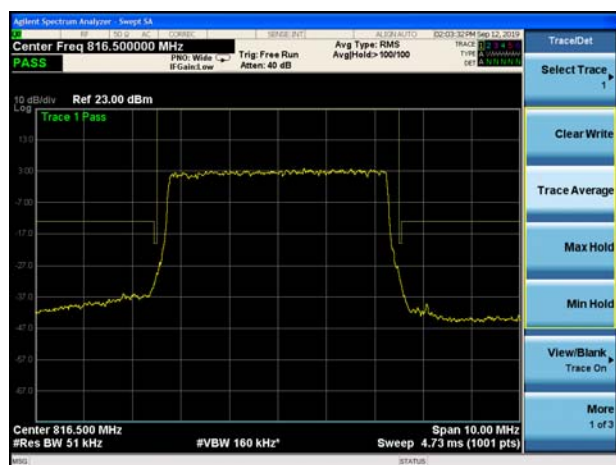


LTE Band 26 QPSK 5MHz CH-High 100%RB






## LTE Band 26 QPSK 10MHz CH-Low 1RB

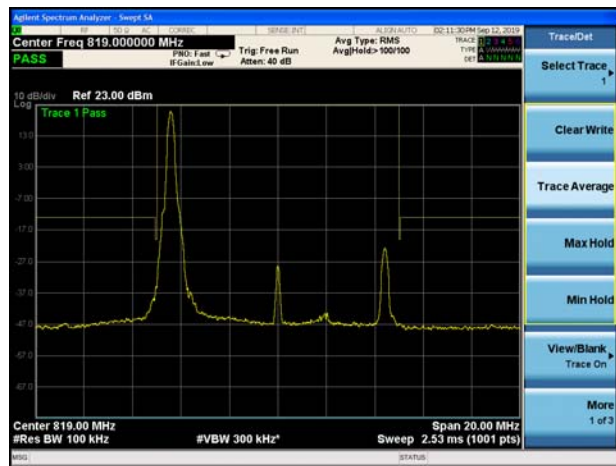

## LTE Band 26 QPSK 10MHz CH-High 1RB

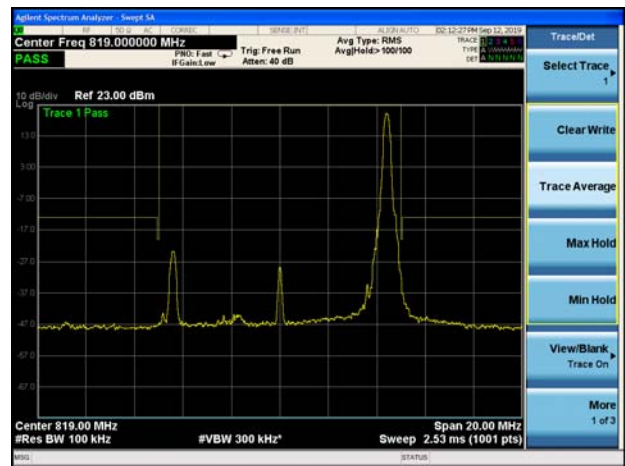


## LTE Band 26 QPSK 10MHz CH-Low 100%RB




## LTE Band 26 QPSK 10MHz CH-High 100%RB



## LTE Band 26 16QAM 1.4MHz CH-Low 1RB

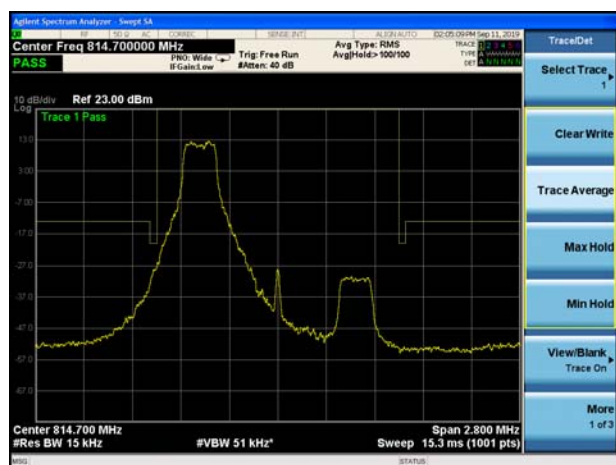

## LTE Band 26 16QAM 1.4MHz CH-High 1RB

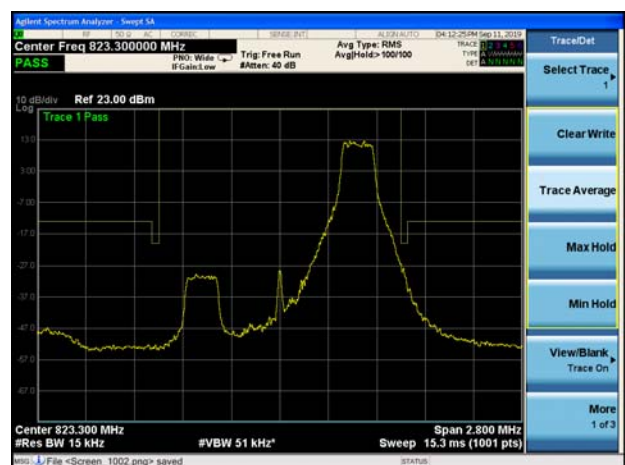







LTE Band 26 16QAM 1.4MHz CH-Low 100%RB




LTE Band 26 16QAM 1.4MHz CH-High 100%RB

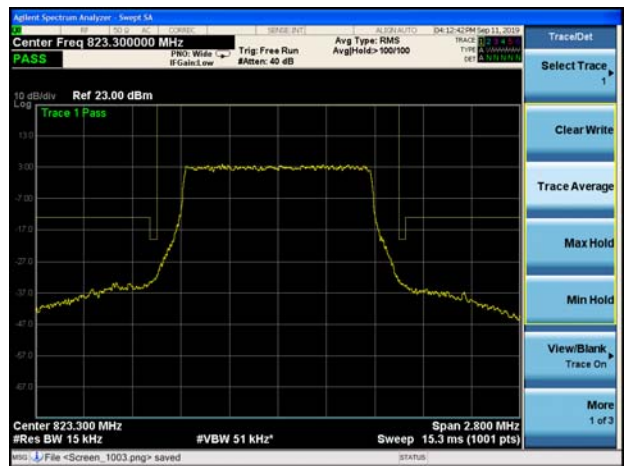

LTE Band 26 16QAM 3MHz CH-Low 1RB

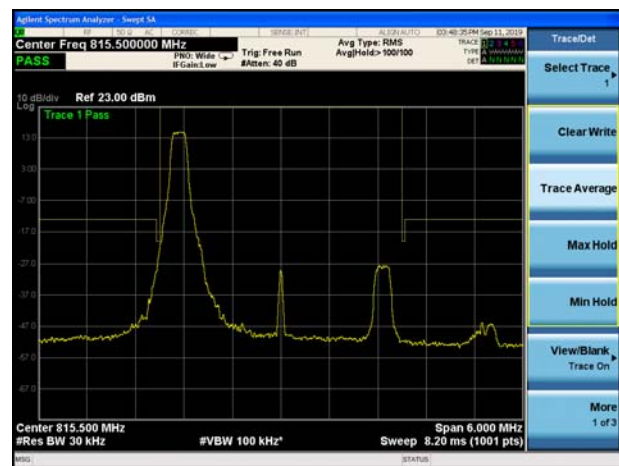


LTE Band 26 16QAM 3MHz CH-High 1RB

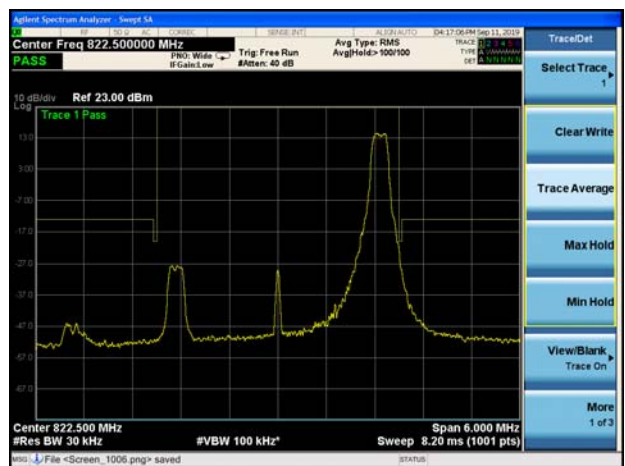

LTE Band 26 16QAM 3MHz CH-Low 100%RB




LTE Band 26 16QAM 3MHz CH-High 100%RB

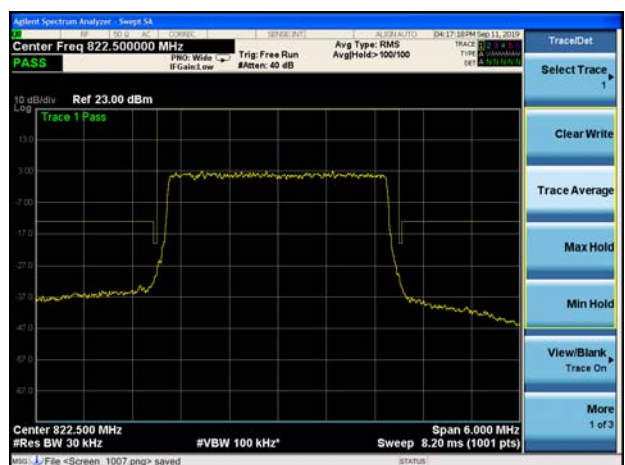




LTE Band 26 16QAM 5MHz CH-Low 1RB

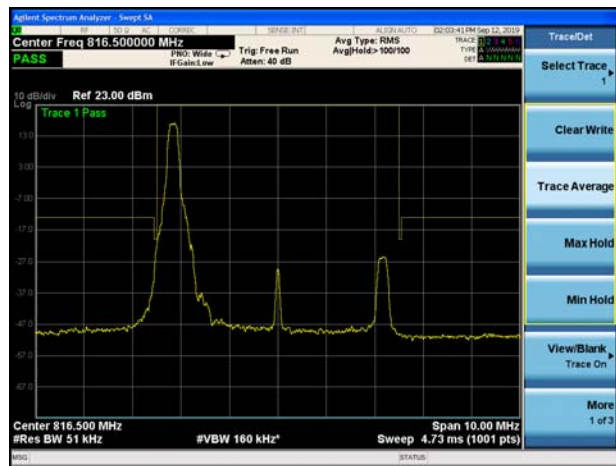

LTE Band 26 16QAM 5MHz CH-High 1RB

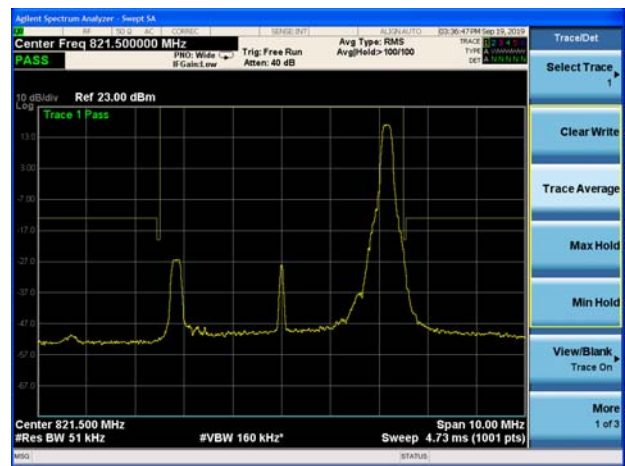


LTE Band 26 16QAM 5MHz CH-Low 100%RB




LTE Band 26 16QAM 5MHz CH-High 100%RB



LTE Band 26 16QAM 10MHz CH-Low 1RB

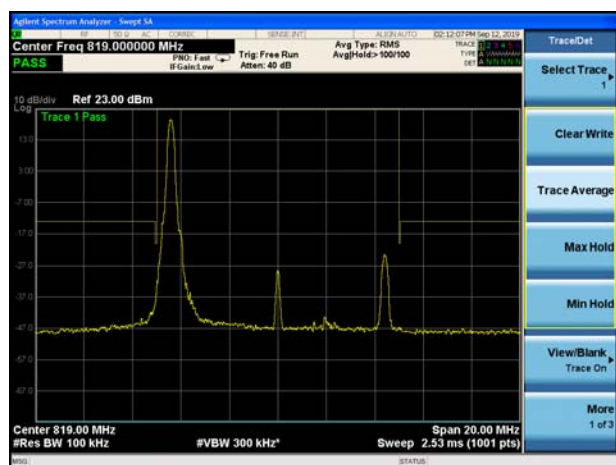

LTE Band 26 16QAM 10MHz CH-High 1RB

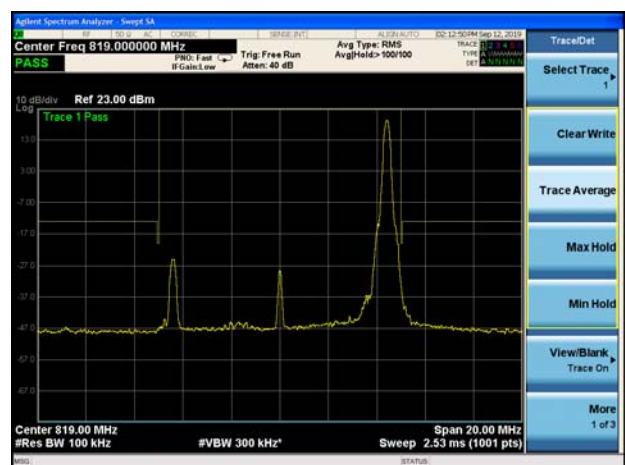



## LTE Band 26 16QAM 10MHz CH-Low 100%RB



## LTE Band 26 16QAM 10MHz CH-High 100%RB



**6.4. Peak-to-Average Power Ratio (PAPR)**

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
<b>1.4 MHz (QPSK)</b>	26697	814.7	27.33	23.07	4.26	13	PASS
	26740	819	27.10	22.74	4.36	13	PASS
	26783	823.3	27.38	22.79	4.59	13	PASS
<b>3 MHz (QPSK)</b>	26697	814.7	27.29	22.96	4.33	13	PASS
	26740	819	27.13	22.88	4.25	13	PASS
	26783	823.3	27.40	22.86	4.54	13	PASS
<b>5 MHz (QPSK)</b>	26697	814.7	27.25	22.94	4.31	13	PASS
	26740	819	27.06	22.90	4.16	13	PASS
	26783	823.3	27.28	22.92	4.36	13	PASS
<b>10 MHz (QPSK)</b>	26740	819	27.51	23.34	4.17	13	PASS

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
<b>1.4 MHz (16QAM)</b>	26697	814.7	27.38	22.20	5.18	13	PASS
	26740	819	27.33	22.67	4.66	13	PASS
	26783	823.3	27.45	21.99	5.46	13	PASS
<b>3 MHz (16QAM)</b>	26697	814.7	27.05	21.78	5.27	13	PASS
	26740	819	27.38	22.37	5.01	13	PASS
	26783	823.3	27.17	21.70	5.47	13	PASS
<b>5 MHz (16QAM)</b>	26697	814.7	27.06	21.76	5.30	13	PASS
	26740	819	27.08	22.13	4.95	13	PASS
	26783	823.3	27.25	22.14	5.11	13	PASS
<b>10 MHz (16QAM)</b>	26740	819	27.24	22.98	4.26	13	PASS




## 6.5. Frequency Stability

LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	13.81	15.98	0.00735	0.00850	PASS
Extreme (90℃)		7.73	7.09	0.00411	0.00377	PASS
Extreme (80℃)		17.36	14.10	0.00924	0.00750	PASS
Extreme (70℃)		2.17	14.46	0.00115	0.00769	PASS
Extreme (60℃)		9.13	17.60	0.00486	0.00936	PASS
Extreme (50℃)		16.41	1.34	0.00873	0.00072	PASS
Extreme (40℃)		9.59	13.31	0.00510	0.00708	PASS
Extreme (30℃)		12.45	13.92	0.00662	0.00741	PASS
Extreme (20℃)		1.31	6.88	0.00070	0.00366	PASS
Extreme (10℃)		12.33	14.25	0.00656	0.00758	PASS
Extreme (0℃)		14.78	9.31	0.00786	0.00495	PASS
Extreme (-10℃)		2.59	8.54	0.00138	0.00455	PASS
Extreme (-20℃)		17.83	10.92	0.00948	0.00581	PASS
Extreme (-30℃)		8.77	7.85	0.00466	0.00417	PASS
Extreme (-40℃)		3.83	12.40	0.00204	0.00660	PASS
25℃	LV	5.21	16.59	0.00277	0.00882	PASS
	HV	4.99	5.09	0.00266	0.00271	PASS

## 6.6. Spurious Emissions at Antenna Terminals


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.  
The signal beyond the limit is carrier.

LTE Band 26 1.4MHz CH Low 30MHz~1GHz

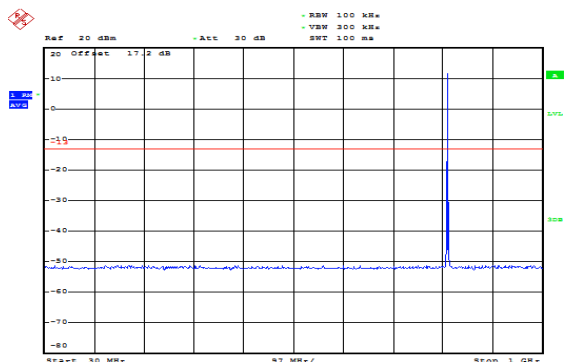


Date: 9.SEP.2019 21:07:58

LTE Band 26 1.4MHz CH Low 1GHz~9GHz

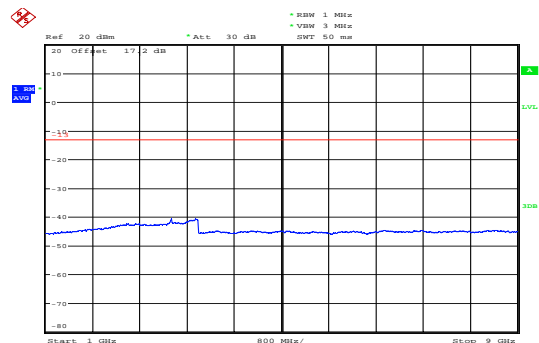


Date: 12.SEP.2019 11:35:36

LTE Band 26 1.4MHz CH Middle 30MHz~1GHz

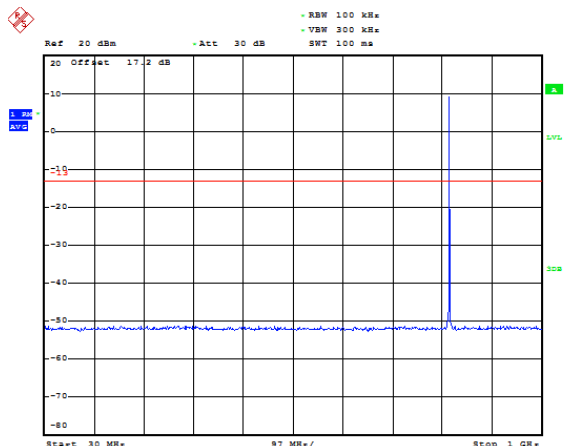


Date: 9.SEP.2019 21:08:17

LTE Band 26 1.4MHz CH Middle 1GHz~9GHz

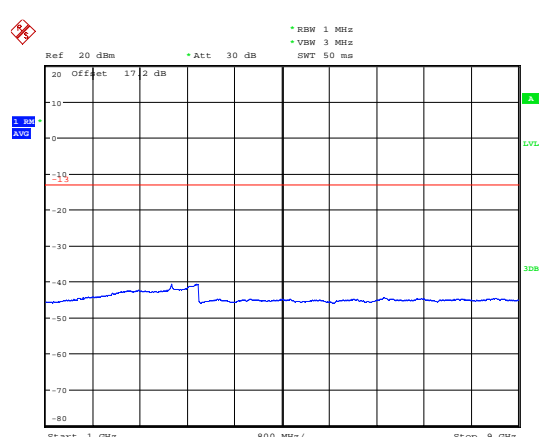


Date: 12.SEP.2019 11:35:49

LTE Band 26 1.4MHz CH High 30MHz~1GHz

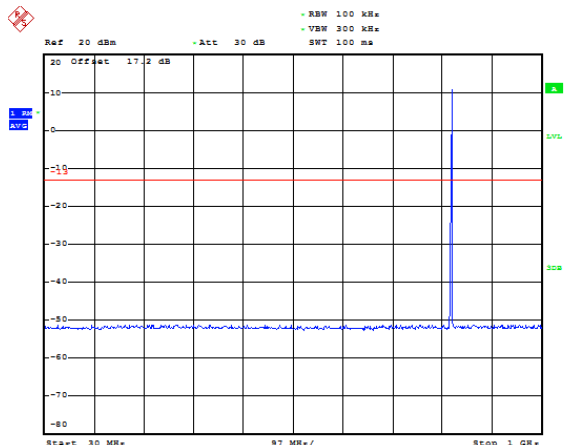

Date: 9.SEP.2019 21:08:36


LTE Band 26 1.4MHz CH High 1GHz~9GHz

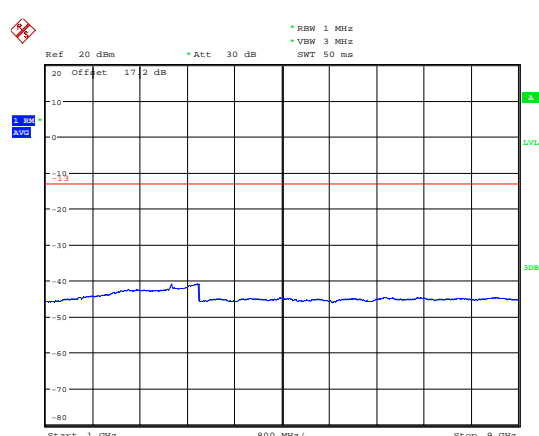

Date: 12.SEP.2019 11:36:13




## LTE Band 26 3MHz CH Low 30MHz~1GHz

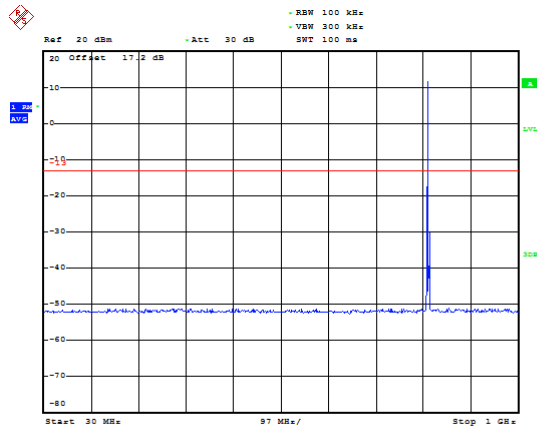


Date: 9.SEP.2019 21:08:57

## LTE Band 26 3MHz CH Low 1GHz~9GHz

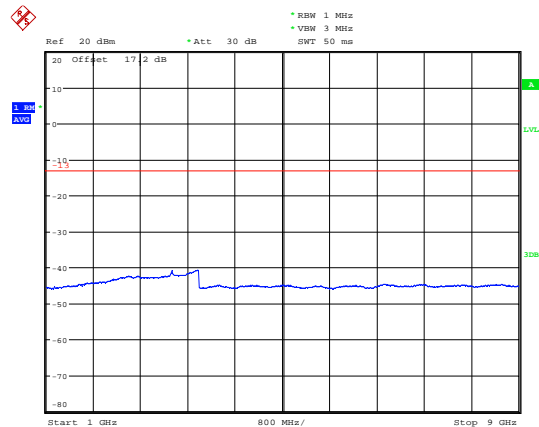


Date: 12.SEP.2019 11:36:31

## LTE Band 26 3MHz CH Middle 30MHz~1GHz

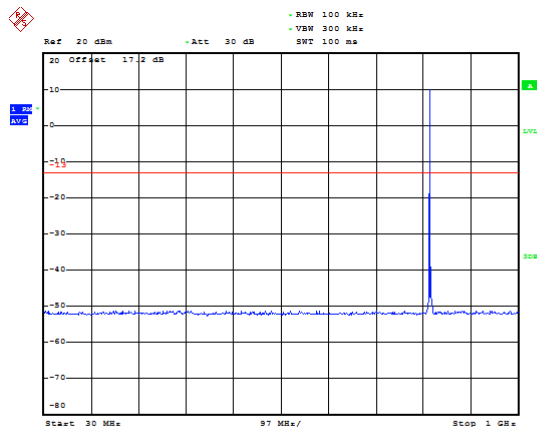


Date: 9.SEP.2019 21:09:14

## LTE Band 26 3MHz CH Middle 1GHz~9GHz

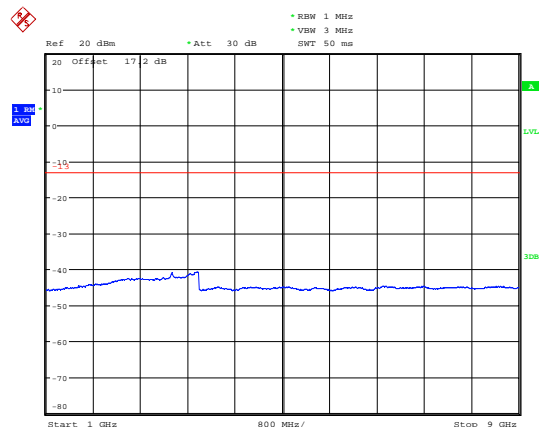


Date: 12.SEP.2019 11:36:48

## LTE Band 26 3MHz CH High 30MHz~1GHz

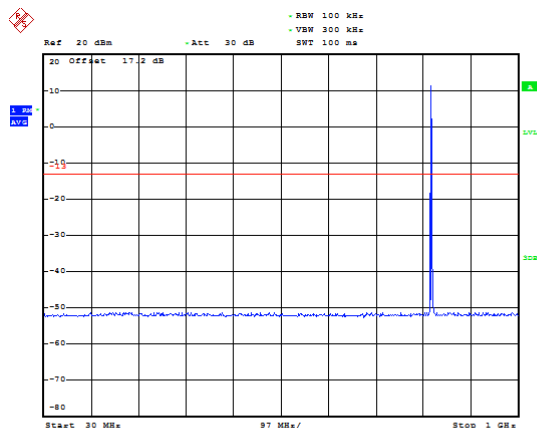

Date: 9.SEP.2019 21:09:27


## LTE Band 26 3MHz CH High 1GHz~9GHz

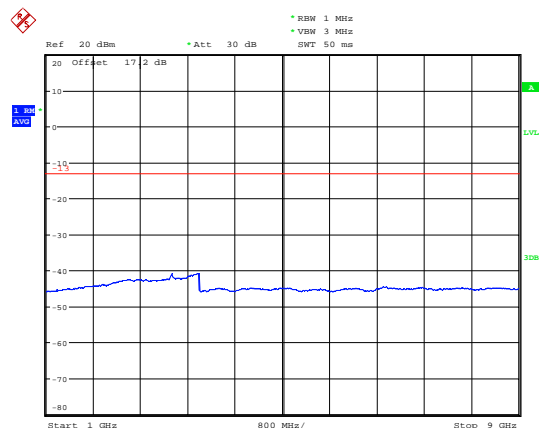

Date: 12.SEP.2019 11:37:26




## LTE Band 26 5MHz CH Low 30MHz~1GHz

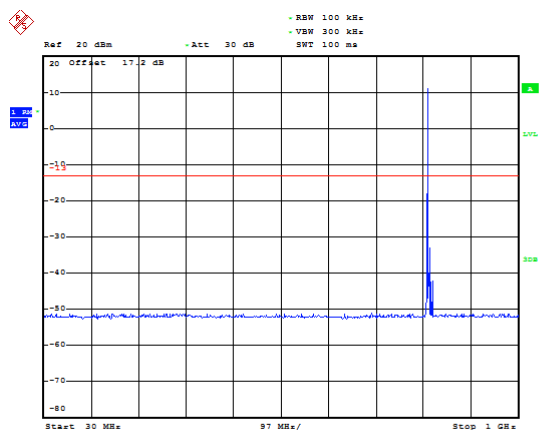


Date: 9.SEP.2019 21:09:46

## LTE Band 26 5MHz CH Low 1GHz~9GHz

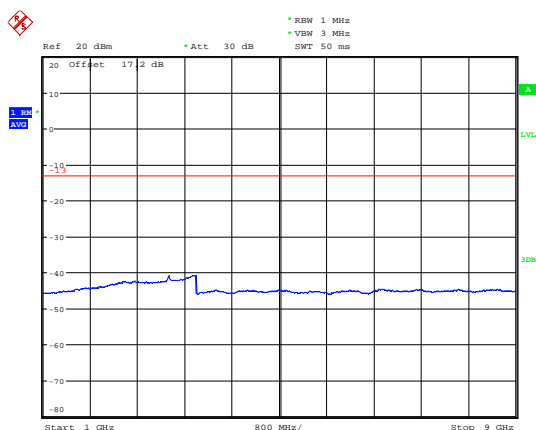


Date: 12.SEP.2019 11:37:56

## LTE Band 26 5MHz CH Middle 30MHz~1GHz

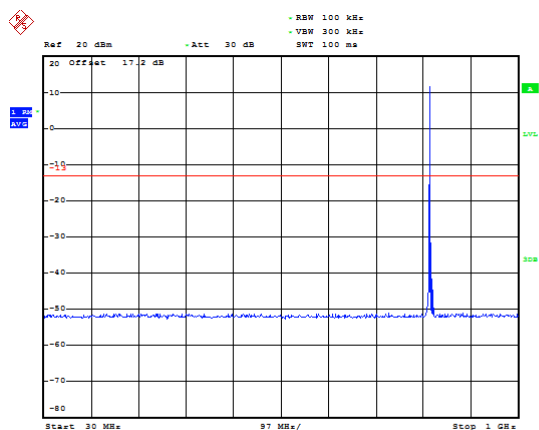


Date: 9.SEP.2019 21:10:00

## LTE Band 26 5MHz CH Middle 1GHz~9GHz

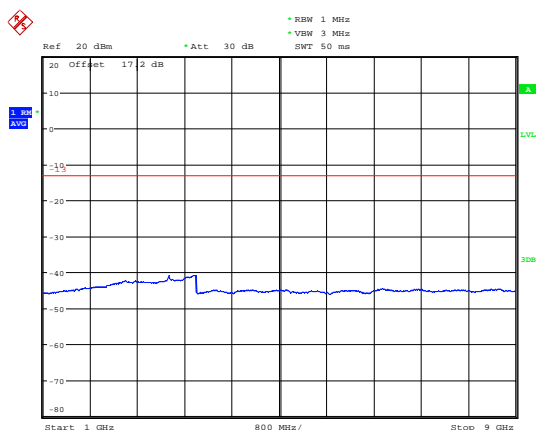


Date: 12.SEP.2019 11:38:22

## LTE Band 26 5MHz CH High 30MHz~1GHz

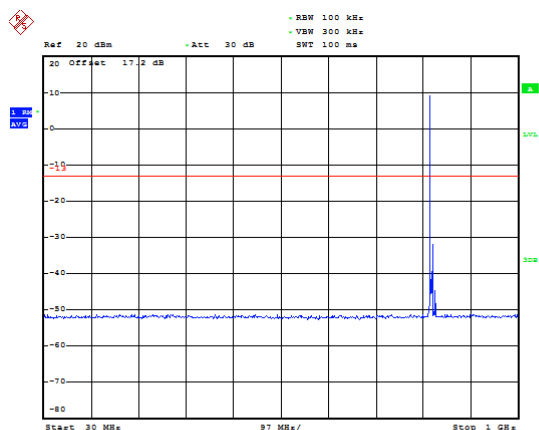

Date: 9.SEP.2019 21:10:28


## LTE Band 26 5MHz CH High 1GHz~9GHz

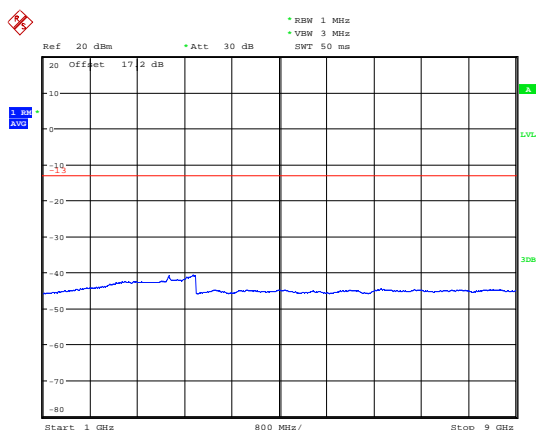

Date: 12.SEP.2019 11:38:50




## LTE Band 26 10MHz CH Middle 30MHz~1GHz

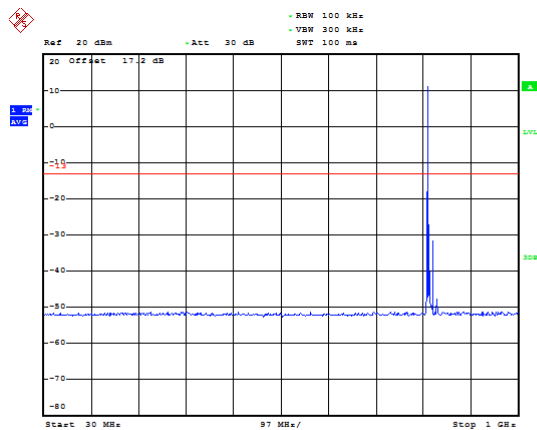

Date: 9.SEP.2019 21:10:42

## LTE Band 26 10MHz CH Middle 1GHz~9GHz

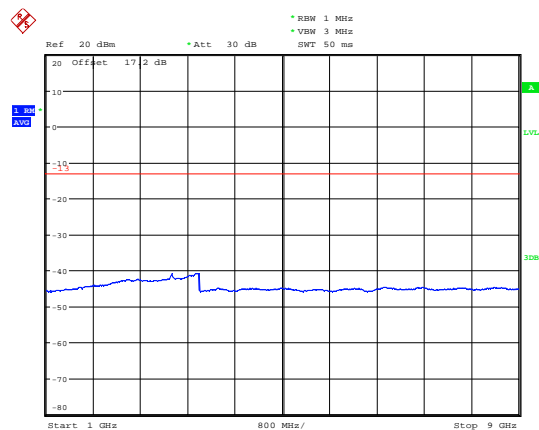

Date: 12.SEP.2019 11:39:02

## 6.7. Radiates Spurious Emission

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-69.65	2.00	10.75	vertical	-60.90	-13.00	47.90	315
3	2457.0	-66.93	2.51	11.05	vertical	-58.39	-13.00	45.39	225
4	3346.0	-66.01	4.20	11.15	vertical	-59.06	-13.00	46.06	45
5	4182.5	-63.44	5.20	11.15	vertical	-57.49	-13.00	44.49	225
6	5019.0	-62.30	5.50	11.95	vertical	-55.85	-13.00	42.85	135
7	5855.5	-62.96	5.70	13.55	vertical	-55.11	-13.00	42.11	180
8	6692.0	-61.48	6.30	13.75	vertical	-54.03	-13.00	41.03	45
9	7528.5	-58.56	6.80	13.85	vertical	-51.51	-13.00	38.51	135
10	8365.0	-57.06	6.90	14.25	vertical	-49.71	-13.00	36.71	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-68.85	2.00	10.75	vertical	-60.10	-13.00	47.10	45
3	2457.0	-64.16	2.51	11.05	vertical	-55.62	-13.00	42.62	225
4	3276.0	-66.18	4.20	11.15	vertical	-59.23	-13.00	46.23	90
5	4095.0	-64.28	5.20	11.15	vertical	-58.33	-13.00	45.33	135
6	4914.0	-63.81	5.50	11.95	vertical	-57.36	-13.00	44.36	45
7	5733.0	-63.85	5.70	13.55	vertical	-56.00	-13.00	43.00	135
8	6552.0	-62.32	6.30	13.75	vertical	-54.87	-13.00	41.87	90
9	7371.0	-57.44	6.80	13.85	vertical	-50.39	-13.00	37.39	180
10	8190.0	-57.28	6.90	14.25	vertical	-49.93	-13.00	36.93	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-68.59	2.00	10.75	vertical	-59.84	-13.00	46.84	90
3	2457.0	-65.81	2.51	11.05	vertical	-57.27	-13.00	44.27	135
4	3276.0	-65.80	4.20	11.15	vertical	-58.85	-13.00	45.85	270
5	4095.0	-64.35	5.20	11.15	vertical	-58.40	-13.00	45.40	315
6	4914.0	-63.83	5.50	11.95	vertical	-57.38	-13.00	44.38	45
7	5733.0	-63.36	5.70	13.55	vertical	-55.51	-13.00	42.51	0
8	6552.0	-61.84	6.30	13.75	vertical	-54.39	-13.00	41.39	225
9	7371.0	-57.64	6.80	13.85	vertical	-50.59	-13.00	37.59	315
10	8190.0	-58.20	6.90	14.25	vertical	-50.85	-13.00	37.85	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



## 7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Agilent	N9010A	MY50210259	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Signal generator	R&S	SMF 100A	102235	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-09-13
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*





## **ANNEX A: The EUT Appearance and Change declaration letter**

The EUT Appearance and Change declaration letter are submitted separately.



## **ANNEX B: Test Setup Photos**

The Test Setup Photos is submitted separately.