

TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-390, Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0022

Page (1) of (21)

KCTL

1. Client

- Name : Suprema Inc.
- Address : 16F Parkview Office Tower, Jeongja-dong,
Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea
- Date of Receipt : 2016-09-19

2. Use of Report : -

3. Name of Product and Model : BioEntry W2 / BEW2-OAP



4. Manufacturer and Country of Origin : Suprema Inc. / Korea

FCC ID: : TKWBEW2-OAP

5. Date of Test : 2016-09-27 ~ 2016-09-29

6. Test method used : FCC Part 15 Subpart C 15.225

7. Test Results : Refer to the test result in the test report

Affirmation	Tested by			Technical Manager		
	Name : Dowon Ahn	(Signature)		Name : Mingi Son	(Signature)	

2016-10-07

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.


[Contents]

1. Client information	4
2. Laboratory information	5
3. Description of E.U.T.....	6
3.1 Basic description	6
3.2 General description	6
3.3 Test frequency	6
4. Summary of test results.....	7
4.1 Standards & results	7
4.2 Uncertainty	7
5. Test results	8
5.1 Antenna Requirement	8
5.2 In-band Fundamental Emission	9
5.3 In-band Spurious Emission	11
5.4 Out-of-band Spurious Emission	13
5.5 Frequency tolerance.....	17
5.6 Conducted Emission	19
6. Test equipment used for test.....	21

REPORT REVISION HISTORY

Date	Revision	Page No
2016-10-07	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR16-SRF0022 Page (4) of (21)	
--	---	---

1. Client information

Applicant: Suprema Inc.
Address: 16F Parkview Office Tower, Jeongja-dong, Bundang-gu,
 Seongnam, Gyeonggi, 463-863 Korea
Telephone number: +82-31-710-5669
Facsimile number: +82-31-783-4516
Contact person: Dong Mok Shin / swyoon@suprema.co.kr

Manufacturer: Suprema Inc.
Address: 16F Parkview Office Tower, Jeongja-dong, Bundang-gu,
 Seongnam, Gyeonggi, 463-863 Korea

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-390, Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0022

Page (5) of (21)

KCTL

2. Laboratory information

Address

KCTL Inc.

65 Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea
Telephone Number: 82-70-5008-1016 Facsimile Number: 82-505-299-8311

Certificate

KOLAS No.: KT231


FCC Site Designation No.: KR0040

FCC Site Registration No.: 687132

VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849

IC Site Registration No.:8035A-2

SITE MAP

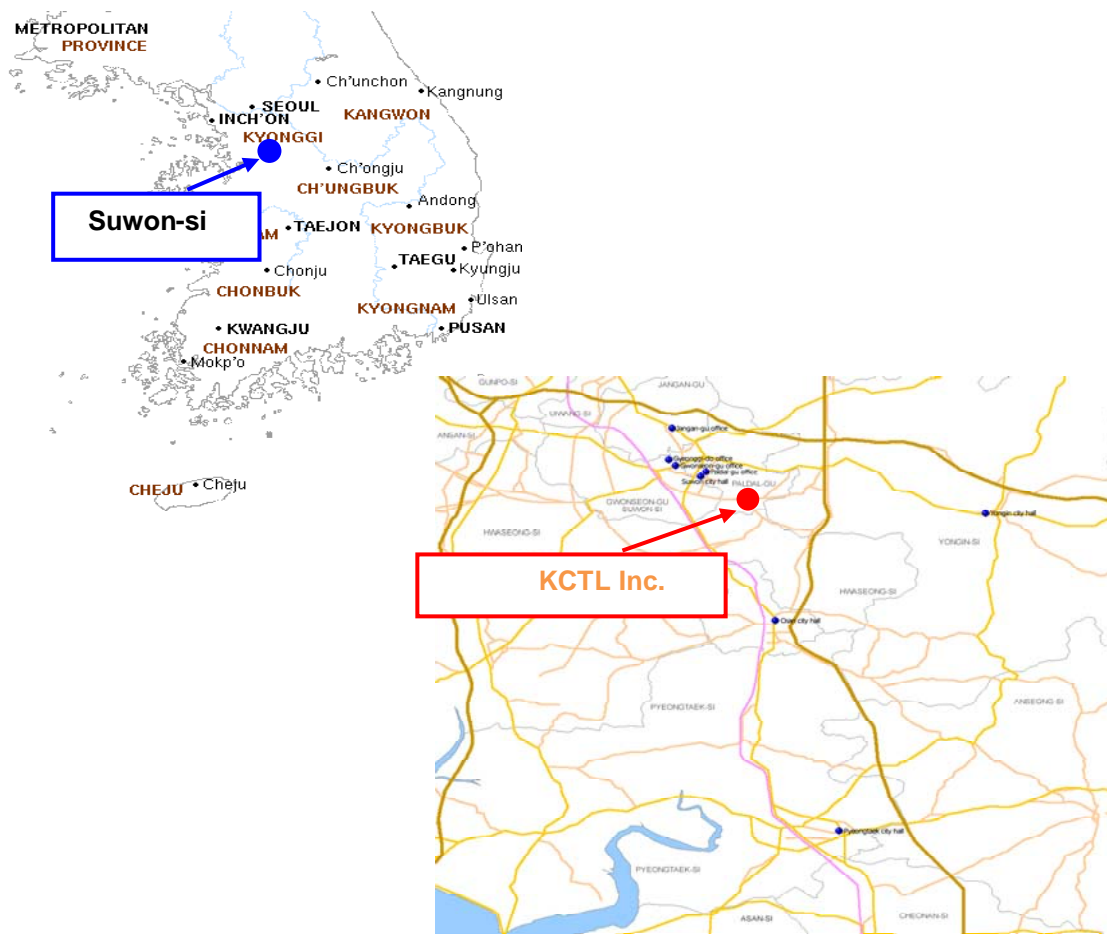

3. Description of E.U.T.

3.1 Basic description

Applicant:	Suprema Inc.
Address of Applicant	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea
Manufacturer	Suprema Inc.
Address of Manufacturer	16F Parkview Office Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea
Type of equipment	BioEntry W2
Basic Model	BEW2-OAP
Variant Model	BEW2-ODP, BEW2-OHP
Serial number	N/A

3.2 General description

Operating Frequency	13.560 MHz
Frequency Range	13.560 MHz (13.56 MHz RFID), 131 kHz (EM/HID Proxy)
Type of Modulation	ASK (13.56 MHz RFID), AM (EM/HID Proxy)
Number of Channels	1 ch (13.56 MHz RFID), 1 ch (EM/HID Proxy)
Type of Antenna	PCB Loop Antenna (RFID), Coil Antenna (EM/HID Proxy)
Power supply	DC 12.0 V , DC 48.0 V (PoE)
Operation temperature	-20 °C ~ 50 °C
Product SW/HW version	V1.0 / V01
Radio SW/HW version	V1.0 / V01
Test SW Version	N/A

Note : The above EUT information was declared by the manufacturer.

3.3 Test frequency

Frequency	13.560 MHz
-----------	------------

4. Summary of test results

4.1 Standards & results

Rule Reference	Parameter	Status
15.203	Antenna Requirement	C
15.225 (a)	In-band Fundamental Emission	C
15.225 (b)	In-band Spurious Emission	C
15.225 (c)	In-band Spurious Emission	C
15.225 (d) 15.209	Out-of-band Spurious Emission	C
15.225 (e)	Frequency Stability Tolerance	C
15.207	Conducted Emissions	C
Note 1: C=complies NC= Not complies NT=Not tested NA=Not Applicable Note 2: The worst case is Y scheme(Please refer to the "Test setup photos" to check X, Y, Z configuration).		

4.2 Uncertainty

Measurement Item	Expanded Uncertainty $U = kU_c (k = 2)$	
Radiated Spurious Emissions	30 MHz ~ 300 MHz:	+4.94 dB, -5.06 dB
		+4.93 dB, -5.05 dB
	300 MHz ~ 1 000 MHz:	+4.97 dB, -5.08 dB
		+4.84 dB, -4.96 dB
Conducted Emissions	9 kHz ~ 150 kHz:	3.75 dB
	150 kHz ~ 30 MHz:	3.36 dB

5. Test results

5.1 Antenna Requirement

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.1.2 Result

-Complied

The PCB pattern antenna is permanently attached on PCB board.

5.2 In-band Fundamental Emission

5.2.1 Minimum Standard

15.225 (a) The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15, 848 microvolts/meter at 30 meters.

5.2.2 Measurement Procedure

Test Procedure The Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9 kHz to 30 MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

Frequency : From 30 MHz to 1 GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector. The radiated emission measurements were made with the following detector function of the test receiver (below 1 GHz).

Frequency	9 - 90 kHz	90 - 110 kHz	150 - 490 kHz	490 kHz - 30 MHz	30 MHz -1 GHz
Detector type	PK/AV	QP	PK/AV	QP	QP
IF bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz

- Part 15 Section 15.31 (f)(2) (9 kHz - 30 MHz)

[Limit at 3m]=[Limit at 300m]-40 x log(3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

5.2.3 Test Result

- Complies

- DC 12.0 V

Voltage [V]	Frequency [MHz]	Reading [dB μ V]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Correction Factor [dB]	field strength dBuV/m at 3 m	Limit dBuV/m at 3 m	Margin [dB]
QP DATA.									
12	13.561	82.7	1.61	-33.37	19.56	-12.2	94.9	124.0	29.1
PK DATA.									
12	13.561	78.1	1.61	-33.37	19.56	-12.2	65.9	124.0	58.1

- DC 48.0 V

Voltage [V]	Frequency [MHz]	Reading [dB μ V]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Correction Factor [dB]	field strength dBuV/m at 3 m	Limit dBuV/m at 3 m	Margin [dB]
QP DATA.									
48	13.561	76.3	1.61	-33.37	19.56	-12.2	64.1	124.0	59.9
PK DATA.									
48	13.561	78.1	1.61	-33.37	19.56	-12.2	65.9	124.0	58.1

5.3 In-band Spurious Emission

5.3.1 Regulation

15.225 (b) With in the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

15.225 (c) With in the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

5.3.2 Test Result

- **Complied**

- **DC 12.0 V**

Measurement Distance: 3 m

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.										
13.396	9	46.7	H	1.61	-33.37	19.56	-12.2	80.5	58.9	21.6
13.520	9	45.5	H	1.61	-33.37	19.56	-12.2	90.5	57.7	32.8
13.561	9	76.2	H	1.61	-33.37	19.56	-12.2	124.0	64.0	60.0
13.606	9	47.7	H	1.62	-33.38	19.56	-12.2	90.5	59.9	30.6
13.767	9	42.3	V	1.63	-33.38	19.55	-12.2	80.5	54.5	26.0
PK DATA.										
13.396	9	47.2	H	1.61	-33.37	19.56	-12.2	80.5	35.0	45.5
13.520	9	46.3	H	1.61	-33.37	19.56	-12.2	90.5	34.1	56.4
13.561	9	78.1	H	1.61	-33.37	19.56	-12.2	124.0	65.9	58.1
13.606	9	47.0	H	1.62	-33.38	19.56	-12.2	90.5	34.8	55.7
13.767	9	40.7	V	1.63	-33.38	19.55	-12.2	80.5	28.5	52.0

- DC 48.0 V

Measurement Distance: 3 m

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.										
13.377	9	41.2	V	1.61	-33.37	19.56	-12.2	80.5	29.0	51.5
13.497	9	40.4	V	1.61	-33.37	19.56	-12.2	90.5	28.2	62.3
13.561	9	76.3	V	1.61	-33.37	19.56	-12.2	124.0	64.1	59.9
13.602	9	42.1	V	1.62	-33.38	19.56	-12.2	90.5	29.9	60.6
13.722	9	42.7	V	1.63	-33.38	19.55	-12.2	80.5	30.5	50.0
PK DATA.										
13.377	9	43.8	V	1.61	-33.37	19.56	-12.2	80.5	31.6	48.9
13.497	9	43.4	V	1.61	-33.37	19.56	-12.2	90.5	31.2	59.3
13.561	9	78.1	V	1.61	-33.37	19.56	-12.2	124.0	65.9	58.1
13.602	9	43.0	V	1.62	-33.38	19.56	-12.2	90.5	30.8	59.7
13.722	9	43.8	V	1.63	-33.38	19.55	-12.2	80.5	31.6	48.9

Margin (dB) = Limit – Actual

[Result] = Reading – Amp Gain + AF + CL

1. H = Horizontal, V = Vertical Polarization

2. AF/CL = Antenna Factor and Cable Loss

Note: This test was performed by using peak detector mode. If peak result meets the limit, QP measurement is skipped.

5.4 Out-of-band Spurious Emission

5.4.1 Regulation

15.225 (d) The Field Strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in 15.209

Frequency (MHz)	Field Strength ($\mu V/m$)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30(29.54 dB $\mu V/m$)	30
30.0-88.0	100(40 dB $\mu V/m$)	3
88-216	150(43.5 dB $\mu V/m$)	3
216-960	200 (46 dB $\mu V/m$)	3
Above 960	500 (53.98 dB $\mu V/m$)	3

5.4.2 Measurement Procedure

The spurious emissions from the EUT will be measured on an 10 m Anechoic chamber in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EUT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2].


The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB $\mu V/m$, is arrived at by taking the reading from the EMI receiver (Level dB μV) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-390, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR16-SRF0022 Page (14) of (21)</p>	
---	---	---

The EUT was placed on the top of the 0.8 meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1 000 MHz using the BILOG antenna. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 10 m chamber. The EUT was tested at a distance 3 meters.

Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

5.4.3 Test Result

- Complied

Measurement Distance: 3 m

- DC 12.0 V

-Below 30 MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.										
11.567	9	41.8	H	1.37	-33.31	19.64	-12.3	69.5	29.5	40.0
PK DATA.										
11.567	9	43.5	H	1.37	-33.31	19.64	-12.3	69.5	31.2	38.3

-Above 30 MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.										
30.970	120	32.9	V	1.4	-32.7	24.5	-6.8	40.0	26.1	13.9
271.166	120	33.4	H	4.9	-32.6	18.6	-9.0	46.0	24.4	21.6
298.326	120	35.5	H	4.9	-32.6	19.2	-8.5	46.0	27.0	19.0
312.028	120	35.9	H	4.9	-32.6	19.5	-8.2	46.0	27.7	18.3
325.365	120	31.9	H	4.8	-32.6	19.8	-7.9	46.0	24.0	22.0
696.026	120	28.7	V	7.8	-32.7	25.0	0.1	46.0	28.8	17.2
PK DATA.										
30.970	120	37.5	V	1.4	-32.7	24.5	-6.8	40.0	30.7	9.3
271.166	120	35.2	H	4.9	-32.6	18.6	-9.0	46.0	26.2	19.8
298.326	120	35.7	H	4.9	-32.6	19.2	-8.5	46.0	27.2	18.8
312.028	120	37.6	H	4.9	-32.6	19.5	-8.2	46.0	29.4	16.6
325.365	120	36.0	H	4.8	-32.6	19.8	-7.9	46.0	28.1	17.9
696.026	120	30.8	V	7.8	-32.7	25.0	0.1	46.0	30.9	15.1

- DC 48.0 V

-Below 30 MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.										
6.521	9	41.0	H	1.01	-33.11	19.7	-12.4	69.5	28.6	40.9
PK DATA.										
6.521	9	42.6	H	1.01	-33.11	19.7	-12.4	69.5	30.2	39.3

-Above 30 MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.										
30.000	120	36.6	V	1.5	-32.7	25.0	-6.2	40.0	30.4	9.6
46.733	120	39.3	V	1.7	-32.7	15.6	-15.4	40.0	23.9	16.1
290.203	120	39.5	H	4.9	-32.6	19.0	-8.7	46.0	30.8	15.2
312.028	120	37.2	H	4.6	-32.6	19.7	-8.2	46.0	29.0	17.0
360.043	120	34.3	H	5.3	-32.6	20.7	-6.6	46.0	27.7	18.3
503.966	120	28.3	H	6.5	-32.6	23.4	-2.8	46.0	25.5	20.5
PK DATA.										
30.000	120	39.2	V	1.5	-32.7	25.0	-6.2	40.0	33.0	7.0
46.733	120	40.9	V	1.7	-32.7	15.6	-15.4	40.0	25.5	14.5
290.203	120	39.9	H	4.9	-32.6	19.0	-8.7	46.0	31.2	14.8
312.028	120	37.3	H	4.6	-32.6	19.7	-8.2	46.0	29.1	16.9
360.043	120	35.3	H	5.3	-32.6	20.7	-6.6	46.0	28.7	17.3
503.966	120	31.6	H	6.5	-32.6	23.4	-2.8	46.0	28.8	17.2

Margin (dB) = Limit – Actual

[Result] = Reading – Amp Gain + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. AF/CL = Antenna Factor and Cable Loss

5.5 Frequency tolerance

5.5.1 Regulation

15.225 (e) The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.5.2 Test Result

- **Complied**

- **DC 12.0 V**

VOLTAGE [%]	POWER [V]	TEMP [°C]	FREQ [Hz]	FREQ.DEV [Hz]	Deviation [%]
100	12	20	13 559 881	-119	-0.00088
		-20	13 560 002	2	0.00001
		-10	13 559 987	-13	-0.00010
		0	13 559 911	-89	-0.00066
		10	13 559 885	-115	-0.00085
		20	13 559 894	-106	-0.00078
		25	13 559 868	-132	-0.00097
		30	13 559 848	-152	-0.00112
		40	13 559 831	-169	-0.00125
		50	13 559 815	-185	-0.00136
85	10.2	20	13 559 860	-140	-0.00103
115	13.8	20	13 559 839	-161	-0.00119

- DC 48.0 V

VOLTAGE [%]	POWER [W]	TEMP [°C]	FREQ [Hz]	FREQ.DEV [Hz]	Deviation [%]
100	48	20	13 559 825	-175	-0.00129
		-20	13 559 996	-4	-0.00003
		-10	13 559 950	-50	-0.00037
		0	13 559 959	-41	-0.00030
		10	13 559 897	-103	-0.00076
		20	13 559 887	-113	-0.00083
		25	13 559 871	-129	-0.00095
		30	13 559 811	-189	-0.00139
		40	13 559 833	-167	-0.00123
		50	13 559 796	-204	-0.00150
85	40.8	20	13 559 865	-135	-0.00100
115	55.2	20	13 559 836	-164	-0.00121

5.6 Conducted Emission

5.6.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.6.2 Measurement Procedure

- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-390, Korea
TEL: 82-70-5008-1021 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR16-SRF0022
Page (20) of (21)

**5.6.3 Test Result**

- Complied

Figure4. The plot of Conducted Emission

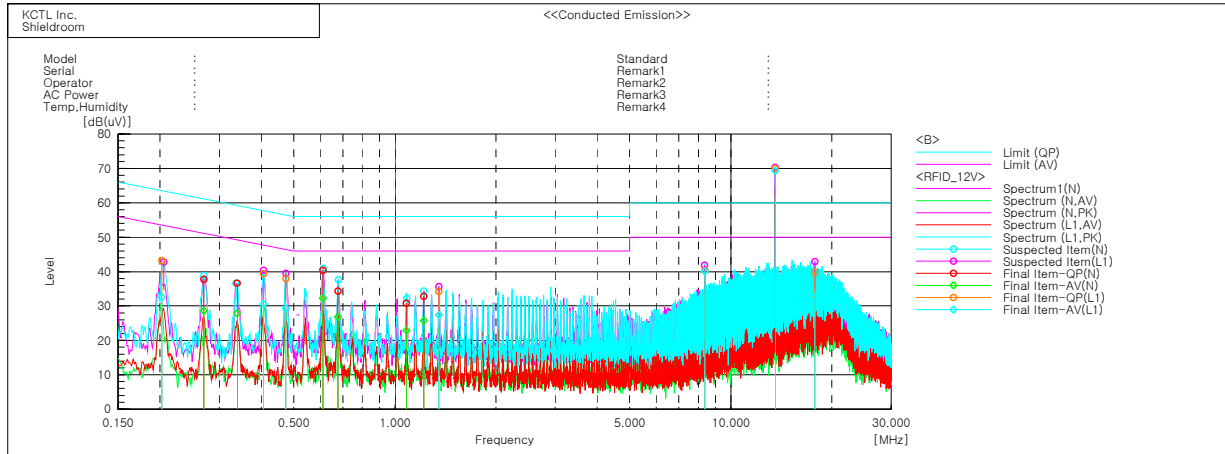**Final Result**

--- N Phase ---										
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.26995	28.1	18.9	9.7	37.8	28.6	61.1	51.1	23.3	22.5
2	0.6098	30.5	22.3	9.9	40.4	32.2	56.0	46.0	15.6	13.8
3	0.67768	24.4	17.0	9.9	34.3	26.9	56.0	46.0	21.7	19.1
4	1.21769	22.9	15.9	9.8	32.7	25.7	56.0	46.0	23.3	20.3
5	1.08267	21.0	13.1	9.8	30.8	22.9	56.0	46.0	25.2	23.1
6	0.33933	26.8	18.1	9.8	36.6	27.9	59.2	49.2	22.6	21.3

--- L1 Phase ---										
No.	Frequency	Reading QP	Reading CAV	c.f	Result QP	Result CAV	Limit QP	Limit AV	Margin QP	Margin CAV
	[MHz]	[dB(uV)]	[dB(uV)]	[dB]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB(uV)]	[dB]	[dB]
1	0.20255	33.3	22.7	9.9	43.2	32.6	63.5	53.5	20.3	20.9
2	0.47353	28.0	19.3	9.9	37.9	29.2	56.5	46.5	18.6	17.3
3	0.40629	29.5	20.7	9.9	39.4	30.6	57.7	47.7	18.3	17.1
4	13.55977	60.1	59.5	9.9	70.0	69.4	60.0	50.0	-10.0	-19.4
5	17.78492	29.8	22.4	10.0	39.8	32.4	60.0	50.0	20.2	17.6
6	8.35882	30.4	30.2	9.9	40.3	40.1	60.0	50.0	19.7	9.9
7	1.35284	24.4	17.6	9.8	34.2	27.4	56.0	46.0	21.8	18.6

6. Test equipment used for test

	Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
■	EMI TEST RECEIVER	ESCI7	R & S	100732	17.02.26
■	Antenna Mast	MA4000-EP	Innco Systems	303	-
■	Turn Table	DT2000S-1t	Innco Systems	79	-
■	Bilog Antenna	CBL 6112D	TESEQ	37876	18.08.05
■	AMPLIFIER	310N	SONOMA INSTRUMENT	344922	17.08.26
■	COAXIAL FIXED ATTENUATOR	8491B	HP	22981	17.08.25
■	LOOP Antenna	HFH2-Z2	R & S	100355	18.03.03
■	SPECTRUM ANALYZER	FSV30	R & S	100807	17.08.30
■	SIGNAL GENERATOR	SMR40	R & S	10007	17.06.02
■	VECTOR SIGNAL GENERATOR	SMBV100A	R & S	1407.6004K02	17.08.31
■	DC POWER SUPPLY	E3632A	Agilent	MY40016393	17.07.07
■	AC POWER SUPPLY	PCR2000W	KIKUSUI	GB001619	17.08.29
■	TEMP & HUMID CHAMBER	SH-661	ESPEC CORP.	92004048	17.01.26
■	TWO-LINE V-NETWORK	ENV216	R & S	101358	17.08.11
■	EMI TEST RECEIVER	ESCI	R & S	101408	17.08.25