



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Mikrotiks SIA

Brivibas gatve 214i ,Riga, Latvia LV-1039

FCC ID: TV7LTAP2HND

Report Type: Original Report	Product Type: LtAP
Test Engineer: Hope Zhang <i>Hope Zhang</i>	
Report Number: RKSA180929001-00B	
Report Date: 2019-02-20	
Reviewed By: Oscar Ye <i>Oscar Ye</i> RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)	16
FCC §15.203 - ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER SETUP.....	25
TEST PROCEDURE	25
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST RESULTS SUMMARY	25
TEST DATA	26
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	74
APPLICABLE STANDARD	74
TEST PROCEDURE	74
TEST DATA	74
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	89
APPLICABLE STANDARD	89
TEST PROCEDURE	89
TEST DATA	89
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	91
APPLICABLE STANDARD	91
TEST PROCEDURE	91
TEST DATA	91

FCC §15.247(e) - POWER SPECTRAL DENSITY	100
APPLICABLE STANDARD	100
TEST PROCEDURE	100
TEST DATA	100

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Mikrotikls SIA
Test Model	RBLtAP-2HnD
Product Type	LtAP
Dimension	170mm(L)*170mm(W)*45mm(H)
Power Supply	DC 24V from Adapter and POE power supply

Adapter information:

Model: SAW30-240-1200U R2A

Input: AC 100-240V, 50/60Hz 0.8A

Output: DC 24V, 1200mA

**All measurement and test data in this report was gathered from production sample serial number: 20180929001.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-09-29.*

Objective

This report is prepared on behalf of Mikrotikls SIA in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal/grant.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For Conducted Test:

802.11b & 802.11g&802.11n: each transmit chains were tested

For Radiated Test:

802.11b & 802.11g, SISO for each transmit chain

For 802.11n: MIMO for two transmit chains

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: Winbox

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Level	
		Chain 0:	Chain 1:
802.11b	1 Mbps	15	15
802.11g	6 Mbps	9	9
802.11n-HT20	MCS0	9	9
802.11n-HT40	MCS0	8	8

Duty Cycle:


802.11b Mode Middle Channel

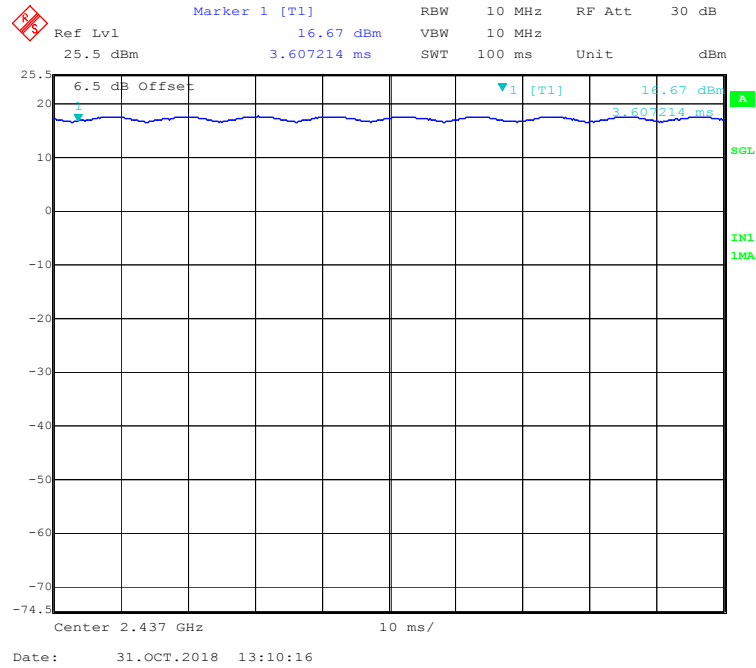


802.11g Mode Middle Channel

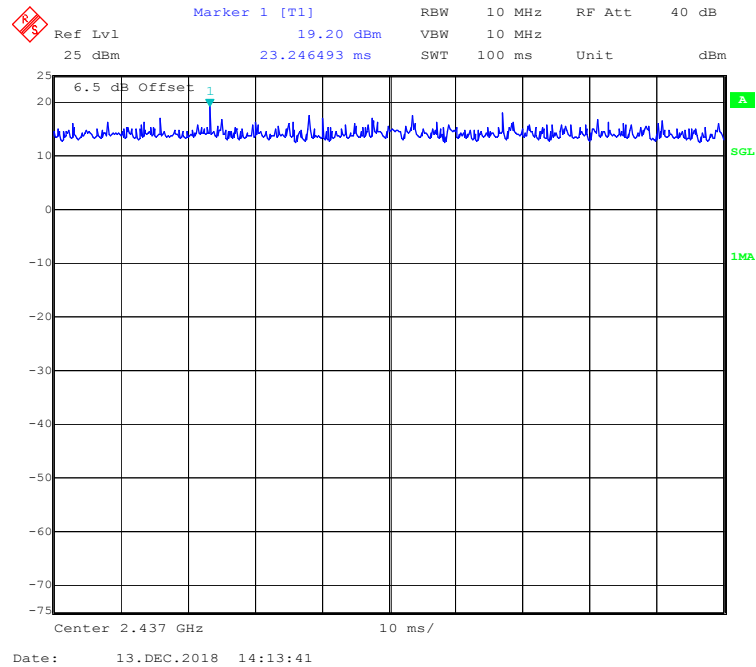

802.11n-HT20 Mode Middle Channel

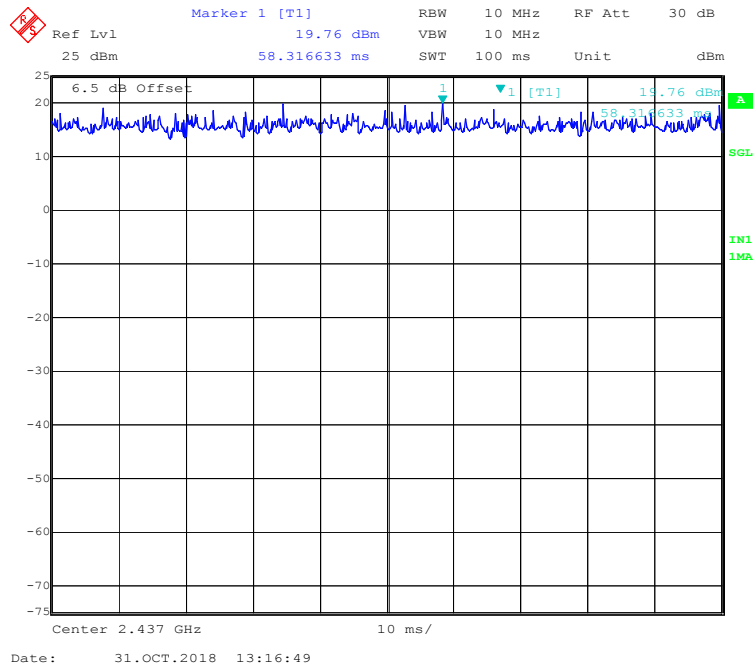

802.11n-HT40 Mode Middle Channel

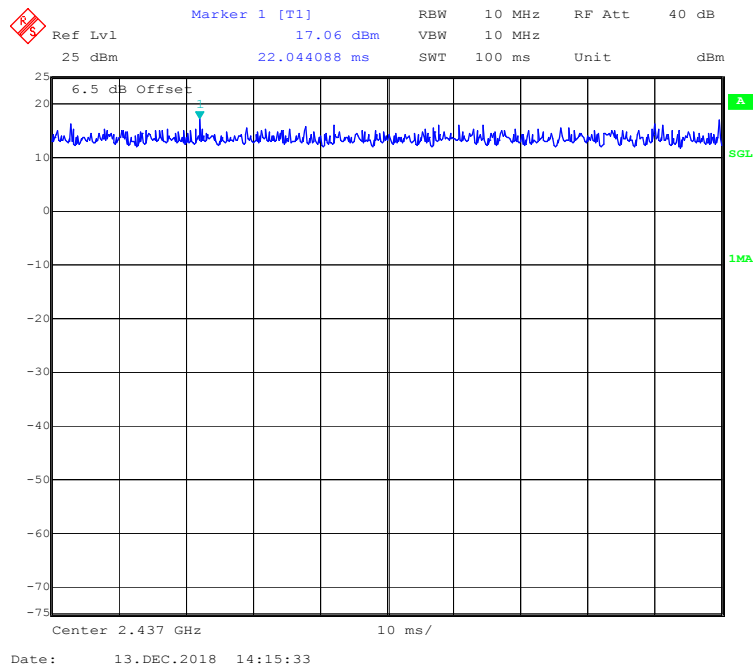

Mode	Duty Cycle (%)	T(us)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter1	LA65NS0-00	DF263
UTT	POE	S110P-24V	1170303614
Lenovo	U disk	T180	0A1233865200536

External I/O Cable


Cable Description	Length (m)	From Port	To
RJ45 Cable 1	15	EUT	Notebook
RJ45 Cable 2	1	EUT	Notebook
RJ45 Cable 3	1	EUT	POE
RJ45 Cable 4	15	Notebook	POE
Power Cable	1	Adapter	EUT
Power Cable	1	Adapter1	POE

Block Diagram of Test Setup


For Conducted Emissions-Adapter power supply:

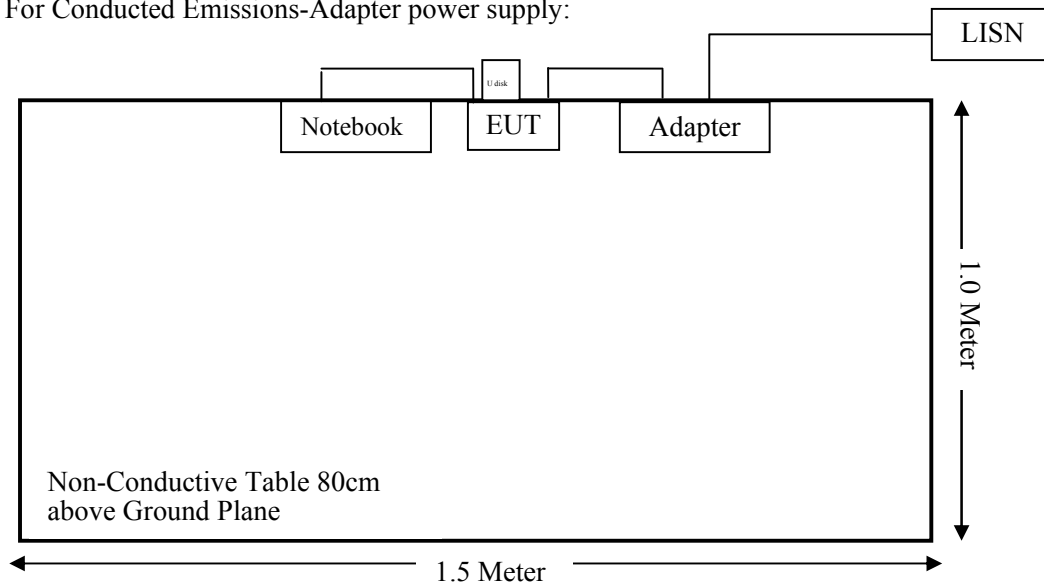


For Conducted Emissions-POE power supply:

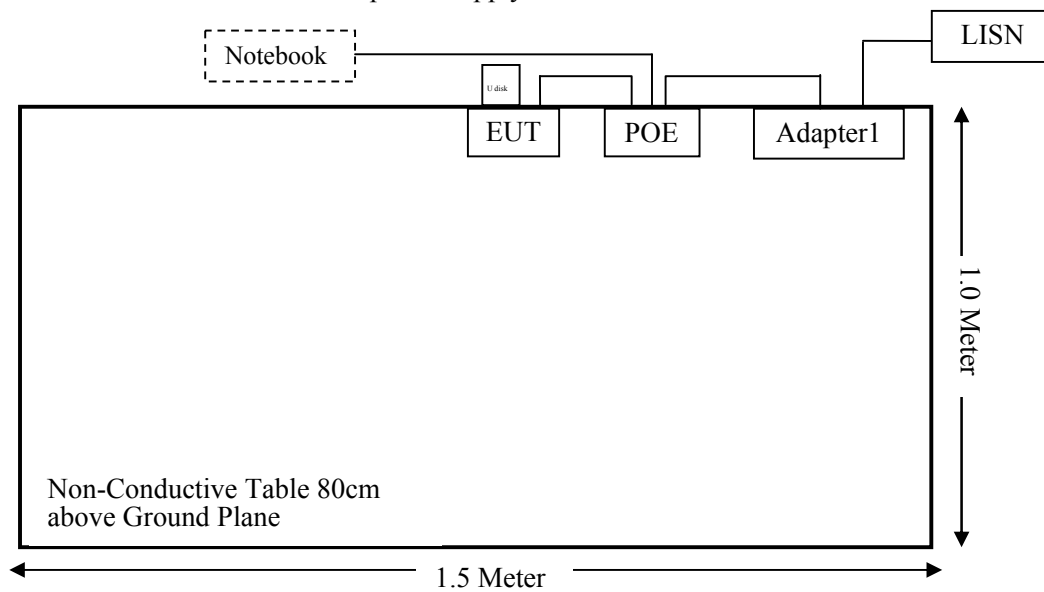


For Radiated Emissions- Adapter power supply (Below 1GHz):

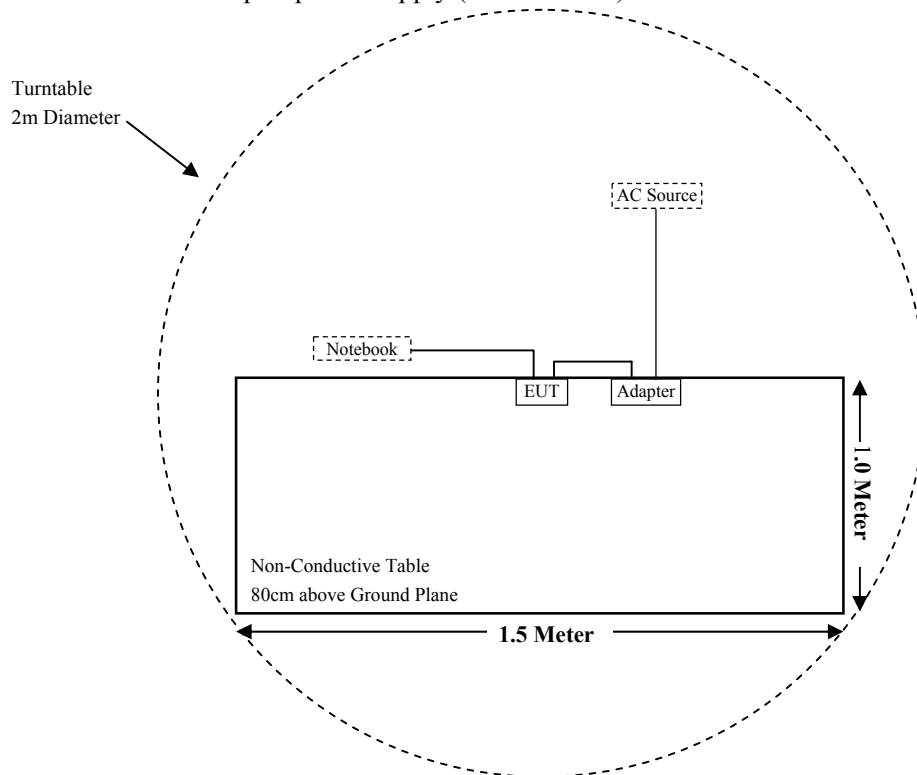


For Radiated Emissions- Adapter power supply (Above 1GHz):

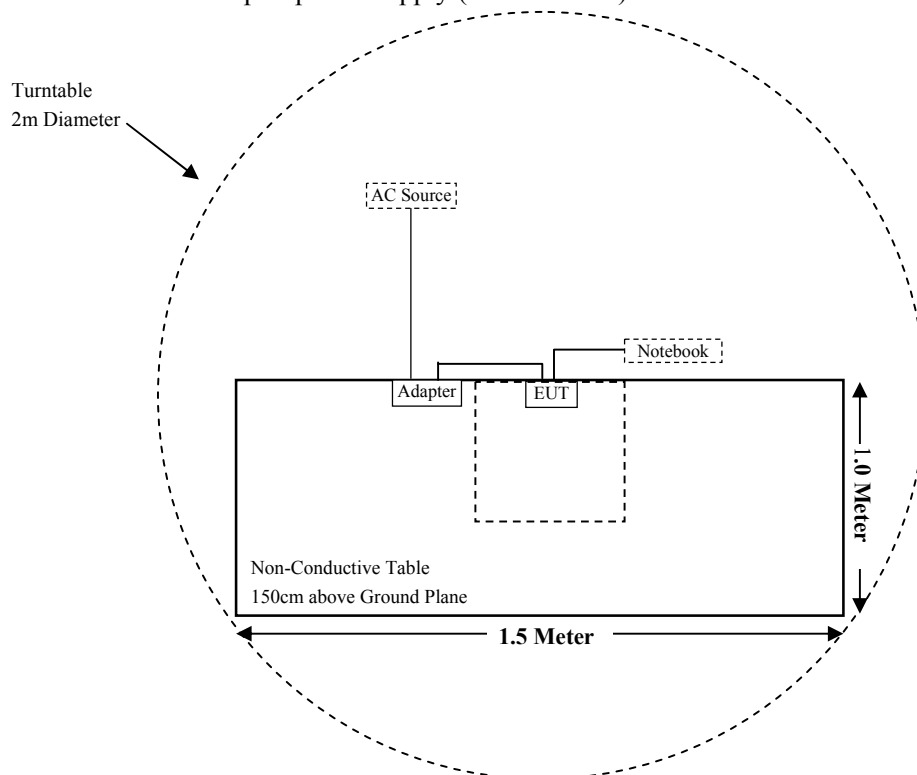

For Radiated Emissions- POE power supply (Below 1GHz):

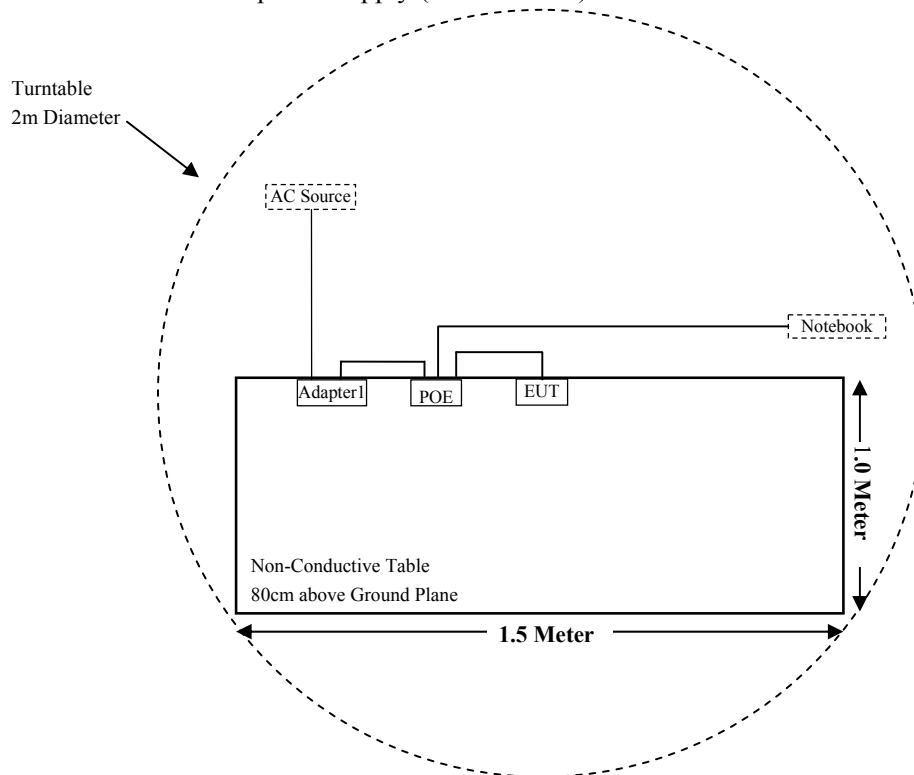

For Radiated Emissions- POE power supply (Above 1GHz):

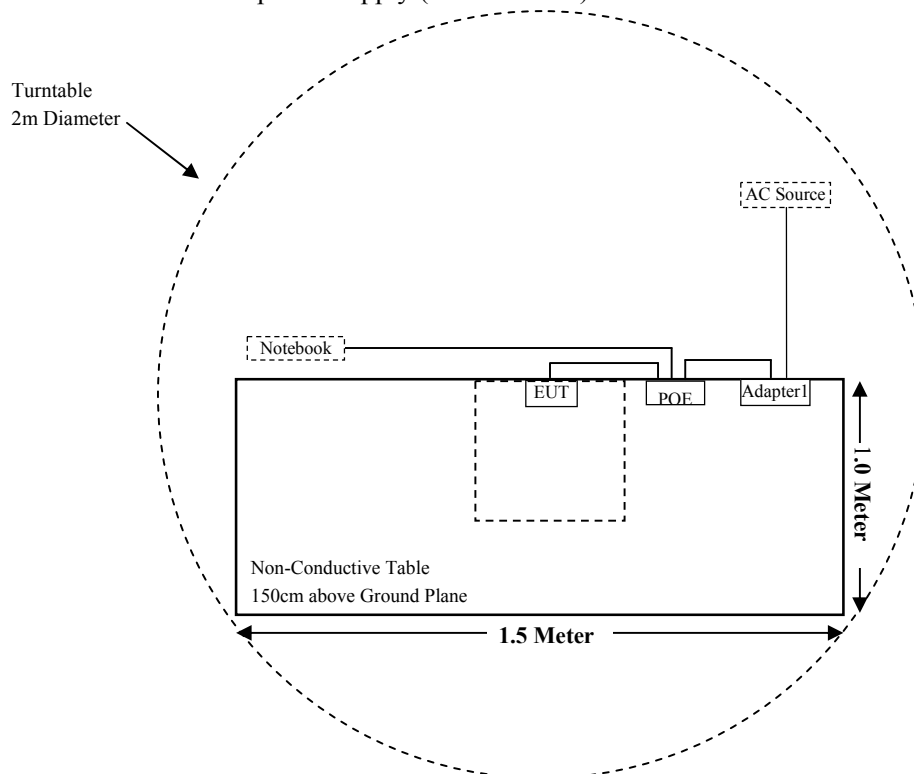

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3115	6229	2019-01-11	2022-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04
Narda	Attenuator	6dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-11-12	2018-11-11
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17
Narda	Attenuator	6dB	010	2018-08-15	2019-08-14
Mikrotikls	RF Cable	MikrotiklsC01	C01	Each Time	/

Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-12	2019-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2018-11-12	2019-11-11
BACL	Auto test Software	BACL-EMC	CE001	N/A	N/A
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

For worst case:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412~2462	2.50	1.78	19.00	79.43	20	0.0281	1.00
802.11g		2.50	1.78	18.00	63.10	20	0.0223	1.00
802.11n-HT20		2.50	1.78	20.00	100.00	20	0.0354	1.00
802.11n-HT40	2422~2452	2.50	1.78	20.00	100.00	20	0.0354	1.00

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two Integrated antennas for Wi-Fi which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Antenna Type	Antenna Gain	Input impedance
0	Integrated	2.5dBi	50Ω
1	Integrated	2.5dBi	50Ω


Result: Compliance.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

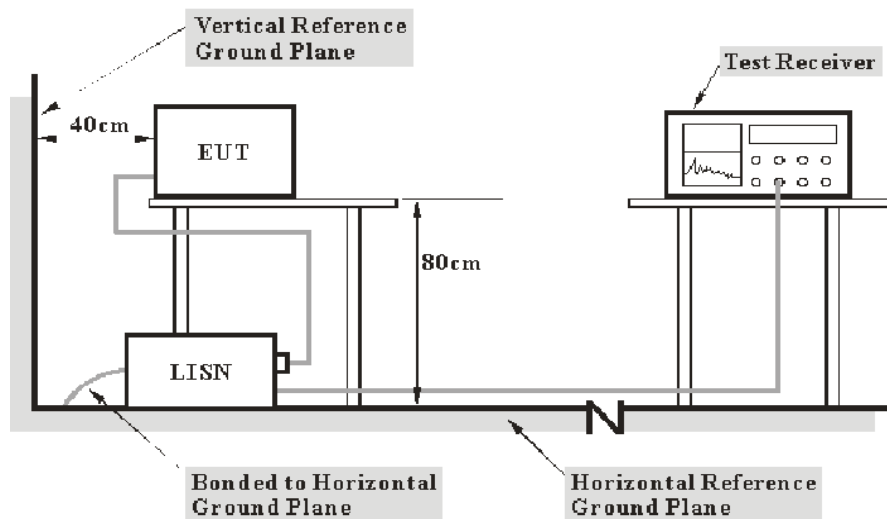

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.


Test Data

Environmental Conditions

Temperature:	20.2-24.3 °C
Relative Humidity:	48-51 %
ATM Pressure:	100.1-101.3 kPa


The testing was performed by Hope Zhang from 2018-10-28 to 2019-01-18.

EUT operation mode: Transmitting in 802.11b mode low channel (worst case: Chain 1)

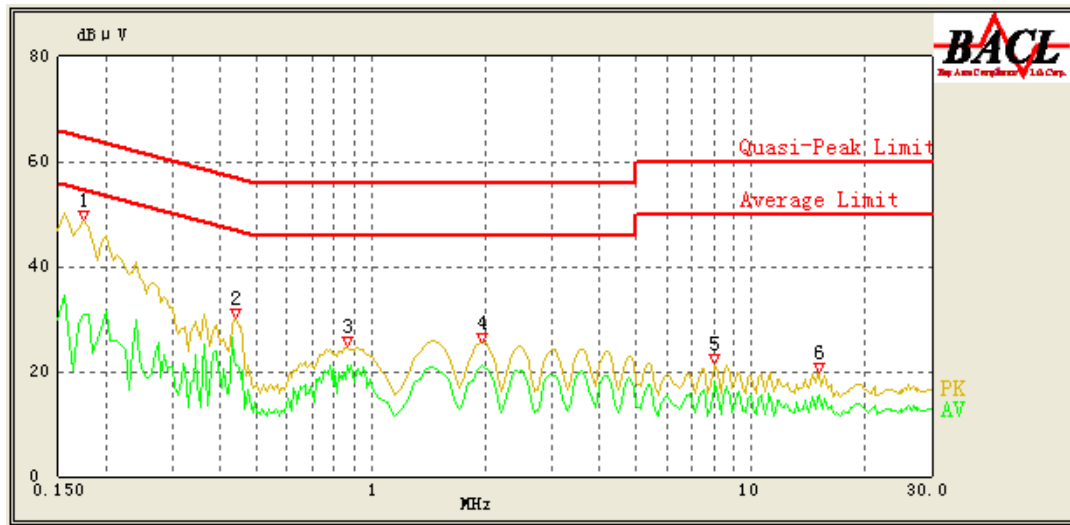
AC 120V/60 Hz, Line-Adapter power supply

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.175	48.74	QP	9.000	L1	16.03	64.72	15.98	Compliance
0.175	30.88	AV	9.000	L1	16.03	54.72	23.84	Compliance
0.440	30.13	QP	9.000	L1	16.07	57.06	26.93	Compliance
0.440	21.08	AV	9.000	L1	16.07	47.06	25.98	Compliance
0.865	24.76	QP	9.000	L1	15.91	56.00	31.24	Compliance
0.865	21.11	AV	9.000	L1	15.91	46.00	24.89	Compliance
1.950	25.57	QP	9.000	L1	15.85	56.00	30.43	Compliance
1.950	21.01	AV	9.000	L1	15.85	46.00	24.99	Compliance
8.050	21.58	QP	9.000	L1	16.01	60.00	38.42	Compliance
8.050	18.14	AV	9.000	L1	16.01	50.00	31.86	Compliance
15.100	19.67	QP	9.000	L1	16.21	60.00	40.33	Compliance
15.100	15.45	AV	9.000	L1	16.21	50.00	34.55	Compliance


AC 120V/60 Hz, Neutral- Adapter power supply

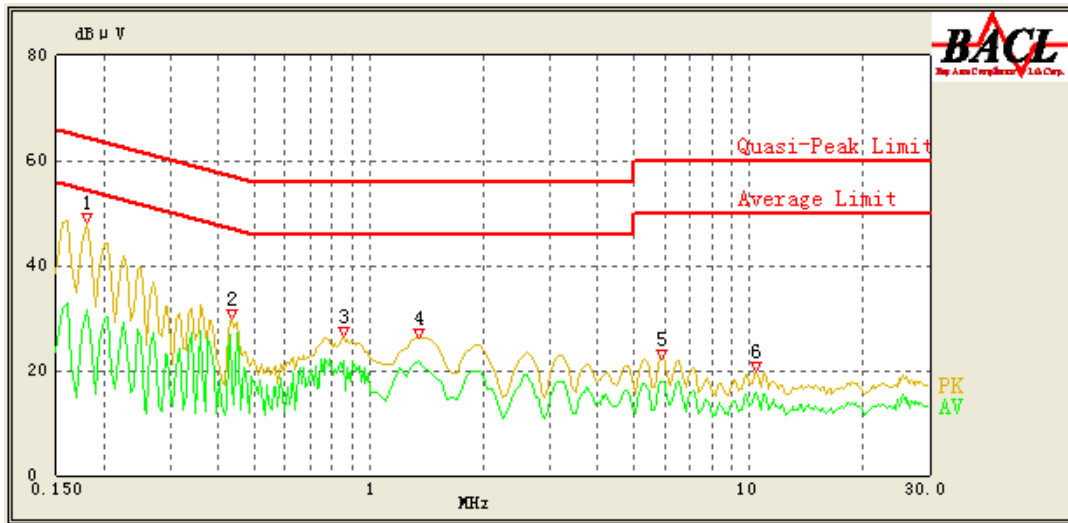

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.180	48.33	QP	9.000	N	16.05	64.49	16.16	Compliance
0.180	31.58	AV	9.000	N	16.05	54.49	22.91	Compliance
0.435	29.68	QP	9.000	N	16.10	57.16	27.48	Compliance
0.435	17.36	AV	9.000	N	16.10	47.16	29.80	Compliance
0.855	26.37	QP	9.000	N	15.96	56.00	29.63	Compliance
0.855	22.00	AV	9.000	N	15.96	46.00	24.00	Compliance
1.350	26.30	QP	9.000	N	15.93	56.00	29.70	Compliance
1.350	21.70	AV	9.000	N	15.93	46.00	24.30	Compliance
5.900	22.29	QP	9.000	N	15.89	60.00	37.71	Compliance
5.900	17.96	AV	9.000	N	15.89	50.00	32.04	Compliance
10.450	19.75	QP	9.000	N	15.99	60.00	40.25	Compliance
10.450	15.93	AV	9.000	N	15.99	50.00	34.07	Compliance

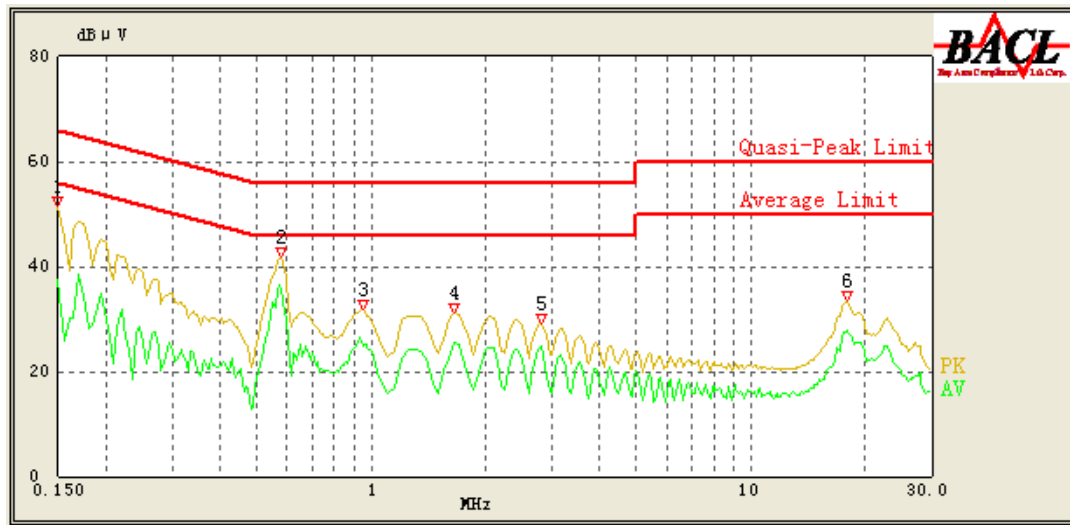AC 120V/60 Hz, Line-POE power supply

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	51.36	QP	9.000	L1	16.06	66.00	14.64	Compliance
0.150	37.45	AV	9.000	L1	16.06	56.00	18.55	Compliance
0.580	41.71	QP	9.000	L1	16.03	56.00	14.29	Compliance
0.580	35.86	AV	9.000	L1	16.03	46.00	10.14	Compliance
0.955	31.70	QP	9.000	L1	15.89	56.00	24.30	Compliance
0.955	24.67	AV	9.000	L1	15.89	46.00	21.33	Compliance
1.650	31.20	QP	9.000	L1	15.86	56.00	24.80	Compliance
1.650	25.54	AV	9.000	L1	15.86	46.00	20.46	Compliance
2.800	29.10	QP	9.000	L1	15.85	56.00	26.90	Compliance
2.800	24.92	AV	9.000	L1	15.85	46.00	21.08	Compliance
17.900	33.59	QP	9.000	L1	16.34	60.00	26.41	Compliance
17.900	27.95	AV	9.000	L1	16.34	50.00	22.05	Compliance

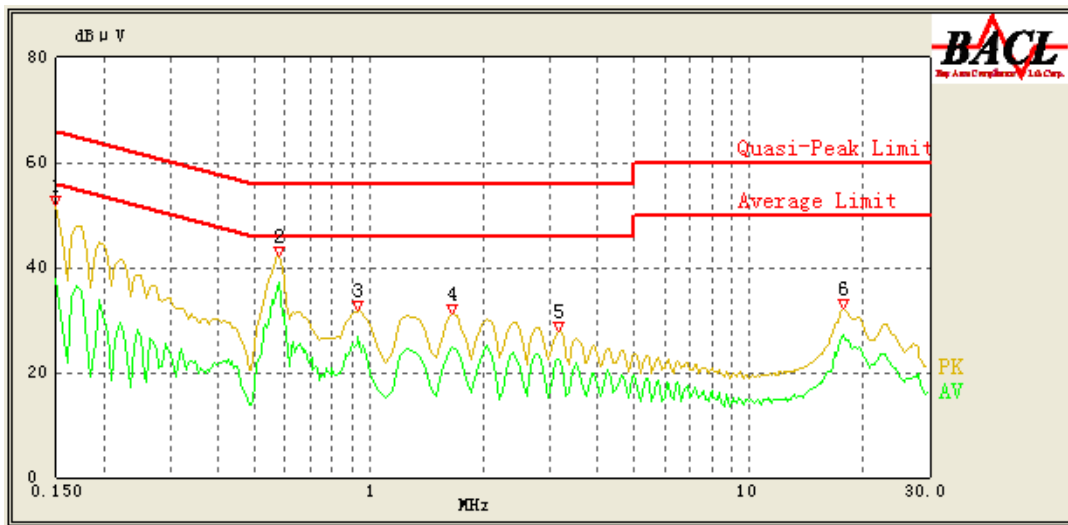AC 120V/60 Hz, Neutral- POE power supply

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	51.86	QP	9.000	N	16.06	66.00	14.14	Compliance
0.150	37.96	AV	9.000	N	16.06	56.00	18.04	Compliance
0.580	42.15	QP	9.000	N	16.06	56.00	13.85	Compliance
0.580	37.15	AV	9.000	N	16.06	46.00	8.85	Compliance
0.935	31.70	QP	9.000	N	15.95	56.00	24.30	Compliance
0.935	26.83	AV	9.000	N	15.95	46.00	19.17	Compliance
1.650	31.16	QP	9.000	N	15.92	56.00	24.84	Compliance
1.650	24.78	AV	9.000	N	15.92	46.00	21.22	Compliance
3.150	27.85	QP	9.000	N	15.89	56.00	28.15	Compliance
3.150	22.52	AV	9.000	N	15.89	46.00	23.48	Compliance
17.700	32.29	QP	9.000	N	16.09	60.00	27.71	Compliance
17.700	27.04	AV	9.000	N	16.09	50.00	22.96	Compliance



Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

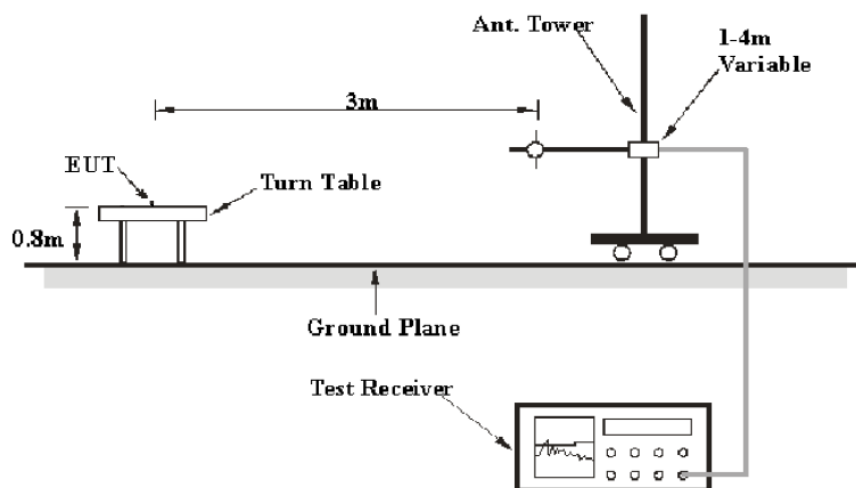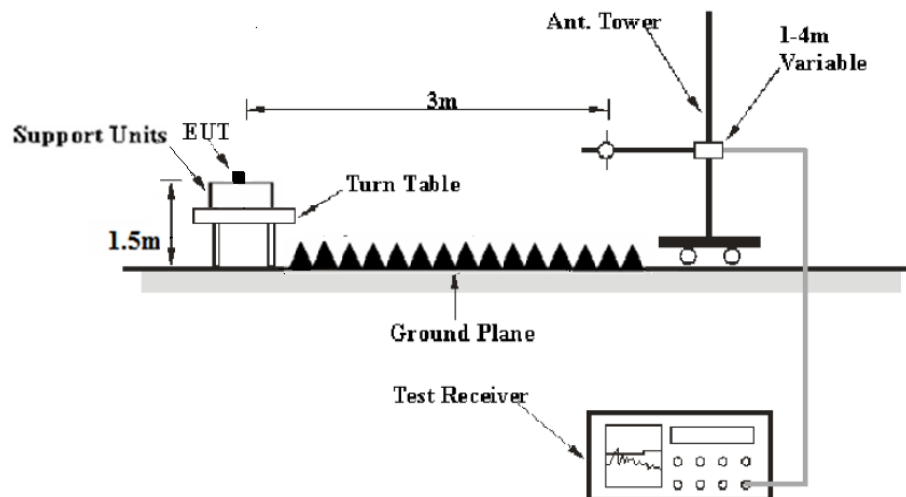EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz - 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30MHz - 1GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	22.1-23.5 °C
Relative Humidity:	48-50 %
ATM Pressure:	100.1-101.2 kPa

The testing was performed by Hope Zhang from 2018-10-30 to 2019-01-18.

EUT operation mode: Transmitting

Spurious Emission Test (Adapter power supply):**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **Chain 1 low channel of 802.11b mode in X-axis of orientation** was recorded

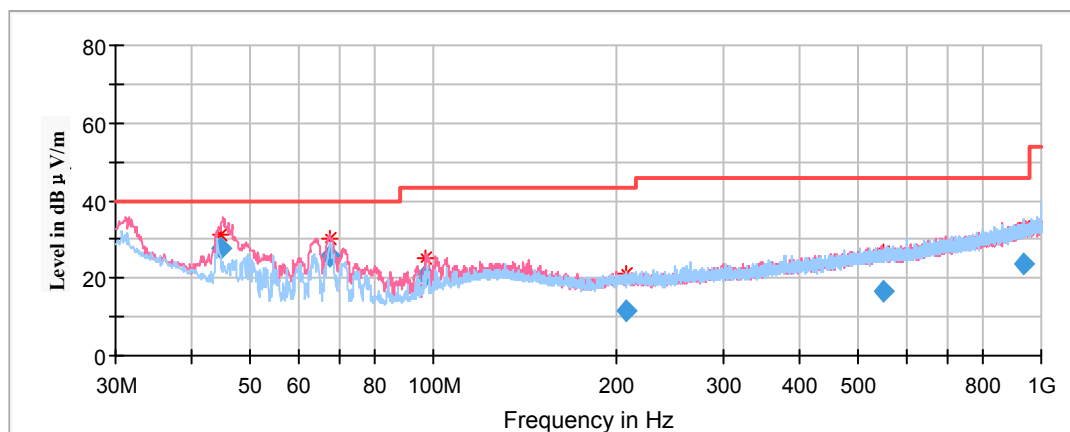

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
44.676550	27.77	101.0	V	198.0	-13.9	40.00	12.23
67.764450	25.60	101.0	V	305.0	-17.4	40.00	14.40
97.276100	20.65	101.0	V	95.0	-15.6	43.50	22.85
207.760350	11.51	101.0	H	312.0	-12.3	43.50	31.99
547.985600	16.84	101.0	V	14.0	-5.7	46.00	29.16
935.917400	23.41	101.0	H	0.0	0.9	46.00	22.59

1GHz-18GHz:**802.11b Mode(Worst case: Chain 1):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Low Channel: 2412MHz


Full Spectrum

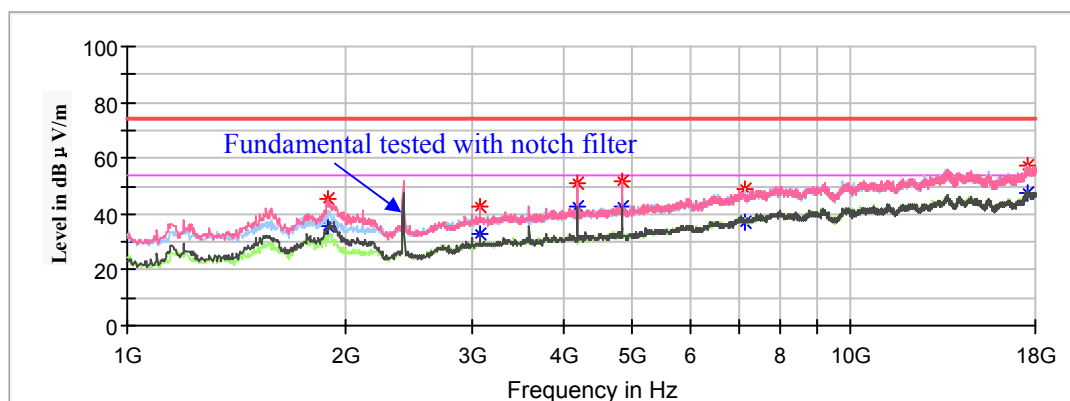

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1890.800000	45.37	---	150.0	V	96.0	-6.2	74.00	28.63
1890.800000	---	35.49	150.0	V	96.0	-6.2	54.00	18.51
3070.600000	---	33.20	200.0	V	196.0	-1.5	54.00	20.80
3070.600000	42.58	---	200.0	V	196.0	-1.5	74.00	31.42
4199.400000	50.73	---	150.0	V	171.0	1.1	74.00	23.27
4199.400000	---	42.90	150.0	V	171.0	1.1	54.00	11.10
4824.000000	51.90	---	150.0	V	85.0	1.9	74.00	22.10
4824.000000	---	42.33	150.0	V	85.0	1.9	54.00	11.67
7236.000000	---	37.40	200.0	H	164.0	9.0	54.00	16.60
7236.000000	48.86	---	200.0	H	164.0	9.0	74.00	25.14
17575.000000	---	47.29	100.0	H	315.0	17.3	54.00	6.71
17575.000000	57.37	---	100.0	H	315.0	17.3	74.00	16.63

Middle Channel: 2437MHz


Full Spectrum

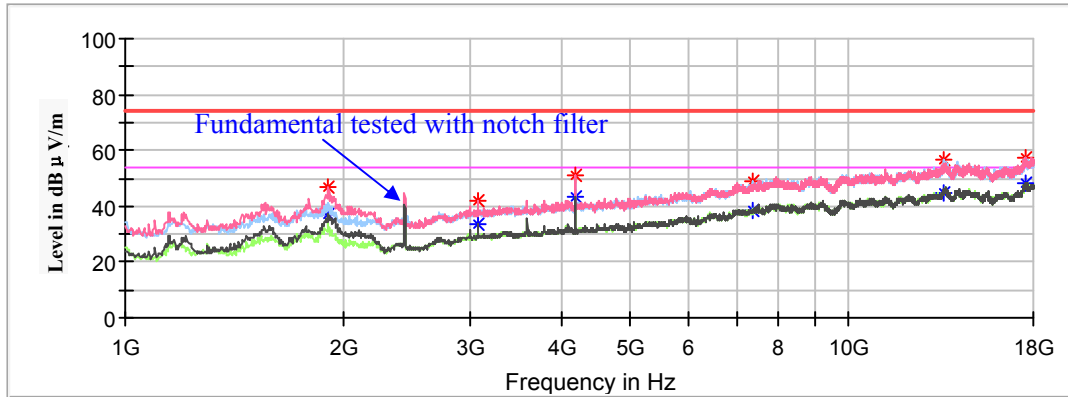

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1911.200000	---	37.10	200.0	V	45.0	-6.1	54.00	16.90
1911.200000	46.97	---	200.0	V	45.0	-6.1	74.00	27.03
3070.600000	---	33.31	200.0	V	196.0	-1.5	54.00	20.69
3070.600000	41.74	---	200.0	V	196.0	-1.5	74.00	32.26
4874.000000	---	43.03	150.0	V	165.0	1.9	54.00	10.97
4874.000000	51.22	---	150.0	V	165.0	1.9	74.00	22.78
7311.000000	---	38.23	200.0	H	75.0	9.2	54.00	15.77
7311.000000	48.89	---	200.0	H	75.0	9.2	74.00	25.11
13566.400000	---	45.08	200.0	H	235.0	14.7	54.00	8.92
13566.400000	56.67	---	200.0	H	235.0	14.7	74.00	17.33
17537.600000	---	48.41	100.0	V	349.0	17.2	54.00	5.59
17537.600000	57.66	---	100.0	V	349.0	17.2	74.00	16.34

High Channel: 2462MHz

Full Spectrum

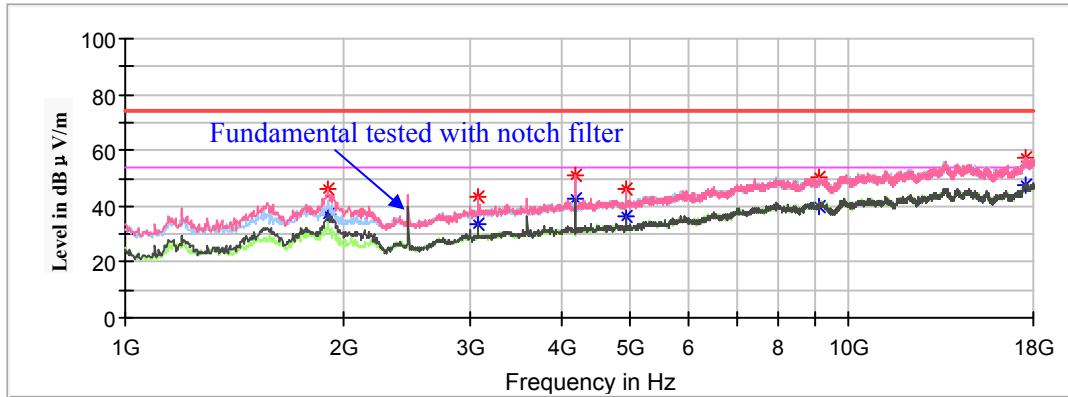

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1907.800000	46.21	---	150.0	V	57.0	-6.1	74.00	27.79
1907.800000	---	37.33	150.0	V	57.0	-6.1	54.00	16.67
3070.600000	43.13	---	150.0	V	207.0	-1.5	74.00	30.87
3070.600000	---	33.74	150.0	V	207.0	-1.5	54.00	20.26
4199.400000	51.08	---	100.0	V	154.0	1.1	74.00	22.92
4199.400000	---	42.99	100.0	V	154.0	1.1	54.00	11.01
4924.000000	45.95	---	150.0	V	89.0	2.0	74.00	28.05
4924.000000	---	36.17	150.0	V	89.0	2.0	54.00	17.83
7386.000000	---	40.08	100.0	V	250.0	9.4	54.00	13.92
7386.000000	50.57	---	100.0	V	250.0	9.4	74.00	23.43
17612.400000	---	47.84	150.0	V	196.0	17.3	54.00	6.16
17612.400000	57.62	---	150.0	V	196.0	17.3	74.00	16.38

802.11g Mode(Worst case: Chain 1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

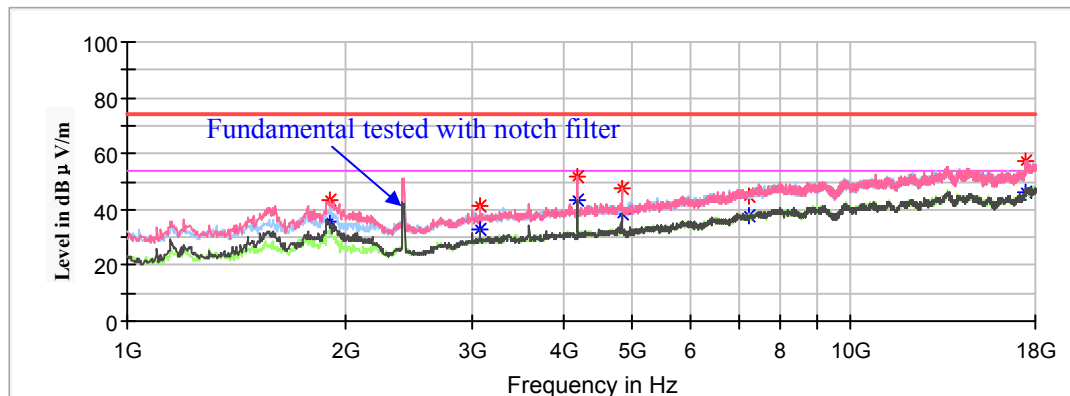

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1907.800000	---	35.54	150.0	V	96.0	-6.1	54.00	18.46
1907.800000	43.05	---	150.0	V	96.0	-6.1	74.00	30.95
3070.600000	---	32.84	150.0	V	186.0	-1.5	54.00	21.16
3070.600000	41.31	---	150.0	V	186.0	-1.5	74.00	32.69
4199.400000	51.62	---	150.0	V	160.0	1.1	74.00	22.38
4199.400000	---	43.06	150.0	V	160.0	1.1	54.00	10.94
4824.000000	---	38.30	150.0	V	333.0	1.9	54.00	15.70
4824.000000	47.69	---	150.0	V	333.0	1.9	74.00	26.31
7236.000000	45.09	---	150.0	V	211.0	9.0	74.00	28.91
7236.000000	---	37.68	150.0	V	211.0	9.0	54.00	16.32
17493.400000	---	46.19	150.0	V	6.0	17.2	54.00	7.81
17493.400000	57.43	---	150.0	V	6.0	17.2	74.00	16.57

Middle Channel: 2437MHz


Full Spectrum

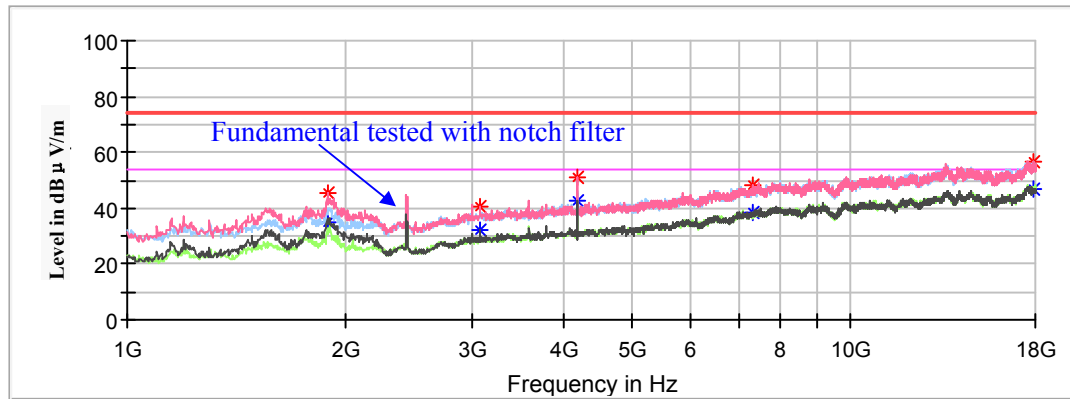

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1894.200000	---	34.94	150.0	V	84.0	-6.2	54.00	19.06
1894.200000	45.11	---	150.0	V	84.0	-6.2	74.00	28.89
3070.600000	---	31.87	150.0	V	199.0	-1.5	54.00	22.13
3070.600000	40.89	---	150.0	V	199.0	-1.5	74.00	33.11
4874.000000	---	42.61	150.0	V	161.0	1.9	54.00	11.39
4874.000000	50.95	---	150.0	V	161.0	1.9	74.00	23.05
7311.000000	---	38.24	150.0	V	58.0	9.2	54.00	15.76
7311.000000	48.19	---	150.0	V	58.0	9.2	74.00	25.81
17925.200000	---	46.86	150.0	V	109.0	17.6	54.00	7.14
17925.200000	56.91	---	150.0	V	109.0	17.6	74.00	17.09

High Channel: 2462MHz

Full Spectrum

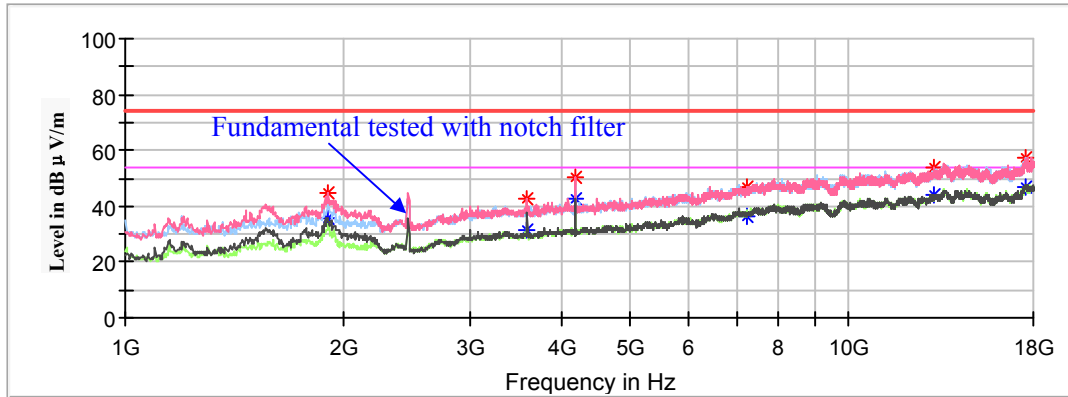

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1907.800000	---	35.57	150.0	V	89.0	-6.1	54.00	18.43
1907.800000	45.05	---	150.0	V	89.0	-6.1	74.00	28.95
3594.200000	---	31.16	150.0	V	343.0	-0.5	54.00	22.84
3594.200000	42.50	---	150.0	V	343.0	-0.5	74.00	31.50
4924.000000	---	42.77	150.0	V	153.0	2.0	54.00	11.23
4924.000000	50.23	---	150.0	V	153.0	2.0	74.00	23.77
7386.000000	---	36.66	150.0	V	0.0	9.4	54.00	17.34
7386.000000	46.55	---	150.0	V	0.0	9.4	74.00	27.45
13107.400000	53.64	---	150.0	V	76.0	13.8	74.00	20.36
13110.800000	---	44.03	150.0	V	76.0	13.8	54.00	9.97
17530.800000	---	46.99	150.0	H	18.0	17.2	54.00	7.01
17530.800000	57.27	---	150.0	H	18.0	17.2	74.00	16.73

802.11n-HT20 Mode(Chain0+Chain1)::


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

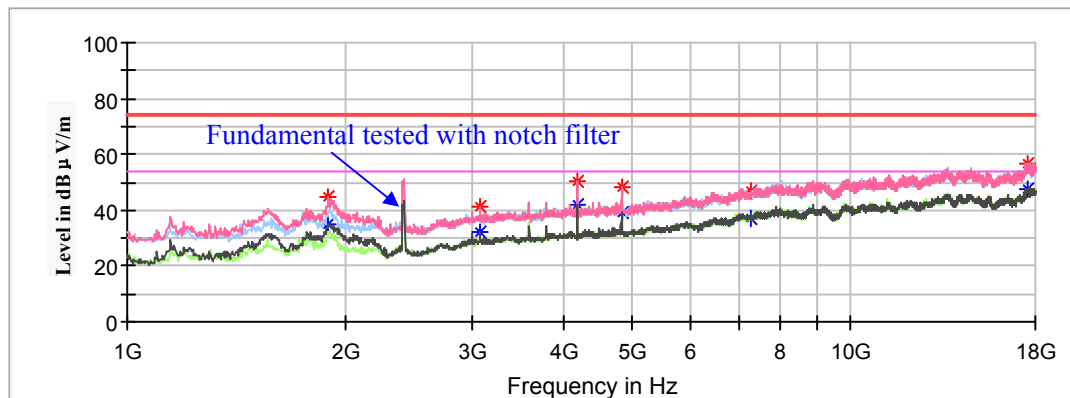

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1894.200000	44.94	---	150.0	V	84.0	-6.2	74.00	29.06
1894.200000	---	35.08	150.0	V	84.0	-6.2	54.00	18.92
3070.600000	41.56	---	150.0	V	199.0	-1.5	74.00	32.44
3070.600000	---	32.51	150.0	V	199.0	-1.5	54.00	21.49
4199.400000	50.11	---	150.0	V	161.0	1.1	74.00	23.89
4199.400000	---	42.16	150.0	V	161.0	1.1	54.00	11.84
4824.000000	48.25	---	150.0	V	339.0	1.9	74.00	25.75
4824.000000	---	39.27	150.0	V	339.0	1.9	54.00	14.73
7236.000000	---	37.02	150.0	V	199.0	9.0	54.00	16.98
7236.000000	47.00	---	150.0	V	199.0	9.0	74.00	27.00
17547.800000	---	47.86	150.0	V	46.0	17.2	54.00	6.14
17547.800000	56.56	---	150.0	V	46.0	17.2	74.00	17.44

Middle Channel: 2437MHz


Full Spectrum

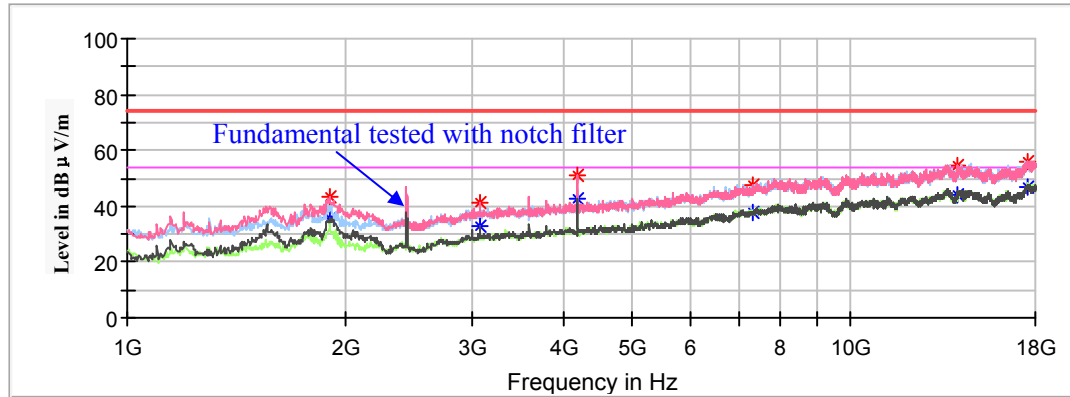

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1907.800000	---	35.56	150.0	V	84.0	-6.1	54.00	18.44
1907.800000	43.66	---	150.0	V	84.0	-6.1	74.00	30.34
3070.600000	---	32.84	150.0	V	199.0	-1.5	54.00	21.16
3070.600000	41.50	---	150.0	V	199.0	-1.5	74.00	32.50
4874.000000	---	42.65	150.0	V	161.0	1.9	54.00	11.35
4874.000000	51.05	---	150.0	V	161.0	1.9	74.00	22.95
7311.000000	---	37.54	150.0	V	71.0	9.2	54.00	16.46
7311.000000	47.40	---	150.0	V	71.0	9.2	74.00	26.60
14032.200000	54.68	---	150.0	V	148.0	14.9	74.00	19.32
14035.600000	---	43.89	150.0	V	148.0	14.9	54.00	10.11
17602.200000	---	46.68	150.0	V	10.0	17.3	54.00	7.32
17602.200000	56.13	---	150.0	V	10.0	17.3	74.00	17.87

High Channel: 2462MHz

Full Spectrum

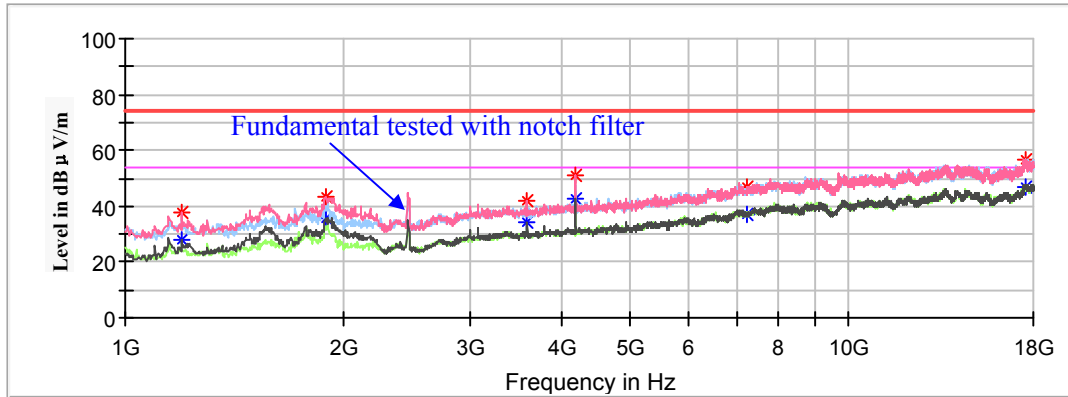

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1197.200000	---	28.07	150.0	V	140.0	-9.3	54.00	25.93
1197.200000	37.73	---	150.0	V	140.0	-9.3	74.00	36.27
1890.800000	---	35.76	150.0	V	89.0	-6.2	54.00	18.24
1890.800000	43.34	---	150.0	V	89.0	-6.2	74.00	30.66
3594.200000	42.23	---	150.0	V	332.0	-0.5	74.00	31.77
3597.600000	---	34.41	150.0	V	332.0	-0.5	54.00	19.59
4924.000000	---	42.43	150.0	V	153.0	2.0	54.00	11.57
4924.000000	50.70	---	150.0	V	153.0	2.0	74.00	23.30
7386.000000	---	36.83	150.0	H	117.0	9.4	54.00	17.17
7386.000000	46.64	---	150.0	H	117.0	9.4	74.00	27.36
17558.000000	---	47.10	150.0	H	17.0	17.3	54.00	6.90
17558.000000	56.92	---	150.0	H	17.0	17.3	74.00	17.08

802.11n-HT40 Mode(Chain0+Chain1)::


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2422MHz


Full Spectrum

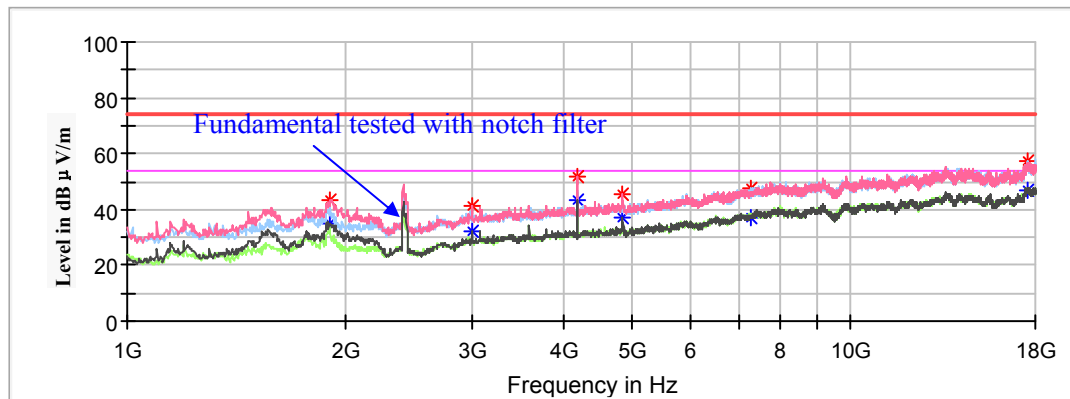

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1911.200000	---	35.14	150.0	V	83.0	-6.1	54.00	18.86
1911.200000	43.59	---	150.0	V	83.0	-6.1	74.00	30.41
2999.200000	---	31.92	150.0	V	135.0	-1.6	54.00	22.08
2999.200000	41.01	---	150.0	V	135.0	-1.6	74.00	32.99
4199.400000	---	43.56	150.0	V	160.0	1.1	54.00	10.44
4199.400000	51.71	---	150.0	V	160.0	1.1	74.00	22.29
4844.000000	---	37.00	150.0	V	70.0	1.9	54.00	17.00
4844.000000	45.32	---	150.0	V	70.0	1.9	74.00	28.68
7236.000000	---	37.39	150.0	H	1.0	9.0	54.00	16.61
7236.000000	47.56	---	150.0	H	1.0	9.0	74.00	26.44
17530.800000	---	47.18	150.0	H	302.0	17.2	54.00	6.82
17530.800000	57.00	---	150.0	H	302.0	17.2	74.00	17.00

Middle Channel: 2437MHz


Full Spectrum

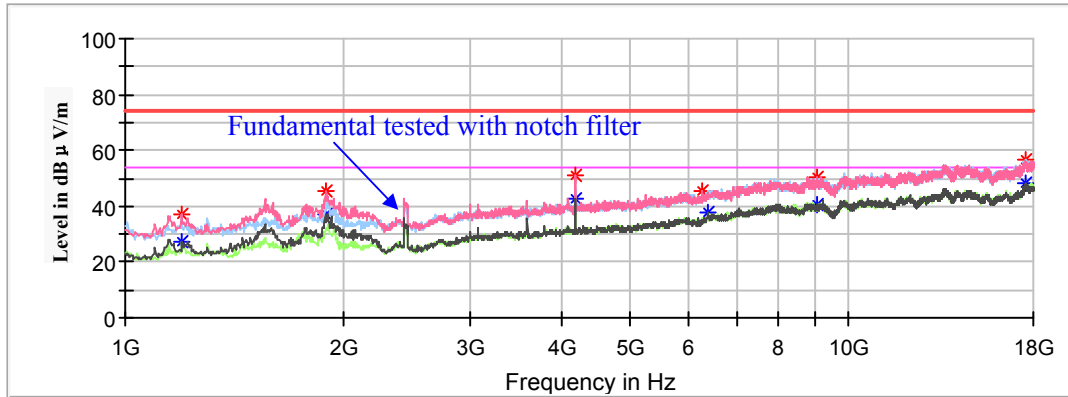

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1197.200000	---	27.49	150.0	H	85.0	-9.3	54.00	26.51
1197.200000	37.14	---	150.0	H	85.0	-9.3	74.00	36.86
1890.800000	---	36.94	150.0	V	83.0	-6.2	54.00	17.06
1897.600000	45.59	---	150.0	V	83.0	-6.2	74.00	28.41
4874.000000	---	42.58	150.0	V	160.0	1.9	54.00	11.42
4874.000000	51.19	---	150.0	V	160.0	1.9	74.00	22.81
7311.000000	45.55	---	150.0	V	355.0	9.2	74.00	28.45
7311.000000	---	37.47	150.0	V	355.0	9.2	54.00	16.53
9027.400000	---	40.44	150.0	V	288.0	11.7	54.00	13.56
9027.400000	50.68	---	150.0	V	288.0	11.7	74.00	23.32
17517.200000	---	48.31	150.0	V	135.0	17.2	54.00	5.69
17527.400000	56.69	---	150.0	V	135.0	17.2	74.00	17.31

High Channel: 2452MHz

Full Spectrum

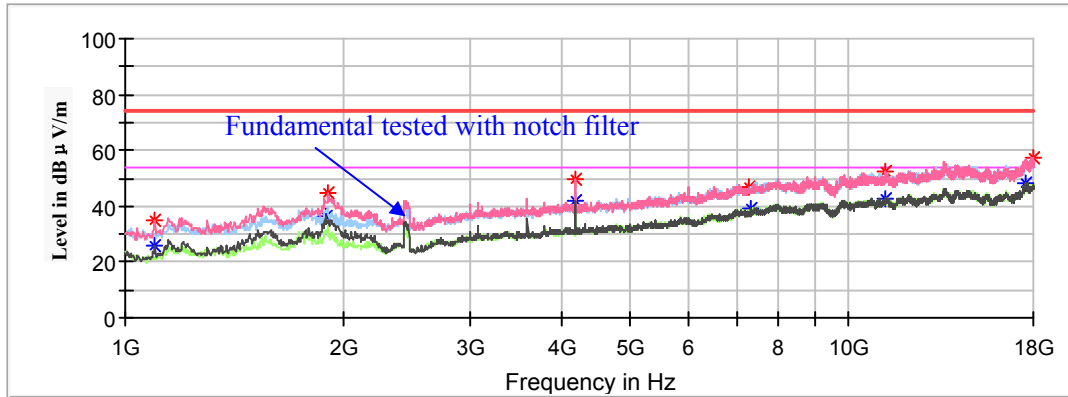


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1098.600000	34.63	---	150.0	V	97.0	-9.9	74.00	39.37
1098.600000	---	25.97	150.0	V	97.0	-9.9	54.00	28.03
1894.200000	---	36.48	150.0	V	84.0	-6.2	54.00	17.52
1911.200000	44.53	---	150.0	V	84.0	-6.1	74.00	29.47
4904.000000	---	41.94	150.0	V	333.0	1.9	54.00	12.06
4904.000000	49.65	---	150.0	V	333.0	1.9	74.00	24.35
7356.000000	46.88	---	150.0	V	351.0	9.3	74.00	27.12
7356.000000	---	38.85	150.0	V	351.0	9.3	54.00	15.15
11257.800000	52.19	---	150.0	V	296.0	13.2	74.00	21.81
11257.800000	---	43.00	150.0	V	296.0	13.1	54.00	11.00
17541.000000	---	48.34	150.0	V	6.0	17.2	54.00	5.66
17945.600000	57.32	---	150.0	V	6.0	17.7	74.00	16.68

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **Chain 1 low channel of 802.11b mode in X-axis of orientation** was recorded

Horizontal

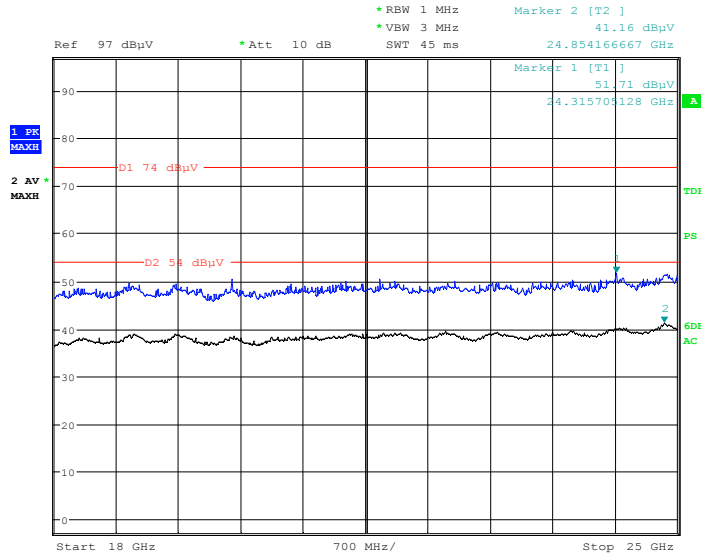

Date: 19.DEC.2018 12:50:09

Vertical

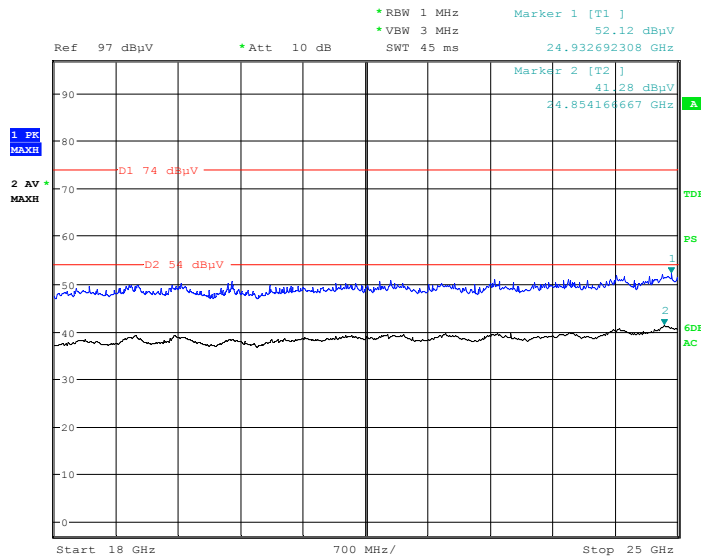

Date: 19.DEC.2018 13:05:46

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)**802.11b Mode (worst case: Chain 1):** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	109.53	---	250.0	V	346.0	6.1	/	/
2412.000000	---	107.24	250.0	V	346.0	6.1	/	/
2412.000000	107.29	---	150.0	V	138.0	6.1	/	/
2412.000000	---	105.03	150.0	V	138.0	6.1	/	/
2388.420000	50.22	---	150.0	V	275.0	6.0	74	23.78
2388.420000	---	40.7	150.0	V	275.0	6.0	54	13.30
Middle Channel: 2437MHz								
2437.000000	109.78	---	200.0	V	62.0	6.2	/	/
2437.000000	---	107.51	200.0	V	62.0	6.2	/	/
2437.000000	107.55	---	200.0	V	236.0	6.2	/	/
2437.000000	---	105.27	200.0	V	236.0	6.2	/	/
High Channel: 2462MHz								
2462.000000	109.41	---	100.0	V	273.0	6.2	/	/
2462.000000	---	107.42	100.0	V	273.0	6.2	/	/
2462.000000	107.03	---	150.0	V	208.0	6.2	/	/
2462.000000	---	104.96	150.0	V	208.0	6.2	/	/
2484.160000	---	43.10	150.0	V	215.0	6.3	54	10.90
2484.160000	52.73	---	150.0	V	215.0	6.3	74	21.27

802.11g Mode(worst case: Chain 1):: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	102.92	---	200.0	V	88.0	6.1	/	/
2412.000000	---	96.11	200.0	V	88.0	6.1	/	/
2412.000000	100.57	---	200.0	V	259.0	6.1	/	/
2412.000000	---	93.61	200.0	V	259.0	6.1	/	/
2389.274000	54.76	---	150.0	V	256.0	6.0	74	19.24
2389.274000	---	43.81	150.0	V	256.0	6.0	54	10.19
Middle Channel: 2437MHz								
2437.000000	99.53	---	150.0	V	50.0	6.2	/	/
2437.000000	---	92.51	150.0	V	50.0	6.2	/	/
2437.000000	97.40	---	200.0	V	154.0	6.2	/	/
2437.000000	---	90.33	200.0	V	154.0	6.2	/	/
High Channel: 2462MHz								
2462.000000	101.52	---	200.0	V	226.0	6.2	/	/
2462.000000	---	94.59	200.0	V	226.0	6.2	/	/
2462.000000	99.44	---	150.0	V	84.0	6.2	/	/
2462.000000	---	92.20	150.0	V	84.0	6.2	/	/
2484.000000	55.39	---	250.0	V	240.0	6.3	74	18.61
2484.000000	---	44.04	250.0	V	240.0	6.3	54	9.96

802.11n-HT20 Mode(Chain0+Chain1): (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	102.21	---	250.0	V	183.0	6.1	/	/
2412.000000	---	95.27	250.0	V	183.0	6.1	/	/
2412.000000	99.97	---	200.0	V	137.0	6.1	/	/
2412.000000	---	93.05	200.0	V	137.0	6.1	/	/
2385.946000	48.45	---	150.0	V	44.0	6.0	74	25.55
2385.946000	---	39.27	150.0	V	44.0	6.0	54	14.73
Middle Channel: 2437MHz								
2437.000000	101.56	---	200.0	V	16.0	6.2	/	/
2437.000000	---	94.74	200.0	V	16.0	6.2	/	/
2437.000000	99.53	---	100.0	V	207.0	6.2	/	/
2437.000000	---	92.29	100.0	V	207.0	6.2	/	/
High Channel: 2462MHz								
2462.000000	102.01	---	250.0	V	319.0	6.2	/	/
2462.000000	---	95.14	250.0	V	319.0	6.2	/	/
2462.000000	99.83	---	250.0	V	62.0	6.2	/	/
2462.000000	---	92.66	250.0	V	62.0	6.2	/	/
2484.544000	---	42.83	250.0	V	213.0	6.3	54	11.17
2484.544000	54.20	---	250.0	V	213.0	6.3	74	19.80

802.11n-HT40 Mode(Chain0+Chain1): (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2422.000000	100.56	---	250.0	V	307.0	6.1	/	/
2422.000000	---	93.35	250.0	V	307.0	6.1	/	/
2422.000000	98.31	---	100.0	V	339.0	6.1	/	/
2422.000000	---	91.34	100.0	V	339.0	6.1	/	/
2387.688000	---	51.18	250.0	V	308.0	6.0	54	2.82
2387.688000	62.51	---	250.0	V	308.0	6.0	74	11.49
Middle Channel: 2437MHz								
2437.000000	98.92	---	150.0	V	209.0	6.2	/	/
2437.000000	---	91.90	150.0	V	209.0	6.2	/	/
2437.000000	96.92	---	150.0	V	140.0	6.2	/	/
2437.000000	---	89.71	150.0	V	140.0	6.2	/	/
High Channel: 2452MHz								
2452.000000	99.36	---	150.0	V	58.0	6.2	/	/
2452.000000	---	92.27	150.0	V	58.0	6.2	/	/
2452.000000	97.10	---	250.0	V	222.0	6.2	/	/
2452.000000	---	90.04	250.0	V	222.0	6.2	/	/
2484.032000	---	46.78	200.0	V	265.0	6.3	54	7.22
2484.032000	61.25	---	200.0	V	265.0	6.3	74	12.75

Spurious Emission Test (POE power supply):**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **Chain 1 low channel of 802.11b mode in X-axis of orientation** was recorded

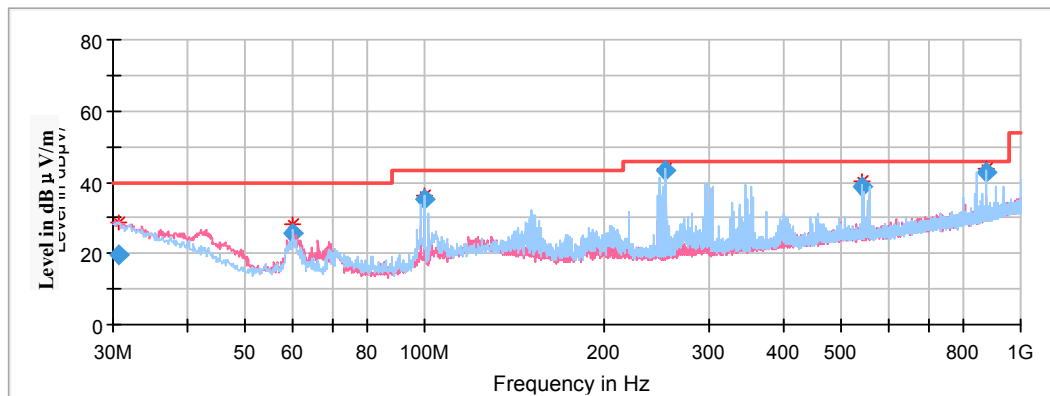

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.726427	19.80	101.0	V	167.0	-4.4	40.00	20.20
60.219750	25.56	101.0	V	276.0	-17.9	40.00	14.44
100.009250	35.41	198.0	H	133.0	-14.9	43.50	8.09
252.785450	43.45	101.0	H	141.0	-12.0	46.00	2.55
543.072100	38.87	198.0	H	280.0	-5.7	46.00	7.13
875.039300	43.01	101.0	H	114.0	-0.5	46.00	2.99

1GHz-18GHz:**802.11b Mode(worst case: Chain 1):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

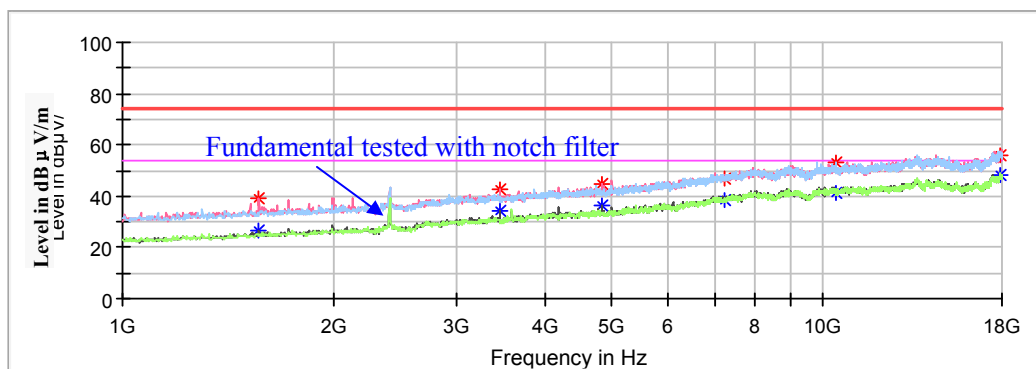

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1567.800000	---	26.60	200.0	V	210.0	-7.3	54.00	27.40
1567.800000	38.99	---	200.0	V	210.0	-7.3	74.00	35.01
3454.800000	---	34.28	200.0	V	231.0	-0.9	54.00	19.72
3454.800000	42.83	---	200.0	V	231.0	-0.9	74.00	31.17
4824.000000	---	36.10	150.0	V	219.0	1.9	54.00	17.90
4824.000000	44.84	---	150.0	V	219.0	1.9	74.00	29.16
7236.000000	46.94	---	200.0	H	59.0	9.0	74.00	27.06
7236.000000	---	38.77	200.0	H	59.0	9.0	54.00	15.23
10411.200000	---	41.46	200.0	H	253.0	12.7	54.00	12.54
10411.200000	52.88	---	200.0	H	253.0	12.7	74.00	21.12
17918.400000	56.26	---	100.0	V	351.0	17.6	74.00	17.74
17918.400000	---	48.58	100.0	V	351.0	17.6	54.00	5.42

Middle Channel: 2437MHz


Full Spectrum

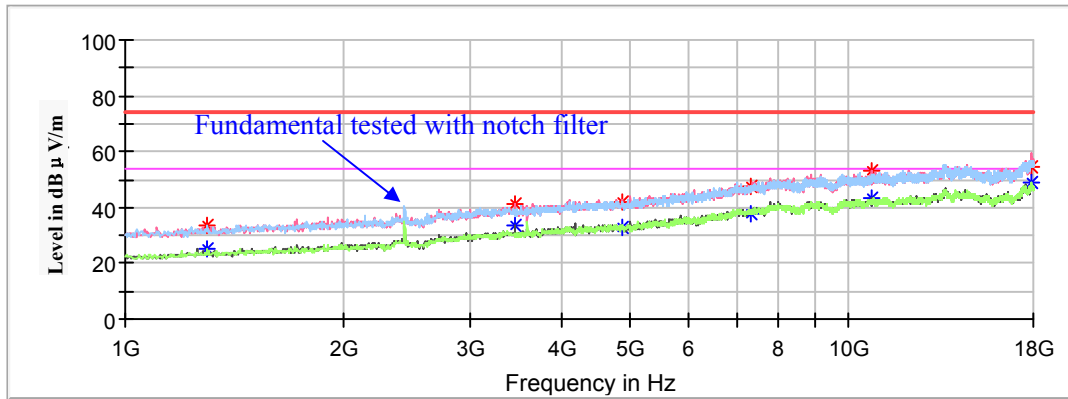

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1299.200000	33.76	---	150.0	H	236.0	-8.7	74.00	40.24
1299.200000	---	25.22	150.0	H	236.0	-8.7	54.00	28.78
3454.800000	---	33.34	150.0	V	80.0	-0.9	54.00	20.66
3454.800000	41.56	---	150.0	V	80.0	-0.9	74.00	32.44
4874.000000	---	33.00	150.0	H	215.0	1.9	54.00	21.00
4874.000000	41.70	---	150.0	H	215.0	1.9	74.00	32.30
7311.000000	---	37.92	150.0	V	355.0	9.2	54.00	16.08
7311.000000	47.25	---	150.0	V	355.0	9.2	74.00	26.75
10761.400000	---	43.02	150.0	V	232.0	13.1	54.00	10.98
10761.400000	52.89	---	150.0	V	232.0	13.1	74.00	21.11
17921.800000	54.62	---	150.0	H	98.0	17.6	74.00	19.38
17921.800000	---	48.77	150.0	H	98.0	17.6	54.00	5.23

High Channel: 2462MHz

Full Spectrum

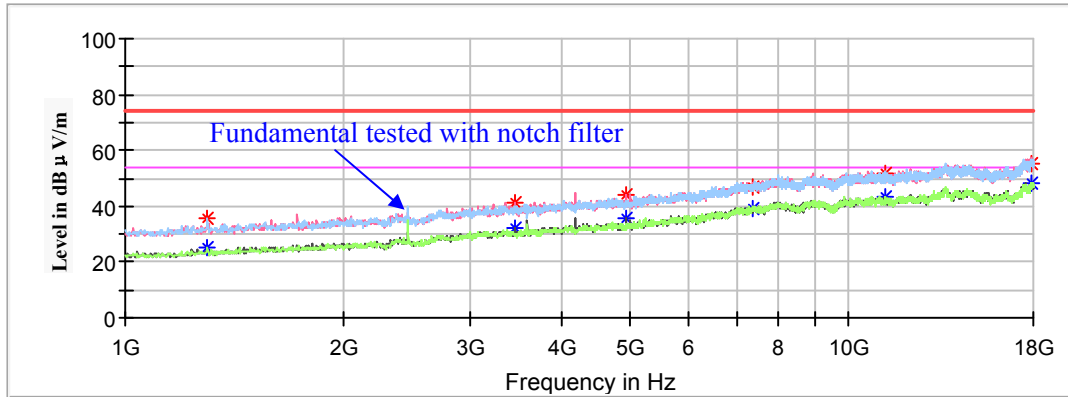

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1299.200000	35.62	---	150.0	H	235.0	-8.7	74.00	38.38
1299.200000	---	24.97	150.0	H	235.0	-8.7	54.00	29.03
3454.800000	---	32.33	150.0	V	321.0	-0.9	54.00	21.67
3454.800000	41.16	---	150.0	V	321.0	-0.9	74.00	32.84
4924.000000	44.11	---	150.0	V	225.0	2.0	74.00	29.89
4924.000000	---	35.35	150.0	V	225.0	2.0	54.00	18.65
7386.000000	---	39.26	150.0	H	107.0	9.4	54.00	14.74
7386.000000	46.98	---	150.0	H	107.0	9.4	74.00	27.02
11220.400000	---	43.29	150.0	V	279.0	13.2	54.00	10.71
11220.400000	51.99	---	150.0	V	279.0	13.2	74.00	22.01
17901.400000	55.40	---	150.0	V	279.0	17.6	74.00	18.60
17901.400000	---	48.38	150.0	V	279.0	17.6	54.00	5.62

802.11g Mode(worst case: Chain 1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2412MHz


Full Spectrum

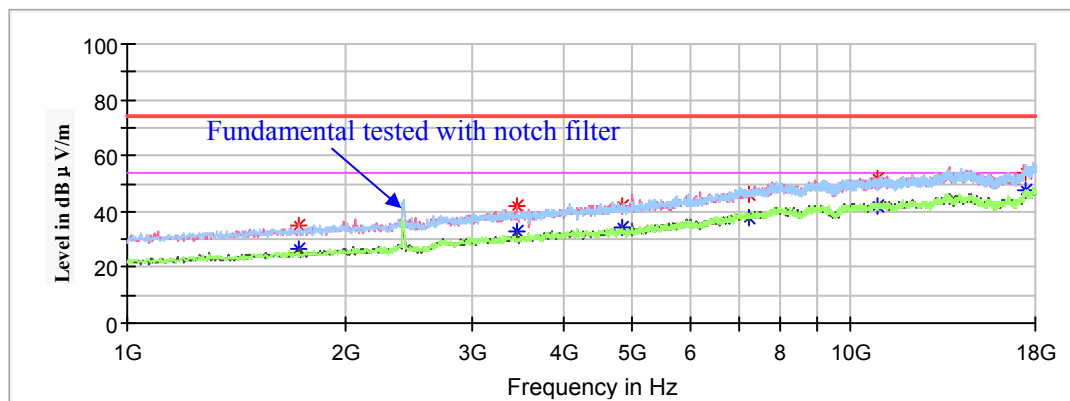

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1724.200000	---	26.40	150.0	V	113.0	-6.8	54.00	27.60
1724.200000	35.24	---	150.0	V	113.0	-6.8	74.00	38.76
3454.800000	---	32.69	150.0	V	242.0	-0.9	54.00	21.31
3454.800000	41.84	---	150.0	V	242.0	-0.9	74.00	32.16
4824.000000	---	34.20	150.0	V	188.0	1.9	54.00	19.80
4824.000000	42.18	---	150.0	V	188.0	1.9	74.00	31.82
7236.000000	46.18	---	150.0	H	64.0	9.0	74.00	27.82
7236.000000	---	37.80	150.0	H	64.0	9.0	54.00	16.20
10880.400000	---	41.71	150.0	V	18.0	13.3	54.00	12.29
10880.400000	51.76	---	150.0	V	18.0	13.3	74.00	22.24
17476.400000	54.19	---	150.0	V	347.0	17.1	74.00	19.81
17476.400000	---	47.56	150.0	V	347.0	17.1	54.00	6.44

Middle Channel: 2437MHz


Full Spectrum

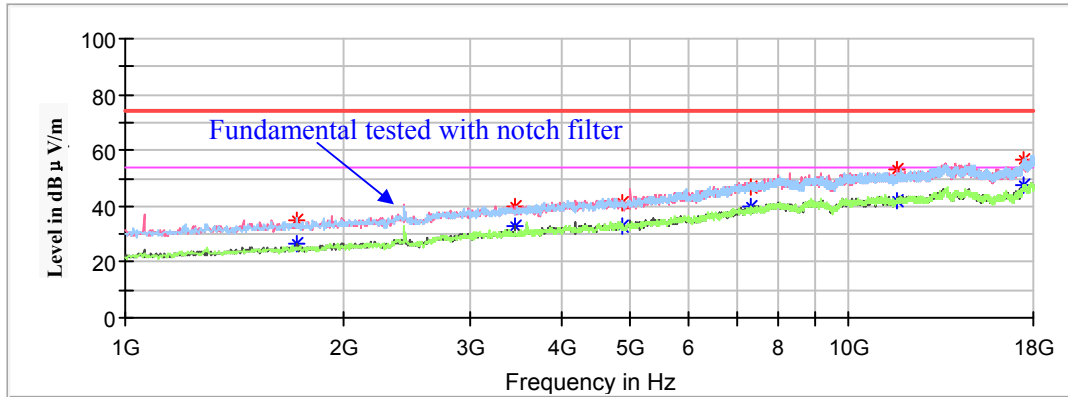

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1724.200000	34.79	---	150.0	V	106.0	-6.8	74.00	39.21
1724.200000	---	26.57	150.0	V	106.0	-6.8	54.00	27.43
3454.800000	40.17	---	150.0	V	241.0	-0.9	74.00	33.83
3454.800000	---	33.06	150.0	V	241.0	-0.9	54.00	20.94
4874.000000	---	32.55	150.0	H	123.0	1.9	54.00	21.45
4874.000000	41.44	---	150.0	H	123.0	1.9	74.00	32.56
7311.000000	46.84	---	150.0	H	112.0	9.2	74.00	27.16
7311.000000	---	39.64	150.0	H	112.0	9.2	54.00	14.36
11696.400000	---	41.82	150.0	V	0.0	13.0	54.00	12.18
11696.400000	53.29	---	150.0	V	0.0	13.0	74.00	20.71
17496.800000	56.51	---	150.0	V	354.0	17.2	74.00	17.49
17496.800000	---	47.87	150.0	V	354.0	17.2	54.00	6.13

High Channel: 2462MHz

Full Spectrum

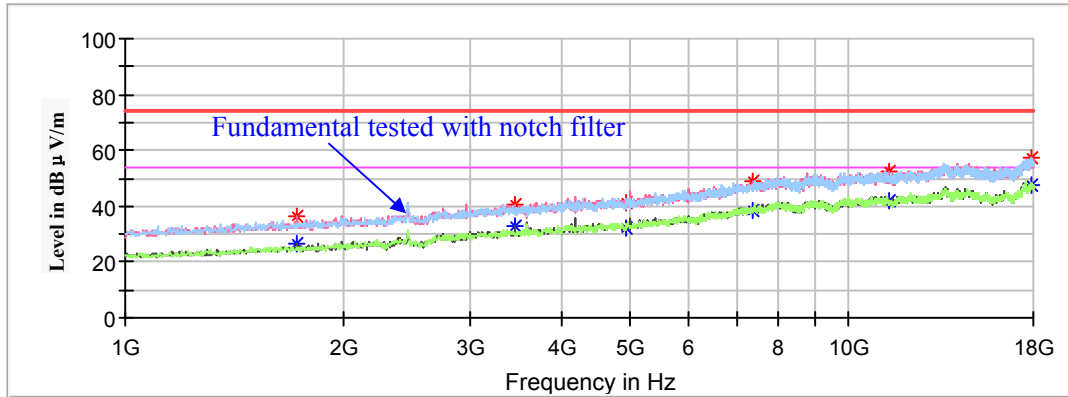

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1724.200000	---	26.68	150.0	V	119.0	-6.8	54.00	27.32
1724.200000	36.26	---	150.0	V	119.0	-6.8	74.00	37.74
3454.800000	---	32.84	150.0	V	237.0	-0.9	54.00	21.16
3454.800000	40.62	---	150.0	V	237.0	-0.9	74.00	33.38
4924.000000	---	32.48	150.0	H	49.0	2.0	54.00	21.52
4924.000000	41.19	---	150.0	H	49.0	2.0	74.00	32.81
7386.000000	---	38.55	150.0	V	141.0	9.4	54.00	15.45
7386.000000	49.26	---	150.0	V	141.0	9.4	74.00	24.74
11349.600000	---	41.85	150.0	V	248.0	13.0	54.00	12.15
11349.600000	52.17	---	150.0	V	248.0	13.0	74.00	21.83
17908.200000	---	47.81	150.0	H	27.0	17.6	54.00	6.19
17908.200000	57.51	---	150.0	H	27.0	17.6	74.00	16.49

802.11n-HT20 Mode(Chain0+Chain1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Low Channel: 2412MHz


Full Spectrum

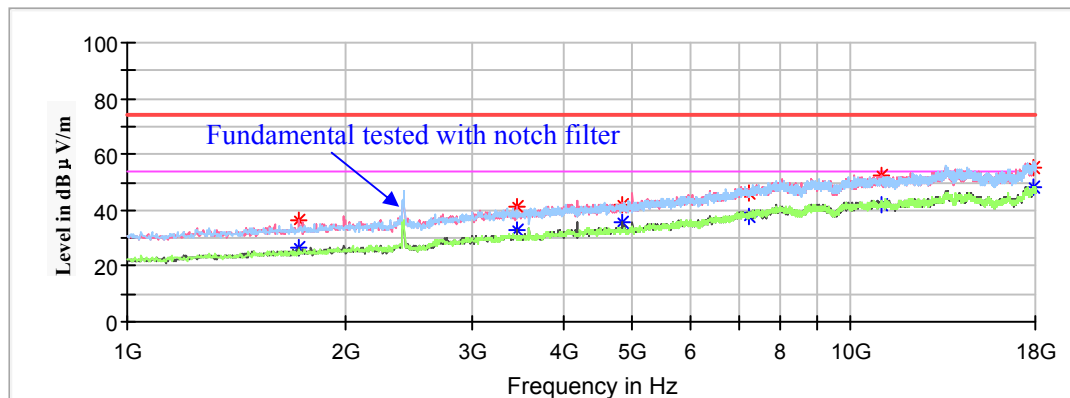

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1724.200000	---	26.30	150.0	V	291.0	-6.8	54.00	27.70
1724.200000	36.63	---	150.0	V	291.0	-6.8	74.00	37.37
3454.800000	---	32.93	150.0	V	80.0	-0.9	54.00	21.07
3454.800000	41.17	---	150.0	V	80.0	-0.9	74.00	32.83
4824.000000	41.71	---	150.0	V	195.0	1.9	74.00	32.29
4824.000000	---	35.65	150.0	V	195.0	1.9	54.00	18.35
7236.000000	---	38.01	150.0	V	125.0	9.0	54.00	15.99
7236.000000	46.12	---	150.0	V	125.0	9.0	74.00	27.88
11023.200000	---	42.11	150.0	V	80.0	13.5	54.00	11.89
11023.200000	52.14	---	150.0	V	80.0	13.5	74.00	21.86
17898.000000	55.17	---	150.0	H	8.0	17.6	74.00	18.83
17898.000000	---	48.51	150.0	H	8.0	17.6	54.00	5.49

Middle Channel: 2437MHz


Full Spectrum

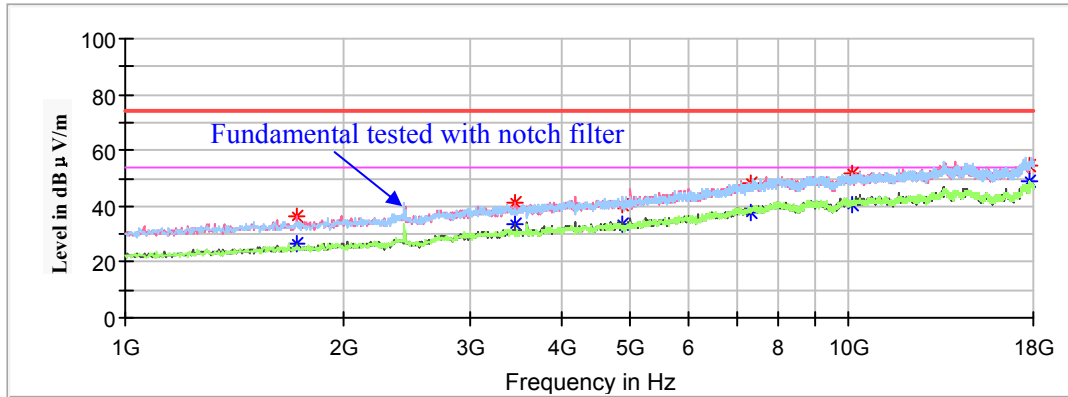

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1727.600000	36.01	---	150.0	V	291.0	-6.8	74.00	37.99
1727.600000	---	26.85	150.0	V	291.0	-6.8	54.00	27.15
3454.800000	41.58	---	150.0	V	238.0	-0.9	74.00	32.42
3454.800000	---	33.26	150.0	V	238.0	-0.9	54.00	20.74
4874.000000	40.45	---	150.0	V	206.0	1.9	74.00	33.55
4874.000000	---	33.63	150.0	V	206.0	1.9	54.00	20.37
7311.000000	---	38.07	150.0	V	92.0	9.2	54.00	15.93
7311.000000	48.07	---	150.0	V	92.0	9.2	74.00	25.93
10091.600000	---	40.48	150.0	H	302.0	12.6	54.00	13.52
10091.600000	51.56	---	150.0	H	302.0	12.6	74.00	22.44
17819.800000	54.83	---	150.0	H	0.0	17.5	74.00	19.17
17819.800000	---	48.99	150.0	H	0.0	17.5	54.00	5.01

High Channel: 2462MHz

Full Spectrum

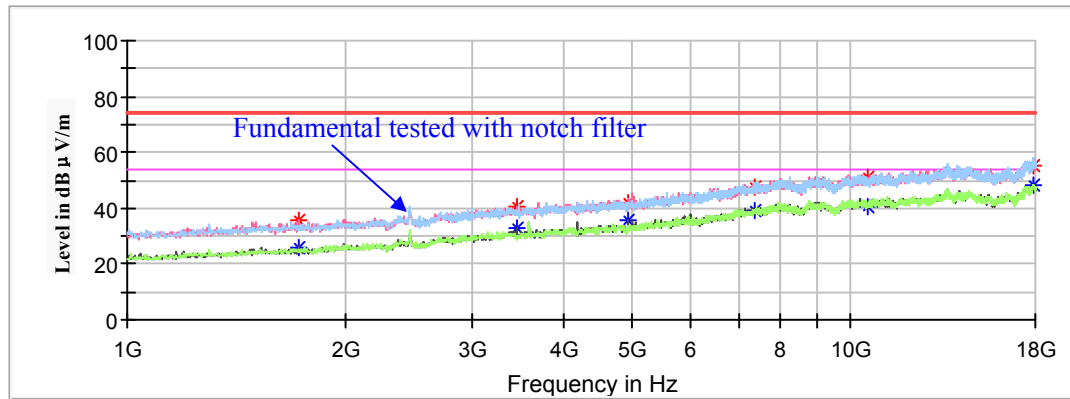

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1724.200000	---	25.96	150.0	V	140.0	-6.8	54.00	28.04
1724.200000	35.38	---	150.0	V	140.0	-6.8	74.00	38.62
3454.800000	---	32.78	150.0	V	236.0	-0.9	54.00	21.22
3454.800000	40.91	---	150.0	V	236.0	-0.9	74.00	33.09
4924.000000	41.79	---	150.0	V	194.0	2.0	74.00	32.21
4924.000000	---	35.37	150.0	V	194.0	2.0	54.00	18.63
7386.000000	47.67	---	150.0	V	322.0	9.4	74.00	26.33
7386.000000	---	39.31	150.0	V	322.0	9.4	54.00	14.69
10526.800000	---	40.66	150.0	V	12.0	12.8	54.00	13.34
10526.800000	51.18	---	150.0	V	12.0	12.8	74.00	22.82
17918.400000	55.06	---	150.0	V	301.0	17.6	74.00	18.94
17918.400000	---	48.42	150.0	V	301.0	17.6	54.00	5.58

802.11n-HT40 Mode(Chain0+Chain1):


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2422MHz


Full Spectrum

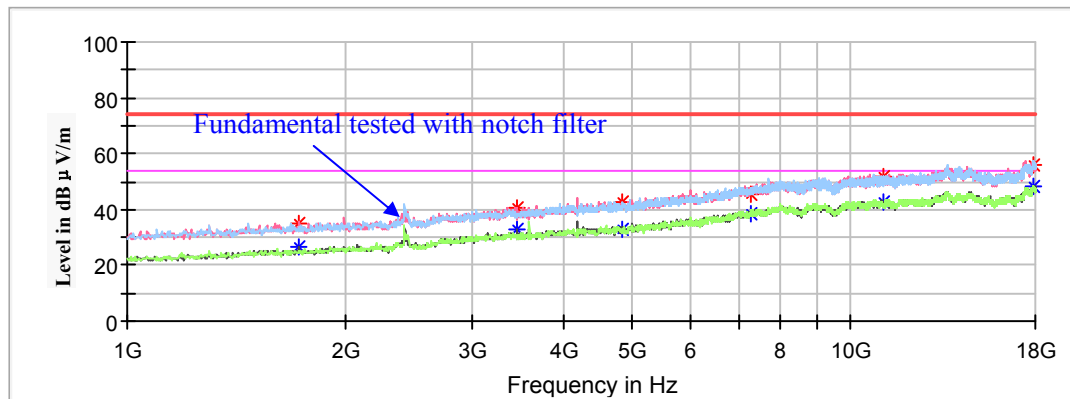

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1727.600000	35.27	---	150.0	V	132.0	-6.8	74.00	38.73
1727.600000	---	26.44	150.0	V	132.0	-6.8	54.00	27.56
3454.800000	40.87	---	150.0	V	239.0	-0.9	74.00	33.13
3454.800000	---	32.67	150.0	V	239.0	-0.9	54.00	21.33
4844.000000	---	32.99	150.0	H	171.0	1.9	54.00	21.01
4844.000000	42.41	---	150.0	H	171.0	1.9	74.00	31.59
7266.000000	45.63	---	150.0	H	314.0	9.1	74.00	28.37
7266.000000	---	38.62	150.0	H	314.0	9.1	54.00	15.38
11084.400000	---	42.58	150.0	V	110.0	13.4	54.00	11.42
11084.400000	51.97	---	150.0	V	110.0	13.4	74.00	22.03
17925.200000	56.14	---	150.0	H	3.0	17.6	74.00	17.86
17925.200000	---	48.38	150.0	H	3.0	17.6	54.00	5.62

Middle Channel: 2437MHz


Full Spectrum

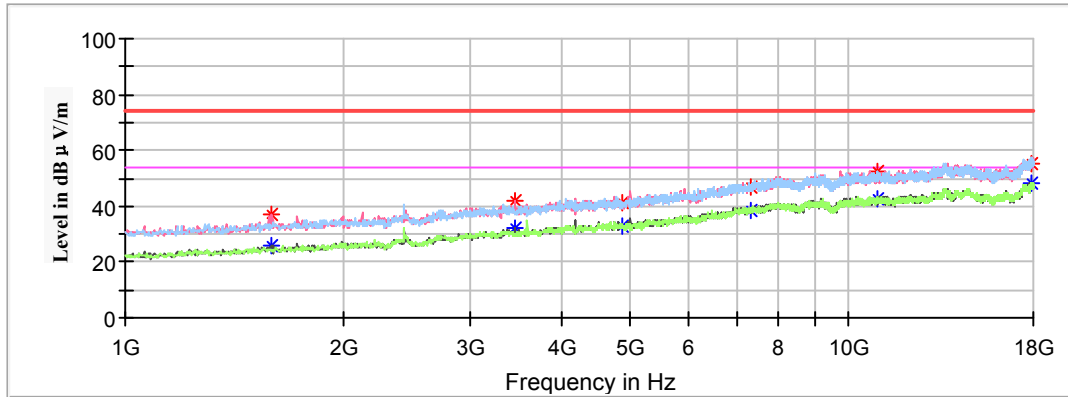

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	---	26.13	150.0	V	200.0	-7.2	54.00	27.87
1595.000000	36.97	---	150.0	V	200.0	-7.2	74.00	37.03
3454.800000	---	31.83	150.0	V	232.0	-0.9	54.00	22.17
3454.800000	41.81	---	150.0	V	232.0	-0.9	74.00	32.19
4874.000000	---	32.91	150.0	V	307.0	1.9	54.00	21.09
4874.000000	40.92	---	150.0	V	307.0	1.9	74.00	33.08
7311.000000	47.01	---	150.0	V	359.0	9.2	74.00	26.99
7311.000000	---	38.33	150.0	V	359.0	9.2	54.00	15.67
10972.200000	---	42.41	150.0	H	224.0	13.4	54.00	11.59
10972.200000	52.17	---	150.0	H	224.0	13.4	74.00	21.83
17932.000000	55.33	---	150.0	H	106.0	17.6	74.00	18.67
17932.000000	---	48.26	150.0	H	106.0	17.6	54.00	5.74

High Channel: 2452MHz


Full Spectrum

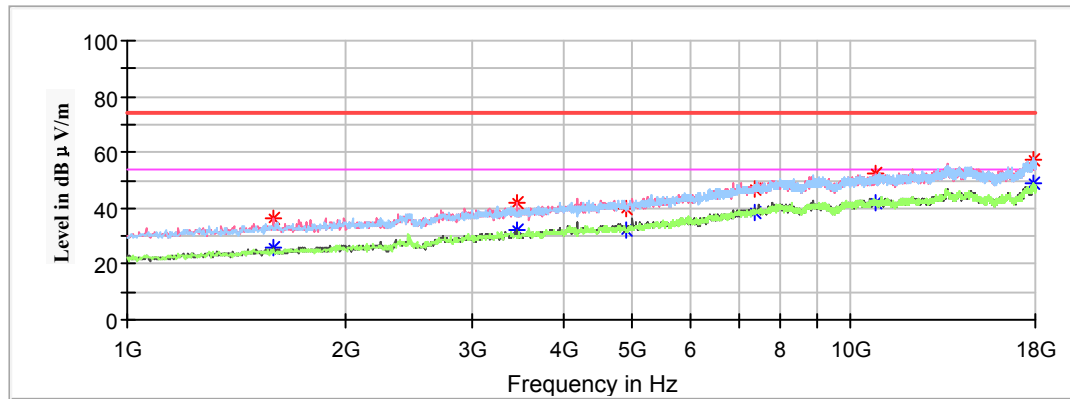


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1595.000000	---	25.86	150.0	V	191.0	-7.2	54.00	28.14
1595.000000	36.61	---	150.0	V	191.0	-7.2	74.00	37.39
3454.800000	---	31.98	150.0	V	281.0	-0.9	54.00	22.02
3454.800000	42.26	---	150.0	V	281.0	-0.9	74.00	31.74
4904.000000	39.95	---	150.0	V	92.0	2.0	74.00	34.05
4904.000000	---	32.23	150.0	V	92.0	2.0	54.00	21.77
7356.000000	---	38.65	150.0	H	112.0	9.3	54.00	15.35
7356.000000	46.96	---	150.0	H	112.0	9.3	74.00	27.04
10856.600000	---	42.02	150.0	V	115.0	13.3	54.00	11.98
10856.600000	52.53	---	150.0	V	115.0	13.3	74.00	21.47
17918.400000	57.14	---	150.0	V	313.0	17.6	74.00	16.86
17918.400000	---	48.66	150.0	V	313.0	17.6	54.00	5.34

18GHz-25GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **Chain 1 low channel of 802.11b mode in X-axis of orientation** was recorded

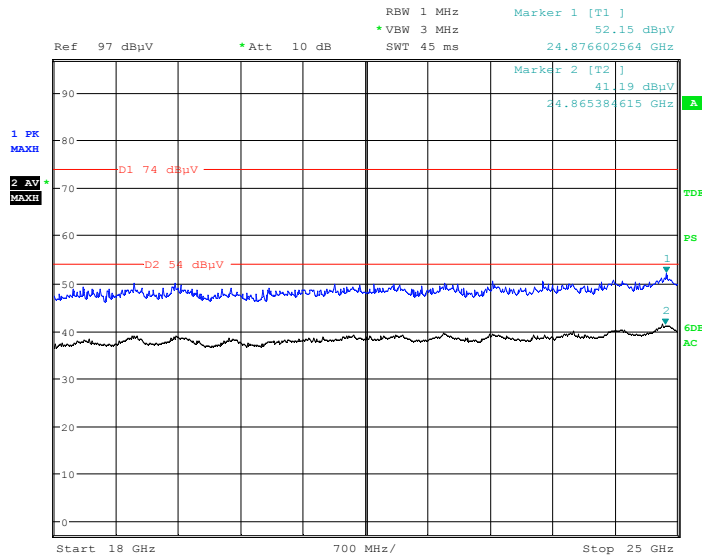Horizontal

Date: 18.JAN.2019 11:47:45

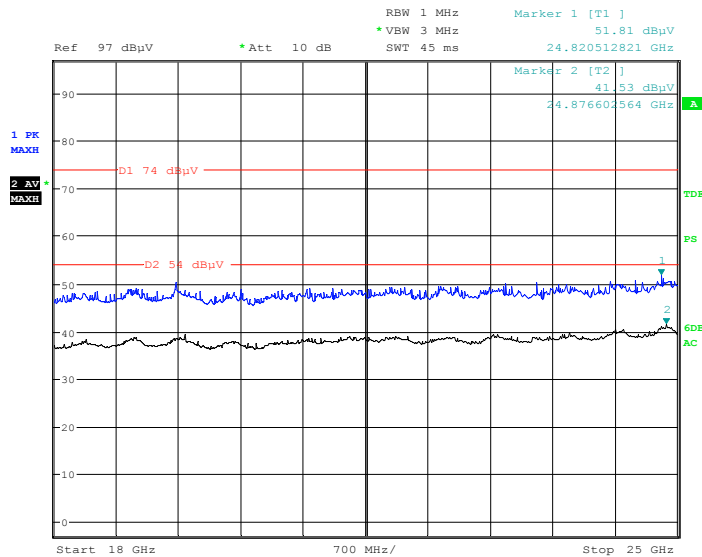Vertical

Date: 18.JAN.2019 12:05:24

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)**802.11b Mode (worst case: Chain 1):** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	109.53	---	250.0	V	154.0	6.1	/	/
2412.000000	---	106.55	250.0	V	154.0	6.1	/	/
2412.000000	107.03	---	200.0	V	127.0	6.1	/	/
2412.000000	---	104.23	200.0	V	127.0	6.1	/	/
2388.420000	---	40.28	250.0	V	295.0	6.0	54.00	13.72
2388.420000	51.02	---	250.0	V	295.0	6.0	74.00	22.98
Middle Channel: 2437MHz								
2437.000000	108.39	---	150.0	V	206.0	6.2	/	/
2437.000000	---	105.23	150.0	V	206.0	6.2	/	/
2437.000000	106.01	---	100.0	V	217.0	6.2	/	/
2437.000000	---	102.78	100.0	V	217.0	6.2	/	/
High Channel: 2462MHz								
2462.000000	108.67	---	150.0	V	233.0	6.2	/	/
2462.000000	---	105.72	150.0	V	233.0	6.2	/	/
2462.000000	106.27	---	250.0	V	44.0	6.2	/	/
2462.000000	---	103.39	250.0	V	44.0	6.2	/	/
2484.160000	50.72	---	250.0	V	12.0	6.3	74.00	23.28
2484.160000	---	39.45	250.0	V	12.0	6.3	54.00	14.55

802.11g Mode (worst case: Chain 1): (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	101.08	---	200.0	V	3.0	6.1	/	/
2412.000000	---	95.98	200.0	V	3.0	6.1	/	/
2412.000000	98.72	---	200.0	V	154.0	6.1	/	/
2412.000000	---	93.72	200.0	V	154.0	6.1	/	/
2389.274000	---	39.68	200.0	V	293.0	6.0	54.00	14.32
2389.274000	48.56	---	200.0	V	293.0	6.0	74.00	25.44
Middle Channel: 2437MHz								
2437.000000	102.63	---	250.0	V	166.0	6.2	/	/
2437.000000	---	97.68	250.0	V	166.0	6.2	/	/
2437.000000	100.30	---	250.0	V	352.0	6.2	/	/
2437.000000	---	95.65	250.0	V	352.0	6.2	/	/
High Channel: 2462MHz								
2462.000000	100.54	---	200.0	V	350.0	6.2	/	/
2462.000000	---	95.55	200.0	V	350.0	6.2	/	/
2462.000000	98.16	---	200.0	V	341.0	6.2	/	/
2462.000000	---	93.46	200.0	V	341.0	6.2	/	/
2484.000000	49.25	---	200.0	V	247.0	6.3	74.00	24.75
2484.000000	---	38.54	200.0	V	247.0	6.3	54.00	15.46

802.11n-HT20 Mode(Chain0+Chain1): (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	100.12	---	250.0	H	124.0	6.1	/	/
2412.000000	---	95.09	250.0	H	124.0	6.1	/	/
2412.000000	98.03	---	200.0	V	56.0	6.1	/	/
2412.000000	---	92.61	200.0	V	56.0	6.1	/	/
2385.946000	50.01	---	250.0	H	114.0	6.0	74.00	23.99
2385.946000	---	39.57	250.0	H	114.0	6.0	54.00	14.43
Middle Channel: 2437MHz								
2437.000000	100.25	---	250.0	H	333.0	6.2	/	/
2437.000000	---	95.09	250.0	H	333.0	6.2	/	/
2437.000000	97.86	---	200.0	V	56.0	6.2	/	/
2437.000000	---	92.72	200.0	V	56.0	6.2	/	/
High Channel: 2462MHz								
2462.000000	100.90	---	150.0	H	284.0	6.2	/	/
2462.000000	---	95.74	150.0	H	284.0	6.2	/	/
2462.000000	98.86	---	150.0	V	338.0	6.2	/	/
2462.000000	---	93.30	150.0	V	338.0	6.2	/	/
2484.544000	51.33	---	250.0	H	241.0	6.3	74.00	22.67
2484.544000	---	40.16	250.0	H	241.0	6.3	54.00	13.84


802.11n-HT40 Mode(Chain0+Chain1): (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2422.000000	100.04	---	150.0	H	242.0	6.1	/	/
2422.000000	---	95.09	150.0	H	242.0	6.1	/	/
2422.000000	97.71	---	200.0	V	318.0	6.1	/	/
2422.000000	---	93.07	200.0	V	318.0	6.1	/	/
2387.688000	60.78	---	150.0	H	286.0	6.0	74.00	13.22
2387.688000	---	49.21	150.0	H	286.0	6.0	54.00	4.79
Middle Channel: 2437MHz								
2437.000000	100.78	---	200.0	H	146.0	6.2	/	/
2437.000000	---	95.74	200.0	H	146.0	6.2	/	/
2437.000000	98.33	---	200.0	V	10.0	6.2	/	/
2437.000000	---	93.47	200.0	V	10.0	6.2	/	/
High Channel: 2452MHz								
2452.000000	100.24	---	150.0	H	196.0	6.2	/	/
2452.000000	---	95.14	150.0	H	196.0	6.2	/	/
2452.000000	98.05	---	150.0	V	64.0	6.2	/	/
2452.000000	---	93.10	150.0	V	64.0	6.2	/	/
2484.032000	61.29	---	250.0	H	254.0	6.3	74.00	12.71
2484.032000	---	48.55	250.0	H	254.0	6.3	54.00	5.45


Chain 0:

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

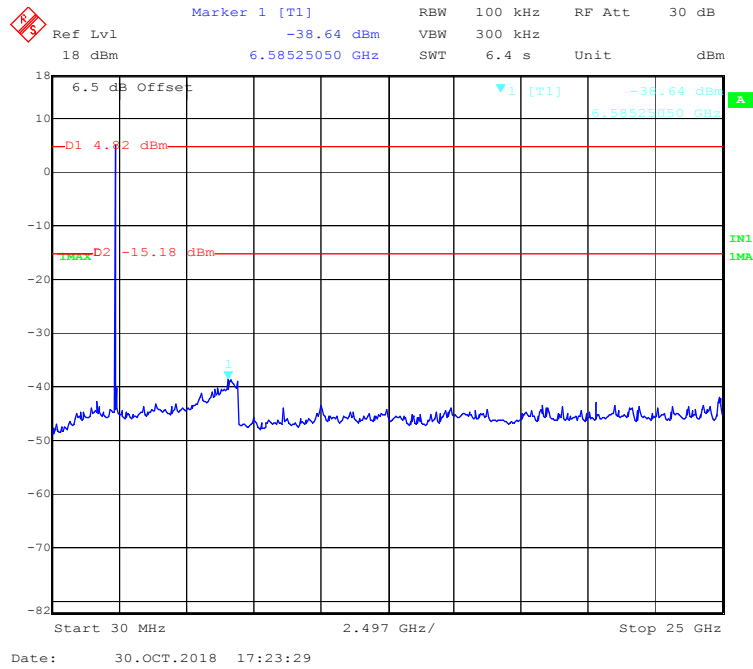


802.11b Mode Middle Channel

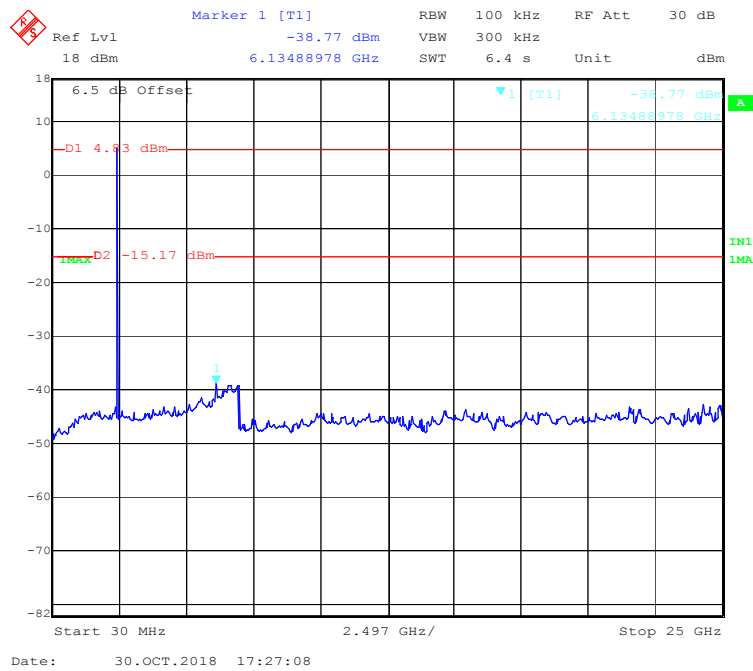


802.11b Mode High Channel

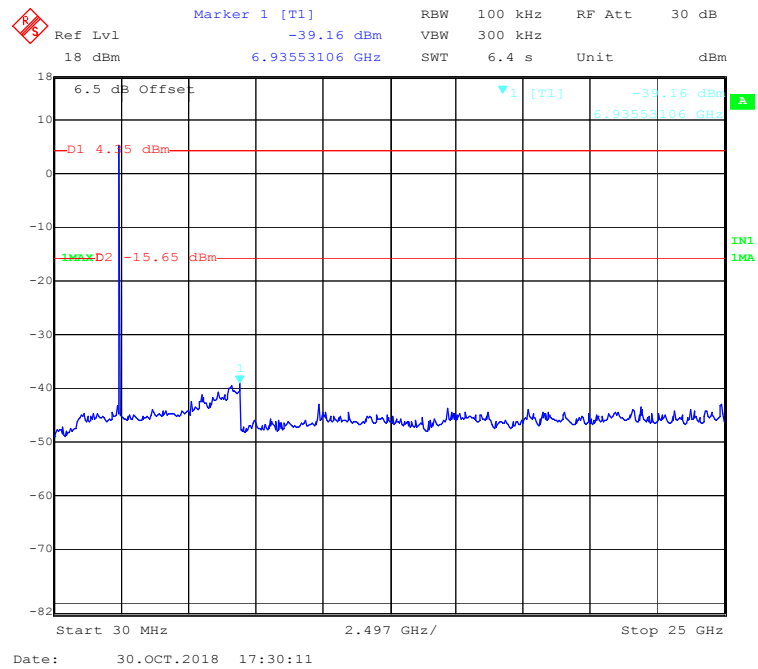


802.11g Mode Low Channel

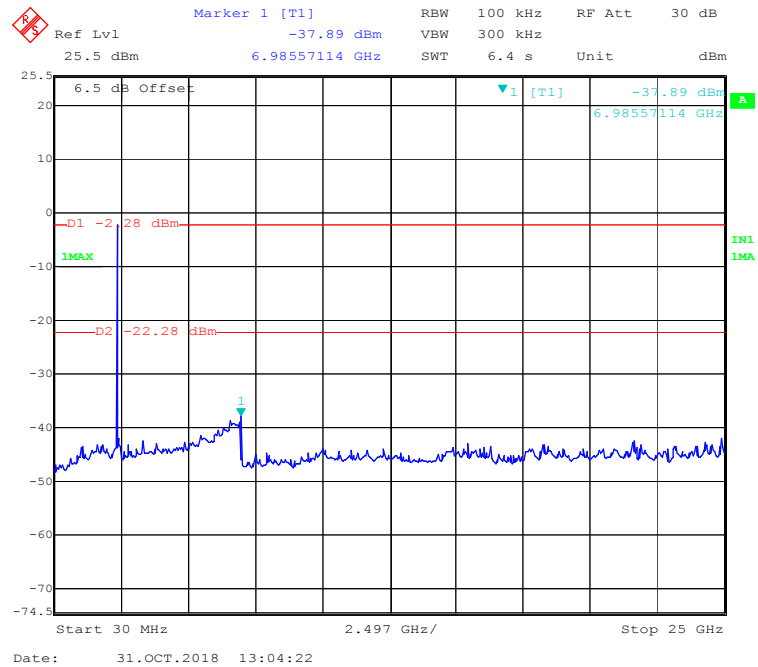


802.11g Mode Middle Channel

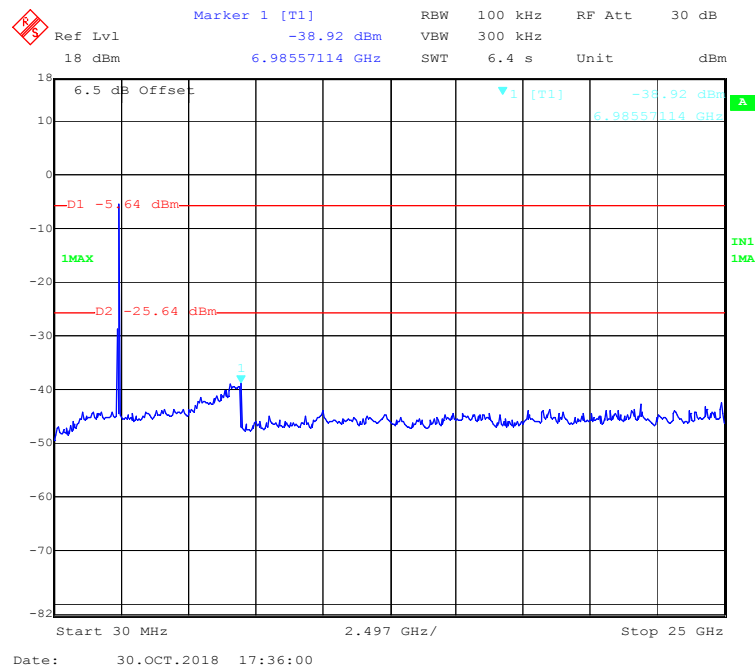


802.11g Mode High Channel

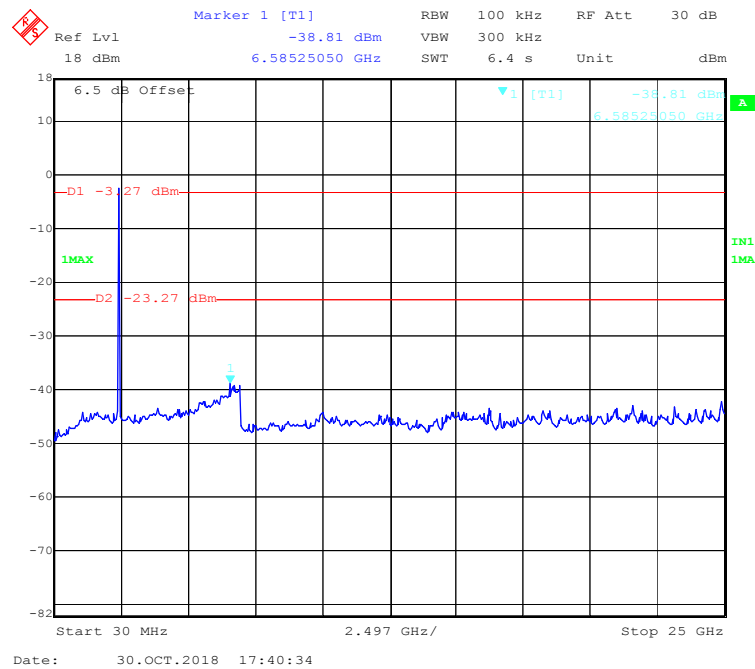


802.11n-HT20 Mode Low Channel

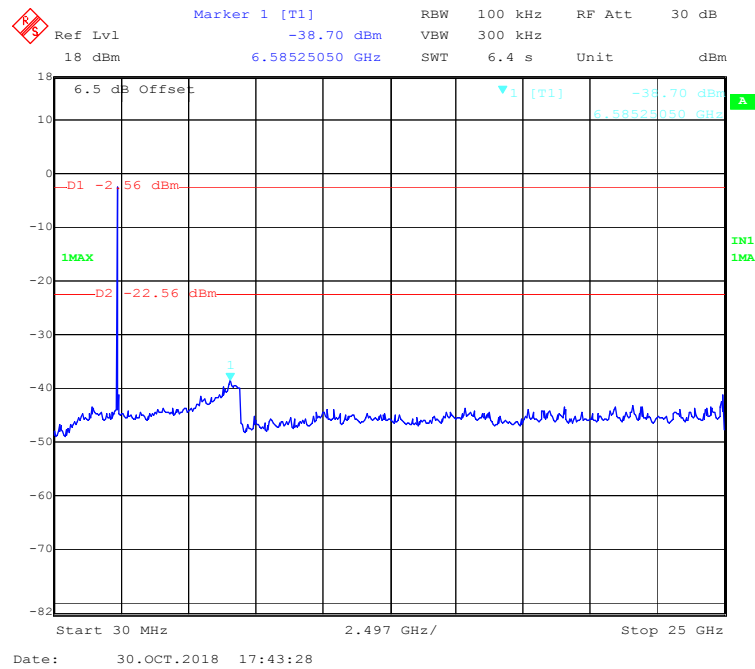


802.11n-HT20 Mode Middle Channel

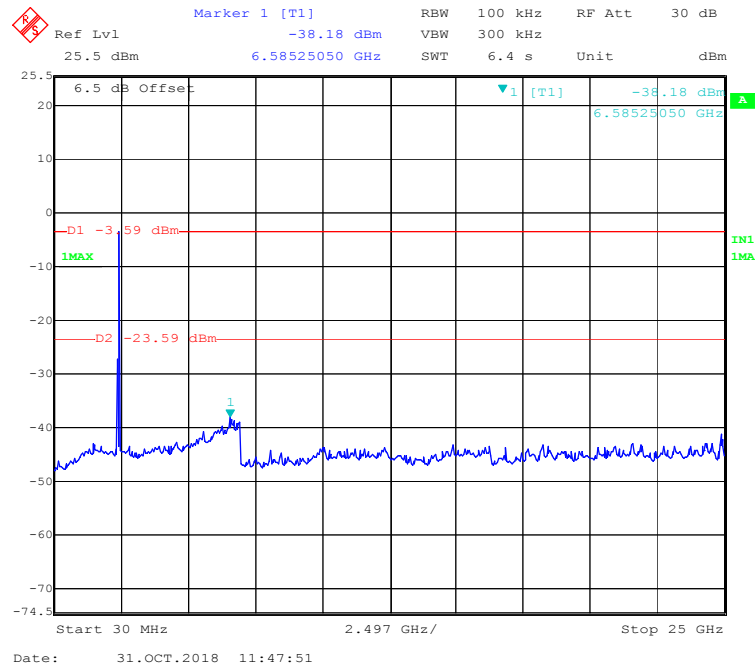


802.11n-HT20 Mode High Channel

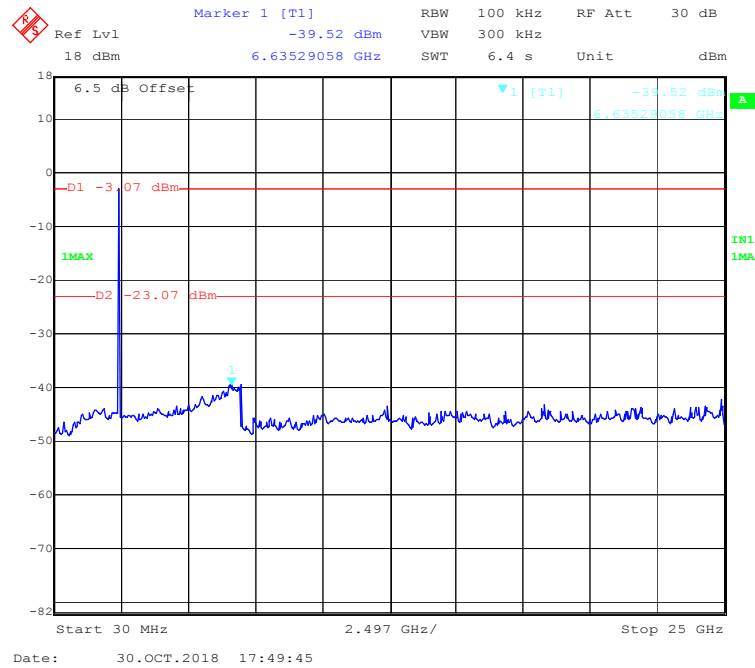


802.11n-HT40 Mode Low Channel

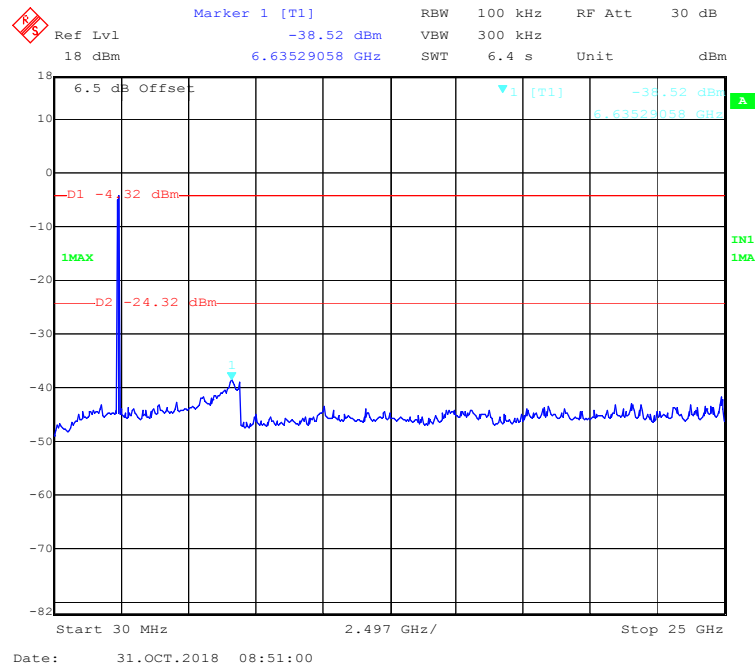

802.11n-HT40 Mode Middle Channel

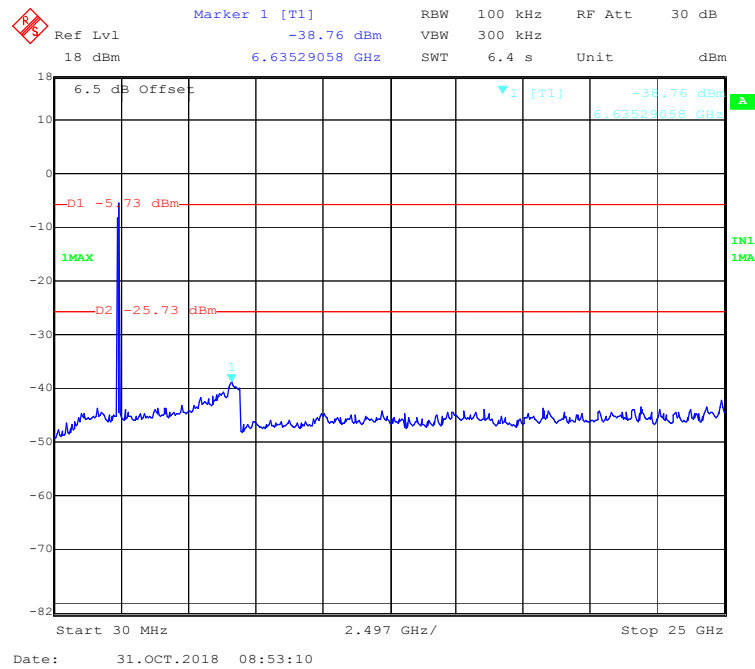


802.11n-HT40 Mode High Channel

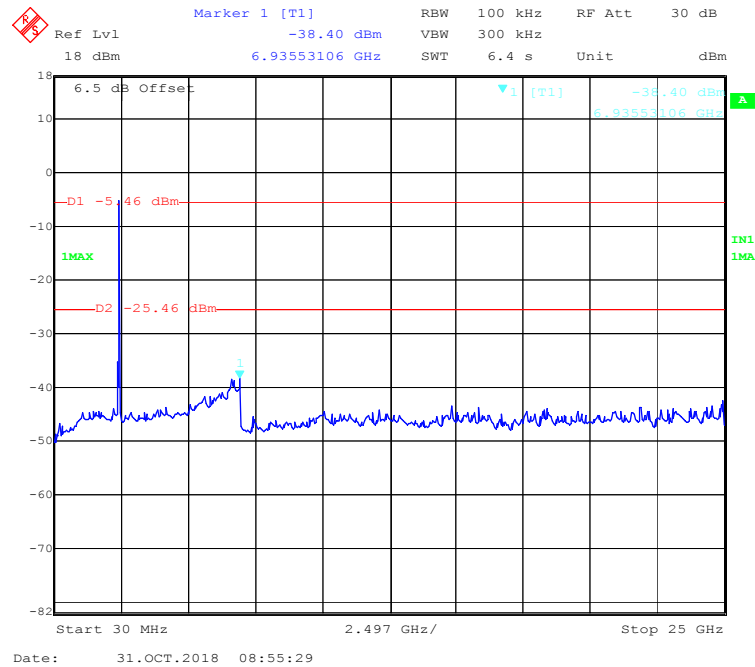


Chain 1:

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

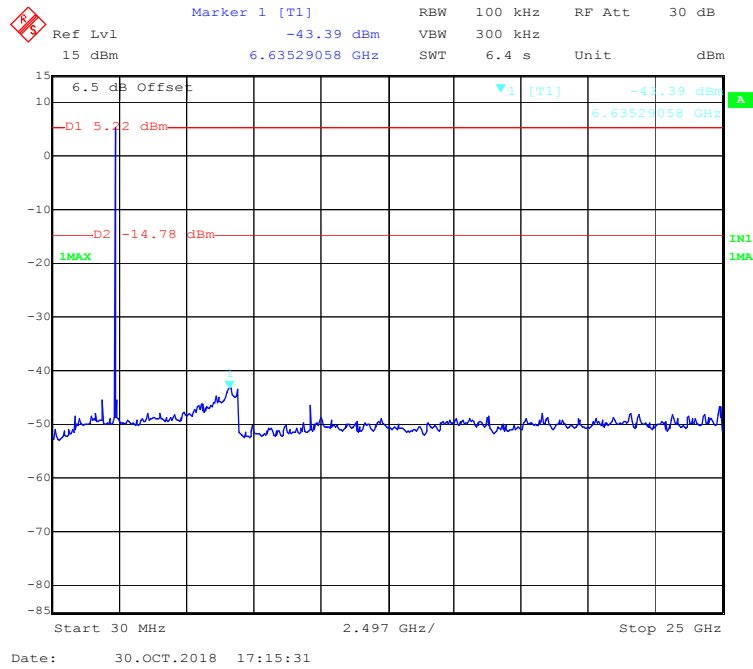


802.11b Mode Middle Channel

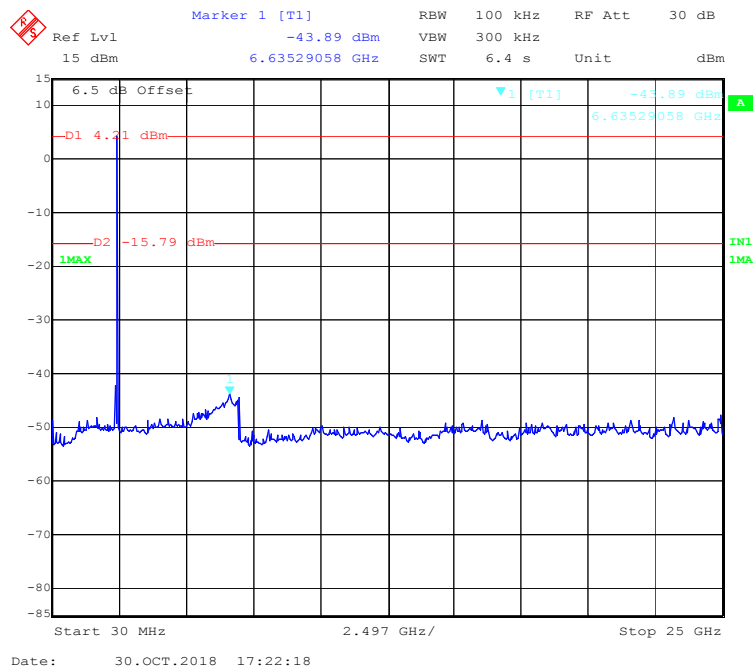


802.11b Mode High Channel

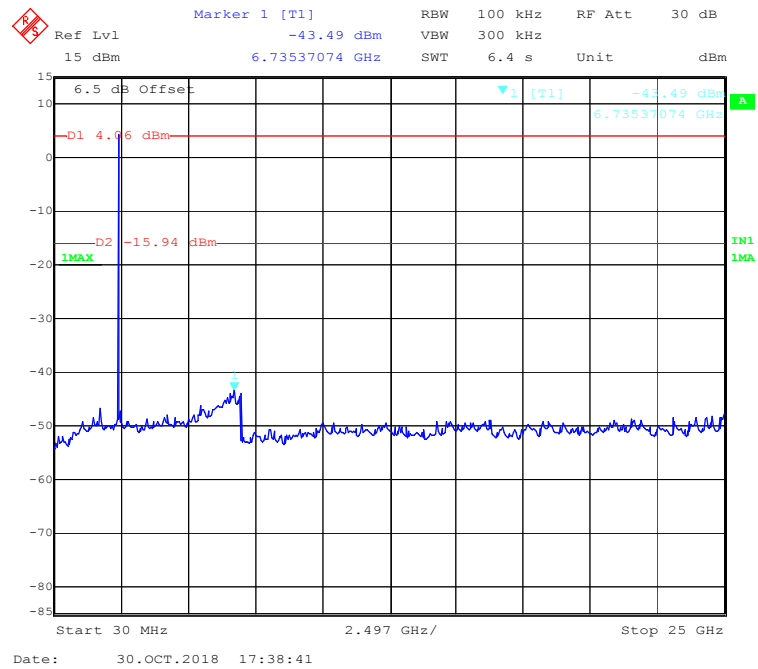


802.11g Mode Low Channel

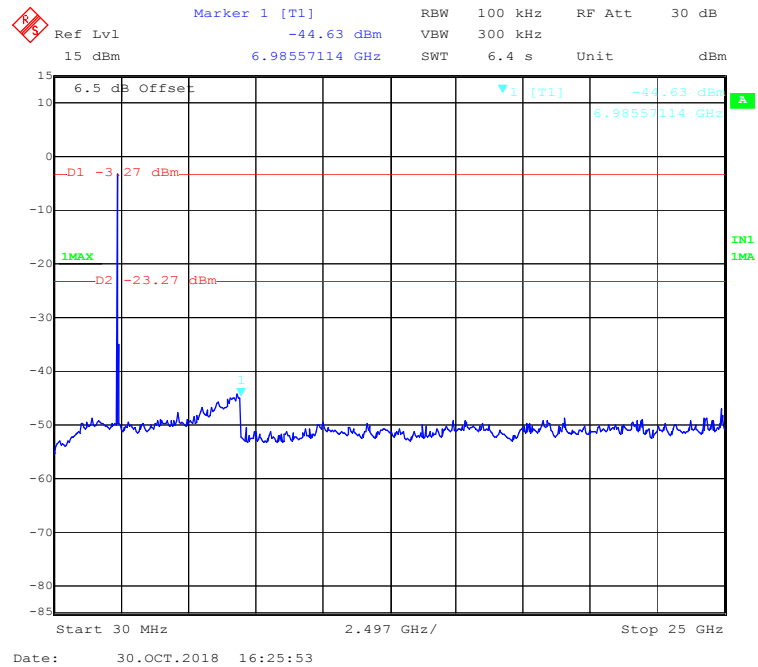


802.11g Mode Middle Channel

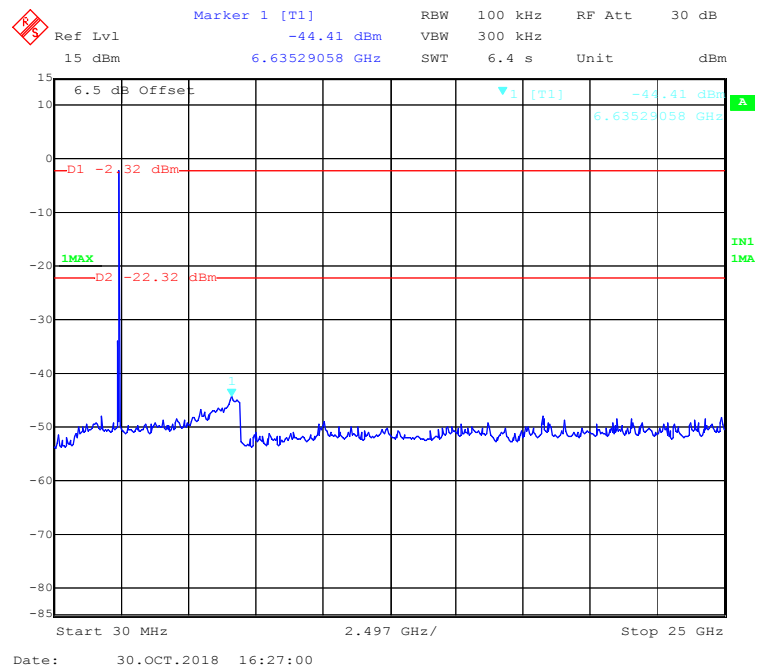


802.11g Mode High Channel

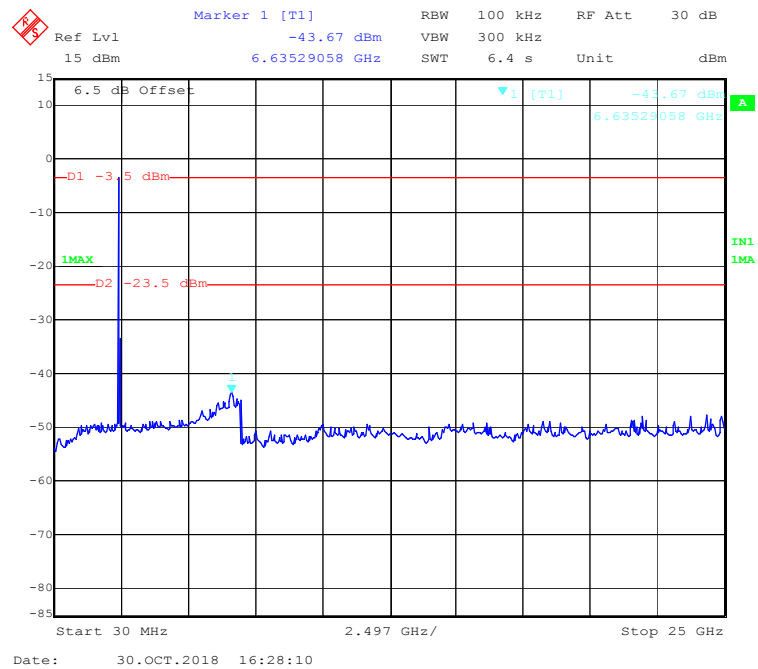


802.11n-HT20 Mode Low Channel

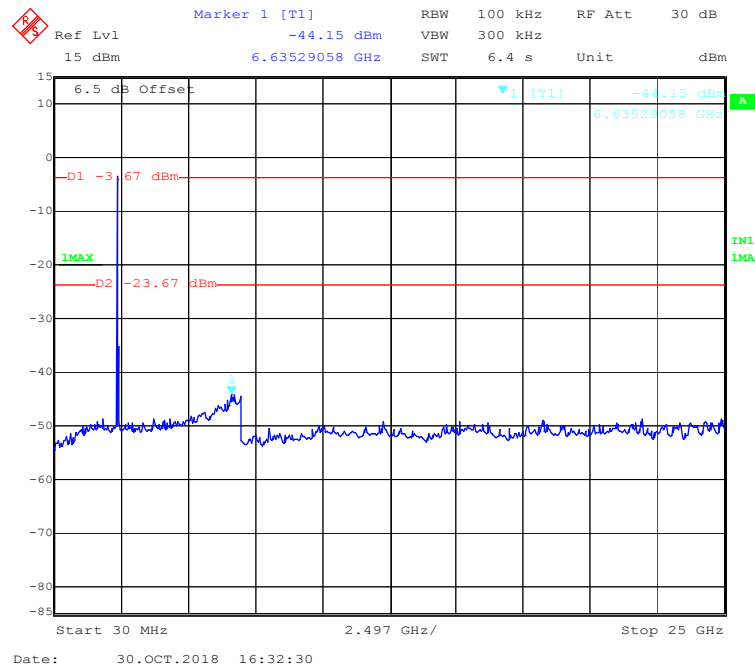


802.11n-HT20 Mode Middle Channel

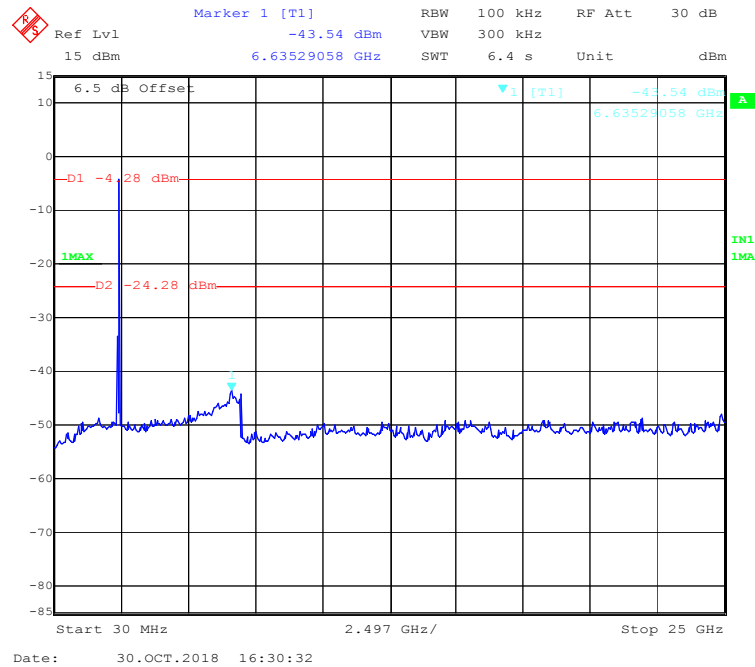


802.11n-HT20 Mode High Channel

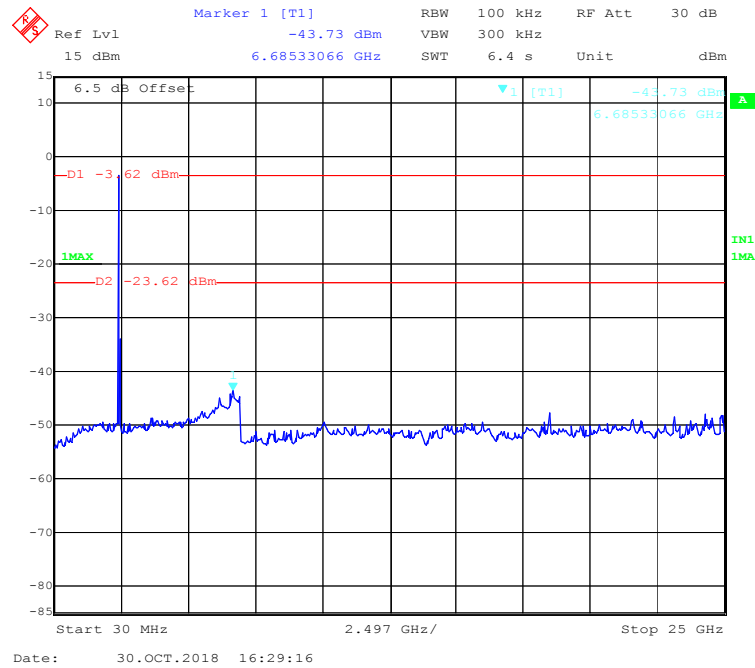


802.11n-HT40 Mode Low Channel

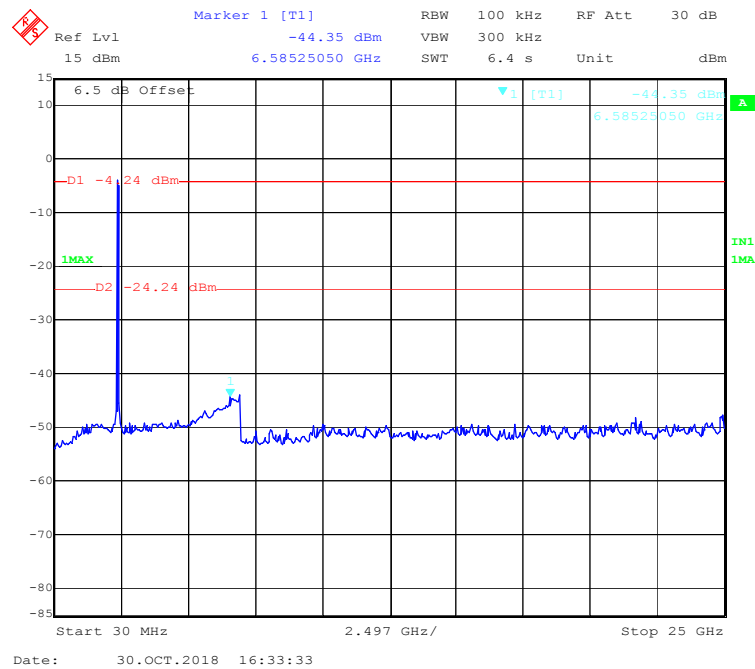

802.11n-HT40 Mode Middle Channel

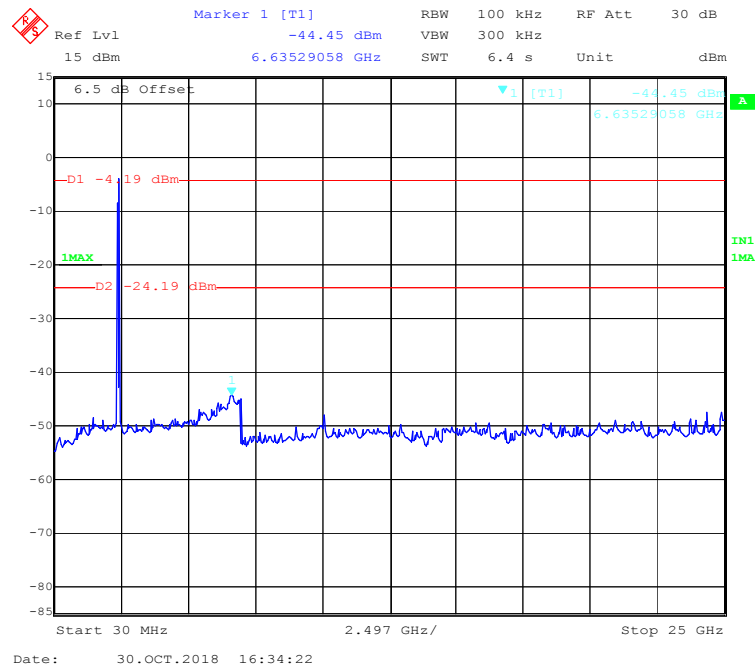

802.11n-HT40 Mode High Channel

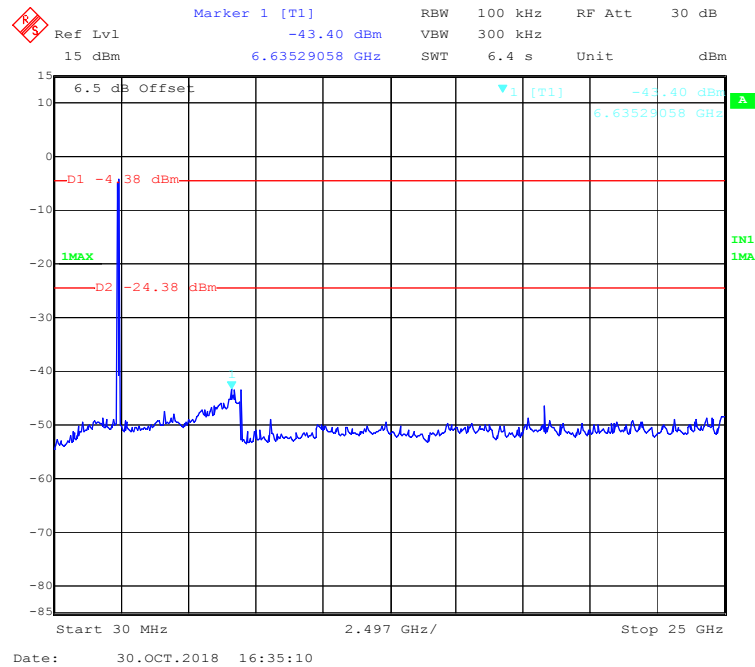


FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Data****Environmental Conditions**

Temperature:	22.3-24.0 °C
Relative Humidity:	48-51 %
ATM Pressure:	100.1-101.3 kPa

The testing was performed by Hope Zhang from 2018-10-30 to 2019-02-13.

EUT operation mode: Transmitting

Test Result: Pass

Chain 0:

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	10.10	≥ 0.5
Middle	2437	10.16	≥ 0.5
High	2462	10.16	≥ 0.5
802.11g Mode			
Low	2412	16.41	≥ 0.5
Middle	2437	16.41	≥ 0.5
High	2462	16.41	≥ 0.5
802.11n-HT20 Mode			
Low	2412	16.95	≥ 0.5
Middle	2437	16.95	≥ 0.5
High	2462	17.07	≥ 0.5
802.11n-HT40 Mode			
Low	2422	36.31	≥ 0.5
Middle	2437	36.55	≥ 0.5
High	2452	36.55	≥ 0.5

Ref Lvl 25.5 dBm Delta 1 [T1] 0.31 dB RBW 100 kHz RF Att 30 dB
 10.10020040 MHz SWT 7.5 ms Unit dBm

6.5 dB Offset

25.5
20
10
0
-10
-20
-30
-40
-50
-60
-70
-74.5

6.21 dBm
0.21 dBm

1MAX

▼1 [T1] 6.71 dBm
▲1 [T1] 2.40697996 GHz 0.31 dB
1 2.40697996 MHz

Center 2.412 GHz 3 MHz/ Span 30 MHz

Date: 30.OCT.2018 14:55:32

Ref Lvl 25.5 dBm Delta 1 [T1] 2.22 dB RBW 100 kHz VBW 300 kHz RF Att 30 dB
 25.5 dBm 10.16032064 MHz SWT 7.5 ms Unit dBm

6.5 dB Offset


▼1 [T1] -1.84 dBm
 ▲1 [T1] 2.22 dB
 10.16032064 MHz

D1 5.7 dBm
 D2 0.3 dBm
 1MAX


Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 31.OCT.2018 11:34:05


802.11b Mode High Channel

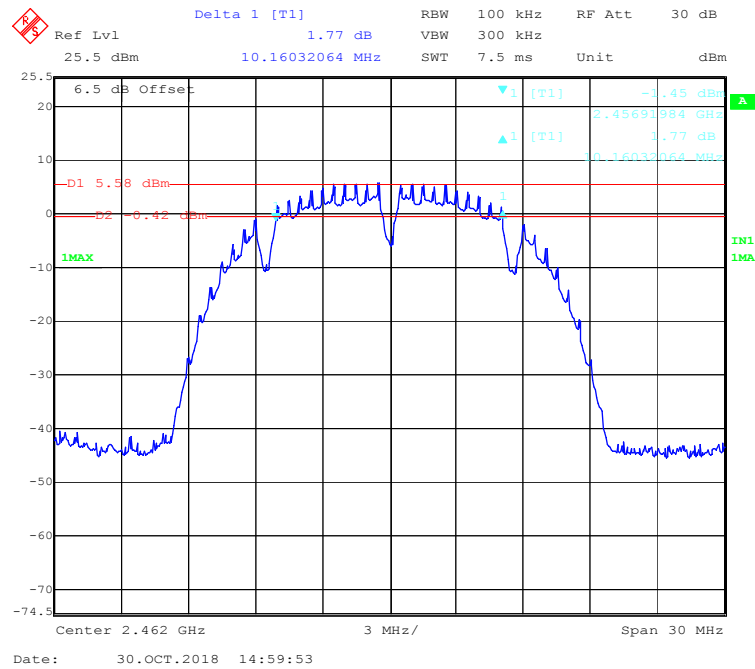


802.11g Mode Low Channel

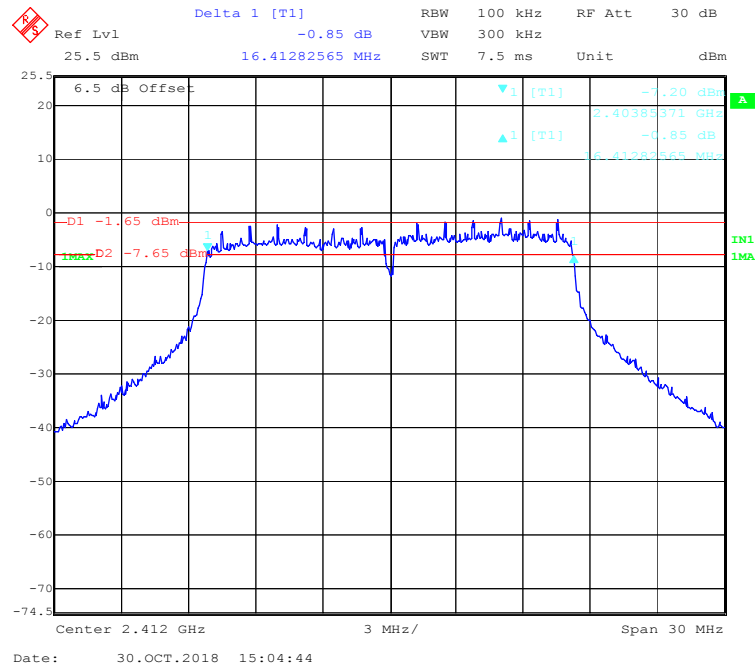


802.11g Mode Middle Channel

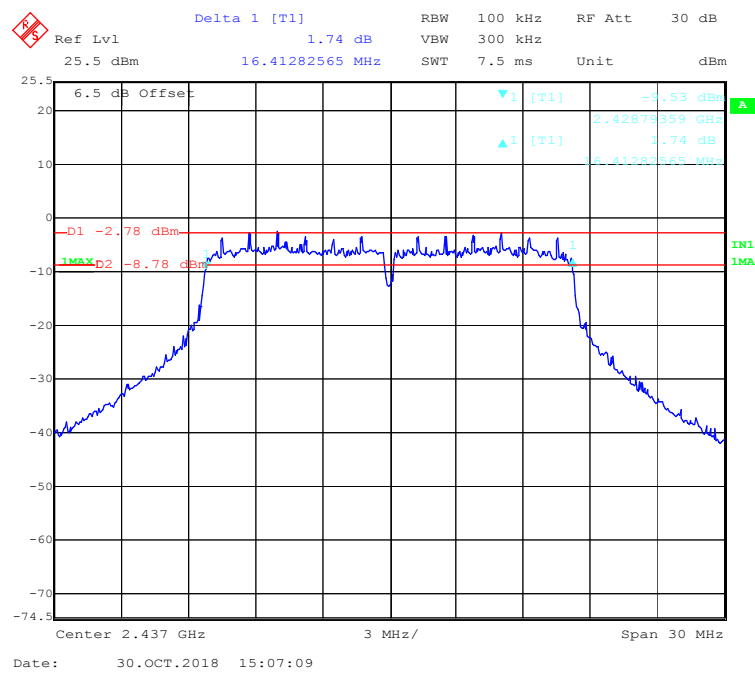


802.11g Mode High Channel

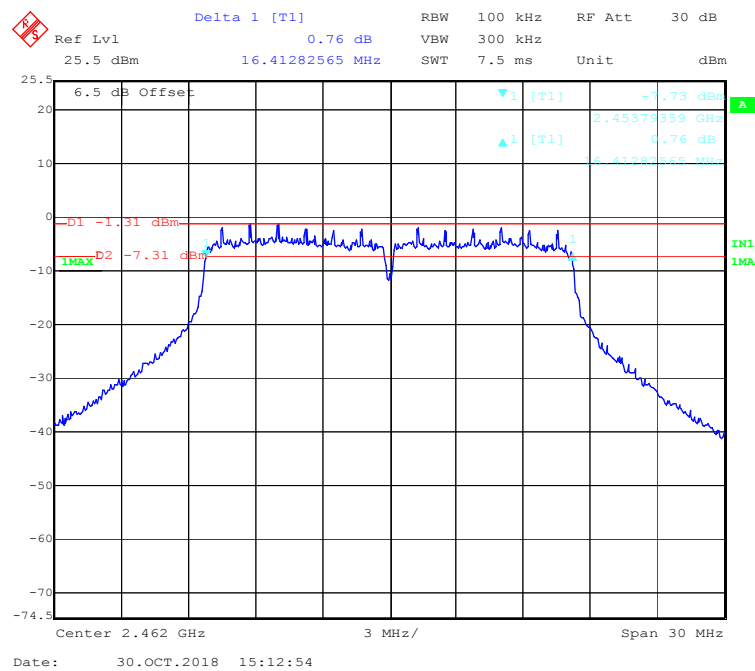


802.11n-HT20 Mode Low Channel

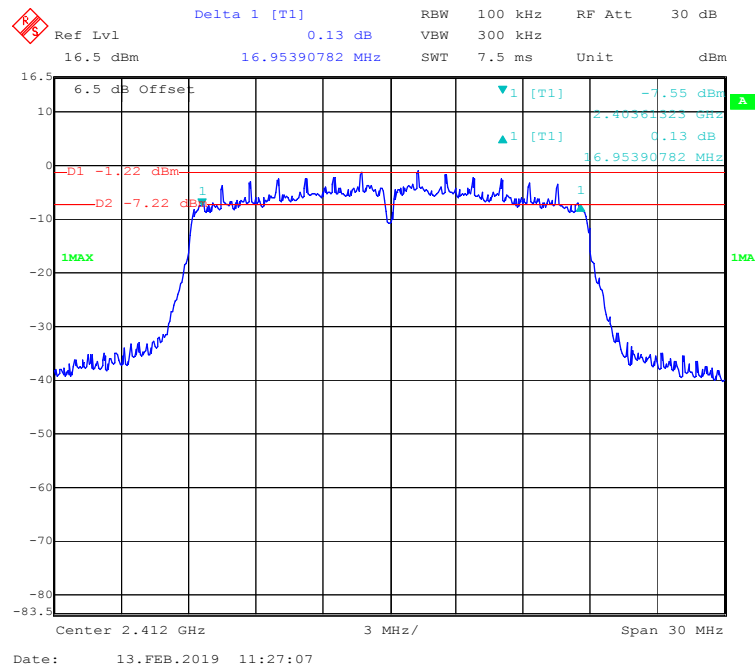


802.11n-HT20 Mode Middle Channel

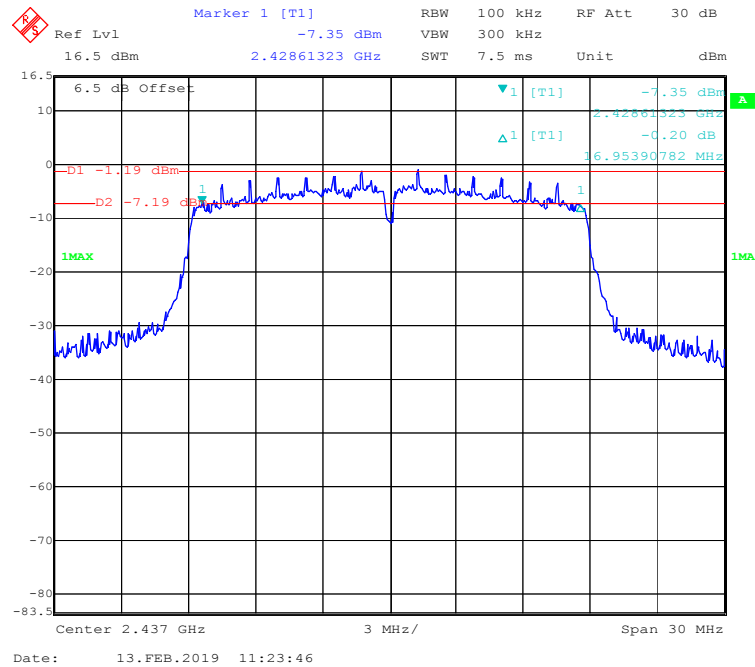

802.11n-HT20 Mode High Channel

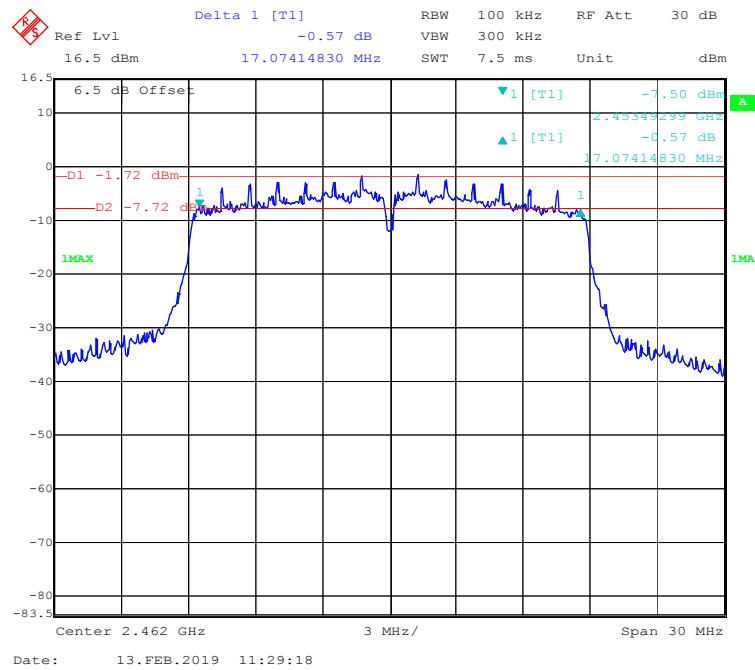

802.11n-HT40 Mode Low Channel

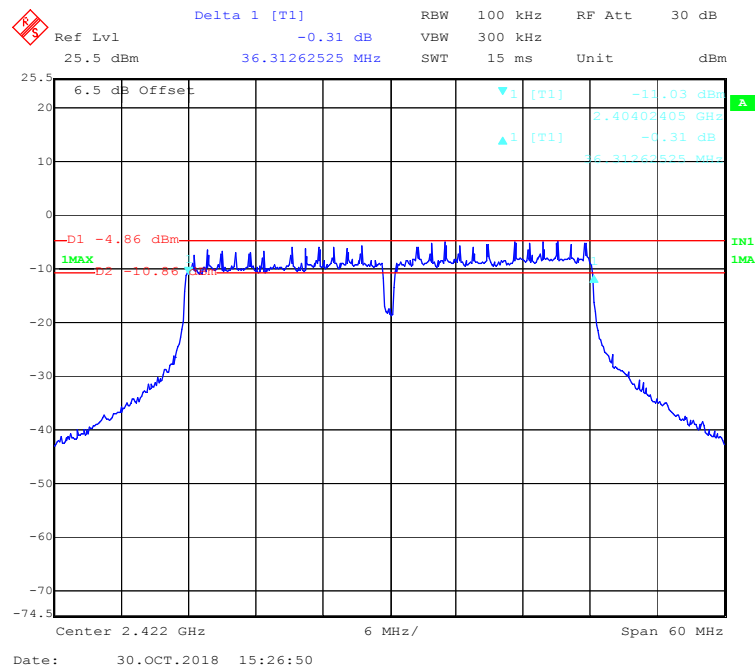

The screenshot shows a spectrum analyzer interface with the following details:

- Top Bar Parameters:**
 - RBW: 100 kHz
 - VBW: 300 kHz
 - RF Att: 30 dB
 - SWT: 15 ms
 - Unit: dBm
- Measurement Data:**
 - Delta 1 [T1]: 2.47 dB
 - Ref Lvl: 25.5 dBm
 - Center Frequency: 36.55310621 MHz
- Main Display Area:**
 - A blue trace shows the frequency spectrum.
 - Red horizontal lines indicate levels D1 (-6.1 dBm) and D2 (-12.1 dBm).
 - Green labels 'IMAX' and 'IMA' are present on the right side.
 - Cursor markers show values: -13.26 dBm, 2.41868333 GHz, 2.47 dB, and 36.55310621 MHz.
- Bottom Status Bar:**
 - Center: 2.437 GHz
 - Span: 60 MHz
 - Date: 30.OCT.2018 15:29:21

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 1.95 dB VBW 300 kHz
 25.5 dBm 36.55310621 MHz SWT 15 ms Unit dBm

6.5 dB Offset ▼1 [T1] -13.81 dBm
 ▲1 [T1] 2.43368333 GHz 1.95 dB
 36.55310621 MHz

D1 -6.38 dBm
 D2 -12.38 dBm

IN1
 1MA


Center 2.452 GHz 6 MHz/ Span 60 MHz

Date: 30.OCT.2018 15:32:21


Chain 1:

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	10.04	≥ 0.5
Middle	2437	10.04	≥ 0.5
High	2462	10.04	≥ 0.5
802.11g Mode			
Low	2412	16.23	≥ 0.5
Middle	2437	16.17	≥ 0.5
High	2462	16.23	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.31	≥ 0.5
Middle	2437	17.19	≥ 0.5
High	2462	17.31	≥ 0.5
802.11n-HT40 Mode			
Low	2422	35.59	≥ 0.5
Middle	2437	35.71	≥ 0.5
High	2452	35.83	≥ 0.5


802.11b Mode Low Channel

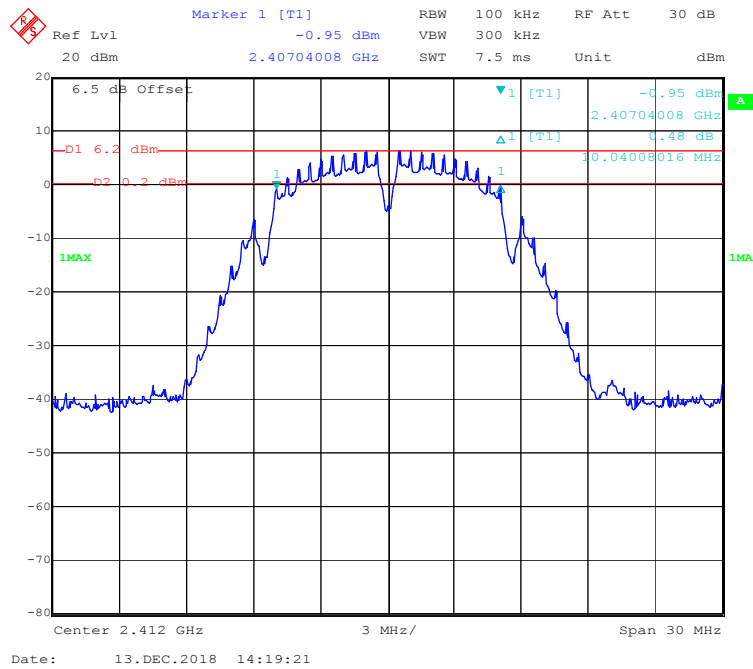


802.11b Mode Middle Channel

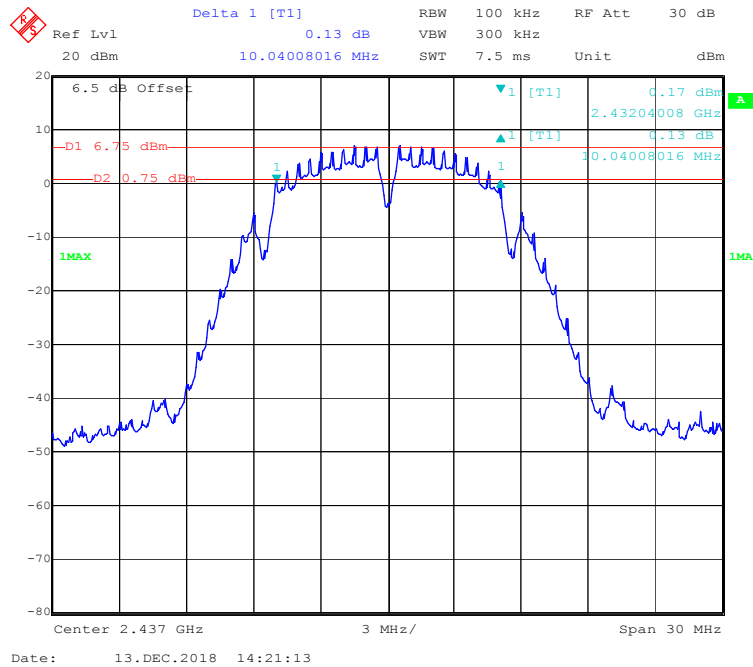

802.11b Mode High Channel

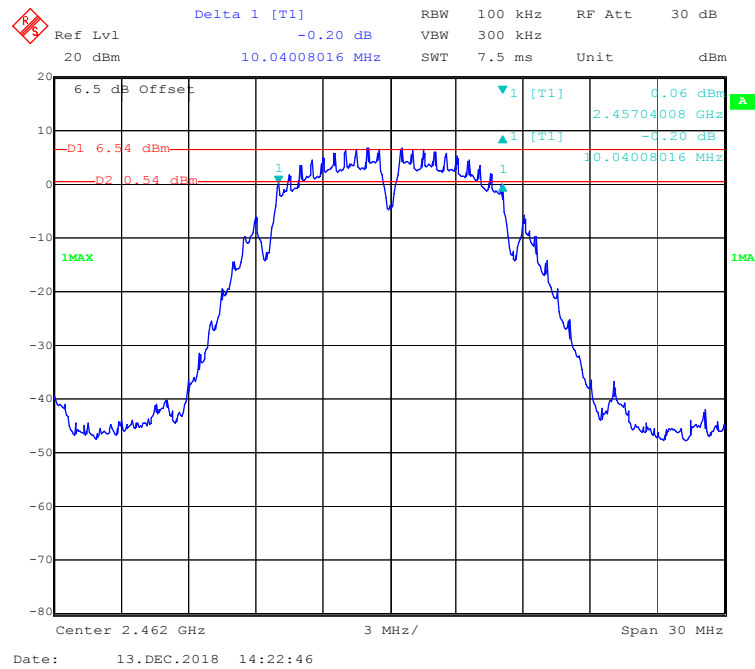

802.11g Mode Low Channel

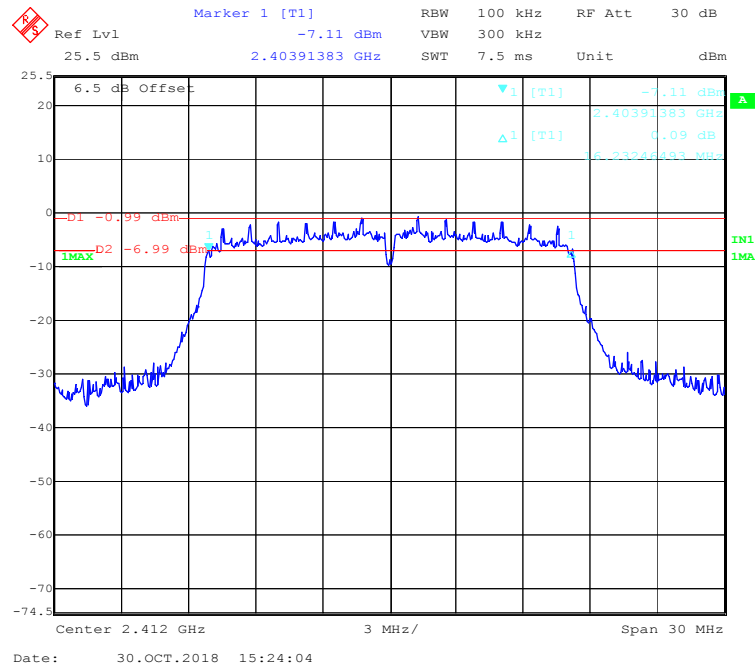

Delta 1 [T1] -0.24 dB
 RBW 100 kHz RF Att 30 dB
 Ref Lvl 25.5 dBm VBW 300 kHz Unit dBm
 SWT 7.5 ms

6.5 dB Offset
 -1.06 dBm
 -7.06 dBm
 1MAX

2.42903407 GHz
 -0.24 dB
 2.4234469 MHz

Center 2.437 GHz 3 MHz/
 Span 30 MHz
 Date: 30.OCT.2018 15:26:05

Delta 1 [T1] 0.03 dB RBW 100 kHz VBW 300 kHz RF Att 30 dB
 Ref Lvl 25.5 dBm 16.23246493 MHz SWT 7.5 ms Unit dBm

6.5 dB Offset


▼1 [T1] -6.88 dBm
 ▲1 [T1] 2.45391383 GHz
 0.03 dB
 6.23246493 MHz

D1 -0.75 dBm
 D2 -6.75 dBm
 1MAX


Center 2.462 GHz 3 MHz/ Span 30 MHz

Date: 30.OCT.2018 15:27:34


802.11n-HT20 Mode Low Channel

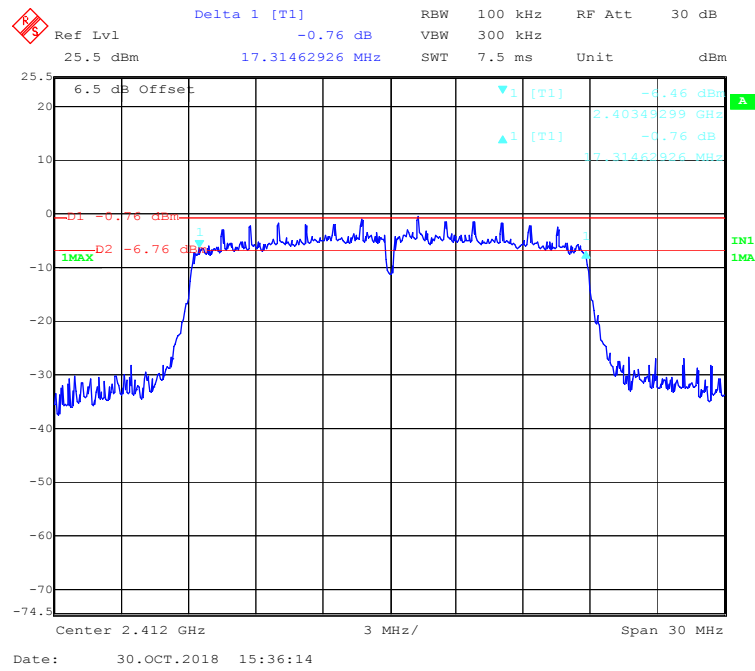


802.11n-HT20 Mode Middle Channel

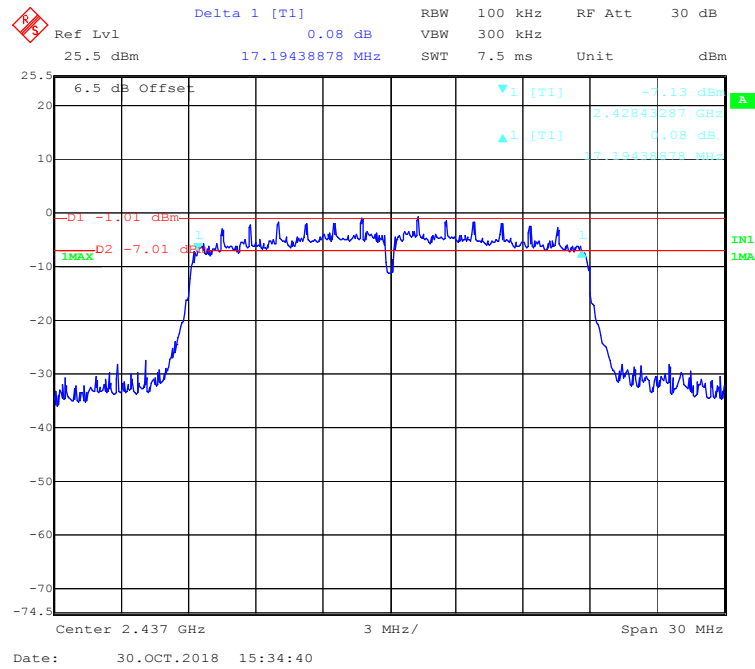


802.11n-HT20 Mode High Channel

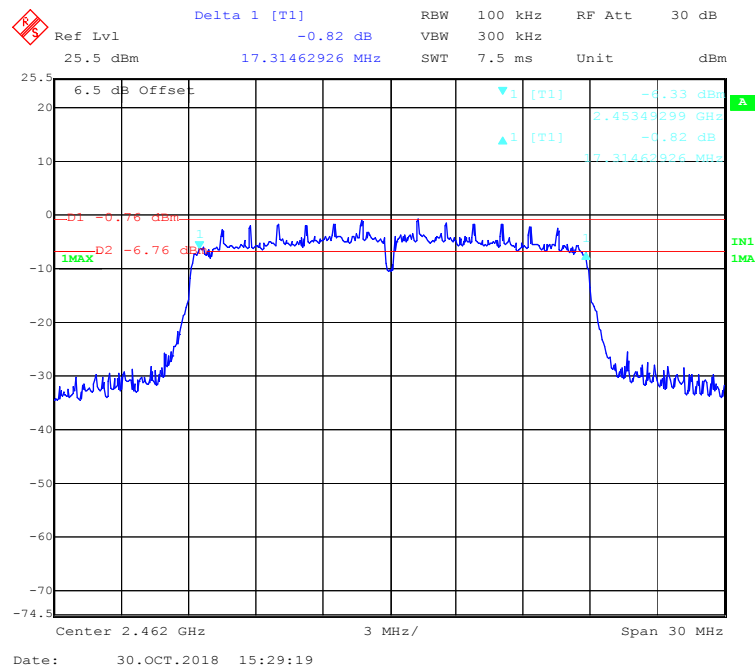


802.11n-HT40 Mode Low Channel

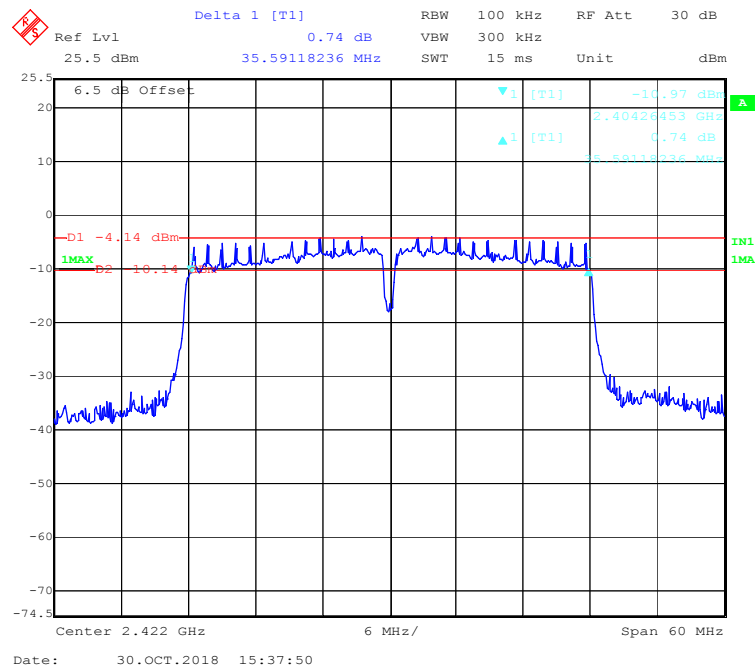

802.11n-HT40 Mode Middle Channel

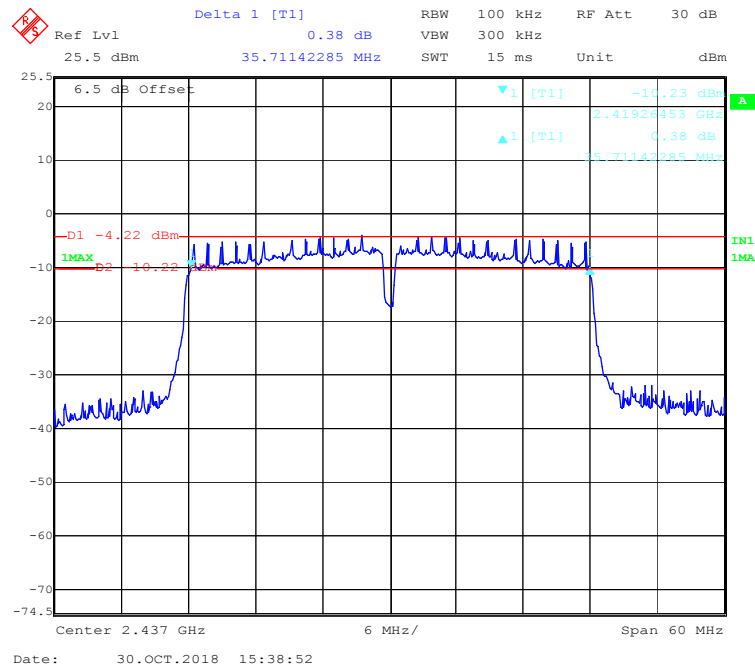

802.11n-HT40 Mode High Channel

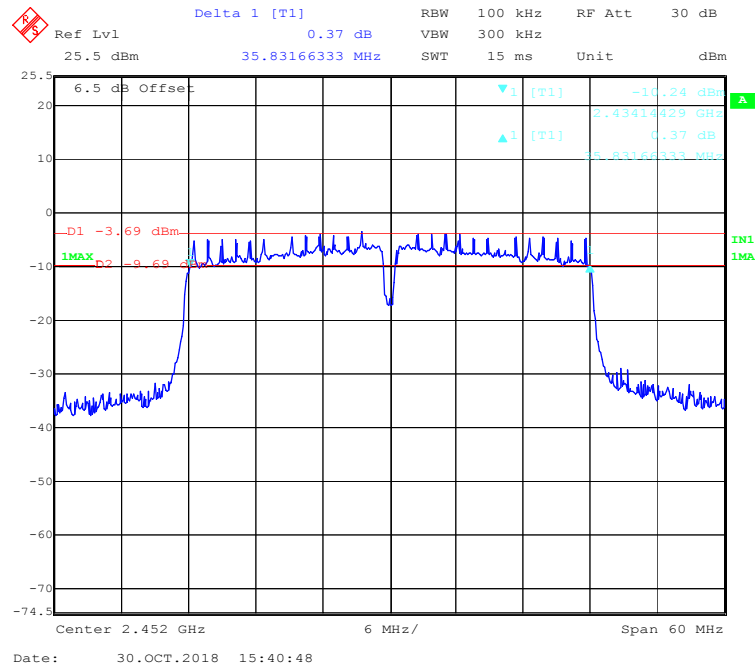

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2018-10-30.

EUT operation mode: Transmitting

Test mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)			Limit (dBm)	Result
			Chain0	Chain1	Total		
802.11b	Low	2412	18.50	18.59	/	30	Pass
	Middle	2437	17.41	17.63	/	30	Pass
	High	2462	18.33	18.05	/	30	Pass
802.11g	Low	2412	16.72	17.39	/	30	Pass
	Middle	2437	16.29	16.26	/	30	Pass
	High	2462	17.26	16.90	/	30	Pass
802.11n-HT20	Low	2412	16.63	16.23	19.45	30	Pass
	Middle	2437	16.27	17.39	19.88	30	Pass
	High	2462	17.08	16.84	19.97	30	Pass
802.11n-HT40	Low	2422	16.75	16.91	19.84	30	Pass
	Middle	2437	16.21	17.16	19.72	30	Pass
	High	2452	15.41	16.88	19.22	30	Pass

Note: The total output power= $10\log_{10}(10^{\text{Chain 0/10}} + 10^{\text{Chain 1/10}})$

The maximum antenna gain is 2.5 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = $G_{ANT} + \text{Array Gain} = 2.5\text{dBi} < 6\text{dBi}$

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Hope Zhang on 2018-10-30.

EUT operation mode: Transmitting


Test Result: Compliance

Chain 0:


802.11b Mode Left Side

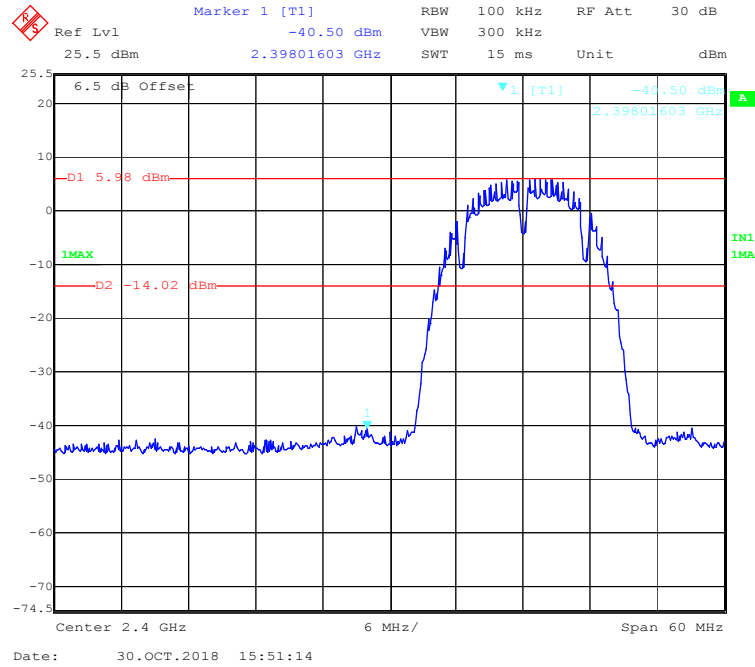


802.11b Mode Right Side

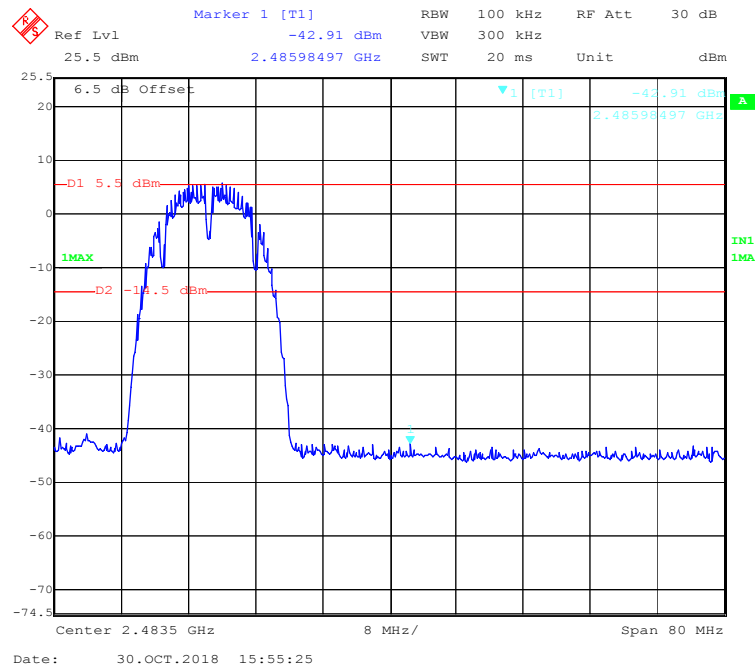


802.11g Mode Left Side

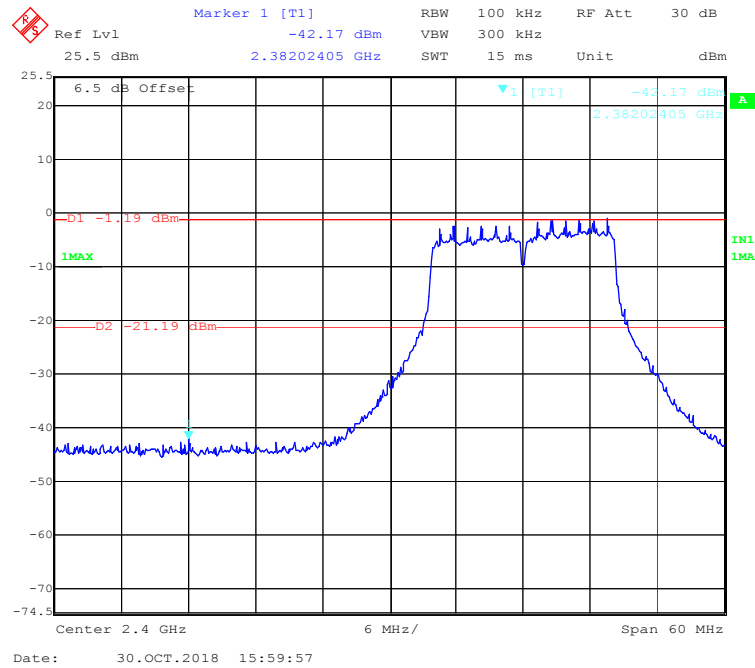


802.11g Mode Right Side

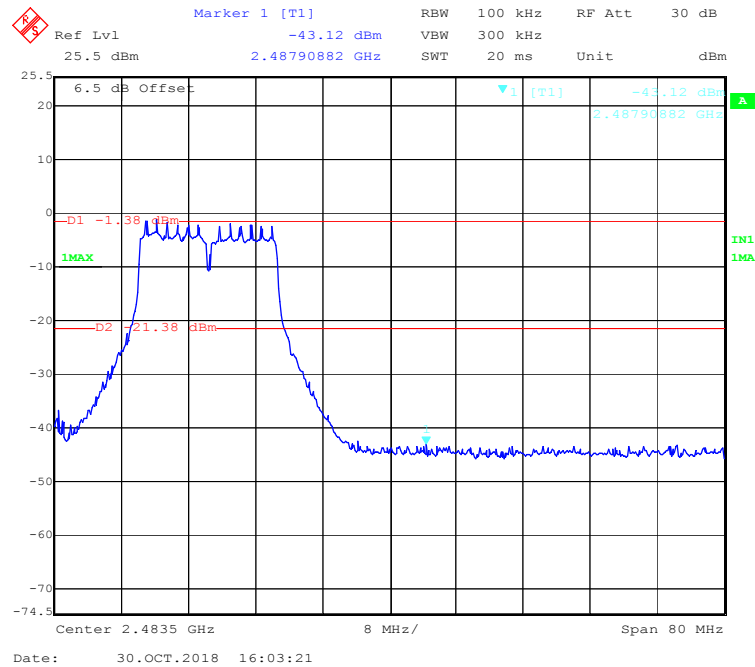


802.11n-HT20 Mode Left Side

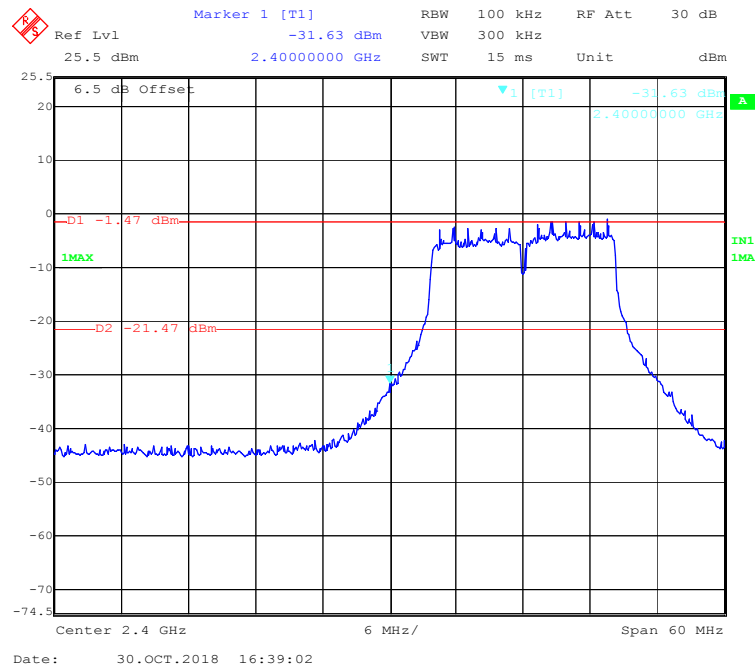


802.11n-HT20 Mode Right Side

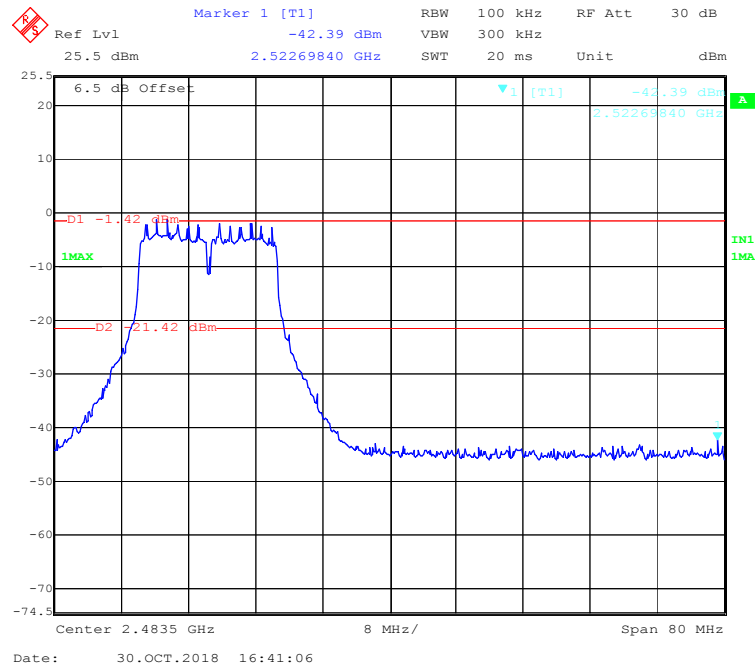

802.11n-HT40 Mode Left Side

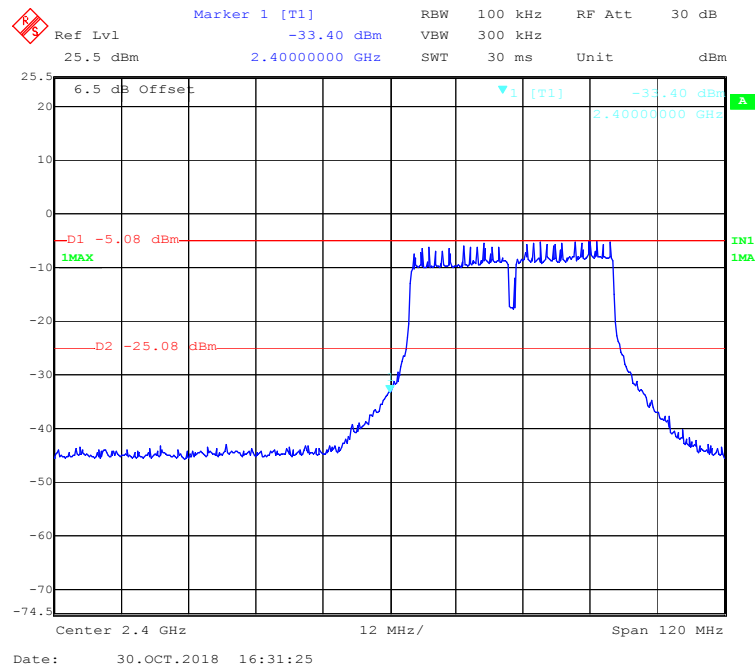


802.11n-HT40 Mode Right Side

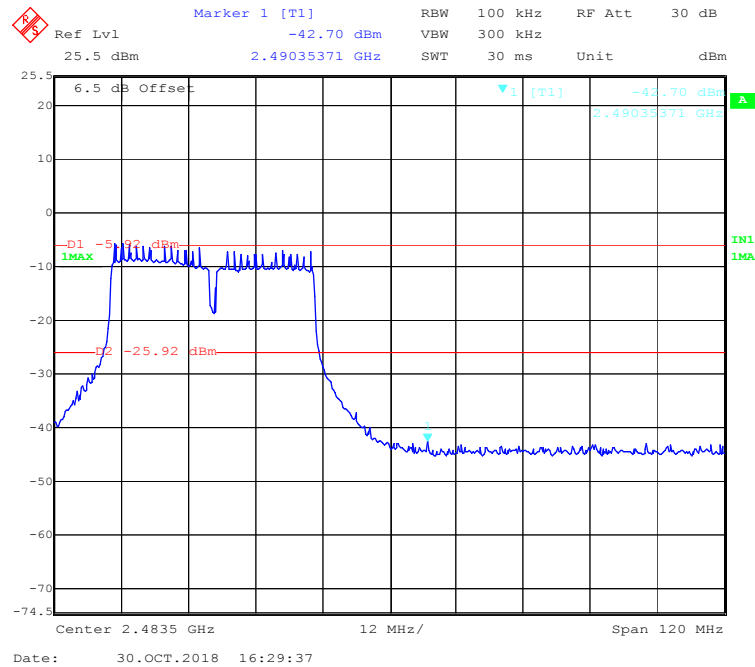


Chain 1:


802.11b Mode Left Side

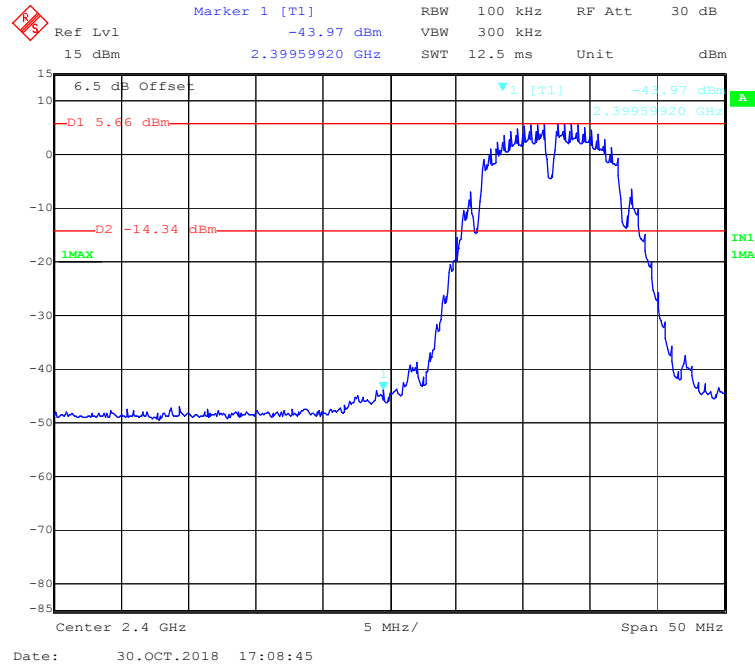


802.11b Mode Right Side

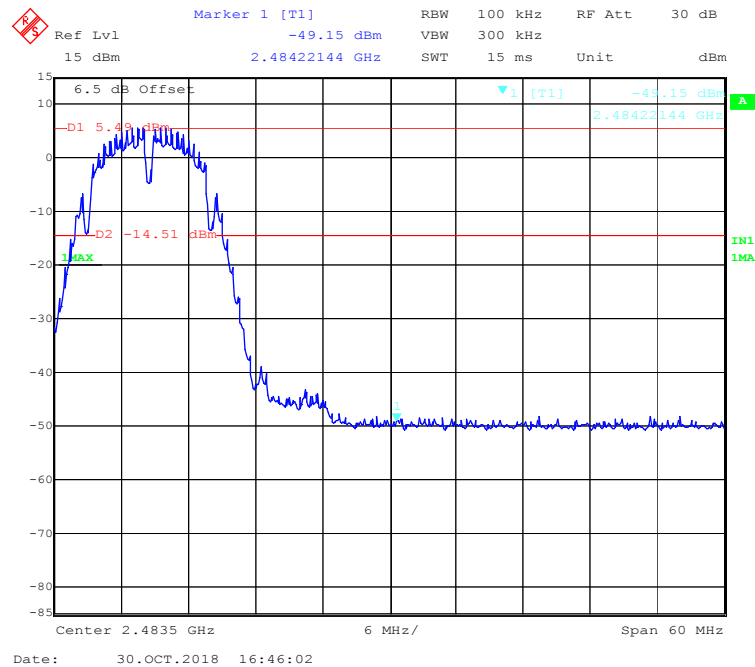

802.11g Mode Left Side

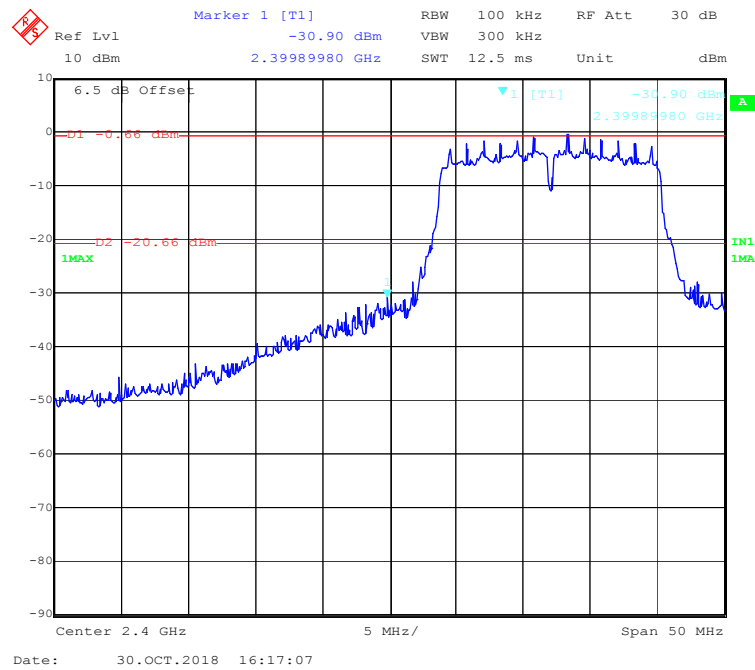

802.11g Mode Right Side

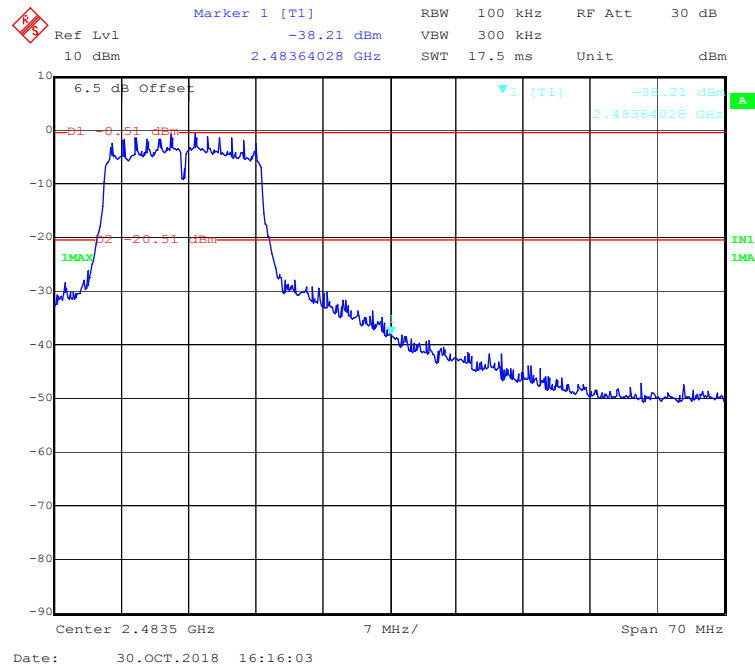

RBW 100 kHz RF Att 30 dB
 VBW 300 kHz
 SWT 12.5 ms Unit dBm

Marker 1 [T1] -30.66 dBm
 10 dBm 2.39959920 GHz

6.5 dB Offset
 01 -0.65 dBm
 02 -20.65 dBm
 1MAX
 IN1 IMA

Center 2.4 GHz 5 MHz/ Span 50 MHz

Date: 30.OCT.2018 16:13:23


Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -35.77 dBm VBW 300 kHz
 10 dBm 2.48364028 GHz SWT 17.5 ms Unit dBm

6.5 dB Offset
 -35.77 dBm
 2.48364028 GHz
 1MAx
 1MA


Center 2.4835 GHz 7 MHz/ Span 70 MHz

Date: 30.OCT.2018 16:14:45

802.11n-HT40 Mode Left Side

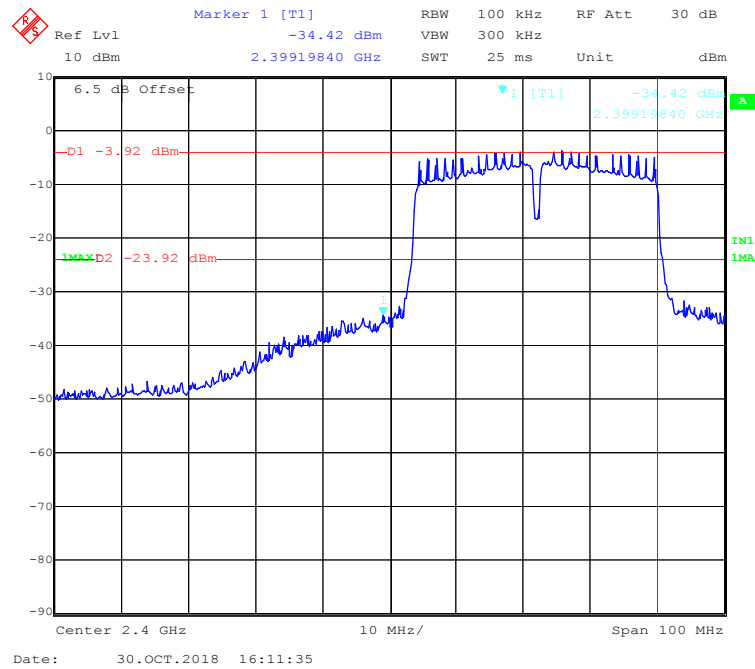

802.11n-HT40 Mode Right Side

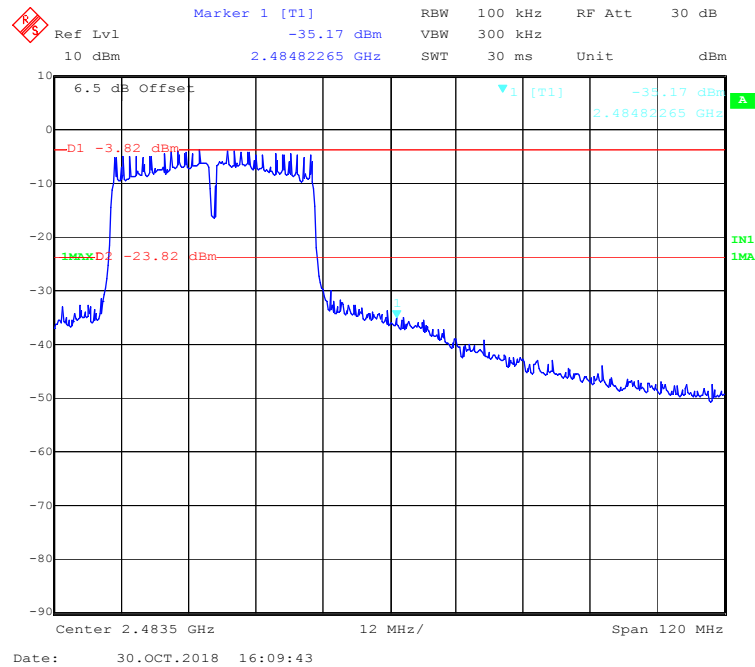

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	22.3-24.1 °C
Relative Humidity:	48-50%
ATM Pressure:	100.1-101.3 kPa

The testing was performed by Hope Zhang from 2018-10-30 to 2019-02-13.

EUT operation mode: Transmitting

Test Result: Pass

EUT operation mode: Transmitting

Channel	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)
		Chain0	Chain1	Total	
802.11b mode					
Low	2412	-7.85	-6.62	/	≤8
Middle	2437	-7.58	-7.76	/	≤8
High	2462	-8.65	-7.89	/	≤8
802.11g mode					
Low	2412	-15.15	-15.25	/	≤8
Middle	2437	-17.05	-15.31	/	≤8
High	2462	-15.50	-14.71	/	≤8
802.11n-HT20 mode					
Low	2412	-15.12	-15.22	-12.16	≤8
Middle	2437	-16.54	-15.89	-13.19	≤8
High	2462	-15.46	-14.68	-12.04	≤8
802.11n-HT40 mode					
Low	2422	-18.99	-17.97	-15.44	≤8
Middle	2437	-19.88	-15.95	-14.47	≤8
High	2452	-20.53	-18.94	-16.65	≤8

Note:

The total PSD = $10 \log_{10} (10^{\text{Chain 0/10}} + 10^{\text{Chain 1/10}})$

The maximum antenna gain is 2.5 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:


Array Gain = $10 \log(N_{\text{ANT}}/N_{\text{SS}})$ dB.

So:


Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 2.5 + 10 \log(2/1) = 5.51$ dBi

Chain 0:


802.11b Mode Low Channel

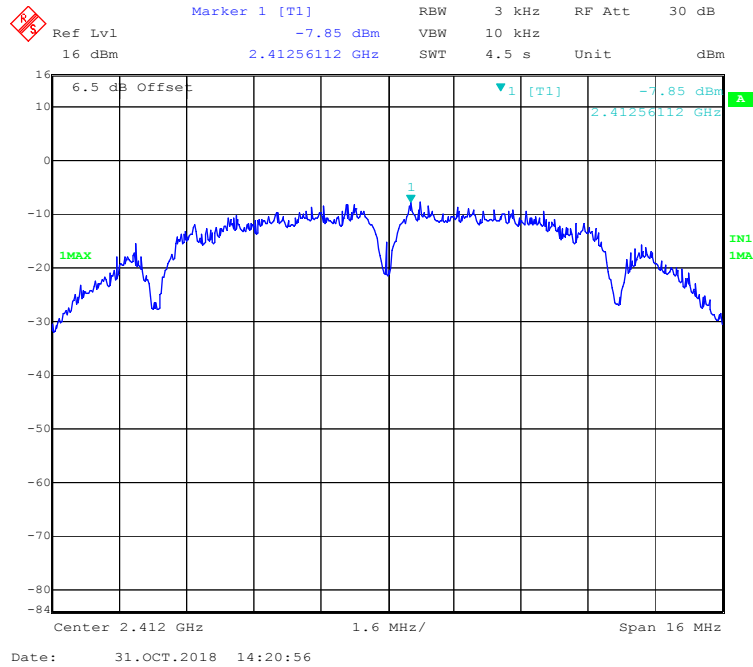


802.11b Mode Middle Channel

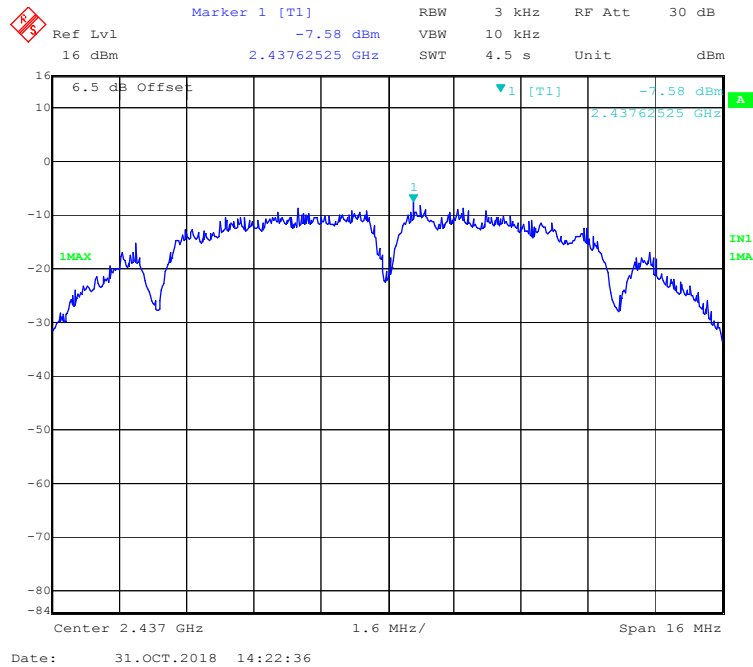


802.11b Mode High Channel

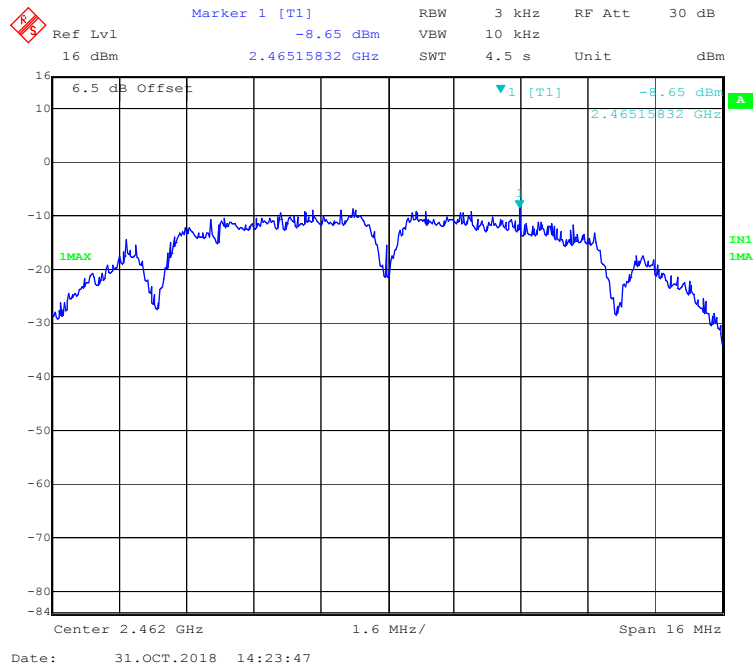


802.11g Mode Low Channel

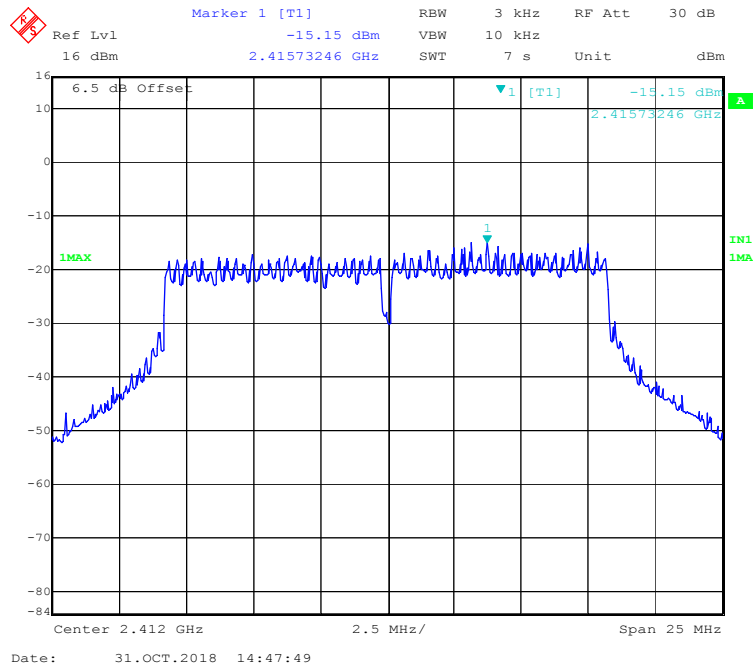


802.11g Mode Middle Channel

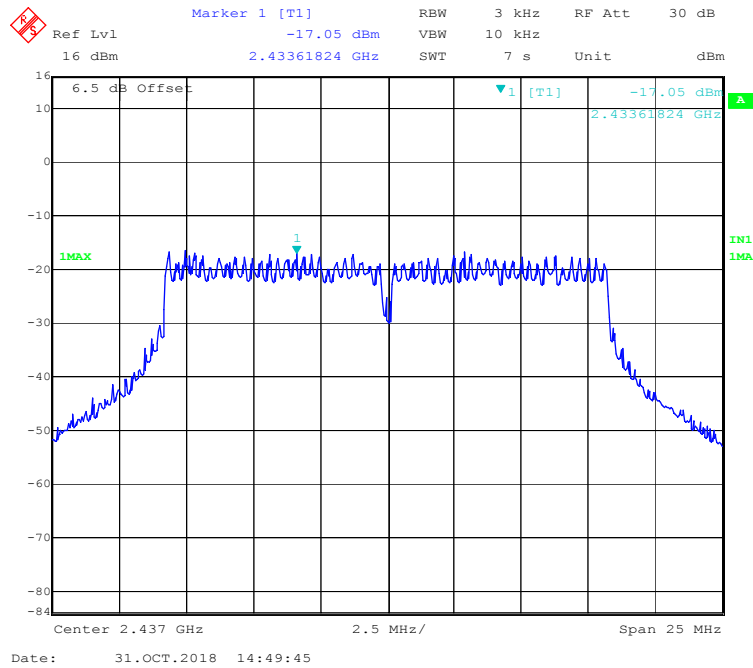


802.11g Mode High Channel

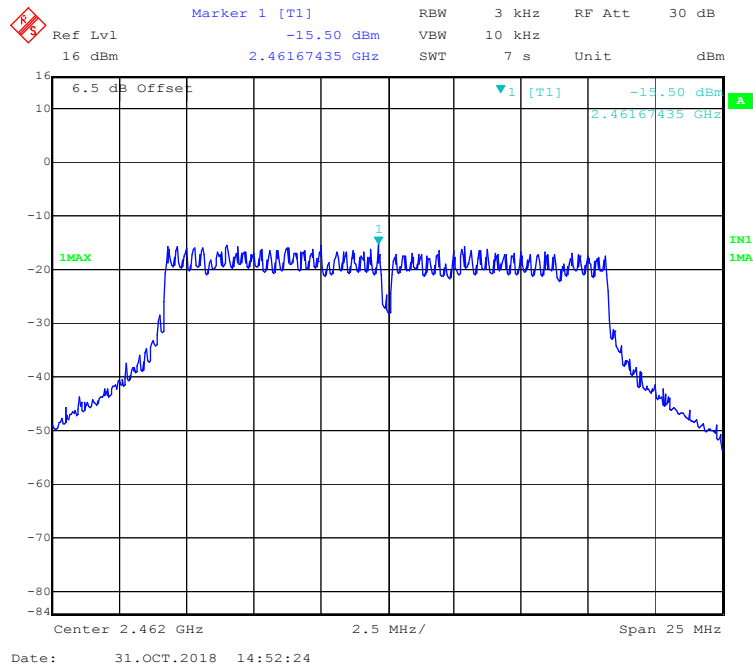


802.11n-HT20 Mode Low Channel

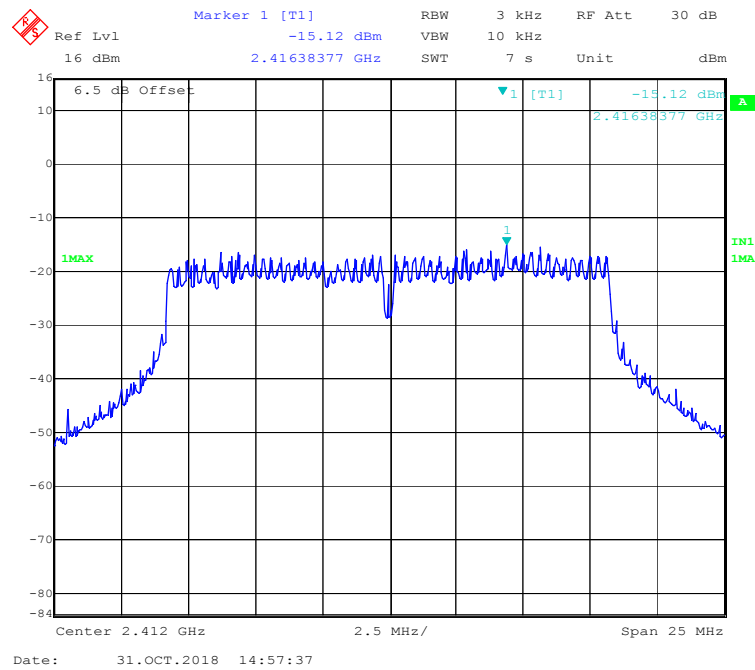


802.11n-HT20 Mode Middle Channel

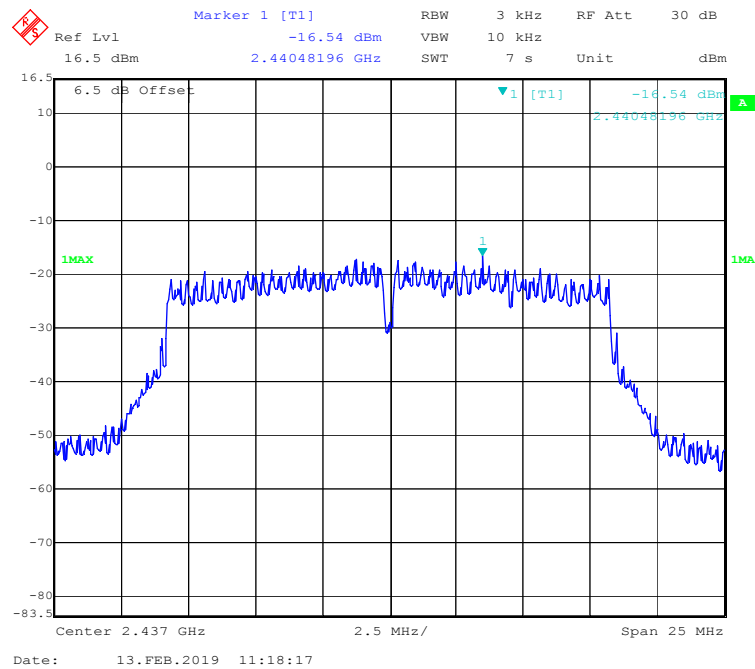


802.11n-HT20 Mode High Channel

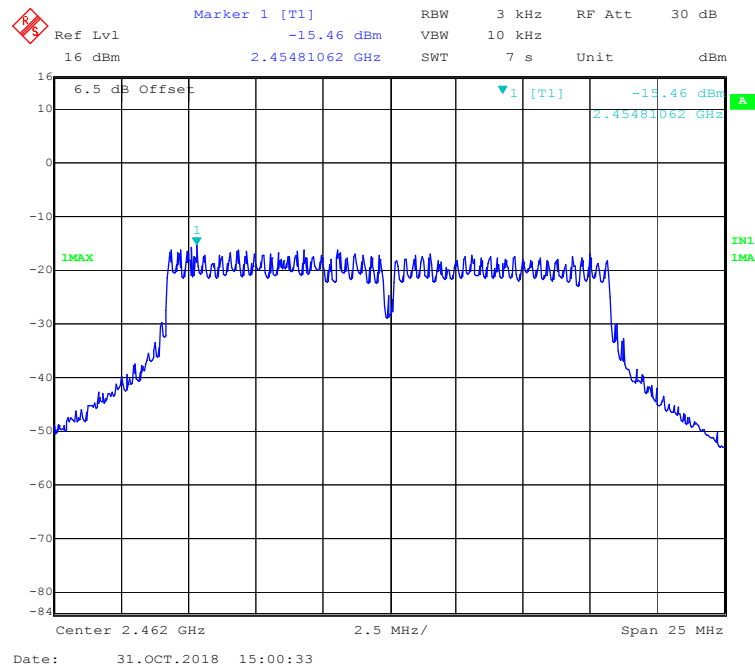


802.11n-HT40 Mode Low Channel

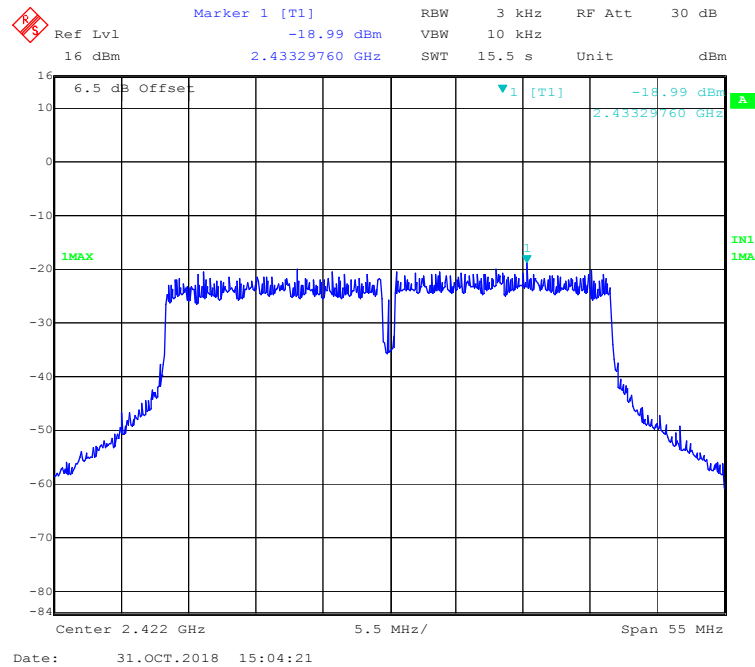

802.11n-HT40 Mode Middle Channel

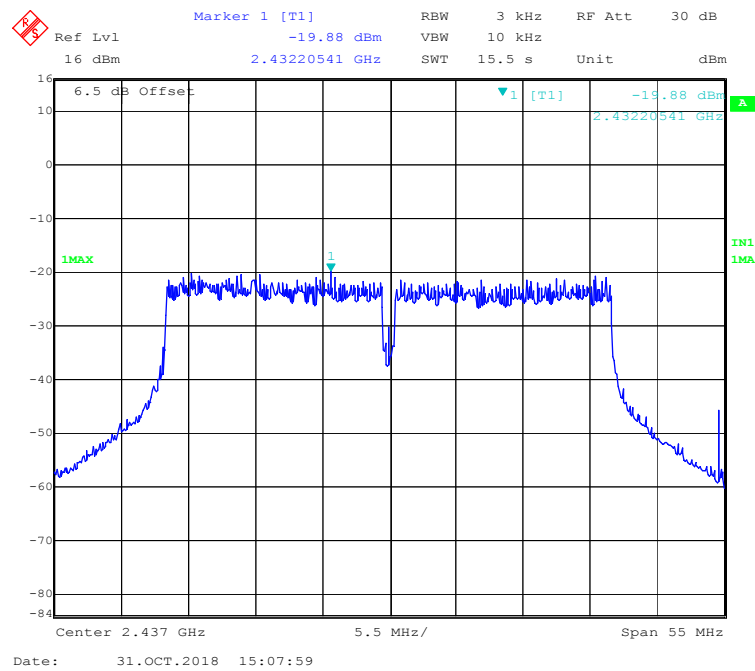


802.11n-HT40 Mode High Channel

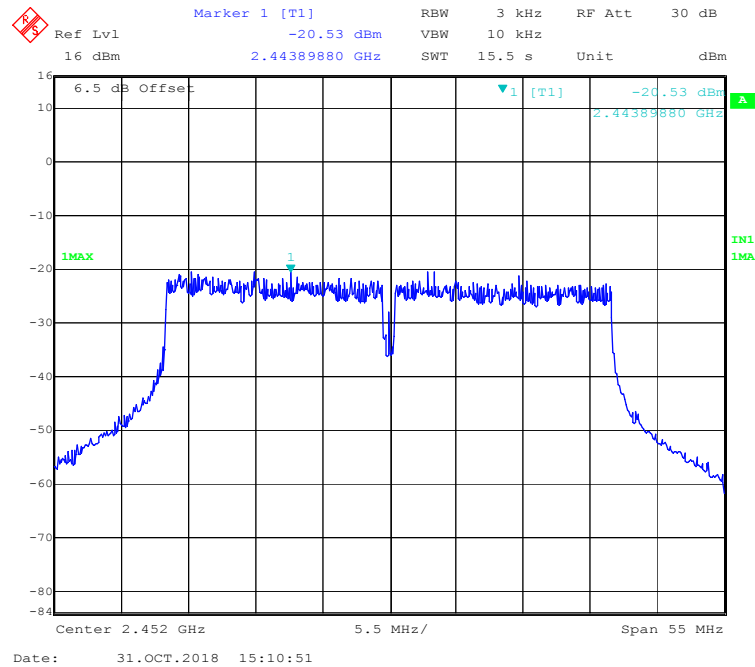


Chain 1:


802.11b Mode Low Channel

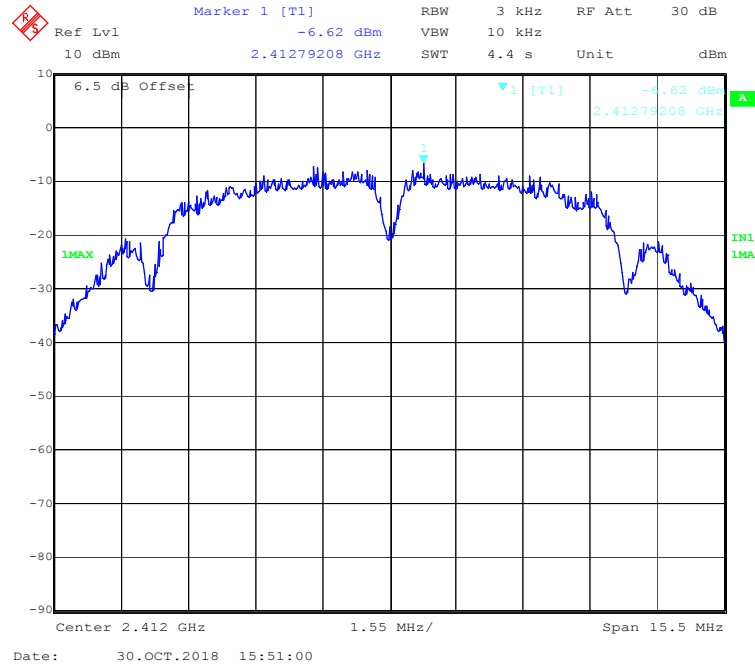


802.11b Mode Middle Channel

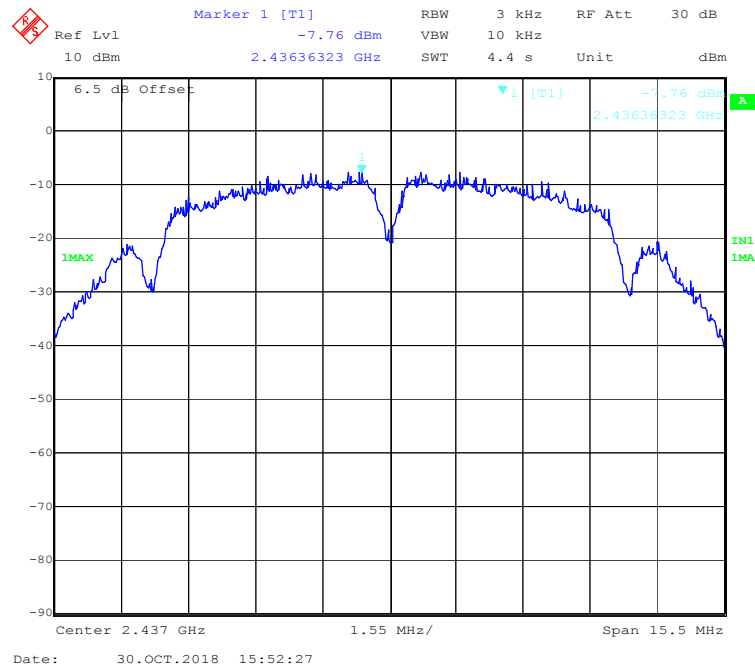


802.11b Mode High Channel

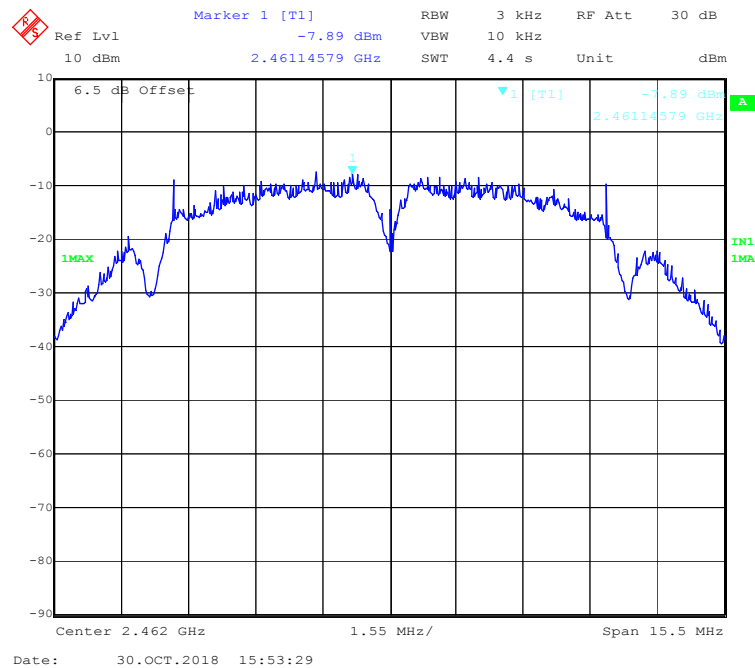


802.11g Mode Low Channel

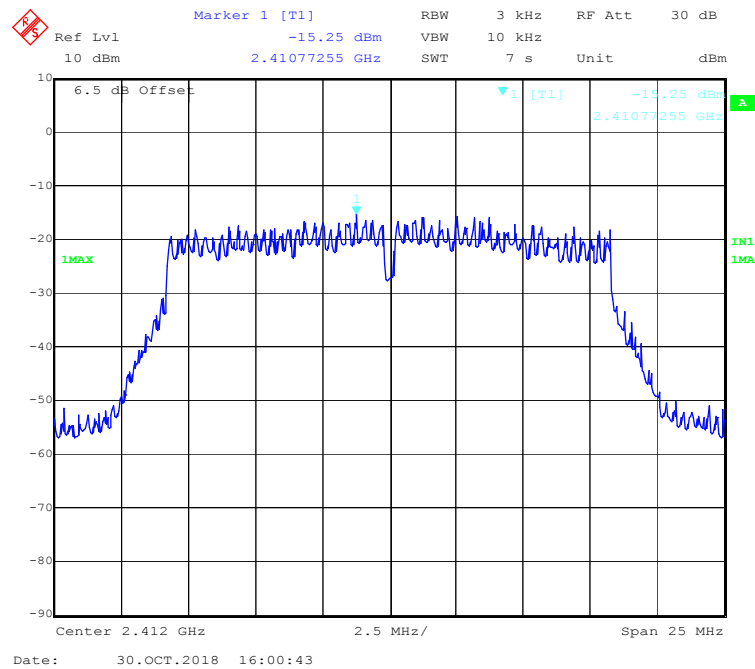


802.11g Mode Middle Channel

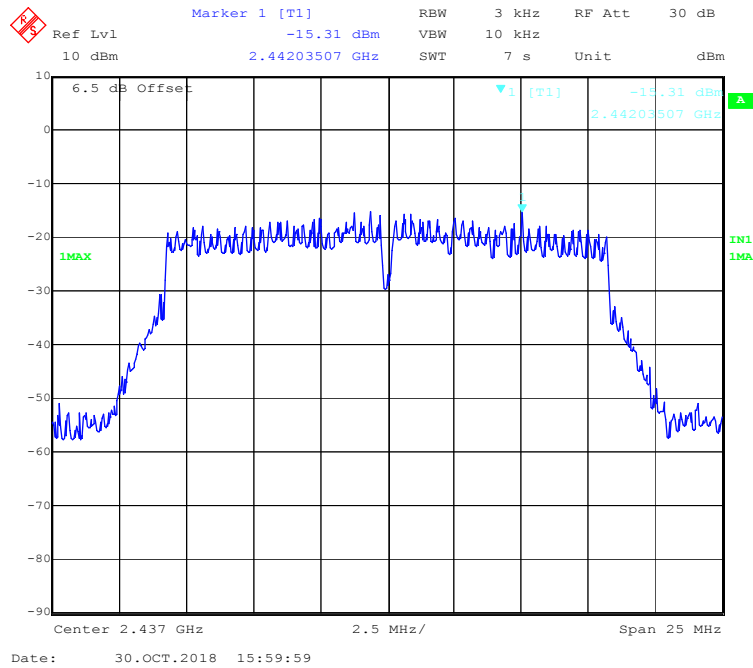


802.11g Mode High Channel


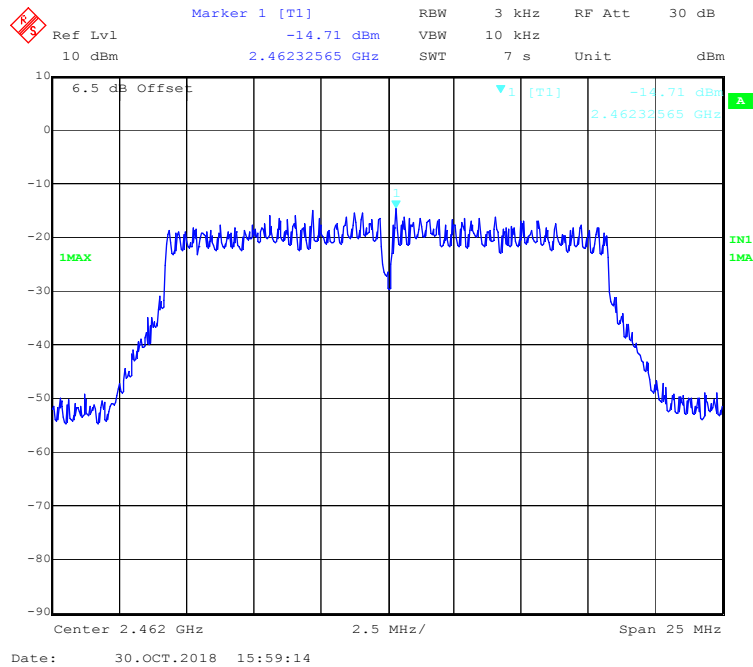


802.11n-HT20 Mode Low Channel

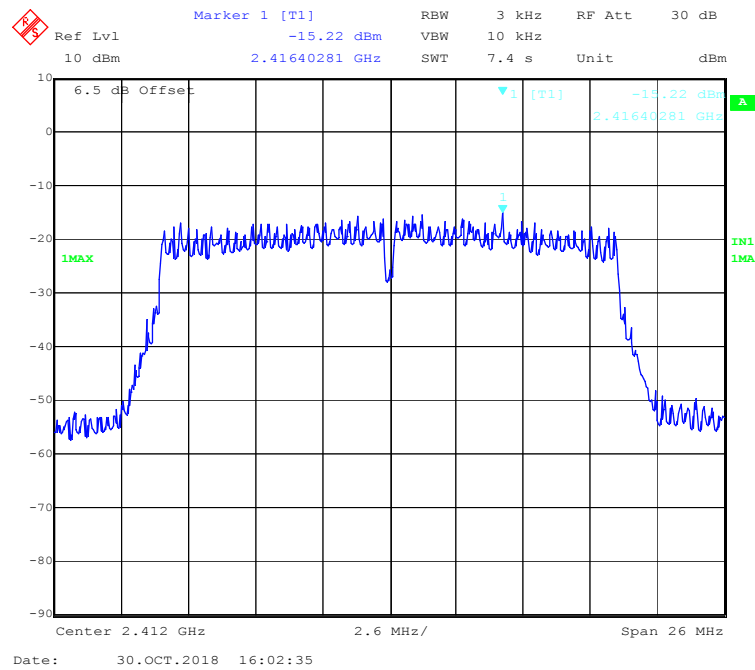


802.11n-HT20 Mode Middle Channel

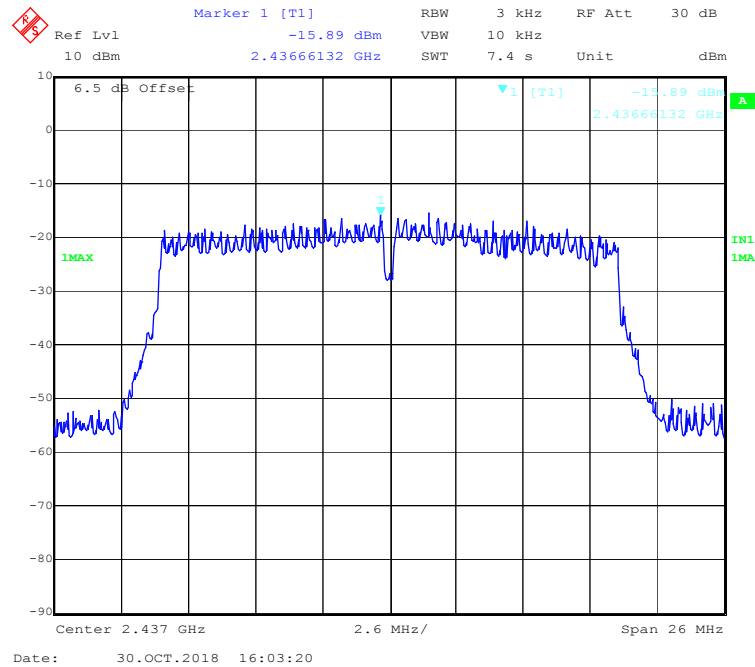


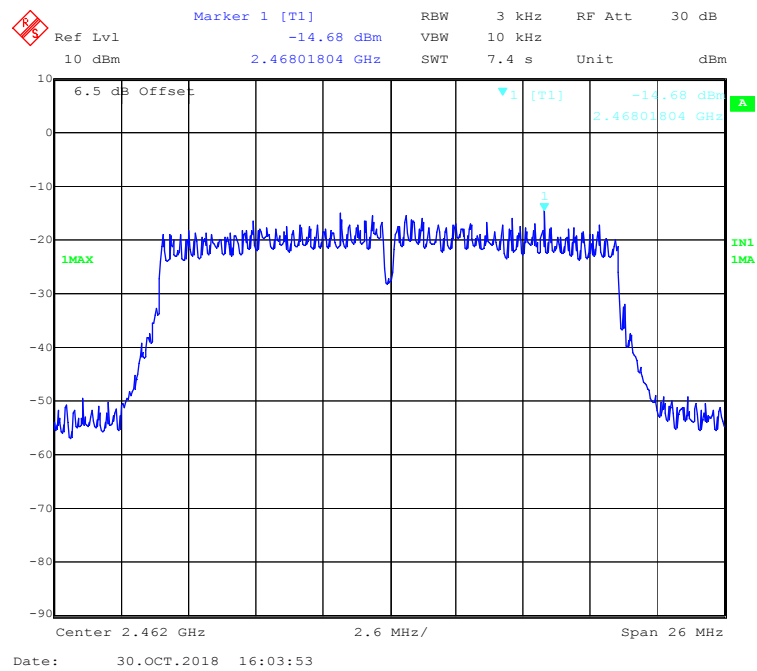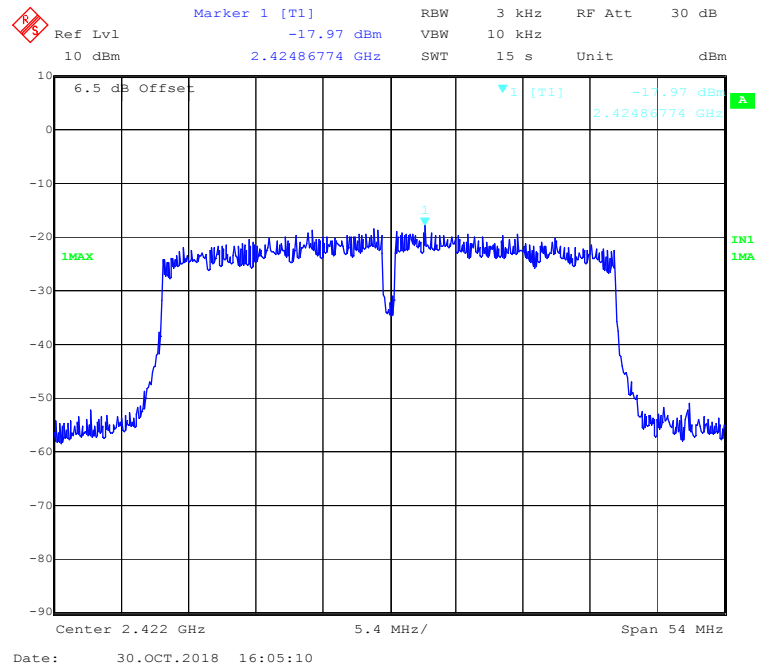802.11n-HT20 Mode High Channel**802.11n-HT40 Mode Low Channel**

802.11n-HT40 Mode Middle Channel

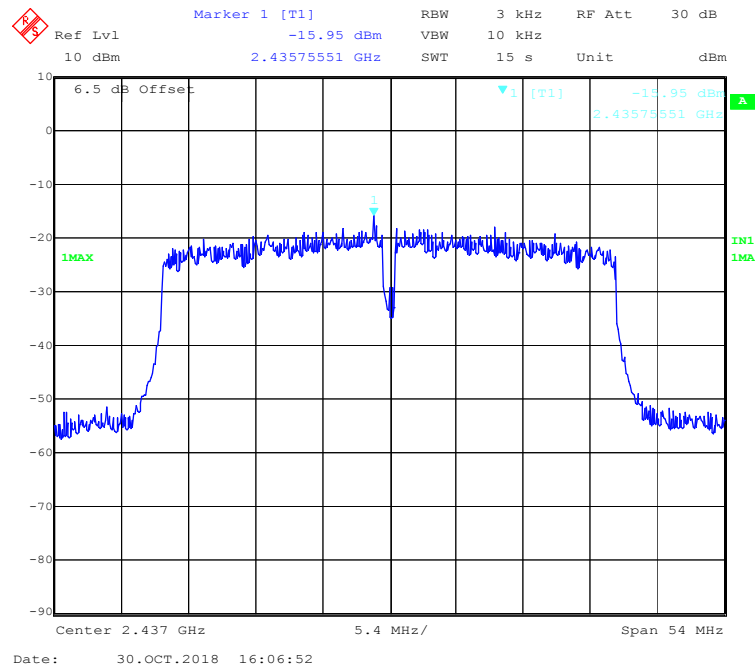

802.11n-HT40 Mode High Channel

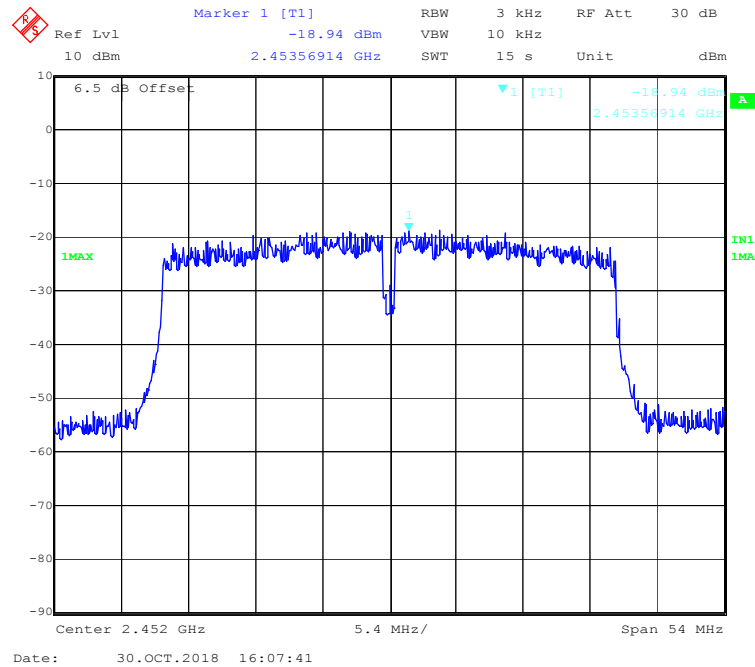

***** END OF REPORT *****