

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H and PART 24 SUBPART E REQUIREMENT

OF

Product Name: GSM 850/1900 mobile phone

Brand Name: Alcatel

Model Name: VLE5

Market Name: OT-E259a

FCC ID: RAD025

Report No.: ER/2005/B0019

Issue Date: Dec. 07 2005

FCC Rule Part: 2 & 24E& 22H

Prepared for TCL & Alcatel Mobile Phones
30/F, Times Square, 500 Zhangyang Rd.,
Shanghai 200122, P.R. China

Prepared by SGS Taiwan Ltd.
No. 134, Wu Kung Rd., Wuku Industrial Zone,
Taipei County, Taiwan.

***Note:** This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.*

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

VERIFICATION OF COMPLIANCE

Applicant: TCL & Alcatel Mobile Phones
30/F, Times Square, 500 Zhangyang Rd., Shanghai 200122, P.R. China

Equipment Under Test: GSM 850/1900 mobile phone

FCC ID Number: RAD025

Brand Name: Alcatel

Model No.: VLE5

Market Name: OT-E259a

Model Difference: N/A

File Number: ER/2005/B0019


Date of test: Nov. 30, 2005 ~ Dec. 06, 2005

Date of EUT Received: Nov. 30, 2005

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-1-1998 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H and FCC PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:		Date	Dec. 07, 2005
	Sky Wang		
Prepared By:		Date	Dec. 07, 2005
	Gigi Yeh		
Approved By		Date	Dec. 07, 2005
	Vincent Su		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Version

Version No.	Date
00	Dec. 07, 2005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Table of Contents

1. GENERAL INFORMATION	6
1.1 Product Description	6
1.2 Related Submittal(s) / Grant (s)	6
1.3 Test Methodology	6
1.4 Test Facility	7
1.5 Special Accessories	7
1.6 Equipment Modifications	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 Test Procedure	8
2.4 Configuration of Tested System	9
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	10
5. RF POWER OUTPUT MEASUREMENT	11
5.1 Standard Applicable	11
5.2 Test Set-up:	11
5.3 Measurement Procedure	11
5.4 Measurement Equipment Used:	11
5.5 Measurement Result	13
6. ERP, EIRP MEASUREMENT	14
6.1 Standard Applicable	14
6.2 Test SET-UP (Block Diagram of Configuration)	14
6.3 Measurement Procedure	16
6.4 Measurement Equipment Used:	17
6.5 Measurement Result	18
7. OCCUPIED BANDWIDTH MEASUREMENT	20
7.1 Standard Applicable	20
7.2 Test Set-up:	20
7.3 Measurement Procedure	20
7.4 Measurement Equipment Used:	20
7.5 Measurement Result:	22
8. OUT OF BAND EMISSION AT ANTENNA TERMINALS	27
8.1 Standard Applicable	27
8.2 Test SET-UP	27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8.3	Measurement Procedure.....	27
8.4	Measurement Equipment Used:.....	28
8.5	Measurement Result.....	29
9.	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	37
9.1	Standard Applicable	37
9.2	EUT Setup (Block Diagram of Configuration)	37
9.3	Measurement Procedure.....	39
9.4	Measurement Equipment Used:.....	40
9.5	Measurement Result.....	40
10.	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	47
10.1	Standard Applicable	47
10.2	Test Set-up:	47
10.3	Measurement Procedure.....	47
10.4	Measurement Equipment Used:.....	48
10.5	Measurement Result.....	49
11.	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	50
11.1	Standard Applicable	50
11.2	Test Set-up:	50
11.3	Measurement Procedure.....	50
11.4	Measurement Equipment Used:.....	50
11.5	Measurement Result.....	52
12.	AC POWER LINE CONDUCTED EMISSION TEST	53
12.1	Standard Applicable	53
12.2	EUT Setup.....	53
12.3	Measurement Procedure.....	53
12.4	Measurement Equipment Used:.....	54
12.5	Measurement Result.....	54
	PHOTOGRPHS OF SET UP.....	79
	PHOTOGRPHS OF EUT.....	81

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. GENERAL INFORMATION

1.1 Product Description

Product	GSM 850/1900 mobile phone	
Model Name	VLE5	
Market Name	OT-E259a	
Model Difference:	N/A	
Trade Name	Alcatel	
Frequency Range and Power	TX: 824.2 MHz – 848.8 MHz	33 dBm
	TX: 1850.2MHz –1909.8MHz	30 dBm
Type of Emission	300KGXW	
Power Supply	Four 5V DC by AC/DC Adapters model number: 3DS09371AGAA,(supplier: Astec and Leader Electronics) model number: 3DS09371AAAA (supplier: Astec and Leader Electronics) One 5Vdc Car Charge Model number:3DS07848AAAA (supplier: Primax)	

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **RAD025** filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1993 and CISPR 22/EN 55022 requirements. Site No. 1(3 & 10 meters) Registration Number: 94644, Anechoic chamber (3 meters) was accredited by CNLA(0513) and NVLAP (200704-0).

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 1.0 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4 Configuration of Tested System

Fig. 2-1 ConFig. 2-1 Configuration of Tested System

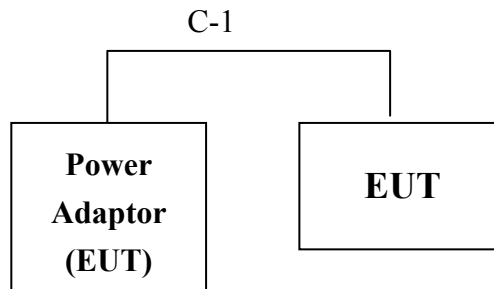


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	FCC ID	Series No.	Data Cable	Power Cord
1.	N/A						

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a) §22.913(a) §24.232(a)	RF Power Output	Compliant
§2.1046(a) §22.913(a) §24.232(a)	ERP/ EIRP measurement	Compliant
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051 §22.917(a) §24.238(a)	Out of Band Emissions at Antenna Terminals and Band Edge	Compliant
§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	Compliant
§2.1055(a)(1)(b)	Frequency Stability vs. Temperature	Compliant
§2.1055(d)(1)(2)	Frequency Stability vs. Voltage	Compliant
§15.107;§15.207	AC Power Line Conducted Emission	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type and band with rated data rate are chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for both GSM and GPRS with all power adaptors. The worst-case E1 mode for GSM 850 band and E2 mode for GSM 1900 band with power adaptor model number: 3DS09371AGAA for channel Low, Mid and High at GSM/PCS mode was reported.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. RF POWER OUTPUT MEASUREMENT


5.1 Standard Applicable

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(b) Mobile station are limited to 2W.

5.2 Test Set-up:

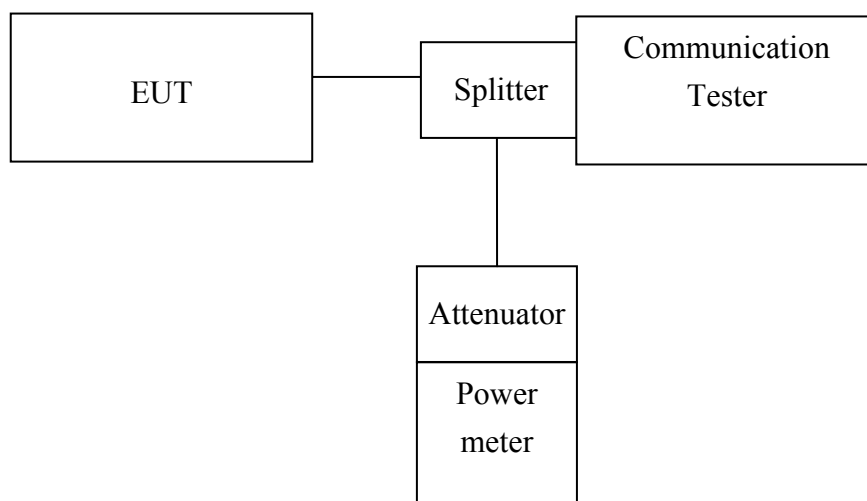

Note: Measurement setup for testing on Antenna connector

5.3 Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

5.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2005	03/28/2006
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2005	06/29/2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Spectrum Analyzer	R&S	FSP 40	100034	11/09/2005	11/10/2006
Power Sensor	Anritsu	MA2490A	31431	06/28/2005	06/29/2006
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2005	06/29/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2005	11/12/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2005	10/06/2007
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2005	10/06/2007
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2005	10/06/2007
Signal Generator	R&S	SMR40	100210	11/09/2005	11/10/2007
Diode Detector	Agilent	8471E	MY4224	N/A	N/A
AC Power Supply	APW-105N	887592	All Power	N/A	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.5 Measurement Result

EUT Mode	Frequency (MHz)	CH	Power meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
GSM 850	824.20	128	6.35	26.42	32.77
	836.60	190	6.4	26.42	32.82
	848.80	251	6.46	26.42	32.88

EUT Mode	Frequency (MHz)	CH	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
PCS 1900	1850.20	512	3.88	26.82	30.70
	1880.00	661	4.01	26.82	30.83
	1909.80	810	4.33	26.82	31.15

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. ERP, EIRP MEASUREMENT

6.1 Standard Applicable


According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(b) Mobile station are limited to 2W EIRP.


6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

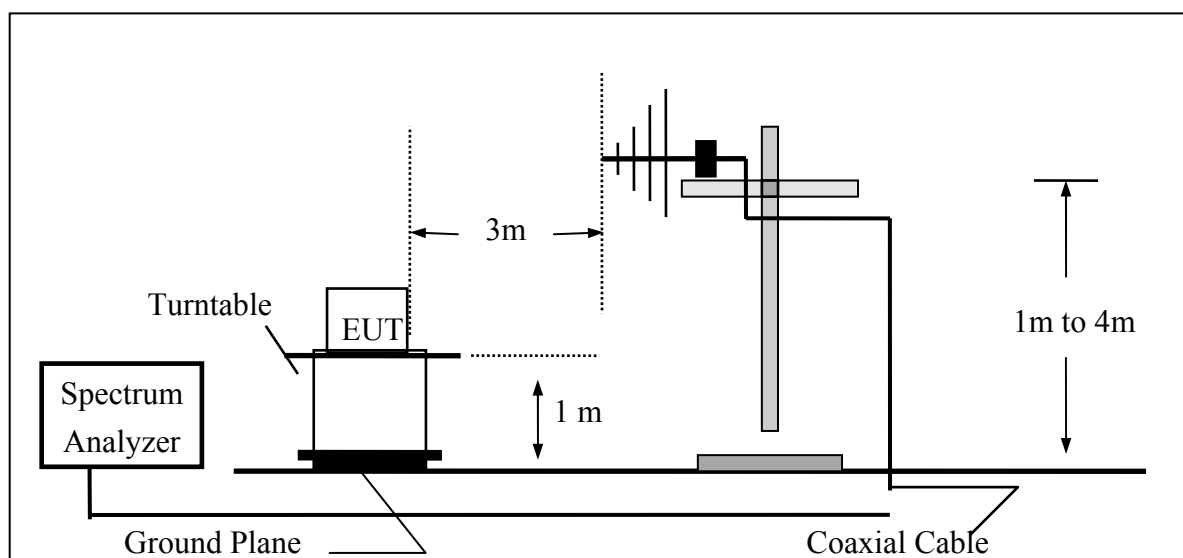


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

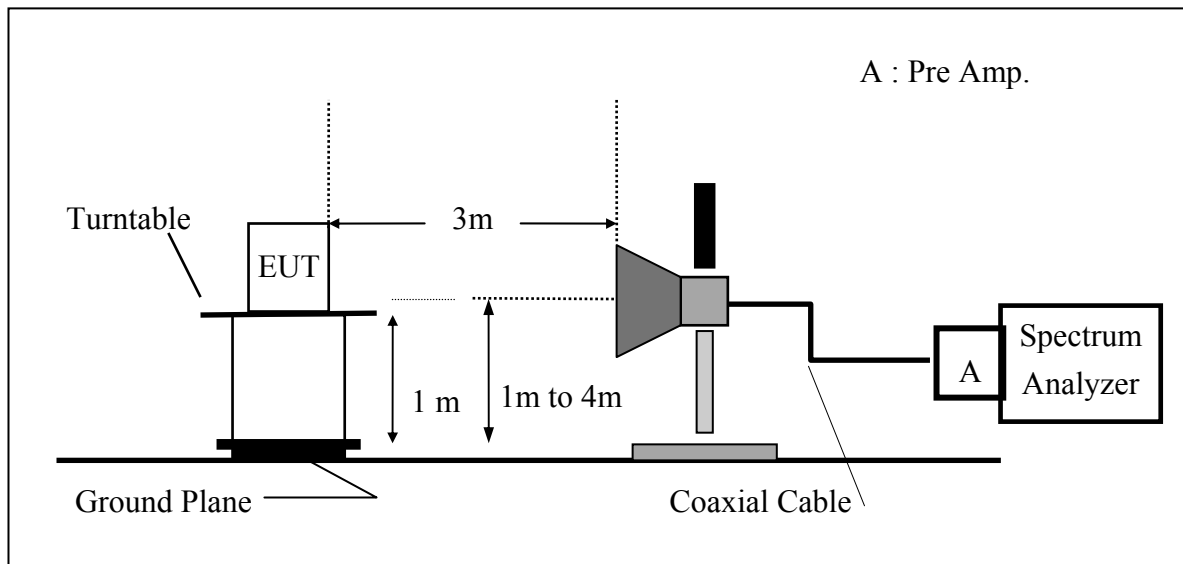

(C) Substituted Method Test Set-UP

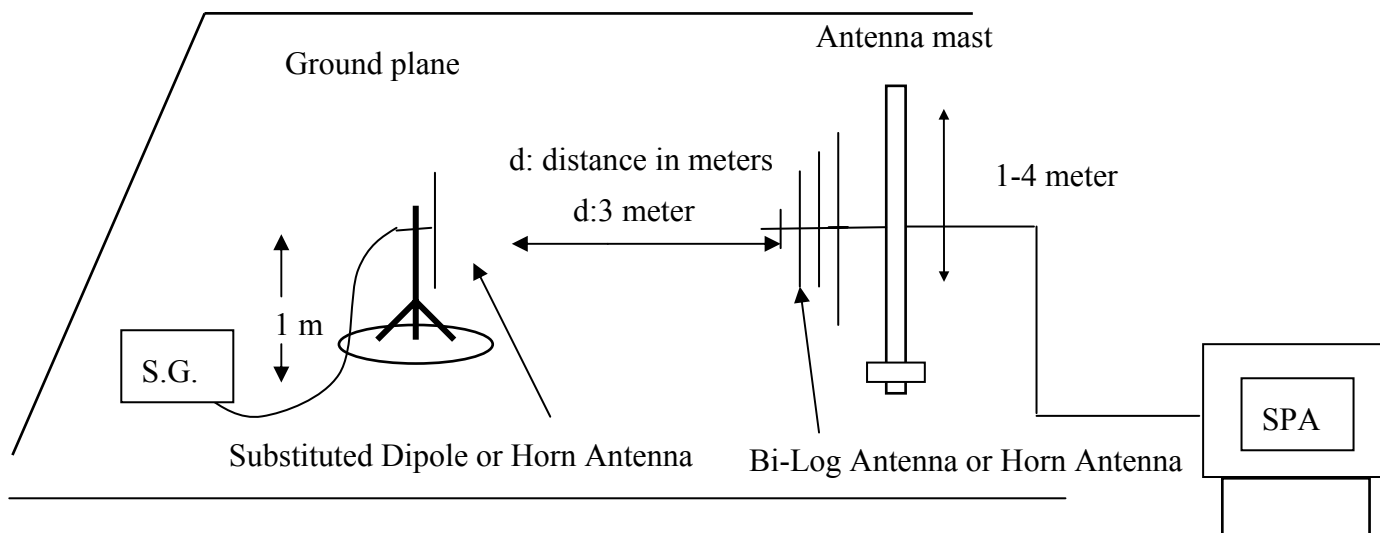

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.3 Measurement Procedure

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was in communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 – 848.80.8MHz were measured using a substitution method. The EUT was replaced by a dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 – 1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2005	05/26/2006
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2005	08/26/2006
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2005	06/02/2006
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2005	08/15/2006
Pre-Amplifier	HP	8447D	2944A09469	07/19/2005	07/18/2006
Pre-Amplifier	HP	8494B	3008A00578	02/26/2005	02/25/2006
Signal Generator	R&S	SMR40	100210	02/09/2005	02/10/2006
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2005	10/08/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2005	10/08/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2005	10/08/2006
Site NSA	SGS	966 chamber	N/A	11/17/2005	11/16/2006
Site NSA	SGS	10m Open-Site	N/A	10/02/2005	10/01/2006
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2005	10/06/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2005	10/13/2006
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2005	06/11/2006
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2005	06/11/2006
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2005	08/15/2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.5 Measurement Result

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
GSM 850	824.00	128	H	V	125.32	37.99	-7.87	3.64	26.48	38.45
				H	125.20	37.55	-7.87	3.64	26.03	38.45
			E1	V	127.83	40.51	-7.87	3.64	28.99	38.45
				H	124.51	36.85	-7.87	3.64	25.33	38.45
			E2	V	122.69	35.37	-7.87	3.64	23.85	38.45
				H	125.51	26.77	-7.87	5.84	13.06	38.45
	836.50	190	H	V	125.36	38.33	-7.88	3.70	26.76	38.45
				H	125.73	38.39	-7.88	3.70	26.82	38.45
			E1	V	127.63	40.60	-7.88	3.70	29.03	38.45
				H	124.37	37.03	-7.88	3.70	25.46	38.45
			E2	V	123.45	36.42	-7.88	3.70	24.85	38.45
				H	125.72	38.39	-7.88	3.70	26.81	38.45
	848.80	251	H	V	127.79	41.05	-7.88	3.75	29.42	38.45
				H	128.33	41.31	-7.88	3.75	29.68	38.45
			E1	V	129.05	42.31	-7.88	3.75	30.68	38.45
				H	125.10	38.08	-7.88	3.75	26.45	38.45
			E2	V	125.46	38.72	-7.88	3.75	27.09	38.45
				H	128.04	41.02	-7.88	3.75	29.39	38.45

Remark :

- The RBW,VBW of SPA for frequency
Below 1GHz was RBW=100 KHz, VBW=300KHz,
Above 1GHz was RBW= 1MHz , VBW= 3MHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

EUT Mode	Frequency (MHz)	CH	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
PCS 1900	1850.20	512	H	V	126.40	19.44	9.90	5.41	23.93	33.00
				H	131.75	24.86	9.90	5.41	29.35	33.00
			E1	V	130.23	23.27	9.90	5.41	27.76	33.00
				H	127.18	20.29	9.90	5.41	24.78	33.00
			E2	V	126.90	19.94	9.90	5.41	24.43	33.00
				H	132.77	25.88	9.90	5.84	29.94	33.00
	1880.00	661	H	V	124.29	17.34	9.99	5.46	21.87	33.00
				H	130.91	24.04	9.99	5.46	28.57	33.00
			E1	V	129.54	22.59	9.99	5.46	27.12	33.00
				H	127.24	20.37	9.99	5.46	24.90	33.00
			E2	V	127.32	20.37	9.99	5.46	24.90	33.00
				H	132.13	25.26	9.99	5.46	29.79	33.00
	1909.80	810	H	V	122.12	15.18	10.08	5.51	19.75	33.00
				H	129.46	22.61	10.08	5.51	27.17	33.00
			E1	V	128.71	21.77	10.08	5.51	26.34	33.00
				H	125.55	18.70	10.08	5.51	23.26	33.00
			E2	V	126.69	19.75	10.08	5.51	24.32	33.00
				H	131.40	24.55	10.08	5.51	29.11	33.00

Remark :

- The RBW,VBW of SPA for frequency
Below 1GHz was RBW=100 KHz, VBW=300KHz,
Above 1GHz was RBW= 1MHz , VBW= 3MHz


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7. OCCUPIED BANDWIDTH MEASUREMENT

7.1 Standard Applicable

According to §FCC 2.1049.

7.2 Test Set-up:

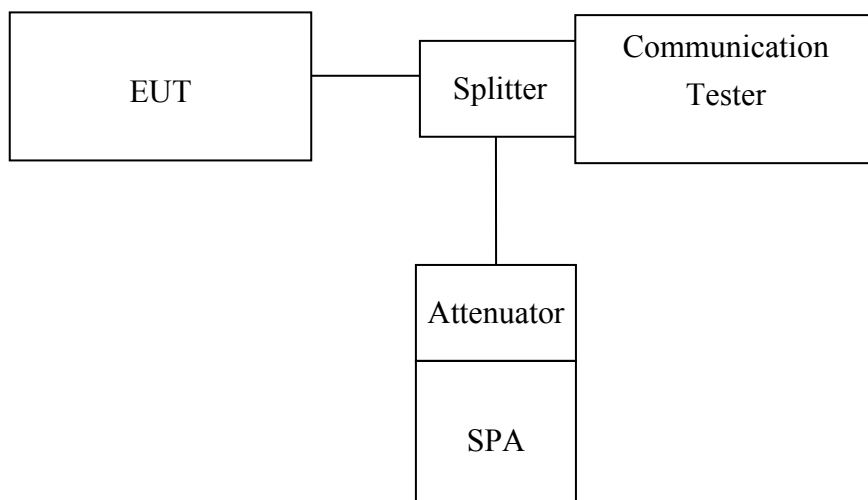

Note: Measurement setup for testing on Antenna connector

7.3 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2005	03/28/2006
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2005	06/29/2006
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2005	11/10/2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Power Sensor	Anritsu	MA2490A	31431	06/28/2005	06/29/2006
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2005	06/29/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2005	11/12/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2005	10/06/2006
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2005	10/06/2006
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2005	10/06/2006
Signal Generator	R&S	SMR40	100210	11/09/2005	11/10/2006
Diode Detector	Agilent	8471E	MY4224	N/A	N/A
AC Power Supply	APW-105N	887592	All Power	N/A	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.5 Measurement Result:.

EUT Mode	Frequency (MHz)	CH	99%Bandwidth (MHz)
GSM 850	824.20	128	0.2414
	836.60	190	0.2400
	848.80	251	0.2388

EUT Mode	Frequency (MHz)	CH	99%Bandwidth (MHz)
PCS 1900	1850.20	512	0.2416
	1880.00	661	0.2391
	1909.80	810	0.2418

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 7-1: GSM Channel Low



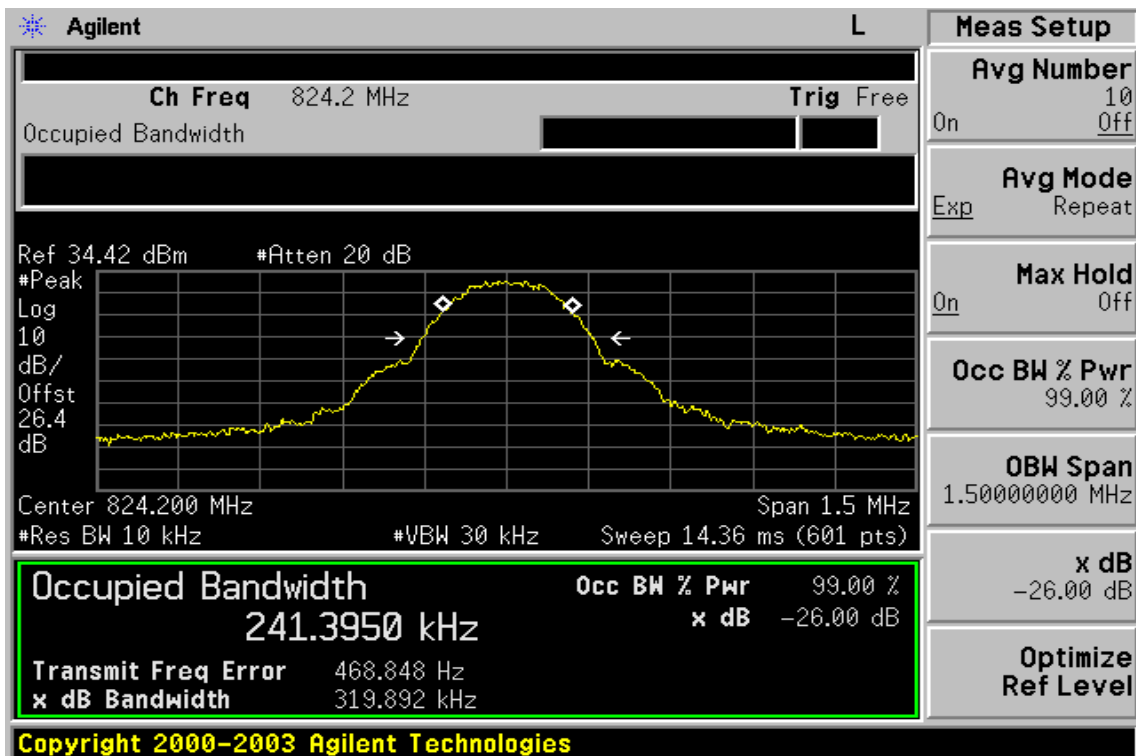


Figure 7-2 GSM Channel Mid

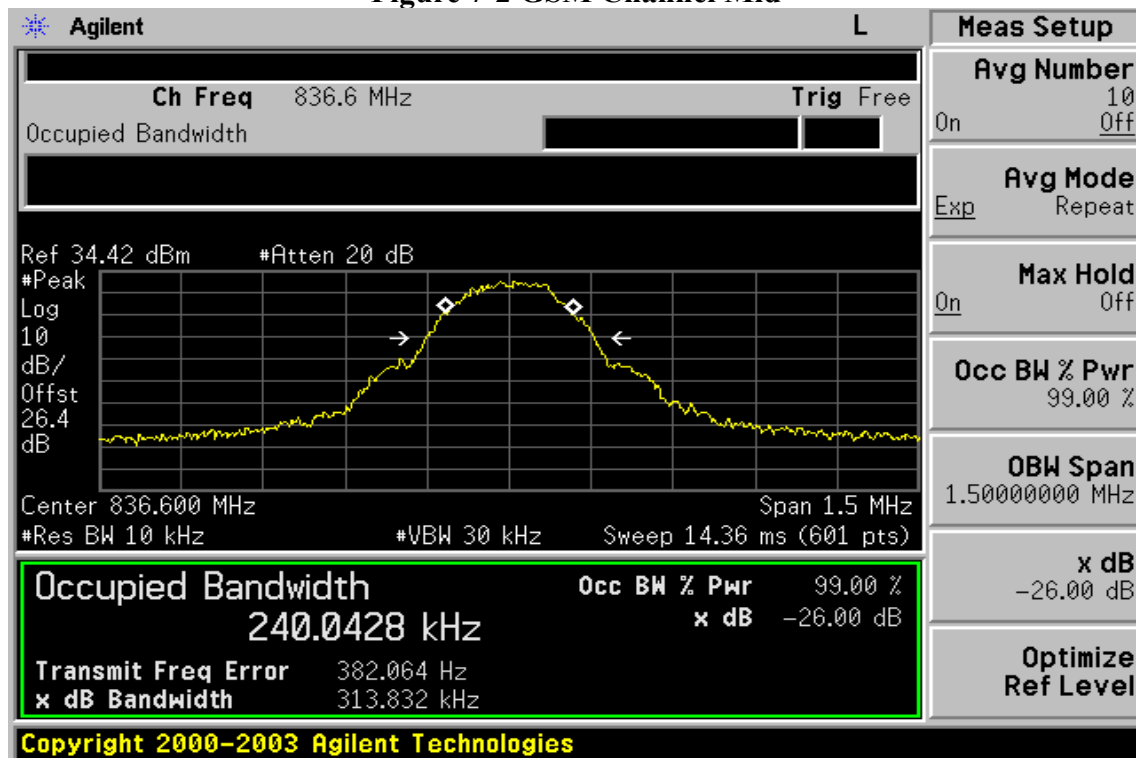

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 7-3: GSM Channel High

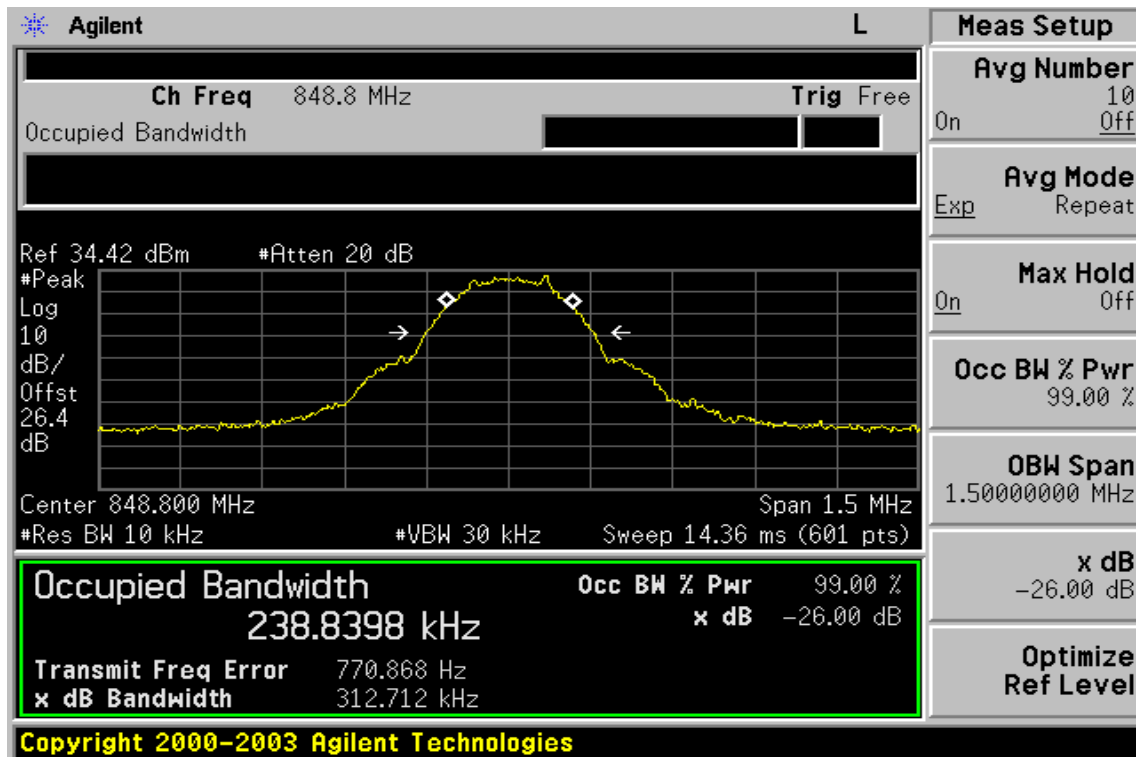

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 7-4: PCS Channel Low



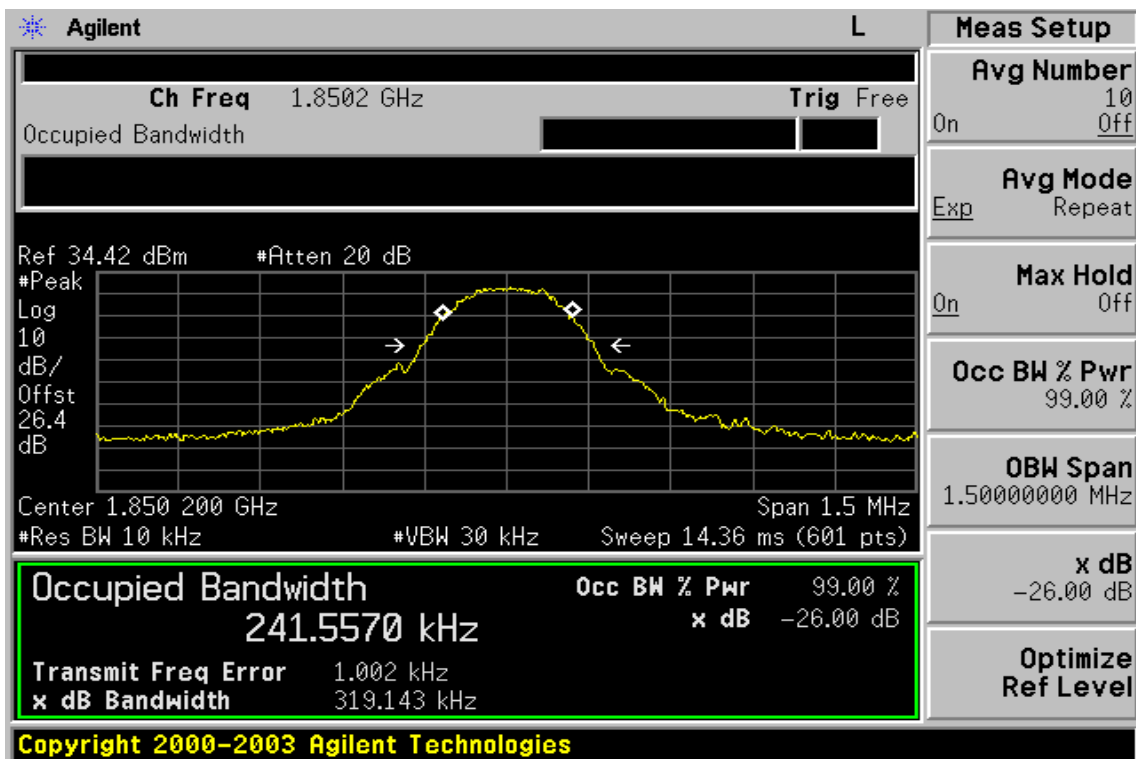


Figure 7-5 PCS Channel Mid

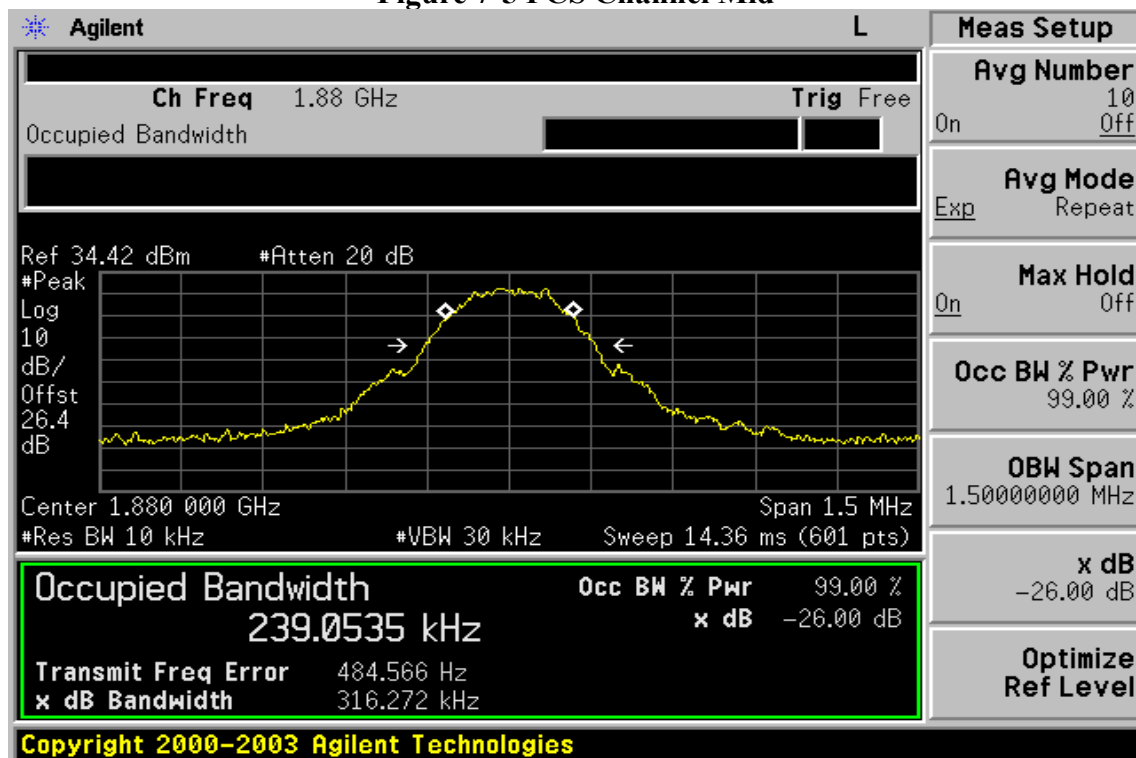

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 7-6: PCS Channel High

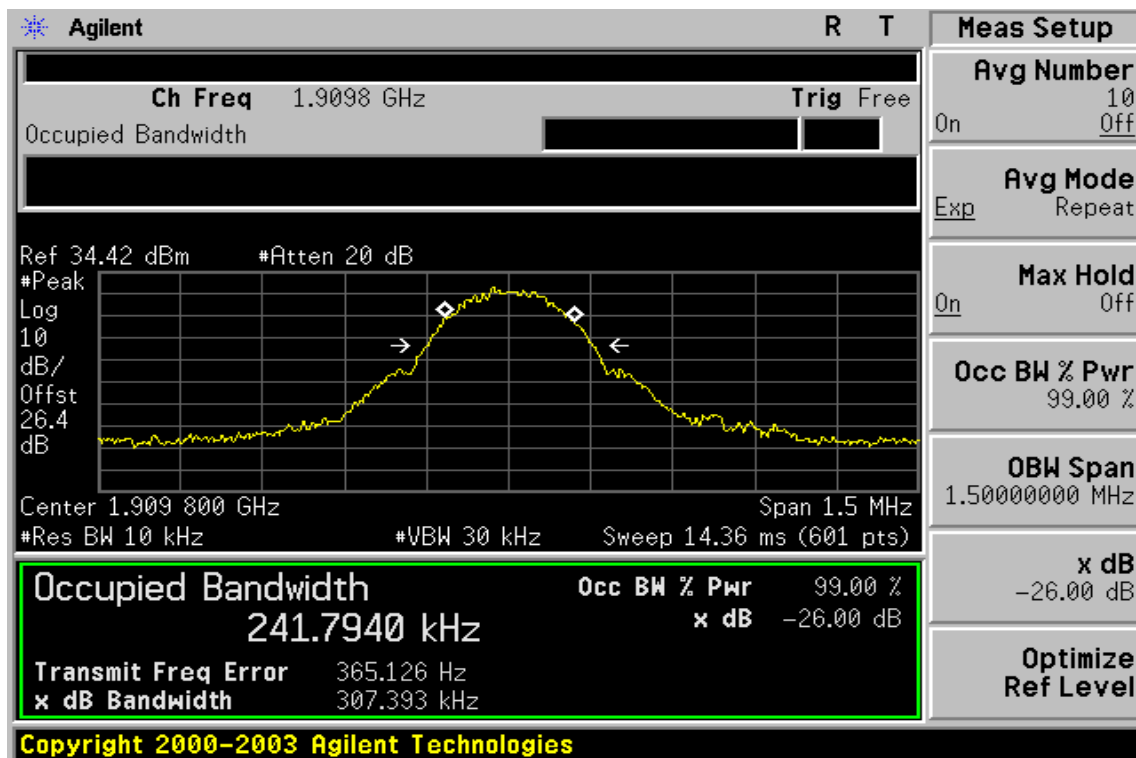

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


8. OUT OF BAND EMISSION AT ANTENNA TERMINALS

8.1 Standard Applicable

According to FCC §2.1051.

FCC §22.917(a), §24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

8.2 Test SET-UP

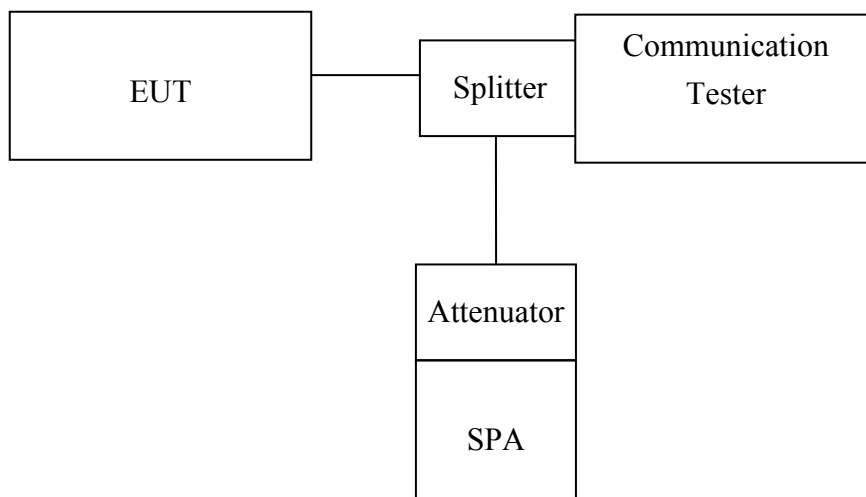

Note: Measurement setup for testing on Antenna connector

8.3 Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic.
Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



8.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2005	03/28/2006
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2005	06/29/2006
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2005	11/10/2006
Power Sensor	Anritsu	MA2490A	31431	06/28/2005	06/29/2006
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2005	06/29/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2005	11/12/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2005	10/06/2006
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2005	10/06/2006
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2005	10/06/2006
Signal Generator	R&S	SMR40	100210	11/09/2005	11/10/2006
Diode Detector	Agilent	8471E	MY4224	N/A	N/A
AC Power Supply	APW-105N	887592	All Power	N/A	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



8.5 Measurement Result

Figure 8-1: Out of Band emission at antenna terminals– GSM Channel Lowest

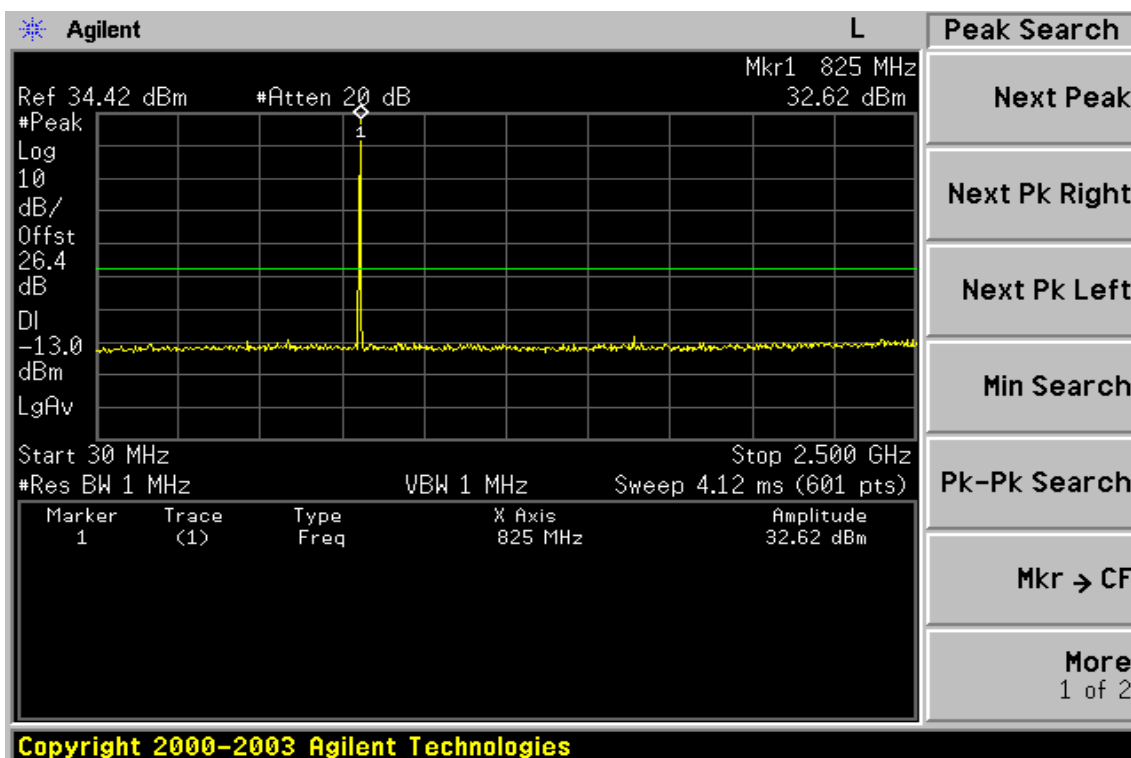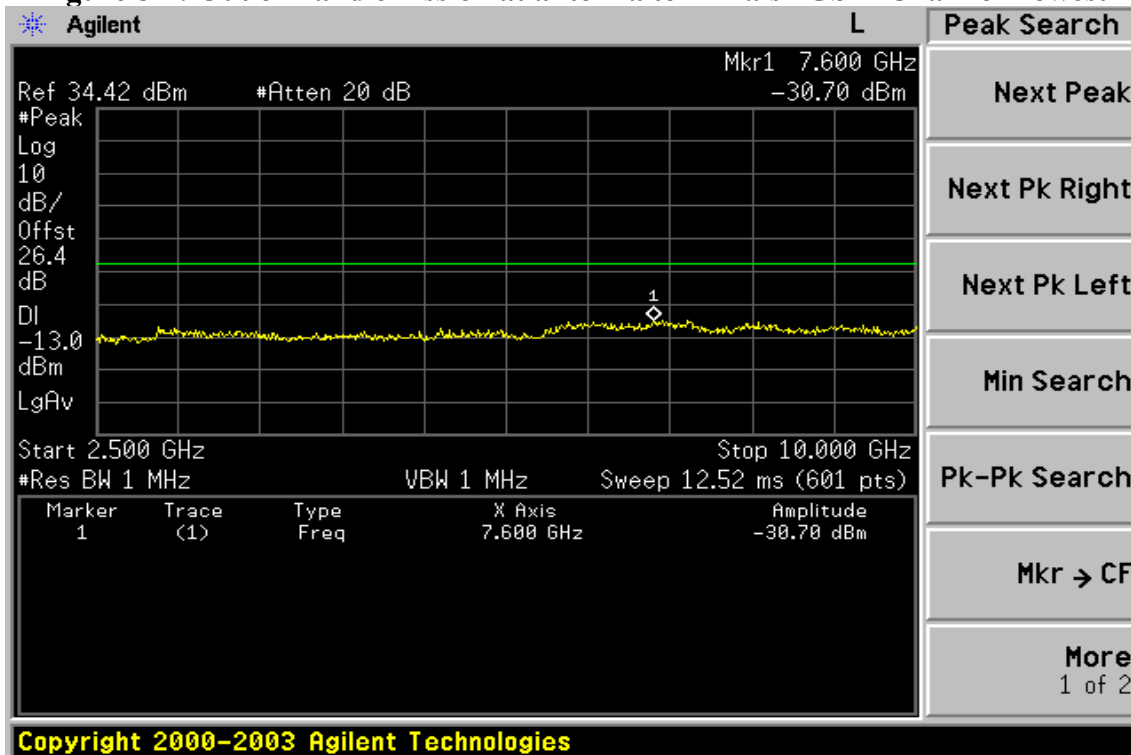



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-2: Out of Band emission at antenna terminals –GSM Channel Mid

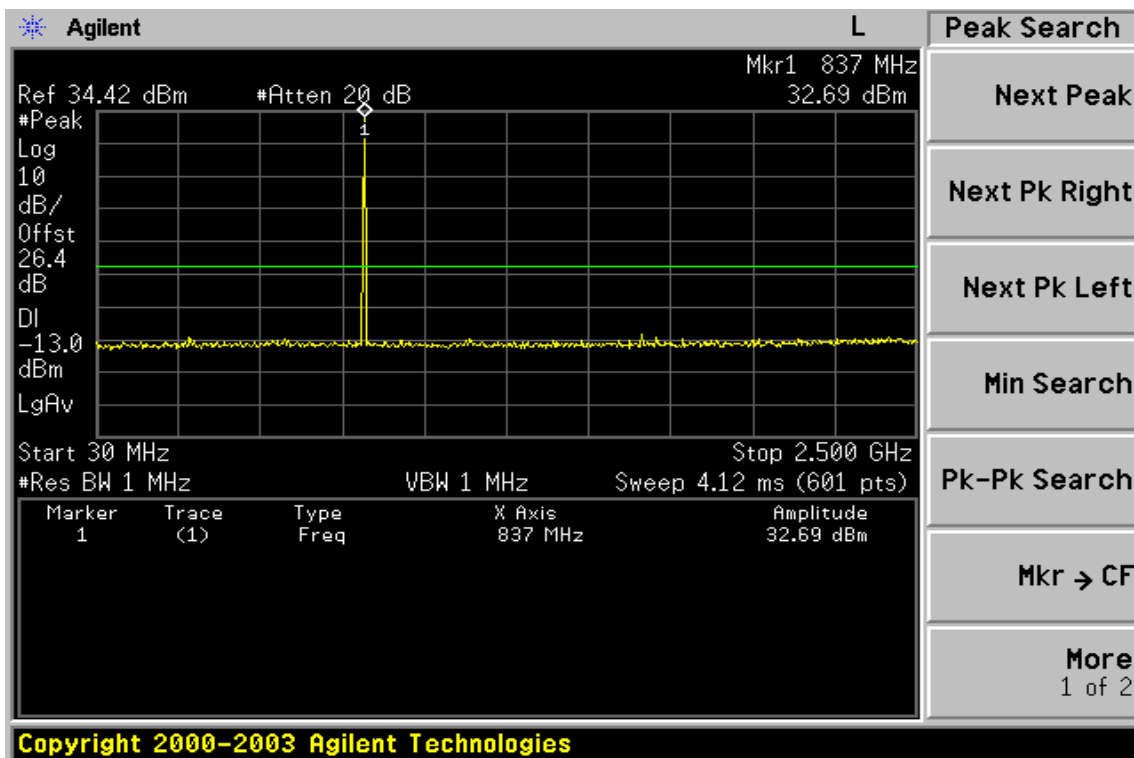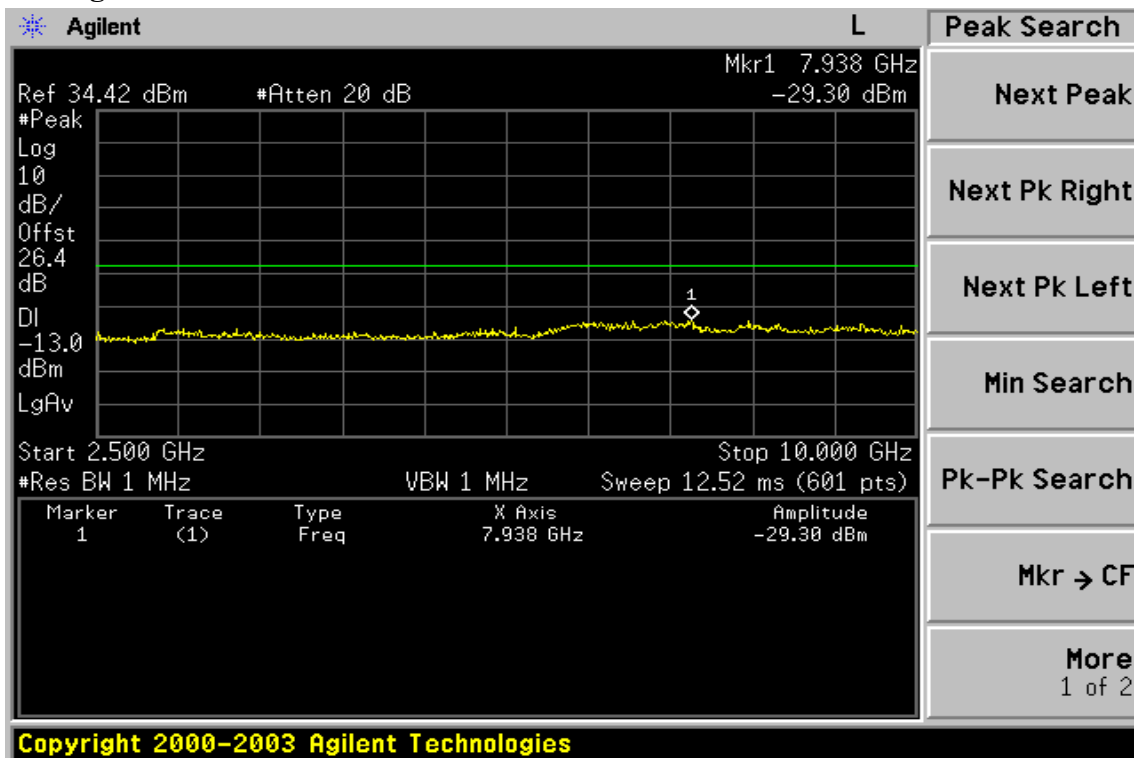

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-3: Out of Band emission at antenna terminals–GSM Channel Highest

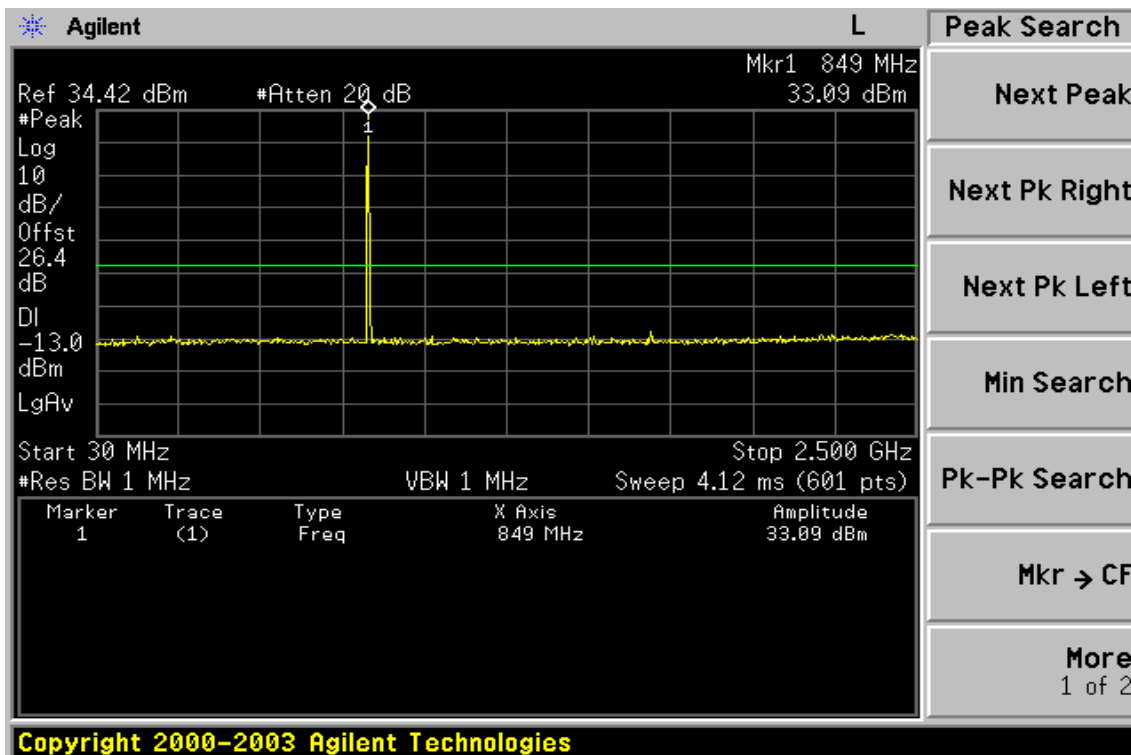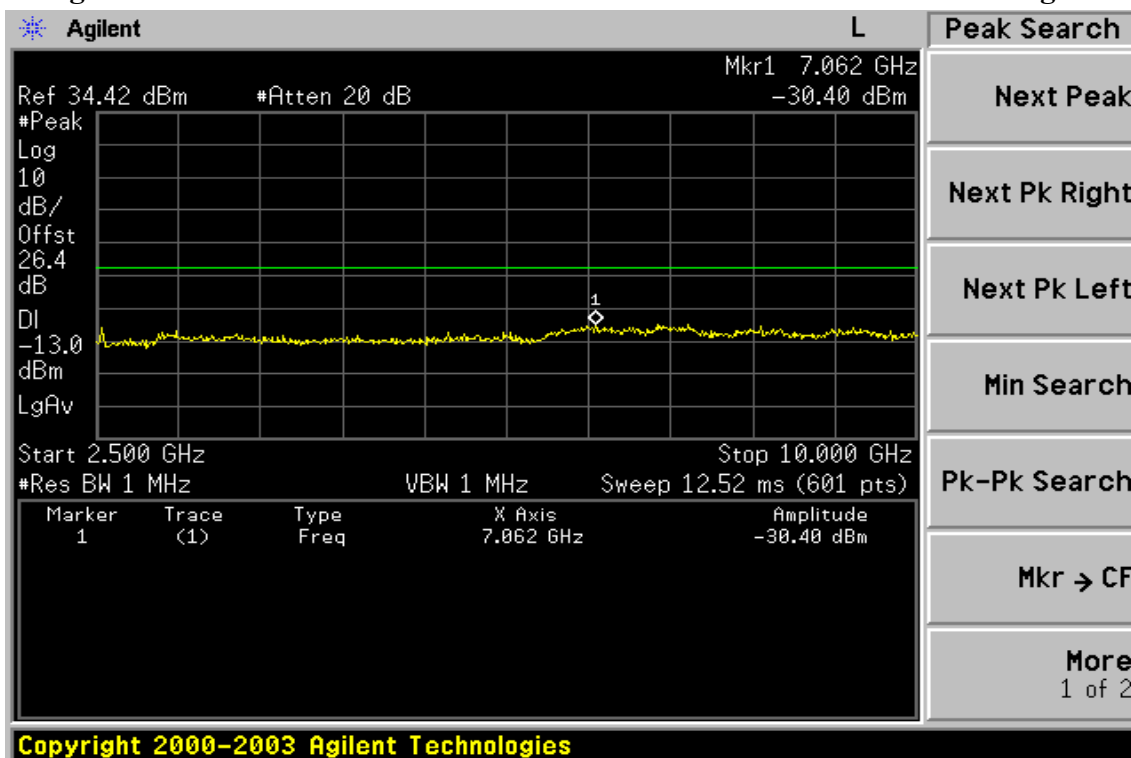

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-4: Bad edge emission at antenna terminals – GSM Channel Lowest




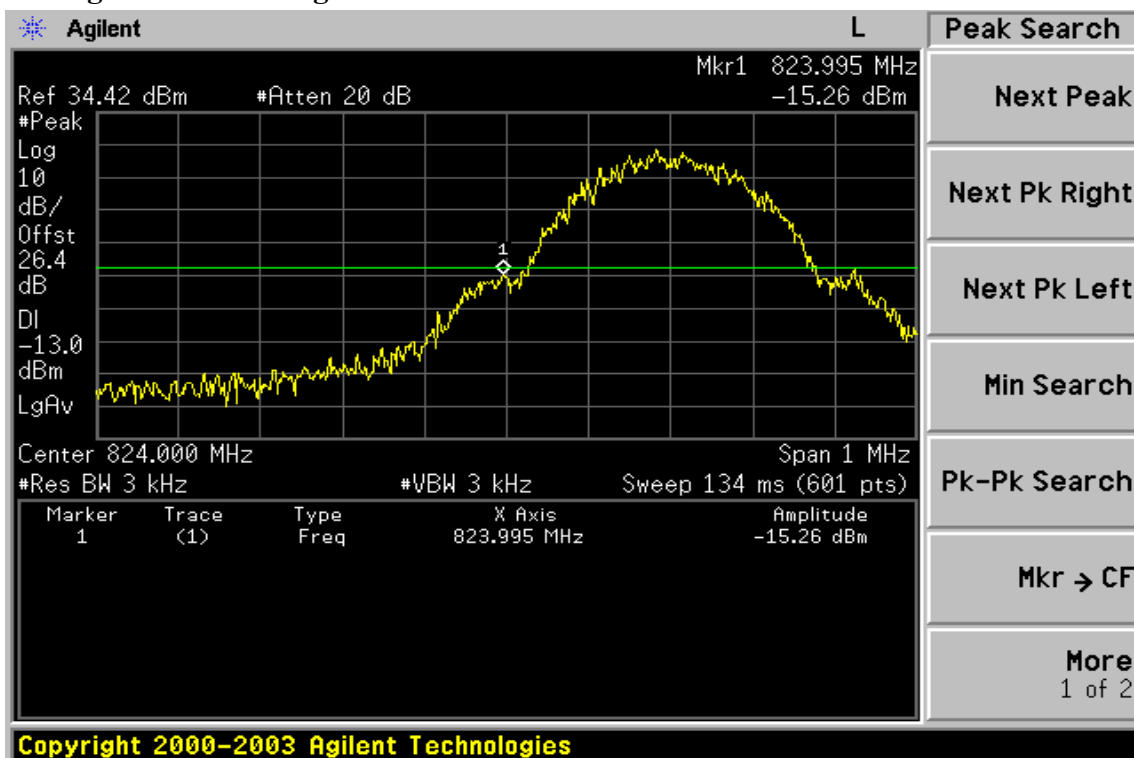


Figure 8-5: Band edge emission at antenna terminals – GSM Channel Highest

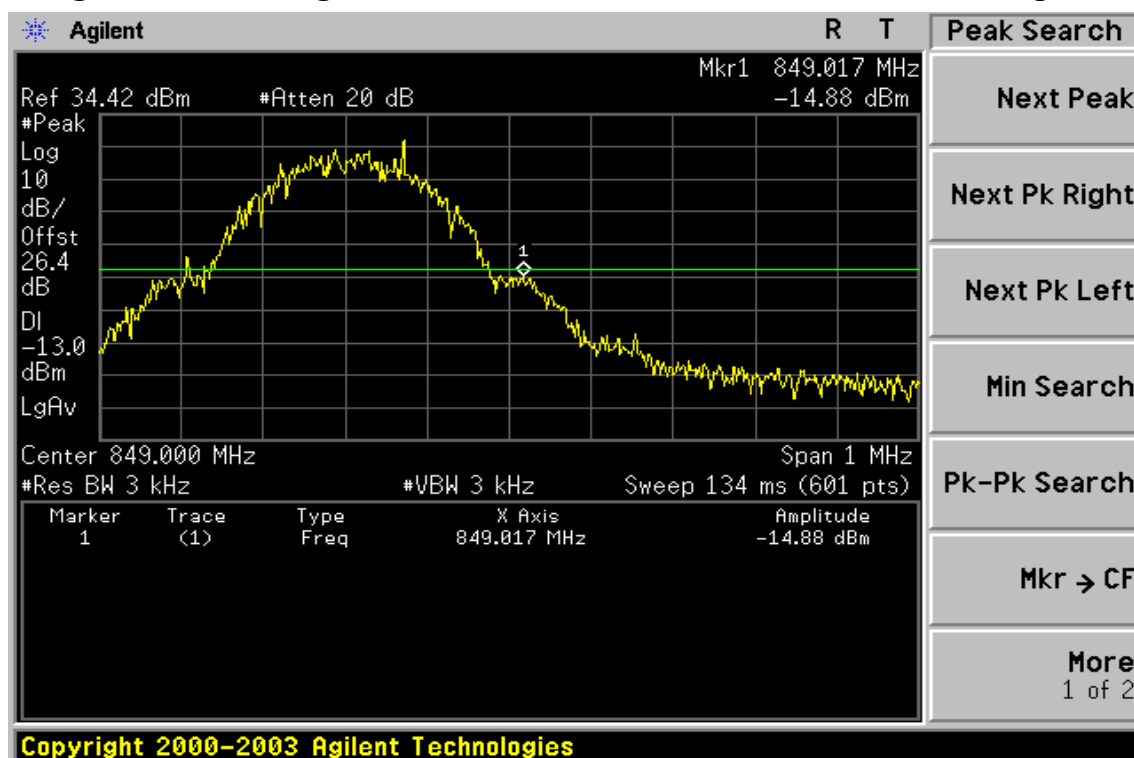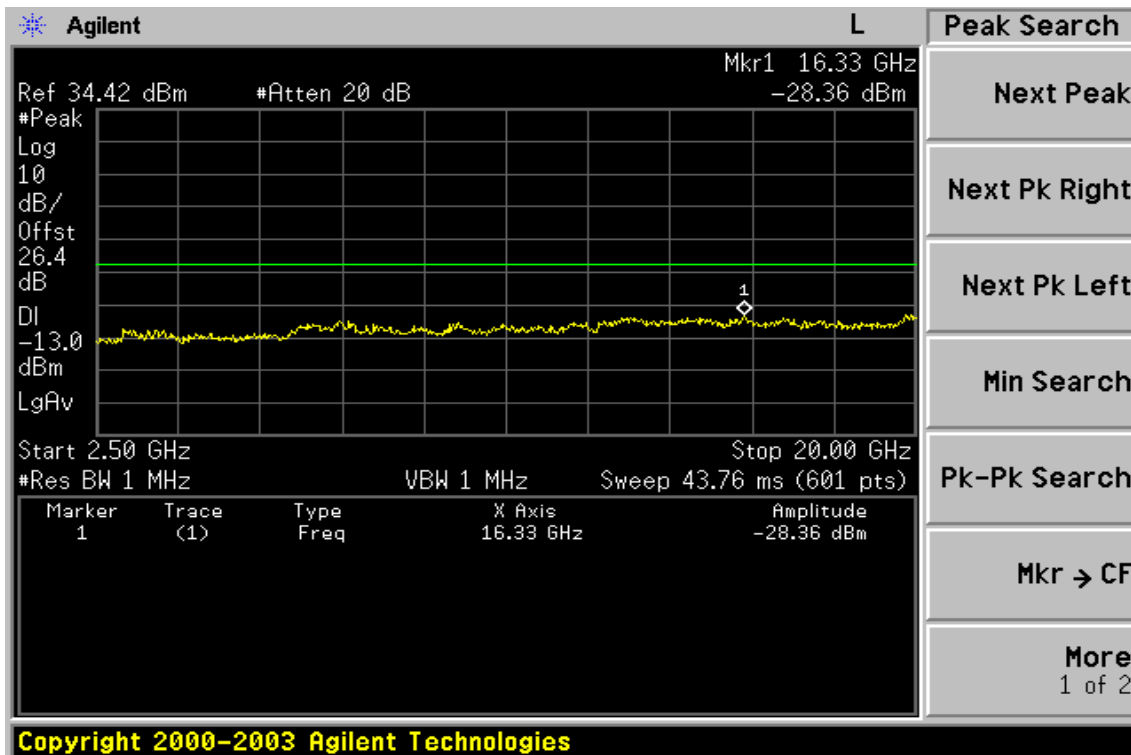



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-6: Out of Band emission at antenna terminals– PCS Channel Lowest

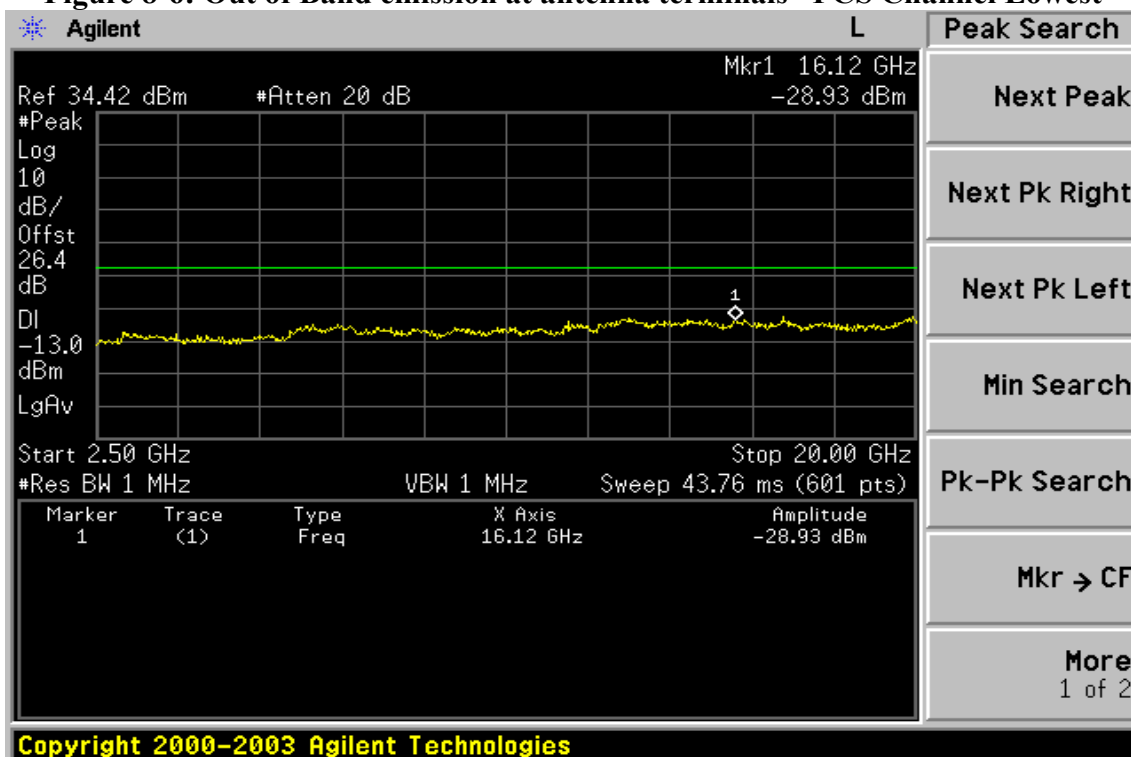



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-7: Out of Band emission at antenna terminals –PCS Channel Mid

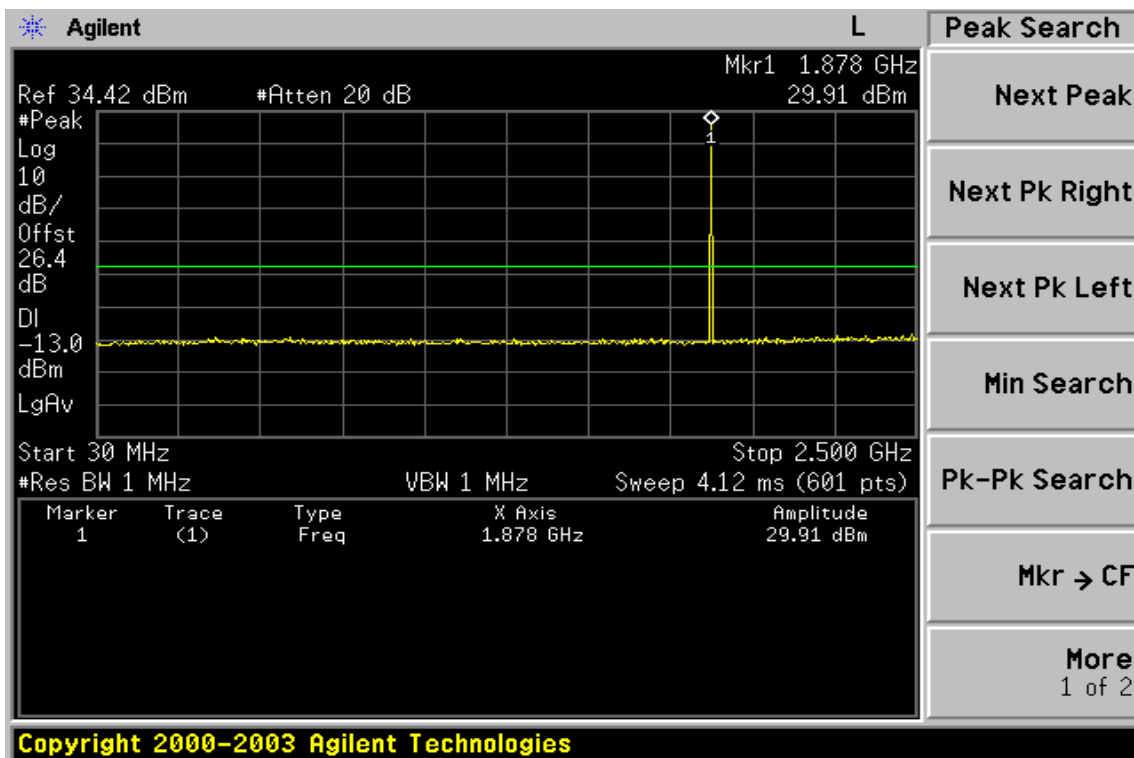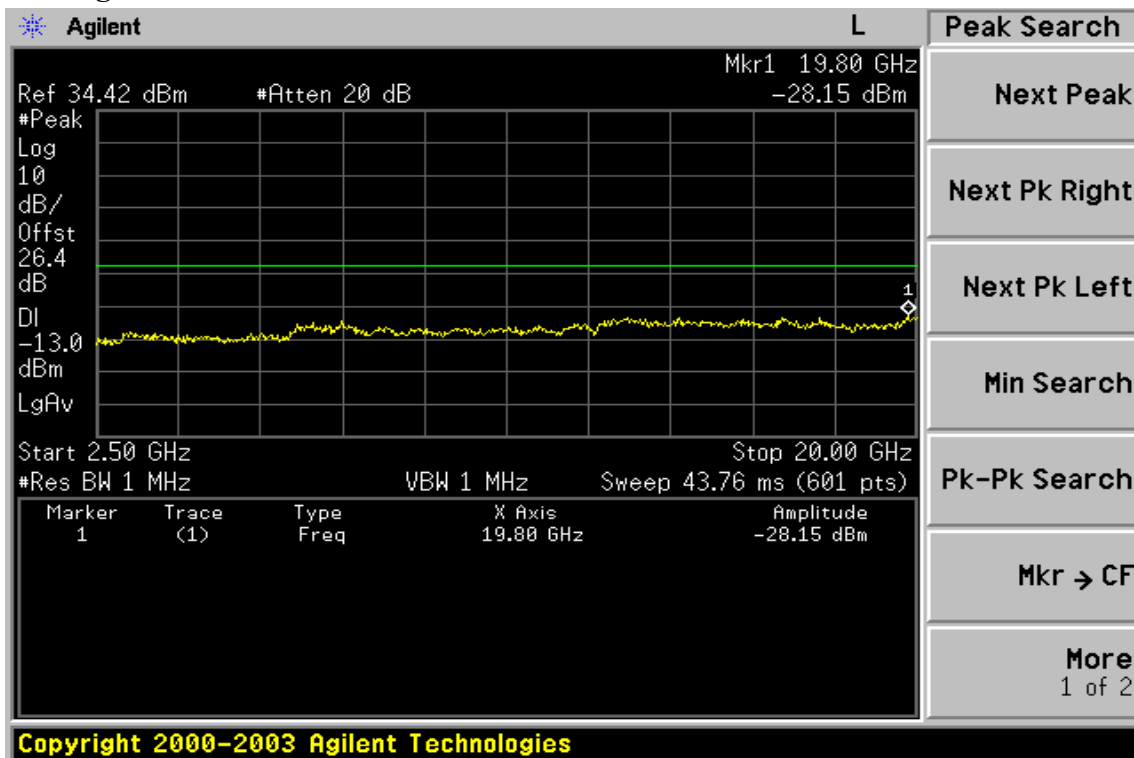

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-8: Out of Band emission at antenna terminals–PCS Channel Highest

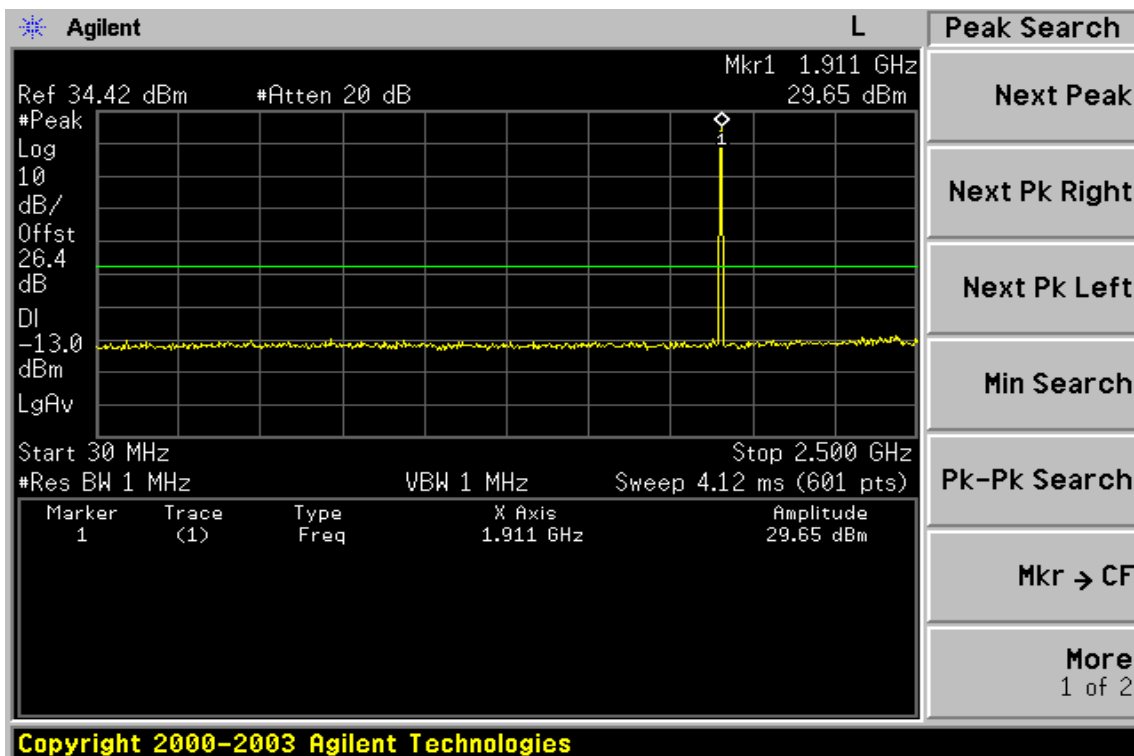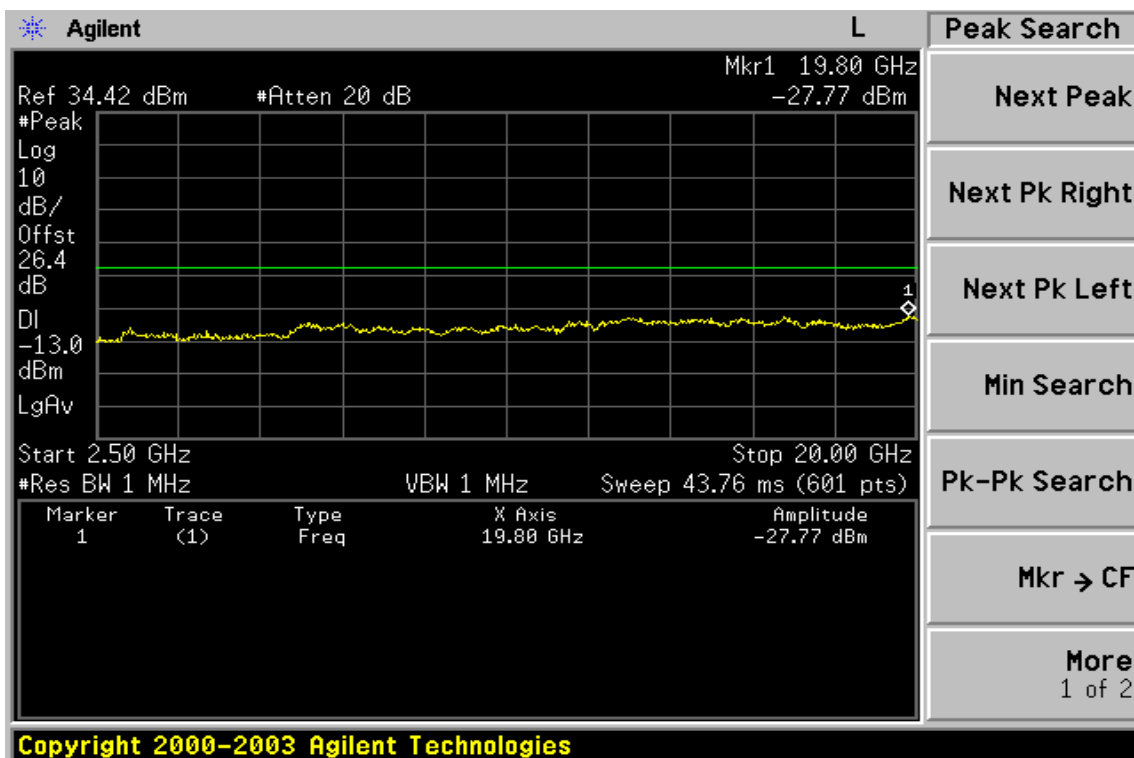

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Figure 8-9: Bad edge emission at antenna terminals – PCS Channel Lowest


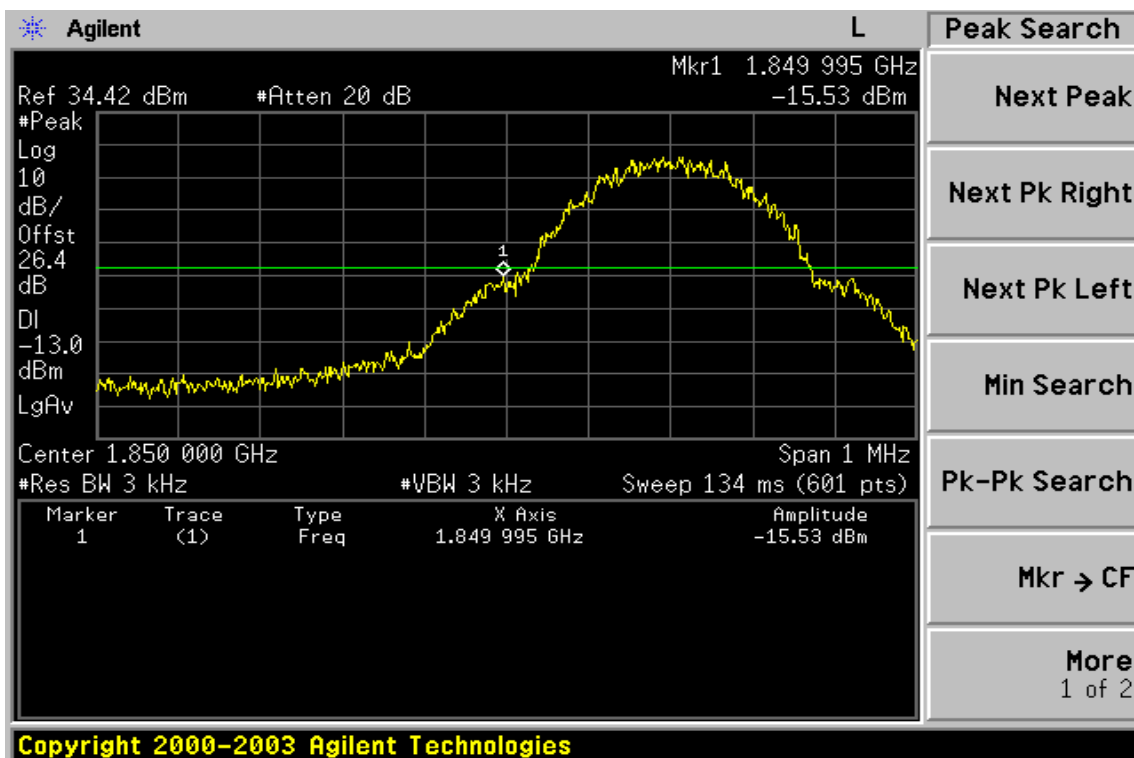


Figure 8-10: Band edge emission at antenna terminals – PCS Channel Highest

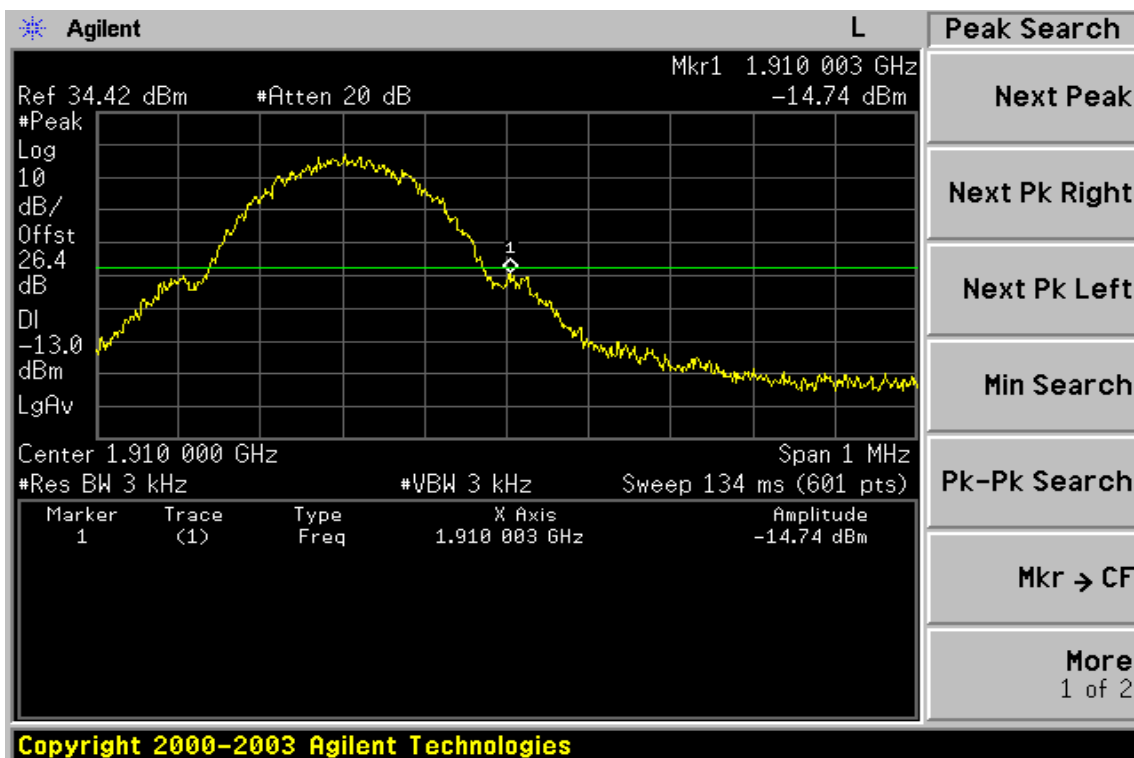

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


9.1 Standard Applicable

According to FCC §2.1053,

FCC §22.917(a), §24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than $43 + 10 \log$ (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)


9.2 EUT Setup (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

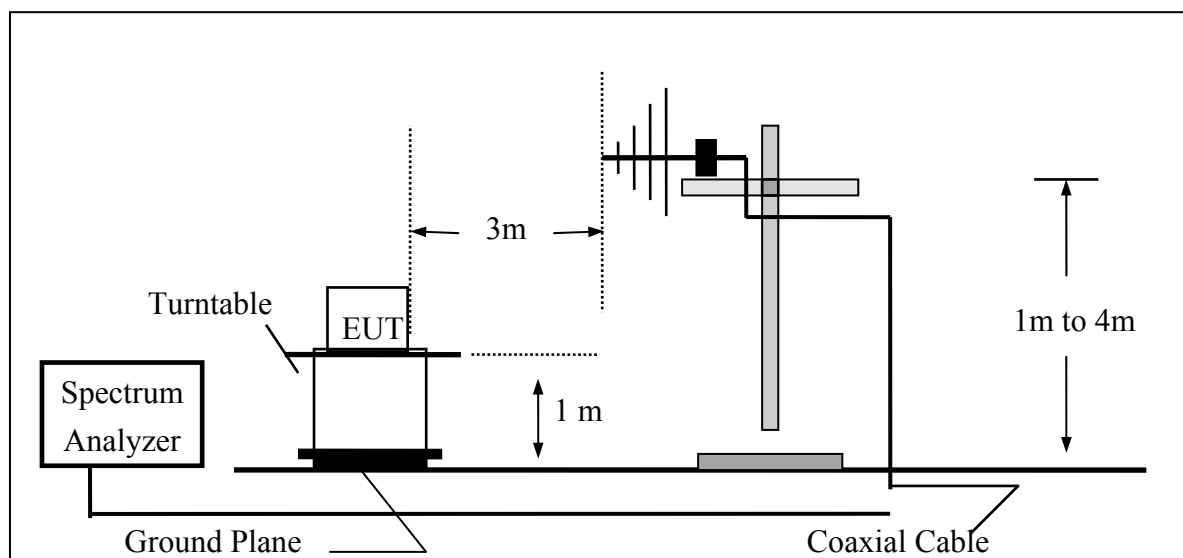


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

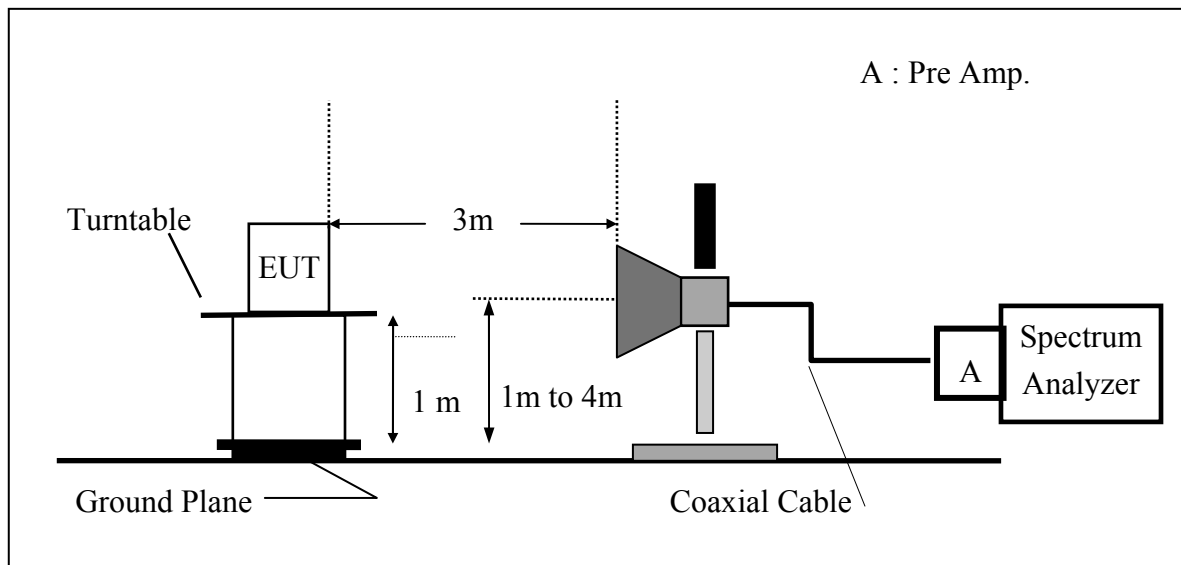

(C) Substituted Method Test Set-UP

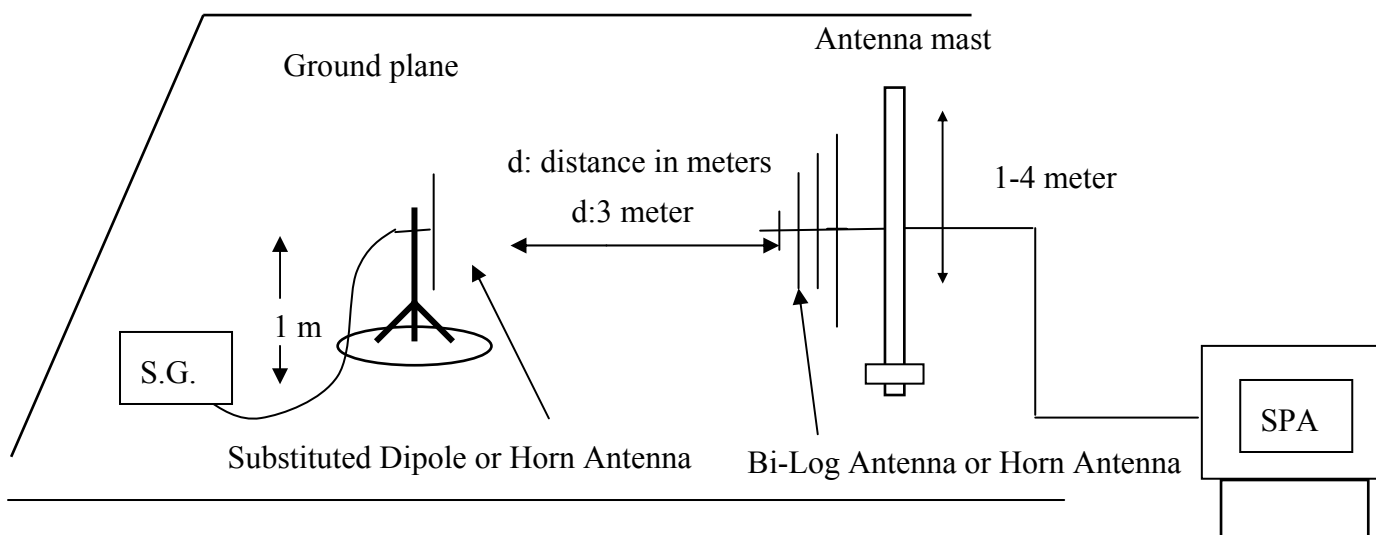

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9.3 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dBi)} - \text{Cable Loss (dB)}$$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

9.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2005	05/26/2006
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2005	08/26/2006
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2005	06/02/2006
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2005	08/15/2006
Pre-Amplifier	HP	8447D	2944A09469	07/19/2005	07/18/2006
Pre-Amplifier	HP	8494B	3008A00578	02/26/2005	02/25/2006
Signal Generator	R&S	SMR40	100210	02/09/2005	02/10/2006
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2005	10/08/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2005	10/08/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2005	10/08/2006
Site NSA	SGS	966 chamber	N/A	11/17/2005	11/16/2006
Site NSA	SGS	10m Open-Site	N/A	10/02/2005	10/01/2006
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2005	10/06/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2005	10/13/2006
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2005	06/11/2006
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2005	06/11/2006
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2005	08/15/2006

9.5 Measurement Result

Refer to attach tabular data sheets.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low E1 Mode

Test Date: Dec.02, 2005

Fundamental Frequency : 824.20 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver / Hor

Humidity : 65%

Adaptor Model: 3DS09371AAAA

Supplier: Leader

Freq.	SPA. Reading	Ant.Pol.	S.G Output	Antenna Gain	Cable Loss	ERP/ EIRP	Limit	Safe Margin
(MHz)	(dBuV)	H/V	(dBm)	(dB/dBi)	(dB)	(dBm)	(dBm)	(dBm)
31.94	42.35	V	-61.79	-6.43	0.70	-68.92	-13.00	-55.92
824.00	84.98	V	-2.35	-7.87	3.64	-13.87	-12.00	-1.87
1652.50	54.28	V	-52.76	9.30	5.06	-48.52	-13.00	-35.52
2477.50	45.83	V	-58.21	10.07	6.30	-54.44	-13.00	-42.44
4945.62	38.98	V	-57.59	12.65	9.19	-54.13	-13.00	-41.13
5769.89	46.89	V	-47.70	13.55	9.80	-43.94	-13.00	-30.94
6594.16	---	V	---	---	---	---	-13.00	---
7418.43	---	V	---	---	---	---	-13.00	---
8242.70	---	V	---	---	---	---	-13.00	---
58.13	40.19	H	-70.24	-0.49	0.94	-71.67	-13.00	-58.67
823.99	78.49	H	-9.17	-7.87	3.64	-20.69	-13.00	-7.69
1652.50	54.28	H	-52.73	9.30	5.06	-48.49	-13.00	-35.49
2477.50	45.83	H	-58.20	10.07	6.30	-54.43	-13.00	-41.43
4945.62	38.98	H	-57.52	12.65	9.19	-54.06	-13.00	-41.06
5769.89	46.89	H	-47.66	13.55	9.80	-43.90	-13.00	-30.90
6594.16	---	H	---	---	---	---	-13.00	---
7418.43	---	H	---	---	---	---	-13.00	---
8242.70	---	H	---	---	---	---	-13.00	---

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dBd/dBi) - Cable \text{ loss} (dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid E1 Mode

Test Date: Dec.02, 2005

Fundamental Frequency : 836.60 MHz

Test By: Sky

Temperature : 25°C

Pol: Ver / Hor

Humidity : 65%

Adaptor Model: 3DS09371AAAA

Supplier: Leader

Freq.	SPA. Reading	Ant.Pol.	S.G Output	Antenna Gain	Cable Loss	ERP/ EIRP	Limit	Safe Margin
(MHz)	(dBuV)	H/V	(dBm)	(dB/dBi)	(dB)	(dBm)	(dBm)	(dBm)
53.28	42.25	V	-66.16	-0.55	0.92	-67.63	-13.00	-54.63
1617.50	57.96	V	-49.09	9.19	5.00	-44.90	-13.00	-31.90
2515.00	49.90	V	-53.96	10.10	6.35	-50.22	-13.00	-37.22
5005.00	41.00	V	-55.33	12.66	9.25	-51.92	-13.00	-38.92
5855.64	39.86	V	-54.49	13.68	9.85	-50.65	-13.00	-37.65
6692.16	---	V	---	---	---	---	-13.00	---
7528.68	---	V	---	---	---	---	-13.00	---
8365.20	---	V	---	---	---	---	-13.00	---
58.13	40.41	H	-70.02	-0.49	0.94	-71.45	-13.00	-58.45
1667.50	52.30	H	-54.70	9.35	5.09	-50.44	-13.00	-37.44
2515.00	42.39	H	-61.47	10.10	6.35	-57.72	-13.00	-44.72
5855.64	37.57	H	-56.75	13.68	9.85	-52.91	-13.00	-39.91
6692.16	---	H	---	---	---	---	-13.00	---
7528.68	---	H	---	---	---	---	-13.00	---
8365.20	---	H	---	---	---	---	-13.00	---

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dBd/dBi) - Cable \text{ loss} (dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High E1 Mode

Fundamental Frequency : 848.80 MHz

Temperature : 25°C

Humidity : 65%

Test Date: Dec.02, 2005

Test By: Sky

Pol: Ver / Hor

Adaptor Model: 3DS09371AAAA

Supplier: Leader

Freq.	SPA. Reading	Ant.Pol.	S.G Output	Antenna Gain	Cable Loss	ERP/ EIRP	Limit	Safe Margin
(MHz)	(dBuV)	H/V	(dBm)	(dB/dBi)	(dB)	(dBm)	(dBm)	(dBm)
53.28	41.88	V	-66.53	-0.55	0.92	-68.00	-13.00	-55.00
849.02	83.52	V	-3.21	-7.88	3.75	-14.84	-13.00	-1.84
1690.00	58.79	V	-48.23	9.41	5.13	-43.95	-13.00	-30.95
2552.50	46.14	V	-57.63	10.21	6.41	-53.83	-13.00	-40.83
4240.00	39.83	V	-59.53	12.63	8.46	-55.36	-13.00	-42.36
5080.00	40.80	V	-55.38	12.73	9.31	-51.96	-13.00	-38.96
5942.09	---	V	---	---	---	---	-13.00	---
6790.96	---	V	---	---	---	---	-13.00	---
7639.83	---	V	---	---	---	---	-13.00	---
8488.70	---	V	---	---	---	---	-13.00	---
58.13	40.25	H	-70.18	-0.49	0.94	-71.61	-13.00	-58.61
849.02	78.68	H	-8.34	-7.88	3.75	-19.96	-13.00	-6.96
1690.00	56.22	H	-50.77	9.41	5.13	-46.48	-13.00	-33.48
2552.50	42.18	H	-61.58	10.21	6.41	-57.78	-13.00	-44.78
5080.00	43.88	H	-52.25	12.73	9.31	-48.82	-13.00	-35.82
5942.09	---	H	---	---	---	---	-13.00	---
6790.96	---	H	---	---	---	---	-13.00	---
7639.83	---	H	---	---	---	---	-13.00	---
8488.70	---	H	---	---	---	---	-13.00	---

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dBd/dBi) - Cable \text{ loss} (dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low E2 Mode

Test Date : Dec.02, 2005

Fundamental Frequency : 1850.20MHz

Test By: Sky

Temperature : 25°C

Pol: Ver / Hor

Humidity : 65%

Adaptor Model: 3DS09371AAAA

Supplier: Leader

Freq.	SPA. Reading	Ant.Pol.	S.G Output	Antenna Gain	Cable Loss	ERP/ EIRP	Limit	Safe Margin
(MHz)	(dBuV)	H/V	(dBm)	(dBd/dBi)	(dB)	(dBm)	(dBm)	(dBm)
58.13	48.34	V	-62.16	-0.49	0.94	-63.58	-13.00	-50.58
1849.98	80.02	V	-26.94	9.90	5.41	-22.45	-13.00	-9.45
1840.00	67.62	V	-39.34	9.87	5.39	-34.87	-13.00	-21.87
3692.50	63.17	V	-38.44	12.61	7.71	-33.55	-13.00	-20.55
5550.60	42.64	V	-52.57	13.23	9.68	-49.03	-13.00	-36.03
7400.80	---	V	---	---	---	---	-13.00	---
9251.00	---	V	---	---	---	---	-13.00	---
12951.40	---	V	---	---	---	---	-13.00	---
14801.60	---	V	---	---	---	---	-13.00	---
16651.80	---	V	---	---	---	---	-13.00	---
18502.00	---	V	---	---	---	---	-13.00	---
58.13	39.81	H	-70.62	-0.49	0.94	-72.05	-13.00	-59.05
1849.98	84.22	H	-22.67	9.90	5.41	-18.18	-13.00	-5.18
1840.00	72.53	H	-34.37	9.87	5.39	-29.89	-13.00	-16.89
3692.50	73.56	H	-27.83	12.61	7.71	-22.94	-13.00	-9.94
5550.60	45.88	H	-49.25	13.23	9.68	-45.70	-13.00	-32.70
7400.80	---	H	---	---	---	---	-13.00	---
9251.00	---	H	---	---	---	---	-13.00	---
12951.40	---	H	---	---	---	---	-13.00	---
14801.60	---	H	---	---	---	---	-13.00	---
16651.80	---	H	---	---	---	---	-13.00	---
18502.00	---	H	---	---	---	---	-13.00	---

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dBd/dBi) - Cable \text{ loss} (dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result : PCS 1900 Mode

Operation Mode : TX CH Mid E2 Mode

Test Date : Dec.02, 2005

Fundamental Frequency : 1880MHz

Test By : Sky

Temperature : 25°C

Pol : Ver / Hor

Humidity : 65%

Adaptor Model: 3DS09371AAAA

Supplier: Leader

Freq.	SPA. Reading	Ant.Pol.	S.G Output	Antenna Gain	Cable Loss	ERP/ EIRP	Limit	Safe Margin
(MHz)	(dBuV)	H/V	(dBm)	(dB/dBi)	(dB)	(dBm)	(dBm)	(dBm)
56.19	42.06	V	-67.60	-0.51	0.93	-69.04	-13.00	-56.04
1877.50	69.02	V	-37.93	9.98	5.45	-33.40	-13.00	-20.40
3752.50	63.55	V	-37.79	12.60	7.81	-32.99	-13.00	-19.99
5640.00	40.89	V	-54.07	13.36	9.73	-50.44	-13.00	-37.44
13160.00	---	V	---	---	---	---	-13.00	---
15040.00	---	V	---	---	---	---	-13.00	---
16920.00	---	V	---	---	---	---	-13.00	---
18800.00	---	V	---	---	---	---	-13.00	---
58.13	39.44	H	-70.99	-0.49	0.94	-72.42	-13.00	-59.42
1877.50	73.54	H	-33.33	9.98	5.45	-28.81	-13.00	-15.81
3752.50	69.98	H	-31.16	12.60	7.81	-26.36	-13.00	-13.36
5640.00	41.81	H	-53.08	13.36	9.73	-49.45	-13.00	-36.45
13160.00	---	H	---	---	---	---	-13.00	---
15040.00	---	H	---	---	---	---	-13.00	---
16920.00	---	H	---	---	---	---	-13.00	---
18800.00	---	H	---	---	---	---	-13.00	---

Remark :

- The emission behaviour belongs to narrowband spurious emission.
- Remark"---" means that the emission level is too low to be measured
- The result basic equation calculation is as follows:
- $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dBd/dBi) - Cable \text{ loss} (dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Spurious Emission Measurement Result : PCS 1900 Mode

Operation Mode	: TX CH High E2 Mode	Test Date	Dec.02, 2005
Fundamental Frequency	: 1909.8 MHz	Test By	Sky
Temperature	: 25°C	Pol	Ver / Hor
Humidity	: 65%	Adaptor Model:	3DS09371AAAA
		Supplier:	Leader

Freq.	SPA. Reading	Ant.Pol.	S.G Output	Antenna Gain	Cable Loss	ERP/ EIRP	Limit	Safe Margin
(MHz)	(dBuV)	H/V	(dBm)	(dB/dBi)	(dB)	(dBm)	(dBm)	(dBm)
53.28	42.17	V	-66.24	-0.55	0.92	-67.71	-13.00	-54.71
1910.02	79.51	V	-27.43	10.08	5.51	-22.86	-13.00	-9.86
1915.00	62.07	V	-44.86	10.09	5.52	-40.29	-13.00	-27.29
3805.00	59.24	V	-41.86	12.60	7.89	-37.15	-13.00	-24.15
7639.20	---	V	---	---	---	---	-13.00	---
9549.00	---	V	---	---	---	---	-13.00	---
13368.60	---	V	---	---	---	---	-13.00	---
15278.40	---	V	---	---	---	---	-13.00	---
17188.20	---	V	---	---	---	---	-13.00	---
19098.00	---	V	---	---	---	---	-13.00	---
53.28	43.49	H	-64.95	-0.55	0.92	-66.42	-13.00	-53.42
1910.02	83.42	H	-23.43	10.08	5.51	-18.87	-13.00	-5.87
1915.00	63.48	H	-43.37	10.09	5.52	-38.80	-13.00	-25.80
3805.00	60.23	H	-40.69	12.60	7.89	-35.98	-13.00	-22.98
5729.40	40.55	H	-54.10	13.49	9.78	-50.39	-13.00	-37.39
7639.20	---	H	---	---	---	---	-13.00	---
9549.00	---	H	---	---	---	---	-13.00	---
13368.60	---	H	---	---	---	---	-13.00	---
15278.40	---	H	---	---	---	---	-13.00	---
17188.20	---	H	---	---	---	---	-13.00	---
19098.00	---	H	---	---	---	---	-13.00	---

Remark :

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 $ERP/EIRP (dBm) = SG \text{ Setting}(dBm) + Antenna \text{ Gain} (dBd/dBi) - Cable \text{ loss} (dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1 Standard Applicable

According to FCC §2.1055(a)(1)(b).

Frequency Tolerance: 2.5 ppm

10.2 Test Set-up:

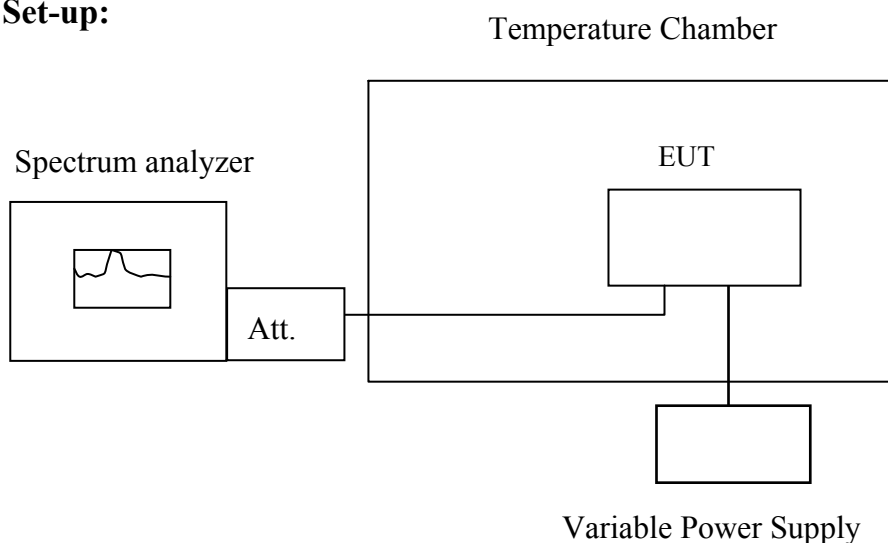

Note : Measurement setup for testing on Antenna connector

10.3 Measurement Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes re-recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2005	03/28/2006
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2005	06/29/2006
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2005	11/10/2006
Power Sensor	Anritsu	MA2490A	31431	06/28/2005	06/29/2006
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2005	06/29/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2005	11/12/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2005	10/06/2006
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2005	10/06/2006
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2005	10/06/2006
Signal Generator	R&S	SMR40	100210	11/09/2005	11/10/2006
Diode Detector	Agilent	8471E	MY4224	N/A	N/A
AC Power Supply	APW-105N	887592	All Power	N/A	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

10.5 Measurement Result

Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
3.7	-30	836.599908	86.00	2091
3.7	-20	836.599922	72.00	2091
3.7	-10	836.59994	51.00	2091
3.7	0	836.59996	36.00	2091
3.7	10	836.59998	15.00	2091
3.7	20	836.59999	0.00	2091
3.7	30	836.60002	-28.00	2091
3.7	40	836.60002	-24.00	2091
3.7	50	836.60002	-26.00	2091

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
3.7	-30	1879.99889	1088.00	4700
3.7	-20	1879.999909	69.00	4700
3.7	-10	1879.99992	54.00	4700
3.7	0	1879.99993	45.00	4700
3.7	10	1879.99995	26.00	4700
3.7	20	1879.99998	0.00	4700
3.7	30	1880.00000	-18.00	4700
3.7	40	1880.00002	-43.00	4700
3.7	50	1880.00004	-65.00	4700

Note: The battery is rated 3.7V dc.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1 Standard Applicable

According to FCC §2.1055(d)(1)(2)

Frequency Tolerance: 2.5 ppm

11.2 Test Set-up:

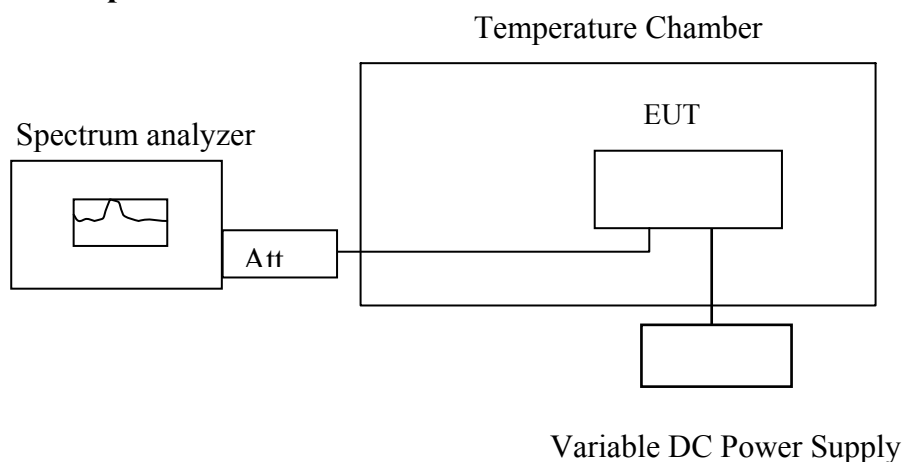

Note: Measurement setup for testing on Antenna connector

11.3 Measurement Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2005	03/28/2006
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2005	06/29/2006
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2005	11/10/2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Power Sensor	Anritsu	MA2490A	31431	06/28/2005	06/29/2006
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2005	06/29/2006
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2005	11/12/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circuit	BW-S10W5	N/A	10/07/2005	10/06/2006
Attenuator	Mini-Circuit	BW-S6W5	N/A	10/07/2005	10/06/2006
Splitter	Mini-Circuit	ZFSC-2-10G	N/A	10/07/2005	10/06/2006
Signal Generator	R&S	SMR40	100210	11/09/2005	11/10/2006
Diode Detector	Agilent	8471E	MY4224	N/A	N/A
AC Power Supply	APW-105N	887592	All Power	N/A	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

11.5 Measurement Result

Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C				
Limit: +/- 2.5 ppm = 2091 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
3.70	25.00	836.59999	0.00	2091.00
3.25	25.00	836.599968	22.00	2091.00
4.26	25.00	836.600017	-27.00	2091.00
3.24 (End Point)	25.00	836.59998	8.00	2091.00

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
3.7	25	1879.999983	0.00	4700
3.28	25	1879.999922	61.00	4700
4.255	25	1879.999942	41.00	4700
3.27 (Endpoint)	25	1879.99992	61.00	4700

Note: The battery is rated 3.7V dc.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

12. AC POWER LINE CONDUCTED EMISSION TEST

12.1 Standard Applicable

According to §15.207. The emission value for frequency within 150KHz to 30MHz shall not exceed criteria of below chart.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1.The lower limit shall apply at the transition frequencies		
2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

12.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2001.
2. The EUT was plug-in DC power adaptor and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The Power adaptor was connected with 110Vac/60Hz power source.

12.3 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

12.4 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMC Analyzer	HP	8594EM	3624A00203	09/02/2005	09/03/2006
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2005	06/10/2006
Transient Limiter	HP	11947A	3107A02062	09/02/2005	09/03/2006
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2004	12/30/2005
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2004	12/23/2005
Coaxial Cables	N/A	No. 3, 4	N/A	12/24/2004	12/23/2005

12.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM850 Normal Operating	Test Date	Dec.02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAGA
Test Voltage	: 120Vac	Serial number	Leader


FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
2.100	44.19	40.98	56.00	46.00	-11.81	-5.02	L1
2.800	45.49	44.84	56.00	46.00	-10.51	-1.16	L1
3.420	42.88	39.12	56.00	46.00	-13.12	-6.88	L1
4.160	43.76	---	56.00	46.00	-12.24	---	L1
4.820	40.34	---	56.00	46.00	-15.66	---	L1
5.520	46.62	---	60.00	50.00	-13.38	---	L1
0.410	47.10	44.78	57.65	47.65	-10.55	-2.87	L2
1.980	43.70	---	56.00	46.00	-12.30	---	L2
3.840	42.43	---	56.00	46.00	-13.57	---	L2
4.500	42.02	---	56.00	46.00	-13.98	---	L2
5.200	44.52	---	60.00	50.00	-15.48	---	L2
6.480	42.04	---	60.00	50.00	-17.96	---	L2

Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAGA Supplier: Leader)

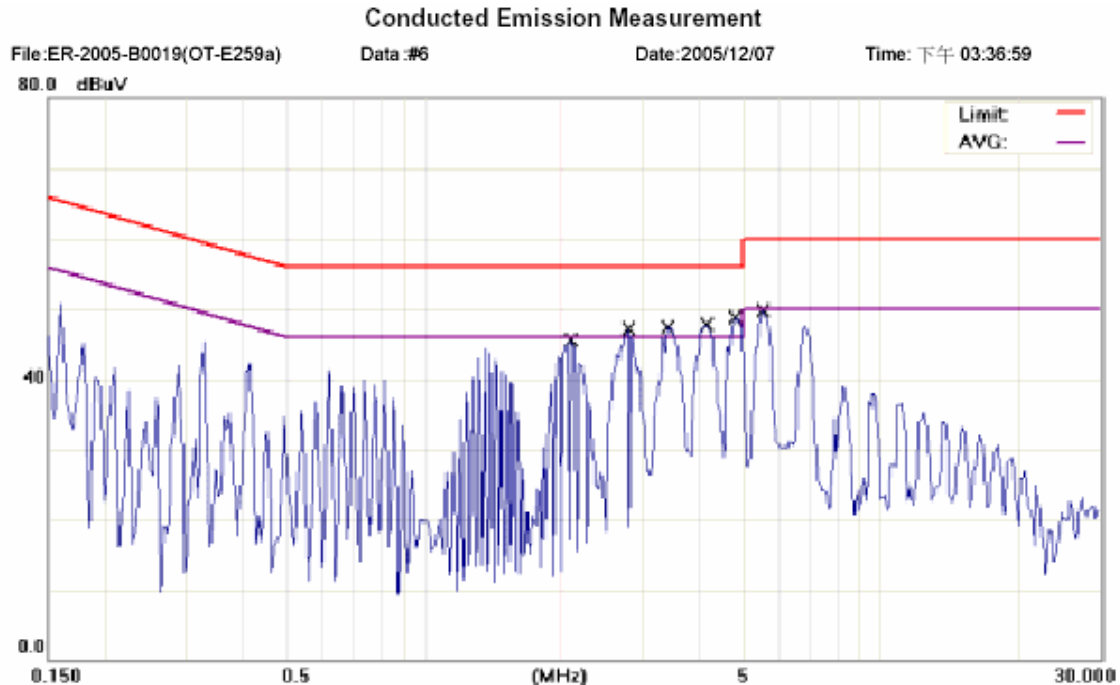


Site: SGS CONDUCTED #1 Phase: **L1** Temperature: 23 °C
 Limit: CISPR22 Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 57 %
 EUT: mobile phone Distance: Air Pressure: hpa
 M/N: OT-E259a
 Note: GSM850 LINK with 3DS09371AGAA (Leader) Adapter

No. Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	2.1000	43.54	0.65	44.19	56.00	-11.81	QP	
2	2.1000	40.33	0.65	40.98	46.00	-5.02	AVG	
3	2.8000	44.82	0.67	45.49	56.00	-10.51	QP	
4 *	2.8000	44.17	0.67	44.84	46.00	-1.16	AVG	
5	3.4200	42.19	0.69	42.88	56.00	-13.12	QP	
6	3.4200	38.43	0.69	39.12	46.00	-6.88	AVG	
7	4.1600	43.04	0.72	43.76	56.00	-12.24	QP	
8	4.1600	41.64	0.72	42.36	46.00	-3.64	AVG	
9	4.8200	39.60	0.74	40.34	56.00	-15.66	QP	
10	4.8200	30.60	0.74	31.34	46.00	-14.66	AVG	
11	5.5200	45.85	0.77	46.62	60.00	-13.38	QP	
12	5.5200	43.87	0.77	44.64	50.00	-5.36	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

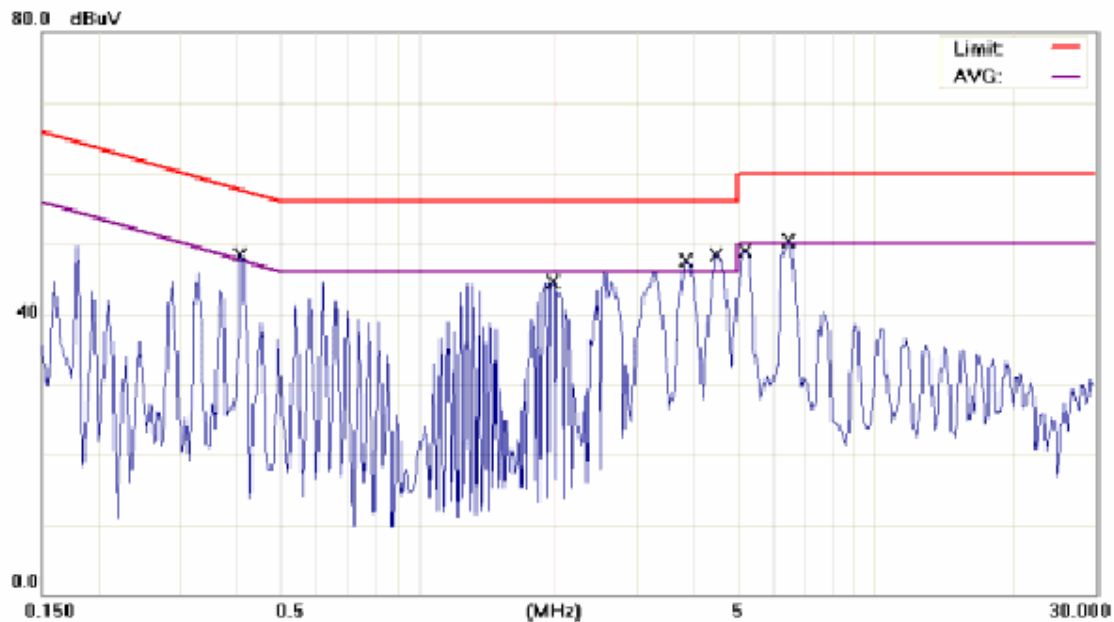

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AGAA (Leader) Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4100	46.49	0.61	47.10	57.65	-10.55	QP	
2	*	0.4100	44.17	0.61	44.78	47.65	-2.87	AVG	
3		1.9800	43.05	0.65	43.70	56.00	-12.30	QP	
4		1.9800	40.66	0.65	41.31	46.00	-4.69	AVG	
5		3.8400	41.72	0.71	42.43	56.00	-13.57	QP	
6		3.8400	37.07	0.71	37.78	46.00	-8.22	AVG	
7		4.5000	41.29	0.73	42.02	56.00	-13.98	QP	
8		4.5000	36.33	0.73	37.06	46.00	-8.94	AVG	
9		5.2000	43.76	0.76	44.52	60.00	-15.48	QP	
10		5.2000	37.44	0.76	38.20	50.00	-11.80	AVG	
11		6.4800	41.23	0.81	42.04	60.00	-17.96	QP	
12		6.4800	29.63	0.81	30.44	50.00	-19.56	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900 Normal Operating	Test Date	Dec.02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAGA
Test Voltage	: 120Vac	Supplier	Leader

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.330	53.32	46.83	59.45	49.45	-6.13	-2.62	L1
0.370	49.02	48.26	58.50	48.50	-9.48	-0.24	L1
0.415	36.80	---	57.55	47.55	-20.75	---	L1
0.780	41.35	---	56.00	46.00	-14.65	---	L1
2.140	43.63	---	56.00	46.00	-12.37	---	L1
3.000	36.68	---	56.00	46.00	-19.32	---	L1
0.330	52.62	42.96	59.45	49.45	-6.83	-6.49	L2
0.370	48.68	47.86	58.50	48.50	-9.82	-0.64	L2
0.700	44.14	43.48	56.00	46.00	-11.86	-2.52	L2
2.100	41.25	---	56.00	46.00	-14.75	---	L2
2.640	43.53	---	56.00	46.00	-12.47	---	L2
4.040	41.80	---	56.00	46.00	-14.20	---	L2


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371 AAGA Supplier: Leader)

Conducted Emission Measurement

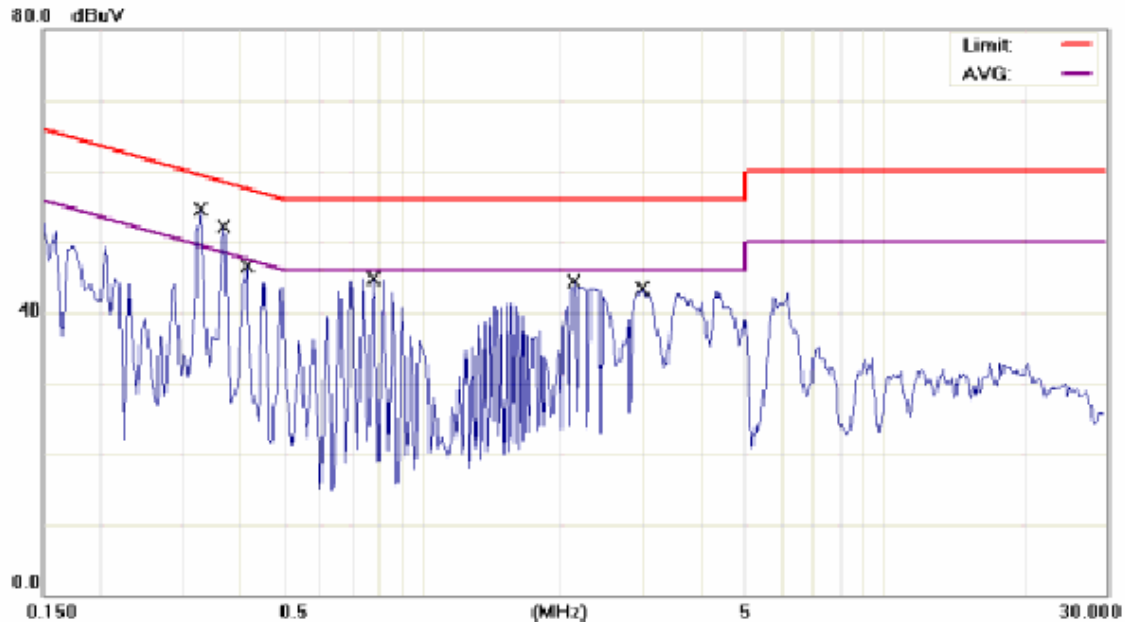

Site SGS CONDUCTED #1

Phase: **L1**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AGAA (Leader) Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3300	52.72	0.60	53.32	59.45	-6.13	QP	
2		0.3300	46.23	0.60	46.83	49.45	-2.62	AVG	
3		0.3700	48.41	0.61	49.02	58.50	-9.48	QP	
4	*	0.3700	47.65	0.61	48.26	48.50	-0.24	AVG	
5		0.4150	36.19	0.61	36.80	57.55	-20.75	QP	
6		0.4150	35.34	0.61	35.95	47.55	-11.60	AVG	
7		0.7800	40.73	0.62	41.35	56.00	-14.65	QP	
8		0.7800	40.12	0.62	40.74	46.00	-5.26	AVG	
9		2.1400	42.98	0.65	43.63	56.00	-12.37	QP	
10		2.1400	43.28	0.65	43.93	46.00	-2.07	AVG	
11		3.0000	36.00	0.68	36.68	56.00	-19.32	QP	
12		3.0000	35.50	0.68	36.18	46.00	-9.82	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

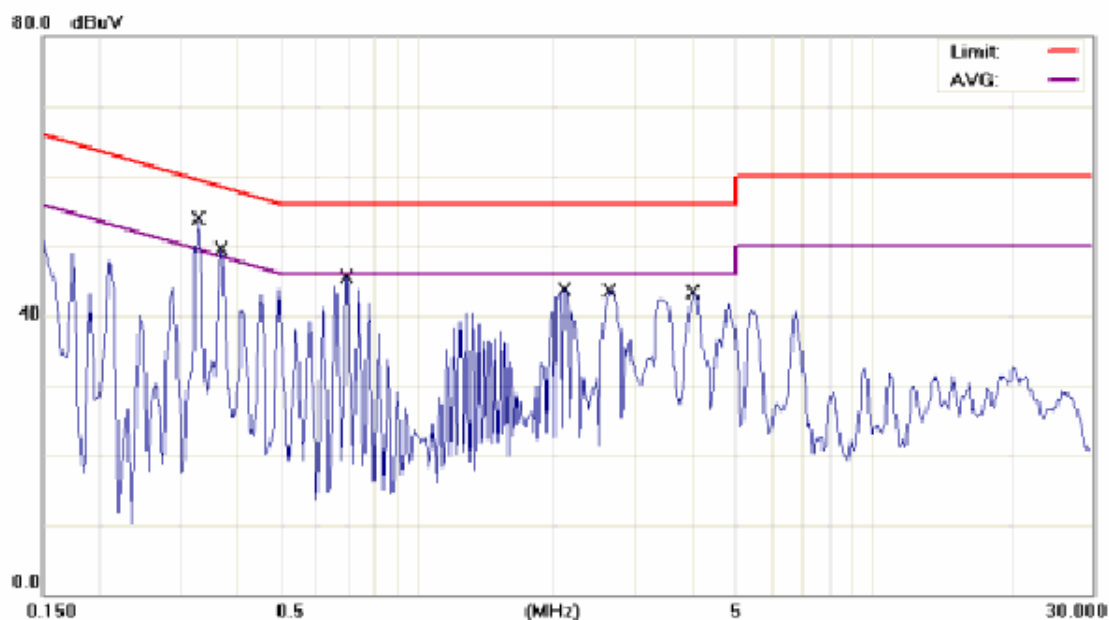

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AGAA (Leader) Adapter

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.3300	52.02	0.60	52.62	59.45	-6.83	QP	
2		0.3300	42.36	0.60	42.96	49.45	-6.49	AVG	
3		0.3700	48.07	0.61	48.68	58.50	-9.82	QP	
4	*	0.3700	47.25	0.61	47.86	48.50	-0.64	AVG	
5		0.7000	43.53	0.61	44.14	56.00	-11.86	QP	
6		0.7000	42.87	0.61	43.48	46.00	-2.52	AVG	
7		2.1000	40.60	0.65	41.25	56.00	-14.75	QP	
8		2.1000	40.68	0.65	41.33	46.00	-4.67	AVG	
9		2.6400	42.86	0.67	43.53	56.00	-12.47	QP	
10		2.6400	43.26	0.67	43.93	46.00	-2.07	AVG	
11		4.0400	41.09	0.71	41.80	56.00	-14.20	QP	
12		4.0400	41.02	0.71	41.73	46.00	-4.27	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM850 Normal Operating	Test Date	Dec.02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAGA
Test Voltage	: 120Vac	Supplier	Astec

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.370	45.97	---	58.50	48.50	-12.53	---	L1
2.960	43.92	---	56.00	46.00	-12.08	---	L1
3.580	40.70	---	56.00	46.00	-15.30	---	L1
4.200	37.93	---	56.00	46.00	-18.07	---	L1
4.940	38.72	---	56.00	46.00	-17.28	---	L1
5.680	39.45	---	60.00	50.00	-20.55	---	L1
0.330	52.25	42.72	59.45	49.45	-7.20	-6.73	L2
0.370	49.24	45.30	58.50	48.50	-9.26	-3.20	L2
0.495	43.43	---	56.08	46.08	-12.65	---	L2
0.660	42.86	---	56.00	46.00	-13.14	---	L2
1.980	42.23	---	56.00	46.00	-13.77	---	L2
4.040	39.98	---	56.00	46.00	-16.02	---	L2


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAGA Supplier: Astec)

Conducted Emission Measurement

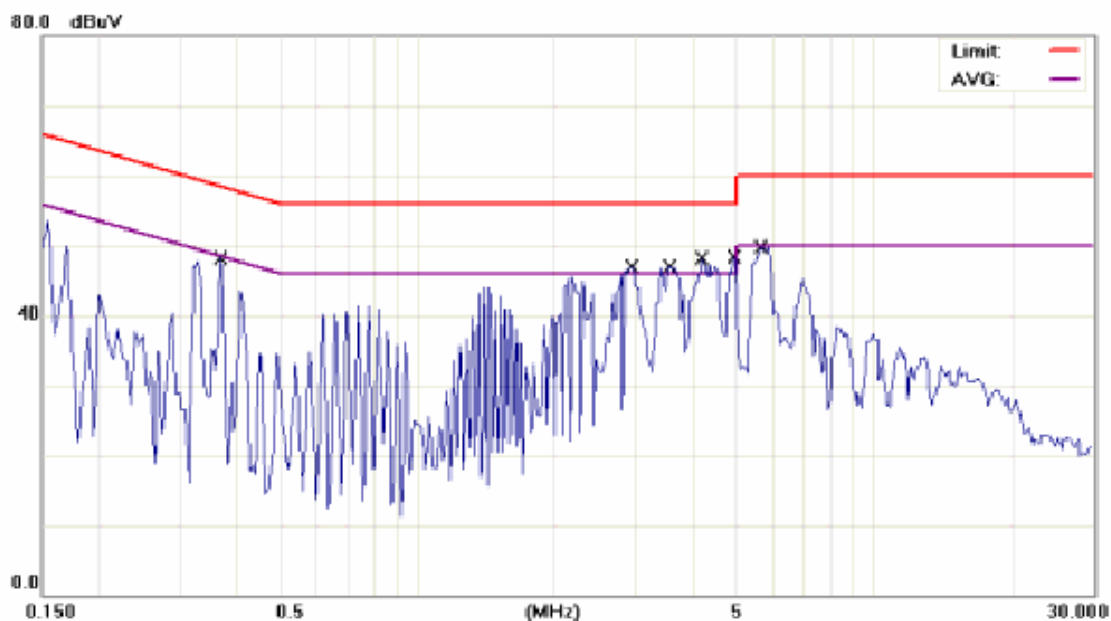

Site SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AGAA Adapter

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3700	45.36	0.61	45.97	58.50	-12.53	QP	
2		0.3700	38.54	0.61	39.15	48.50	-9.35	AVG	
3		2.9600	43.24	0.68	43.92	56.00	-12.08	QP	
4	*	2.9600	40.24	0.68	40.92	46.00	-5.08	AVG	
5		3.5800	40.00	0.70	40.70	56.00	-15.30	QP	
6		3.5800	39.36	0.70	40.06	46.00	-5.94	AVG	
7		4.2000	37.21	0.72	37.93	56.00	-18.07	QP	
8		4.2000	34.81	0.72	35.53	46.00	-10.47	AVG	
9		4.9400	37.98	0.74	38.72	56.00	-17.28	QP	
10		4.9400	37.44	0.74	38.18	46.00	-7.82	AVG	
11		5.6800	38.67	0.78	39.45	60.00	-20.55	QP	
12		5.6800	36.64	0.78	37.42	50.00	-12.58	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

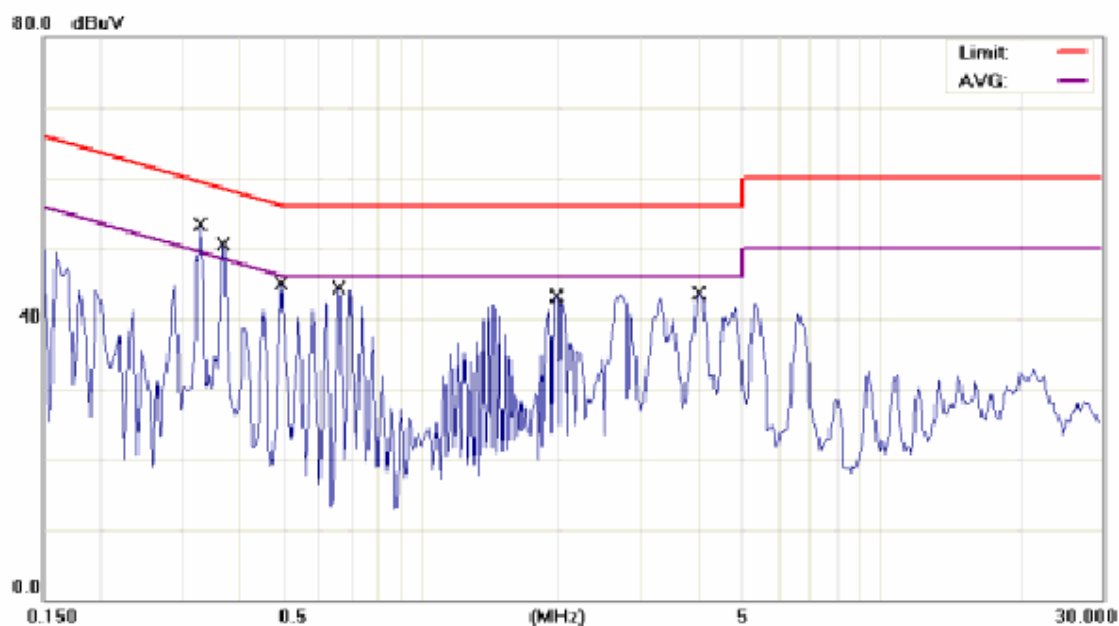

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AGAA Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3300	51.65	0.60	52.25	59.45	-7.20	QP	
2		0.3300	42.12	0.60	42.72	49.45	-6.73	AVG	
3		0.3700	48.63	0.61	49.24	58.50	-9.26	QP	
4		0.3700	44.69	0.61	45.30	48.50	-3.20	AVG	
5		0.4950	42.82	0.61	43.43	56.08	-12.65	QP	
6	*	0.4950	42.46	0.61	43.07	46.08	-3.01	AVG	
7		0.6600	42.25	0.61	42.86	56.00	-13.14	QP	
8		0.6600	41.09	0.61	41.70	46.00	-4.30	AVG	
9		1.9800	41.58	0.65	42.23	56.00	-13.77	QP	
10		1.9800	40.33	0.65	40.98	46.00	-5.02	AVG	
11		4.0400	39.27	0.71	39.98	56.00	-16.02	QP	
12		4.0400	38.64	0.71	39.35	46.00	-6.65	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900 Normal Operating	Test Date	Dec 02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 25°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAGA
Test Voltage	: 120Vac	Supplier	Astec

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.410	49.85	46.50	57.65	47.65	-7.80	-1.15	L1
2.800	45.75	44.31	56.00	46.00	-10.25	-1.69	L1
3.540	45.66	44.87	56.00	46.00	-10.34	-1.13	L1
4.360	47.06	45.65	56.00	46.00	-8.94	-0.35	L1
5.000	45.96	43.76	56.00	46.00	-10.04	-2.24	L1
5.680	47.46	---	60.00	50.00	-12.54	---	L1
0.410	49.85	46.20	57.65	47.65	-7.80	-1.45	L2
2.800	45.75	44.31	56.00	46.00	-10.25	-1.69	L2
3.540	45.66	44.87	56.00	46.00	-10.34	-1.13	L2
4.360	47.06	44.11	56.00	46.00	-8.94	-1.89	L2
5.000	45.96	43.76	56.00	46.00	-10.04	-2.24	L2
5.680	47.46	---	60.00	50.00	-12.54	---	L2


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAGA Supplier: Astec)

Conducted Emission Measurement

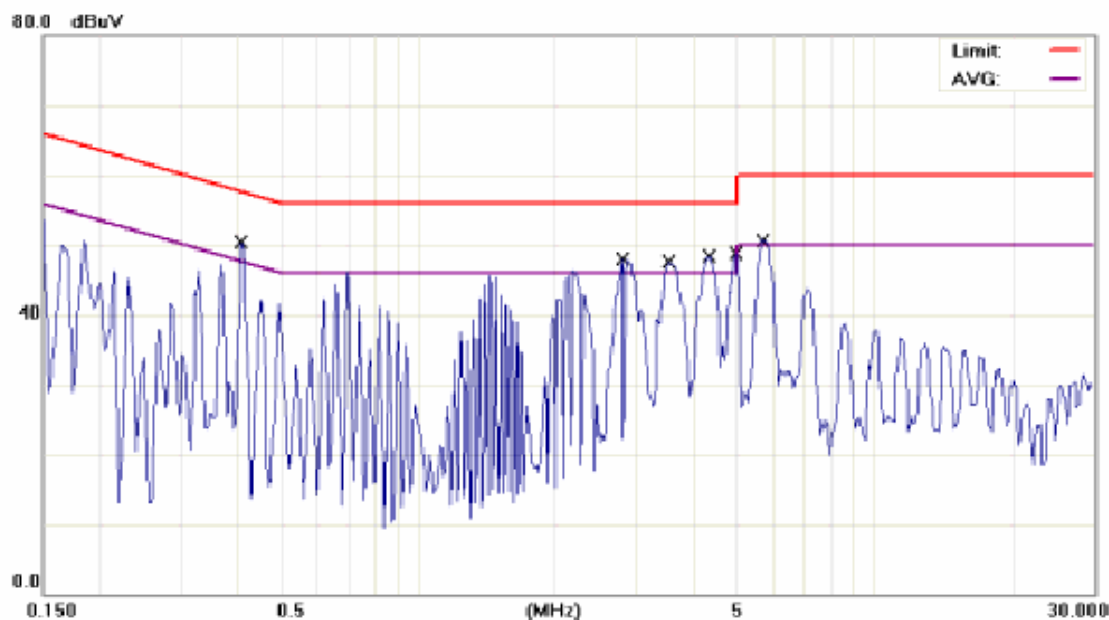

Site SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AGAA Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4100	49.24	0.61	49.85	57.65	-7.80	QP	
2		0.4100	45.89	0.61	46.50	47.65	-1.15	AVG	
3		2.8000	45.08	0.67	45.75	56.00	-10.25	QP	
4		2.8000	43.64	0.67	44.31	46.00	-1.69	AVG	
5		3.5400	44.96	0.70	45.66	56.00	-10.34	QP	
6		3.5400	44.17	0.70	44.87	46.00	-1.13	AVG	
7		4.3600	46.34	0.72	47.06	56.00	-8.94	QP	
8	*	4.3600	44.93	0.72	45.65	46.00	-0.35	AVG	
9		5.0000	45.21	0.75	45.96	56.00	-10.04	QP	
10		5.0000	43.01	0.75	43.76	46.00	-2.24	AVG	
11		5.6800	46.68	0.78	47.46	60.00	-12.54	QP	
12		5.6800	41.65	0.78	42.43	50.00	-7.57	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

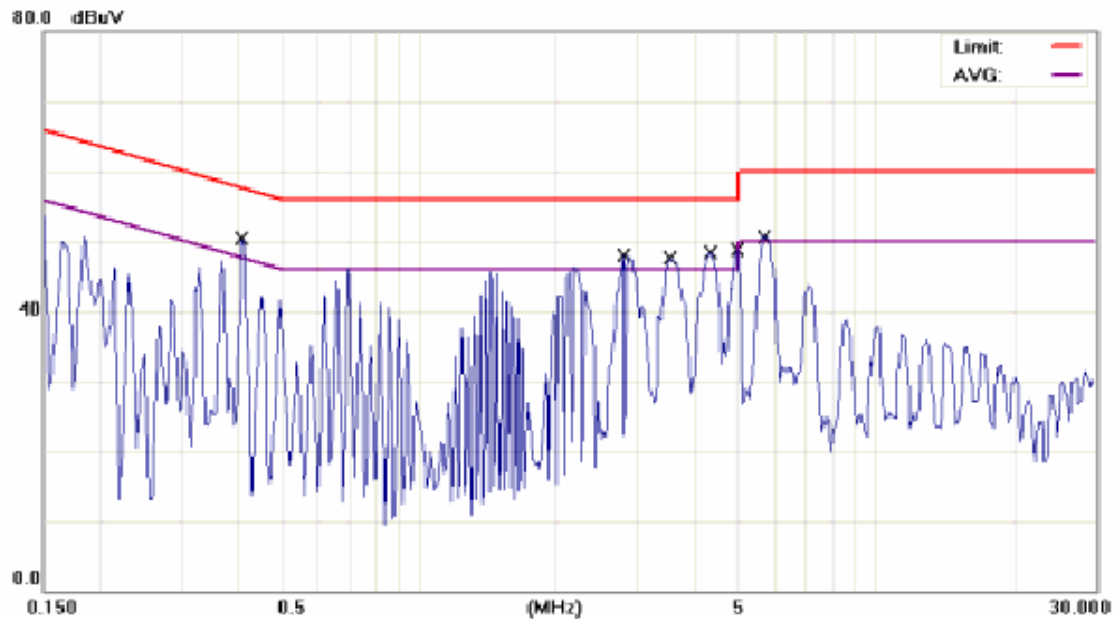

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AGAA Adapter

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4100	49.24	0.61	49.85	57.65	-7.80	QP	
2		0.4100	45.59	0.61	46.20	47.65	-1.45	AVG	
3		2.8000	45.08	0.67	45.75	56.00	-10.25	QP	
4		2.8000	43.64	0.67	44.31	46.00	-1.69	AVG	
5		3.5400	44.96	0.70	45.66	56.00	-10.34	QP	
6	*	3.5400	44.17	0.70	44.87	46.00	-1.13	AVG	
7		4.3600	46.34	0.72	47.06	56.00	-8.94	QP	
8		4.3600	43.39	0.72	44.11	46.00	-1.89	AVG	
9		5.0000	45.21	0.75	45.96	56.00	-10.04	QP	
10		5.0000	43.01	0.75	43.76	46.00	-2.24	AVG	
11		5.6800	46.68	0.78	47.46	60.00	-12.54	QP	
12		5.6800	41.65	0.78	42.43	50.00	-7.57	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM850 Normal Operating	Test Date	Dec 02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAAA
Test Voltage	: 230Vac	Supplier	Astec

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.370	49.14	43.19	58.50	48.50	-9.36	-5.31	L1
0.455	48.89	41.26	56.78	46.78	-7.89	-5.52	L1
0.540	48.42	42.92	56.00	46.00	-7.58	-3.08	L1
0.600	50.04	48.54	56.00	46.00	-5.96	2.54	L1
0.680	43.06	36.84	56.00	46.00	-12.94	-9.16	L1
1.140	45.85	44.01	56.00	46.00	-10.15	-1.99	L1
0.340	47.95	46.95	59.20	49.20	-11.25	-2.25	L2
0.370	47.65	46.25	58.50	48.50	-10.85	-2.25	L2
0.400	46.36	40.80	57.85	47.85	-11.49	-7.05	L2
0.600	41.02	---	56.00	46.00	-14.98	---	L2
1.340	43.59	---	56.00	46.00	-12.41	---	L2
1.940	43.31	---	56.00	46.00	-12.69	---	L2


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAAA Supplier: Leader)

Conducted Emission Measurement

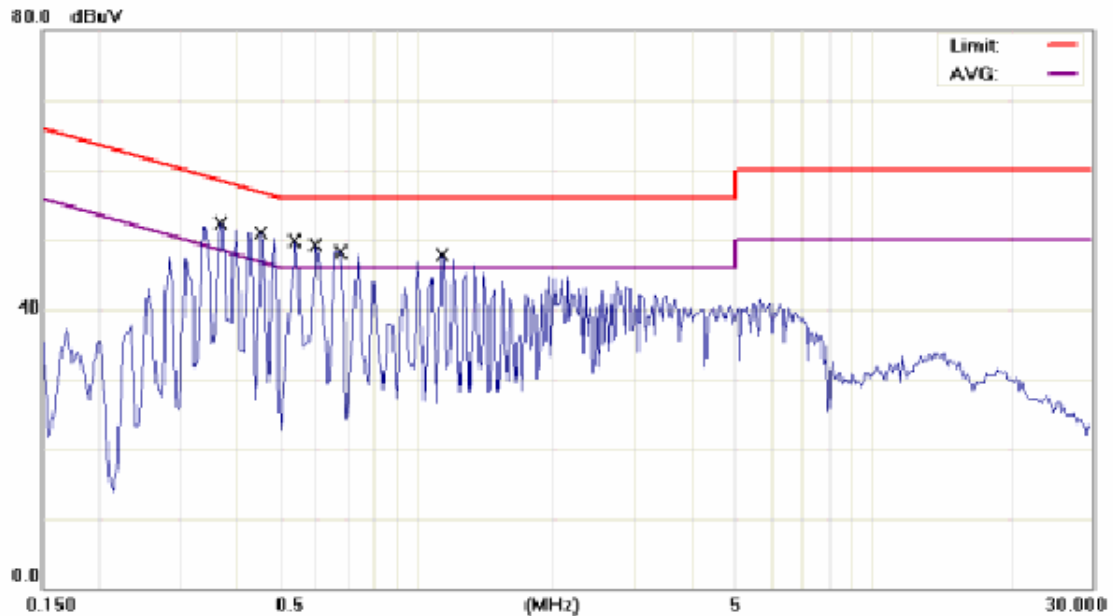

Site SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AAAA(Astec) Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3700	48.53	0.61	49.14	58.50	-9.36	QP	
2		0.3700	42.58	0.61	43.19	48.50	-5.31	AVG	
3		0.4550	48.28	0.61	48.89	56.78	-7.89	QP	
4		0.4550	40.65	0.61	41.26	46.78	-5.52	AVG	
5		0.5400	47.81	0.61	48.42	56.00	-7.58	QP	
6		0.5400	42.31	0.61	42.92	46.00	-3.08	AVG	
7		0.6000	49.43	0.61	50.04	56.00	-5.96	QP	
8	*	0.6000	47.93	0.61	48.54	46.00	2.54	AVG	
9		0.6800	42.45	0.61	43.06	56.00	-12.94	QP	
10		0.6800	36.23	0.61	36.84	46.00	-9.16	AVG	
11		1.1400	45.23	0.62	45.85	56.00	-10.15	QP	
12		1.1400	43.39	0.62	44.01	46.00	-1.99	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

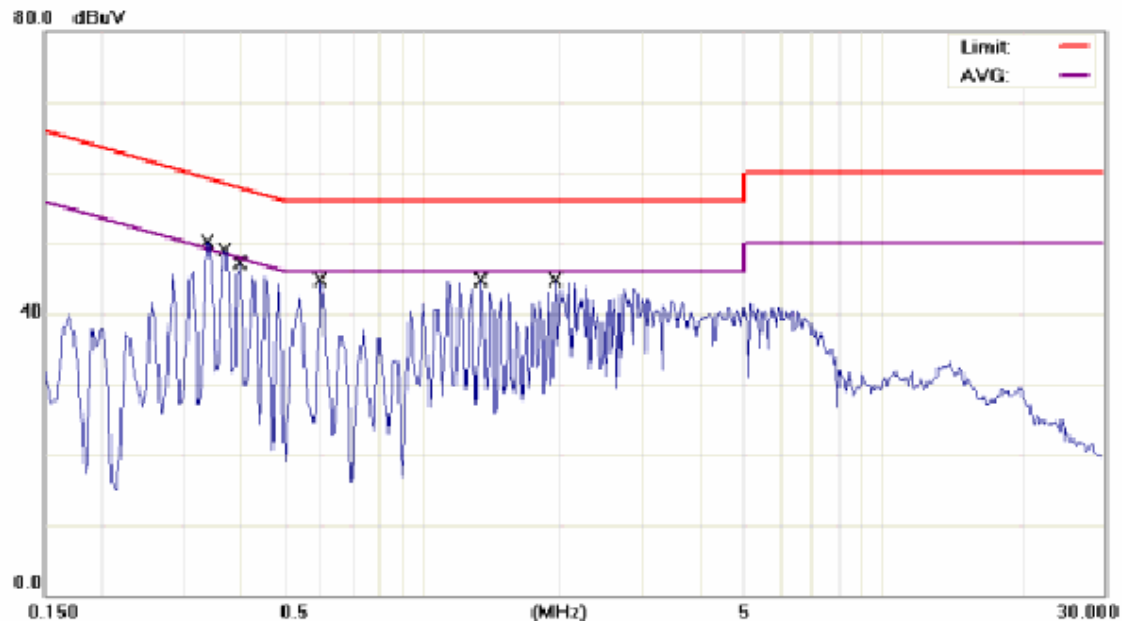

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AAAA(Astec) Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3400	47.35	0.60	47.95	59.20	-11.25	QP	
2		0.3400	46.35	0.60	46.95	49.20	-2.25	AVG	
3		0.3700	47.04	0.61	47.65	58.50	-10.85	QP	
4		0.3700	45.64	0.61	46.25	48.50	-2.25	AVG	
5		0.4000	45.75	0.61	46.36	57.85	-11.49	QP	
6		0.4000	40.19	0.61	40.80	47.85	-7.05	AVG	
7		0.6000	40.41	0.61	41.02	56.00	-14.98	QP	
8		0.6000	35.20	0.61	35.81	46.00	-10.19	AVG	
9		1.3400	42.96	0.63	43.59	56.00	-12.41	QP	
10	*	1.3400	43.13	0.63	43.76	46.00	-2.24	AVG	
11		1.9400	42.66	0.65	43.31	56.00	-12.69	QP	
12		1.9400	42.30	0.65	42.95	46.00	-3.05	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900 Normal Operating	Test Date	Dec 02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAAA
Test Voltage	: 230Vac	Supplier	Leader

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.340	49.99	42.42	59.20	49.20	-9.21	-6.78	L1
0.400	50.12	39.24	57.85	47.85	-7.73	-8.61	L1
0.425	47.98	37.74	57.35	47.35	-9.37	-9.61	L1
0.485	48.59	43.69	56.25	46.25	-7.66	-2.56	L1
0.600	50.10	40.89	56.00	46.00	-5.90	-5.11	L1
0.660	45.79	39.85	56.00	46.00	-10.21	-6.15	L1
0.345	48.46	39.04	59.08	49.08	-10.62	-10.04	L2
0.375	48.55	45.83	58.39	48.39	-9.84	-2.56	L2
0.485	43.52	---	56.25	46.25	-12.73	---	L2
1.060	42.14	---	56.00	46.00	-13.86	---	L2
1.460	41.77	---	56.00	46.00	-14.23	---	L2
1.860	42.06	---	56.00	46.00	-13.94	---	L2


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAAA Supplier: Astec)

Conducted Emission Measurement

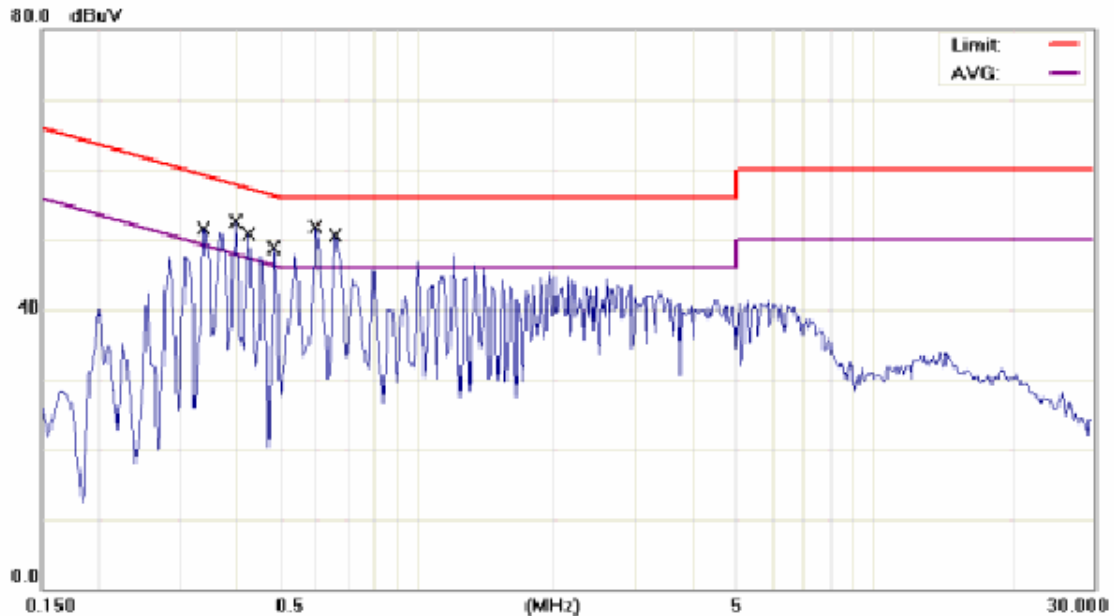

Site SGS CONDUCTED #1

Phase: **L1**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AAAA(Astec) Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3400	49.39	0.60	49.99	59.20	-9.21	QP	
2		0.3400	41.82	0.60	42.42	49.20	-6.78	AVG	
3		0.4000	49.51	0.61	50.12	57.85	-7.73	QP	
4		0.4000	38.63	0.61	39.24	47.85	-8.61	AVG	
5		0.4250	47.37	0.61	47.98	57.35	-9.37	QP	
6		0.4250	37.13	0.61	37.74	47.35	-9.61	AVG	
7		0.4850	47.98	0.61	48.59	56.25	-7.66	QP	
8	*	0.4850	43.08	0.61	43.69	46.25	-2.56	AVG	
9		0.6000	49.49	0.61	50.10	56.00	-5.90	QP	
10		0.6000	40.28	0.61	40.89	46.00	-5.11	AVG	
11		0.6600	45.18	0.61	45.79	56.00	-10.21	QP	
12		0.6600	39.24	0.61	39.85	46.00	-6.15	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

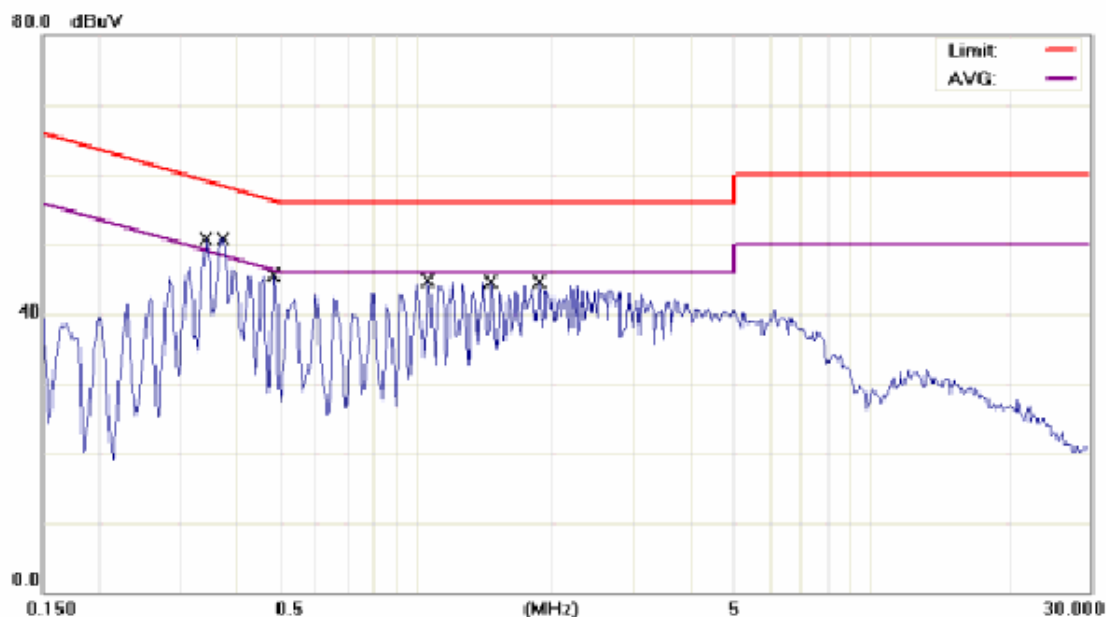

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AAAA(Astec) Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3450	47.86	0.60	48.46	59.08	-10.62	QP	
2		0.3450	38.44	0.60	39.04	49.08	-10.04	AVG	
3		0.3750	47.94	0.61	48.55	58.39	-9.84	QP	
4	*	0.3750	45.22	0.61	45.83	48.39	-2.56	AVG	
5		0.4850	42.91	0.61	43.52	56.25	-12.73	QP	
6		0.4850	39.25	0.61	39.86	46.25	-6.39	AVG	
7		1.0600	41.52	0.62	42.14	56.00	-13.86	QP	
8		1.0600	38.27	0.62	38.89	46.00	-7.11	AVG	
9		1.4600	41.14	0.63	41.77	56.00	-14.23	QP	
10		1.4600	37.77	0.63	38.40	46.00	-7.60	AVG	
11		1.8600	41.41	0.65	42.06	56.00	-13.94	QP	
12		1.8600	36.89	0.65	37.54	46.00	-8.46	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM850 Normal Operating	Test Date	Dec 02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAAA
Test Voltage	: 230Vac	Supplier	Astec

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.150	51.24	---	66.00	56.00	-14.76	---	L1
0.175	50.69	---	64.72	54.72	-14.03	---	L1
0.350	48.53	44.67	58.96	48.96	-10.43	-4.29	L1
0.405	49.24	41.84	57.75	47.75	-8.51	-5.91	L1
0.430	46.17	43.67	57.25	47.25	-11.08	-3.58	L1
0.580	47.91	44.16	56.00	46.00	-8.09	-1.84	L1
0.175	49.46	---	64.72	54.72	-15.26	---	L2
0.290	43.33	---	60.52	50.52	-17.19	---	L2
0.405	46.56	42.25	57.75	47.75	-11.19	-5.50	L2
1.160	44.87	44.40	56.00	46.00	-11.13	-1.60	L2
2.000	44.27	43.36	56.00	46.00	-11.73	-2.64	L2
2.840	42.78	---	56.00	46.00	-13.22	---	L2


Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAAA Supplier: Astec)

Conducted Emission Measurement

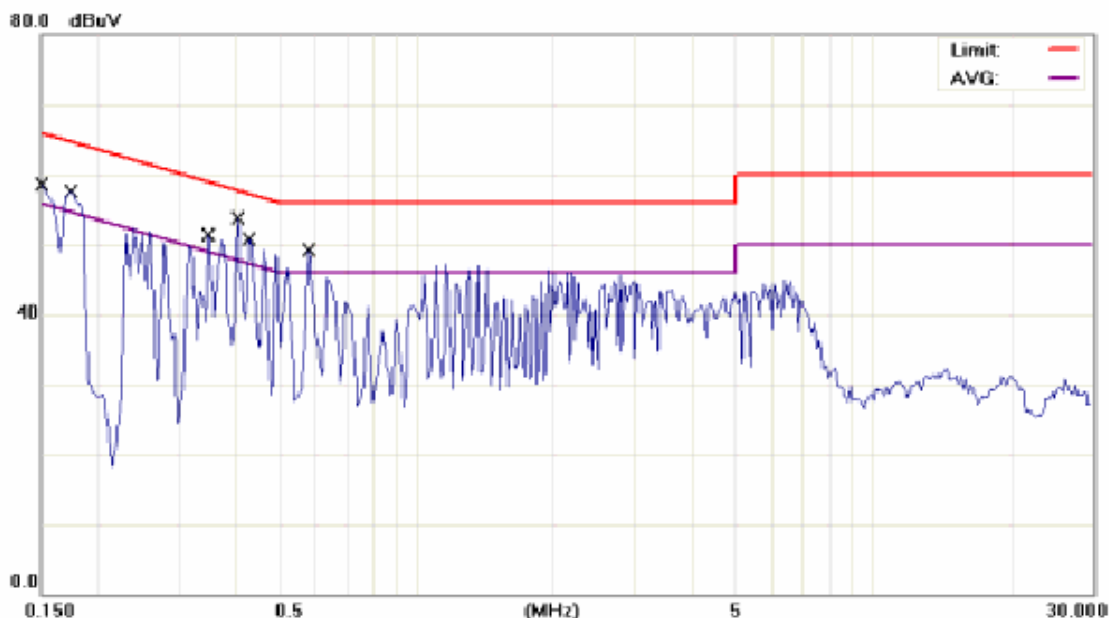

Site SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AAAA Adapter

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	50.64	0.60	51.24	66.00	-14.76	QP	
2		0.1500	32.66	0.60	33.26	56.00	-22.74	AVG	
3		0.1750	50.09	0.60	50.69	64.72	-14.03	QP	
4		0.1750	28.11	0.60	28.71	54.72	-26.01	AVG	
5		0.3500	47.93	0.60	48.53	58.96	-10.43	QP	
6		0.3500	44.07	0.60	44.67	48.96	-4.29	AVG	
7		0.4050	48.63	0.61	49.24	57.75	-8.51	QP	
8		0.4050	41.23	0.61	41.84	47.75	-5.91	AVG	
9		0.4300	45.56	0.61	46.17	57.25	-11.08	QP	
10		0.4300	43.06	0.61	43.67	47.25	-3.58	AVG	
11		0.5800	47.30	0.61	47.91	56.00	-8.09	QP	
12	*	0.5800	43.55	0.61	44.16	46.00	-1.84	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

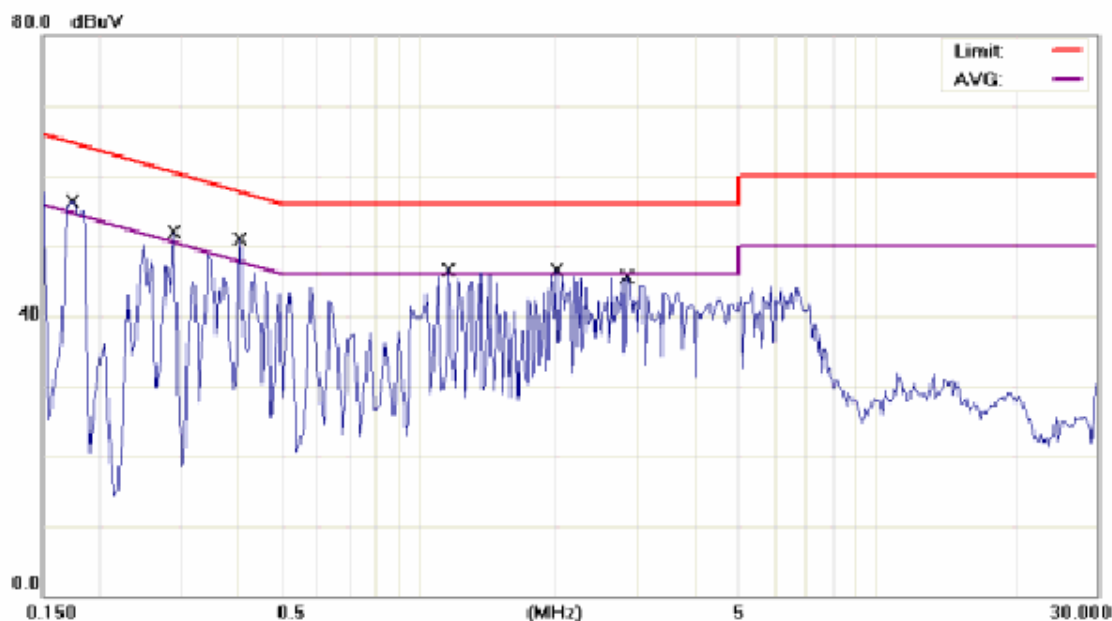

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM850 LINK with 3DS09371AAAA Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1750	48.86	0.60	49.46	64.72	-15.26	QP	
2		0.1750	35.04	0.60	35.64	54.72	-19.08	AVG	
3		0.2900	42.73	0.60	43.33	60.52	-17.19	QP	
4		0.2900	40.41	0.60	41.01	50.52	-9.51	AVG	
5		0.4050	45.95	0.61	46.56	57.75	-11.19	QP	
6		0.4050	41.64	0.61	42.25	47.75	-5.50	AVG	
7		1.1600	44.25	0.62	44.87	56.00	-11.13	QP	
8	*	1.1600	43.78	0.62	44.40	46.00	-1.60	AVG	
9		2.0000	43.62	0.65	44.27	56.00	-11.73	QP	
10		2.0000	42.71	0.65	43.36	46.00	-2.64	AVG	
11		2.8400	42.10	0.68	42.78	56.00	-13.22	QP	
12		2.8400	40.59	0.68	41.27	46.00	-4.73	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900 Normal Operating	Test Date	Dec 02, 2005
Fundamental Frequency	: N/A	Test By	Sky
Temperature	: 23°C	Pol	Line/Neutral
Humidity	: 57%	Adaptor Model	3DS09371AAAA
Test Voltage	: 220Vac	Supplier	Astec

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.150	52.03	---	66.00	56.00	-13.97	---	L1
0.175	50.57	---	64.72	54.72	-14.15	---	L1
0.347	50.50	38.90	59.05	49.05	-8.55	-10.15	L1
0.400	44.38	42.62	57.85	47.85	-13.47	-5.23	L1
0.430	46.35	45.16	57.25	47.25	-10.90	-2.09	L1
0.580	47.67	44.89	56.00	46.00	-8.33	-1.11	L1
0.150	51.35	---	66.00	56.00	-14.65	---	L2
0.210	45.61	---	63.21	53.21	-17.60	---	L2
0.230	42.36	---	62.45	52.45	-20.09	---	L2
0.350	48.71	42.02	58.96	48.96	-10.25	-6.94	L2
1.300	45.58	41.83	56.00	46.00	-10.42	-4.17	L2
2.140	45.20	42.88	56.00	46.00	-10.80	-3.12	L2

Remark :

- (1) Measuring frequencies from 0.15 MHz to 30MHz °
- (2) The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Qusia-Peak detector and Average detector.
- (3) “---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
- (4) The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
- (5) L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Plot (3DS09371AAAA Supplier: Astec)

Conducted Emission Measurement



Site SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa


M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AAAA Adapter

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	51.43	0.60	52.03	66.00	-13.97	QP	
2		0.1500	24.70	0.60	25.30	56.00	-30.70	AVG	
3		0.1750	49.97	0.60	50.57	64.72	-14.15	QP	
4		0.1750	26.43	0.60	27.03	54.72	-27.69	AVG	
5		0.3465	49.90	0.60	50.50	59.05	-8.55	QP	
6		0.3465	38.30	0.60	38.90	49.05	-10.15	AVG	
7		0.4000	43.77	0.61	44.38	57.85	-13.47	QP	
8		0.4000	42.01	0.61	42.62	47.85	-5.23	AVG	
9		0.4300	45.74	0.61	46.35	57.25	-10.90	QP	
10		0.4300	44.55	0.61	45.16	47.25	-2.09	AVG	
11		0.5800	47.06	0.61	47.67	56.00	-8.33	QP	
12	*	0.5800	44.28	0.61	44.89	46.00	-1.11	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Measurement

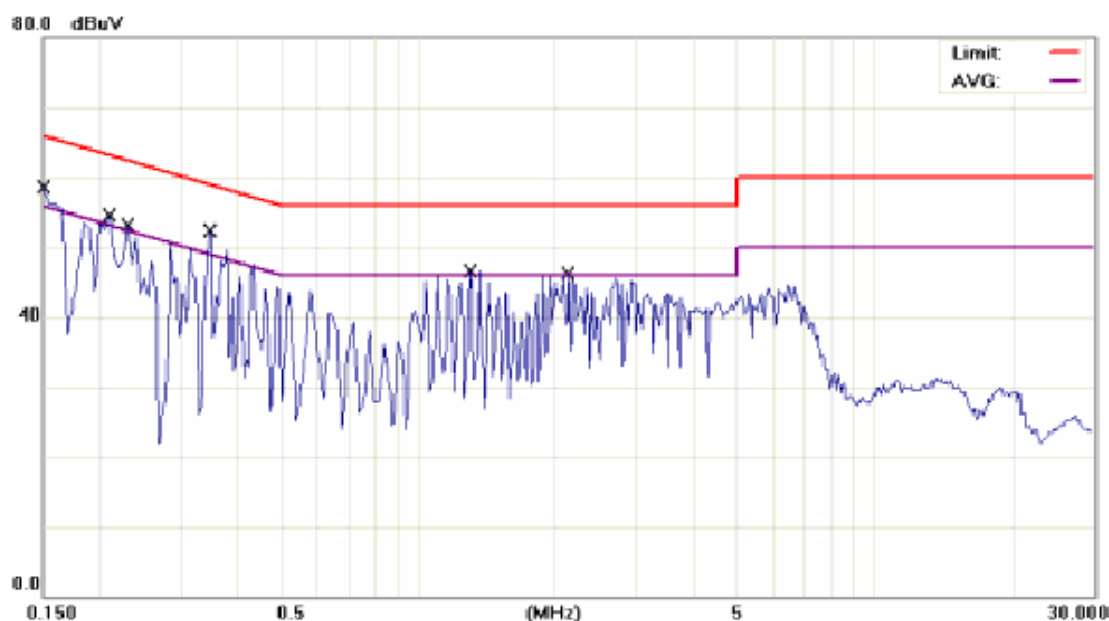

Site SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 230V/50Hz

Humidity: 57 %

EUT: mobile phone

Distance:

Air Pressure: hpa

M/N: OT-E259a

Note: GSM1900 LINK with 3DS09371AAAA Adapter

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	50.75	0.60	51.35	66.00	-14.65	QP	
2		0.1500	26.33	0.60	26.93	56.00	-29.07	AVG	
3		0.2100	45.01	0.60	45.61	63.21	-17.60	QP	
4		0.2100	22.88	0.60	23.48	53.21	-29.73	AVG	
5		0.2300	41.76	0.60	42.36	62.45	-20.09	QP	
6		0.2300	32.03	0.60	32.63	52.45	-19.82	AVG	
7		0.3500	48.11	0.60	48.71	58.96	-10.25	QP	
8		0.3500	41.42	0.60	42.02	48.96	-6.94	AVG	
9		1.3000	44.95	0.63	45.58	56.00	-10.42	QP	
10		1.3000	41.20	0.63	41.83	46.00	-4.17	AVG	
11		2.1400	44.55	0.65	45.20	56.00	-10.80	QP	
12	*	2.1400	42.23	0.65	42.88	46.00	-3.12	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.