

APPENDIX A: SAR TEST PLOTS

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: FQ21R9LF2Q

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.0$ MHz; $\text{cond} = 1.87$ S/m; $\text{perm} = 39.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10 mm

Test Date: 06/14/2023; Ambient Temp: 21.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7308; ConvF:(7.91,7.91,7.91); Calibrated: 2023-02-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2023-02-15

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11b, Head SAR, Front side, 22 MHz Bandwidth, Ch. 6, 1 Mbps, Aluminum, Sport Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.45 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below is 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.5 %

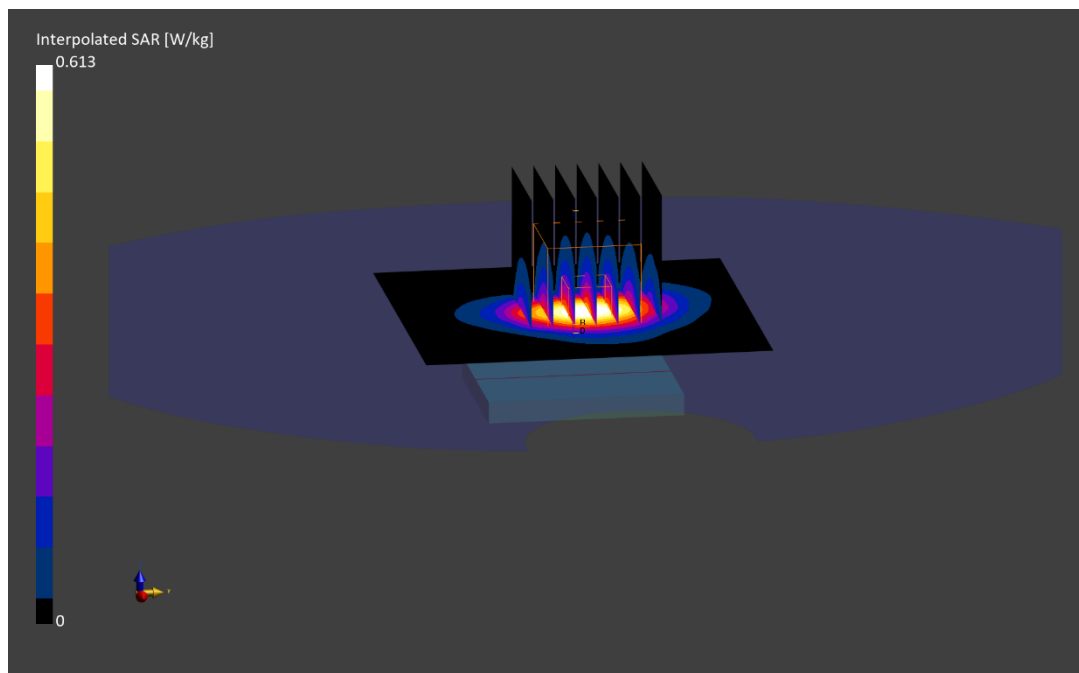

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: R7016HW6R0

Communication System: UID:10417 - AAC, WLAN; MAIA: Y; Frequency: 5745.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5745.0$ MHz; $\text{cond} = 5.31$ S/m; $\text{perm} = 34.2$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2023; Ambient Temp: 22.0°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7420; ConvF:(4.8,4.8,4.8); Calibrated: 2022-10-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1333; Calibrated: 2022-10-13

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 801.11a, Head SAR, Front Side, 20 MHz Bandwidth, UNII-3, Ch. 149, 6.0 Mbps, Aluminum, Sport Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (24.0 x 24.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.07 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below is 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.6 %

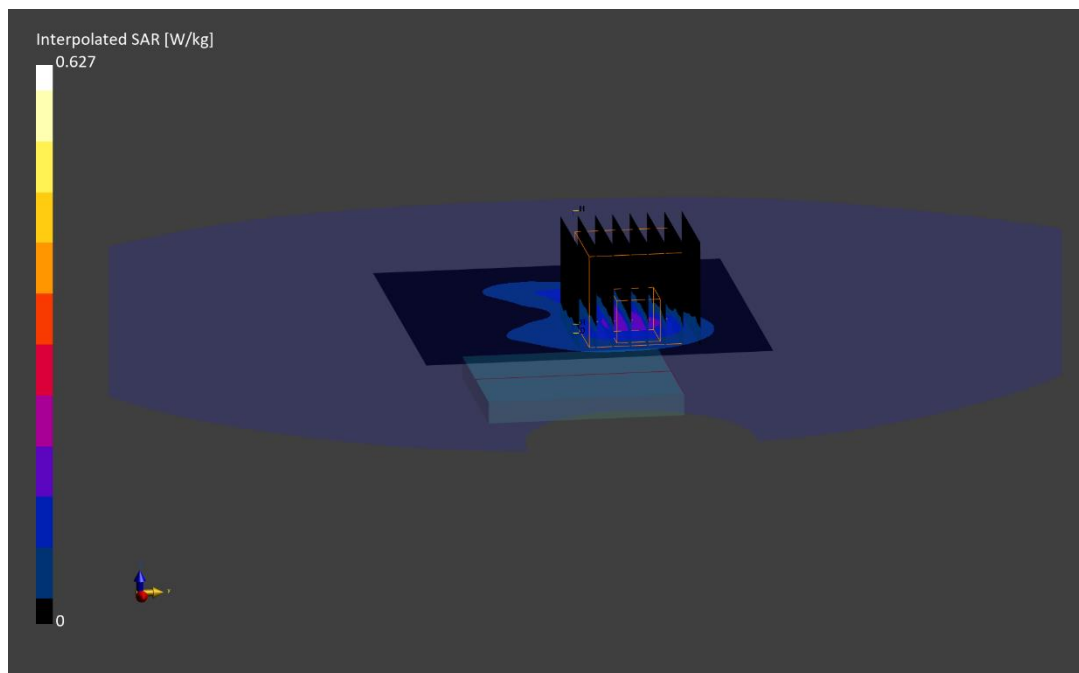

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: D02WJ26VQF

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2402.0$ MHz; $\text{cond} = 1.84$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/14/2023; Ambient Temp: 21.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7308; ConvF:(7.91,7.91,7.91); Calibrated: 2023-02-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2023-02-15

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Head SAR, Ch.0, 1Mbps, Front Side, Aluminum, Sport Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.32 W/kg; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

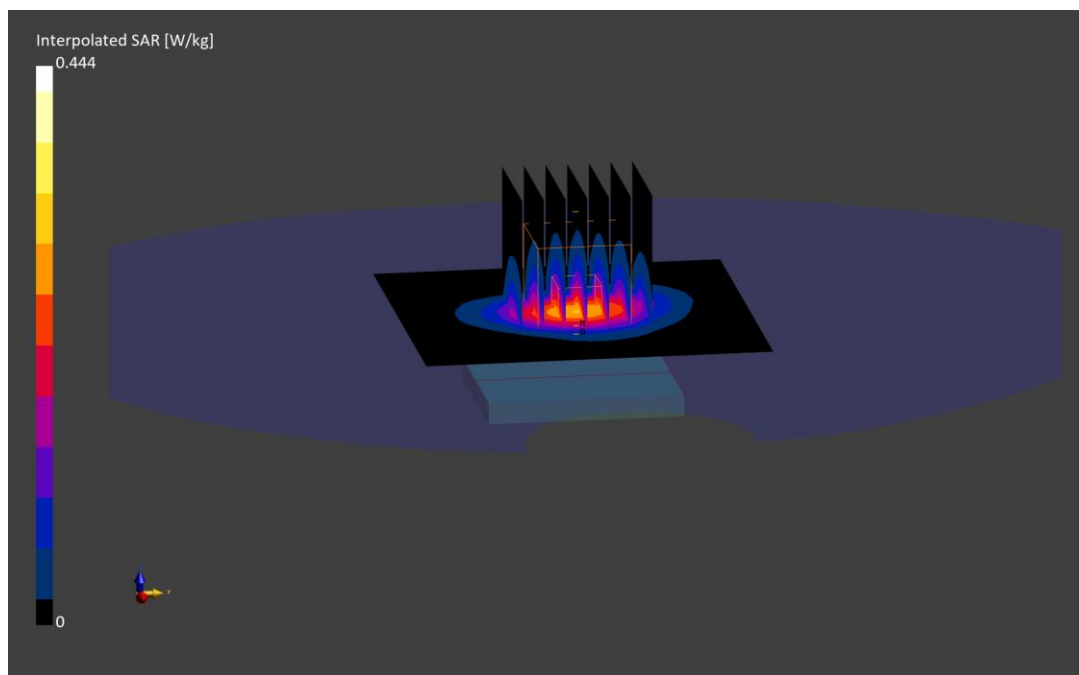

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: LL2NXY3F4T

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 5728.75 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5728.75$ MHz; $\text{cond} = 5.02$ S/m; $\text{perm} = 34.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/18/2023; Ambient Temp: 22.50°C; Tissue Temp: 20.70°C

Probe: EX3DV4 - SN7420; ConvF:(4.8,4.8,4.8); Calibrated: 2022-10-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1333; Calibrated: 2022-10-13

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: 802.15.4 ab-NB, Head SAR, Front Side, Low Ch., 1 Mbps, Aluminum, Metal Loop Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = -0.00 W/kg; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.081 W/kg

SAR(1 g) = 0.007 W/kg

Smallest distance from peaks to all points 3 dB below is 5.6 mm

Ratio of SAR at M2 to SAR at M1 = N/A

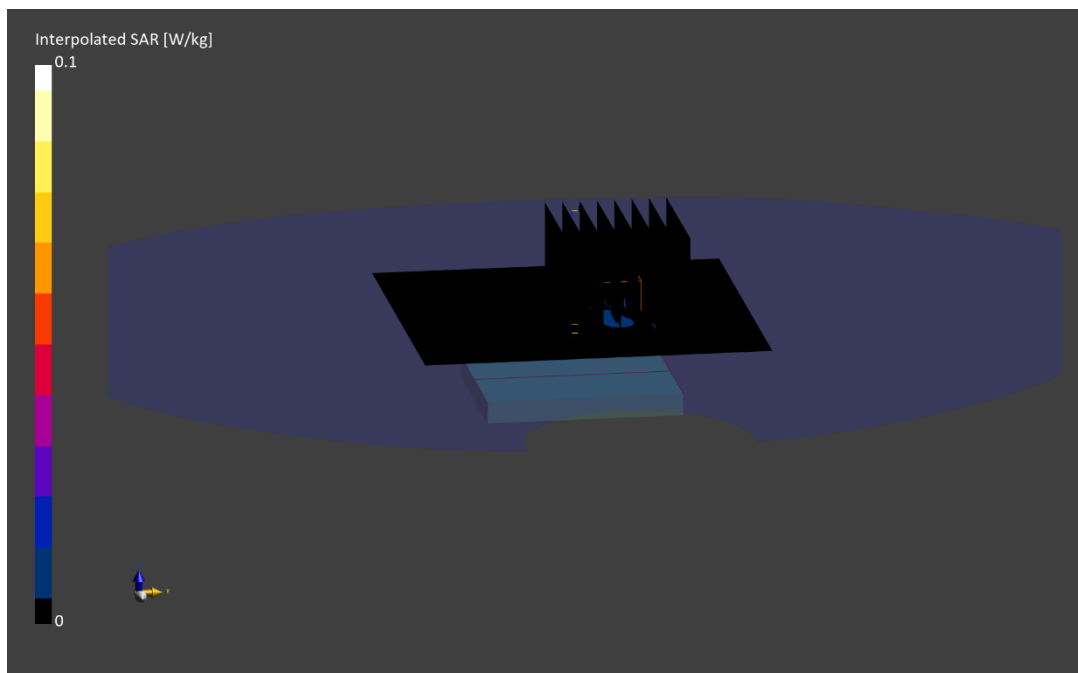

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: D02WJ26VQF

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2437.0$ MHz; $\text{cond} = 1.87$ S/m; $\text{perm} = 39.7$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/14/2023; Ambient Temp: 21.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7308; ConvF:(7.91,7.91,7.91); Calibrated: 2023-02-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2023-02-15

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11b, Extremity SAR, Back side, 22 MHz Bandwidth, Ch. 6, 1 Mbps,
Aluminum, Metal Loop Wristband**

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.2$ mm, $dy=4.2$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.43 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below is 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

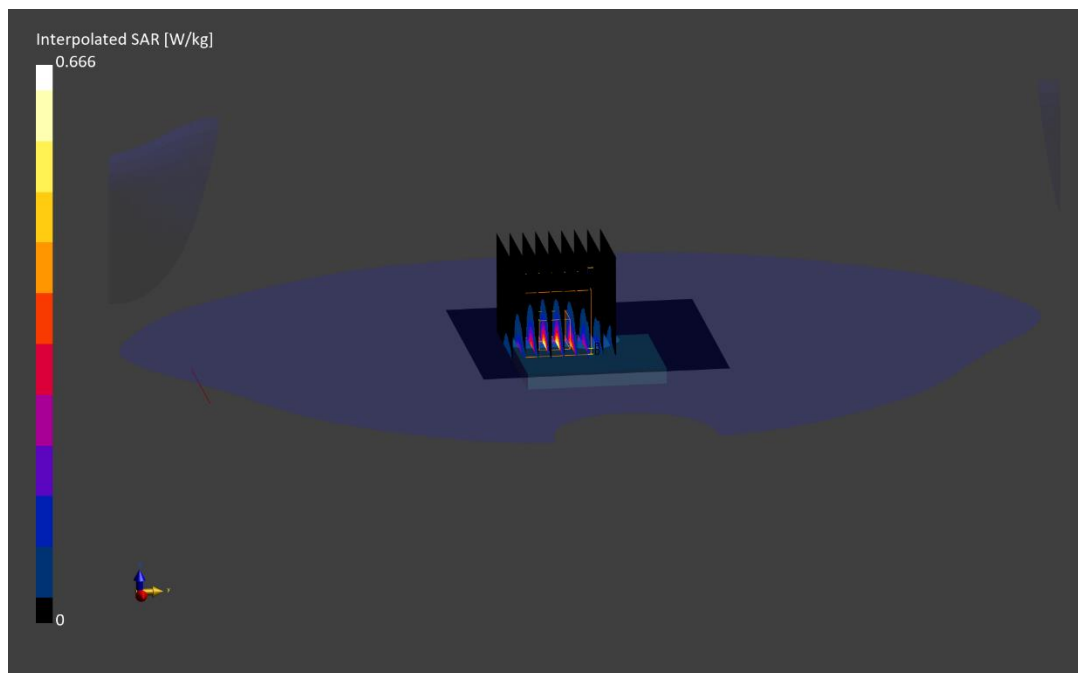

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: D9PYGNVJYK

Communication System: UID:10417 - AAC, WLAN; MAIA: Y; Frequency: 5300.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5300.0$ MHz; $\text{cond} = 4.79$ S/m; $\text{perm} = 35.1$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/19/2023; Ambient Temp: 22.0°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7420; ConvF:(5.22,5.22,5.22); Calibrated: 2022-10-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1333; Calibrated: 2022-10-13

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 801.11a, Extremity SAR, Back Side, 20 MHz Bandwidth, UNII-2A, Ch. 60, 6.0 Mbps, Aluminum, Metal Links Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.01 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.097 W/kg

SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below is 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.0 %

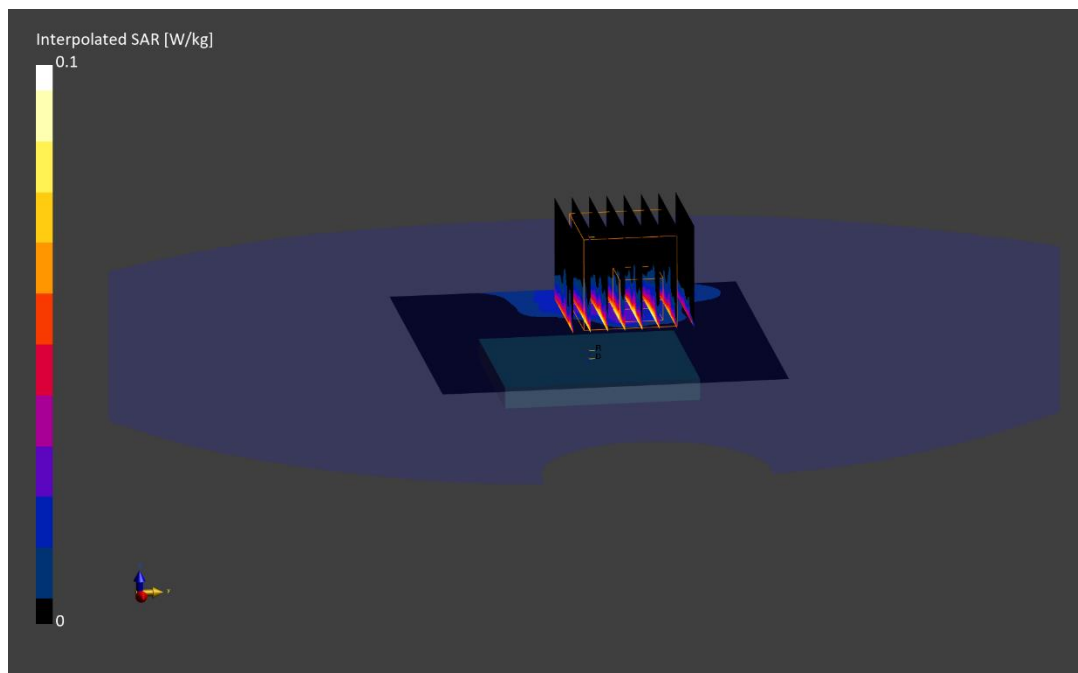

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: D02WJ26VQF

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.0 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2402.0$ MHz; $\text{cond} = 1.84$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/14/2023; Ambient Temp: 21.1°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7308; ConvF:(7.91,7.91,7.91); Calibrated: 2023-02-13

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn467; Calibrated: 2023-02-15

Phantom: Twin-SAM V4.0; Serial: 1275

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Extremity SAR, Ch.0, 1Mbps, Back Side, Aluminum, Metal Loop Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=4.9$ mm, $dy=4.9$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.35 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below is 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

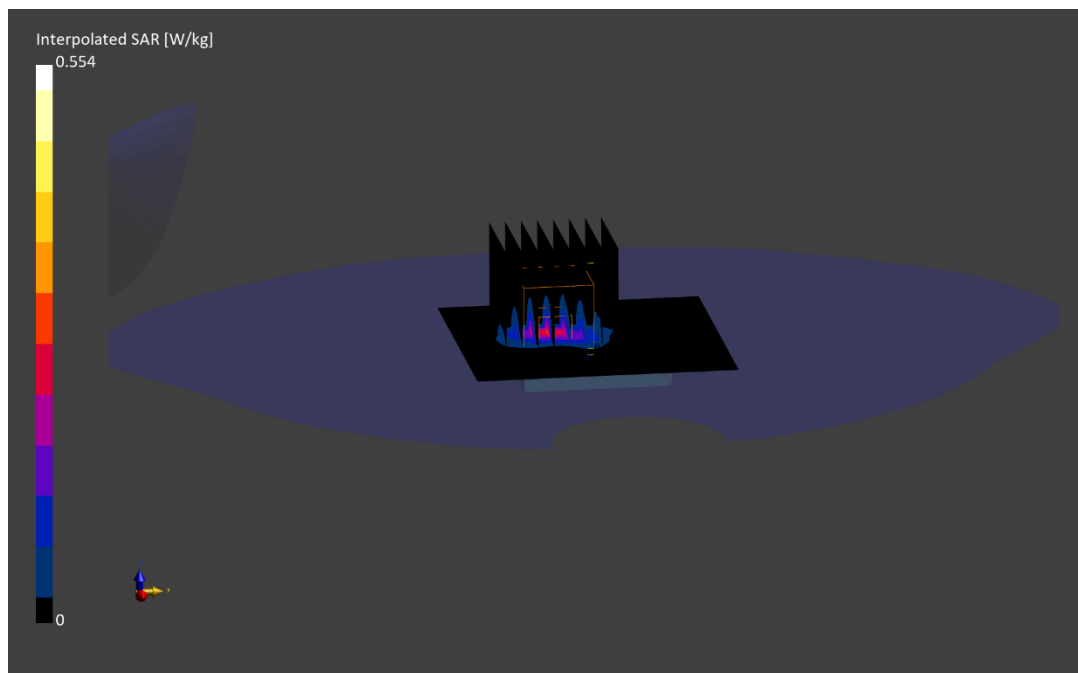

ELEMENT

DUT: BCG-A2980; Type: Watch; Serial: LL2NXY3F4T

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 5728.75 MHz

Medium: 5200-5800 Head; Medium parameters used:

$f = 5728.75$ MHz; $\text{cond} = 5.02$ S/m; $\text{perm} = 34.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/18/2023; Ambient Temp: 22.5°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7420; ConvF:(4.8,4.8,4.8); Calibrated: 2022-10-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1333; Calibrated: 2022-10-13

Phantom: Twin-SAM V8.0; Serial: 1736

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: 802.15.4 ab-NB, Extremity SAR, Back Side, Low Ch., 1 Mbps, Aluminum, Sport Wristband

Area Scan (80.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Reference Value = -0.00 W/kg; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.036 W/kg

SAR(10 g) = 0 W/kg

Smallest distance from peaks to all points 3 dB below is N/A

Ratio of SAR at M2 to SAR at M1 = N/A

