



FCC RF Test Report

APPLICANT : BLU Products, Inc.
EQUIPMENT : Mobile Phone
BRAND NAME : BLU
MODEL NAME : B300V
FCC ID : YHLBLUB300V
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 19, 2023 ~ Nov. 07, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	25
3.6 AC Conducted Emission Measurement.....	29
3.7 Antenna Requirements.....	31
4 LIST OF MEASURING EQUIPMENT	32
5 MEASUREMENT UNCERTAINTY	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR392619C	Rev. 01	Initial issue of report	Nov. 13, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.22 dB at 2483.93 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.00 dB at 0.540 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

BLU Products, Inc.

8600 NW 36th Street, Suite #200 Doral, FL 33166

1.2 Manufacturer

BLU Products, Inc.

8600 NW 36th Street, Suite #200 Doral, FL 33166

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	BLU
Model Name	B300V
FCC ID	YHLBLUB300V
IMEI Code	Conducted: 350207700001412 Conduction: 350207700001099 Radiation: 350207700011387
HW Version	V1.0
SW Version	BB300VK3101050105DBG
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.13 dBm (0.1030 W) 802.11g : 22.38 dBm (0.1730 W) 802.11n HT20 : 22.49 dBm (0.1774 W)
Antenna Type / Gain	PIFA Antenna type with gain -0.5 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + WLAN Link(2.4G) + USB Cable (Charging from Adapter1) + Earphone+ Battery 1
Remark: For Radiated Test Cases, The tests were performed with Adapter, Earphone. USB Cable.	

Simultaneous transmission
802.11n HT20 CH11 (2462MHz)+ LTE Band 13 Link

2.3 Connection Diagram of Test System

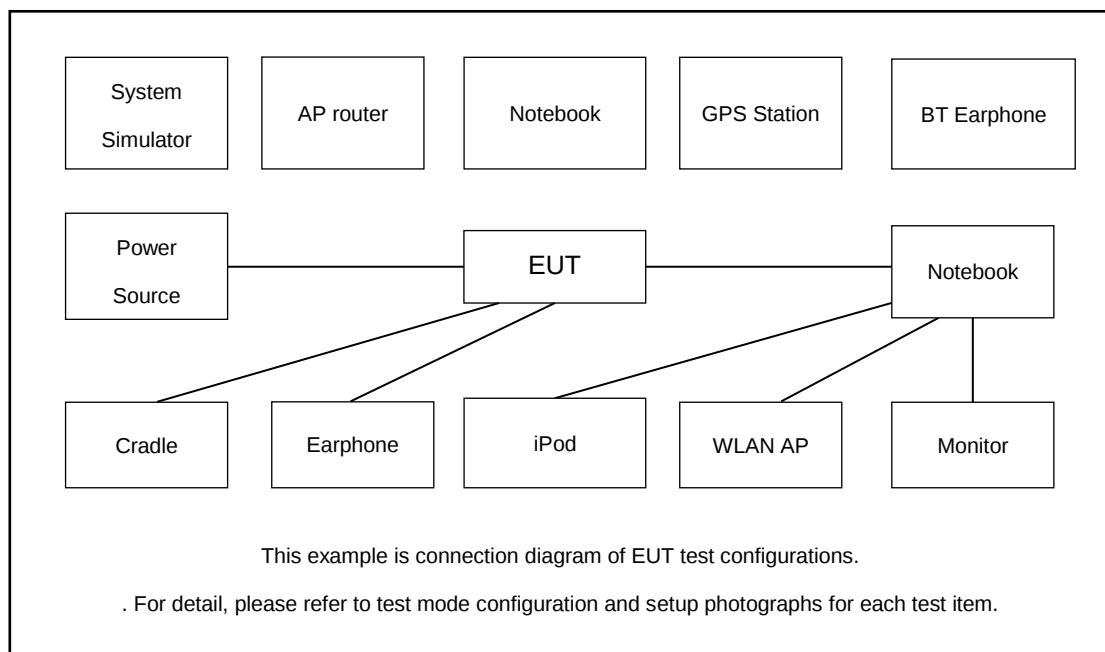

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	Earphone	Eimuse	E-500MV	Fcc DoC	Shielded, 2.2m	N/A
5.	Earphone	apple	DCAY1V-A900FZJW3-000	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 3.6 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 3.6 + 20 = 23.6 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

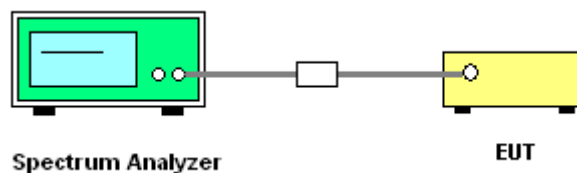

3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

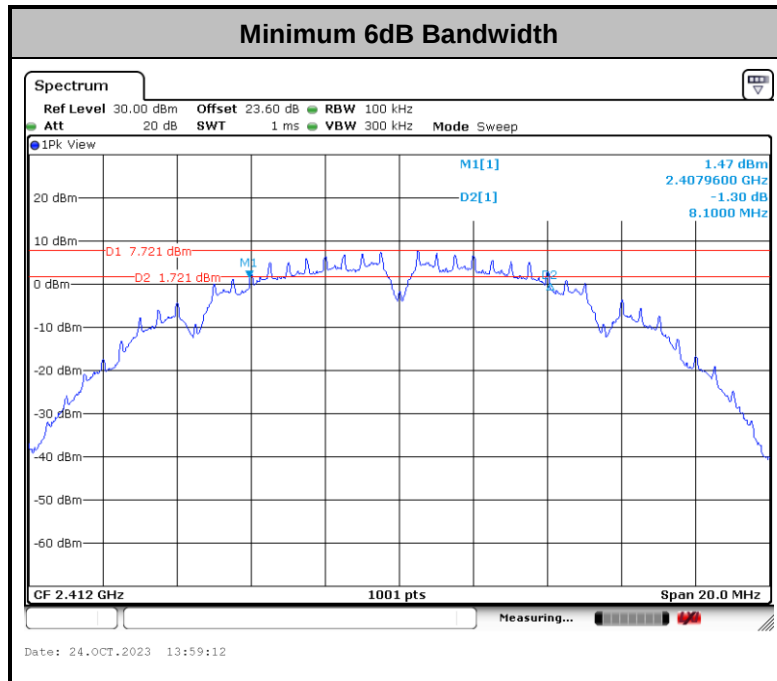

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

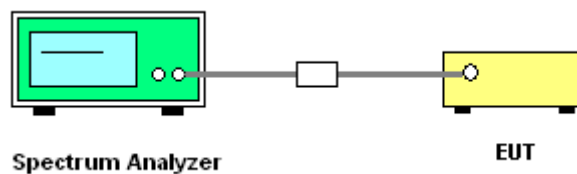



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

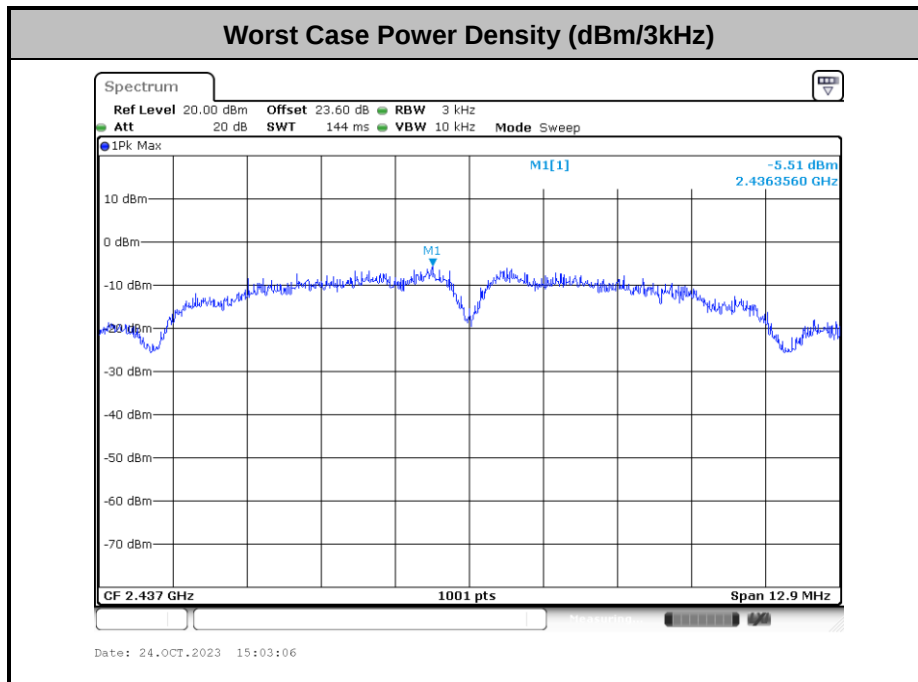

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

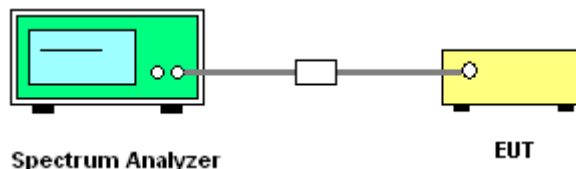




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Zhang Xue Yi	Temperature :	21~25°C
		Relative Humidity :	51~54%


Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

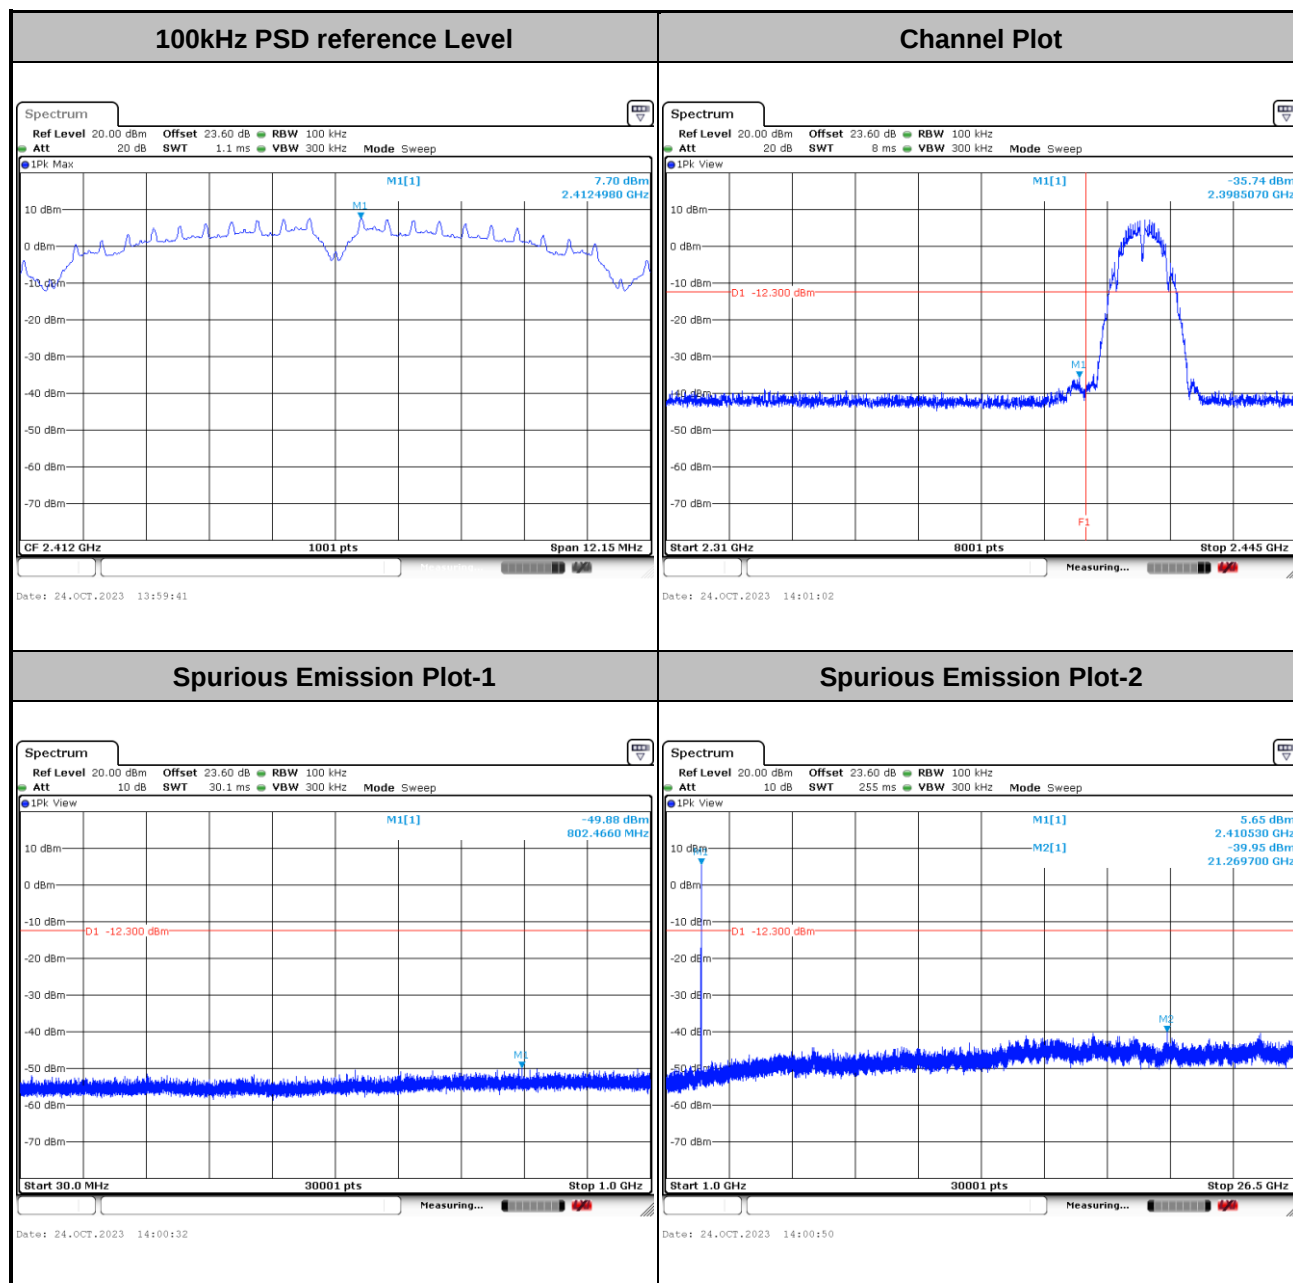




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

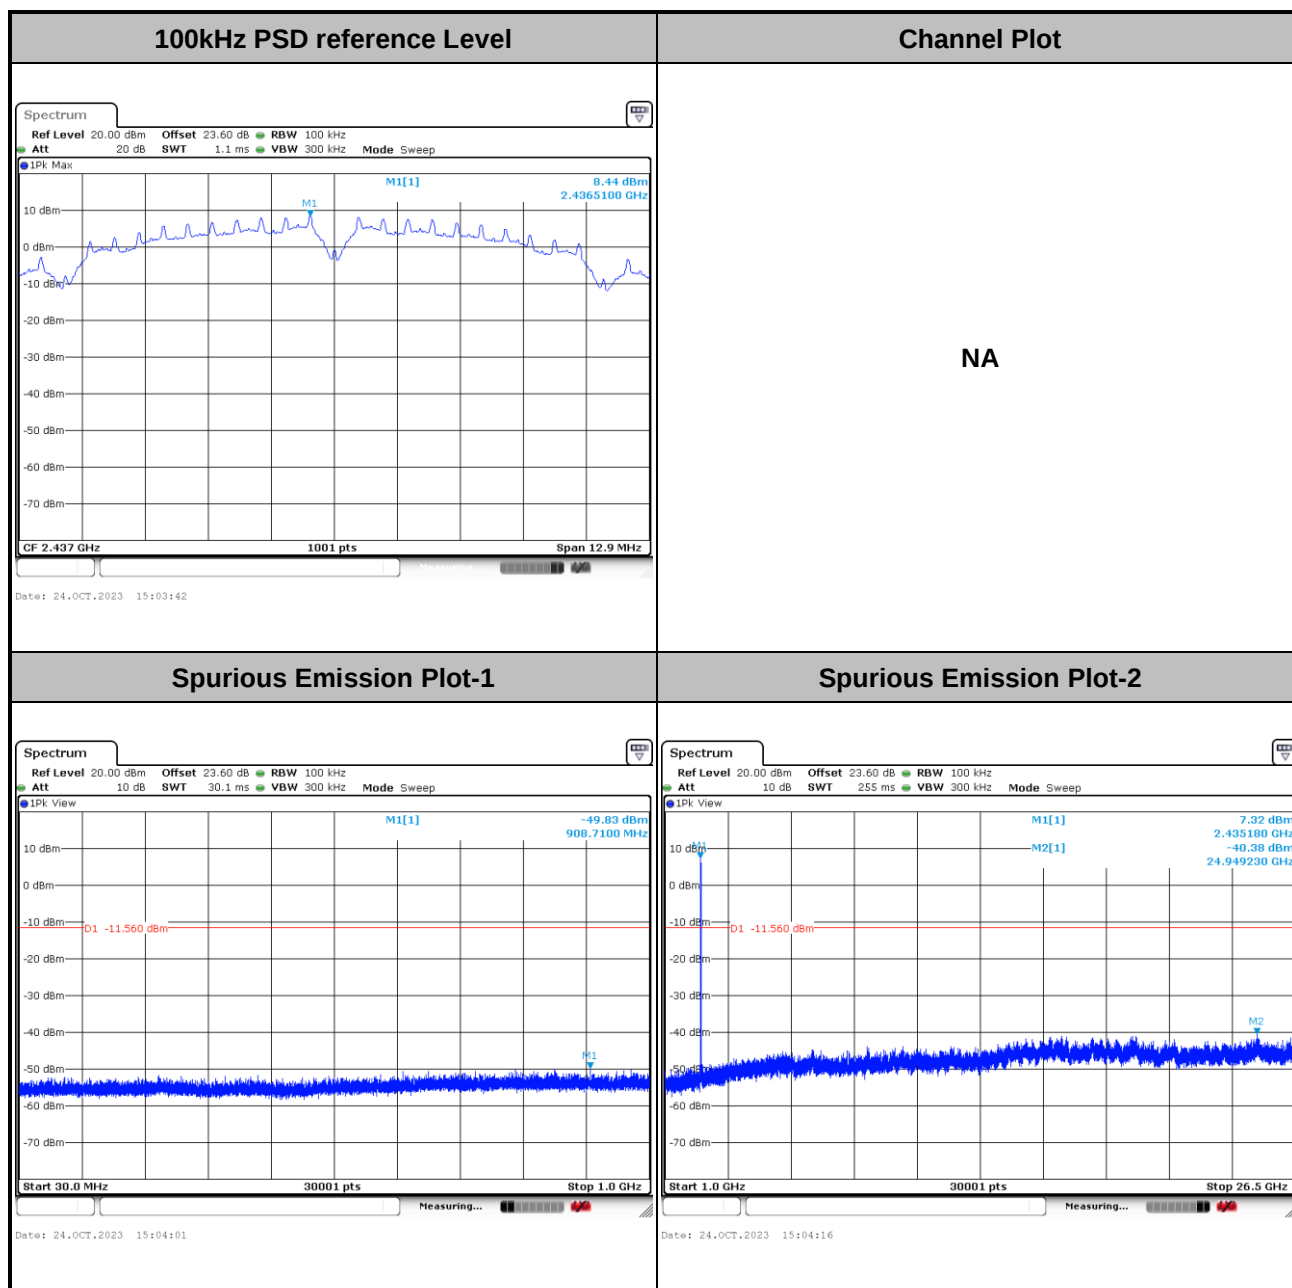




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

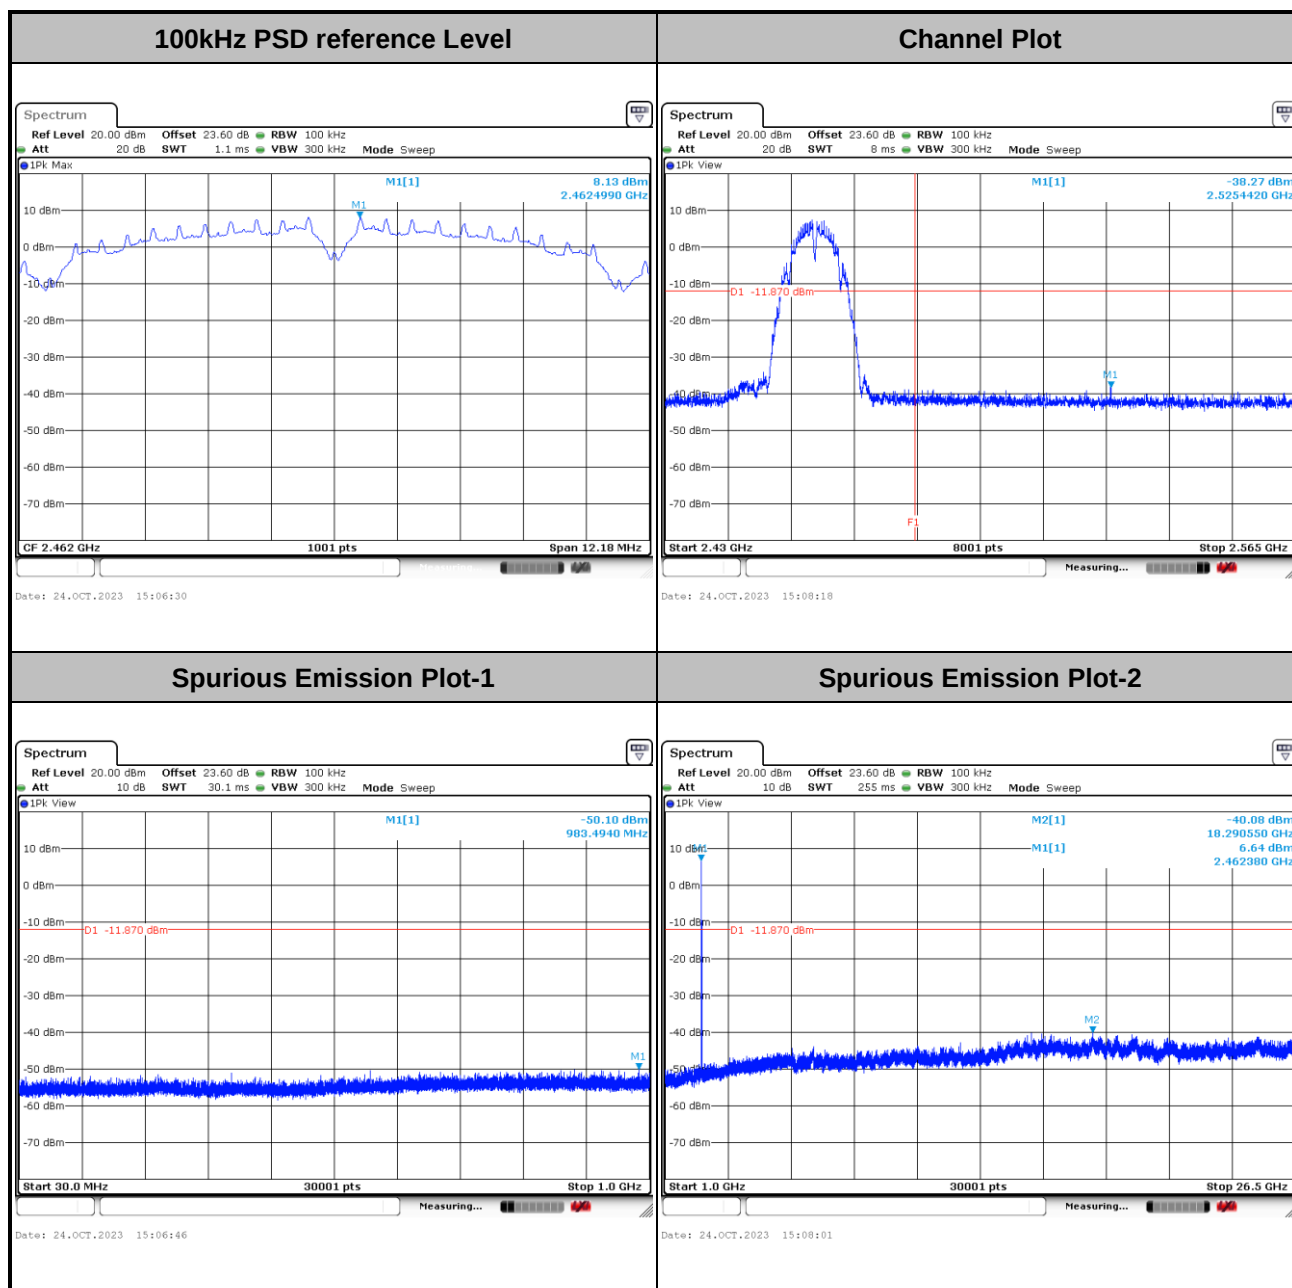




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

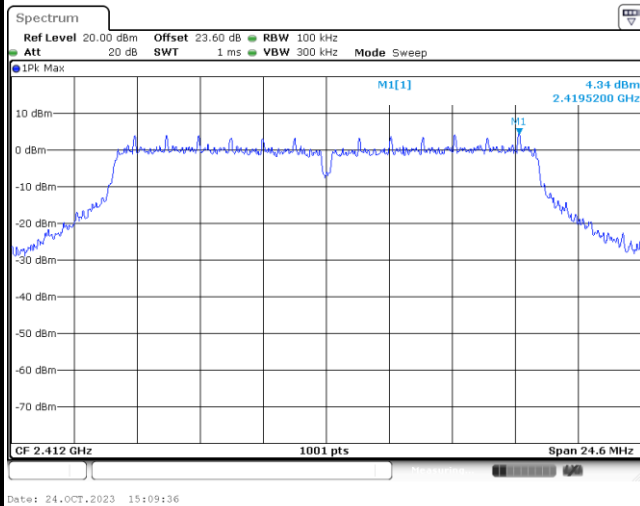


Channel Plot

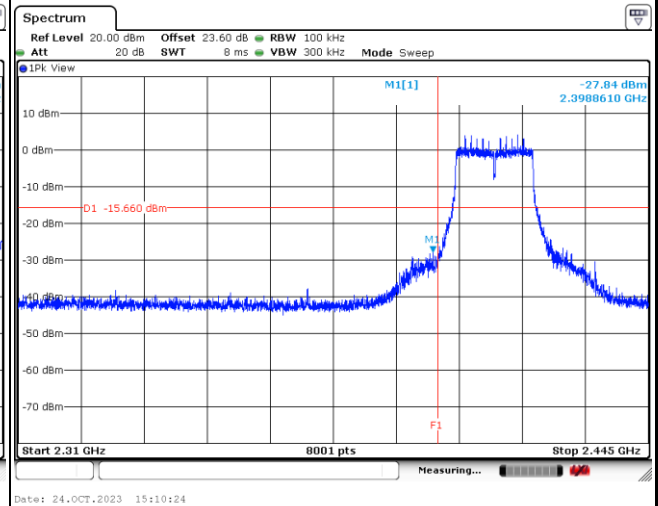

Spurious Emission Plot-1

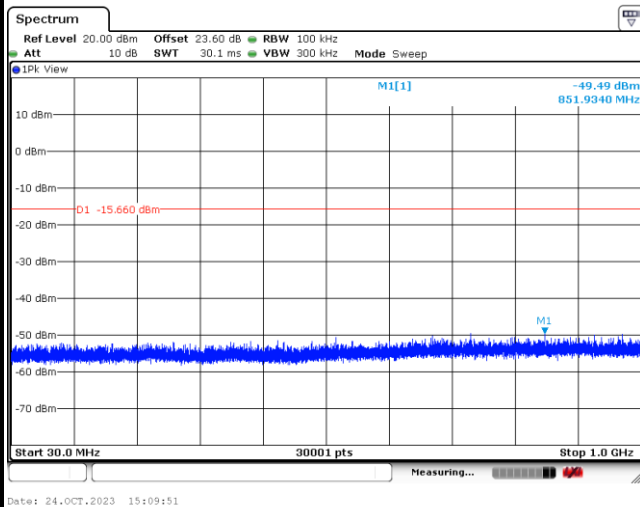


Spurious Emission Plot-2

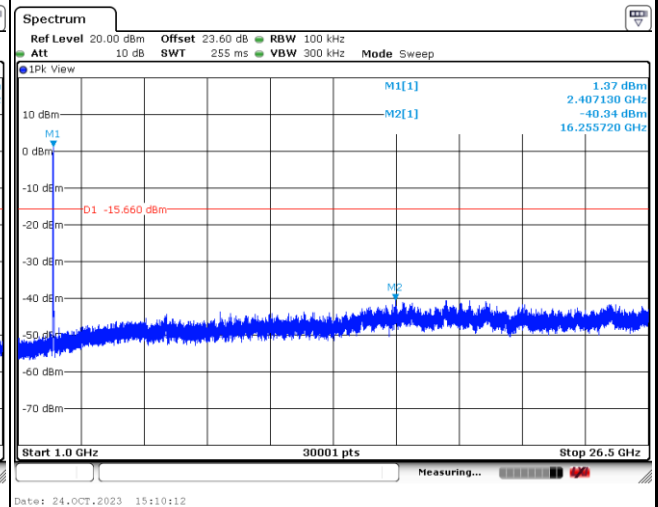




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

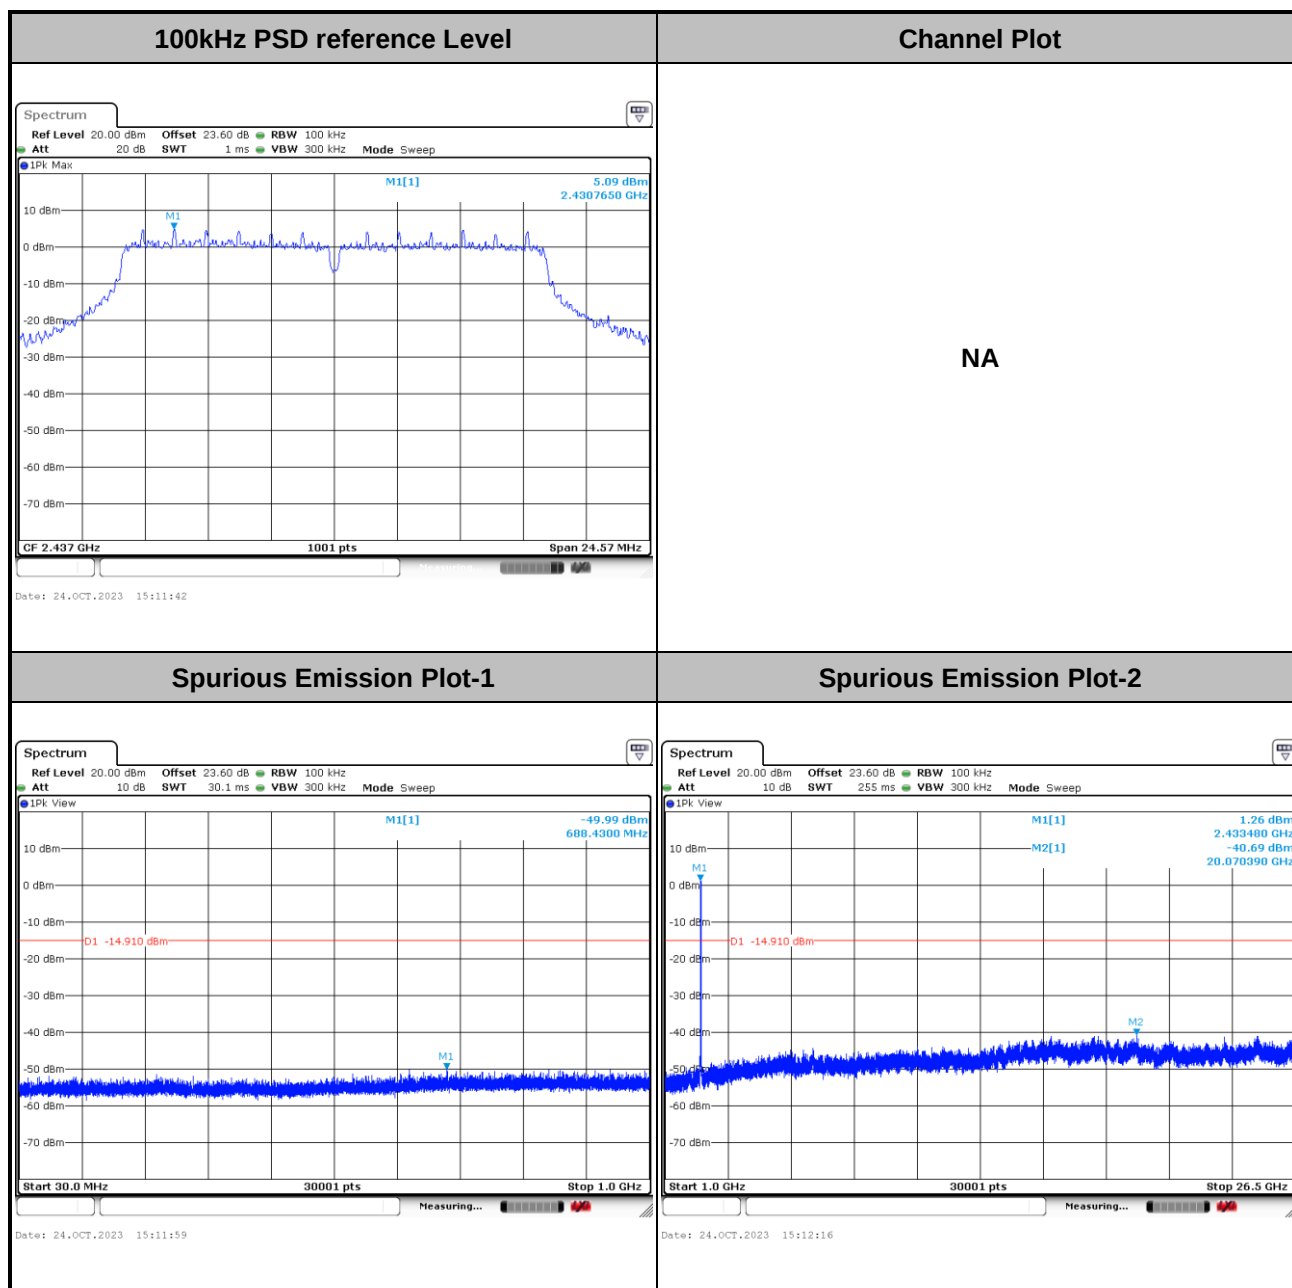




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

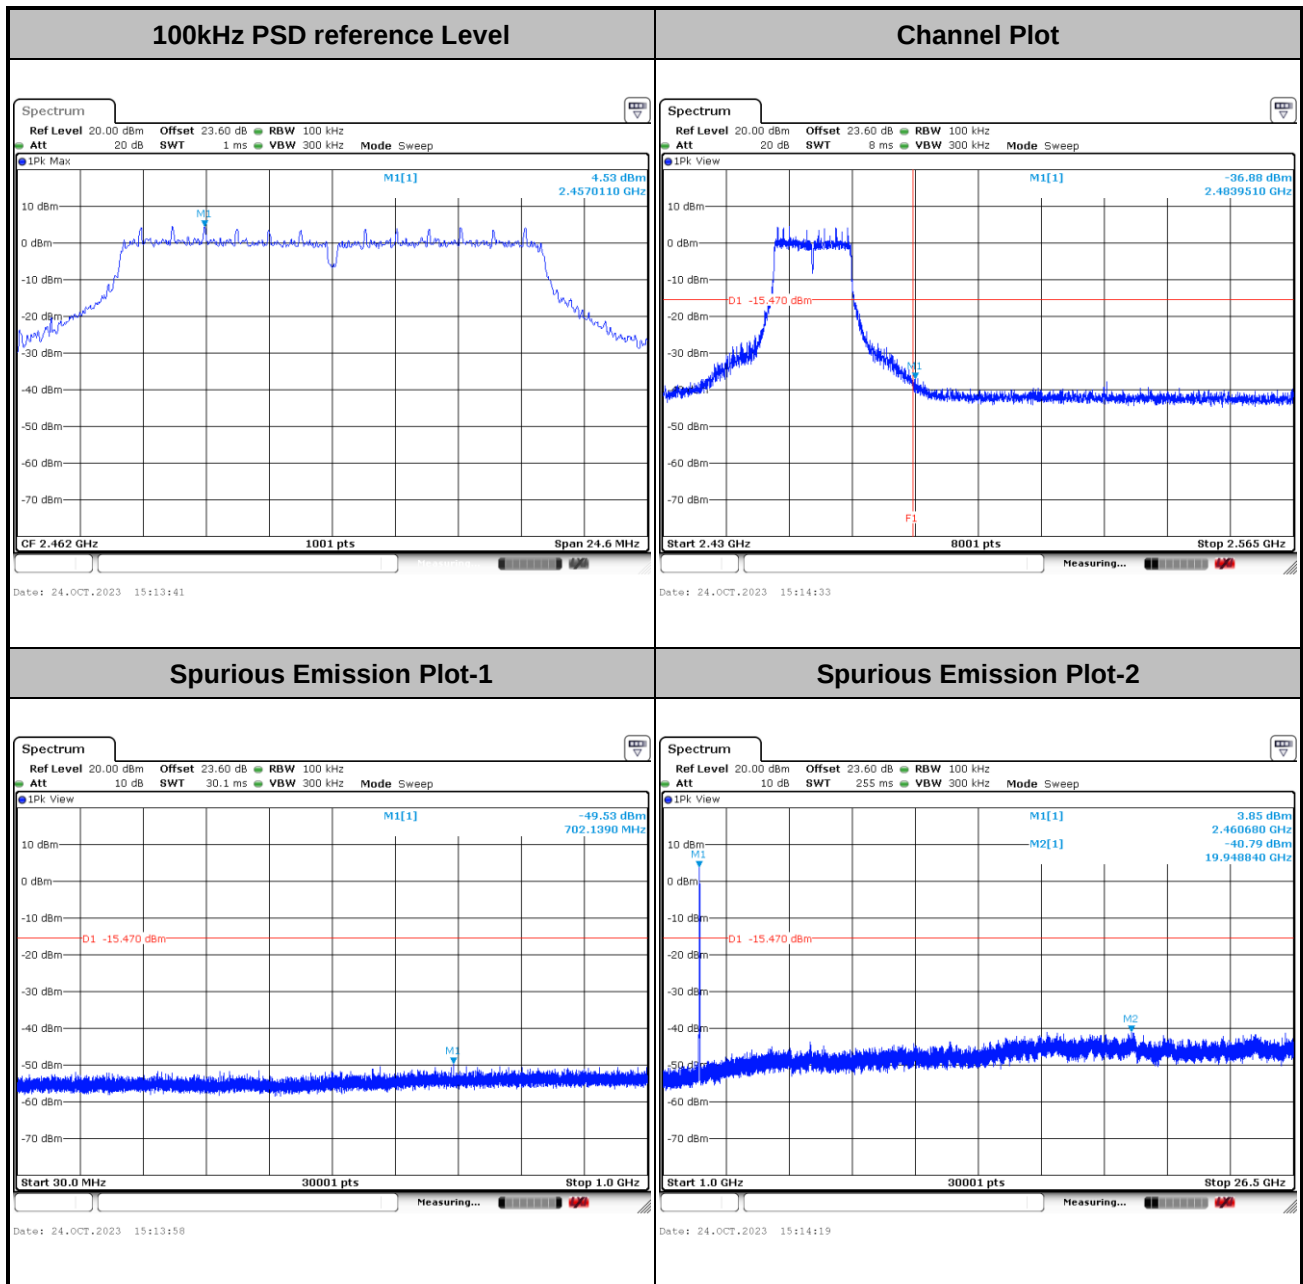




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

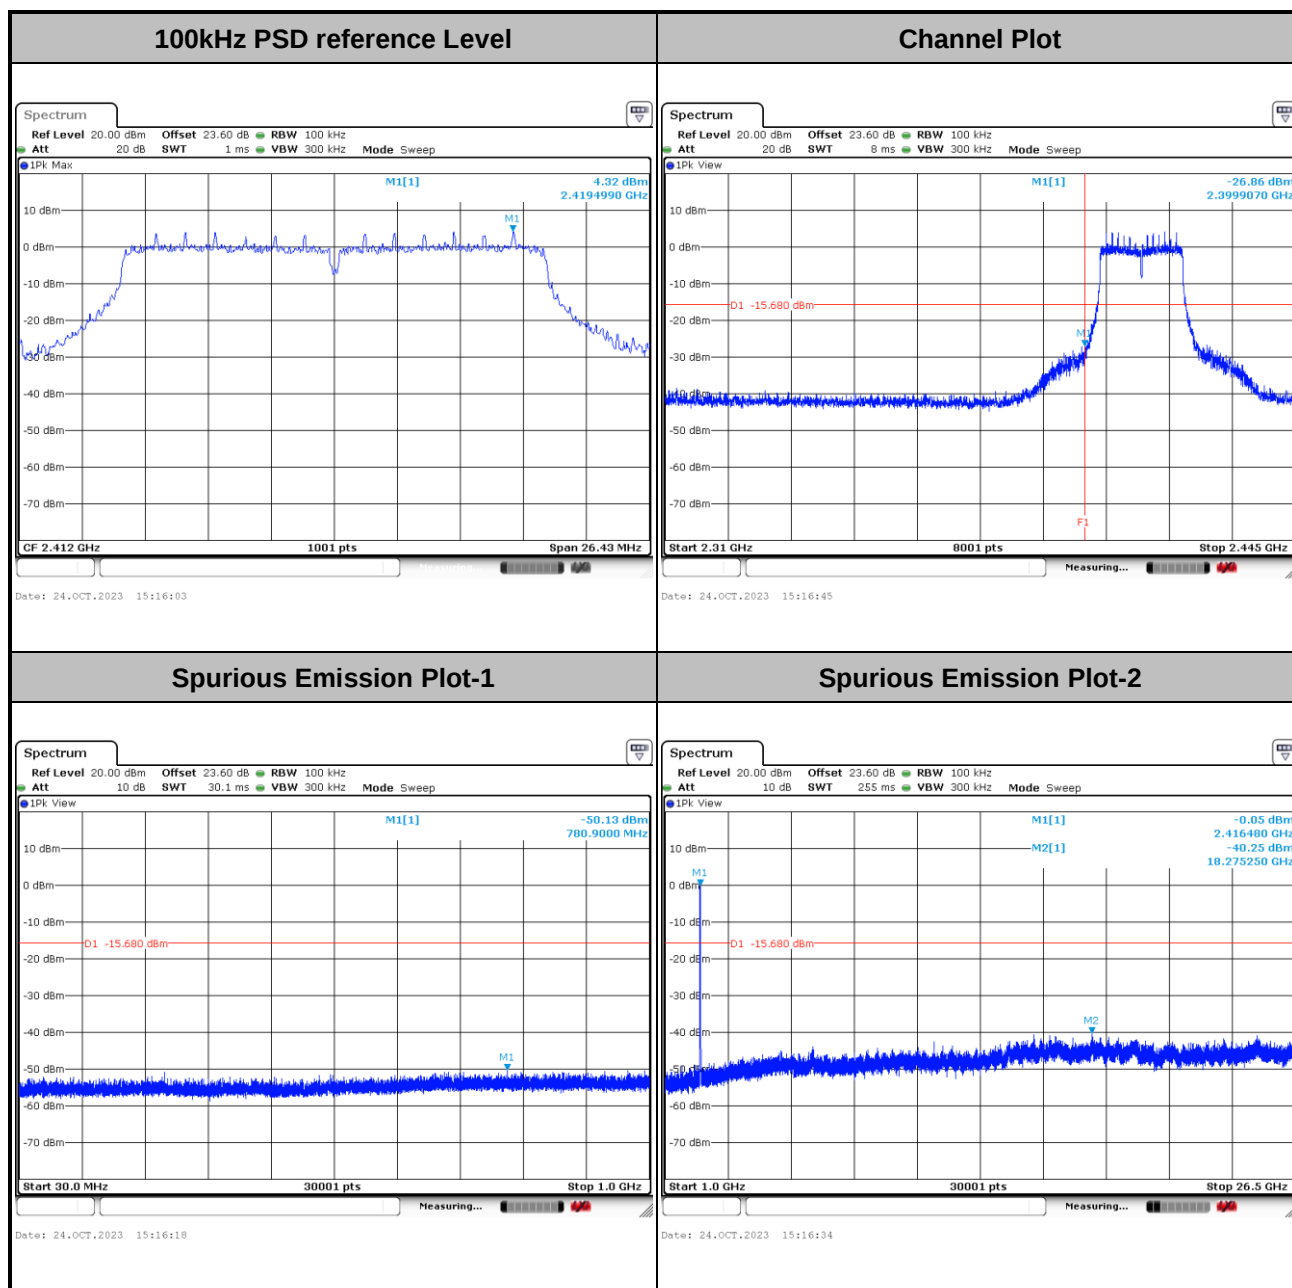



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

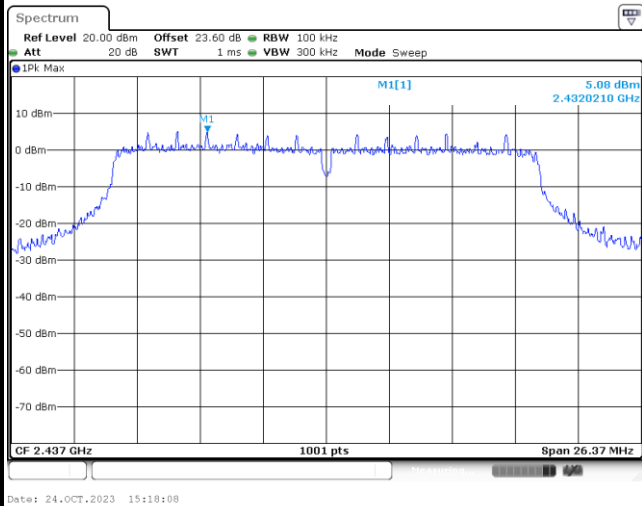


Channel Plot

NA

Spurious Emission Plot-1

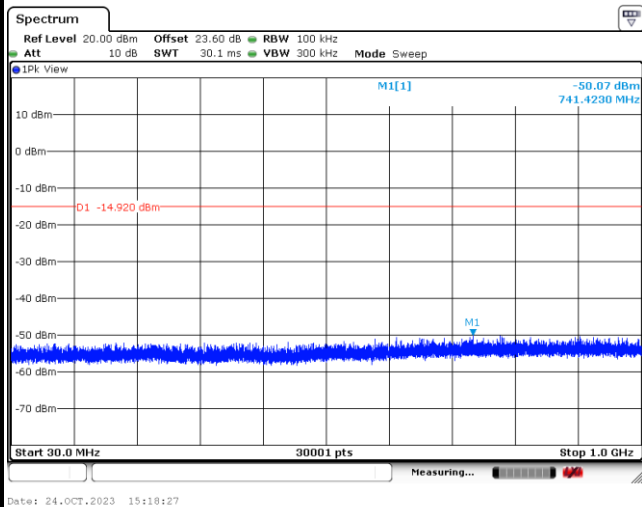


Spurious Emission Plot-2

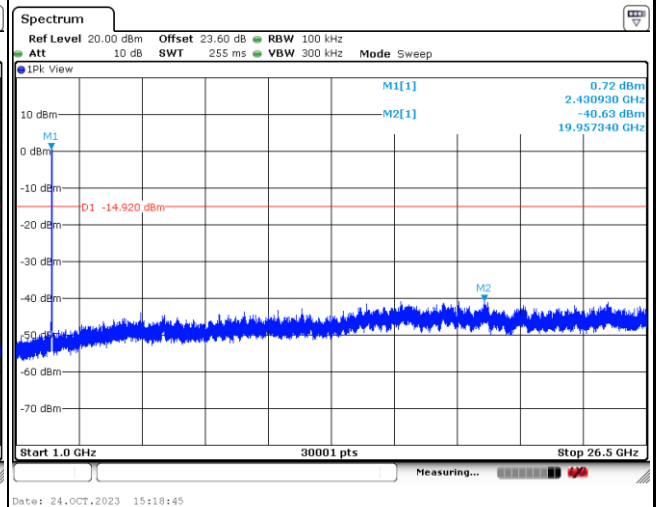



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

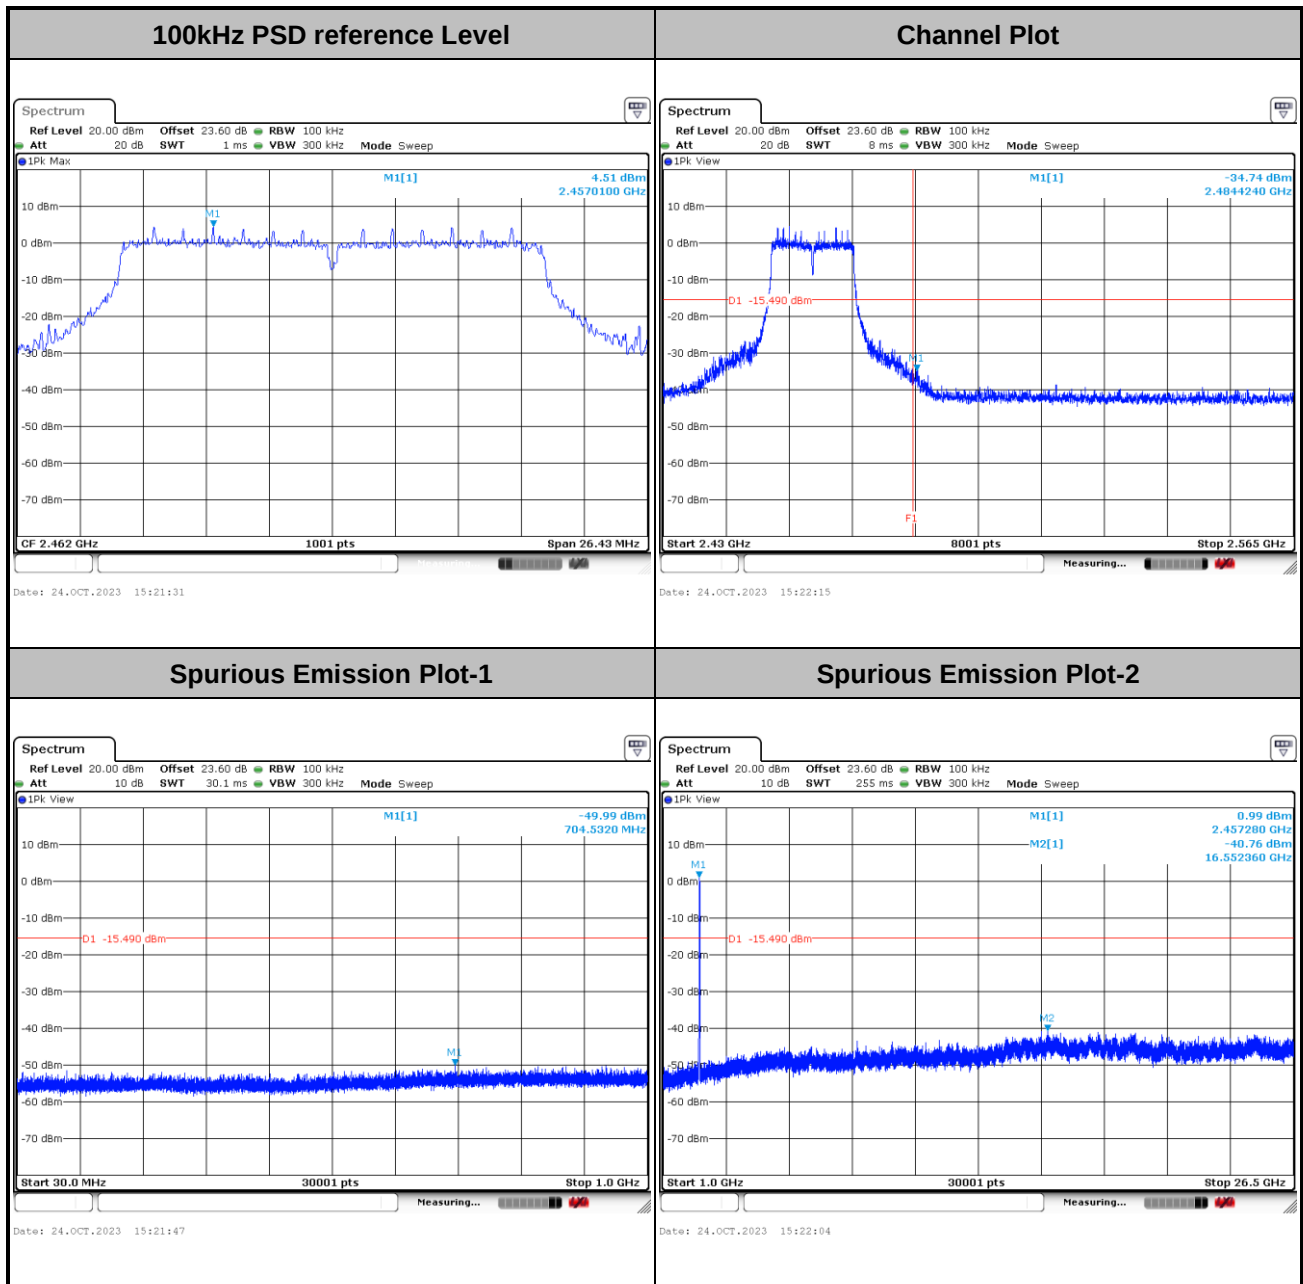

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

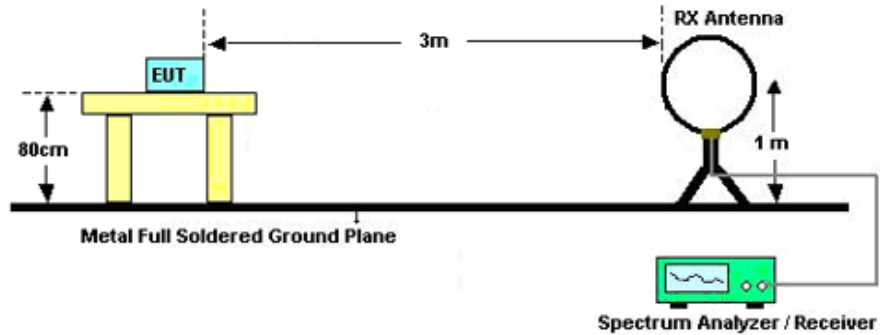

For radiated emissions from 30MHz to 1GHz

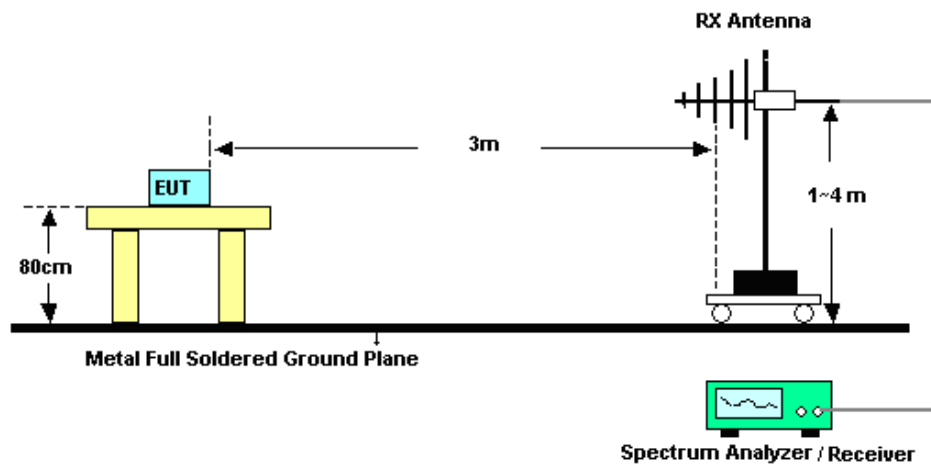

For radiated emissions above 1GHz

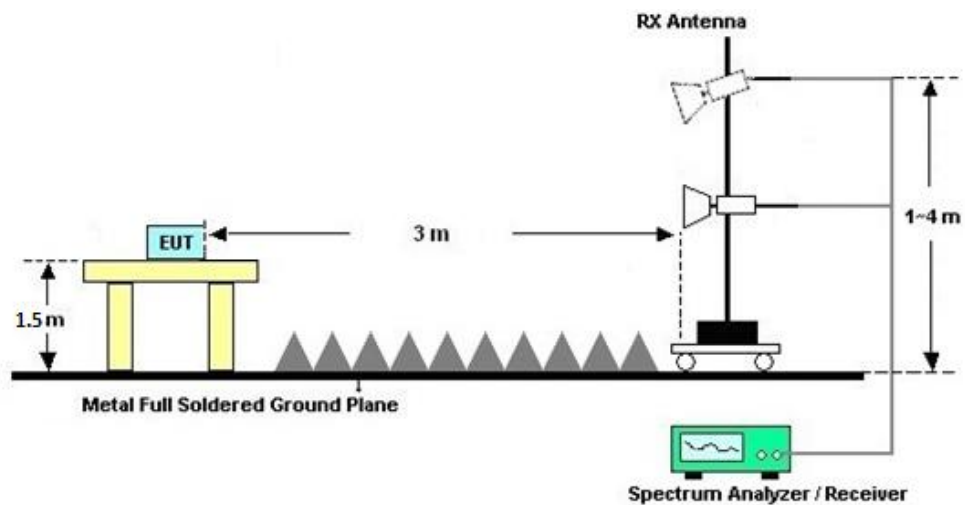

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

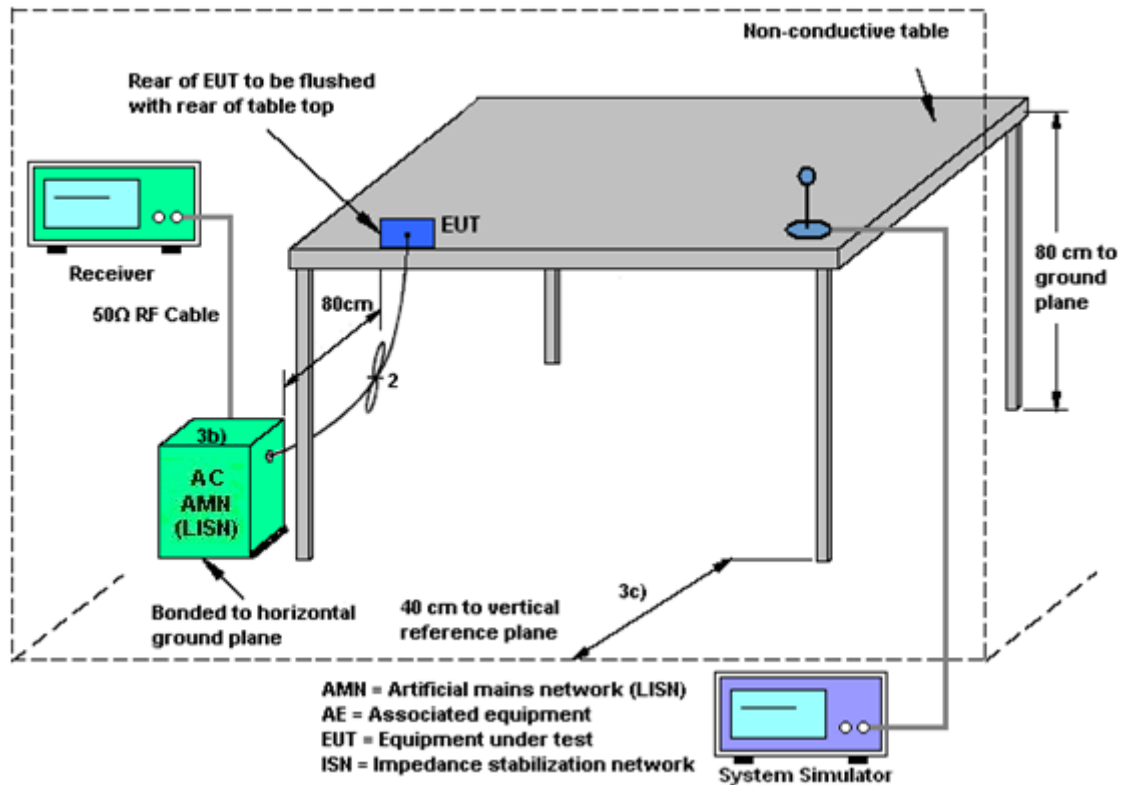

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Oct. 24, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Oct. 24, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Oct. 24, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Oct. 19, 2023 Nov. 07, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Oct. 19, 2023 Nov. 07, 2023	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Oct. 19, 2023 Nov. 07, 2023	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 14, 2023	Oct. 19, 2023 Nov. 07, 2023	May 13, 2024	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Oct. 19, 2023 Nov. 07, 2023	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	Oct. 19, 2023 Nov. 07, 2023	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Oct. 19, 2023 Nov. 07, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Oct. 19, 2023 Nov. 07, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Oct. 19, 2023 Nov. 07, 2023	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Aug. 21, 2023	Oct. 19, 2023 Nov. 07, 2023	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Oct. 19, 2023 Nov. 07, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 19, 2023 Nov. 07, 2023	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 19, 2023 Nov. 07, 2023	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Oct. 19, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Oct. 19, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Oct. 19, 2023	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Oct. 19, 2023	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2023/10/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.14	8.10	0.50	Pass
11b	1Mbps	1	6	2437	13.19	8.60	0.50	Pass
11b	1Mbps	1	11	2462	13.14	8.12	0.50	Pass
11g	6Mbps	1	1	2412	17.33	16.40	0.50	Pass
11g	6Mbps	1	6	2437	17.33	16.38	0.50	Pass
11g	6Mbps	1	11	2462	17.33	16.40	0.50	Pass
HT20	MCS0	1	1	2412	18.23	17.62	0.50	Pass
HT20	MCS0	1	6	2437	18.23	17.58	0.50	Pass
HT20	MCS0	1	11	2462	18.23	17.62	0.50	Pass

TEST RESULTS DATA
Average Output Power
(Report only)

2.4GHz Band							Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	
11b	1Mbps	1	1	2412	0.10	17.20	15.5
11b	1Mbps	1	6	2437	0.10	17.50	15.5
11b	1Mbps	1	11	2462	0.10	17.40	15.5
11g	6Mbps	1	1	2412	0.60	12.40	13
11g	6Mbps	1	6	2437	0.60	14.50	14.5
11g	6Mbps	1	11	2462	0.60	13.50	14
HT20	MCS0	1	1	2412	0.64	12.50	13
HT20	MCS0	1	6	2437	0.64	14.50	14.5
HT20	MCS0	1	11	2462	0.64	13.60	14

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	19.95	30.00	-0.50	19.45	36.00	Pass
11b	1Mbps	1	6	2437	20.13	30.00	-0.50	19.63	36.00	Pass
11b	1Mbps	1	11	2462	20.11	30.00	-0.50	19.61	36.00	Pass
11g	6Mbps	1	1	2412	21.18	30.00	-0.50	20.68	36.00	Pass
11g	6Mbps	1	6	2437	22.38	30.00	-0.50	21.88	36.00	Pass
11g	6Mbps	1	11	2462	21.89	30.00	-0.50	21.39	36.00	Pass
HT20	MCS0	1	1	2412	21.20	30.00	-0.50	20.70	36.00	Pass
HT20	MCS0	1	6	2437	22.49	30.00	-0.50	21.99	36.00	Pass
HT20	MCS0	1	11	2462	21.96	30.00	-0.50	21.46	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.45	-0.50	8.00	Pass
11b	1Mbps	1	6	2437	-5.51	-0.50	8.00	Pass
11b	1Mbps	1	11	2462	-5.91	-0.50	8.00	Pass
11g	6Mbps	1	1	2412	-9.53	-0.50	8.00	Pass
11g	6Mbps	1	6	2437	-9.37	-0.50	8.00	Pass
11g	6Mbps	1	11	2462	-9.71	-0.50	8.00	Pass
HT20	MCS0	1	1	2412	-9.44	-0.50	8.00	Pass
HT20	MCS0	1	6	2437	-9.22	-0.50	8.00	Pass
HT20	MCS0	1	11	2462	-9.80	-0.50	8.00	Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

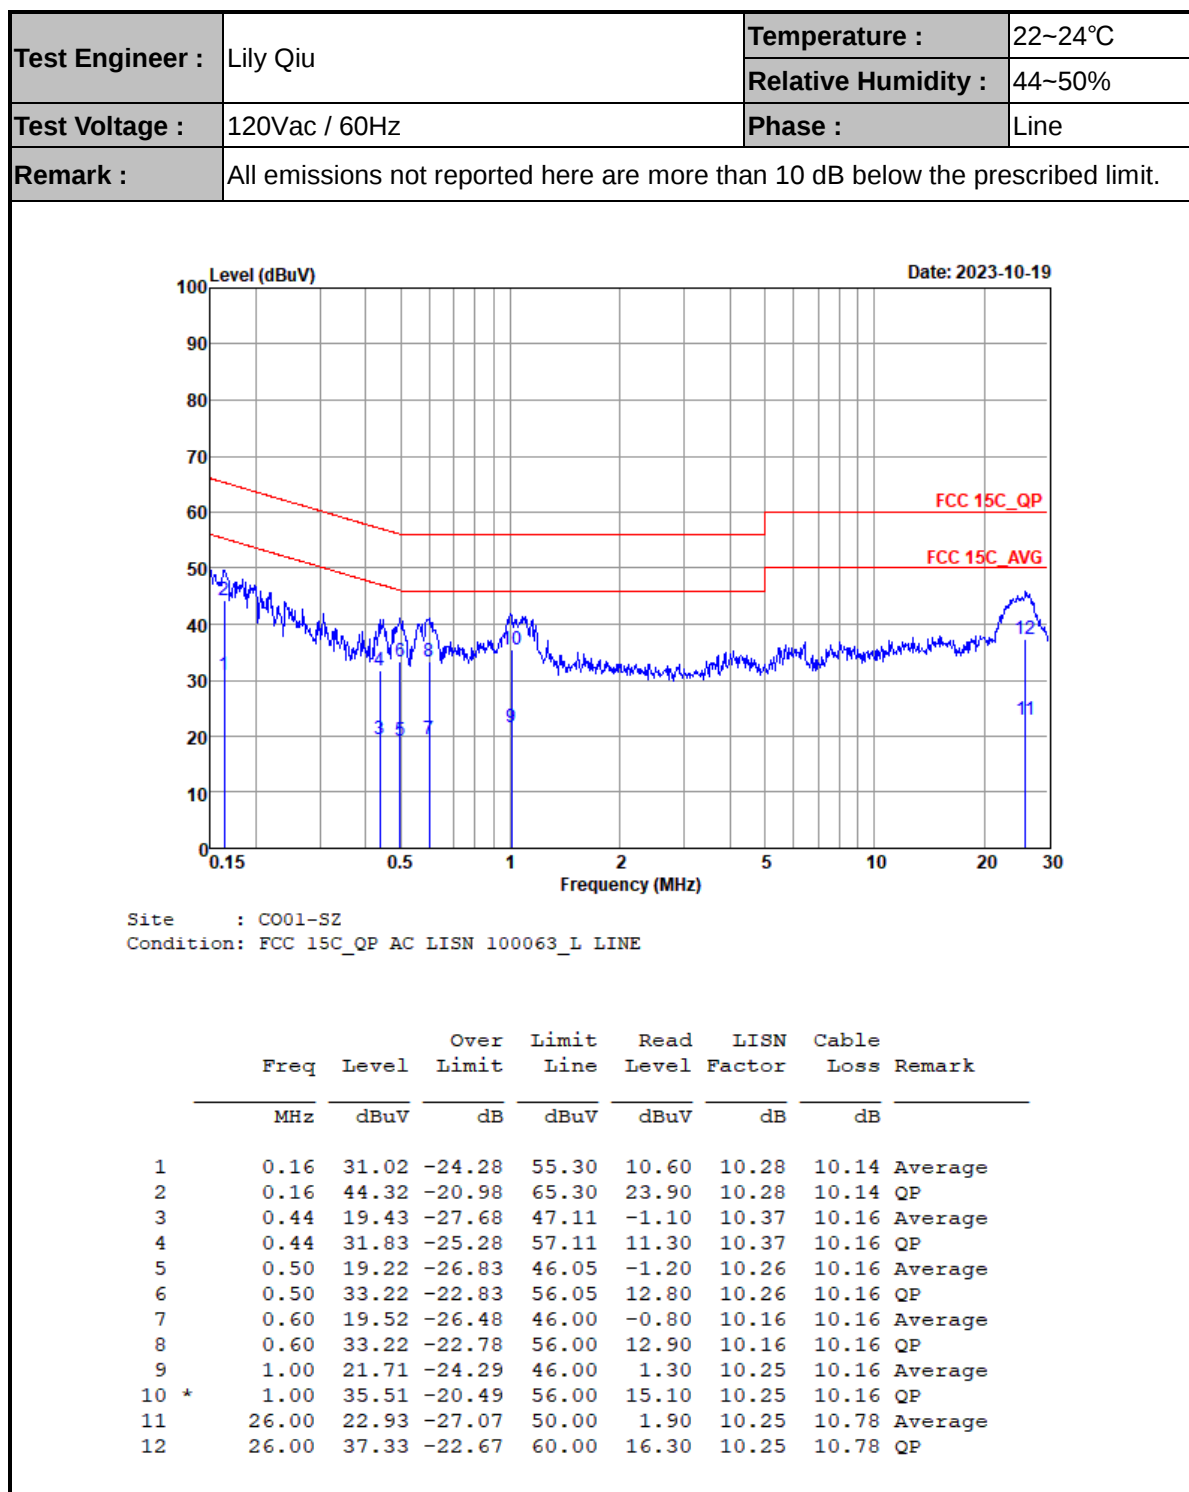



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

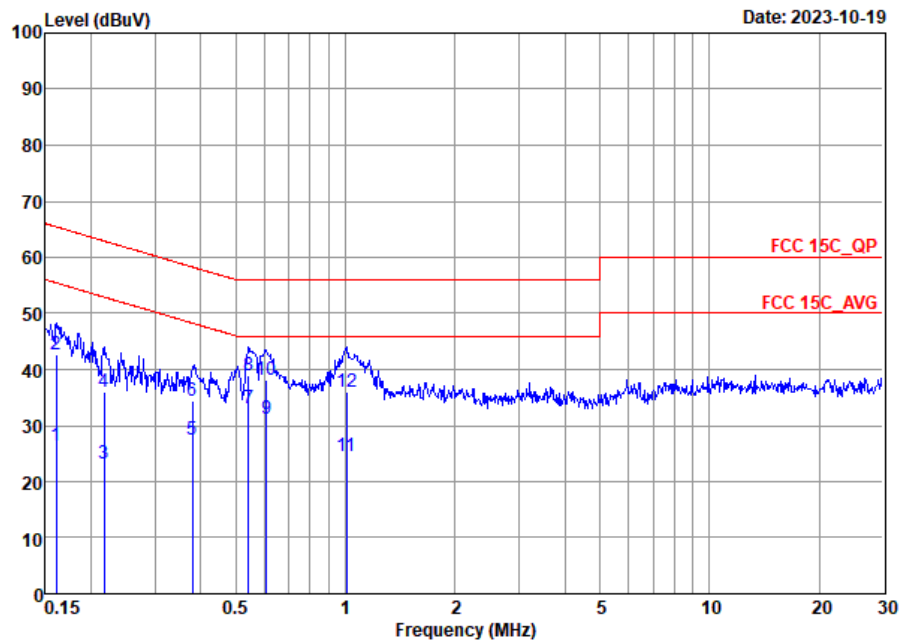

Site : CO01-SZ
Condition: FCC 15C QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	26.47	-28.96	55.43	5.99	10.34	10.14	Average
2	0.16	42.77	-22.66	65.43	22.29	10.34	10.14	QP
3	0.22	23.18	-29.74	52.92	2.81	10.22	10.15	Average
4	0.22	35.98	-26.94	62.92	15.61	10.22	10.15	QP
5	0.38	27.54	-20.76	48.30	7.30	10.08	10.16	Average
6	0.38	34.34	-23.96	58.30	14.10	10.08	10.16	QP
7 *	0.54	33.00	-13.00	46.00	12.70	10.14	10.16	Average
8	0.54	38.90	-17.10	56.00	18.60	10.14	10.16	QP
9	0.61	31.32	-14.68	46.00	11.00	10.16	10.16	Average
10	0.61	38.12	-17.88	56.00	17.80	10.16	10.16	QP
11	1.00	24.48	-21.52	46.00	4.10	10.22	10.16	Average
12	1.00	35.98	-20.02	56.00	15.60	10.22	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20-22℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	SISO	802.11n HT20_LF	11	2462	MCS0	-	LF





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.30	43.13	54.00	-10.87	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	43.68	74.00	-30.32	H	Peak	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	7311.00	46.49	74.00	-27.51	V	Peak	Pass	Harmonic
3	802.11b	11	2486.81	42.71	54.00	-11.29	V	AVERAGE	Pass	Band Edge
3	802.11b	11	7386.00	49.45	74.00	-24.55	H	Peak	Pass	Harmonic
4	802.11g	01	2389.82	49.43	54.00	-4.57	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	44.70	74.00	-29.30	H	Peak	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	44.21	74.00	-29.79	H	Peak	Pass	Harmonic
6	802.11g	11	2483.62	48.99	54.00	-5.01	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	49.74	74.00	-24.26	H	Peak	Pass	Harmonic
7	802.11n HT20	01	2389.95	50.46	54.00	-3.54	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	43.36	74.00	-30.64	V	Peak	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	44.38	74.00	-29.62	V	Peak	Pass	Harmonic
9	802.11n HT20	11	2483.93	51.78	54.00	-2.22	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	45.16	74.00	-28.84	V	Peak	Pass	Harmonic
10	802.11n HT20_LF	11	30.00	34.45	40.00	-5.55	V	Peak	Pass	LF

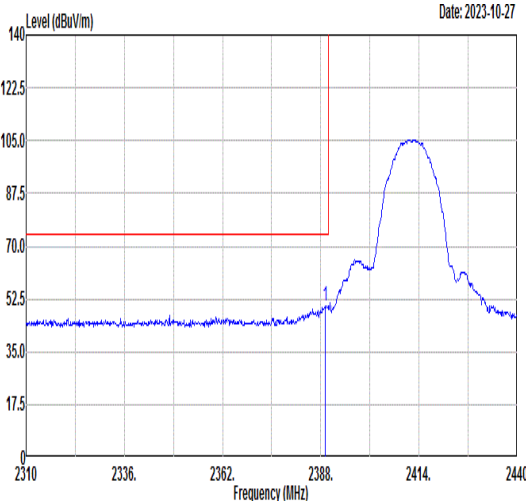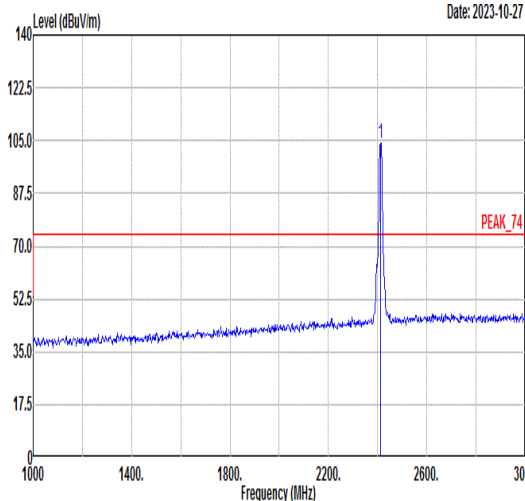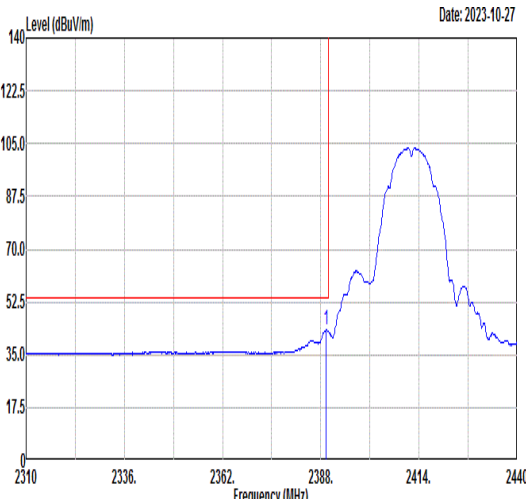
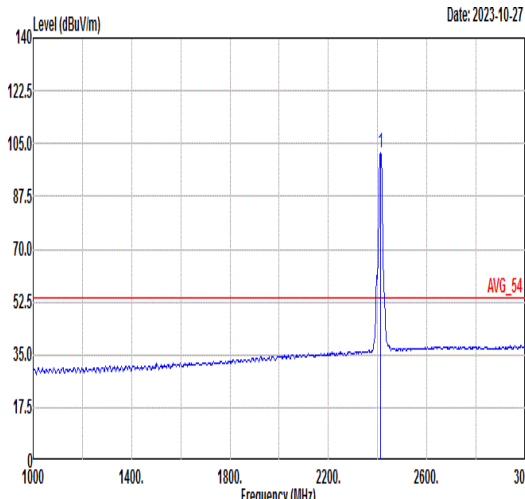


		1																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11b_CH01_2412MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>50.38</td><td>74.00</td><td>-23.62</td><td>44.97</td><td>33.31</td><td>5.36</td><td>33.26</td><td>400</td><td>300</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.17	50.38	74.00	-23.62	44.97	33.31	5.36	33.26	400	300	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>104.11</td><td>-----</td><td>-----</td><td>98.58</td><td>33.37</td><td>5.38</td><td>33.22</td><td>400</td><td>300</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	104.11	-----	-----	98.58	33.37	5.38	33.22	400	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2389.17	50.38	74.00	-23.62	44.97	33.31	5.36	33.26	400	300	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2412.00	104.11	-----	-----	98.58	33.37	5.38	33.22	400	300	PEAK																																																																														
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>43.13</td><td>54.00</td><td>-10.87</td><td>37.71</td><td>33.31</td><td>5.36</td><td>33.25</td><td>400</td><td>300</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.30	43.13	54.00	-10.87	37.71	33.31	5.36	33.25	400	300	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.73</td><td>-----</td><td>-----</td><td>96.20</td><td>33.37</td><td>5.38</td><td>33.22</td><td>400</td><td>300</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	101.73	-----	-----	96.20	33.37	5.38	33.22	400	300
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2389.30	43.13	54.00	-10.87	37.71	33.31	5.36	33.25	400	300	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2412.00	101.73	-----	-----	96.20	33.37	5.38	33.22	400	300	AVERAGE																																																																														

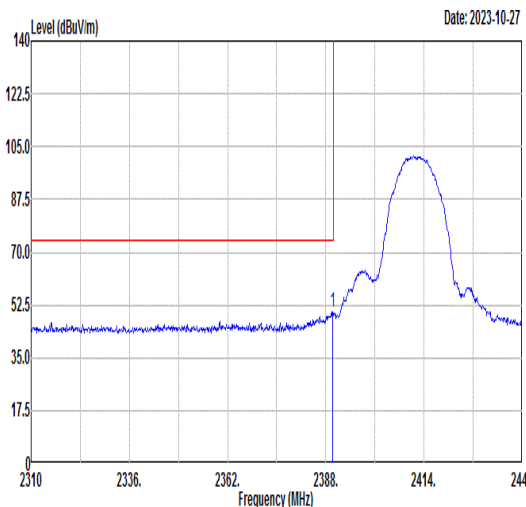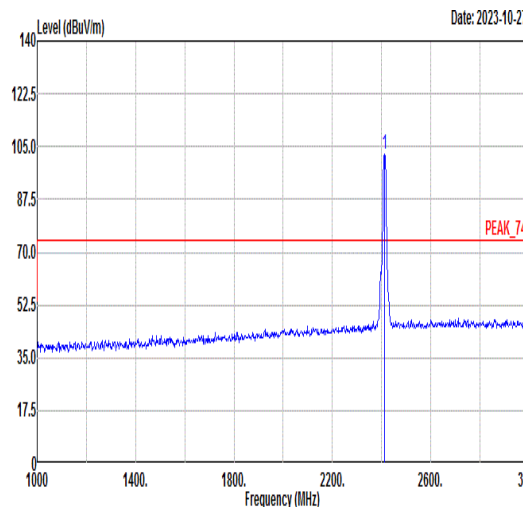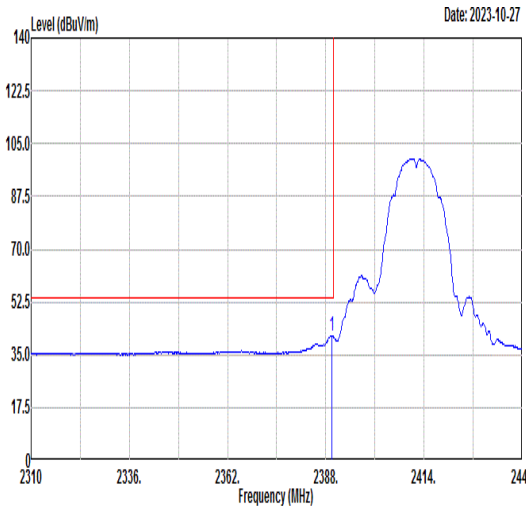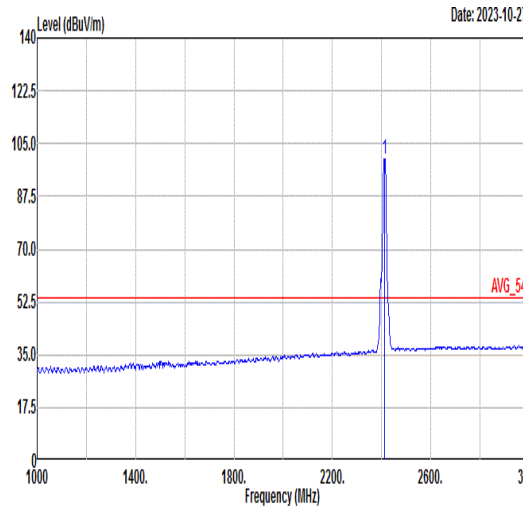

Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																															
ANT	SISO																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2023-10-27  <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>50.31</td><td>74.00</td><td>-23.69</td><td>44.89</td><td>33.31</td><td>5.36</td><td>33.25</td><td></td><td>400</td><td>217</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.82	50.31	74.00	-23.69	44.89	33.31	5.36	33.25		400	217	PEAK	Level (dBuV/m) Date: 2023-10-27  <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.54</td><td>-----</td><td>-----</td><td>97.01</td><td>33.37</td><td>5.38</td><td>33.22</td><td></td><td>400</td><td>217</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	102.54	-----	-----	97.01	33.37	5.38	33.22		400	217	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2389.82	50.31	74.00	-23.69	44.89	33.31	5.36	33.25		400	217	PEAK																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2412.00	102.54	-----	-----	97.01	33.37	5.38	33.22		400	217	PEAK																																																																				
Avg	Level (dBuV/m) Date: 2023-10-27  <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>35.79</td><td>33.31</td><td>5.36</td><td>33.25</td><td></td><td>400</td><td>217</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.56	41.21	54.00	-12.79	35.79	33.31	5.36	33.25		400	217	AVERAGE	Level (dBuV/m) Date: 2023-10-27  <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.01</td><td>-----</td><td>-----</td><td>94.48</td><td>33.37</td><td>5.38</td><td>33.22</td><td></td><td>400</td><td>217</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	100.01	-----	-----	94.48	33.37	5.38	33.22		400	217	AVERAGE
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2389.56	41.21	54.00	-12.79	35.79	33.31	5.36	33.25		400	217	AVERAGE																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2412.00	100.01	-----	-----	94.48	33.37	5.38	33.22		400	217	AVERAGE																																																																				



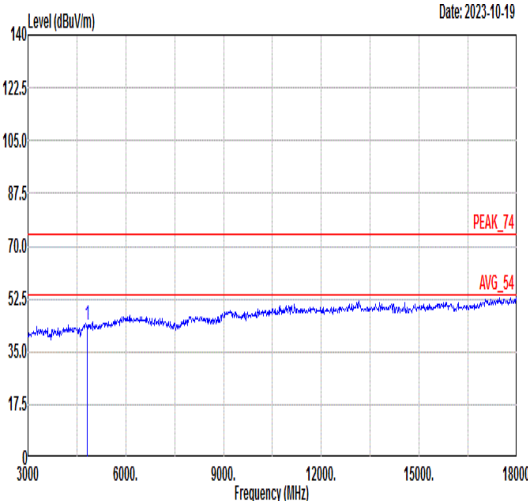
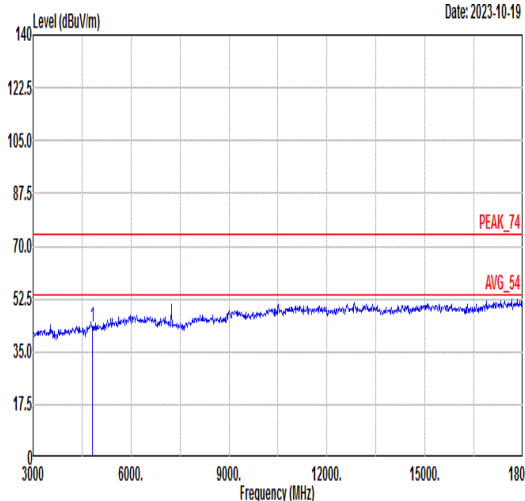


Mode	1																																																																																																								
	Harmonic																																																																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																								
ANT	SISO																																																																																																								
Pol.	Horizontal										Vertical																																																																																														
Peak Avg	Level (dBuV/m) Date: 2023-10-19  Frequency (MHz)										Level (dBuV/m) Date: 2023-10-19  Frequency (MHz)																																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.68</td><td>74.00</td><td>-30.32</td><td>63.56</td><td>36.09</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.68	74.00	-30.32	63.56	36.09	8.88	64.85	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.57</td><td>74.00</td><td>-30.43</td><td>63.45</td><td>36.09</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.57	74.00	-30.43	63.45	36.09	8.88	64.85	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	4824.00	43.68	74.00	-30.32	63.56	36.09	8.88	64.85	---	---	Peak																																																																																														
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	4824.00	43.57	74.00	-30.43	63.45	36.09	8.88	64.85	---	---	Peak																																																																																														







Mode	2																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																													
ANT	SISO																																																																																																													
Pol.	Horizontal					Vertical																																																																																																								
Peak Avg																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.75</td><td>74.00</td><td>-29.25</td><td>64.78</td><td>36.12</td><td>8.72</td><td>64.87</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.30</td><td>74.00</td><td>-27.70</td><td>64.76</td><td>36.22</td><td>10.18</td><td>64.86</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	44.75	74.00	-29.25	64.78	36.12	8.72	64.87	---	Peak	2	7311.00	46.30	74.00	-27.70	64.76	36.22	10.18	64.86	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>42.89</td><td>74.00</td><td>-31.11</td><td>62.92</td><td>36.12</td><td>8.72</td><td>64.87</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.49</td><td>74.00</td><td>-27.51</td><td>64.95</td><td>36.22</td><td>10.18</td><td>64.86</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4874.00	42.89	74.00	-31.11	62.92	36.12	8.72	64.87	---	Peak	2	7311.00	46.49	74.00	-27.51	64.95	36.22	10.18	64.86	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																					
1	4874.00	44.75	74.00	-29.25	64.78	36.12	8.72	64.87	---	Peak																																																																																																				
2	7311.00	46.30	74.00	-27.70	64.76	36.22	10.18	64.86	---	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																					
1	4874.00	42.89	74.00	-31.11	62.92	36.12	8.72	64.87	---	Peak																																																																																																				
2	7311.00	46.49	74.00	-27.51	64.95	36.22	10.18	64.86	---	Peak																																																																																																				

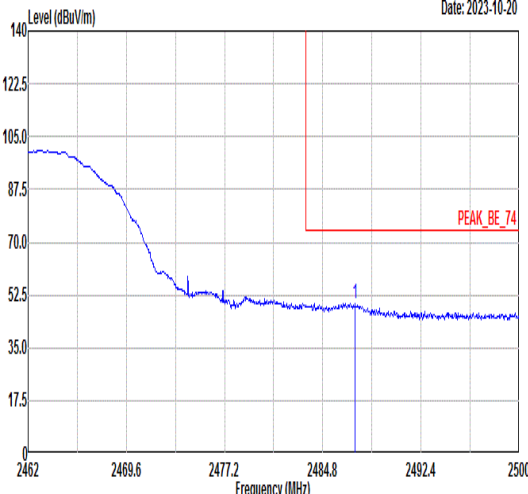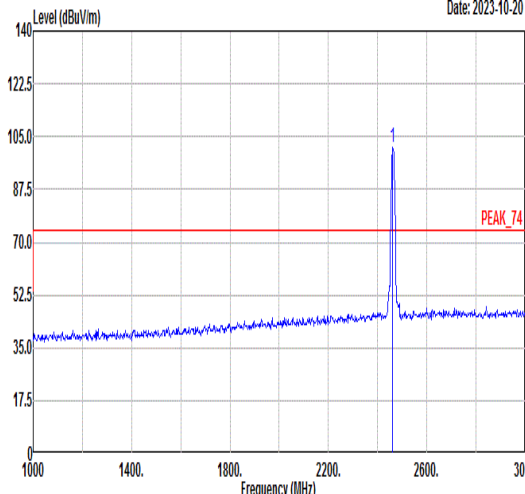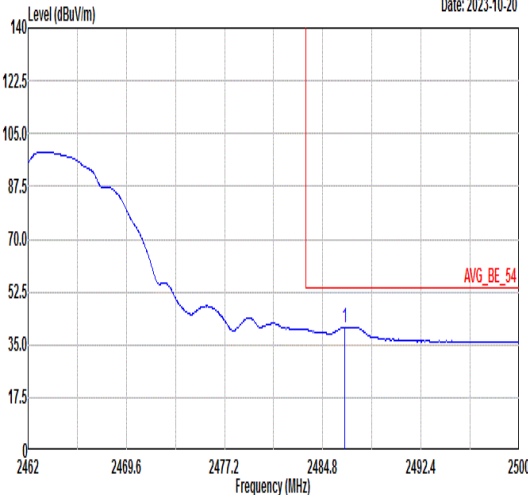
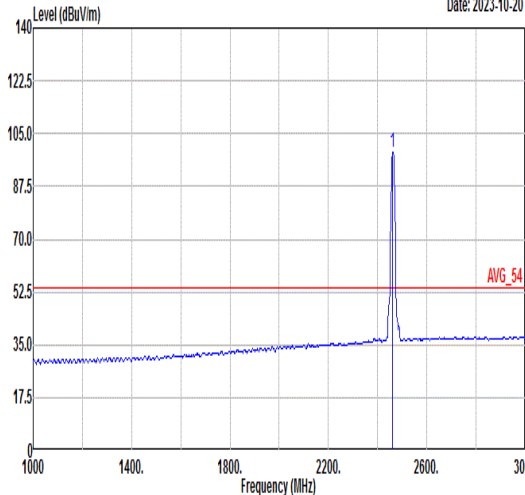


Mode	3																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.31</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>43.72</td><td>33.57</td><td>5.46</td><td>33.12</td><td>400</td><td>166</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2487.31	49.63	74.00	-24.37	43.72	33.57	5.46	33.12	400	166	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.25</td><td>-----</td><td>-----</td><td>95.46</td><td>33.50</td><td>5.44</td><td>33.15</td><td>400</td><td>166</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	101.25	-----	-----	95.46	33.50	5.44	33.15	400	166
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2487.31	49.63	74.00	-24.37	43.72	33.57	5.46	33.12	400	166	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2462.00	101.25	-----	-----	95.46	33.50	5.44	33.15	400	166	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.47</td><td>40.91</td><td>54.00</td><td>-13.09</td><td>35.01</td><td>33.56</td><td>5.46</td><td>33.12</td><td>400</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.47	40.91	54.00	-13.09	35.01	33.56	5.46	33.12	400	166	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.76</td><td>-----</td><td>-----</td><td>92.97</td><td>33.50</td><td>5.44</td><td>33.15</td><td>400</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	98.76	-----	-----	92.97	33.50	5.44	33.15	400	166
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2486.47	40.91	54.00	-13.09	35.01	33.56	5.46	33.12	400	166	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2462.00	98.76	-----	-----	92.97	33.50	5.44	33.15	400	166	AVERAGE																																																																																

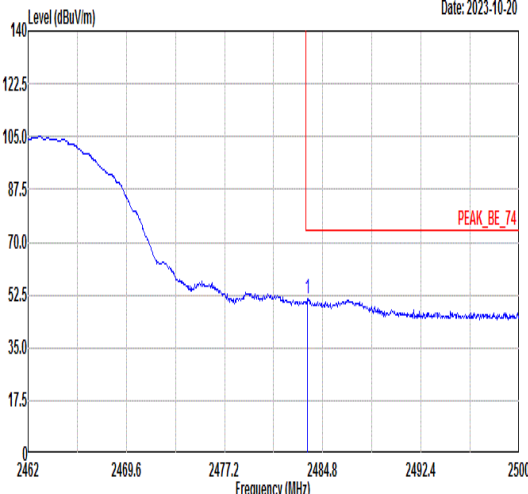
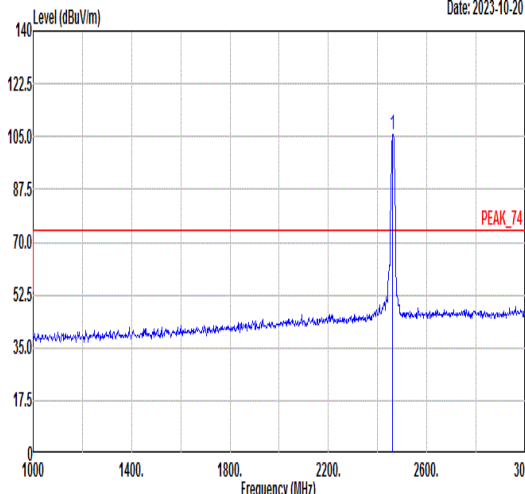
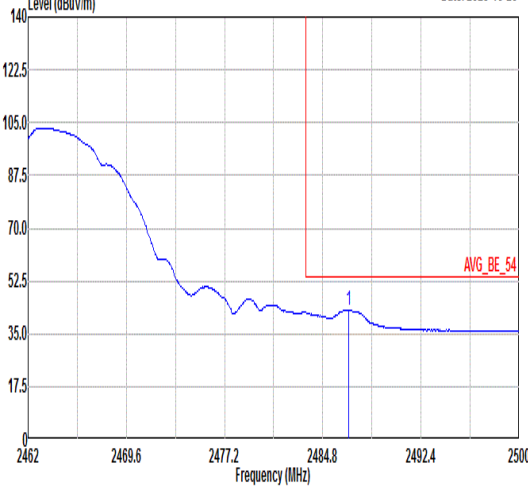
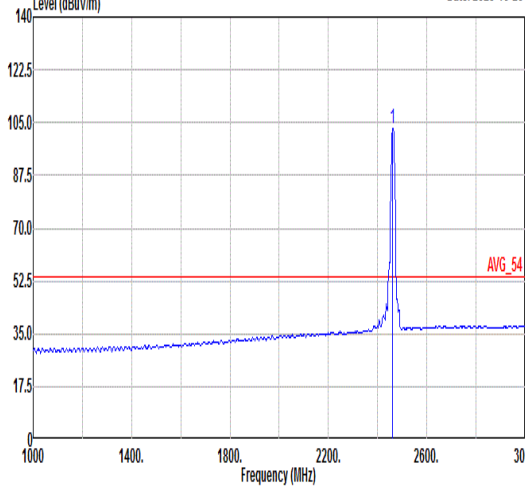


Mode	3																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Date: 2023-10-20 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2483.62</td><td>51.41</td><td>74.00</td><td>-22.59</td><td>45.51</td><td>33.56</td><td>5.46</td><td>33.12</td><td>300</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2483.62	51.41	74.00	-22.59	45.51	33.56	5.46	33.12	300									1 PEAK	Date: 2023-10-20 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>105.79</td><td>-----</td><td>-----</td><td>100.00</td><td>33.50</td><td>5.44</td><td>33.15</td><td>300</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2462.00	105.79	-----	-----	100.00	33.50	5.44	33.15	300									1 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 2483.62	51.41	74.00	-22.59	45.51	33.56	5.46	33.12	300																																																																																				
								1 PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 2462.00	105.79	-----	-----	100.00	33.50	5.44	33.15	300																																																																																				
								1 PEAK																																																																																				
Avg	Date: 2023-10-20 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2486.81</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>36.80</td><td>33.57</td><td>5.46</td><td>33.12</td><td>300</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2486.81	42.71	54.00	-11.29	36.80	33.57	5.46	33.12	300									1 AVERAGE	Date: 2023-10-20 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 2462.00</td><td>103.03</td><td>-----</td><td>-----</td><td>97.24</td><td>33.50</td><td>5.44</td><td>33.15</td><td>300</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>1 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2462.00	103.03	-----	-----	97.24	33.50	5.44	33.15	300									1 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 2486.81	42.71	54.00	-11.29	36.80	33.57	5.46	33.12	300																																																																																				
								1 AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 2462.00	103.03	-----	-----	97.24	33.50	5.44	33.15	300																																																																																				
								1 AVERAGE																																																																																				



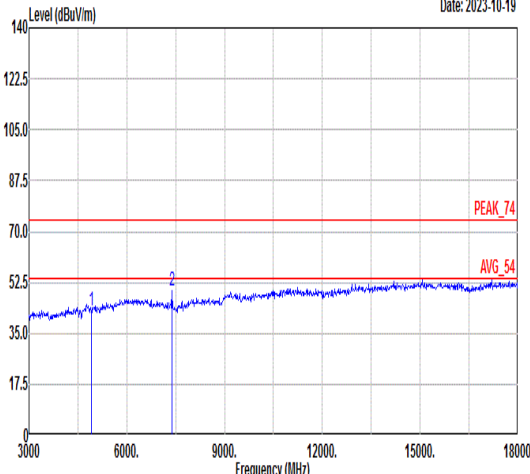
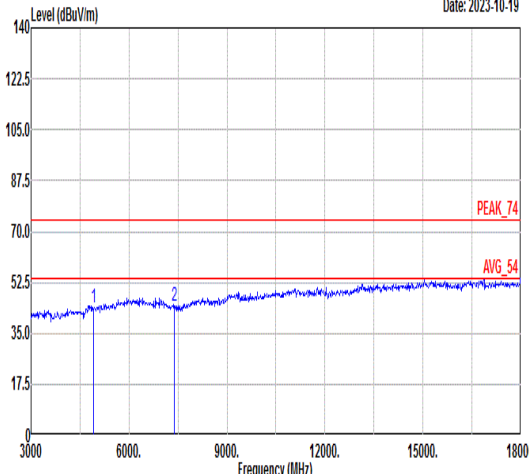


Mode	3																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																											
ANT	SISO																																																																																																											
Pol.	Horizontal					Vertical																																																																																																						
Peak Avg																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.58</td><td>74.00</td><td>-31.42</td><td>62.75</td><td>36.15</td><td>8.57</td><td>64.89</td><td>---</td><td>--- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>49.45</td><td>74.00</td><td>-24.55</td><td>68.08</td><td>36.05</td><td>10.18</td><td>64.86</td><td>---</td><td>--- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	4924.00	42.58	74.00	-31.42	62.75	36.15	8.57	64.89	---	--- Peak	2	7386.00	49.45	74.00	-24.55	68.08	36.05	10.18	64.86	---	--- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>63.96</td><td>36.15</td><td>8.57</td><td>64.89</td><td>---</td><td>--- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>62.97</td><td>36.05</td><td>10.18</td><td>64.86</td><td>---</td><td>--- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	4924.00	43.79	74.00	-30.21	63.96	36.15	8.57	64.89	---	--- Peak	2	7386.00	44.34	74.00	-29.66	62.97	36.05	10.18	64.86	---	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	4924.00	42.58	74.00	-31.42	62.75	36.15	8.57	64.89	---	--- Peak																																																																																																		
2	7386.00	49.45	74.00	-24.55	68.08	36.05	10.18	64.86	---	--- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	4924.00	43.79	74.00	-30.21	63.96	36.15	8.57	64.89	---	--- Peak																																																																																																		
2	7386.00	44.34	74.00	-29.66	62.97	36.05	10.18	64.86	---	--- Peak																																																																																																		

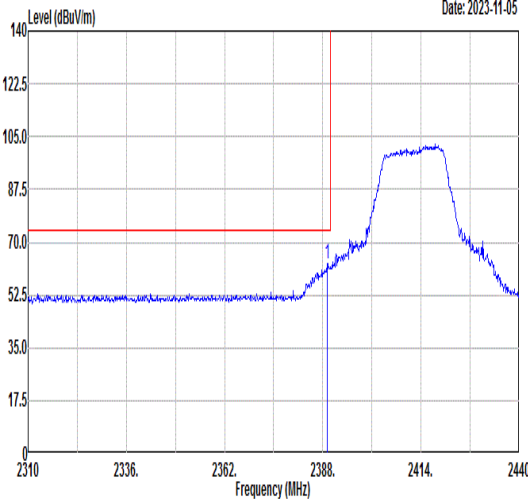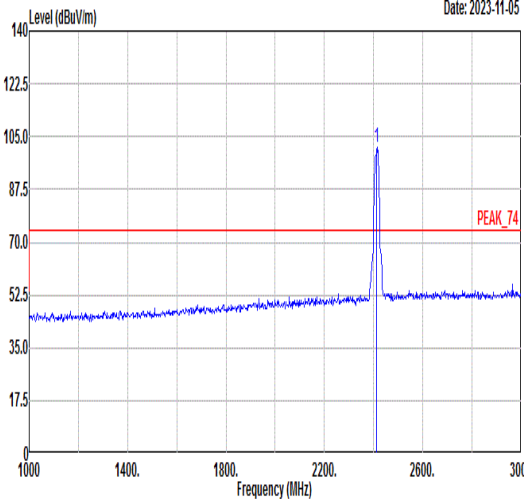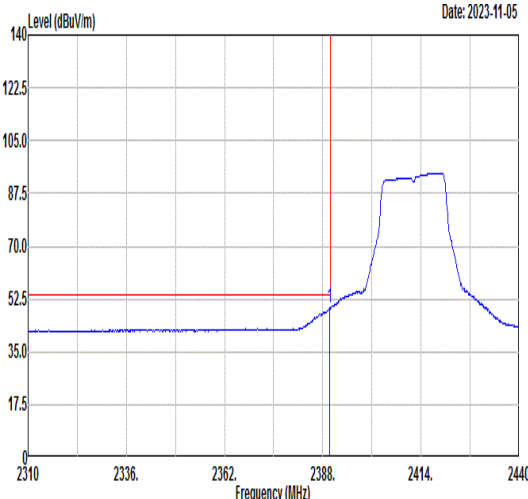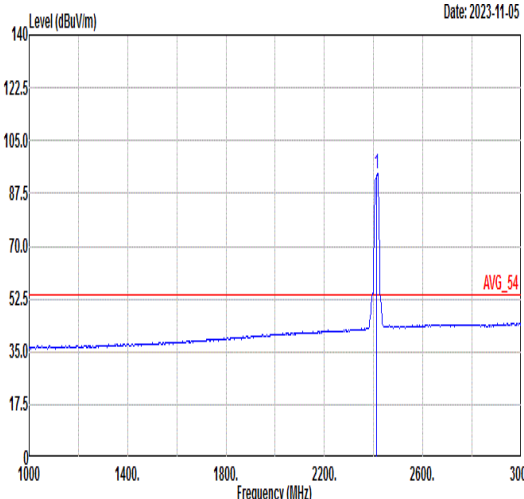

Mode	4																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>63.08</td><td>74.00</td><td>-10.92</td><td>57.67</td><td>33.31</td><td>5.36</td><td>33.26</td><td>227</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.17	63.08	74.00	-10.92	57.67	33.31	5.36	33.26	227	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.20</td><td>-----</td><td>-----</td><td>95.66</td><td>33.38</td><td>5.38</td><td>33.22</td><td>227</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	101.20	-----	-----	95.66	33.38	5.38	33.22	227	360
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.17	63.08	74.00	-10.92	57.67	33.31	5.36	33.26	227	360	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	101.20	-----	-----	95.66	33.38	5.38	33.22	227	360	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>49.43</td><td>54.00</td><td>-4.57</td><td>44.01</td><td>33.31</td><td>5.36</td><td>33.25</td><td>227</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	49.43	54.00	-4.57	44.01	33.31	5.36	33.25	227	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>94.07</td><td>-----</td><td>-----</td><td>88.50</td><td>33.39</td><td>5.39</td><td>33.21</td><td>227</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	94.07	-----	-----	88.50	33.39	5.39	33.21	227	360
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.82	49.43	54.00	-4.57	44.01	33.31	5.36	33.25	227	360	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2412.00	94.07	-----	-----	88.50	33.39	5.39	33.21	227	360	AVERAGE																																																																																

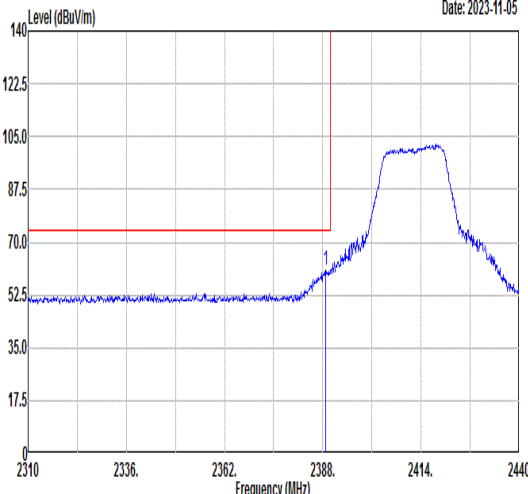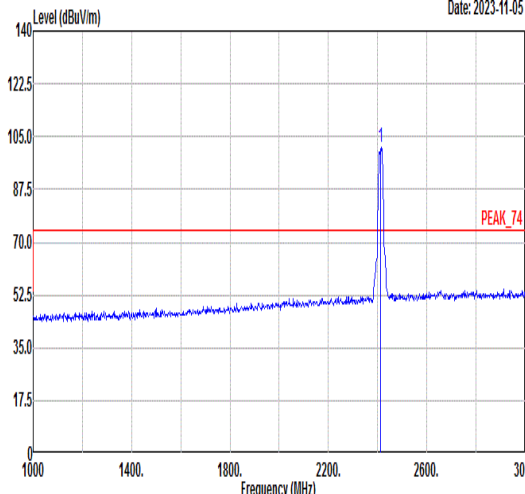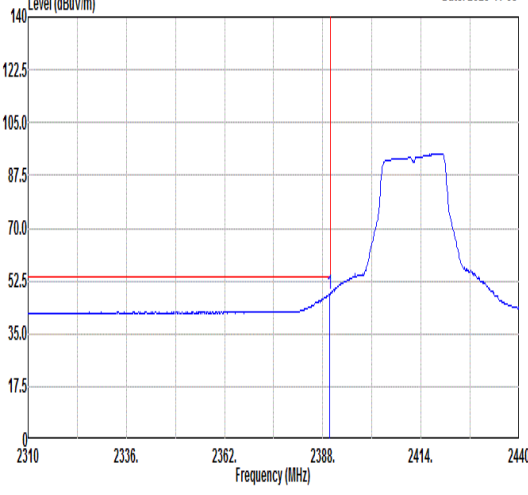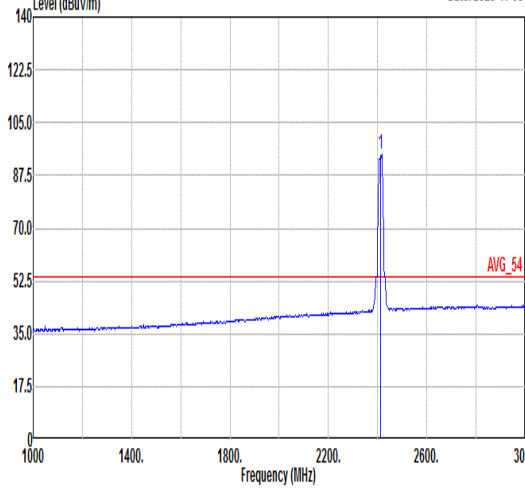

Mode	4																																																																																						
	Band Edge																																																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																																																						
ANT	SISO																																																																																						
Pol.	Vertical					Fundamental																																																																																	
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.78</td><td>60.73</td><td>74.00</td><td>-13.27</td><td>55.32</td><td>33.31</td><td>5.36</td><td>33.26</td><td>400</td><td>251 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.78	60.73	74.00	-13.27	55.32	33.31	5.36	33.26	400	251 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.50</td><td>-----</td><td>-----</td><td>95.96</td><td>33.38</td><td>5.38</td><td>33.22</td><td>400</td><td>251 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	101.50	-----	-----	95.96	33.38	5.38	33.22	400
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2388.78	60.73	74.00	-13.27	55.32	33.31	5.36	33.26	400	251 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2412.00	101.50	-----	-----	95.96	33.38	5.38	33.22	400	251 PEAK																																																																													
Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>48.11</td><td>54.00</td><td>-5.89</td><td>42.69</td><td>33.31</td><td>5.36</td><td>33.25</td><td>400</td><td>251 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	48.11	54.00	-5.89	42.69	33.31	5.36	33.25	400	251 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>94.53</td><td>-----</td><td>-----</td><td>88.96</td><td>33.39</td><td>5.39</td><td>33.21</td><td>400</td><td>251 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	94.53	-----	-----	88.96	33.39	5.39	33.21	400
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2389.82	48.11	54.00	-5.89	42.69	33.31	5.36	33.25	400	251 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	2412.00	94.53	-----	-----	88.96	33.39	5.39	33.21	400	251 AVERAGE																																																																													







Mode	4																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11g_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Vertical																																																																																					
Peak Avg	Level (dBuV/m) Date: 2023-10-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.70</td><td>74.00</td><td>-29.30</td><td>64.58</td><td>36.09</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	44.70	74.00	-29.30	64.58	36.09	8.88	64.85	---	---	Peak	Level (dBuV/m) Date: 2023-10-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.46</td><td>74.00</td><td>-29.54</td><td>64.34</td><td>36.09</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	44.46	74.00	-29.54	64.34	36.09	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4824.00	44.70	74.00	-29.30	64.58	36.09	8.88	64.85	---	---	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	4824.00	44.46	74.00	-29.54	64.34	36.09	8.88	64.85	---	---	Peak																																																																																	



Mode	5																																																																																					
	Harmonic																																																																																					
	2400-2483.5_802.11g_CH06_2437MHz																																																																																					
ANT	SISO																																																																																					
Pol.	Horizontal					Vertical																																																																																
Peak Avg																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>42.83</td><td>74.00</td><td>-31.17</td><td>62.86</td><td>36.12</td><td>8.72</td><td>64.87</td><td>--- --- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.21</td><td>74.00</td><td>-29.79</td><td>62.67</td><td>36.22</td><td>10.18</td><td>64.86</td><td>--- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4874.00	42.83	74.00	-31.17	62.86	36.12	8.72	64.87	--- --- Peak	2	7311.00	44.21	74.00	-29.79	62.67	36.22	10.18	64.86	--- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>44.04</td><td>74.00</td><td>-29.96</td><td>64.07</td><td>36.12</td><td>8.72</td><td>64.87</td><td>--- --- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.67</td><td>74.00</td><td>-30.33</td><td>62.13</td><td>36.22</td><td>10.18</td><td>64.86</td><td>--- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4874.00	44.04	74.00	-29.96	64.07	36.12	8.72	64.87	--- --- Peak	2	7311.00	43.67	74.00	-30.33	62.13	36.22	10.18	64.86	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
1	4874.00	42.83	74.00	-31.17	62.86	36.12	8.72	64.87	--- --- Peak																																																																													
2	7311.00	44.21	74.00	-29.79	62.67	36.22	10.18	64.86	--- --- Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
1	4874.00	44.04	74.00	-29.96	64.07	36.12	8.72	64.87	--- --- Peak																																																																													
2	7311.00	43.67	74.00	-30.33	62.13	36.22	10.18	64.86	--- --- Peak																																																																													

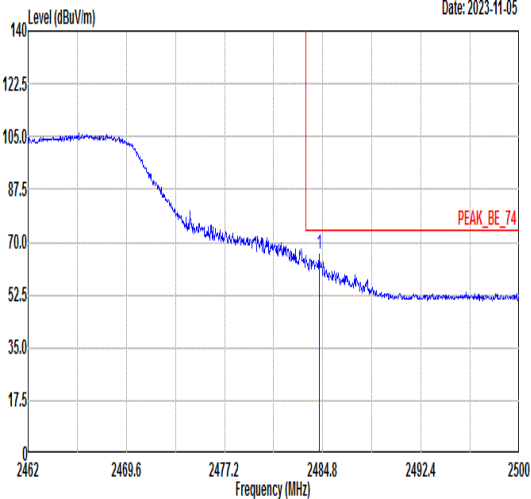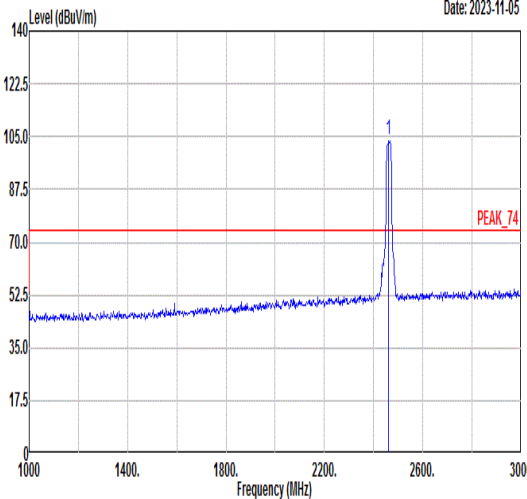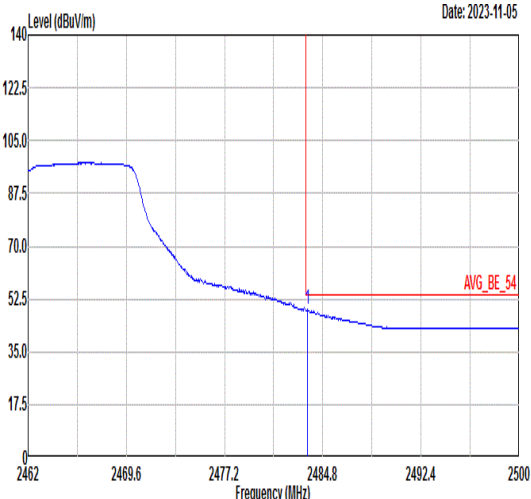
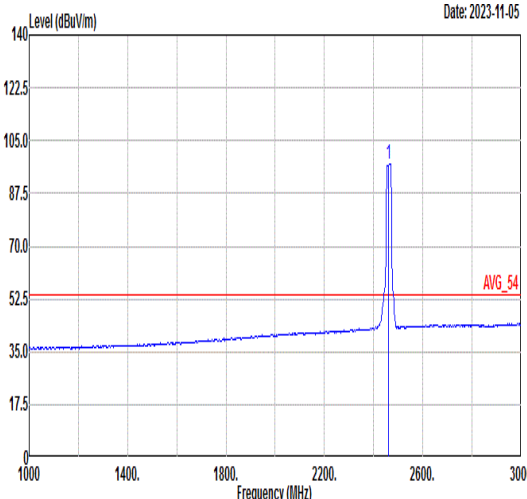


Mode	6																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2462 MHz, decreasing to about 70 dBuV/m at 2484.8 MHz, and then leveling off. A red line indicates the limit at 74.00 dBuV/m. A peak is marked at 2484.53 MHz with a level of 65.89 dBuV/m. The date is 2023-11-05. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.53</td><td>65.89</td><td>74.00</td><td>-8.11</td><td>59.99</td><td>33.56</td><td>5.46</td><td>33.12</td><td>305</td><td>318</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.53	65.89	74.00	-8.11	59.99	33.56	5.46	33.12	305	318	PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2462 MHz, decreasing to about 70 dBuV/m at 2484.8 MHz, and then leveling off. A red line indicates the limit at 74.00 dBuV/m. A peak is marked at 2462.00 MHz with a level of 104.17 dBuV/m. The date is 2023-11-05. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.17</td><td>-----</td><td>-----</td><td>98.38</td><td>33.50</td><td>5.44</td><td>33.15</td><td>305</td><td>318</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	104.17	-----	-----	98.38	33.50	5.44	33.15	305	318	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2484.53	65.89	74.00	-8.11	59.99	33.56	5.46	33.12	305	318	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	104.17	-----	-----	98.38	33.50	5.44	33.15	305	318	PEAK																																																																																	
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2462 MHz, decreasing to about 70 dBuV/m at 2484.8 MHz, and then leveling off. A red line indicates the limit at 54.00 dBuV/m. An average is marked at 2483.62 MHz with a level of 48.99 dBuV/m. The date is 2023-11-05. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>48.99</td><td>54.00</td><td>-5.01</td><td>43.09</td><td>33.56</td><td>5.46</td><td>33.12</td><td>305</td><td>318</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.62	48.99	54.00	-5.01	43.09	33.56	5.46	33.12	305	318	AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 2462 MHz, decreasing to about 70 dBuV/m at 2484.8 MHz, and then leveling off. A red line indicates the limit at 54.00 dBuV/m. An average is marked at 2462.00 MHz with a level of 97.38 dBuV/m. The date is 2023-11-05. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.38</td><td>-----</td><td>-----</td><td>91.58</td><td>33.51</td><td>5.44</td><td>33.15</td><td>305</td><td>318</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	97.38	-----	-----	91.58	33.51	5.44	33.15	305	318	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2483.62	48.99	54.00	-5.01	43.09	33.56	5.46	33.12	305	318	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2462.00	97.38	-----	-----	91.58	33.51	5.44	33.15	305	318	AVERAGE																																																																																	



Mode	6																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Vertical					Fundamental																																																																																		
Peak	Date: 2023-11-05 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 Frequency (MHz) 2462 2469.6 2477.2 2484.8 2492.4 2500 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>65.08</td><td>74.00</td><td>-8.92</td><td>59.18</td><td>33.56</td><td>5.46</td><td>33.12</td><td>295</td><td>240 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.55	65.08	74.00	-8.92	59.18	33.56	5.46	33.12	295	240 PEAK	Date: 2023-11-05 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 Frequency (MHz) 1000 1400 1800 2200 2600 3000 PEAK_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.08</td><td>-----</td><td>-----</td><td>96.26</td><td>33.52</td><td>5.44</td><td>33.14</td><td>295</td><td>240 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	102.08	-----	-----	96.26	33.52	5.44	33.14	295	240 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2483.55	65.08	74.00	-8.92	59.18	33.56	5.46	33.12	295	240 PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2462.00	102.08	-----	-----	96.26	33.52	5.44	33.14	295	240 PEAK																																																																														
Avg	Date: 2023-11-05 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 Frequency (MHz) 2462 2469.6 2477.2 2484.8 2492.4 2500 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>48.17</td><td>54.00</td><td>-5.83</td><td>42.27</td><td>33.56</td><td>5.46</td><td>33.12</td><td>295</td><td>240 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.55	48.17	54.00	-5.83	42.27	33.56	5.46	33.12	295	240 AVERAGE	Date: 2023-11-05 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 Frequency (MHz) 1000 1400 1800 2200 2600 3000 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.08</td><td>-----</td><td>-----</td><td>89.28</td><td>33.51</td><td>5.44</td><td>33.15</td><td>295</td><td>240 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	95.08	-----	-----	89.28	33.51	5.44	33.15	295	240 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2483.55	48.17	54.00	-5.83	42.27	33.56	5.46	33.12	295	240 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2462.00	95.08	-----	-----	89.28	33.51	5.44	33.15	295	240 AVERAGE																																																																														



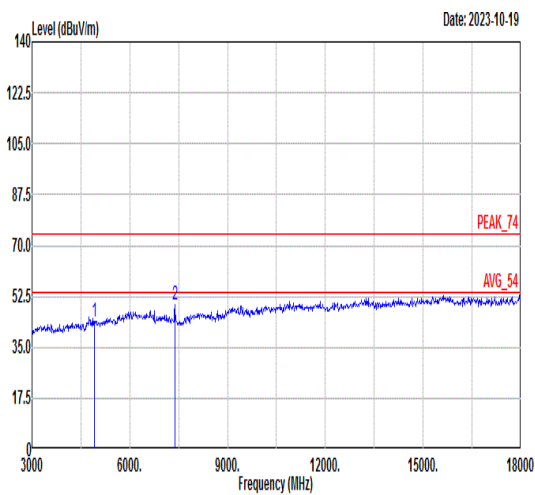
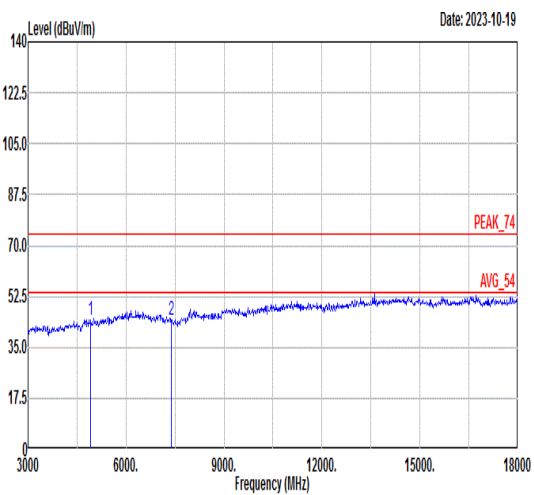


Mode	6																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal					Vertical																																																																												
Peak Avg																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.04</td><td>74.00</td><td>-29.96</td><td>64.21</td><td>36.15</td><td>8.57</td><td>64.89 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>68.37</td><td>36.05</td><td>10.18</td><td>64.86 --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4924.00	44.04	74.00	-29.96	64.21	36.15	8.57	64.89 --- Peak	2	7386.00	49.74	74.00	-24.26	68.37	36.05	10.18	64.86 --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.35</td><td>74.00</td><td>-29.65</td><td>64.52</td><td>36.15</td><td>8.57</td><td>64.89 --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.43</td><td>74.00</td><td>-29.57</td><td>63.06</td><td>36.05</td><td>10.18</td><td>64.86 --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4924.00	44.35	74.00	-29.65	64.52	36.15	8.57	64.89 --- Peak	2	7386.00	44.43	74.00	-29.57	63.06	36.05	10.18	64.86 --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
1	4924.00	44.04	74.00	-29.96	64.21	36.15	8.57	64.89 --- Peak																																																																										
2	7386.00	49.74	74.00	-24.26	68.37	36.05	10.18	64.86 --- Peak																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
1	4924.00	44.35	74.00	-29.65	64.52	36.15	8.57	64.89 --- Peak																																																																										
2	7386.00	44.43	74.00	-29.57	63.06	36.05	10.18	64.86 --- Peak																																																																										





Mode	7																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2023-11-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.04</td><td>63.55</td><td>74.00</td><td>-10.45</td><td>58.14</td><td>33.31</td><td>5.36</td><td>33.26</td><td>376</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.04	63.55	74.00	-10.45	58.14	33.31	5.36	33.26	376	0 PEAK	Level (dBuV/m) Date: 2023-11-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.08</td><td>-----</td><td>-----</td><td>95.58</td><td>33.36</td><td>5.37</td><td>33.23</td><td>376</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	101.08	-----	-----	95.58	33.36	5.37	33.23	376	0 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2389.04	63.55	74.00	-10.45	58.14	33.31	5.36	33.26	376	0 PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2412.00	101.08	-----	-----	95.58	33.36	5.37	33.23	376	0 PEAK																																																																														
Avg	Level (dBuV/m) Date: 2023-11-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.46</td><td>54.00</td><td>-3.54</td><td>45.04</td><td>33.31</td><td>5.36</td><td>33.25</td><td>376</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	50.46	54.00	-3.54	45.04	33.31	5.36	33.25	376	0 AVERAGE	Level (dBuV/m) Date: 2023-11-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.76</td><td>-----</td><td>-----</td><td>88.19</td><td>33.39</td><td>5.39</td><td>33.21</td><td>376</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	93.76	-----	-----	88.19	33.39	5.39	33.21	376	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2389.95	50.46	54.00	-3.54	45.04	33.31	5.36	33.25	376	0 AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	2412.00	93.76	-----	-----	88.19	33.39	5.39	33.21	376	0 AVERAGE																																																																														

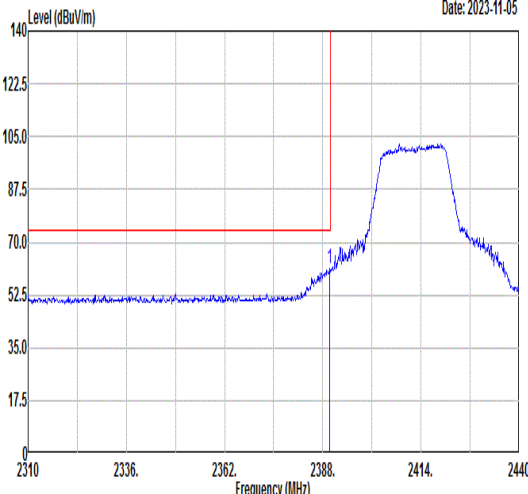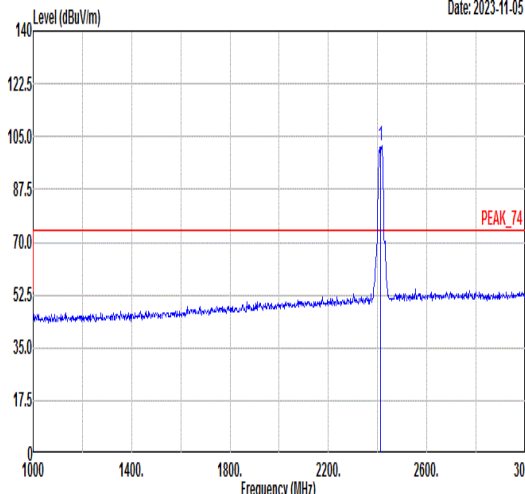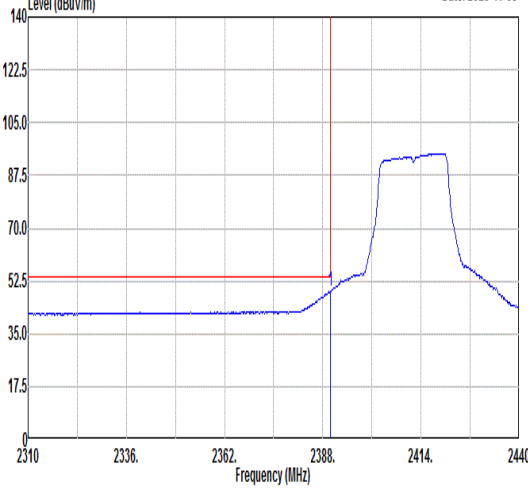
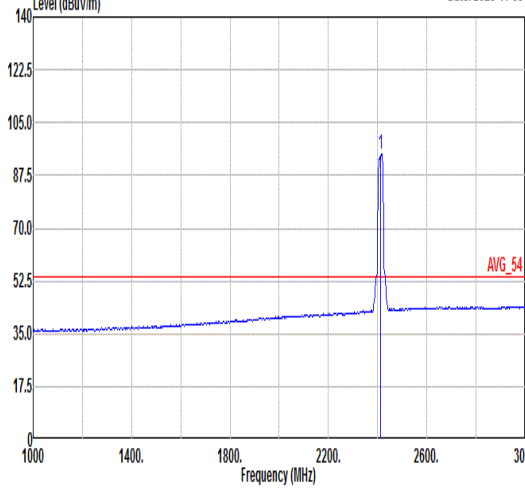


Mode	7																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 Date: 2023-11-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>61.17</td><td>74.00</td><td>-12.83</td><td>55.75</td><td>33.31</td><td>5.36</td><td>33.25</td><td>400</td><td>251</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	61.17	74.00	-12.83	55.75	33.31	5.36	33.25	400	251	PEAK	 Date: 2023-11-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.04</td><td>-----</td><td>-----</td><td>96.47</td><td>33.39</td><td>5.39</td><td>33.21</td><td>400</td><td>251</td><td>PEAK_74</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	102.04	-----	-----	96.47	33.39	5.39	33.21	400	251	PEAK_74
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2389.82	61.17	74.00	-12.83	55.75	33.31	5.36	33.25	400	251	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2412.00	102.04	-----	-----	96.47	33.39	5.39	33.21	400	251	PEAK_74																																																																																	
Avg	 Date: 2023-11-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>48.96</td><td>54.00</td><td>-5.04</td><td>43.54</td><td>33.31</td><td>5.36</td><td>33.25</td><td>400</td><td>251</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	48.96	54.00	-5.04	43.54	33.31	5.36	33.25	400	251	AVERAGE	 Date: 2023-11-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.65</td><td>-----</td><td>-----</td><td>89.08</td><td>33.39</td><td>5.39</td><td>33.21</td><td>400</td><td>251</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	94.65	-----	-----	89.08	33.39	5.39	33.21	400	251	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2389.95	48.96	54.00	-5.04	43.54	33.31	5.36	33.25	400	251	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2412.00	94.65	-----	-----	89.08	33.39	5.39	33.21	400	251	AVERAGE																																																																																	



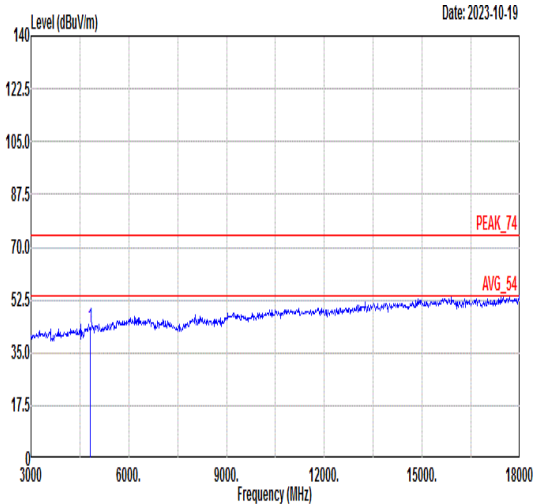
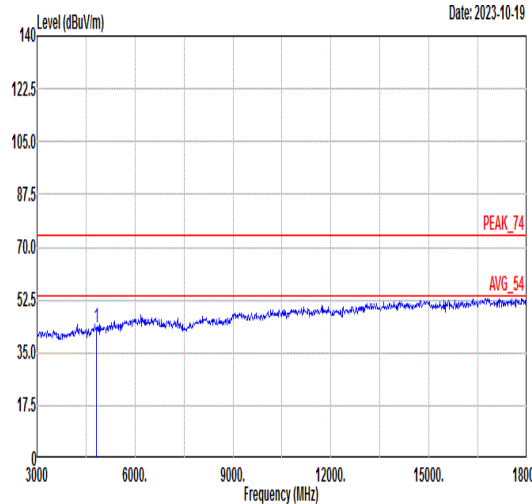


Mode	7																																																					
	Harmonic																																																					
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																					
ANT	SISO																																																					
Pol.	Horizontal						Vertical																																															
Peak Avg																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.29</td><td>74.00</td><td>-30.71</td><td>63.17</td><td>36.09</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.29	74.00	-30.71	63.17	36.09	8.88	64.85	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	4824.00	43.29	74.00	-30.71	63.17	36.09	8.88	64.85	---	---	Peak																																											
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>43.36</td><td>74.00</td><td>-30.64</td><td>63.24</td><td>36.09</td><td>8.88</td><td>64.85</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.36	74.00	-30.64	63.24	36.09	8.88	64.85	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	4824.00	43.36	74.00	-30.64	63.24	36.09	8.88	64.85	---	---	Peak																																											

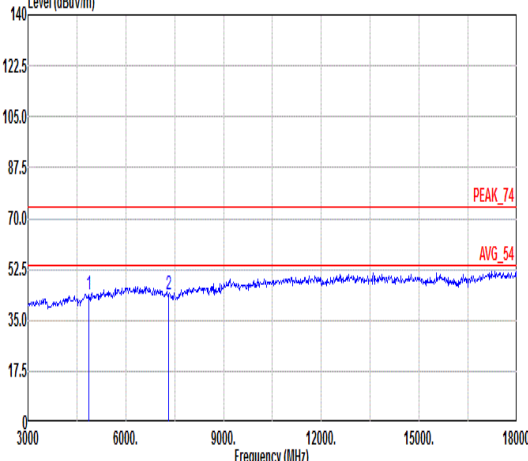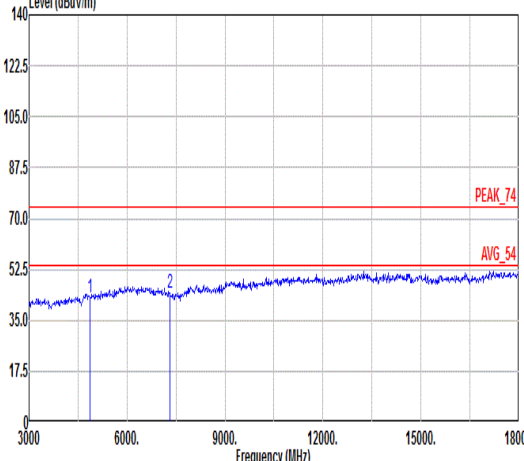

Mode	8																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																															
ANT	SISO																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2023-10-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>43.84</td><td>74.00</td><td>-30.16</td><td>63.87</td><td>36.12</td><td>8.72</td></tr><tr><td>2</td><td>7311.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>62.46</td><td>36.22</td><td>10.18</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4874.00	43.84	74.00	-30.16	63.87	36.12	8.72	2	7311.00	44.00	74.00	-30.00	62.46	36.22	10.18	Level (dBuV/m) Date: 2023-10-19 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>63.02</td><td>36.12</td><td>8.72</td></tr><tr><td>2</td><td>7311.00</td><td>44.38</td><td>74.00</td><td>-29.62</td><td>62.84</td><td>36.22</td><td>10.18</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4874.00	42.99	74.00	-31.01	63.02	36.12	8.72	2	7311.00	44.38	74.00	-29.62	62.84	36.22	10.18
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4874.00	43.84	74.00	-30.16	63.87	36.12	8.72																																																																																									
2	7311.00	44.00	74.00	-30.00	62.46	36.22	10.18																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4874.00	42.99	74.00	-31.01	63.02	36.12	8.72																																																																																									
2	7311.00	44.38	74.00	-29.62	62.84	36.22	10.18																																																																																									

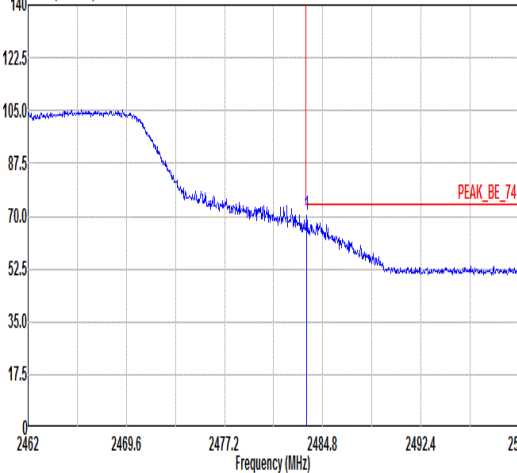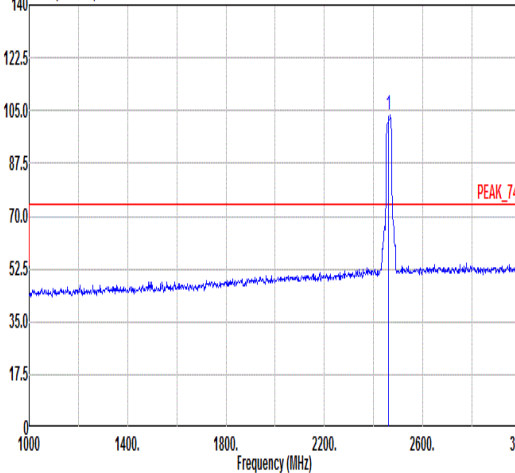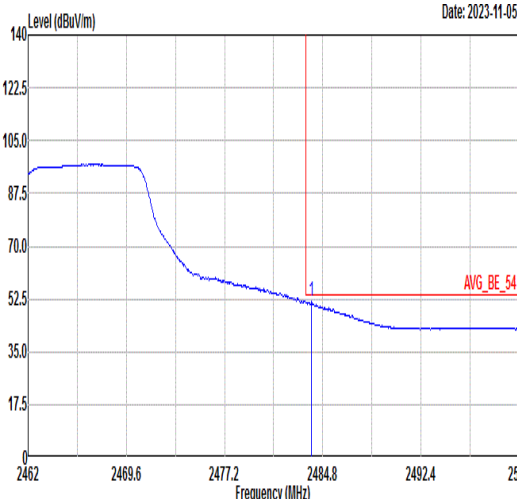
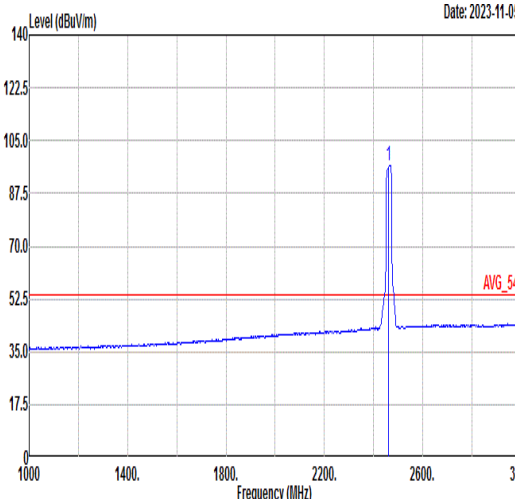


Mode	9																																																																																					
	Band Edge																																																																																					
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																					
ANT	SISO																																																																																					
Pol.	Horizontal					Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2023-11-05  PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>70.47</td><td>74.00</td><td>-3.53</td><td>64.57</td><td>33.56</td><td>5.46</td><td>33.12</td><td>300 321 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.55	70.47	74.00	-3.53	64.57	33.56	5.46	33.12	300 321 PEAK	Level (dBuV/m) Date: 2023-11-05  PEAK_74 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.35</td><td>-----</td><td>-----</td><td>97.53</td><td>33.52</td><td>5.44</td><td>33.14</td><td>300 321 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	103.35	-----	-----	97.53	33.52	5.44	33.14	300 321 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2483.55	70.47	74.00	-3.53	64.57	33.56	5.46	33.12	300 321 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2462.00	103.35	-----	-----	97.53	33.52	5.44	33.14	300 321 PEAK																																																																													
Avg	Level (dBuV/m) Date: 2023-11-05  AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.93</td><td>51.78</td><td>54.00</td><td>-2.22</td><td>45.88</td><td>33.56</td><td>5.46</td><td>33.12</td><td>300 321 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.93	51.78	54.00	-2.22	45.88	33.56	5.46	33.12	300 321 AVERAGE	Level (dBuV/m) Date: 2023-11-05  AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>96.91</td><td>-----</td><td>-----</td><td>91.09</td><td>33.52</td><td>5.44</td><td>33.14</td><td>300 321 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	96.91	-----	-----	91.09	33.52	5.44	33.14	300 321 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2483.93	51.78	54.00	-2.22	45.88	33.56	5.46	33.12	300 321 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	2462.00	96.91	-----	-----	91.09	33.52	5.44	33.14	300 321 AVERAGE																																																																													





Mode	9																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2023-11-05 PEAK_BE_74						Level (dBuV/m) Date: 2023-11-05 PEAK_74																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.53</td><td>66.99</td><td>74.00</td><td>-7.01</td><td>61.09</td><td>33.56</td><td>5.46</td><td>33.12</td><td>330</td><td>239</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.53	66.99	74.00	-7.01	61.09	33.56	5.46	33.12	330	239	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.50</td><td>-----</td><td>-----</td><td>93.68</td><td>33.52</td><td>5.44</td><td>33.14</td><td>330</td><td>239</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	99.50	-----	-----	93.68	33.52	5.44	33.14	330	239
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2484.53	66.99	74.00	-7.01	61.09	33.56	5.46	33.12	330	239	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2462.00	99.50	-----	-----	93.68	33.52	5.44	33.14	330	239	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2023-11-05 AVG_BE_54						Level (dBuV/m) Date: 2023-11-05 AVG_54																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>49.73</td><td>54.00</td><td>-4.27</td><td>43.83</td><td>33.56</td><td>5.46</td><td>33.12</td><td>330</td><td>239</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.58	49.73	54.00	-4.27	43.83	33.56	5.46	33.12	330	239	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.50</td><td>-----</td><td>-----</td><td>86.70</td><td>33.51</td><td>5.44</td><td>33.15</td><td>330</td><td>239</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	92.50	-----	-----	86.70	33.51	5.44	33.15	330	239
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2483.58	49.73	54.00	-4.27	43.83	33.56	5.46	33.12	330	239	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2462.00	92.50	-----	-----	86.70	33.51	5.44	33.15	330	239	AVERAGE																																																																																

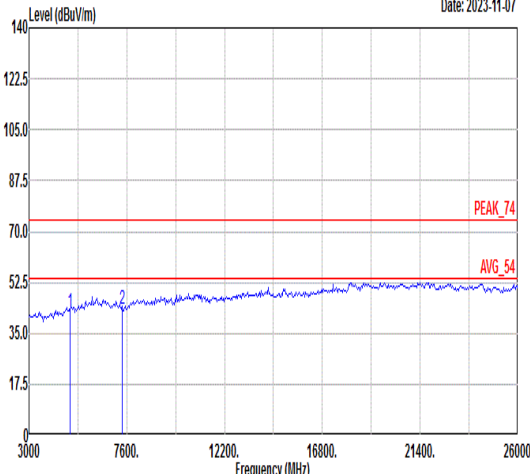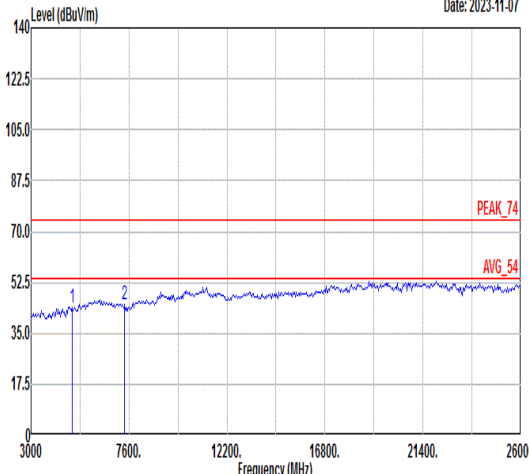

Mode	9																																																																																					
	Harmonic																																																																																					
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																					
ANT	SISO																																																																																					
Pol.	Horizontal					Vertical																																																																																
Peak Avg																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>42.31</td><td>74.00</td><td>-31.69</td><td>62.48</td><td>36.15</td><td>8.57</td><td>64.89</td><td>--- --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.33</td><td>74.00</td><td>-30.67</td><td>61.96</td><td>36.05</td><td>10.18</td><td>64.86</td><td>--- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4924.00	42.31	74.00	-31.69	62.48	36.15	8.57	64.89	--- --- Peak	2	7386.00	43.33	74.00	-30.67	61.96	36.05	10.18	64.86	--- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.68</td><td>74.00</td><td>-30.32</td><td>63.85</td><td>36.15</td><td>8.57</td><td>64.89</td><td>--- --- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.16</td><td>74.00</td><td>-28.84</td><td>63.79</td><td>36.05</td><td>10.18</td><td>64.86</td><td>--- --- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	4924.00	43.68	74.00	-30.32	63.85	36.15	8.57	64.89	--- --- Peak	2	7386.00	45.16	74.00	-28.84	63.79	36.05	10.18	64.86	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
1	4924.00	42.31	74.00	-31.69	62.48	36.15	8.57	64.89	--- --- Peak																																																																													
2	7386.00	43.33	74.00	-30.67	61.96	36.05	10.18	64.86	--- --- Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
1	4924.00	43.68	74.00	-30.32	63.85	36.15	8.57	64.89	--- --- Peak																																																																													
2	7386.00	45.16	74.00	-28.84	63.79	36.05	10.18	64.86	--- --- Peak																																																																													

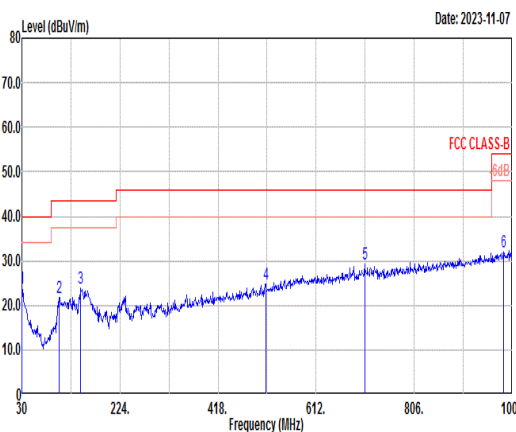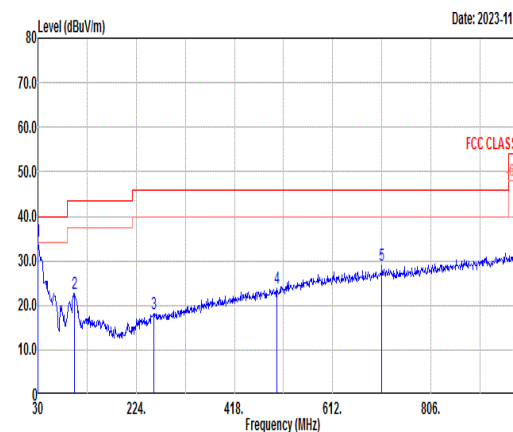

Mode	10																																																																																																																																																																																									
	LF																																																																																																																																																																																									
	2400-2483.5_802.11n_HT20_LF_CH11_2462MHz																																																																																																																																																																																									
ANT	SISO																																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																																			
QPI/ Peak																																																																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>30.00</td><td>23.92</td><td>40.00</td><td>-16.08</td><td>29.79</td><td>25.20</td><td>0.53</td><td>31.60</td><td>--- --- Peak</td></tr><tr><td>2</td><td>103.72</td><td>21.74</td><td>43.50</td><td>-21.76</td><td>35.99</td><td>16.60</td><td>1.04</td><td>31.89</td><td>--- --- Peak</td></tr><tr><td>3</td><td>146.40</td><td>23.84</td><td>43.50</td><td>-19.66</td><td>37.01</td><td>17.30</td><td>1.24</td><td>31.71</td><td>--- --- Peak</td></tr><tr><td>4</td><td>512.09</td><td>24.72</td><td>46.00</td><td>-21.28</td><td>29.61</td><td>24.10</td><td>2.36</td><td>31.35</td><td>--- --- Peak</td></tr><tr><td>5</td><td>708.03</td><td>29.31</td><td>46.00</td><td>-16.69</td><td>31.02</td><td>26.72</td><td>2.77</td><td>31.20</td><td>--- --- Peak</td></tr><tr><td>6</td><td>982.54</td><td>31.92</td><td>54.00</td><td>-22.08</td><td>28.61</td><td>30.90</td><td>3.28</td><td>30.87</td><td>--- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	30.00	23.92	40.00	-16.08	29.79	25.20	0.53	31.60	--- --- Peak	2	103.72	21.74	43.50	-21.76	35.99	16.60	1.04	31.89	--- --- Peak	3	146.40	23.84	43.50	-19.66	37.01	17.30	1.24	31.71	--- --- Peak	4	512.09	24.72	46.00	-21.28	29.61	24.10	2.36	31.35	--- --- Peak	5	708.03	29.31	46.00	-16.69	31.02	26.72	2.77	31.20	--- --- Peak	6	982.54	31.92	54.00	-22.08	28.61	30.90	3.28	30.87	--- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>30.00</td><td>34.45</td><td>40.00</td><td>-5.55</td><td>40.32</td><td>25.20</td><td>0.53</td><td>31.60</td><td>--- --- Peak</td></tr><tr><td>2</td><td>102.75</td><td>22.70</td><td>43.50</td><td>-20.80</td><td>37.16</td><td>16.40</td><td>1.03</td><td>31.89</td><td>--- --- Peak</td></tr><tr><td>3</td><td>258.92</td><td>18.14</td><td>46.00</td><td>-27.86</td><td>28.52</td><td>19.52</td><td>1.68</td><td>31.58</td><td>--- --- Peak</td></tr><tr><td>4</td><td>501.42</td><td>23.90</td><td>46.00</td><td>-22.10</td><td>29.04</td><td>23.92</td><td>2.33</td><td>31.39</td><td>--- --- Peak</td></tr><tr><td>5</td><td>709.00</td><td>28.92</td><td>46.00</td><td>-17.08</td><td>30.58</td><td>26.76</td><td>2.78</td><td>31.20</td><td>--- --- Peak</td></tr><tr><td>6</td><td>979.63</td><td>31.97</td><td>54.00</td><td>-22.03</td><td>28.55</td><td>31.00</td><td>3.28</td><td>30.86</td><td>--- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	30.00	34.45	40.00	-5.55	40.32	25.20	0.53	31.60	--- --- Peak	2	102.75	22.70	43.50	-20.80	37.16	16.40	1.03	31.89	--- --- Peak	3	258.92	18.14	46.00	-27.86	28.52	19.52	1.68	31.58	--- --- Peak	4	501.42	23.90	46.00	-22.10	29.04	23.92	2.33	31.39	--- --- Peak	5	709.00	28.92	46.00	-17.08	30.58	26.76	2.78	31.20	--- --- Peak	6	979.63	31.97	54.00	-22.03	28.55	31.00	3.28	30.86	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																		
	1	30.00	23.92	40.00	-16.08	29.79	25.20	0.53	31.60	--- --- Peak																																																																																																																																																																																
	2	103.72	21.74	43.50	-21.76	35.99	16.60	1.04	31.89	--- --- Peak																																																																																																																																																																																
	3	146.40	23.84	43.50	-19.66	37.01	17.30	1.24	31.71	--- --- Peak																																																																																																																																																																																
	4	512.09	24.72	46.00	-21.28	29.61	24.10	2.36	31.35	--- --- Peak																																																																																																																																																																																
	5	708.03	29.31	46.00	-16.69	31.02	26.72	2.77	31.20	--- --- Peak																																																																																																																																																																																
6	982.54	31.92	54.00	-22.08	28.61	30.90	3.28	30.87	--- --- Peak																																																																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																			
1	30.00	34.45	40.00	-5.55	40.32	25.20	0.53	31.60	--- --- Peak																																																																																																																																																																																	
2	102.75	22.70	43.50	-20.80	37.16	16.40	1.03	31.89	--- --- Peak																																																																																																																																																																																	
3	258.92	18.14	46.00	-27.86	28.52	19.52	1.68	31.58	--- --- Peak																																																																																																																																																																																	
4	501.42	23.90	46.00	-22.10	29.04	23.92	2.33	31.39	--- --- Peak																																																																																																																																																																																	
5	709.00	28.92	46.00	-17.08	30.58	26.76	2.78	31.20	--- --- Peak																																																																																																																																																																																	
6	979.63	31.97	54.00	-22.03	28.55	31.00	3.28	30.86	--- --- Peak																																																																																																																																																																																	



<Simultaneous transmission>

11n HT20_CH11 + LTE B13 Link (Band Edge @ 3m)




WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location	*	2462	104.7	-	-	99.68	33.5	5.41	33.89	129	171	P	H
	*	2462	96.95	-	-	91.93	33.5	5.41	33.89	129	171	A	H
		2483.96	66.51	-7.49	74	61.39	33.56	5.46	33.9	129	171	P	H
		2483.68	50.29	-3.71	54	45.17	33.56	5.46	33.9	129	171	A	H
	*	2462	102.68	-	-	97.66	33.5	5.41	33.89	166	192	P	V
	*	2462	94.79	-	-	89.77	33.5	5.41	33.89	166	192	A	V
		2483.64	66.05	-7.95	74	60.93	33.56	5.46	33.9	166	192	P	V
		2484.08	49	-5	54	43.88	33.56	5.46	33.9	166	192	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

11n HT20_CH11 + LTE B13 Link (Harmonic @ 3m)





WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location		4924	43.05	-30.95	74	63.26	36.15	8.53	64.89	-	-	P	H
		7386	43.14	-30.86	74	61.77	36.05	10.18	64.86	-	-	P	H
		4924	42.98	-31.02	74	63.19	36.15	8.53	64.89	-	-	P	V
		7386	43.19	-30.81	74	61.82	36.05	10.18	64.86	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



11n HT20_CH11+LTE B13 Link (Band Edge @ 3m



WIFI	2400-2483.5MHz Band Edge @ 3m	
ANT	11n HT20_CH11+LTE B13 Link Co-location	
	Horizontal	Fundamental
Peak	 Date: 3 Level (dBuV/m) Date: 2023-11-07  1 * 2483.96 66.51 -7.49 74.00 61.39 33.56 5.46 33.90 --- --- Peak	 Date: 1 Level (dBuV/m) Date: 2023-11-07  1 * 2470.00 104.70 30.70 74.00 99.61 33.52 5.46 33.89 --- --- Peak
	Avg.	 Date: 4 Level (dBuV/m) Date: 2023-11-07  1 2483.68 50.29 -3.71 54.00 45.17 33.56 5.46 33.90 --- --- Average

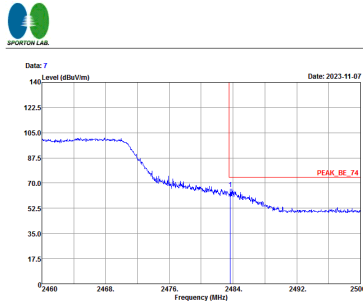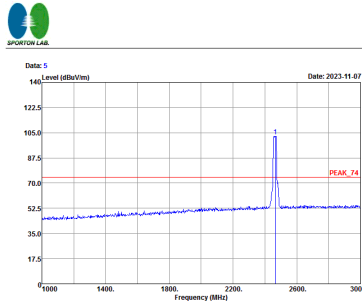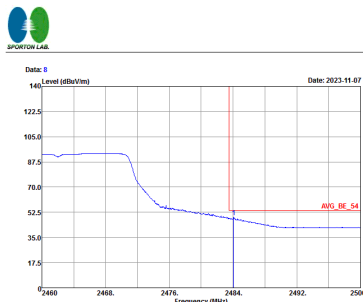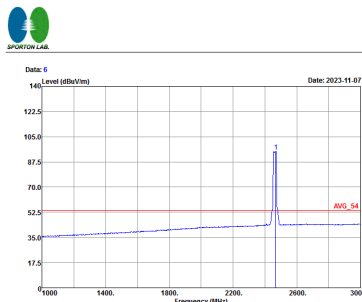

WIFI	2400-2483.5MHz Band Edge @ 3m																																																													
ANT	11n HT20_CH11+LTE B13 Link Co-location																																																													
	Vertical	Fundamental																																																												
Peak	 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2483.54</td><td>66.85</td><td>-7.95</td><td>74.00</td><td>60.93</td><td>33.56</td><td>5.46</td><td>33.90</td><td>---</td><td>Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 * 2483.54	66.85	-7.95	74.00	60.93	33.56	5.46	33.90	---	Peak	 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2466.00</td><td>102.68</td><td>28.68</td><td>74.00</td><td>97.60</td><td>33.51</td><td>5.46</td><td>33.89</td><td>---</td><td>Peak</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 * 2466.00	102.68	28.68	74.00	97.60	33.51	5.46	33.89	---	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 * 2483.54	66.85	-7.95	74.00	60.93	33.56	5.46	33.90	---	Peak																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 * 2466.00	102.68	28.68	74.00	97.60	33.51	5.46	33.89	---	Peak																																																					
Avg.	 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2484.08</td><td>49.00</td><td>-5.00</td><td>54.00</td><td>43.88</td><td>33.56</td><td>5.46</td><td>33.90</td><td>---</td><td>Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 * 2484.08	49.00	-5.00	54.00	43.88	33.56	5.46	33.90	---	Average	 <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 * 2468.00</td><td>94.79</td><td>40.79</td><td>54.00</td><td>89.70</td><td>33.52</td><td>5.46</td><td>33.89</td><td>---</td><td>Average</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1 * 2468.00	94.79	40.79	54.00	89.70	33.52	5.46	33.89	---	Average
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 * 2484.08	49.00	-5.00	54.00	43.88	33.56	5.46	33.90	---	Average																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1 * 2468.00	94.79	40.79	54.00	89.70	33.52	5.46	33.89	---	Average																																																					



11n HT20_CH11+LTE B13 Link (Harmonic @ 3m)

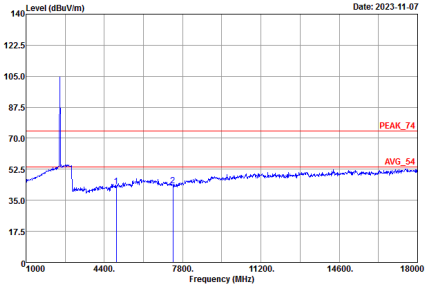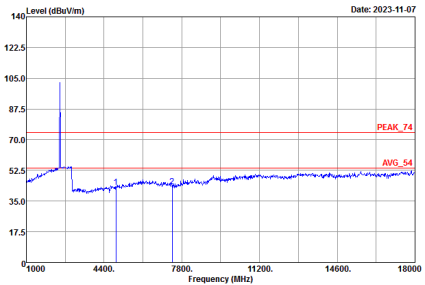
WIFI	2400-2483.5MHz Band Edge @ 3m																																																																																																	
ANT	11n HT20_CH11+LTE B13 Link Co-location																																																																																																	
	Horizontal					Vertical																																																																																												
Peak/ Avg.	 Data: 13 Level (dBuV/m)  Date: 2023-11-07 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.05</td><td>-30.95</td><td>74.00</td><td>63.26</td><td>36.15</td><td>8.53</td><td>64.89</td><td>---</td><td>Peak</td></tr><tr><td>2 *</td><td>7386.00</td><td>43.14</td><td>-30.86</td><td>74.00</td><td>61.77</td><td>36.05</td><td>10.18</td><td>64.86</td><td>---</td><td>Peak</td></tr></table>						Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4924.00	43.05	-30.95	74.00	63.26	36.15	8.53	64.89	---	Peak	2 *	7386.00	43.14	-30.86	74.00	61.77	36.05	10.18	64.86	---	Peak	 Data: 14 Level (dBuV/m)  Date: 2023-11-07 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.98</td><td>-31.02</td><td>74.00</td><td>63.19</td><td>36.15</td><td>8.53</td><td>64.89</td><td>---</td><td>Peak</td></tr><tr><td>2 *</td><td>7386.00</td><td>43.19</td><td>-30.81</td><td>74.00</td><td>61.82</td><td>36.05</td><td>10.18</td><td>64.86</td><td>---</td><td>Peak</td></tr></table>						Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	4924.00	42.98	-31.02	74.00	63.19	36.15	8.53	64.89	---	Peak	2 *	7386.00	43.19	-30.81	74.00	61.82	36.05	10.18	64.86	---	Peak
		Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																									
1	4924.00	43.05	-30.95	74.00	63.26	36.15	8.53	64.89	---	Peak																																																																																								
2 *	7386.00	43.14	-30.86	74.00	61.77	36.05	10.18	64.86	---	Peak																																																																																								
	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																									
1	4924.00	42.98	-31.02	74.00	63.19	36.15	8.53	64.89	---	Peak																																																																																								
2 *	7386.00	43.19	-30.81	74.00	61.82	36.05	10.18	64.86	---	Peak																																																																																								

Note: The highest signal over limit is WLAN fundamental signal.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.62	8.2	0.122	300Hz
802.11g	87.18	1.36	0.735	1KHz
802.11n HT20	86.39	1.27	0.787	1KHz

802.11b

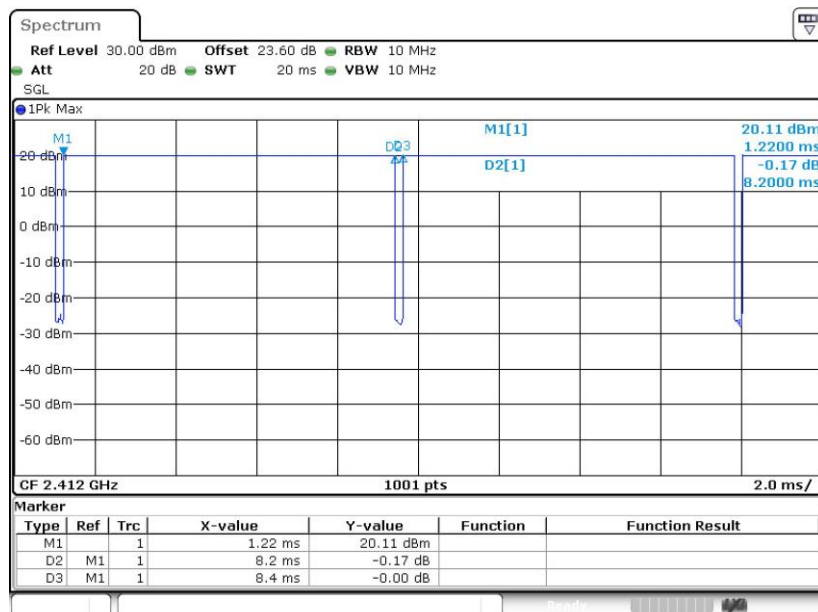



802.11g

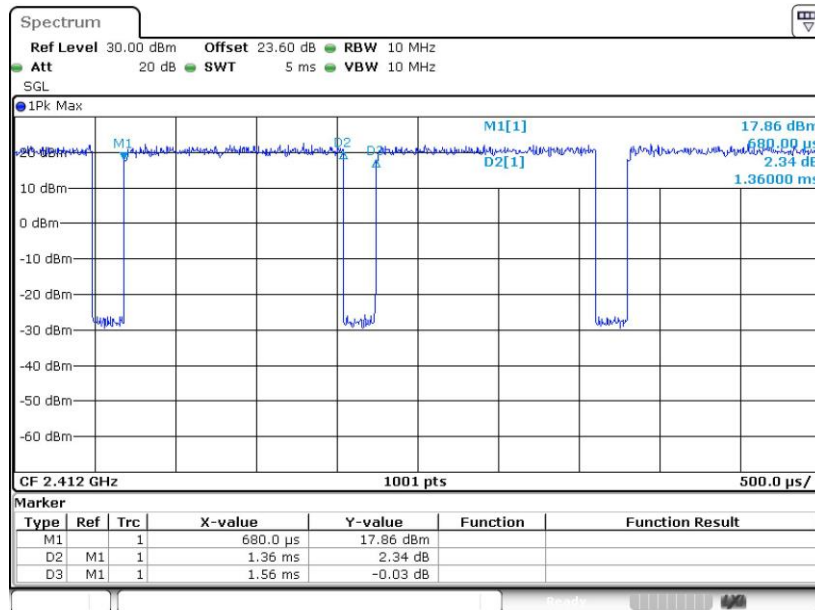

802.11n HT20

