

FCC 47 CFR PART 15 SUBPART C
CERTIFICATION TEST REPORT

For

Tablet

MODEL No.:xTablet T1270

FCC ID: O86T1270

Trade Mark: MobileDemand

REPORT NO:ES171226956W03

ISSUE DATE: May 17, 2018

Prepared for

MobileDemand, L.C.
1501 Boyson Sq Dr, Ste 101 Hiawatha, Iowa, United States

Prepared by

EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY.....	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES	7
5	FACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES.....	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1.....	10
7.2	RADIO FREQUENCY TEST SETUP 2.....	10
7.3	CONDUCTED EMISSION TEST SETUP	11
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	12
7.5	SUPPORT EQUIPMENT.....	12
8	TEST REQUIREMENTS.....	13
8.1	DTS(6DB)BANDWIDTH	13
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	26
8.3	MAXIMUM POWER SPECTRAL DENSITY	28
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	41
8.5	RADIATED SPURIOUS EMISSION	50
8.6	CONDUCTED EMISSIONS TEST	62
8.7	ANTENNA APPLICATION	65

1 TEST RESULT CERTIFICATION

Applicant: MobileDemand, L.C.
1501 Boyson Sq Dr, Ste 101 Hiawatha, Iowa, United States

Manufacturer: MobileDemand, L.C.
No.88 East Qianjin Road, Kunshan city, Jiangsu province, China

EUT Description: Tablet

Model Number: xTablet T1270

Trade Mark: MobileDemand

File Number: ES171226956W03


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2017, Subpart J FCC 47 CFR Part 15 2017, Subpart C	PASS


The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 2017 and Part 15.247 2017

The test results of this report relate only to the tested sample identified in this report.

Date of Test : January 01, 2018 to May 17, 2018

Prepared by : 
Sevin Li/Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
Data Rate	<input checked="" type="checkbox"/> 802.11 b:1,2,5.5,11Mbps; <input checked="" type="checkbox"/> 802.11 g:6,9,12,18,24,36,48,54Mbps; <input checked="" type="checkbox"/> 802.11n(HT20):MCS0-MCS7; <input checked="" type="checkbox"/> 802.11n(HT40):MCS0-MCS7;
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	<input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g; <input checked="" type="checkbox"/> 2412-2462MHz for 802.11n(HT20); <input checked="" type="checkbox"/> 2422-2452MHz for 802.11n(HT40);
Number of Channels	<input checked="" type="checkbox"/> 11 channels for 802.11b/g; <input checked="" type="checkbox"/> 11 channels for 802.11n(HT20); <input checked="" type="checkbox"/> 7 channels for 802.11n(HT40);
Transmit Power Max	17.46dBm for 802.11b; 17.38dBm for 802.11g; 19.91dBm for 802.11n(HT20); 19.86dBm for 802.11n(HT40);
Antenna Type	FPC antenna
Antenna Gain	Antenna 0: 2.77 antenna Antenna 1: 2.46 antenna
Direction Gain	5.63 dBi
Antenna Port	<input checked="" type="checkbox"/> Ant 0 ; <input checked="" type="checkbox"/> Ant 1 ;
Smart system	<input checked="" type="checkbox"/> SISO for 802.11b/g/n <input checked="" type="checkbox"/> MIMO for 802.11n
Power supply	<input checked="" type="checkbox"/> DC 7.6V internal rechargeable lithium battery <input checked="" type="checkbox"/> DC 19.5V from Adapter
	<input checked="" type="checkbox"/> Adapter: Model: ADP-120MH D INPUT: 100-240V~ 2.2A 50-60Hz OUTPUT: DC 19.5V, 6.15A
Battery information:	Model: 2964125 Rating: DC 7.6V, 6200mAh, 47.12Wh

3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted EmissionTest	PASS	
15.203	Antenna Application	PASS	
	NOTE1:N/A (Not Applicable) NOTE2:According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: O86T12XX filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2017	May 19, 2018
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2017	May 19, 2018
50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 21, 2017	May 20, 2018
Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 21, 2017	May 20, 2018
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 20, 2017	May 19, 2018
I.S.N	Teseq GmbH	ISN T800	30327	May 21, 2017	May 20, 2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2017	May 19, 2018
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2017	May 19, 2018
Loop Antenna	ARA	PLA-1030/B	1029	May 20, 2017	May 19, 2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 21, 2017	May 20, 2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 20, 2017	May 19, 2018
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2017	May 20, 2018
Cable	Rosenberger	N/A	FP2RX2	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRRX2	May 21, 2017	May 20, 2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2017	May 20, 2018
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2017	May 20, 2018
Power meter	Anritsu	ML2495A	0824006	May 21, 2017	May 20, 2018
Power sensor	Anritsu	MA2411B	0738172	May 21, 2017	May 20, 2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n(HT20): MCS0; 802.11n(HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n(HT20)/n(HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and Channel for 802.11 n(HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2437	11	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L229
 - : Accredited by TUV Rheinland Shenzhen, 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC 17025.
 - : Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943
Accredited by A2LA, July 31, 2017
The Certificate Registration Number is 4321.01.
 - : Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

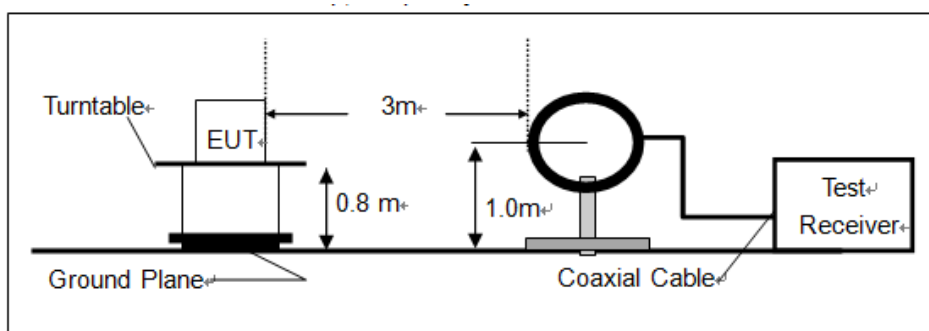

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

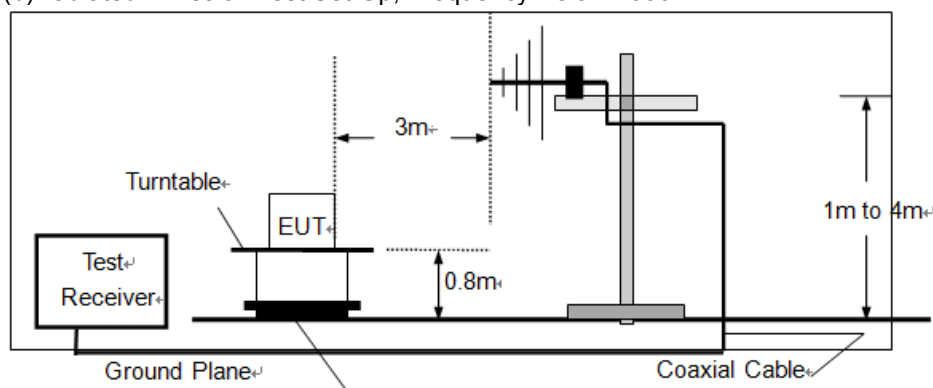

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

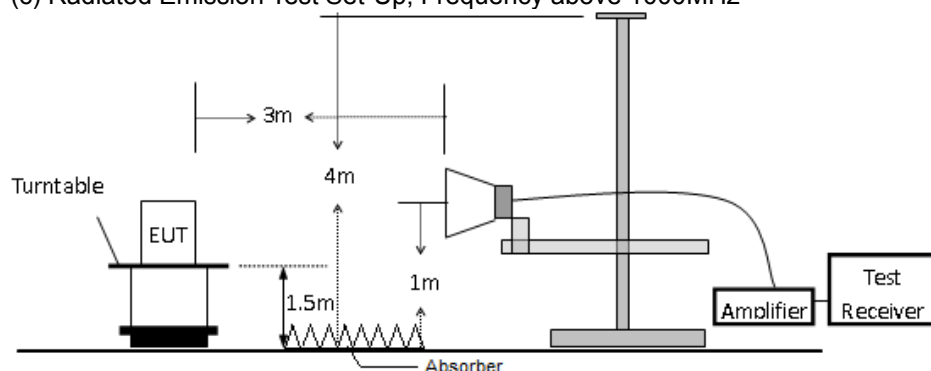


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

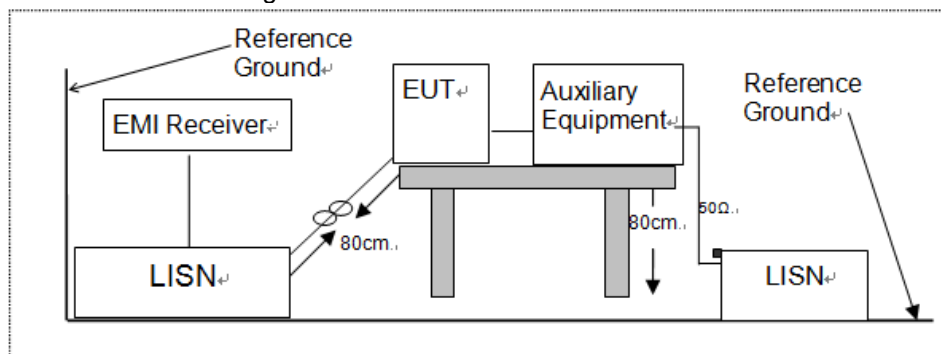

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

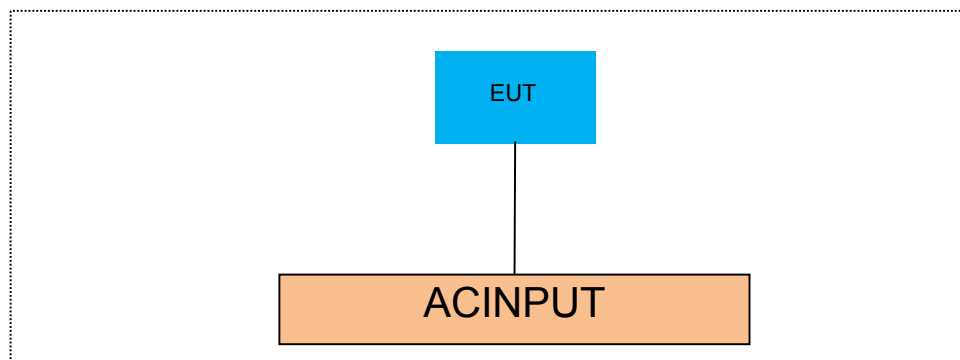

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
N/A	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS(6DB)BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


8.1.5 Test Results

Temperature : 26°C Test By: King Kong
Humidity : 60 %

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)		Limit (kHz)	Verdict
			Ant 0	Ant 1		
802.11b	1	2412	10.150	10.150	500	PASS
	6	2437	10.150	10.150	500	PASS
	11	2462	10.150	10.150	500	PASS
802.11g	1	2412	15.624	15.465	500	PASS
	6	2437	15.584	15.465	500	PASS
	11	2462	15.345	15.345	500	PASS
802.11n (ht20)	1	2412	15.944	16.384	500	PASS
	6	2437	15.305	15.944	500	PASS
	11	2462	15.944	16.743	500	PASS
802.11n (ht40)	3	2422	33.906	35.744	500	PASS
	6	2437	33.826	33.826	500	PASS
	9	2452	33.085	35.165	500	PASS


Antenna 0

Test Model	DTS (6dB) Bandwidth 802.11b Channel 1: 2412MHz
------------	--

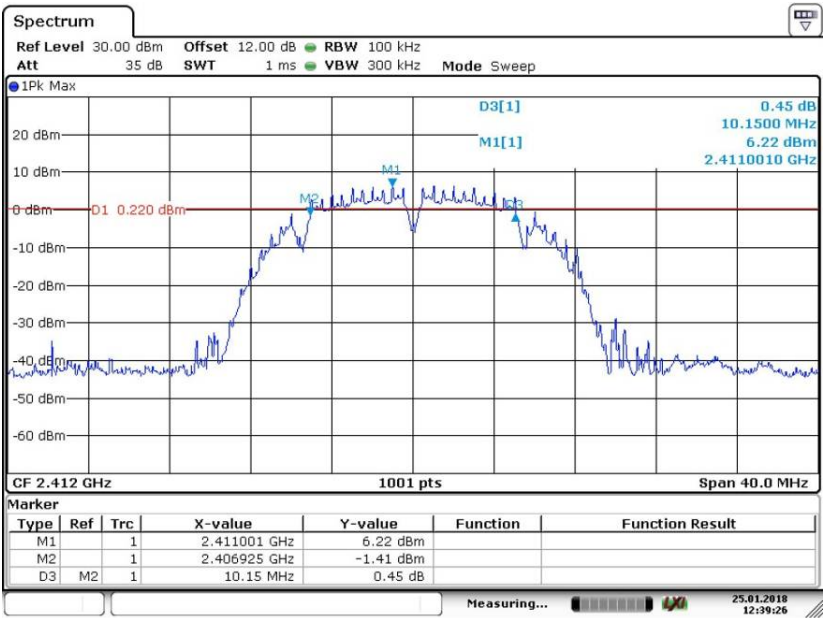

Date: 25. JAN 2018 12:39:25


Test Model	DTS (6dB) Bandwidth 802.11b Channel 6: 2437MHz
------------	--

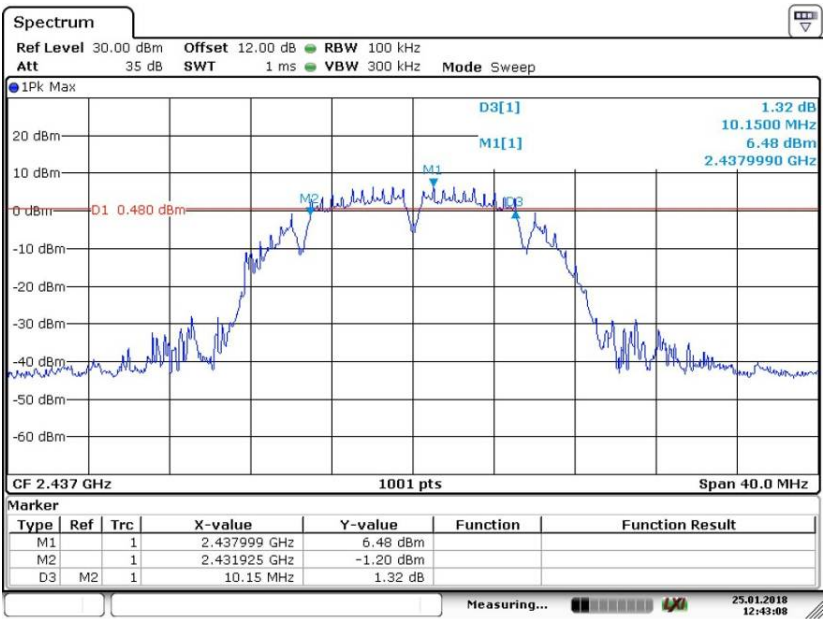

Date: 25. JAN 2018 12:43:08

Test Model


DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

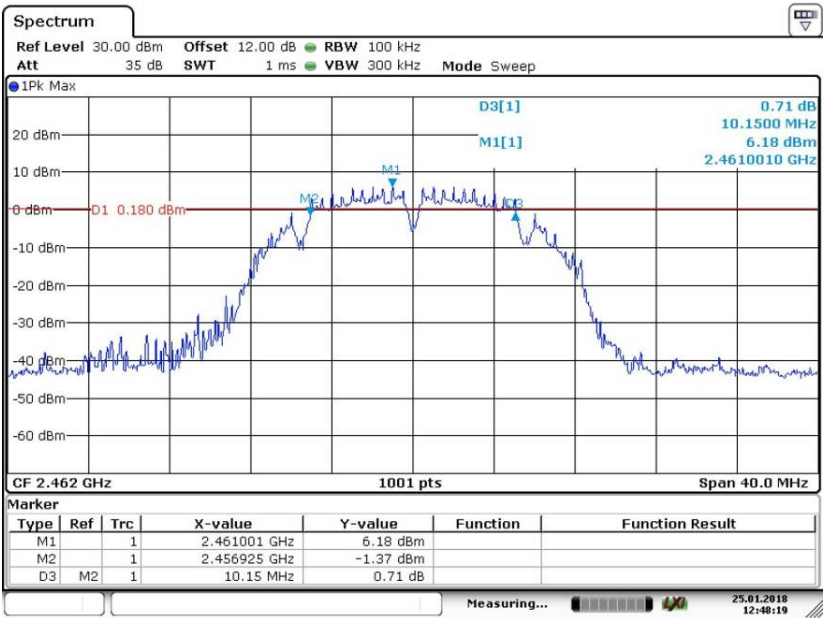

Date: 25. JAN 2018 12:48:19

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz

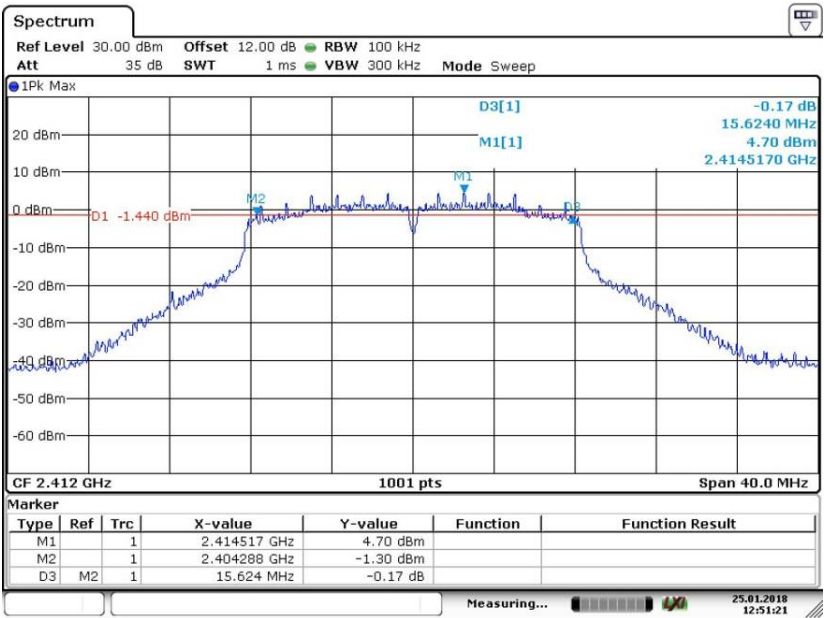

Date: 25. JAN 2018 12:51:21

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

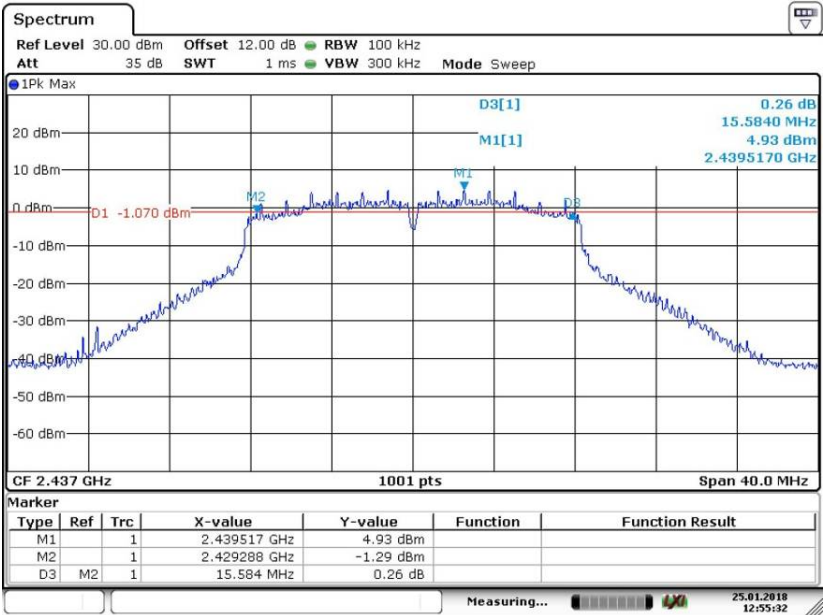

Date: 25. JAN 2018 12:55:32

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

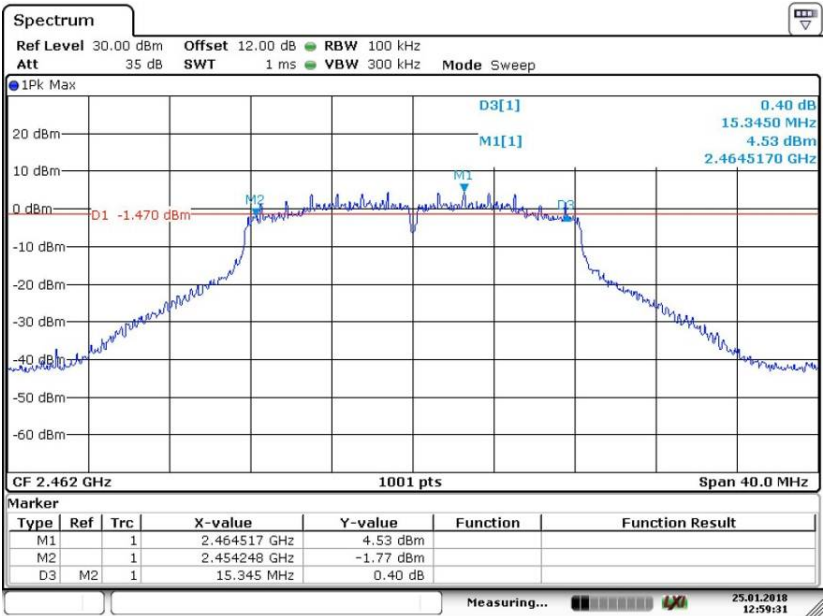

Date: 25. JAN 2018 12:59:31

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

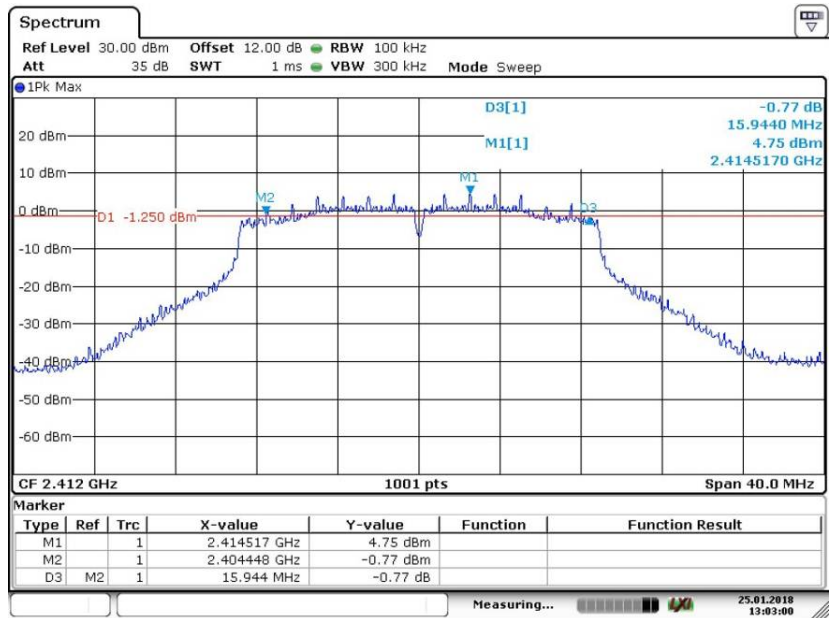

Date: 25. JAN. 2018 13:03:00

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

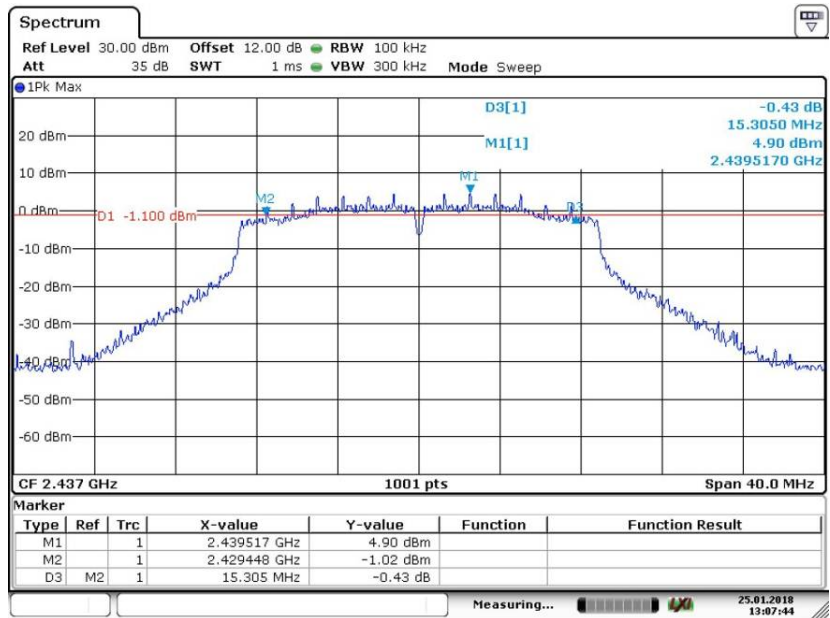

Date: 25. JAN. 2018 13:07:44

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

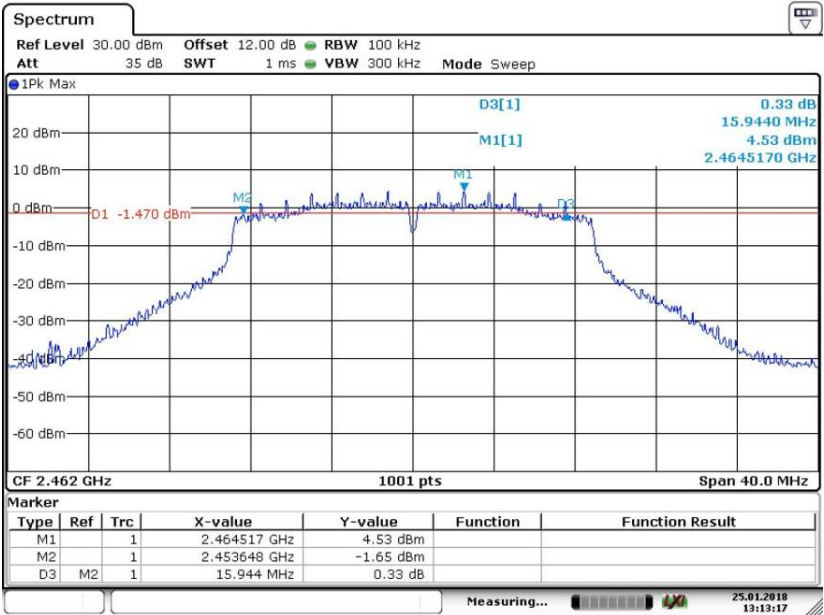

Date: 25. JAN. 2018 13:13:17

Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

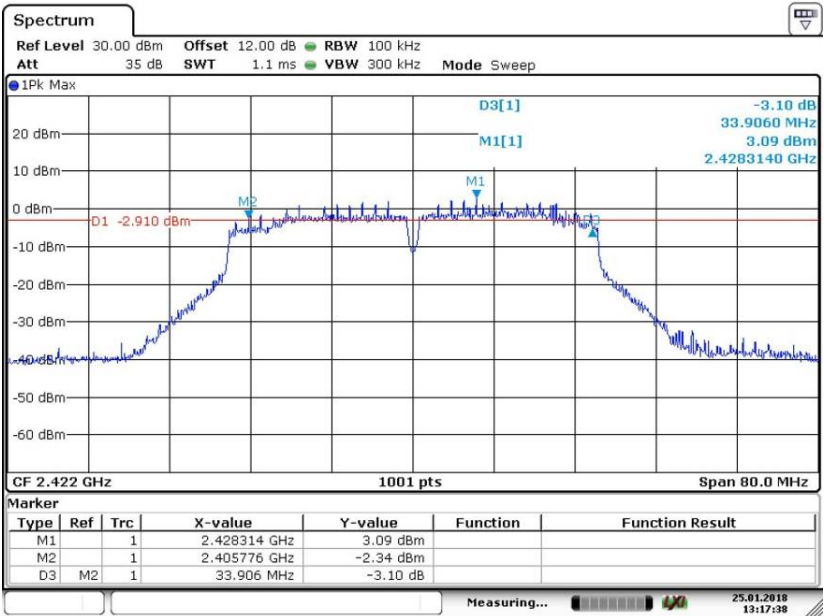

Date: 25. JAN. 2018 13:17:38

Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 6: 2437MHz

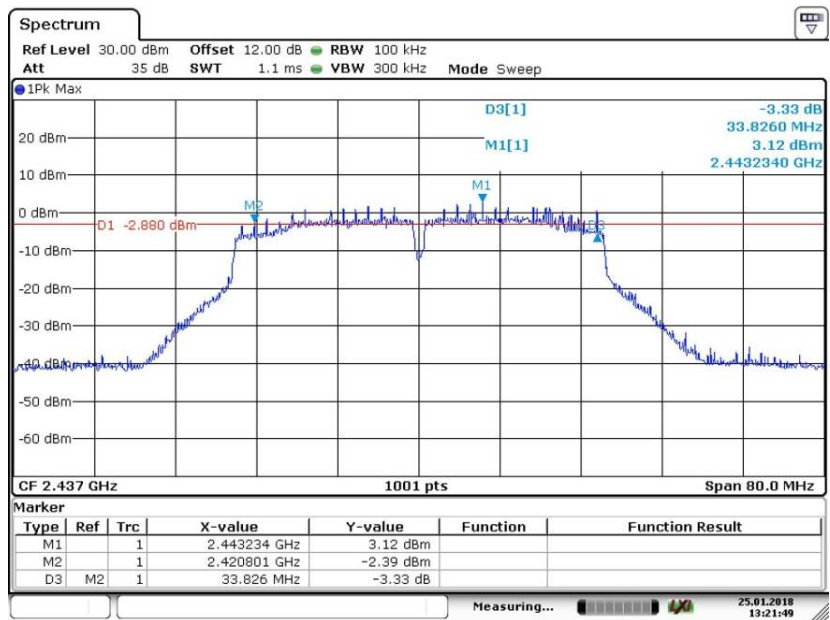

Date: 25 JAN 2018 13:21:49

Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 9: 2452MHz

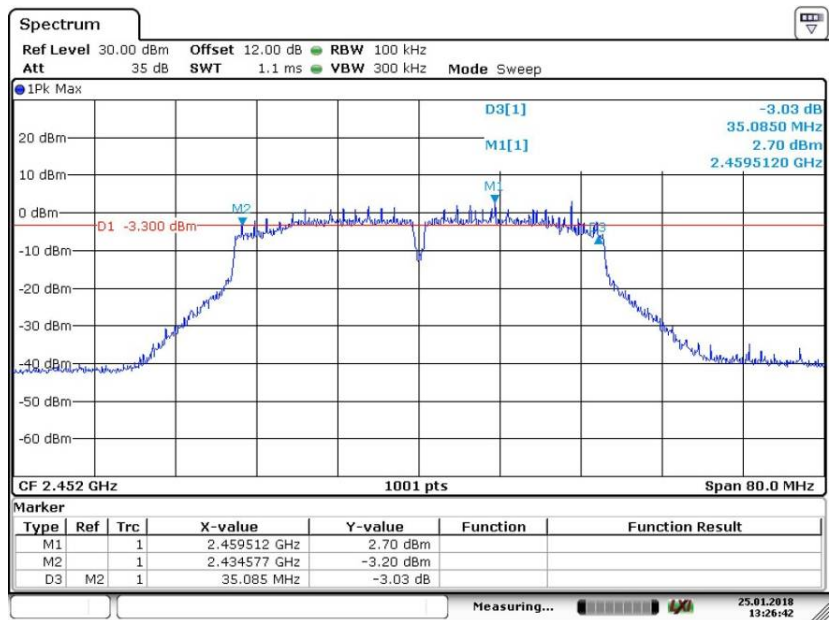

Date: 25 JAN 2018 13:26:42


Antenna 1

Test Model	DTS (6dB) Bandwidth 802.11b Channel 1: 2412MHz
------------	--

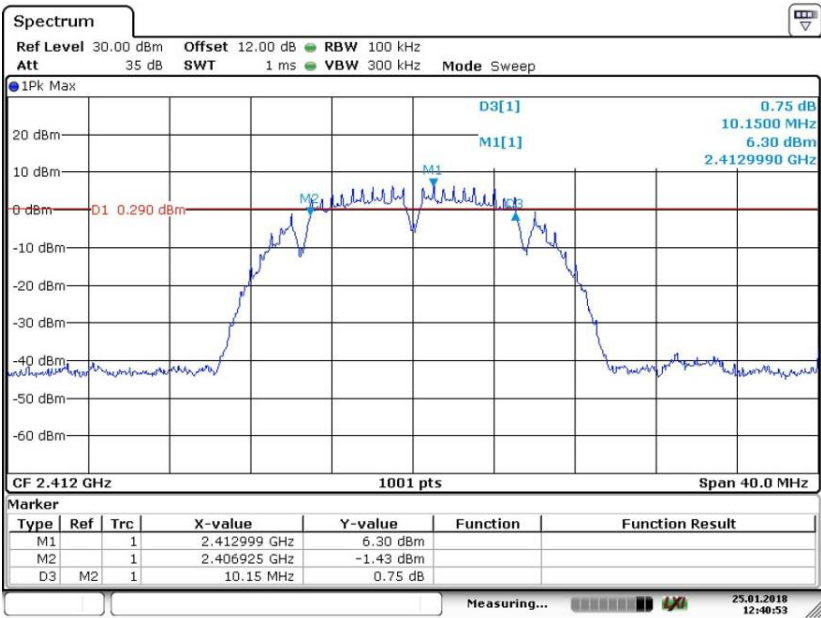


Date: 25. JAN 2018 12:40:53

Test Model	DTS (6dB) Bandwidth 802.11b Channel 6: 2437MHz
------------	--

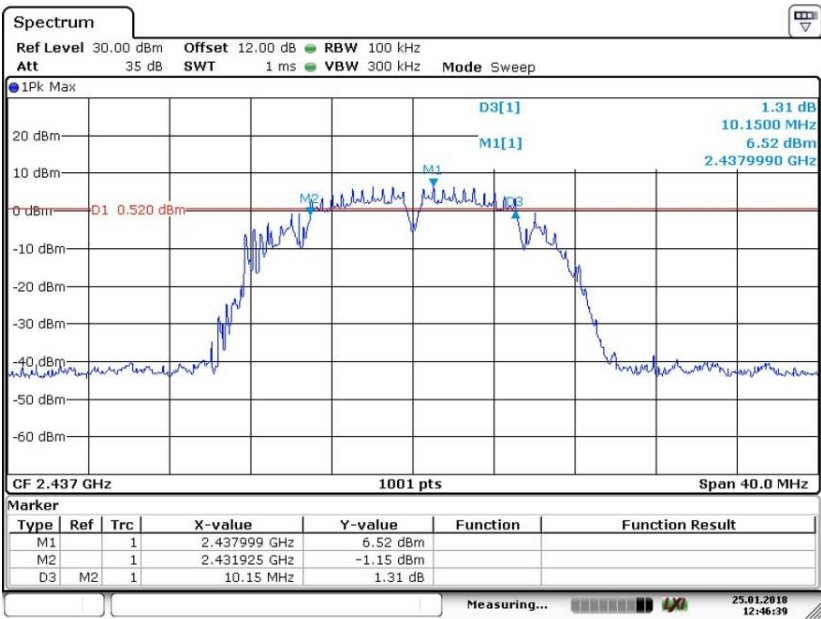


Date: 25. JAN 2018 12:46:39

Test Model	DTS (6dB) Bandwidth 802.11b Channel 11: 2462MHz
------------	---

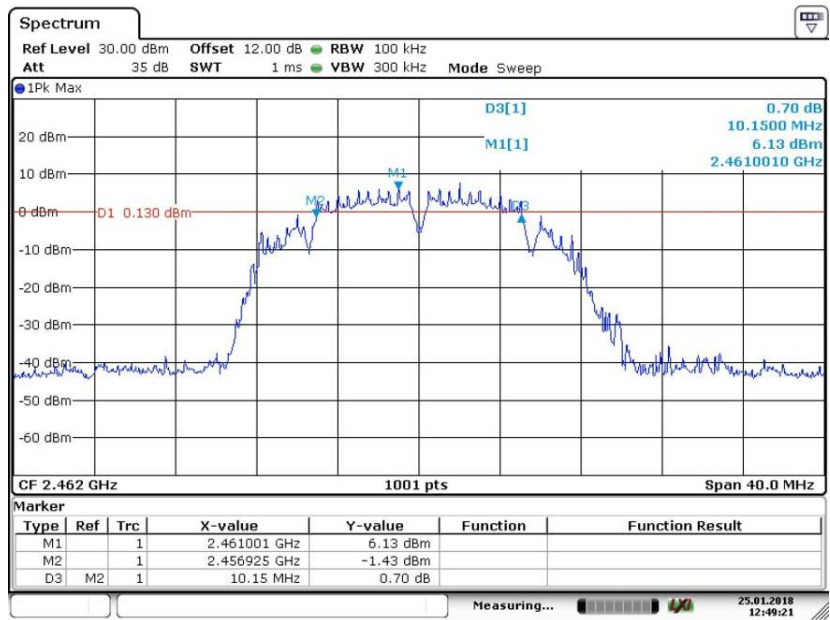

Date: 25. JAN 2018 12:49:21


Test Model	DTS (6dB) Bandwidth 802.11g Channel 1: 2412MHz
------------	--

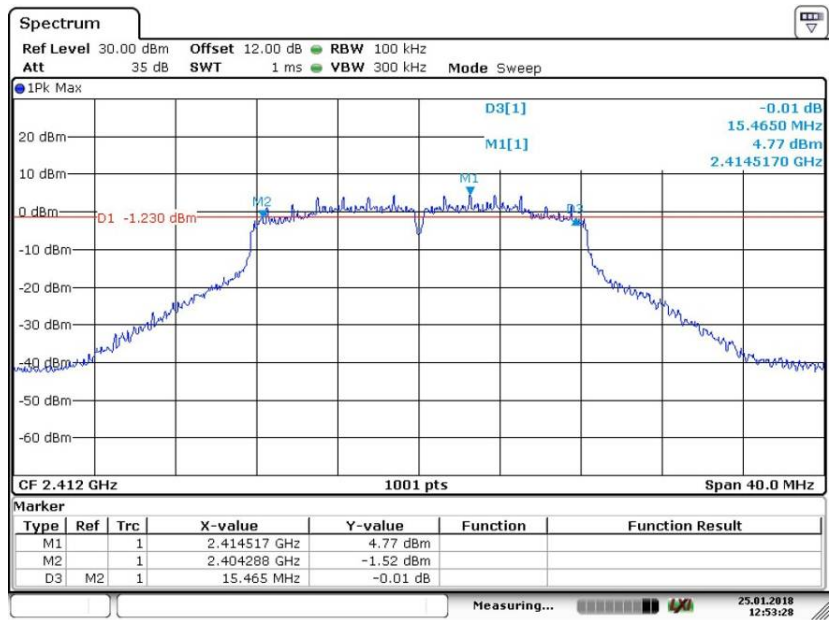

Date: 25. JAN 2018 12:53:28

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

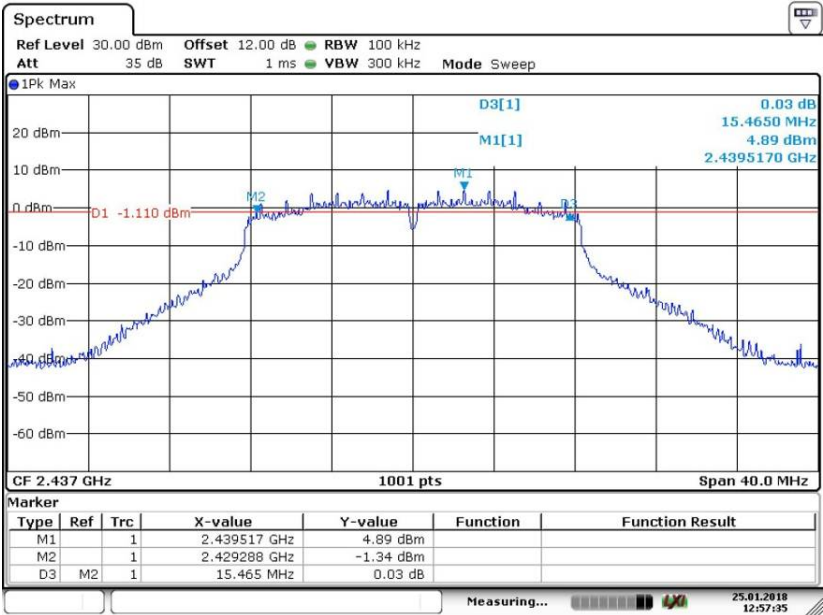

Date: 25. JAN 2018 12:57:35

Test Model


DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

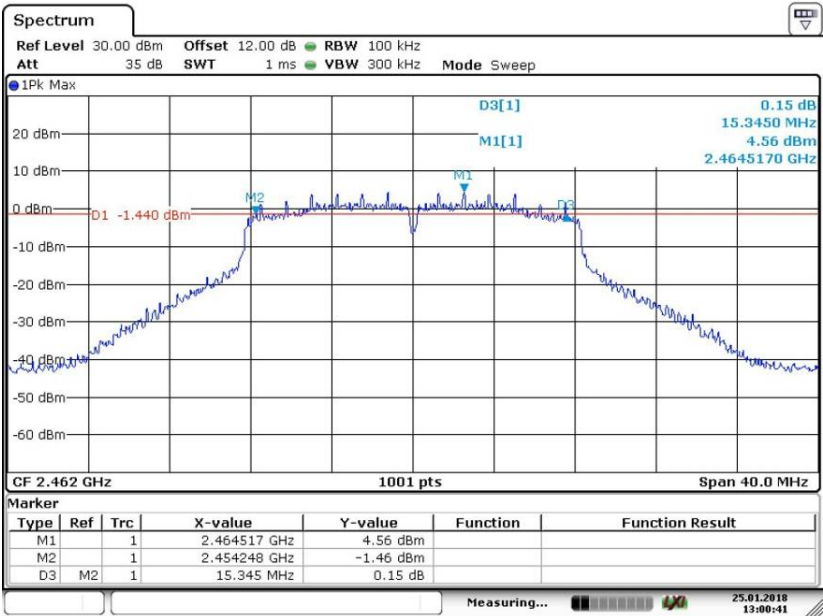

Date: 25. JAN 2018 13:00:41

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

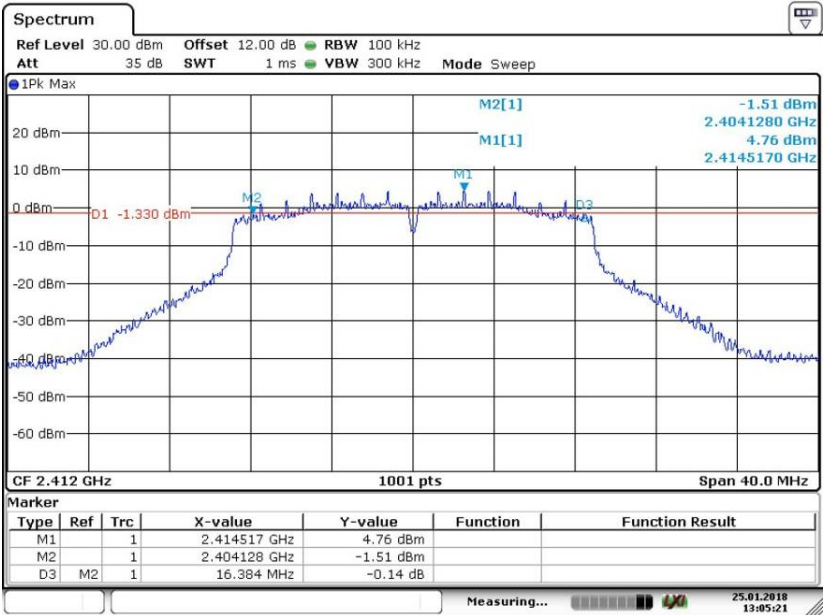

Date: 25. JAN. 2018 13:05:21

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

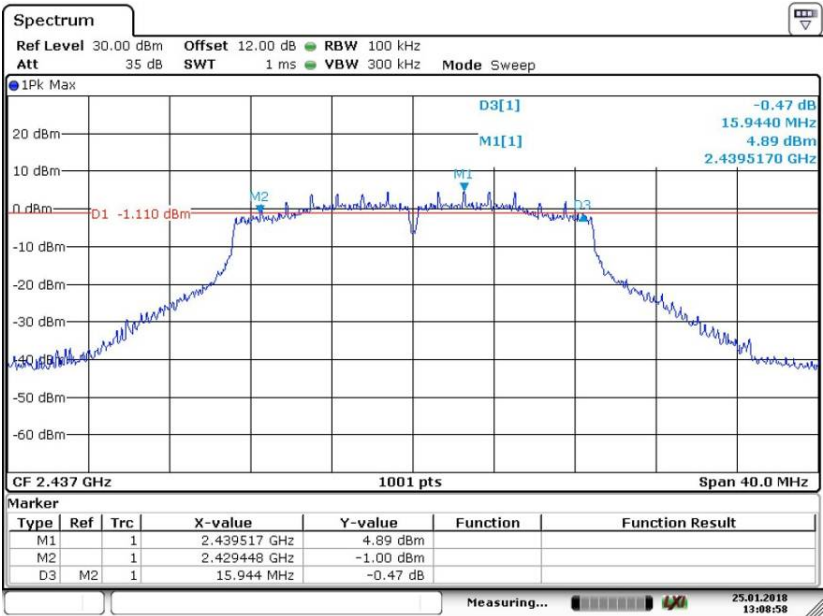

Date: 25. JAN. 2018 13:08:58

Test Model


DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

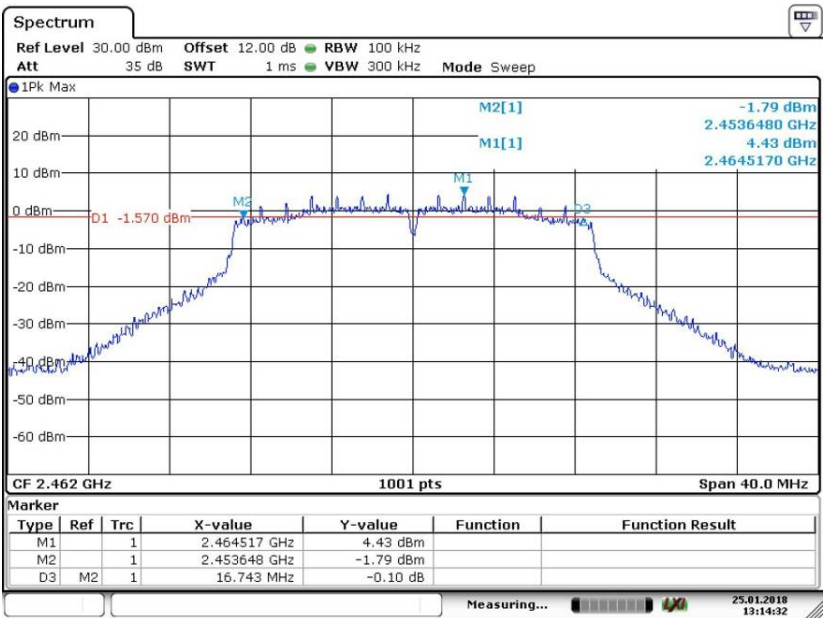

Date: 25. JAN.2018 13:14:31

Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

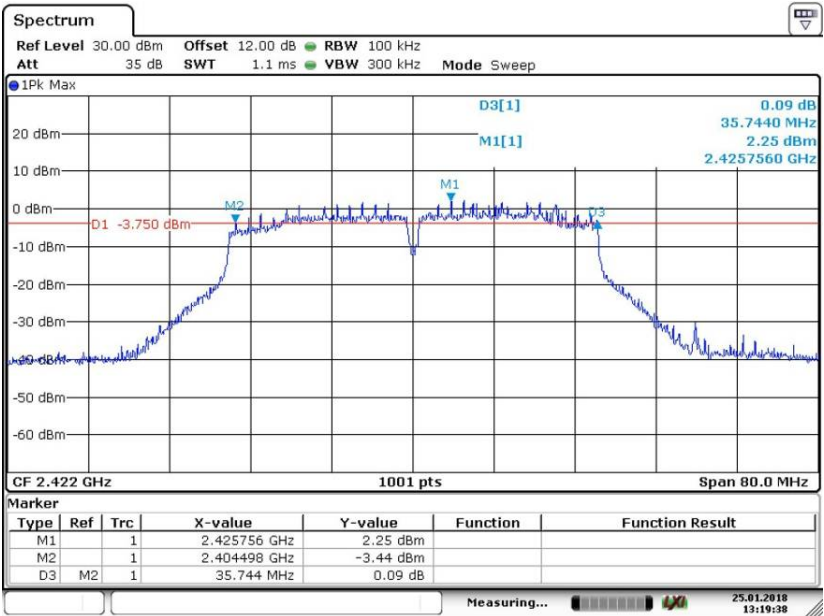

Date: 25. JAN.2018 13:19:38

Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 6: 2437MHz

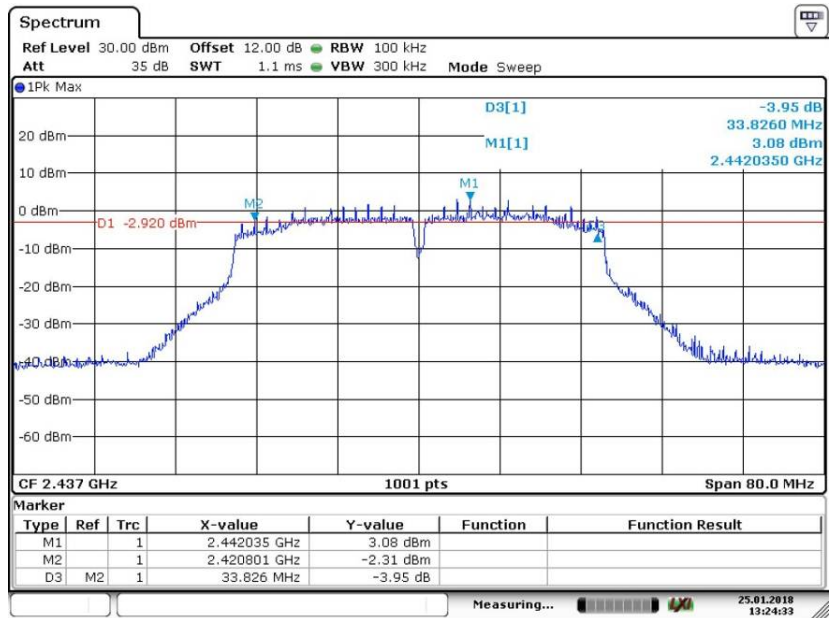

Date: 25. JAN 2018 13:24:33

Test Model

DTS (6dB) Bandwidth
802.11n (HT40)
Channel 9: 2452MHz

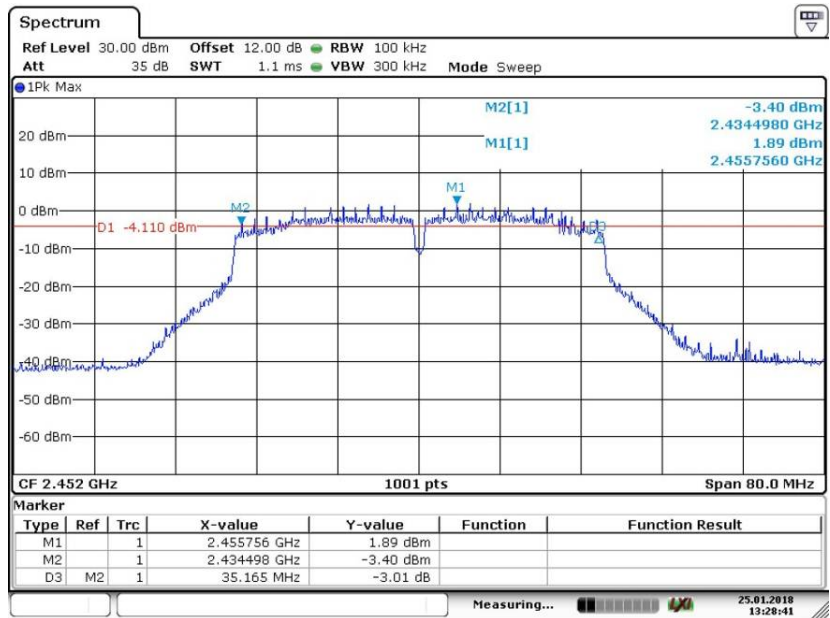

Date: 25. JAN 2018 13:28:40

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part15.247(b)(3) and KDB558074 DTS 01 Meas. Guidance v04

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)


8.2.5 Test Results

Temperature : 26°C Test By: King Kong
Humidity : 60 %

Operation Mode	Channel Number	Channel Frequency (MHz)	Maximun Peak Conducted Output Power (dBm)			Limit (dBm)	Verdict
			Ant 0	Ant 1	Ant 0 + Ant 1		
802.11b	1	2412	18.20	18.18	-	30	PASS
	6	2437	18.31	18.28	-	30	PASS
	11	2462	18.08	18.12	-	30	PASS
802.11g	1	2412	23.06	22.94	-	30	PASS
	6	2437	23.03	23.09	-	30	PASS
	11	2462	22.71	22.93	-	30	PASS
802.11n (ht20)	1	2412	22.83	22.85	25.85	30	PASS
	6	2437	22.89	22.88	25.90	30	PASS
	11	2462	22.72	22.72	25.73	30	PASS
802.11n (ht40)	3	2422	22.17	22.10	25.15	30	PASS
	6	2437	22.01	22.03	25.03	30	PASS
	9	2452	21.95	22.13	25.05	30	PASS

Note: For the average power see the SAR report

Duty cycle=100%

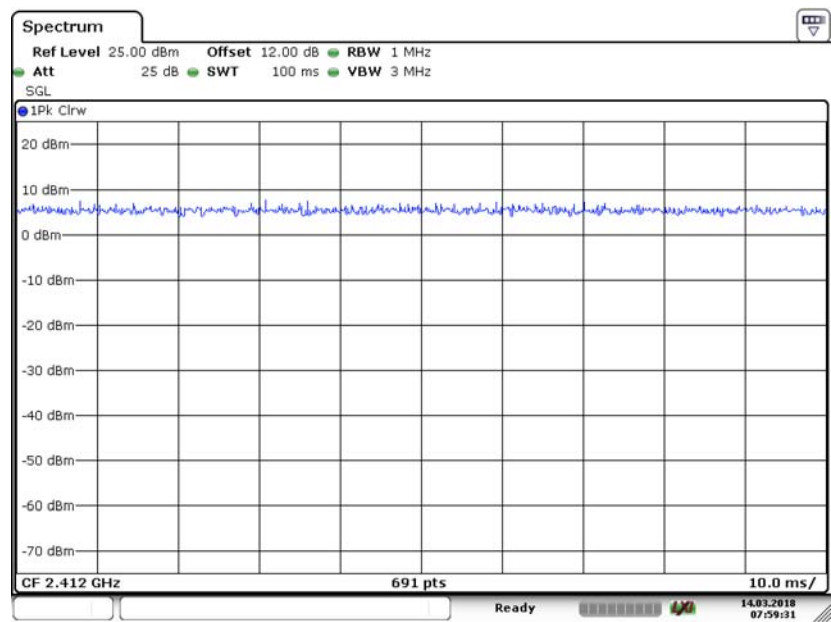

Date: 14.MAR.2018 07:59:31

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB558074 DTS 01 Meas. Guidance v04

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)

8.3.5 Test Results


Temperature : 26°C Test By: King Kong
Humidity : 60 %

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)			Limit (dBm/3kHz)	Verdict
			Ant0	Ant1	Ant0+ Ant1		
802.11b	1	2412	-7.38	-7.24	-	<=8	PASS
	6	2437	-7.43	-7.59	-	<=8	PASS
	11	2462	-7.25	-8.07	-	<=8	PASS
802.11g	1	2412	-8.93	-9.63	-	<=8	PASS
	6	2437	-9.24	-9.36	-	<=8	PASS
	11	2462	-8.94	-9.06	-	<=8	PASS
802.11n (ht20)	1	2412	-9.90	-9.30	-6.58	<=8	PASS
	6	2437	-9.01	-9.57	-6.27	<=8	PASS
	11	2462	-9.57	-10.19	-6.86	<=8	PASS
802.11n (ht40)	3	2422	-13.39	-13.04	-10.20	<=8	PASS
	6	2437	-13.59	-13.09	-10.32	<=8	PASS
	9	2452	-13.10	-13.08	-10.08	<=8	PASS

Note: For smart antenna systems, Maximum Conducted Output Power is summed at the total transmit power delivered to all antennas.


ANT 0

Test Model	Power Spectral Density 802.11b Channel 1: 2412MHz
------------	---

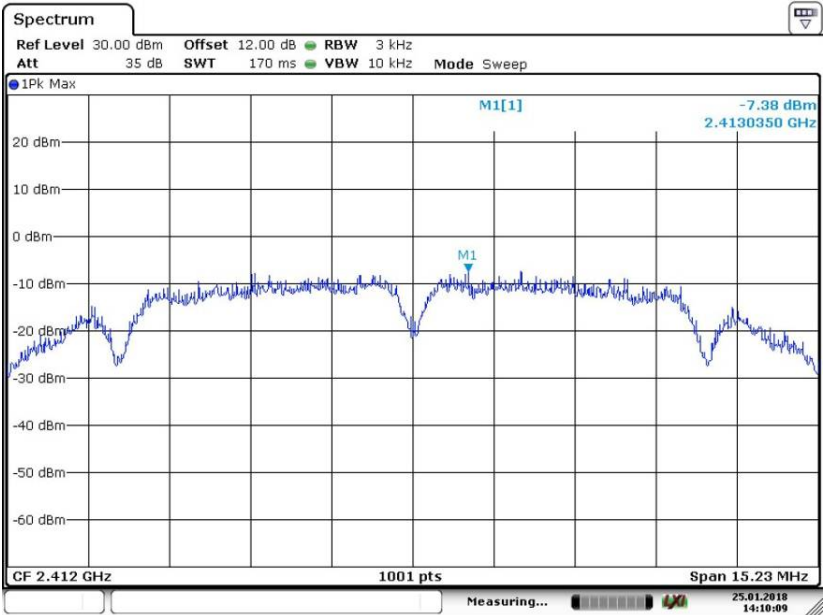

Date: 25. JAN. 2018 14:10:08


Test Model	Power Spectral Density 802.11b Channel 6: 2437MHz
------------	---

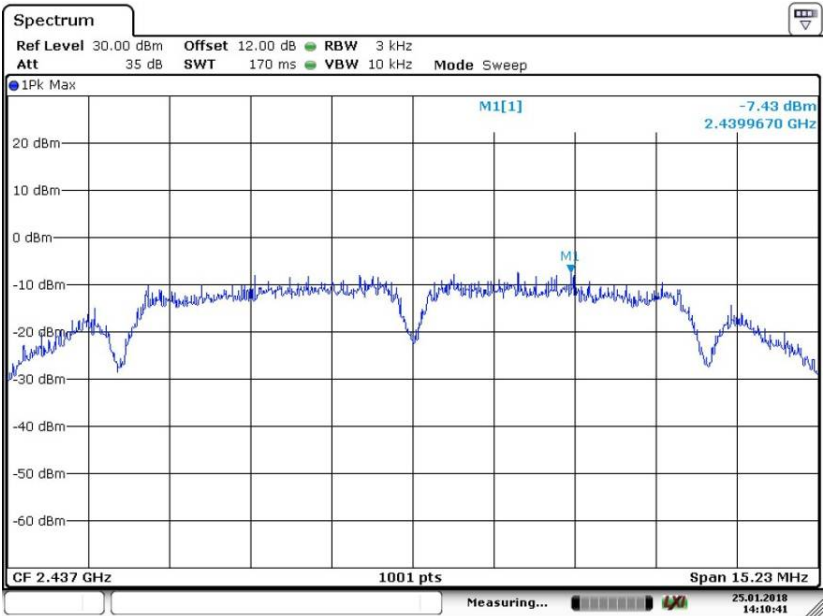

Date: 25. JAN. 2018 14:10:41


Test Model

Power Spectral Density
802.11b
Channel 11: 2462MHz

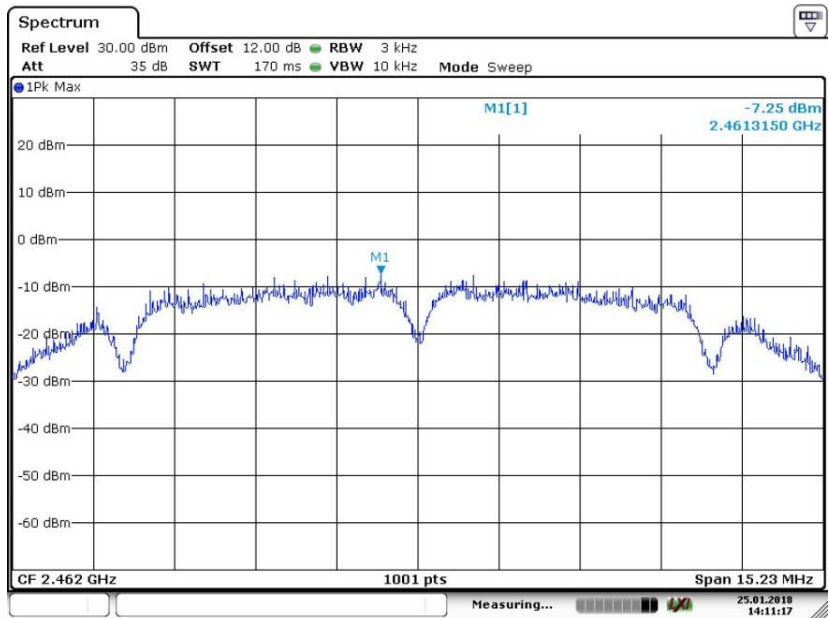


Test Model

Power Spectral Density
802.11g
Channel 1: 2412MHz

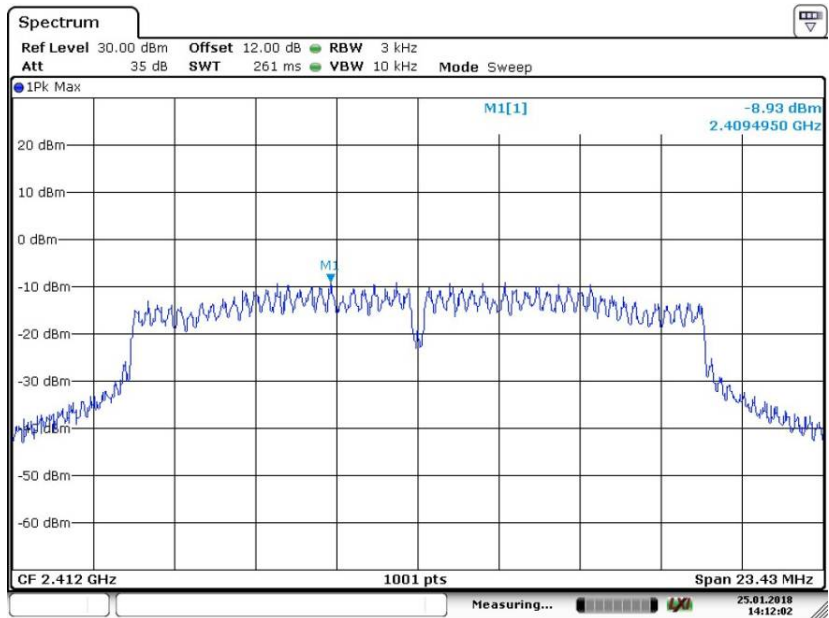


Test Model	Power Spectral Density 802.11g Channel 6: 2437MHz
------------	---

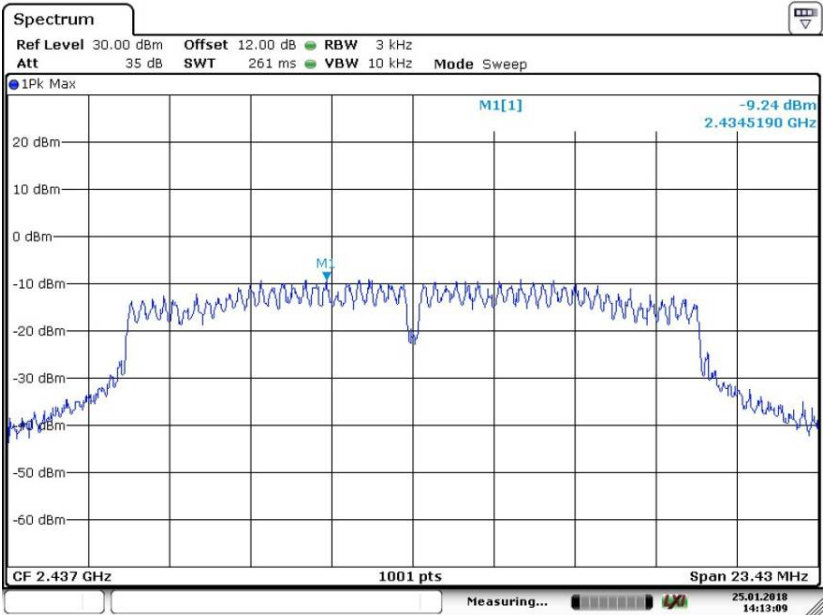

Date: 25. JAN. 2018 14:13:10


Test Model	Power Spectral Density 802.11g Channel 11: 2462MHz
------------	--

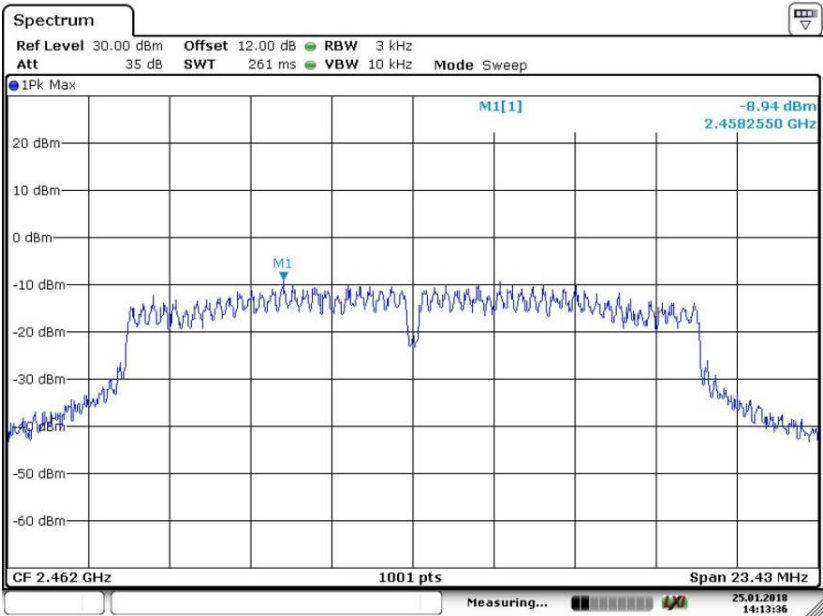

Date: 25. JAN. 2018 14:13:36

Test Model


Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

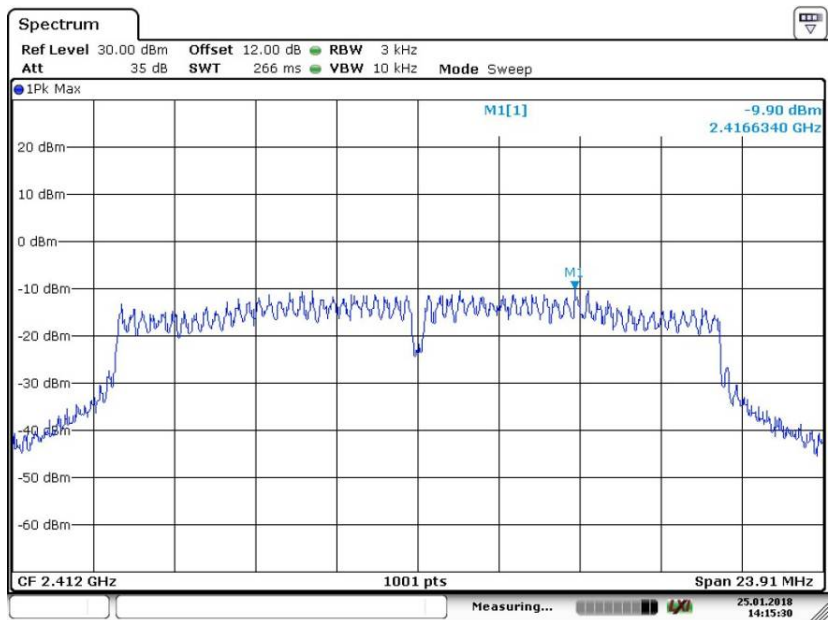

Date: 25. JAN.2018 14:15:31

Test Model


Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

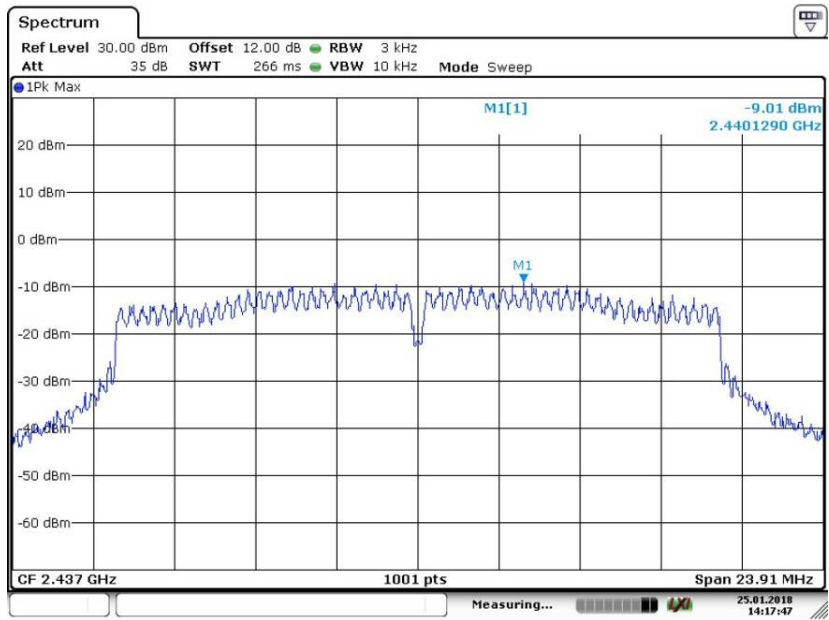

Date: 25. JAN.2018 14:17:47

Test Model


Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

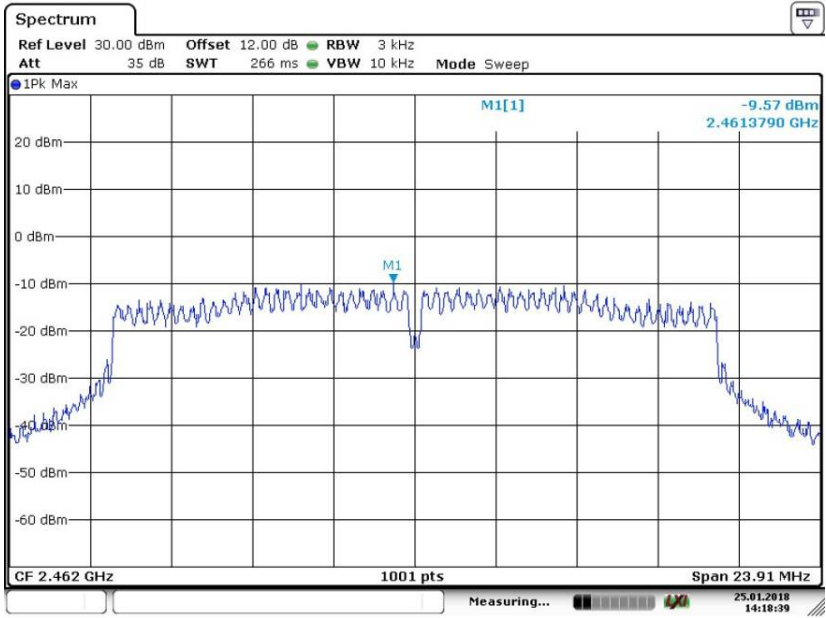

Date: 25 JAN 2018 14:18:39


Test Model

Power Spectral Density
802.11n (HT40)
Channel 3: 2422MHz

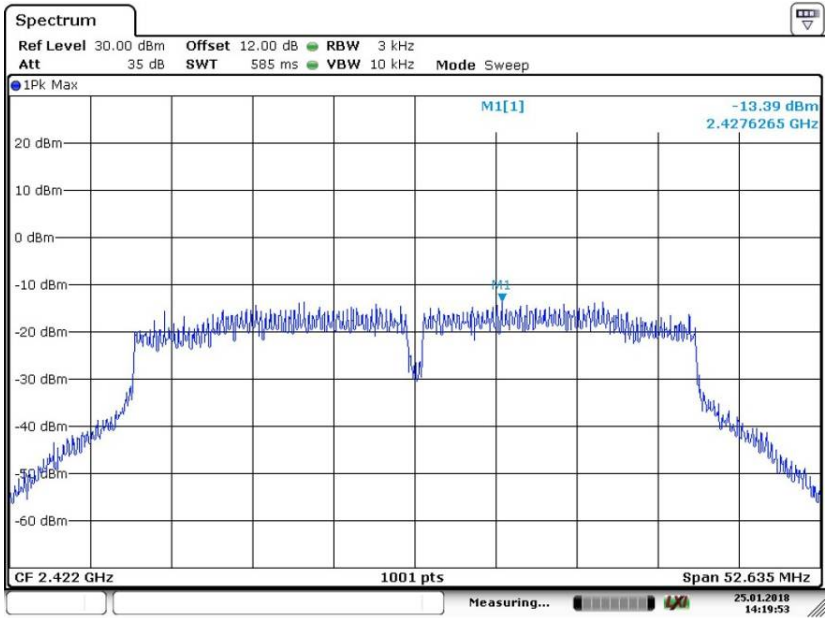


Date: 25 JAN 2018 14:19:53

Test Model	Power Spectral Density 802.11n (HT40) Channel 6: 2437MHz
------------	--

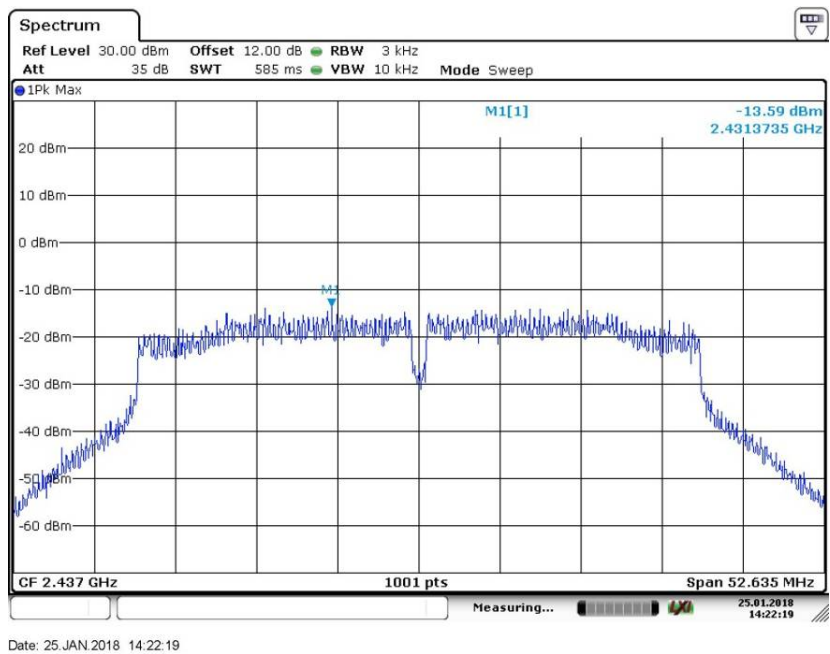


Test Model	Power Spectral Density 802.11n (HT40) Channel 9: 2452MHz
------------	--

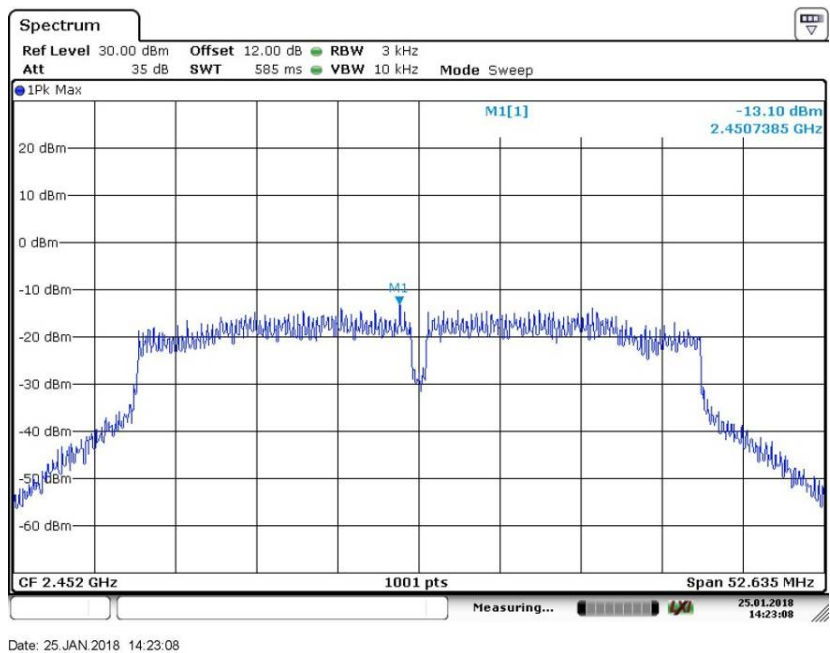


ANT 1

Test Model	Power Spectral Density 802.11b Channel 1: 2412MHz
------------	---

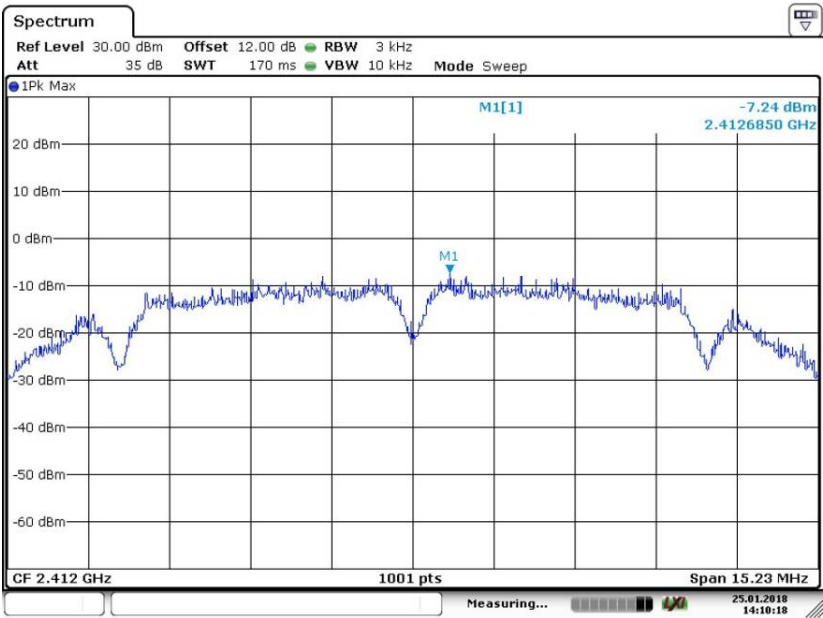


Test Model	Power Spectral Density 802.11b Channel 6: 2437MHz
------------	---

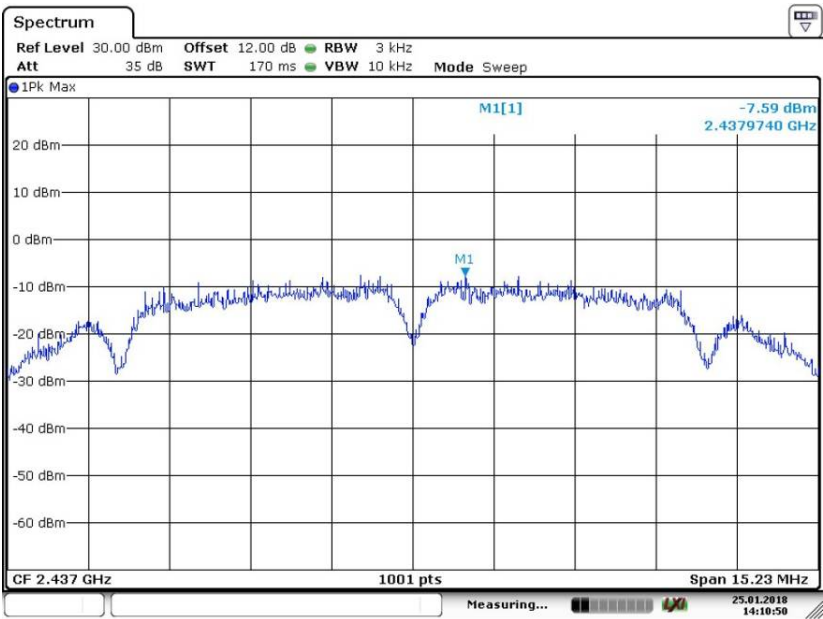

Test Model


Power Spectral Density
802.11b
Channel 11: 2462MHz

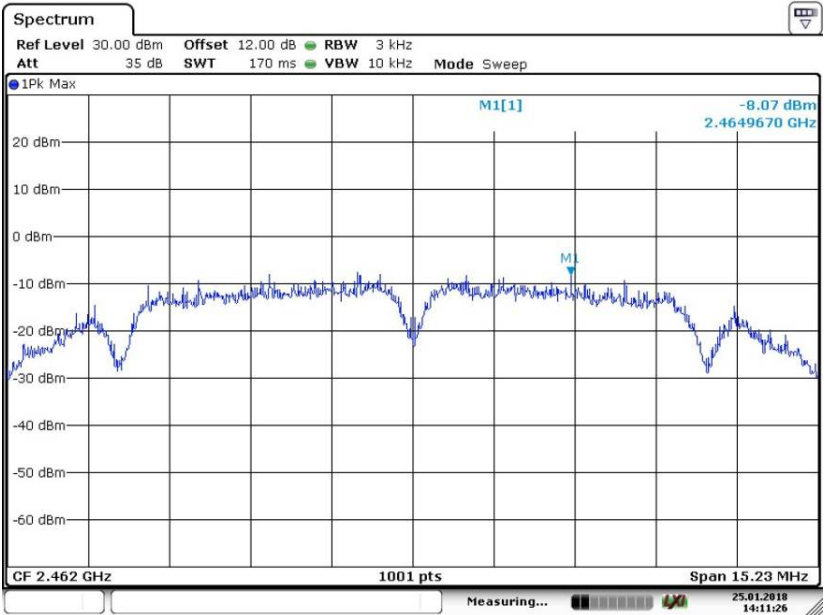

Date: 25. JAN.2018 14:11:26

Test Model


Power Spectral Density
802.11g
Channel 1: 2412MHz

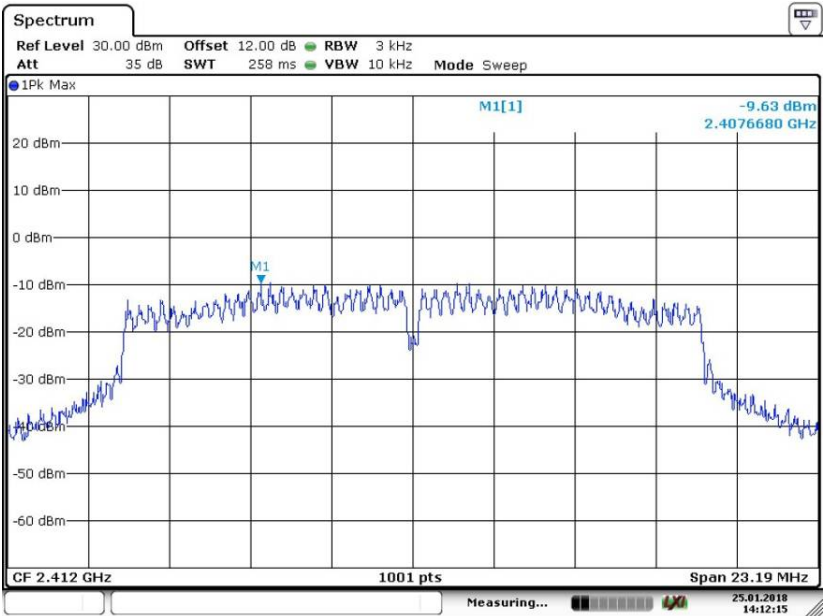

Date: 25. JAN.2018 14:12:14

Test Model


Power Spectral Density
802.11g
Channel 6: 2437MHz

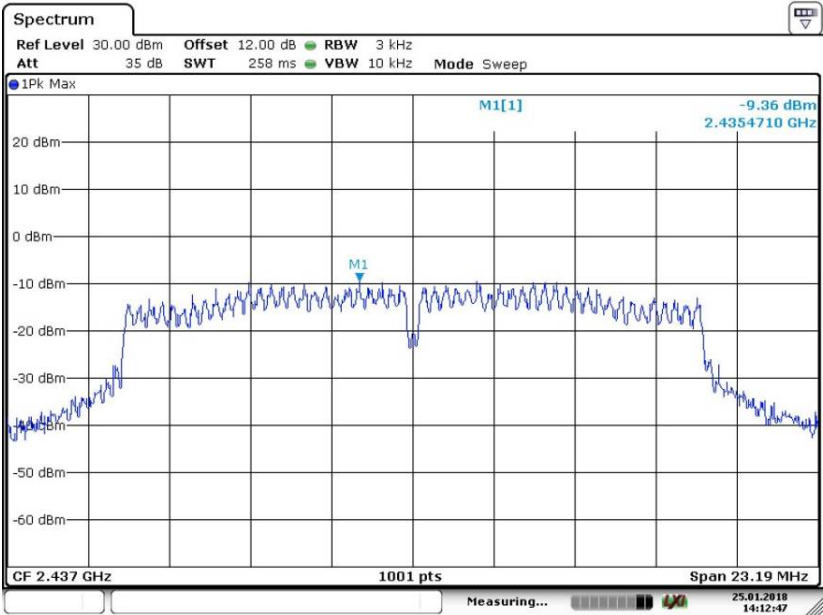

Date: 25. JAN. 2018 14:12:47


Test Model

Power Spectral Density
802.11g
Channel 11: 2462MHz

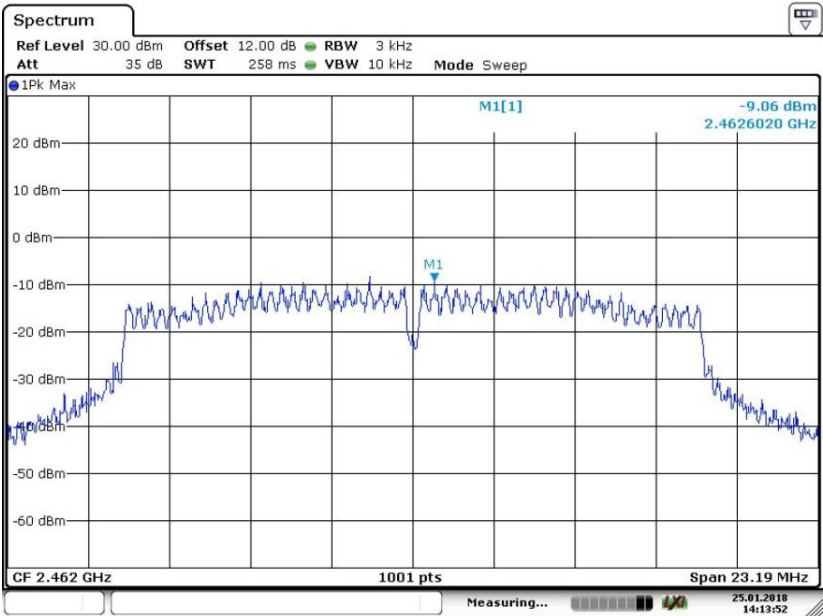


Date: 25. JAN. 2018 14:13:52

Test Model	Power Spectral Density 802.11n (HT20) Channel 1: 2412MHz
------------	--

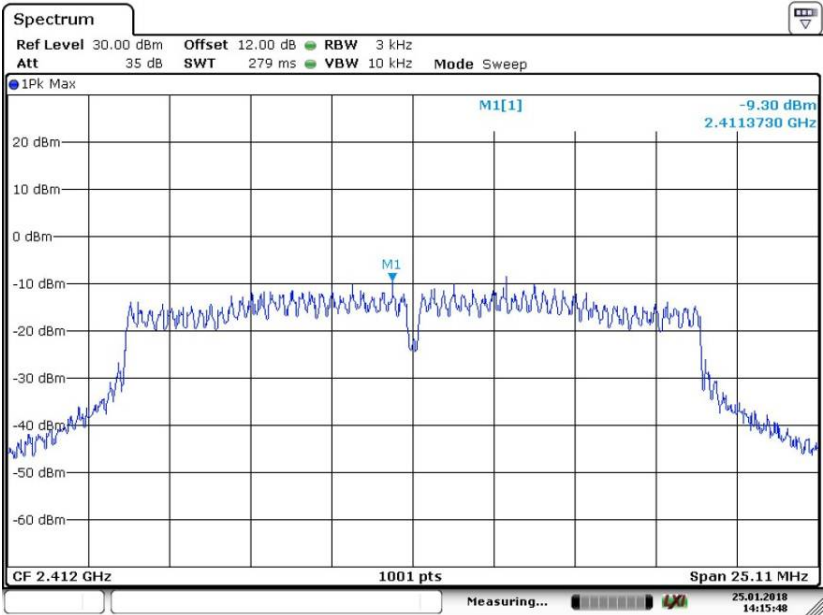

Date: 25. JAN.2018 14:15:48


Test Model	Power Spectral Density 802.11n (HT20) Channel 6: 2437MHz
------------	--

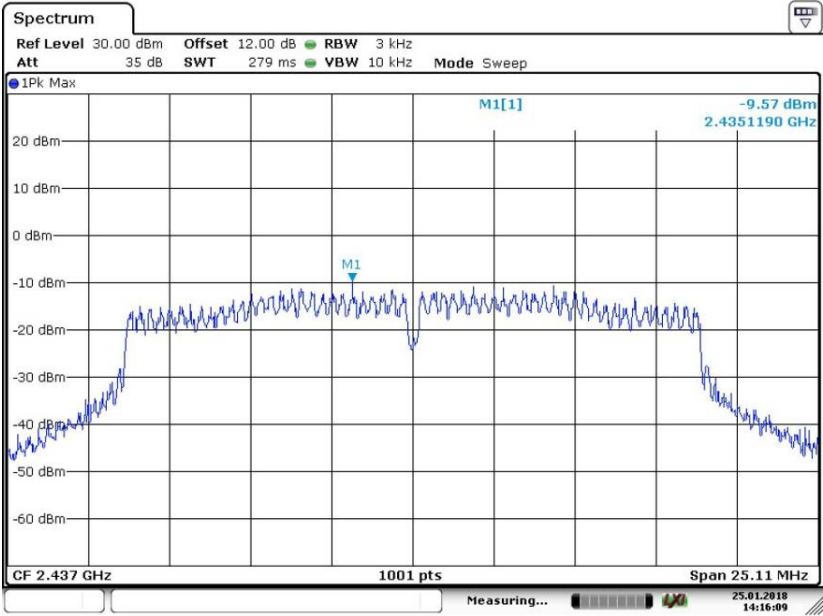

Date: 25. JAN.2018 14:16:08

Test Model


Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

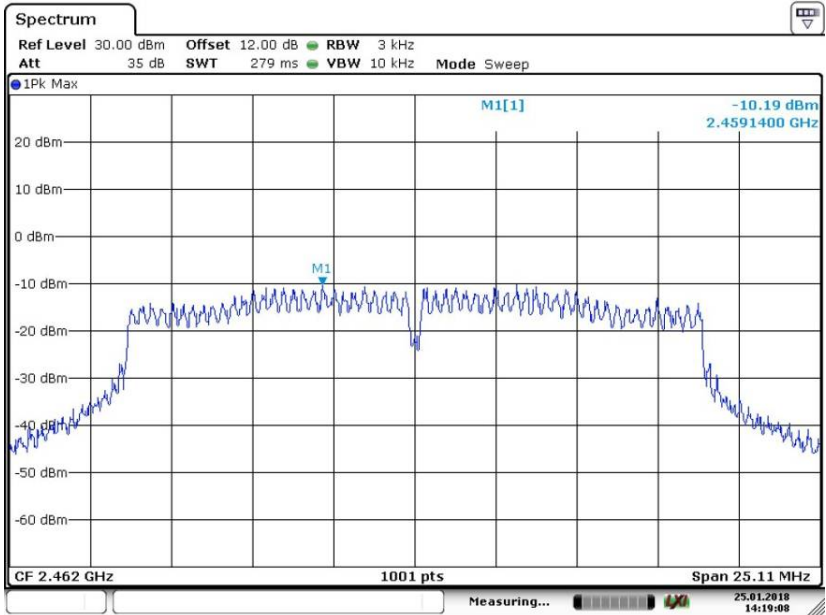

Date: 25. JAN.2018 14:19:07

Test Model


Power Spectral Density
802.11n (HT40)
Channel 3: 2422MHz

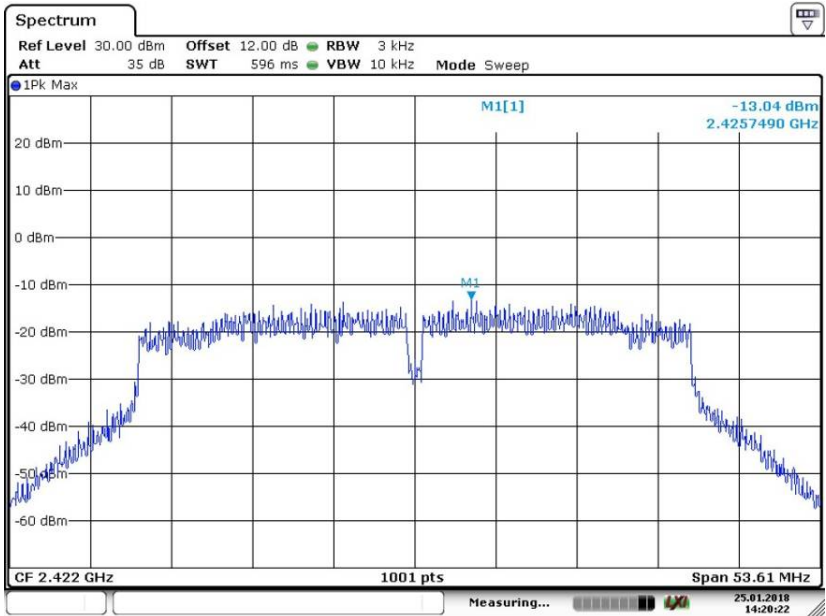

Date: 25. JAN.2018 14:20:23

Test Model


Power Spectral Density
802.11n (HT40)
Channel 6: 2437MHz

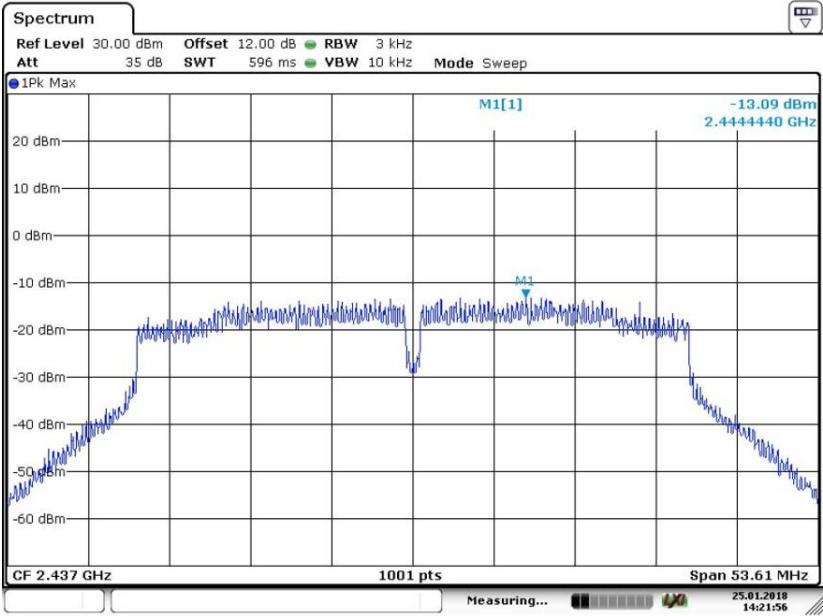

Date: 25. JAN.2018 14:21:56

Test Model

Power Spectral Density
802.11n (HT40)
Channel 9: 2452MHz

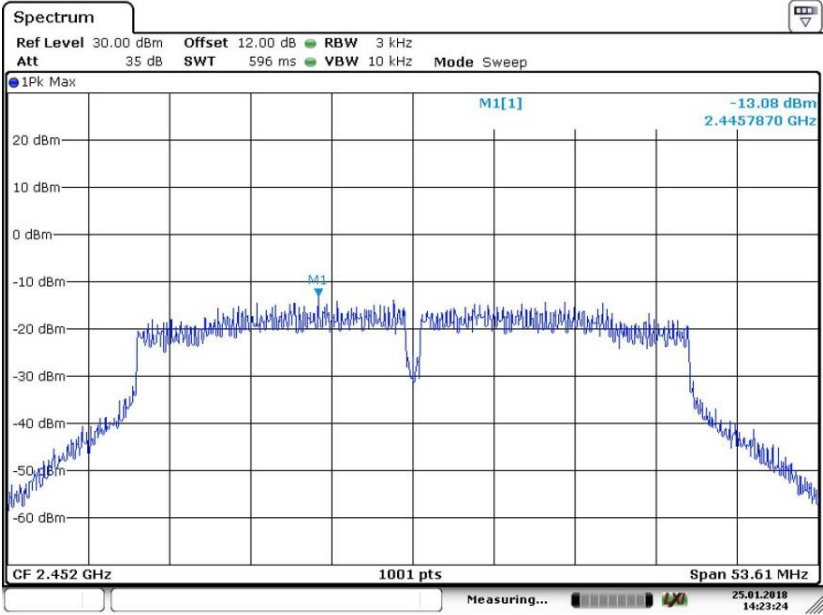

Date: 25. JAN.2018 14:23:24

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB558074 DTS 01 Meas. Guidance v04

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results


All modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:
ANT 0:

PSD(Power Spectral Density) RBW=100kHz	
Test Model	<input type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> Channel 1: 2412MHz <input type="checkbox"/> Channel 3: 2422MHz

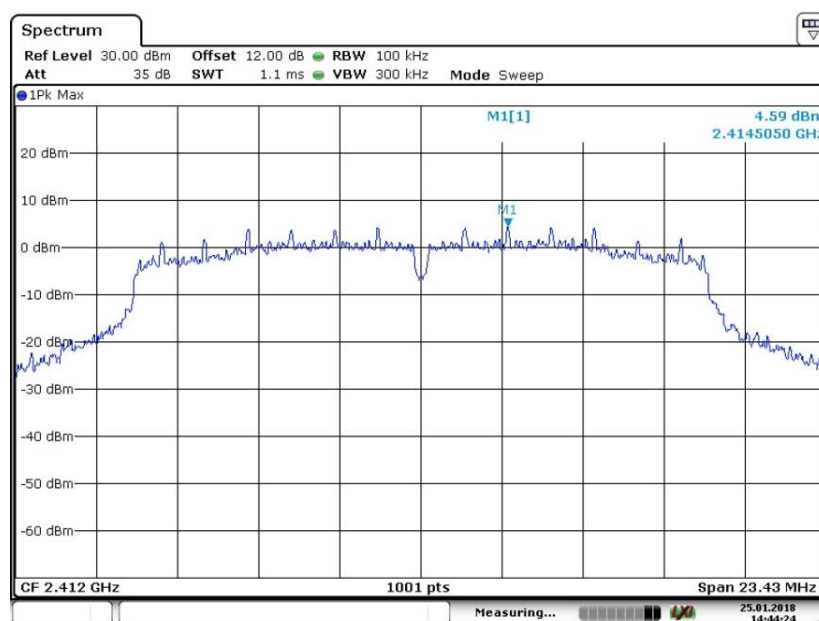


Date: 25 JAN 2018 14:44:24

Unwanted Emissions in non-restricted frequency bands	
Test Model	<input type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> Channel 1: 2412MHz <input type="checkbox"/> Channel 3: 2422MHz

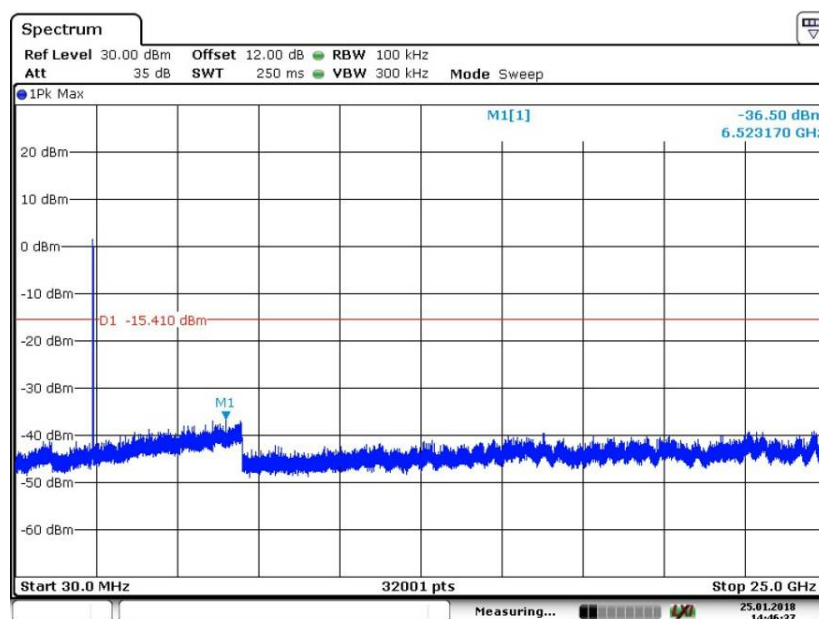


Date: 25 JAN 2018 14:46:37

Test Model	Band edge			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		

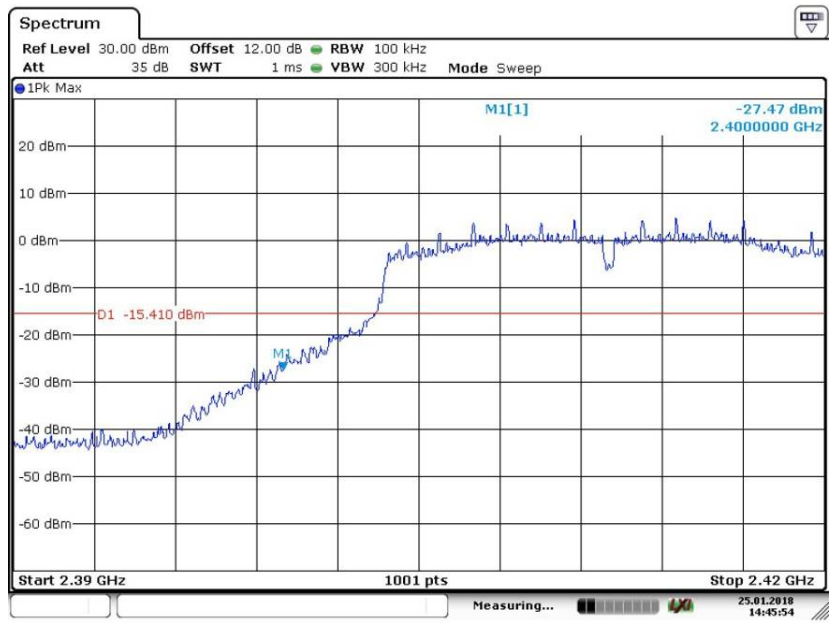


Date: 25. JAN 2018 14:45:54

Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	Channel 6: 2437MHz			

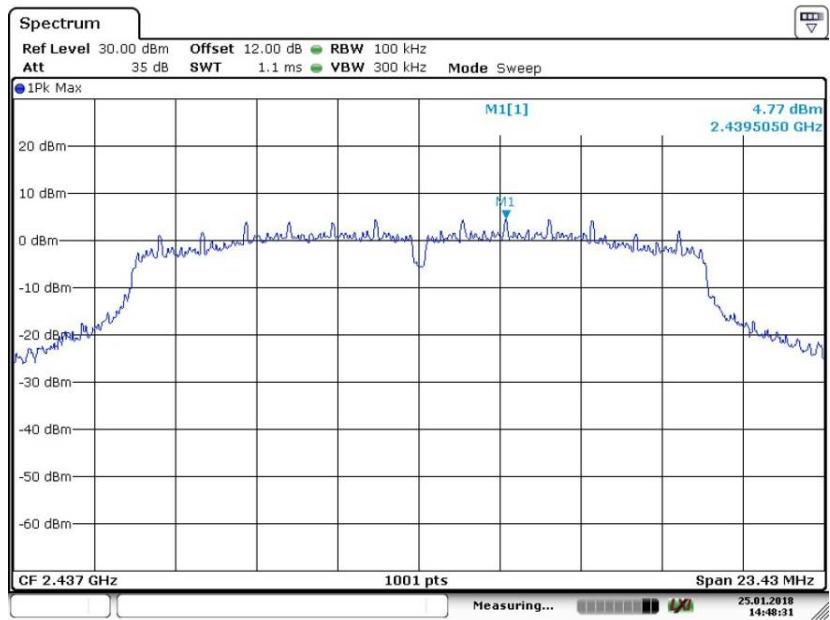


Date: 25. JAN 2018 14:48:31

Test Model	Unwanted Emissions In Non-Restricted Frequency Bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
Channel 6: 2437MHz				

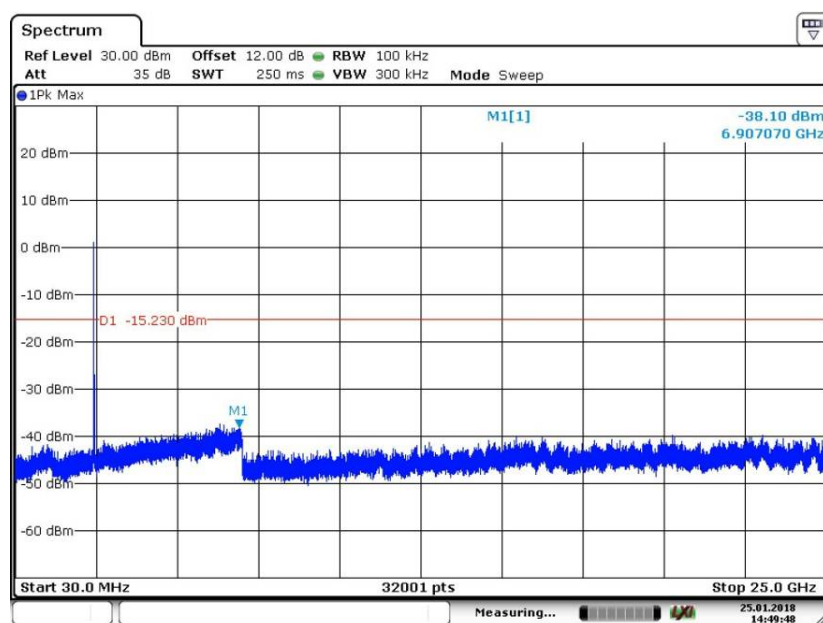


Date: 25 JAN 2018 14:49:48

Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
<input checked="" type="checkbox"/> Channel 11: 2462MHz <input type="checkbox"/> Channel 9: 2452MHz				

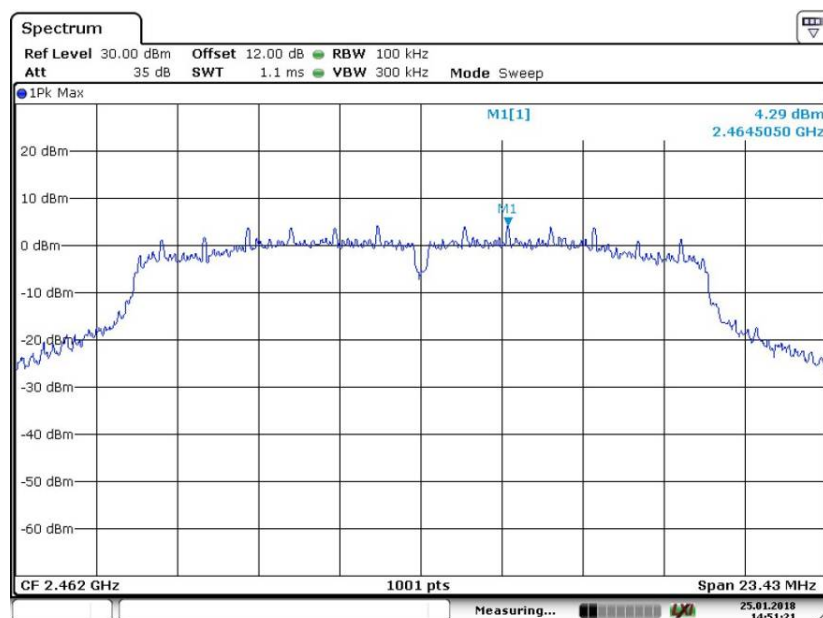


Date: 25 JAN 2018 14:51:21

Test Model	Unwanted Emissions In Non-Restricted Frequency Bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz		

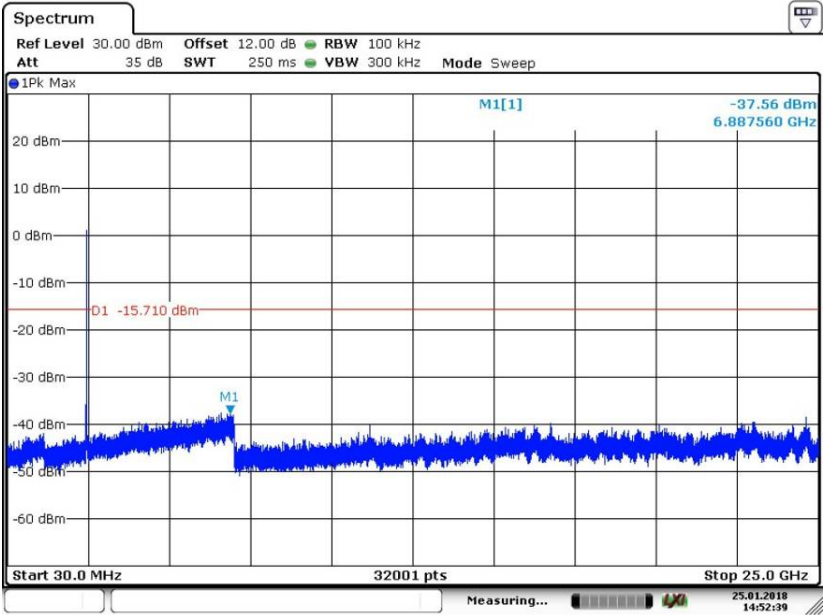

Date: 25. JAN 2018 14:52:39


Test Model	Band edge			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz		

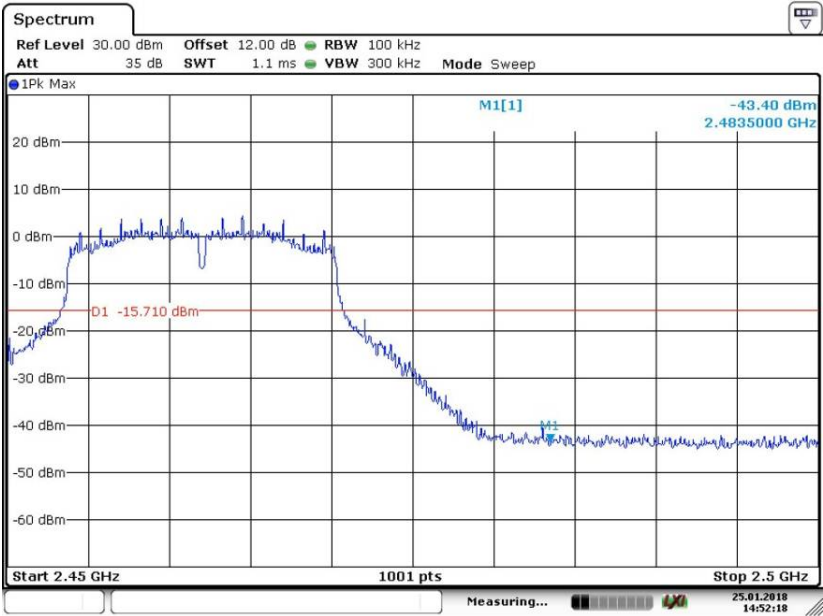

Date: 25. JAN 2018 14:52:18


ANT 1:

Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		

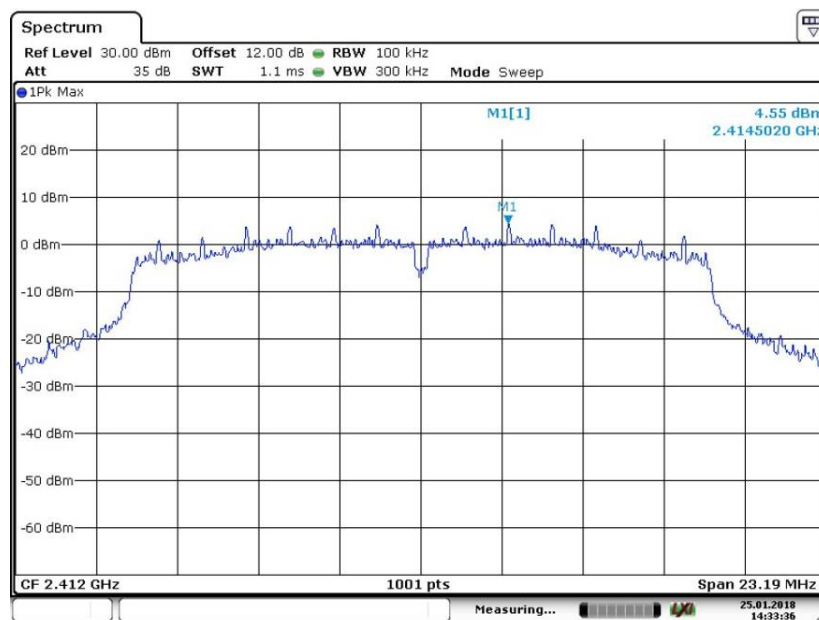


Date: 25. JAN. 2018 14:33:36

Test Model	Unwanted Emissions in non-restricted frequency bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		

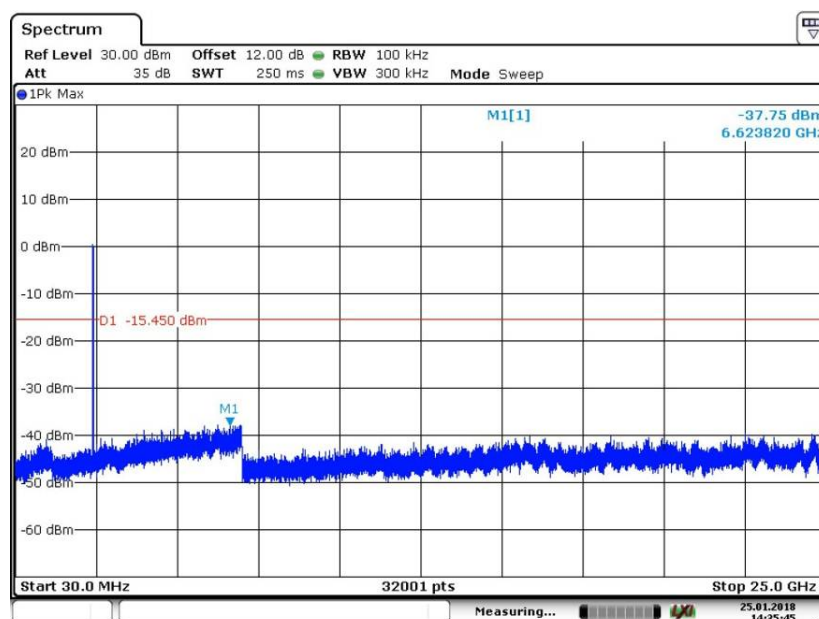


Date: 25. JAN. 2018 14:35:45

Test Model	Band edge			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		

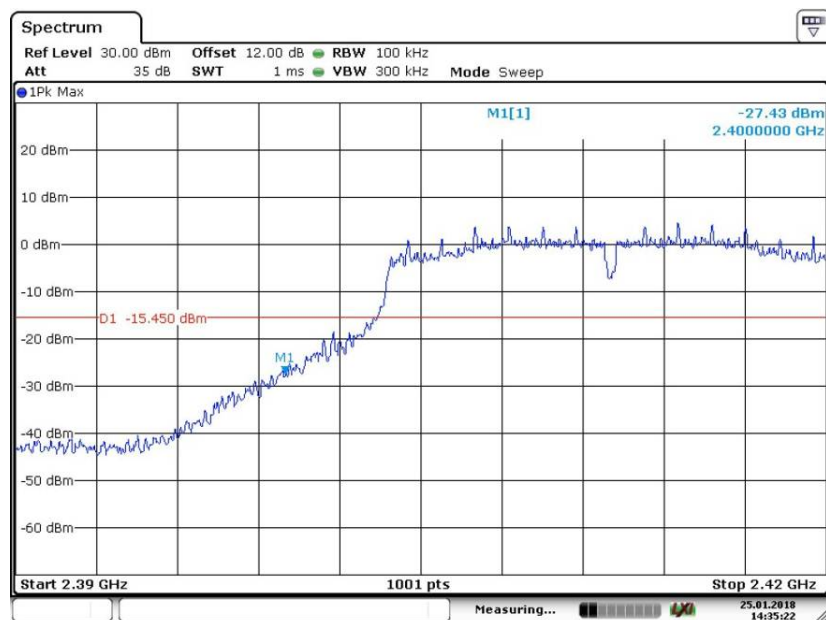


Date: 25. JAN 2018 14:35:22

Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	Channel 6: 2437MHz			

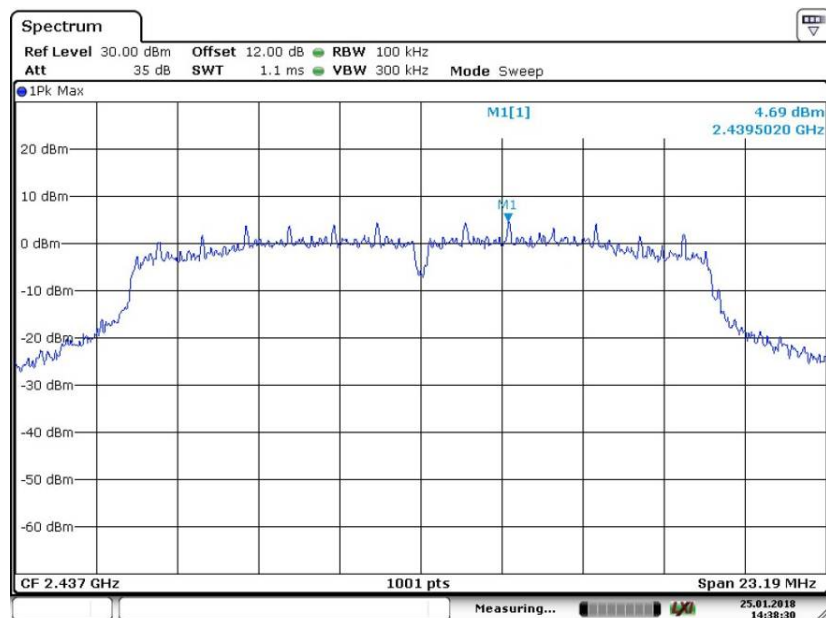


Date: 25. JAN 2018 14:38:31

Test Model	Unwanted Emissions In Non-Restricted Frequency Bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
Channel 6: 2437MHz				

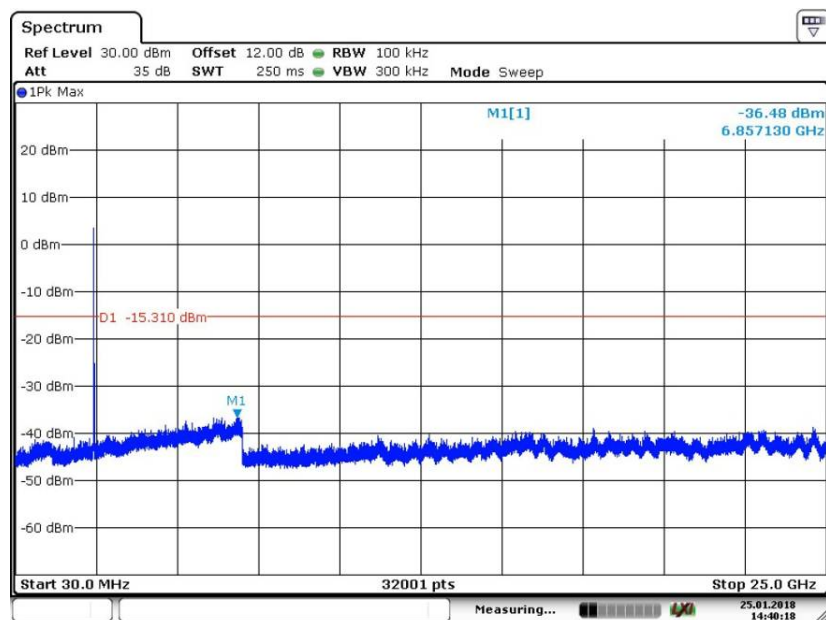


Date: 25 JAN 2018 14:40:18

Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
<input checked="" type="checkbox"/> Channel 11: 2462MHz <input type="checkbox"/> Channel 9: 2452MHz				

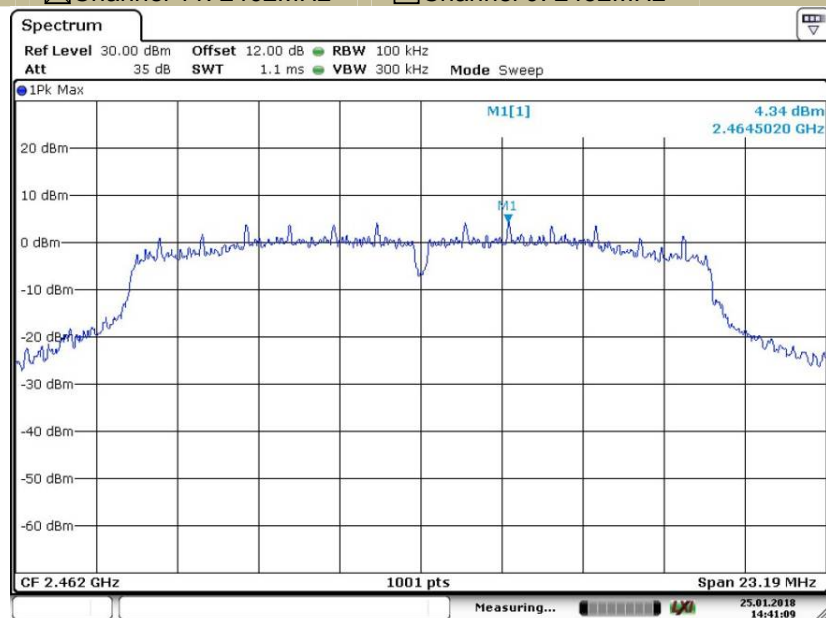


Date: 25 JAN 2018 14:41:09

Test Model	Unwanted Emissions In Non-Restricted Frequency Bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz		

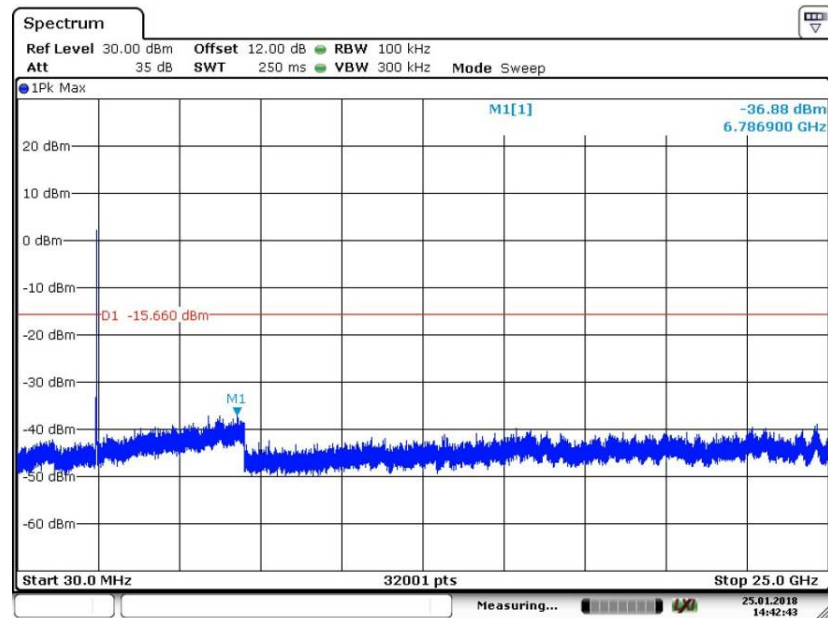

Date: 25. JAN 2018 14:42:43

Test Model	Band edge			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz		

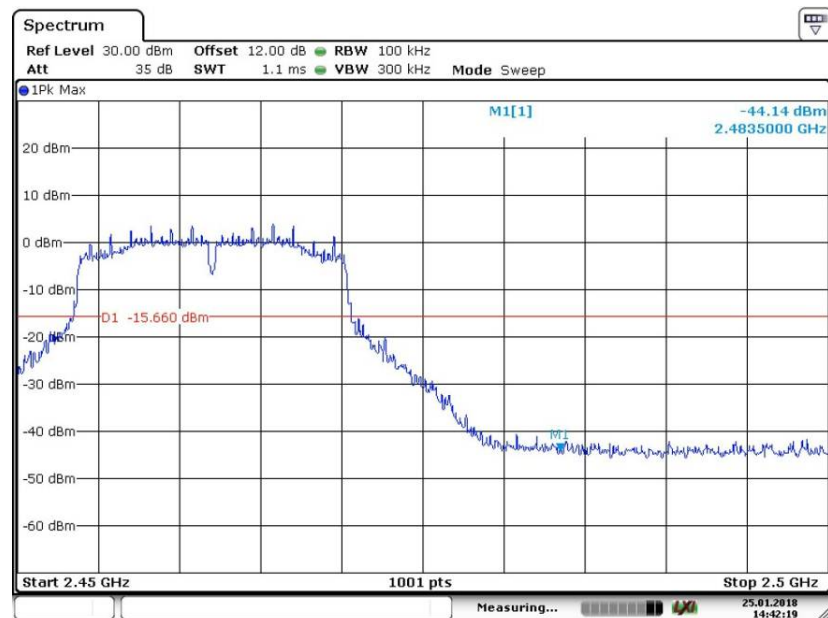

Date: 25. JAN 2018 14:42:18

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB558074 DTS 01 Meas. Guidance v04

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature: 24°C
 Humidity: 53 %
 Test mode: TX Mode

Test Date: April 10, 2018
 Test By: King Kong

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All modes 2.4G 802.11b/g/n and two antenna have been tested, and the worst result 802.11b recorded was report as below:

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11b

Test Date : April 10, 2018
 Test By: King Kong
 Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824.00	V	46.86	37.16	74.00	54.00	-27.14	-16.84
7238.00	V	47.72	38.48	74.00	54.00	-26.28	-15.52
9373.00	V	52.39	34.91	74.00	54.00	-21.61	-19.09
4824.00	H	46.26	37.92	74.00	54.00	-27.74	-16.08
7237.00	H	47.32	38.74	74.00	54.00	-26.68	-15.26
9978.00	H	52.76	34.56	74.00	54.00	-21.24	-19.44

Temperature : 26°C
Humidity : 60 %
Test mode: 802.11b

Test Date : April 10, 2018
Test By: King Kong
Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4876.00	V	46.25	37.39	74.00	54.00	-27.75	-16.61
7312.00	V	48.31	39.2	74.00	54.00	-25.69	-14.80
9327.00	V	51.47	34.87	74.00	54.00	-22.53	-19.13
4875.00	H	46.62	37.7	74.00	54.00	-27.38	-16.30
7313.00	H	47.45	38.09	74.00	54.00	-26.55	-15.91
9934.00	H	53.43	34.09	74.00	54.00	-20.57	-19.91

Temperature : 26°C
Humidity : 60 %
Test mode: 802.11b

Test Date : April 10, 2018
Test By: King Kong
Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4926.00	V	46.77	37.34	74.00	54.00	-27.23	-16.66
7386.00	V	48.25	39.77	74.00	54.00	-25.75	-14.23
9257.00	V	50.7	35.39	74.00	54.00	-23.30	-18.61
4925.00	H	47.6	37.32	74.00	54.00	-26.40	-16.68
7388.00	H	47.16	37.84	74.00	54.00	-26.84	-16.16
9868.00	H	53.56	34.49	74.00	54.00	-20.44	-19.51

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level + Probe Factor +Cable Loss.
(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All modes 2.4G 802.11b/g/n and two antenna have been tested, and the worst result 802.11b recorded was report as below:

Temperature :	26°C	Test Date :	April 10, 2018
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
2390.00	H	64.88	74.00	-9.12	48.21	54.00	-5.79
2389.68	V	64.84	74.00	-9.16	48.01	54.00	-5.99

Temperature :	26°C	Test Date :	April 10, 2018
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11b	Frequency:	Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
2484.14	H	60.78	74.00	-13.22	46.10	54.00	-7.90
2483.55	V	61.69	74.00	-12.31	47.26	54.00	-6.74

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz			
Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz	<input type="checkbox"/> 802.11n(HT40)
	VBW=3MHz		Polarity: H
Test By: King Kong			

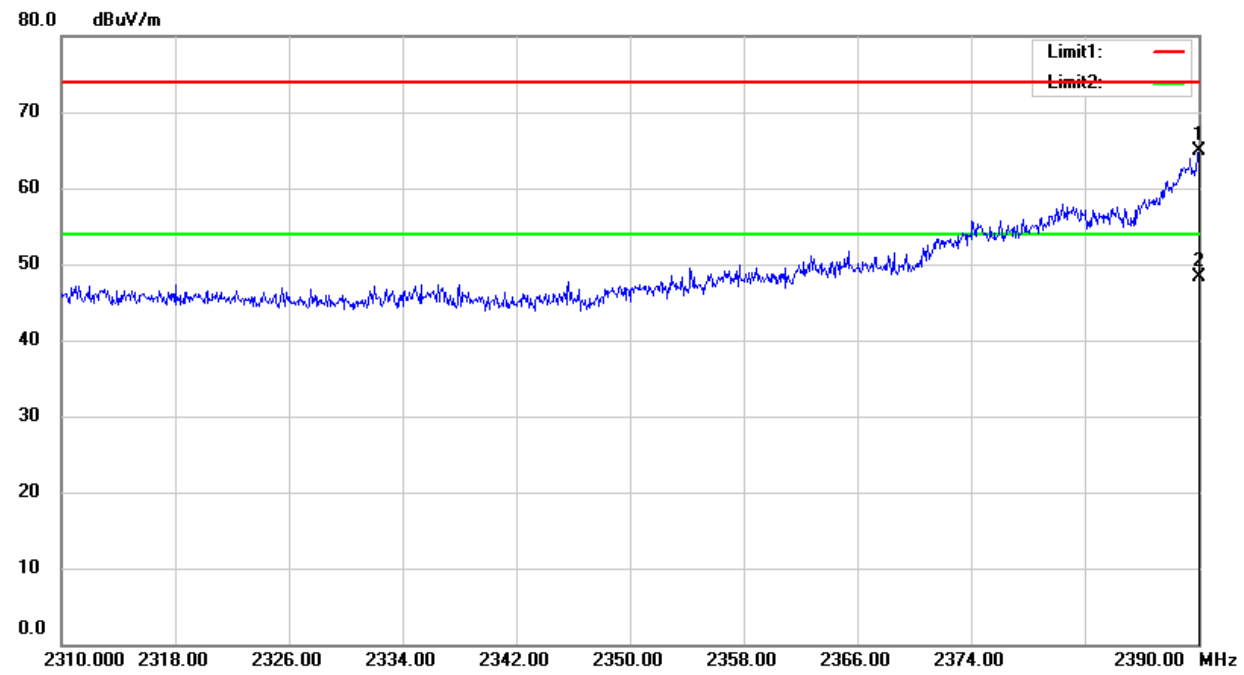


Spurious Emission in Restricted Band 2310-2390MHz			
Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz	<input type="checkbox"/> 802.11n(HT40)
	VBW=3MHz		Polarity: V
Test By: King Kong			

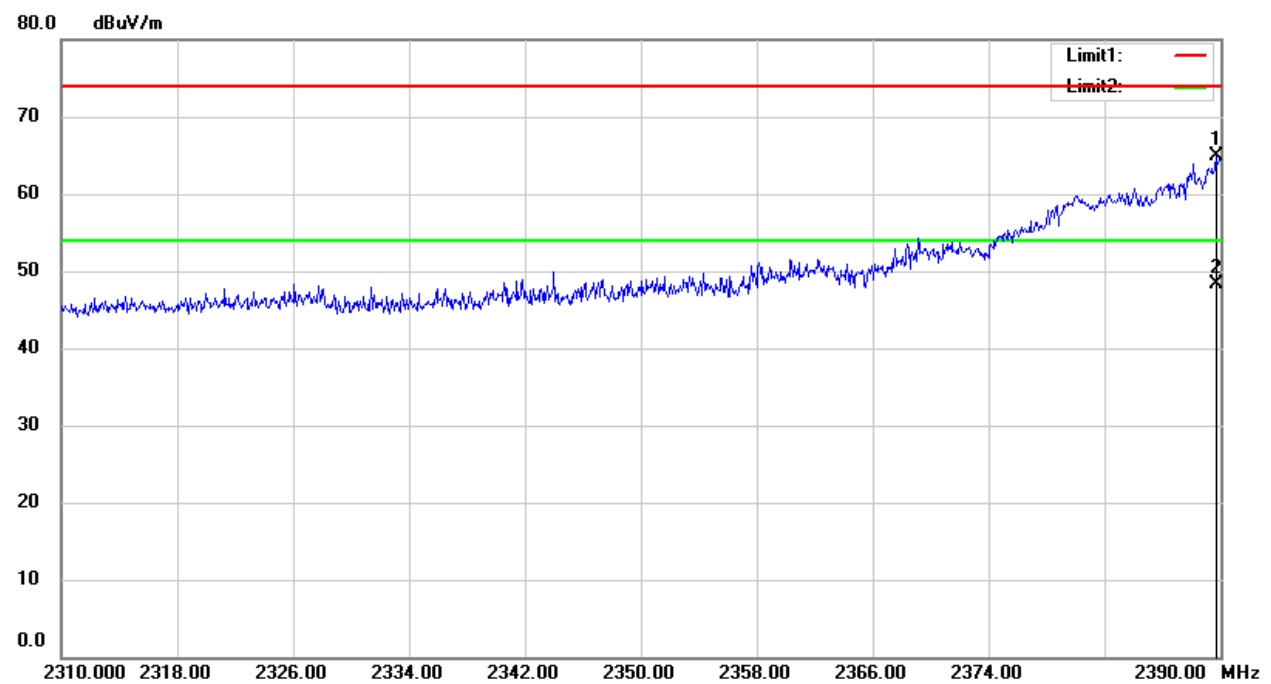

Spurious Emission in Restricted Band 2483.5-2500MHz				
Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: H	
	VBW=3MHz		Test By: King Kong	

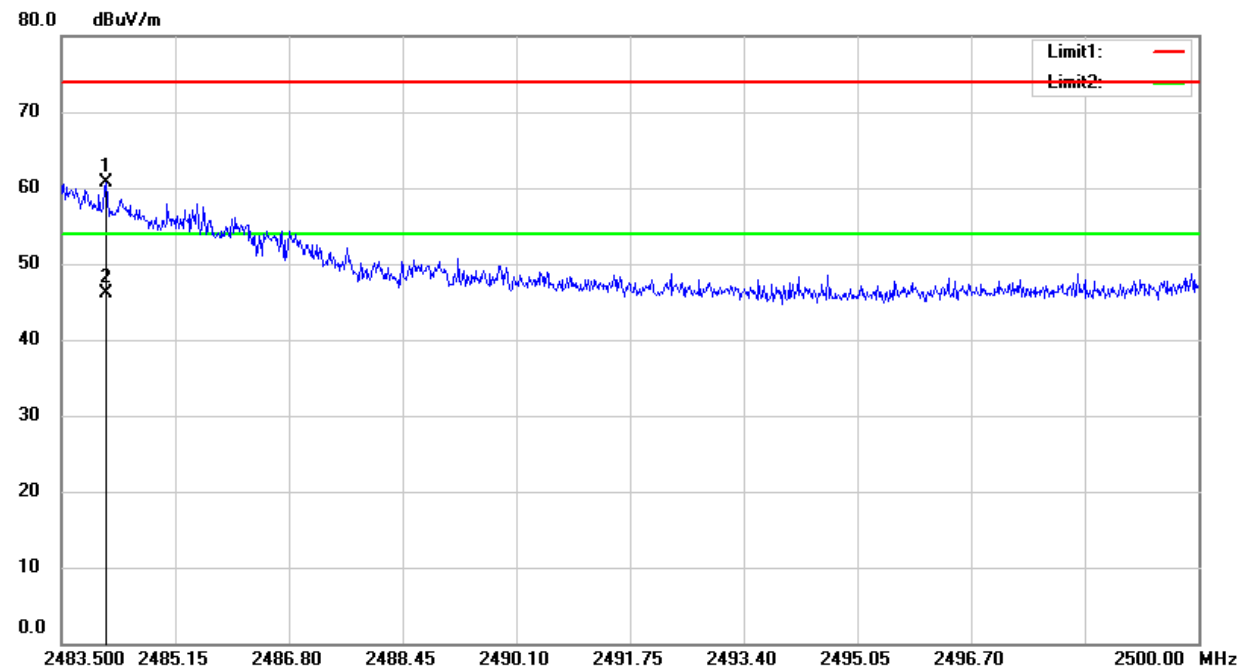


Spurious Emission in Restricted Band2483.5-2500MHz				
Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: V	
	VBW=3MHz			
Test By: King Kong				

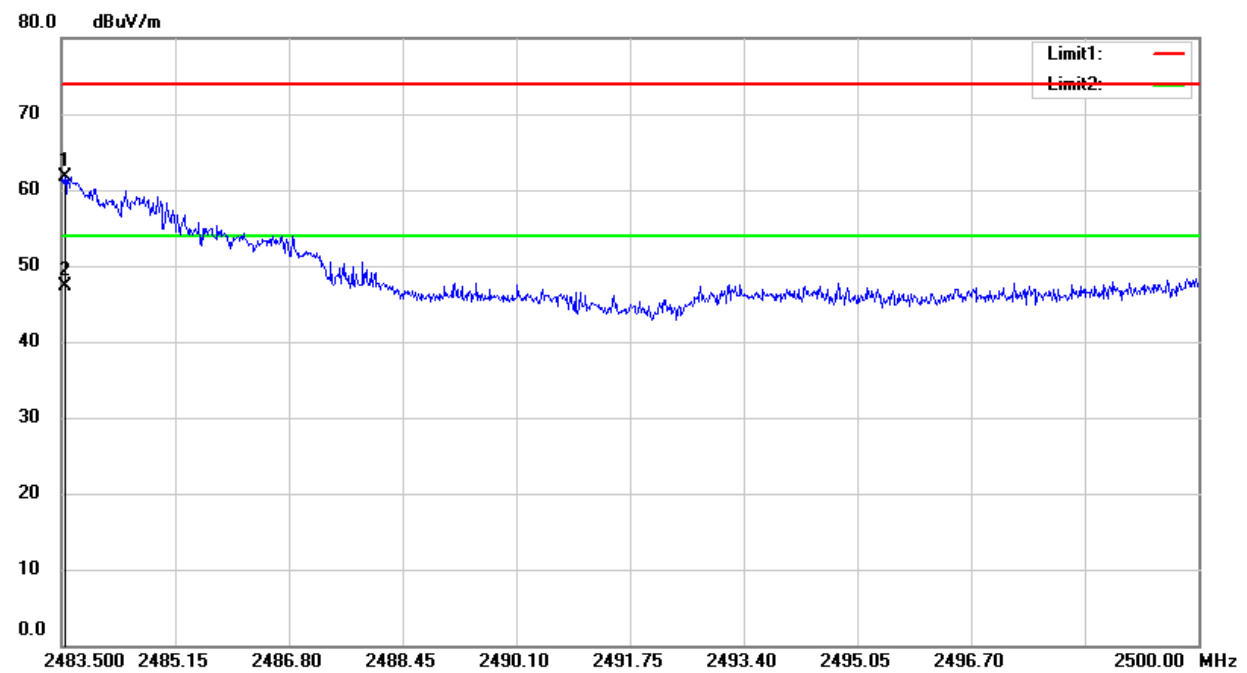

■ Spurious Emission below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n and two antennas have been tested, and the worst result recorded was report as below:

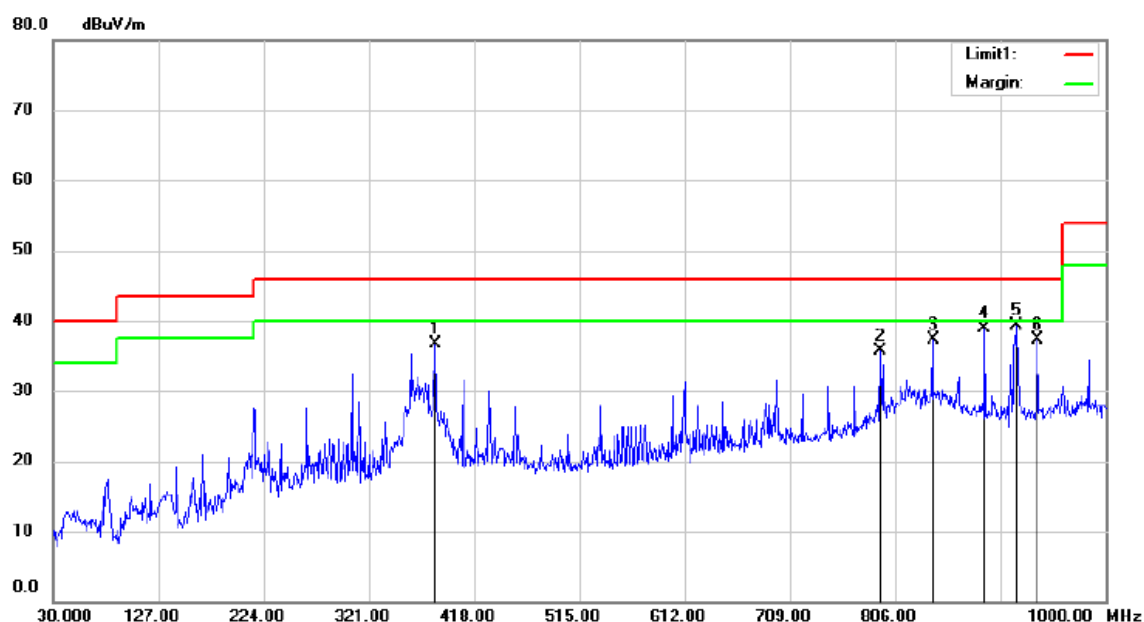

Site 3m Chamber 3#

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode: 802.11b Low channel

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		382.1100	46.68	-9.92	36.76	46.00	-9.24	QP		
2		792.4200	37.79	-2.09	35.70	46.00	-10.30	QP		
3		840.9200	38.74	-1.40	37.34	46.00	-8.66	QP		
4		888.4500	39.65	-0.71	38.94	46.00	-7.06	QP		
5	*	917.5500	39.30	0.10	39.40	46.00	-6.60	QP		
6		936.9500	36.90	0.45	37.35	46.00	-8.65	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

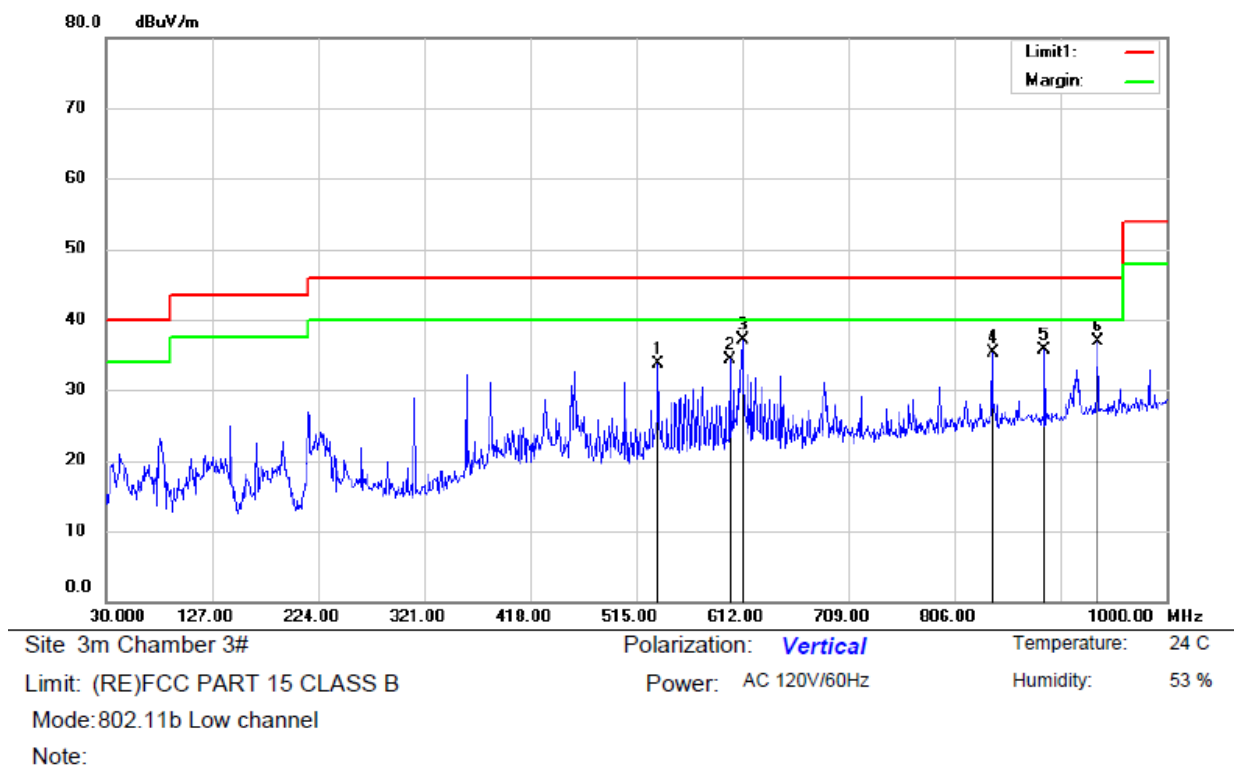

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		535.3700	40.42	-6.74	33.68	46.00	-12.32	QP		
2		600.3600	39.35	-4.98	34.37	46.00	-11.63	QP		
3	*	612.0000	41.86	-4.77	37.09	46.00	-8.91	QP		
4		840.9200	36.73	-1.40	35.33	46.00	-10.67	QP		
5		888.4500	36.36	-0.71	35.65	46.00	-10.35	QP		
6		936.9500	36.39	0.45	36.84	46.00	-9.16	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

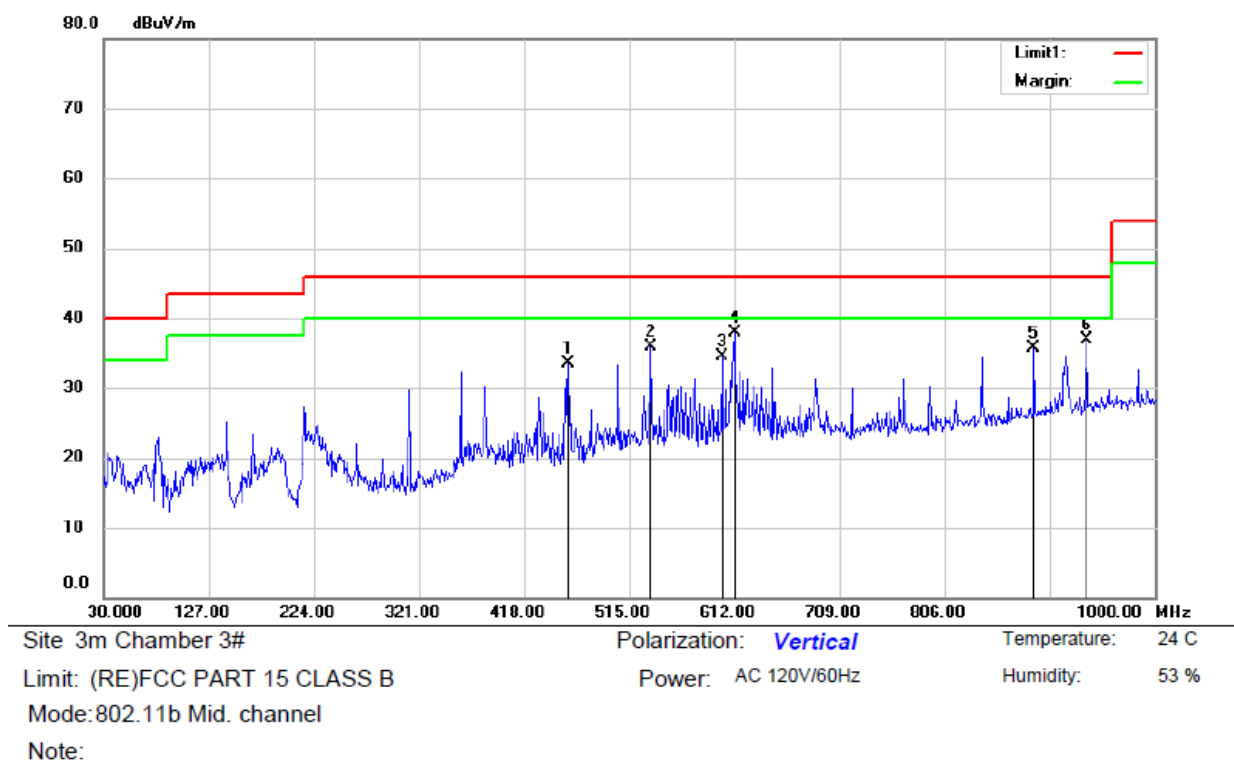

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		458.7400	41.87	-8.41	33.46	46.00	-12.54	QP		
2		535.3700	42.68	-6.74	35.94	46.00	-10.06	QP		
3		600.3600	39.47	-4.98	34.49	46.00	-11.51	QP		
4	*	612.0000	42.68	-4.77	37.91	46.00	-8.09	QP		
5		888.4500	36.45	-0.71	35.74	46.00	-10.26	QP		
6		936.9500	36.41	0.45	36.86	46.00	-9.14	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

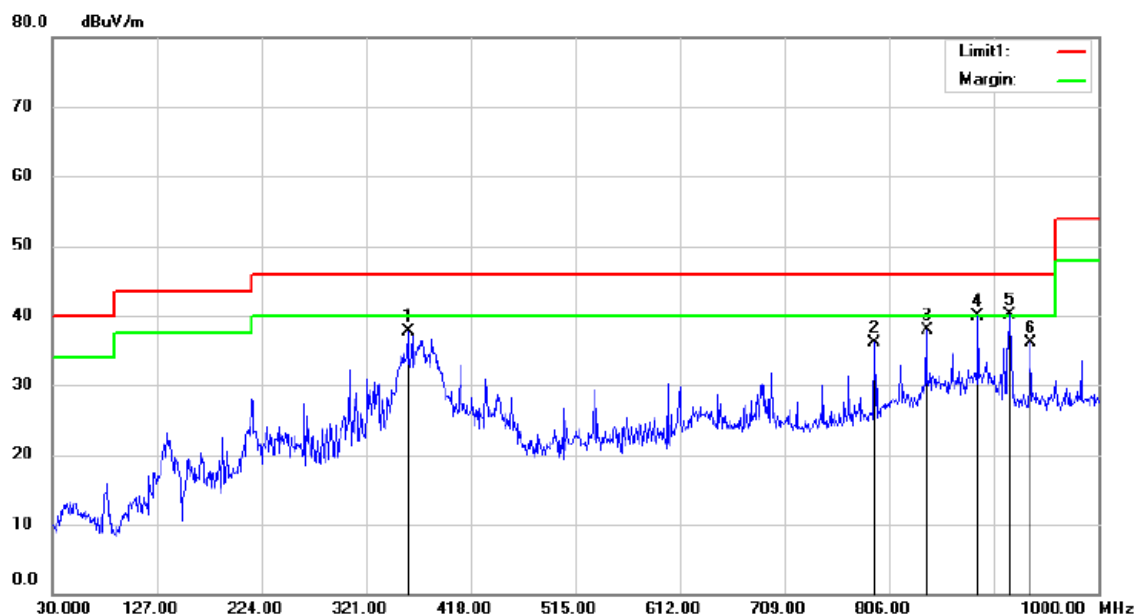

Site 3m Chamber 3#

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode: 802.11b Mid. channel

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		359.8000	48.29	-10.64	37.65	46.00	-8.35	QP		
2		792.4200	38.17	-2.09	36.08	46.00	-9.92	QP		
3		840.9200	39.33	-1.40	37.93	46.00	-8.07	QP		
4		888.4500	40.54	-0.71	39.83	46.00	-6.17	QP		
5	*	917.5500	39.91	0.10	40.01	46.00	-5.99	QP		
6		936.9500	35.67	0.45	36.12	46.00	-9.88	QP		

*:Maximum data x:Over limit l:over margin


Operator: KK

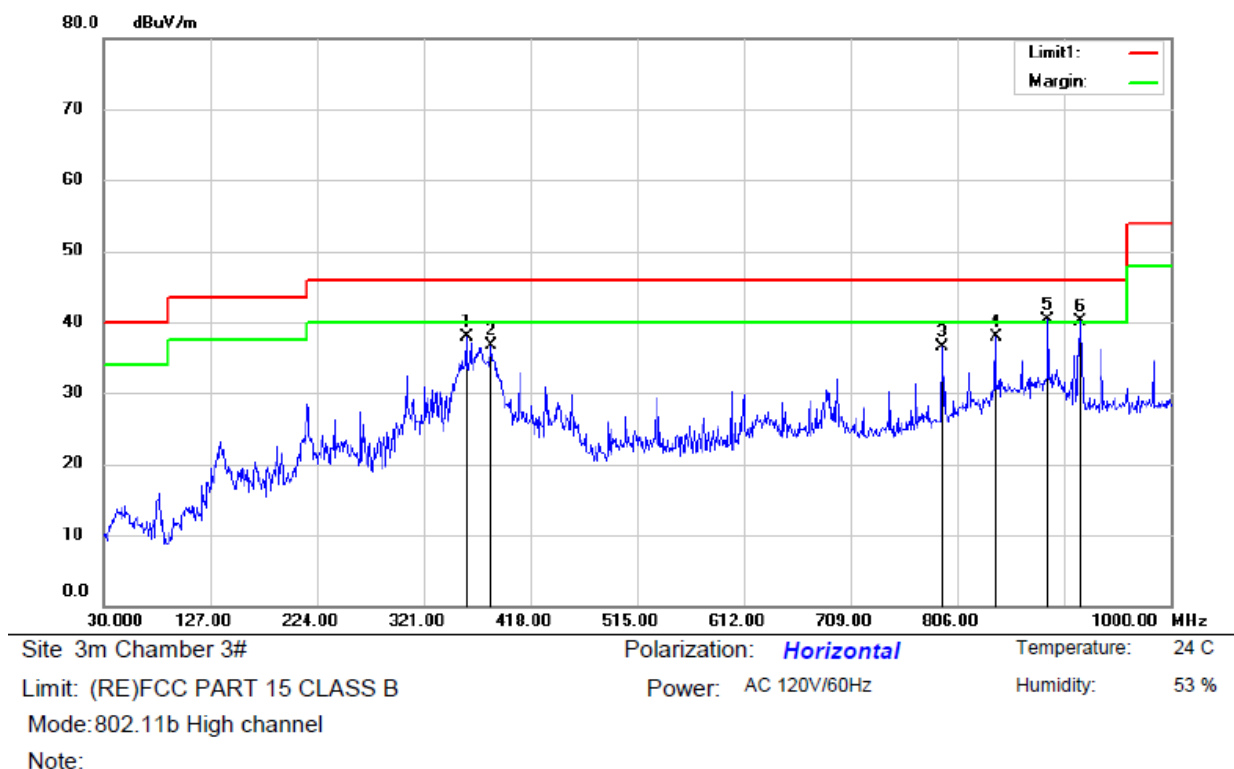

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		359.8000	48.60	-10.64	37.96	46.00	-8.04	QP		
2		382.1100	46.67	-9.92	36.75	46.00	-9.25	QP		
3		792.4200	38.68	-2.09	36.59	46.00	-9.41	QP		
4		840.9200	39.35	-1.40	37.95	46.00	-8.05	QP		
5	*	888.4500	40.98	-0.71	40.27	46.00	-5.73	QP		
6	!	917.5500	39.91	0.10	40.01	46.00	-5.99	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

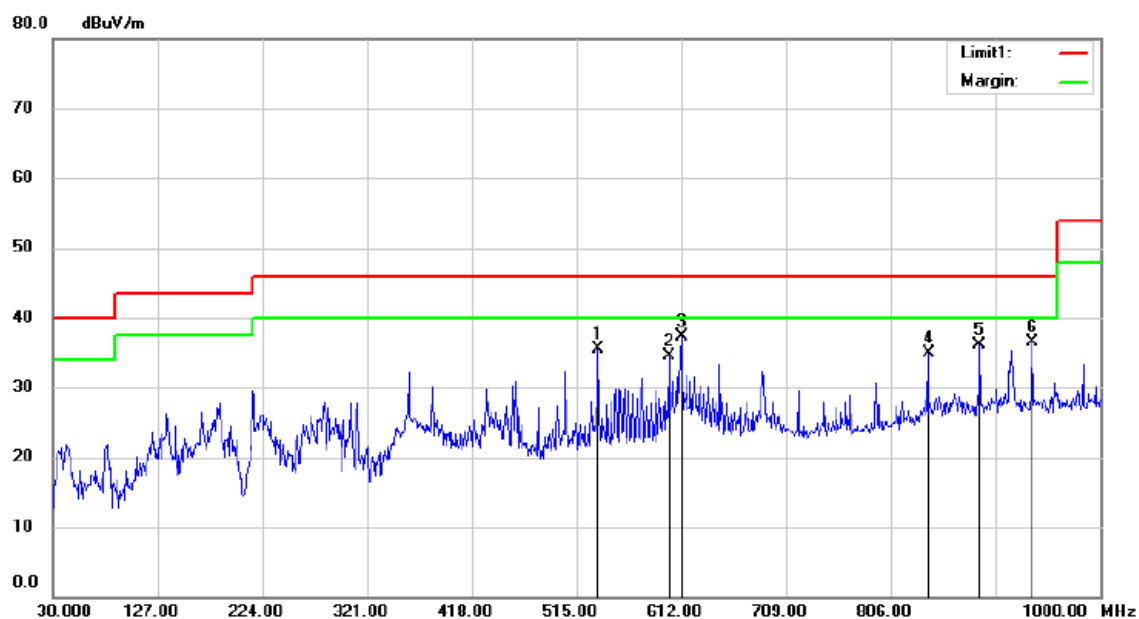

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		535.3700	42.19	-6.74	35.45	46.00	-10.55	QP		
2		600.3600	39.49	-4.98	34.51	46.00	-11.49	QP		
3	*	612.0000	41.98	-4.77	37.21	46.00	-8.79	QP		
4		840.9200	36.39	-1.40	34.99	46.00	-11.01	QP		
5		888.4500	36.73	-0.71	36.02	46.00	-9.98	QP		
6		936.9500	35.97	0.45	36.42	46.00	-9.58	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

All modes 2.4G 802.11b/g/n with 120V/240V have been tested, and the worst result recorded was report as below:

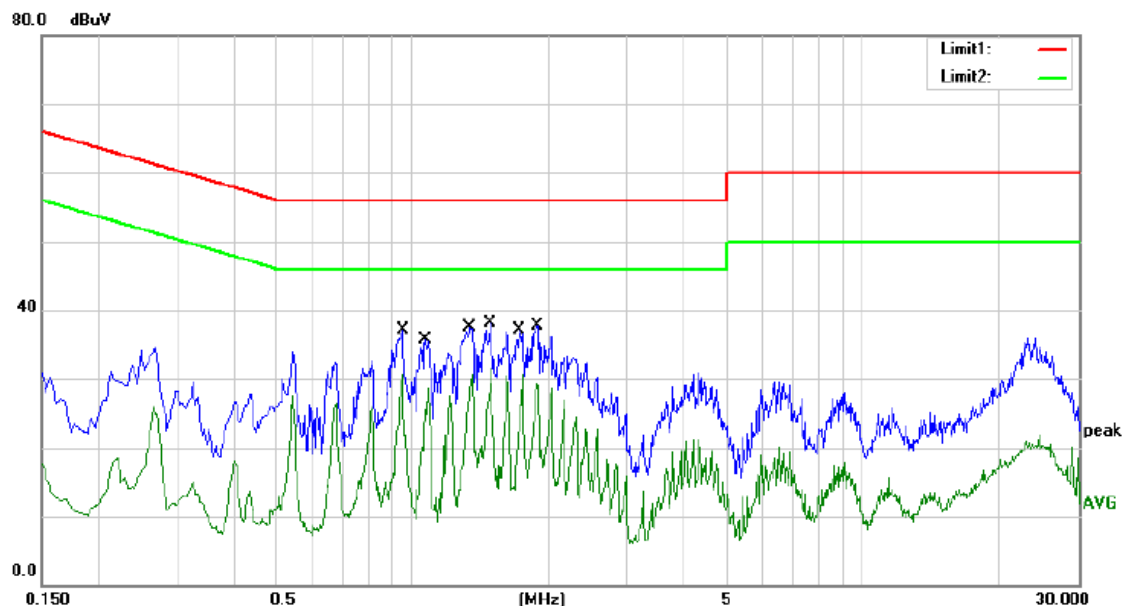

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 55 %

Mode: 802.11b 2412 TX

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.9500	37.15	0.00	37.15	56.00	-18.85	QP	
2		0.9500	30.71	0.00	30.71	46.00	-15.29	AVG	
3		1.0700	35.74	0.00	35.74	56.00	-20.26	QP	
4		1.0700	28.70	0.00	28.70	46.00	-17.30	AVG	
5		1.3420	37.42	0.00	37.42	56.00	-18.58	QP	
6		1.3420	30.66	0.00	30.66	46.00	-15.34	AVG	
7		1.4900	38.13	0.00	38.13	56.00	-17.87	QP	
8	*	1.4900	31.55	0.00	31.55	46.00	-14.45	AVG	
9		1.7220	37.01	0.00	37.01	56.00	-18.99	QP	
10		1.7220	30.49	0.00	30.49	46.00	-15.51	AVG	
11		1.8940	37.69	0.00	37.69	56.00	-18.31	QP	
12		1.8940	29.36	0.00	29.36	46.00	-16.64	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

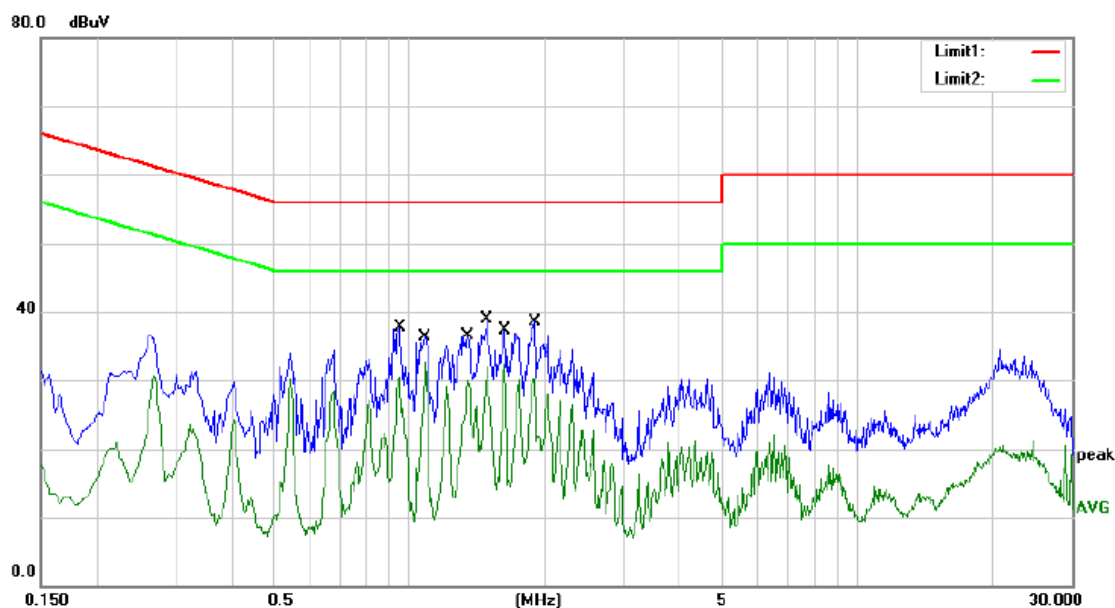

Site Conduction #1

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: 802.11b 2412 TX

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.9500	37.63	0.00	37.63	56.00	-18.37	QP	
2		0.9500	30.56	0.00	30.56	46.00	-15.44	AVG	
3		1.0860	36.27	0.00	36.27	56.00	-19.73	QP	
4	*	1.0860	32.73	0.00	32.73	46.00	-13.27	AVG	
5		1.3460	36.44	0.00	36.44	56.00	-19.56	QP	
6		1.3460	29.95	0.00	29.95	46.00	-16.05	AVG	
7		1.4900	38.92	0.00	38.92	56.00	-17.08	QP	
8		1.4900	31.94	0.00	31.94	46.00	-14.06	AVG	
9		1.6300	37.21	0.00	37.21	56.00	-18.79	QP	
10		1.6300	32.38	0.00	32.38	46.00	-13.62	AVG	
11		1.8980	38.58	0.00	38.58	56.00	-17.42	QP	
12		1.8980	30.29	0.00	30.29	46.00	-15.71	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

The EUT'S with WIFI function has two FPC antennas. The antenna0's gain is 2.77dBi, The antenna1's gain is 2.46dBi, and the two antennas can't be replaced by the user which in accordance to section 15.203, please refer to the photos.