



Report No.: TBR-C-202409-0194-8
Page: 1 of 31

Radio Test Report

FCC ID:2AUDF-CQ425B&IC:29207-CQ425B

Report No.	:	TBR-C-202409-0194-8
Applicant	:	Shenzhen ADDX Innovation Technology co., LTD.
Equipment Under Test (EUT)		
EUT Name	:	Smart Battery Camera
Model No.	:	CQ1
HVIN	:	CQ125
Series Model No.	:	X85,X88,D3,D3B,D3K,D3KD,BC3,BC52,A16-V66P,CN-V30PB, KP-CA189, PBC1001,SC-2028WS,SC-2028WSP,SN-VP01,Uho-B85, V-B1S,VIS-SMAR505,BY-X85,CQ1S, CQ1H ,CQ1F ,CQ1X ,CQ1K , CQ1D,CQ4
Brand Name	:	N/A
Sample ID	:	HC-C-202409-0194-01-01&HC-C-202409-0194-01-02
Receipt Date	:	2024-09-30
Test Date	:	2024-09-30 to 2024-11-14
Issue Date	:	2024-11-14
Standards	:	FCC Part 15 Subpart C 15.247 RSS-247 Issue 3 August 2023 RSS-Gen Issue 5 April 2018+Amendment 1 (March 2019)+Amendment 2 (February 2021)
Test Method	:	ANSI C63.10: 2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Conclusions	:	PASS
In the configuration tested, the EUT complied with the standards specified above.		

Test By	:	Jolin Lee
Reviewed By	:	Henry Huang
Approved By	:	Ivan Su



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0

Contents

CONTENTS	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	7
1.5 Description of Test Mode	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility.....	9
2. TEST SUMMARY.....	10
3. TEST SOFTWARE	10
4. TEST EQUIPMENT AND TEST SITE	11
5. CONDUCTED EMISSION	12
5.1 Test Standard and Limit	12
5.2 Test Setup.....	12
5.3 Test Procedure	12
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode	13
5.6 Test Data.....	13
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS.....	14
6.1 Test Standard and Limit	14
6.2 Test Setup.....	15
6.3 Test Procedure	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Mode	17
6.6 Test Data.....	17
7. RESTRICTED BANDS AND BAND EDGE REQUIREMENT	18
7.1 Test Standard and Limit	18
7.2 Test Setup.....	18
7.3 Test Procedure	19
7.4 Deviation From Test Standard.....	19
7.5 EUT Operating Mode	19
7.6 Test Data.....	19
8. BANDWIDTH TEST.....	20
8.1 Test Standard and Limit	20
8.2 Test Setup.....	20
8.3 Test Procedure	20
8.4 Deviation From Test Standard.....	21
8.5 EUT Operating Mode	21
8.6 Test Data.....	21



9.	PEAK OUTPUT POWER.....	22
9.1	Test Standard and Limit	22
9.2	Test Setup.....	22
9.3	Test Procedure	22
9.4	Deviation From Test Standard.....	22
9.5	EUT Operating Mode	22
9.6	Test Data.....	22
10.	POWER SPECTRAL DENSITY	23
10.1	Test Standard and Limit	23
10.2	Test Setup	23
10.3	Test Procedure	23
10.4	Deviation From Test Standard	23
10.5	Antenna Connected Construction.....	23
10.6	Test Data	23
11.	ANTENNA REQUIREMENT	24
11.1	Test Standard and Limit	24
11.2	Deviation From Test Standard	24
11.3	Antenna Connected Construction.....	24
11.4	Test Data	24
	ATTACHMENT A-- CONDUCTED EMISSION TEST DATA.....	25
	ATTACHMENT B--UNWANTED EMISSIONS DATA.....	27



Revision History

Report No.	Version	Description	Issued Date
TBR-C-202409-0194-8	Rev.01	Initial issue of report	2024-11-14



1. eneral Information about EUT

1.1 Client Information

Applicant	:	Shenzhen ADDX Innovation Technology co., LTD.
Address	:	NO.2013, Building 9B-3. Shenzhen Bay, Technology and Ecological Park, Nanshan District, shenzhen, China
Manufacturer	:	Shenzhen ADDX Innovation Technology co., LTD.
Address	:	NO.2013, Building 9B-3. Shenzhen Bay, Technology and Ecological Park, Nanshan District, shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Smart Battery Camera
Models No.	:	CQ1,X85,X88,D3,D3B,D3K,D3KD,BC3,BC52,A16-V66P, CN-V30PB,KP-CA189, PBC1001,SC-2028WS,SC-2028WSP, SN-VP01,Uho-B85,V-B1S,VIS-SMAR505,BY-X85,CQ1S, CQ1H ,CQ1F ,CQ1X ,CQ1K ,CQ1D,CQ4
Model Different	:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is model name.
Product Description	:	Operation Frequency: Bluetooth (BLE): 2402MHz~2480MHz
		Number of Channel: Bluetooth (BLE): 40 channels
		Antenna Gain: 0.5dBi PCB Antenna
		Modulation Type: GFSK
		Bit Rate of Transmitter: 1Mbps
Power Rating	:	USB Input:5V DC 3.7V 4400mAh Rechargeable Li-ion battery (XL18650-2200-2P) DC 3.6V 4400mAh Rechargeable Li-ion battery (INR18650) (Battery differences are mainly based on the applicant and model and capacity differences, only the worst mode is assessed (INR18650)
Software Version	:	V1.14.0
Hardware Version	:	CQ425_C01_V3

Remark:


The adapter provided by the TOBY ,the antenna gain from the manufacturer, the verified for the RF conduction test provided by TOBY test lab.The above antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.



(1) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

1.3 Block Diagram Showing the Configuration of System Tested

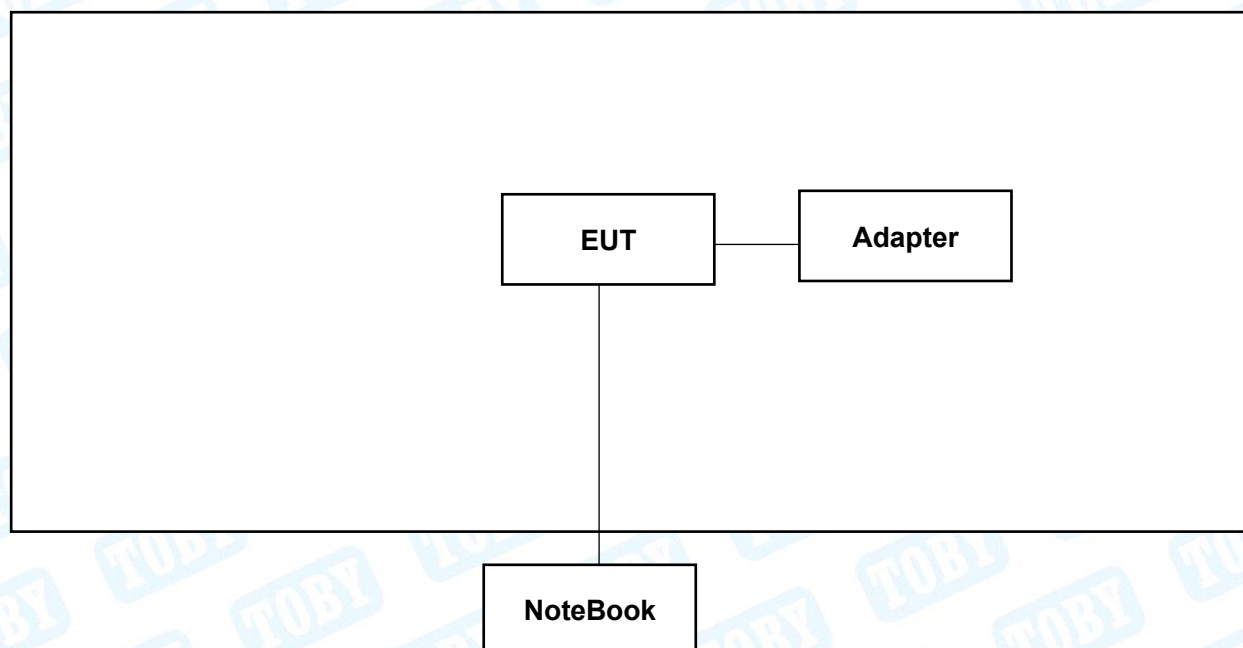

1.4 Description of Support Units

Equipment Information				
Name	Model	S/N	Manufacturer	Used “√”
Notebook	HYLR-WFQ9	AAMFPM1418000165	honour	√

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test(AC POWER)	
Final Test Mode	Description
Mode 1	TX Mode
For Radiated and RF Conducted Test	
Final Test Mode	Description
Mode 2	TX Mode
Mode 3	TX 1Mbps Mode (Channel 00/19/39)

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:
BLE Mode: GFSK Modulation Transmitting mode.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software Version	BT_Tool		
Frequency	2402 MHz	2440MHz	2480 MHz
BLE 1M	7	7	7

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB



1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

