

样 品 承 认 书

Version: V1.0

Project confirmation	Project approval	Quality confirmation	Quality approval	Confirmation date



1.Graphic for reference



Figure 2 0.8*20mmBT

Name	ANTENNA
Model	LT13
Frequency	2.4Ghz
Input impedance	50Ω
Allowed power	5mW
Working temp.	-25 ~ +65 °C
Storage temp.	-40 ~ +85 °C
Weight	0.25g
Antenna gain天线增益	-1dBi


2.OTA(Free Space)

Channel	TRP (dBm)	TIS (dBm)
0	6.3	-91.1
39	6.5	-91.3
78	6.6	-91.2




3.Field


Bluetooth 0 TRP

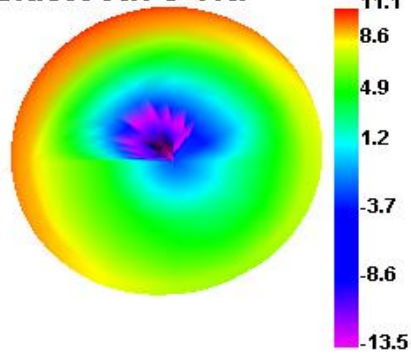


Bluetooth 0 TRP H

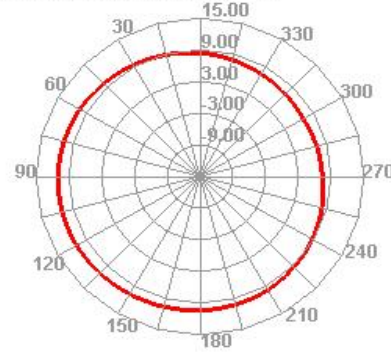


Bluetooth 39 TRP

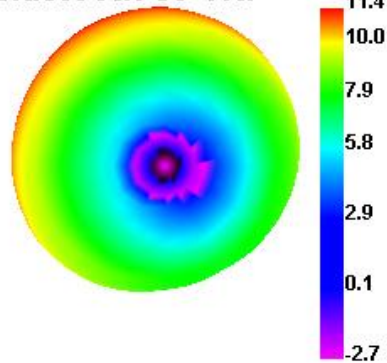


Bluetooth 39 TRP H

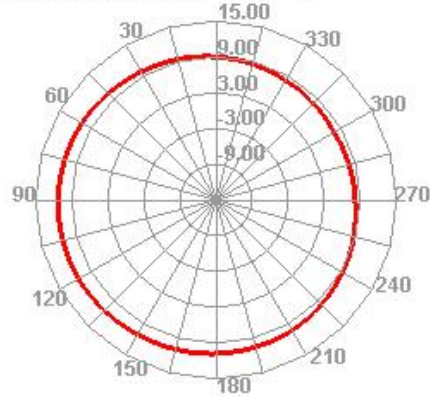

Bluetooth 78 TRP

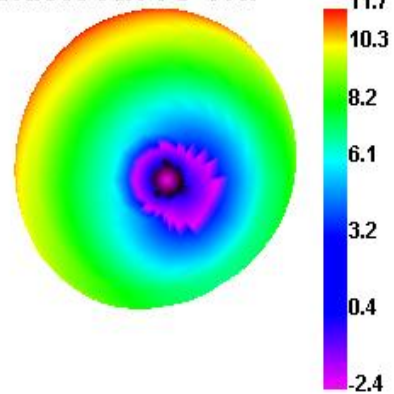

Bluetooth 78 TRP H

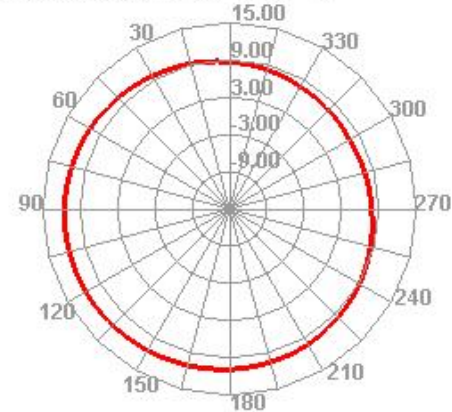

4. BT Test

Test term	Environment	Max pairing distance	BT Call distance	
BT	Office	16-18m	10-12m	

Technical drawing of a core wire (芯线) with dimensions:

- Core wire diameter: $\phi 0.80 \pm 0.1$
- Core wire length: 20.00 ± 2
- Core wire coating thickness: 1.50 ± 1

Label: 芯线上锡 (Core wire with tin coating)

深圳市麒鑫通达科技有限公司									
第三角法		图种		日期		页码		1 of 1	
图号	图名	图号	图名	图号	图名	图号	图名	图号	图名
10~20	±0.12	0	0.02	设计	设计	审核	审核	审核	审核
20~40	±0.15	1	0.03	审核	审核	审核	审核	审核	审核
40~	±0.20	2	0.04	审核	审核	审核	审核	审核	审核
修改或删减		位置		确认		确认		确认	
修改或删减		位置		确认		确认		确认	

规格: 直径0.80*长度20.0mm
芯线需上锡