

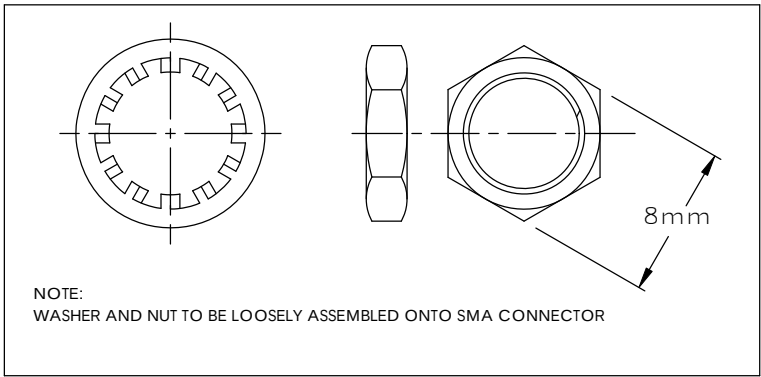


8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

No#	DESCRIPTION	Qty	MATERIAL
1	U.FL Connector	1	--
2	Ø 1.13 mm Cable	1	--
3	Heat Tubing	1	--
4	RP-SMA Jack Bulkhead	1	Gold Plated Brass

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	2/24/10	B.Puchaski
B	Added Notes, Corrected Description. #4 ECN# 4757	5/18/10	B.Puchaski

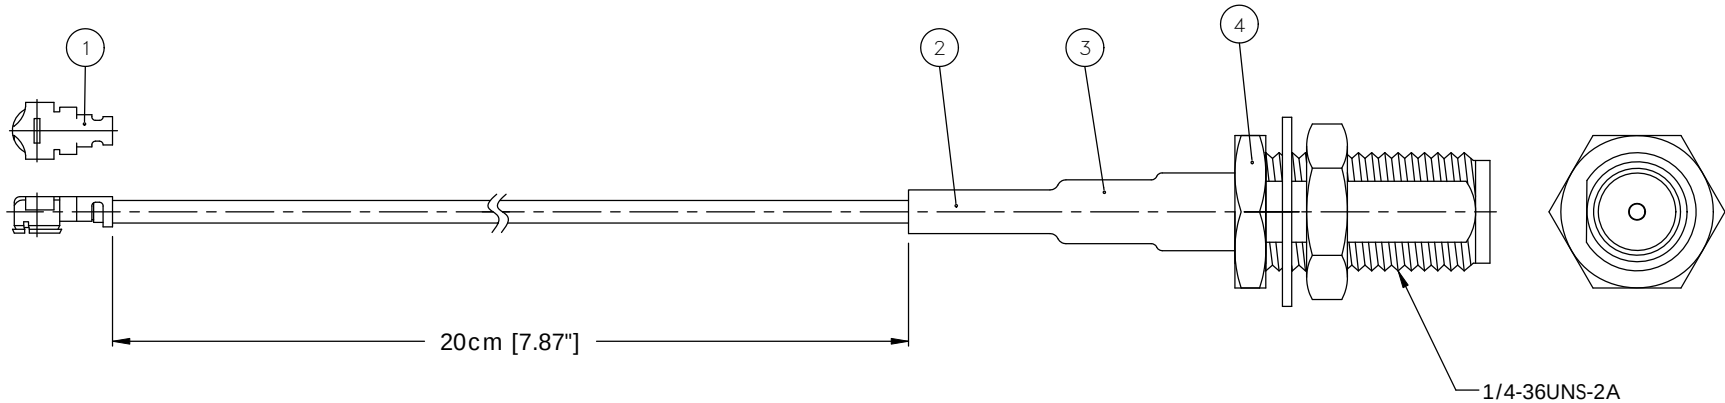

RECOMENDED HOLE DIMENSION
FOR SMA CONNECTOR

NOTES:

- 1- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
- 2- CABLE ASSEMBLY SHAL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS DIMENSIONAL TOLERANCES: .X = ±0.2 .XX = ±0.1 .XXX = ±0.05 ANGULAR TOLERANCES: ALL = ± 5° PROJECTION 	APPROVALS DRAWN BY B.Puchaski	DATE 02/24/10	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY M.Audas	DATE 02/24/10	
	APPROVED BY M.Audas	DATE 02/24/10	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION U.FL to RP-SMA Jack Bulkhead 20 cm - 1.13 Series Cable	
COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321
		DWG. NO. CA-UFLRSBQC20	REV. B
		SCALE: NONE	CAD FILE: CA-UFLRSBQC20.SLDDRW
		SHEET 1 OF 1	