HUBER+SUHNER[®] PLANAR ANTENNA FOR WIRELESS COMMUNICATION

SPA 2400/75/8/0/V

Technical Data

Electrical Properties	
Frequency range	2300 - 2800 MHz
Impedance	50 Ω
VSWR	1.5
Polarization	linear, vertical
Gain	7.5 dBi
3 dB beamwidth horizontal	75°
3 dB beamwidth vertical	70°
Downtilt	0°
Front to back ratio	20 dB
Max. power	75 W (CW) at 25°C

Mechanical Properties

meenamear r opernes	
Dimensions	101 x 80 x 20 mm
	(3.97" x 3.15" x 0.79")
Weight	0.13 kg (0.29 lbs.)
Radome material	ASA
Radome color	RAL 7035 (light grey)
Operating temperature range	- 40°C to + 80°C
Storage temperature range	- 40°C to + 80°C
Windload	15 N at 160km/h (100mph)


Available Types	Article no.	
1324.19.0032	23019483	SMA female
1324.26.0024	23002469	TNC female
1324.99.0007	23003467	TNC female reverse pigtail (RG 58 C/U, 0.3m)


Mounting Hardware	Article no.	
9091.99.0191	84011560	Optional wall mounting bracket for
		railway applications.

Wall and mast mounting bracket (1 metal band) included, mast diameter 40-60 mm (1.57'' - 2.36'')

Documents	
01.02.0777	security instruction
01.02.1033	mounting instruction
01.02.1111	mounting instruction (9091.99.0191)

Radiation Pattern

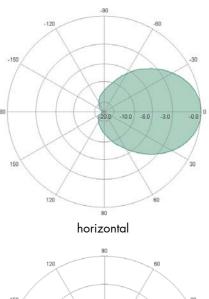









HUBER+SUHNER® PLANAR ANTENNA FOR WIRELESS COMMUNICATION

SPA 2400/75/8/0/V

Dimensions (mm)

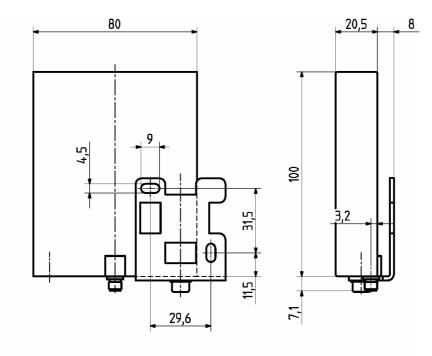

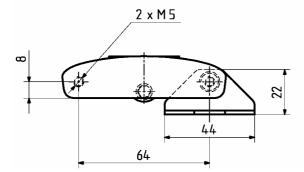

HUBER+SUHNER group is certified according to ISO 9001 and ISO 14001.

WAIVER!

While the information contained has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

 Document no.:
 01.02.0864

 Issue no.:
 8

 Supersedes:
 01.2005

Uncontrolled Copy

Issued/Checked/Released: Last amended:



HUBER+SUHNER AG RF Technology RF Communication CH-9100 Herisau , Switzerland Tel.: +41 71 353 41 11 Fax: +41 71 353 47 51 www.hubersuhner.com

4159/4656/01.2005 4159