FCC PART 15, SUBPART B and C; and FCC SECTION 15.247; RSS-247 and RSS-GEN TEST REPORT

for

### 2-GANG SWITCH PLATE

Model: LS02

Prepared for

VIVINT, INC. 4931 N. 300 W PROVO, UTAH 84604 USA

Prepared by:

JAMES ROSS

Approved by:

KYLE FUJIMOTO

COMPATIBLE ELECTRONICS INC. 114 OLINDA DRIVE BREA, CALIFORNIA 92823 (714) 579-0500

DATE: JULY 29, 2022

REPORT APPENDICES TOTAL BODY  $\boldsymbol{\mathit{E}}$  $\boldsymbol{A}$ В  $\boldsymbol{\mathit{C}}$ D **PAGES** 13 62

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



### **TABLE OF CONTENTS**

S	ection / Title	PAGE
GE	ENERAL REPORT SUMMARY	4
SU	UMMARY OF TEST RESULTS	5
1.	PURPOSE	6
1.1	DECISION RULE & RISK	6
2.	ADMINISTRATIVE DATA	7
_,	2.1 Location of Testing	7
	2.2 Traceability Statement	7
	2.3 Cognizant Personnel	7
	2.4 Date Test Sample was Received	7
	2.5 Disposition of the Test Sample	7
	2.6 Abbreviations and Acronyms	7
<b>3.</b>	APPLICABLE DOCUMENTS	8
4.	DESCRIPTION OF TEST CONFIGURATION	9
	4.1.1 Cable Construction and Termination	9
5.	LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
	5.1 EUT and Accessory List	10
	5.2 Emissions Test Equipment	11
6.	TEST SITE DESCRIPTION	12
•	6.1 Test Facility Description	12
	6.2 EUT Mounting, Bonding and Grounding	12
	6.3 Measurement Uncertainty	12
7.	CHARACTERISTICS OF THE TRANSMITTER	13
	7.1 Channel Number and Frequencies	13
	7.2 Antenna	13
8.	TEST PROCEDURES	14
	8.1 RF Emissions	14
	8.1.1 Conducted Emissions Test	14
	8.1.2 Radiated Emissions Test	15
	8.1.3 RF Emissions Test Results	16
	8.1.4 Sample Calculations	17
	8.2 DTS Bandwidth 8.3 Marienum Back Conducted Output Boycer	18
	<ul> <li>8.3 Maximum Peak Conducted Output Power</li> <li>8.4 Emissions in Non-restricted Frequency Bands</li> </ul>	18 19
	8.5 RF Band Edges	19
	8.6 Spectral Density Test	20
	8.7 99 % Bandwidth	20
	8.8 Duty Cycle Calculation	21
9.	CONCLUSIONS	22

### LIST OF APPENDICES

APPENDIX	TITLE		
A	Laboratory Accreditations and Recognitions		
В	Modifications to the EUT		
С	Models Covered Under This Report		
D	Diagrams and Charts		
	Test Setup Diagrams		
	Antenna and Effective Gain Factors		
Е	Data Sheets		

### **LIST OF FIGURES**

FIGURE	TITLE	
1	Conducted Emissions Test Setup	
2	Layout of the Semi-Anechoic Test Chamber	

## LIST OF TABLES

TABLE	TITLE	
1	Radiated Emission Results	

Report Number: B20614D1

### **GENERAL REPORT SUMMARY**

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the U.S. government.

Device Tested: 2-Gang Switch Plate

> Model: LS02 S/N: N/A

**Product Description:** The equipment under test is a wall mountable, battery powered, wireless 2-Gang Switch Plate.

> Panel Backplate Dimensions: 1.5 cm (L) x 12.2 cm (W) x 11 cm (H) Toggle Backplate Dimensions: 2.4 cm (L) x 12.2 cm (W) x 11 cm (H)

Clock(s): 38 MHz, 2405 MHz, 2440 MHz and 2480 MHz

Modifications: The EUT was not modified in order to meet the specifications.

Customer: Vivint, Inc.

4931 N. 300 W

Provo, Utah 84604 USA

Test Dates: June 8, 13, 14, 15 and 16, 2022

Test Specification covered by accreditation:



**Test Specifications:** Emissions requirements

CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209,

and 15.247; RSS-247 and RSS-GEN

**Test Procedures:** ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

## **SUMMARY OF TEST RESULTS**

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT operates on internal battery power only and cannot be connected to the AC public mains.
2	Radiated RF Emissions, 9 kHz – 25000 MHz	Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15 Subpart C, 15.205, 15.209 and 15.247 (d); RSS-247 and RSS-GEN Highest reading in relation to spec limit 50.14 dB $\mu$ V/m (AV) @ 2483.50 MHz (*U = 4.06 dB)
3	DTS Bandwidth	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (a)(2); RSS-247
4	Peak Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(3); RSS-247
5	RF Band Edges	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (d); RSS-247
6	Spectral Density	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (e); RSS-247

#### 1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the 2-Gang Switch Plate, Model: LS02 (EUT). The emissions measurements were performed according to the measurement procedure described in ANSI C 63.4 and ANSI C 63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-247 and RSS-Gen.

#### 1.1 DECISION RULE & RISK

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant; however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the consideration of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a preproduction representation of the final product that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

#### 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Vivint, Inc.

Greg Hansen Regulatory Compliance Manager

Compatible Electronics Inc.

Kyle Fujimoto Sr. Test Engineer James Ross Sr. Test Engineer

### 2.4 Date Test Sample was Received

The test sample was received prior to initial date of testing. Received as defined in product description.

#### 2.5 Disposition of the Test Sample

The test sample has not been returned to Vivint, Inc. as of the date of this test report.

#### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI Electromagnetic Interference EQUT Equipment Under Test

P/N Part Number S/N Serial Number

ITE Information Technology Equipment

DoC Declaration of Conformity

FCC Federal Communications Commission

IC Industry Canada

RSS Radio Standards Specification

N/A Not Applicable
Tx Transmit
Rx Receive
Inc. Incorporated
RF Radio Frequency

GND Ground

LED Light Emitting Diode

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B  FCC Rules – Radio frequency devices (including digital devices) Unintentional Radiators	
558074 D01 DTS Meas Guidance v05r02 Guidance for Performing Compliance Measurements on Digital Transmissions Systems (DTS) Operating Under Section 15.247	
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation
ANSI C63.4 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
RSS-Gen Issue 5 April 2019 Amendment 1	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmissions Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices

#### 4. DESCRIPTION OF TEST CONFIGURATION

The 2-Gang Switch Plate, Model: LS02 (EUT) was tested as a stand-alone device. The EUT was continuously transmitting at the low, middle, or high channel.

The EUT was tested for emissions while in the Y and Z axis. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The toggle backplate tested in the Y axis was the worst case.

The firmware inside the EUT allowed the EUT to continuously transmit at the low, middle, or high channel by hitting the reset switch inside the EUT.

The firmware is stored on the company's servers.

The radiated data was taken in the continuously exercising mode of operation. All initial investigations were performed with the EMI Receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix D.

#### 4.1.1 Cable Construction and Termination

There were no external cables connected to the EUT.

#### **5.** LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

#### **5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	ID
2-GANG SWITCH PLATE (EUT)	VIVINT, INC.	LS02	N/A	FCC: 2AAAS-LS02 IC: 10941A-LS02
FIRMWARE	VIVINT, INC.	1.0	N/A	N/A

## 5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANU- FACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE			
RF RADIATED	RF RADIATED, AC CONDUCTED, AND HARMONICS AND FLICKER EMISSIONS TEST EQUIPMENT							
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A			
EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies, Inc.	N9038A	MY51210510	September 17, 2021	September 17, 2022			
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A			
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A			
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A			
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	February 10, 2024			
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	December 14, 2023			
Horn Antenna	Com-Power	AH-118	10050113	December 16, 2021	December 16, 2023			
Preamplifier	Com-Power	PA-118	181653	March 7, 2022	March 7, 2023			
Horn Antenna	Com-Power	AH-826	71957	N/A	N/A			
Preamplifier	Com-Power	PA-840	711013	April 8, 2022	April 8, 2024			
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A			
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A			

#### 6. TEST SITE DESCRIPTION

### 6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for emissions test location.

### 6.2 EUT Mounting, Bonding and Grounding

**For frequencies 1 GHz and below:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

**For frequencies above 1 GHz:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

### 6.3 Measurement Uncertainty

"Compatible Electronics"  $U_{lab}$  value is less than  $U_{cispr}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.

The uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level, using a coverage factor of k=2

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measure	Ucispr	$U_{lab} = 2uc(y)$	
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1,000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz – 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.57 dB

#### 7. CHARACTERISTICS OF THE TRANSMITTER

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

#### 7.1 **Channel Number and Frequencies**

The EUT uses a total of 16 channels.

The low channel is 2405 MHz The middle channel is 2440 MHz The high channel is 2480 MHz

#### 7.2 Antenna

The EUT has a 4.9 dBi gain PCB trace antenna.

#### 8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

#### 8.1 **RF** Emissions

#### 8.1.1 **Conducted Emissions Test**

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

#### **Test Results:**

This test was not performed because the EUT operates on battery power only and cannot be connected to the AC public mains.

#### **8.1.2** Radiated Emissions Test

The EMI Receiver was used as the measuring meter. Above 1000 MHz, preamplifiers were used to increase the sensitivity of the instrument. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The frequencies above 1 GHz were averaged using the duty cycle correction factor in section 8.8 of this test report, however the band edge data utilizes an RMS average.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 and ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 25 GHz	1 MHz	Horn Antenna

#### **Test Results:**

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.247; and the limits of RSS-247 and RSS-Gen for radiated emissions.

#### 8.1.3 **RF Emissions Test Results**

Table 1 RADIATED EMISSION RESULTS

2-Gang Switch Plate

Model: LS02

Frequency (MHz)	EMI Reading (dBuV/m)	Specification Limit (dBuV/m)	Delta (Cor. Reading – Spec. Limit) (dB)
2483.50 (H) (BE – Y-Axis)	50.14 (AV)	53.97	-3.83
2483.50 (V) (BE – Z-Axis)	48.23 (AV)	53.97	-5.74
7320.00 (V) (Mid – Y-Axis)	46.25 (AV)	53.97	-7.72
779.50 (V) (High – Y-Axis)	32.69 (QP)	46.00	-13.31
778.10 (V) (High – Y-Axis)	32.64 (QP)	46.00	-13.36
782.30 (V) (High – Y-Axis)	32.60 (QP)	46.00	-13.40

Notes: \* The complete emissions data is given in Appendix E of this report.

Vertical (V)

(H) Horizontal

(QP) Quasi-Peak

(AV) Average

Low Low Channel

Middle Channel Mid

High High Channel

BE Band Edge

Report Number: **B20614D1** 

## **8.1.4** Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ( $\mu$ V/m) log x 20 = Specification Limit in dBuV/m

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) log x 40 = distance factor

For measurements above 30 MHz: (Specification distance / test distance) log x 20 = distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor

A= amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

Report Number: **B20614D1** 

#### 8.2 **DTS Bandwidth**

The DTS Bandwidth was measured using the EMI Receiver. The following steps were performed for measuring the DTS Bandwidth.

- 1. Set RBW = 100 kHz
- 2. Set the video bandwidth (VBW) to equal or greater than 3 times the RBW
- 3. Detector = Peak
- 4. Trace Mode = Max Hold
- 5. Sweep = Auto Couple
- 6. Allow the trace to stabilize
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **Test Results:**

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (a)(2); and RSS-247.

#### 8.3 Maximum Peak Conducted Output Power

The Maximum Peak Conducted Output Power was measured using the EMI Receiver. The Maximum Peak Conducted Output Power was measured using the procedure described in section 11.9.1.1 of ANSI C63.10. The Maximum Peak Conducted Output Power was then taken. The following steps were performed for measuring the Maximum Peak Conducted Output Power.

- 1. Set the RBW ≥ DTS bandwidth
- 2. Set VBW  $\geq$  [3 x RBW]
- 3. Set span  $\geq$  [3 x RBW]
- 4. Sweep time = auto couple
- 5. Detector = peak
- 6. Trace mode = max hold
- 7. Allow trace to fully stabilize
- 8. Use peak marker function to determine the peak amplitude level

#### **Test Results:**

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (b)(3); and RSS-247.

#### **8.4** Emissions in Non-restricted Frequency Bands

The emissions in the non-restricted frequency bands measurements were performed using the EMI receiver directly connected to the EUT. The reference level was established by setting the instrument center frequency to the DTS channel center frequency. The span was set to  $\geq 1.5$  times the DTS bandwidth. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with sweep set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the reference level. For emission level measurement, the center frequency and span were set to encompass the frequency range to be measured. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than the span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

#### **Test Results:**

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d); and RSS-247.

### 8.5 RF Band Edges

The RF band edges were taken at 2390 MHz when the EUT was on the low channel and 2483.5 MHz when the EUT was on the high channel using the EMI Receiver. A preamplifier was used to boost the signal level, with the plots being taken at a 3 meter test distance. The radiated emissions test procedure as describe in section 8.1.2 of this test report was used to maximize the emission.

#### **Test Results:**

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d); and RSS-247. The RF power at the restricted bands closest to the band edges at 2390 MHz and 2483.5 MHz also meet the limits of section 15.209. Please see the data sheets located in Appendix E.

#### 8.6 **Spectral Density Test**

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

- 1. Set analyzer center frequency to DTS channel center frequency
- 2. Set the span to 1.5 times the OBW.
- 3. Set the RBW to 3 kHz  $\leq$  RBW  $\leq$  100 kHz
- 4. Set the VBW  $\geq$  [3 X RBW]
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow the trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### **Test Results:**

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (e); and RSS-247.

#### 8.7 99 % Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

- 1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
- 4. Set the peak detector to max hold.
- 5. Set the sweep time to auto
- 6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

#### **Duty Cycle Calculation** 8.8

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Where

$$\delta(dB) = 20 \log \left[ \sum (nt_1 + mt_2 + ... + \xi t_x) / T \right]$$

n is the number of pulses of duration t1m is the number of pulses of duration t2  $\xi$  is the number of pulses of duration txT is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

The worst case was when the EUT was in data mode

Duty Cycle Correction Factor = -20 dB

Time of One Pulse =  $700 \mu s$ 

Total On Time =  $700 \mu s$ 

The time between pulses is 3000 ms

Duty Cycle =  $700 \mu s / 100 ms = 0.007 = 0.7 \%$ 

The maximum Peak to Average ratio of -20 dB can be utilized

**NOTE:** The band edge data utilizes an RMS average

#### 9. **CONCLUSIONS**

The 2-Gang Switch Plate, Model: LS02 (EUT), as tested, meets all of the specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-GEN and RSS-247.

## **APPENDIX A**

# LABORATORY ACCREDITATIONS AND RECOGNITIONS

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

http://celectronics.com/quality/scope/

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

ISED Test Site Registration Number: 2154A

## **APPENDIX B**

# **MODIFICATIONS TO THE EUT**

# MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.247; RSS-GEN and RSS-247 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



## **APPENDIX C**

# **MODELS COVERED UNDER THIS REPORT**

# **MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

2-Gang Switch Plate Model: LS02 S/N: N/A


There are no additional models covered under this report.




## APPENDIX D

# **DIAGRAMS AND CHARTS**

# FIGURE 1: CONDUCTED EMISSIONS TEST SETUP

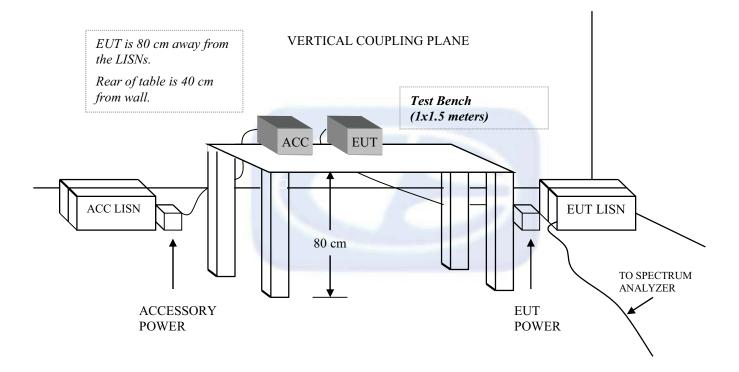

## FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER

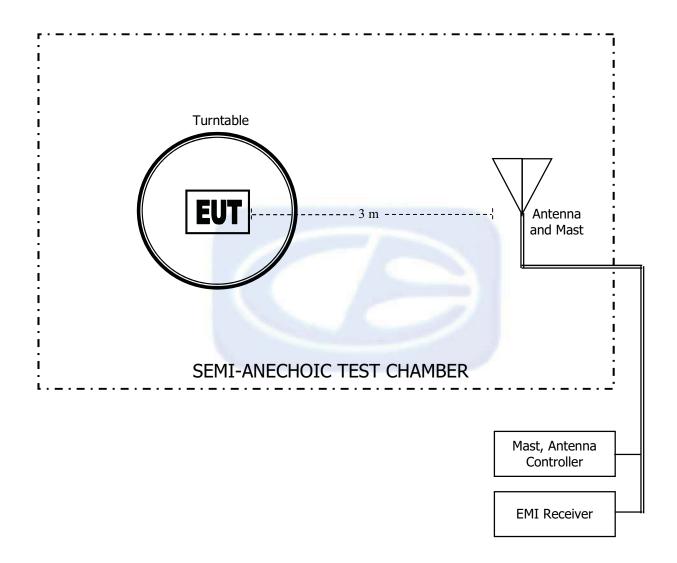

# COM-POWER AL-130R

# LOOP ANTENNA

S/N: 121090

## CALIBRATION DATE: FEBRUARY 10, 2022

CALIBRATION DATE: FEBRUARY 10, 2022					
FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)			
0.009	15.6	-35.8			
0.01	15.8	-35.6			
0.02	14.8	-36.6			
0.03	15.6	-35.9			
0.04	15.0	-36.5			
0.05	14.4	-37.1			
0.06	14.6	-36.9			
0.07	14.3	-37.2			
0.08	14.3	-37.2			
0.09	14.4	-37.0			
0.10	14.1	-37.4			
0.20	14.1	-37.4			
0.30	14.0	-37.5			
0.40	13.9	-37.6			
0.50	14.1	-37.3			
0.60	14.1	-37.3			
0.70	14.2	-37.3			
0.80	14.2	-37.3			
0.90	14.2	-37.2			
1.00	14.4	-37.0			
2.00	14.6	-36.9			
3.00	14.6	-36.8			
4.00	14.9	-36.6			
5.00	14.9	-36.7			
6.00	14.8	-36.7			
7.00	14.6	-36.8			
8.00	14.5	-37.0			
9.00	14.3	-37.2			
10.00	14.5	-37.0			
11.00	14.6	-36.9			
12.00	14.7	-36.7			
13.00	14.9	-36.6			
14.00	15.0	-36.5			
15.00	14.9	-36.6			
16.00	14.9	-36.6			
17.00	14.6	-36.8			
18.00	14.4	-37.1			
19.00	14.5	-37.0			
20.00	14.5	-37.0			
21.00	14.2	-37.3			
22.00	13.9	-37.5			
23.00	13.9	-37.5			
24.00	13.8	-37.7			
25.00	13.4	-38.0			
26.00	13.2	-38.2			
27.00	13.2	-38.3			
28.00	12.7	-38.7			
29.00	12.7	-38.8			
30.00	12.4	-39.0			

# COM-POWER AC-220

# **COMBILOG ANTENNA**

S/N: 61093

# CALIBRATION DATE: DECEMBER 14, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.50	200	16.00
35	21.40	250	17.40
40	21.00	300	19.70
45	20.60	350	20.00
50	19.70	400	22.20
60	16.10	450	22.40
70	12.80	500	23.10
80	12.50	550	23.40
90	14.20	600	24.90
100	15.40	650	25.30
120	16.50	700	25.40
125	16.80	750	26.40
140	15.90	800	26.70
150	16.60	850	27.10
160	18.50	900	27.90
175	15.90	950	28.00
180	15.50	1000	28.00

# **COM POWER AH-118**

# HORN ANTENNA

S/N: 10050113

# CALIBRATION DATE: DECEMBER 16, 2021

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
1.0	23.86	10.0	38.91
1.5	25.67	10.5	39.94
2.0	28.25	11.0	39.10
2.5	29.17	11.5	39.70
3.0	29.78	12.0	40.29
3.5	30.88	12.5	41.93
4.0	31.21	13.0	41.34
4.5	32.96	13.5	40.57
5.0	33.30	14.0	40.23
5.5	34.24	14.5	42.25
6.0	34.57	15.0	43.63
6.5	35.61	15.5	39.96
7.0	36.60	16.0	40.38
7.5	37.49	16.5	40.56
8.0	37.44	17.0	40.93
8.5	37.98	17.5	42.27
9.0	38.01	18.0	43.77
9.5	38.53		

# **COM-POWER AH-826**

# HORN ANTENNA

S/N: 71957

FREQUENCY	FACTOR	FREQUENCY	FACTOR
(GHz)	(dB)	(GHz)	(dB)
18.0	33.5	22.5	35.5
18.5	33.5	23.0	35.9
19.0	34.0	23.5	35.7
19.5	34.0	24.0	35.6
20.0	34.3	24.5	36.0
20.5	34.9	25.0	36.2
21.0	34.7	25.5	36.1
21.5	35.0	26.0	36.2
22.0	35.0	26.5	35.7

# **COM-POWER PAM-118**

# **PREAMPLIFIER**

S/N: 181653

# CALIBRATION DATE: MARCH 7, 2022

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		

## **COM-POWER PA-840**

## MICROWAVE PREAMPLIFIER

S/N: 711013

CALIBRATION DATE: APRIL 8, 2022

FREQUENCY (GHz)	FACTOR (dB)
18.0	24.85
19.0	24.25
20.0	22.69
21.0	22.17
22.0	22.78
23.0	23.23
24.0	23.72
25.0	24.13
26.0	24.28
26.5	25.06

Model: LS02



#### **FRONT VIEW**

VIVINT, INC. 2-GANG SWITCH PLATE MODEL: LS02

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – BELOW 1 GHz

Model: LS02



#### **REAR VIEW**

VIVINT, INC. 2-GANG SWITCH PLATE MODEL: LS02

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – BELOW 1 GHz

Model: LS02




#### **FRONT VIEW**

VIVINT, INC. 2-GANG SWITCH PLATE MODEL: LS02

FCC SUBPART B AND C; RSS-GEN and RSS-247 - RADIATED EMISSIONS - ABOVE 1 GHz

Model: LS02

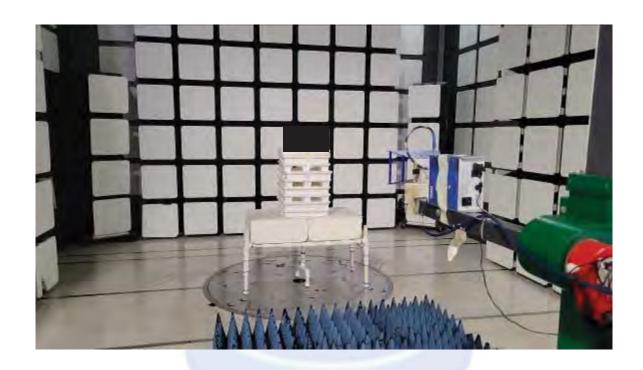

#### **REAR VIEW**

VIVINT, INC. 2-GANG SWITCH PLATE MODEL: LS02

FCC SUBPART B AND C; RSS-GEN and RSS-247 - RADIATED EMISSIONS - ABOVE 1 GHz

#### **APPENDIX E**

## **DATA SHEETS**

# HARMONICS AND RADIATED EMISSIONS **DATA SHEETS**

FCC 15.247

Vivint, Inc. Date: 6/13/2022 Lab: D 2-Gang Switch Plate

Model: LS02 Tested By: Kyle Fujimoto

**Harmonics - Low Channel** Transmit Mode - Y-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4810.00	53.10	V	73.97	-20.87	Peak	15.00	128.45	
4810.00	33.10	V	53.97	-20.87	Avg	15.00	128.45	
7215.00								Not in Restricted Band
7215.00								Done Via Conducted
9620.00								Not in Restricted Band
9620.00								Done Via Conducted
12025.00	54.56	V	73.97	-19.41	Peak	294.25	128.26	
12025.00	34.56	V	53.97	-19.41	Avg	294.25	128.26	
14430.00								Not in Restricted Band
14430.00								Done Via Conducted
16835.00								Not in Restricted Band
16835.00								Done Via Conducted
19240.00								No Emission
19240.00								Detected
21645.00								No Emission
21645.00								Detected
24050.00								No Emission
24050.00								Detected



2-Gang Switch Plate Model: LS02

FCC 15.247

Vivint, Inc. Date: 6/13/2022 2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

**Harmonics - Low Channel** Transmit Mode - Z-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq.	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4810.00	59.12	V	73.97	-14.85	Peak	192.25	100.25	
4810.00	39.12	V	53.97	-14.85	Avg	192.25	100.25	
7215.00								Not in Restricted Band
7215.00								Done Via Conducted
9620.00								Not in Restricted Band
9620.00								Done Via Conducted
12025.00	53.06	V	73.97	-20.91	Peak	108.25	248.68	
12025.00	33.06	V	53.97	-20.91	Avg	108.25	248.68	
14430.00								Not in Restricted Band
14430.00								Done Via Conducted
16835.00								Not in Restricted Band
16835.00								Done Via Conducted
19240.00								No Emission
19240.00								Detected
21645.00								No Emission
21645.00								Detected
24050.00								No Emission
24050.00								Detected

Report Number: B20614D1
FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

2-Gang Switch Plate

Model: LS02

FCC 15.247

Vivint, Inc. Date: 6/13/2022 2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Harmonics - Low Channel
Transmit Mode - Y-Axis - Duty Cycle Average
Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4810.00	57.63	Н	73.97	-16.34	Peak	181.00	142.14	
4810.00	37.63	Н	53.97	-16.34	Avg	181.00	142.14	
7215.00								Not in Restricted Band
7215.00								Done Via Conducted
9620.00								Not in Restricted Band
9620.00								Done Via Conducted
12025.00	56.03	Н	73.97	-17.94	Peak	75.00	102.25	
12025.00	36.03	Н	53.97	-17.94	Avg	75.00	102.25	
14430.00								Not in Restricted Band
14430.00								Done Via Conducted
16835.00								Not in Restricted Band
16835.00								Done Via Conducted
19240.00								No Emission
19240.00								Detected
21645.00								No Emission
21645.00								Detected
24050.00								No Emission
24050.00								Detected

Model: LS02

Report Number: B20614D1
FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report
COMPATIBLE

Report Number: B20614D1
2-Gang Switch Plate

FCC 15.247

Vivint, Inc. Date: 6/13/2022 2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Harmonics - Low Channel
Transmit Mode - Z-Axis - Duty Cycle Average
Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4810.00	53.69	Н	73.97	-20.28	Peak	325.00	132.50	
4810.00	33.69	Н	53.97	-20.28	Avg	325.00	132.50	
7215.00								Not in Restricted Band
7215.00								Done Via Conducted
9620.00								Not in Restricted Band
9620.00								Done Via Conducted
12025.00	56.66	Н	73.97	-17.31	Peak	242.25	102.24	
12025.00	36.66	Н	53.97	-17.31	Avg	245.25	102.24	
14430.00								Not in Restricted Band
14430.00								Done Via Conducted
16835.00								Not in Restricted Band
16835.00								Done Via Conducted
19240.00								No Emission
19240.00								Detected
21645.00								No Emission
21645.00								Detected
24050.00								No Emission
24050.00								Detected



FCC 15.247

Vivint, Inc. Date: 6/13/2022

2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Harmonics - Middle Channel
Transmit Mode - Y-Axis - Duty Cycle Average
Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4880.00	56.45	V	73.97	-17.52	Peak	6.00	140.25	
4880.00	36.45	V	53.97	-17.52	Avg	6.00	140.25	
7320.00	54.65	V	73.97	-19.32	Peak	93.00	116.44	
7320.00	46.25	V	53.97	-7.72	Avg	93.00	116.44	
9760.00								Not in Restricted Band
9760.00								Done Via Conducted
12200.00	52.59	V	73.97	-21.38	Peak	245.25	222.01	
12200.00	32.59	V	53.97	-21.38	Avg	245.25	222.01	
14640.00								Not in Restricted Band
14640.00								Done Via Conducted
17080.00								Not in Restricted Band
17080.00								Done Via Conducted
19520.00								No Emission
19520.00								Detected
21960.00								No Emission
21960.00								Detected
24400.00				1				No Emission
24400.00								Detected

Model: LS02

Report Number: **B20614D1**FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

\*\*PATIRIF\*\*

2-Gang Switch Plate\*

COMPATIBLE ELECTRONICS

FCC 15.247

Vivint, Inc. Date: 6/13/2022

2-Gang Switch Plate Lab: D

Model: LS02 Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel Transmit Mode - Z-Axis - Duty Cycle Average

Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4880.00	58.01	V	73.97	-15.96	Peak	170.25	188.26	
4880.00	38.01	V	53.97	-15.96	Avg	170.25	188.26	
7320.00	54.09	V	73.97	-19.88	Peak	244.40	192.10	
7320.00	34.09	V	53.97	-19.88	Avg	244.40	192.10	
9760.00								Not in Restricted Band
9760.00								Done Via Conducted
12200.00	53.23	V	73.97	-20.74	Peak	126.15	239.16	
12200.00	33.23	V	53.97	-20.74	Avg	126.50	239.16	
14640.00								Not in Restricted Band
14640.00			1				1	Done Via Conducted
17080.00								Not in Restricted Band
17080.00								Done Via Conducted
19520.00								No Emission
19520.00								Detected
21960.00							-1	No Emission
21960.00								Detected
24400.00								No Emission
24400.00								Detected



2-Gang Switch Plate Model: LS02

FCC 15.247 Vivint, Inc. 2-Gang Switch Plate Model: LS02

Date: 6/13/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel Transmit Mode - Y-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4880.00	55.29	Н	73.97	-18.68	Peak	276.50	162.24	
4880.00	35.29	H	53.97	-18.68	Avg	276.50	162.24	
7320.00	57.02	Н	73.97	-16.95	Peak	281.25	150.26	
7320.00	37.02	H	53.97	-16.95	Avg	281.25	150.26	
9760.00								Not in Restricted Band
9760.00						1		Done Via Conducted
12200.00	50.97	Н	73.97	-23.00	Peak	123.25	148.42	
12200.00	30.97	Н	53.97	-23.00	Avg	123.25	148.42	
14640.00								Not in Restricted Band
14640.00								Done Via Conducted
17080.00								Not in Restricted Band
17080.00								Done Via Conducted
19520.00						7 - 3		No Emission
19520.00								Detected
21960.00								No Emission
21960.00								Detected
24400.00								No Emission
24400.00								Detected

Model: LS02



COMPATIBLE
ELECTRONICS

FCC 15.247

Vivint, Inc. Date: 6/13/2022

2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Harmonics - Middle Channel Transmit Mode - Z-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4880.00	40.99	Н	73.97	-32.98	Peak	335.25	150.02	
4880.00	20.99	Н	53.97	-32.98	Avg	335.25	150.02	
7320.00	54.17	Н	73.97	-19.80	Peak	151.50	182.86	
7320.00	34.17	Н	53.97	-19.80	Avg	151.50	182.86	
9760.00								Not in Restricted Band
9760.00								Done Via Conducted
12200.00	48.73	Н	73.97	-25.25	Peak	359.25	132.59	
12200.00	28.73	Н	53.97	-25.25	Avg	359.25	132.59	
14640.00								Not in Restricted Band
14640.00								Done Via Conducted
17080.00								Not in Restricted Band
17080.00								Done Via Conducted
19520.00								No Emission
19520.00								Detected
21960.00								No Emission
21960.00								Detected
24400.00								No Emission
24400.00								Detected



COMPATIBLE ELECTRONICS

2-Gang Switch Plate Model: LS02

FCC 15.247 Vivint, Inc. 2-Gang Switch Plate Model: LS02

Date: 6/13/2022 Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel Transmit Mode - Y-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	57.26	V	73.97	-16.71	Peak	1.00	142.26	
4960.00	37.26	٧	53.97	-16.71	Avg	1.00	142.26	
7440.00	55.03	V	73.97	-18.94	Peak	86.00	112.14	
7440.00	35.03	٧	53.97	-18.94	Avg	86.00	112.14	
9920.00								Not in Restricted Band
9920.00								Done Via Conducted
12400.00	52.18	V	73.97	-21.79	Peak	246.25	102.26	
12400.00	32.18	٧	53.97	-21.79	Avg	246.25	102.26	
14880.00								Not in Restricted Band
14880.00								Done Via Conducted
17360.00								Not in Restricted Band
17360.00								Done Via Conducted
19840.00	1							No Emission
19840.00								Detected
22320.00			1					No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Model: LS02



COMPATIBLE
ELECTRONICS

FCC 15.247

Vivint, Inc.

2-Gang Switch Plate

Date: 6/13/2022
Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Harmonics - High Channel
Transmit Mode - Z-Axis - Duty Cycle Average
Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	53.26	V	73.97	-20.71	Peak	151.00	102.25	
4960.00	33.26	V	53.97	-20.71	Avg	151.00	102.25	
7440.00	55.26	V	73.97	-18.71	Peak	39.75	205.25	
7440.00	35.26	V	53.97	-18.71	Avg	39.75	205.25	
9920.00								Not in Restricted Band
9920.00								Done Via Conducted
12400.00	56.36	V	73.97	-17.61	Peak	195.00	247.58	
12400.00	36.36	V	53.97	-17.61	Avg	195.00	247.58	
14880.00								Not in Restricted Band
14880.00								Done Via Conducted
17360.00								Not in Restricted Band
17360.00								Done Via Conducted
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected



2-Gang Switch Plate Model: LS02

FCC 15.247

Vivint, Inc. Date: 6/13/2022

2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Harmonics - High Channel Transmit Mode - Y-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	52.06	Н	73.97	-21.91	Peak	175.50	176.25	
4960.00	32.06	Н	53.97	-21.91	Avg	175.50	176.25	
7440.00	54.08	Н	73.97	-19.89	Peak	155.50	102.25	
7440.00	34.08	Н	53.97	-19.89	Avg	155.50	102.25	
9920.00								Not in Restricted Band
9920.00								Done Via Conducted
12400.00	54.48	Н	73.97	-19.49	Peak	65.00	105.40	
12400.00	34.48	Н	53.97	-19.49	Avg	65.00	105.40	
14880.00								Not in Restricted Band
14880.00								Done Via Conducted
17360.00								Not in Restricted Band
17360.00								Done Via Conducted
19840.00								No Emission
19840.00								Detected
22320.00								No Emission
22320.00								Detected
24800.00				1				No Emission
24800.00								Detected



2-Gang Switch Plate Model: LS02

FCC 15.247

Vivint, Inc. Date: 6/13/2022

2-Gang Switch Plate Lab: D Model: LS02 Tested By: Kyle Fujimoto

Harmonics - High Channel Transmit Mode - Z-Axis - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4960.00	49.21	Н	73.97	-24.76	Peak	140.50	126.40	
4960.00	29.21	Н	53.97	-24.76	Avg	140.50	126.40	
7440.00	55.38	Н	73.97	-18.59	Peak	243.00	125.22	
7440.00	35.38	Н	53.97	-18.59	Avg	243.00	125.22	
9920.00								Not in Restricted Band
9920.00								Done Via Conducted
12400.00	53.33	Н	73.97	-20.64	Peak	280.50	190.28	
12400.00	33.33	Н	53.97	-20.64	Avg	280.50	190.28	
14880.00								Not in Restricted Band
14880.00			1					Done Via Conducted
17360.00								Not in Restricted Band
17360.00								Done Via Conducted
19840.00								No Emission
19840.00								Detected
22320.00							1	No Emission
22320.00								Detected
24800.00								No Emission
24800.00								Detected

Date: 6/13/2022

Lab: D



2-Gang Switch Plate Model: LS02

#### FCC Class B and FCC 15.247

Ecolink Intelligent Technology, Inc. 2-Gang Switch Plate

Model: LS02 Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz to 25 GHz

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
	7							
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the digital portion
								of the EUT
								No Emissions Detected
								from 9 kHz to 30 MHz
								for the Non-Harmonic Emissions
								N. Farance Balada
								No Emissions Detected
							-	from 1 GHz to 25 GHz
								for the digital portion
								of the EUT
								No Emissions Detected
								from 1 GHz to 25 GHz
								for the Non-Harmonic Emissions
								Investigated in the X-Axis,
					-			Y-Axis, and Z-Axis
_	4				-			
	9 -							




2-Gang Switch Plate Model: LS02

Title: Pre-Scan - FCC Class B File: 3 - LF - Pre-Scan - FCC Class B - Y-Axis - 2 Gang - 06-15-2022.set Operator: Kyle Fujimoto EUT Type: 2-Gang Switch Plate EUT Condition: The EUT is continuously transmitting at 2480 MHz Company: Vivint, Inc. M/N: LS02 S/N: N/A Y-Axis Worst Case Toggle Swtich Backplate Worst Case

6/15/2022 7:57:36 AM Sequence: Preliminary Scan

#### FCC Class B

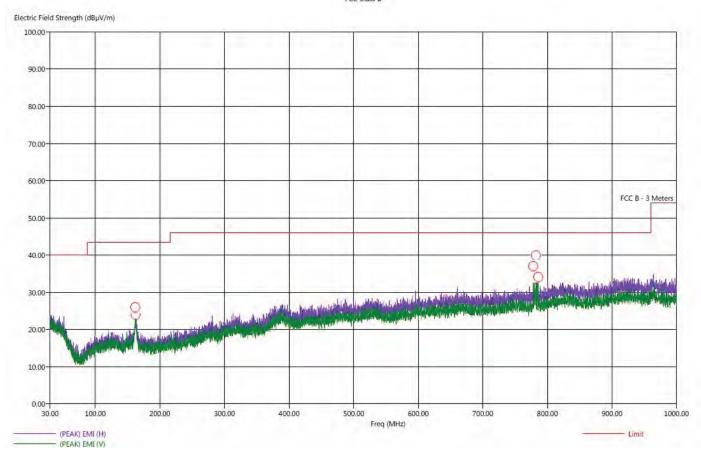



2-Gang Switch Plate Model: LS02

Title: Final Scan - FCC Class B File: 3 - LF - Final Scan - FCC Class B - Y-Axis - 2 Gang - 06-15-2022.set Operator: Kyle Fujimoto EUT Type: 2-Gang Switch Plate EUT Condition: The EUT is continuously transmitting at 2480 MHz Company: Vivint, Inc. M/N: LS02 S/N: N/A Y-Axis Worst Case Toggle Switch Backplate Worst Case

6/15/2022 8:07:00 AM Sequence: Final Measurements

#### FCC Class B

Freq	Pol	(PEAK) EMI	(QP) EMI	(PEAK) Margin	(QP) Margin	Limit	Transducer	Cable	Ttbl Agl	Twr Ht
(MHz)		(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dBµV/m)	(dB)	(dB)	(deq)	(cm)
162.00	H	30.95	26.03	-12.55	-17.47	43.50	22.60	1.07	181.75	350.62
162.50	H	31.82	26.04	-11.68	-17.46	43.50	22.59	1.07	151.25	398.26
778.10	V	37.20	32.64	-8.80	-13.36	46.00	26.10	2.45	246.50	400.00
779.50	V	37.44	32.69	-8.56	-13.31	46.00	26.10	2.45	64.50	270.74
782.30	V	37.90	32.60	-8.10	-13.40	46.00	26.10	2.46	194.50	400.11
785.90	V	37.61	32.54	-8.39	-13.46	46.00	26.20	2.48	158.75	218.74







# **BAND EDGES DATA SHEETS**



Model: LS02



FCC 15.247

Vivint, Inc. Date: 06/14/2022

2-Gang Switch Plate Lab: D

Model: LS02 Tested By: Kyle Fujimoto

Band Edges - Duty Cycle Average Toggle Switch Backplate Worst Case

Freq.	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
2405.00	102.30	V		- 22	Peak	141.25	213.37	Fundamental - Low Ch.
2405.00	82.30	V			Avg	141.25	213.37	Z-Axis Worst Case
2390.00	39.55	V	73.97	-34.42	Peak	141.25	213.37	Band Edge
2390.00	29.27	V	53.97	-24.70	Avg	141.25	213.37	Z-Axis Worst Case
2405.00	103.23	Н			Peak	199.25	202.14	Fundamental - Low Ch.
2405.00	83.23	Н	198	9	Avg	199.25	202.14	Y-Axis - Worst Case
2390.00	42.07	Н	73.97	-31.90	Peak	199.25	202.14	Band Edge
2390.00	29.77	Н	53.97	-24.20	Avg	199.25	202.14	Y-Axis - Worst Case



COMPATIBLE ELECTRONICS

2-Gang Switch Plate Model: LS02

FCC 15.247

Vivint, Inc. Date: 06/14/2022 2-Gang Switch Plate Lab: D


Model: LS02 Tested By: Kyle Fujimoto

Band Edges - Duty Cycle Average Toggle Switch Backplate Worst Case


Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
2480.00	101.79	V			Peak	139.50	249.31	Fundamental - High Ch.
2480.00	81.79	V			Avg	139.50	249.31	Z-Axis - Worst Case
2483.50	57.37	V	73.97	-16.60	Peak	139.50	249.31	Band Edge
2483.50	48.23	V	53.97	-5.74	Avg	139.50	249.31	Z-Axis - Worst Case
2480.00	103.49	Н		- 22	Peak	197.00	197.19	Fundamental - High Ch.
2480.00	83.49	Н			Avg	197.00	197.19	Y-Axis - Worst Case
2483.50	60.35	Н	73.97	-13.62	Peak	197.00	197.19	Band Edge
2483.50	50.14	Н	53.97	-3.83	Avg	197.00	197.19	Y-Axis - Worst Case
						16		




BE - 2405 MHz - Horizontal - Y-Axis - Worst Case

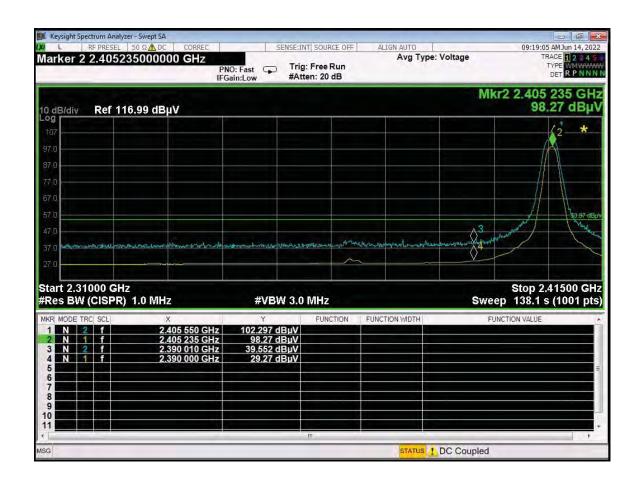


BE - 2405 MHz - Vertical - Z-Axis - Worst Case

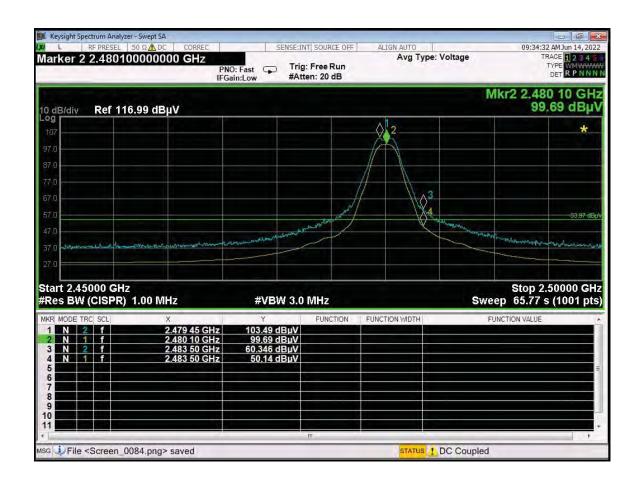

BE – 2480 MHz - Horizontal - Y-Axis - Worst Case

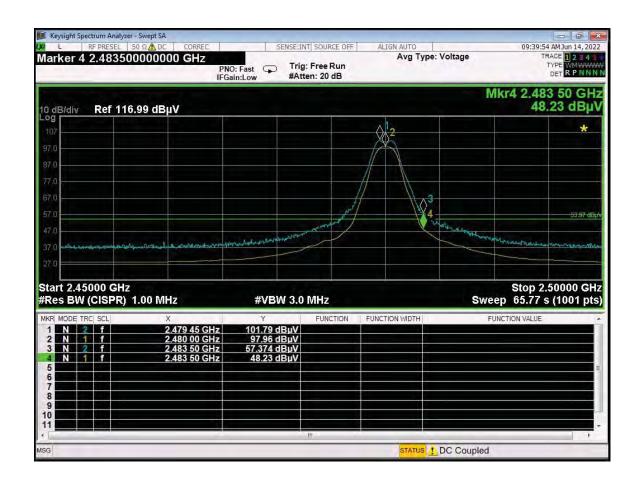


BE - 2480 MHz - Vertical - Z-Axis - Worst Case

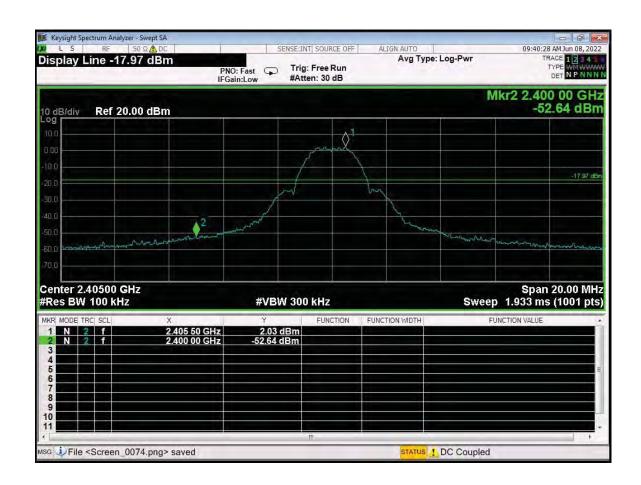

BE - 2400 MHz - Conducted

# DTS BANDWIDTH **DATA SHEETS**

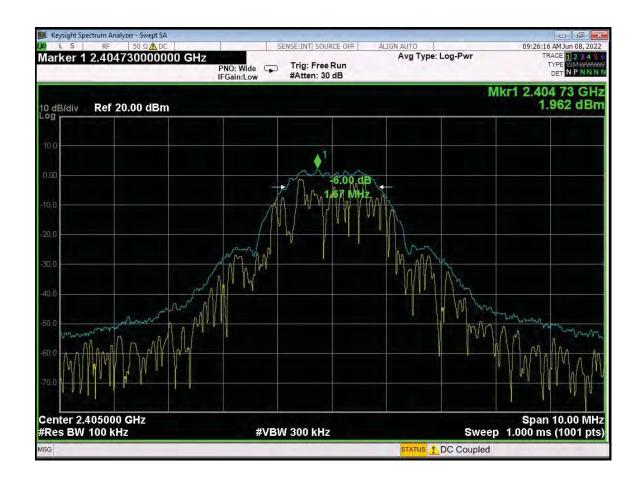

Bandwidth 6 dB - 2405 MHz



Bandwidth 6 dB - 2440 MHz




Bandwidth 6 dB - 2480 MHz






# PEAK OUTPUT POWER **DATA SHEETS**

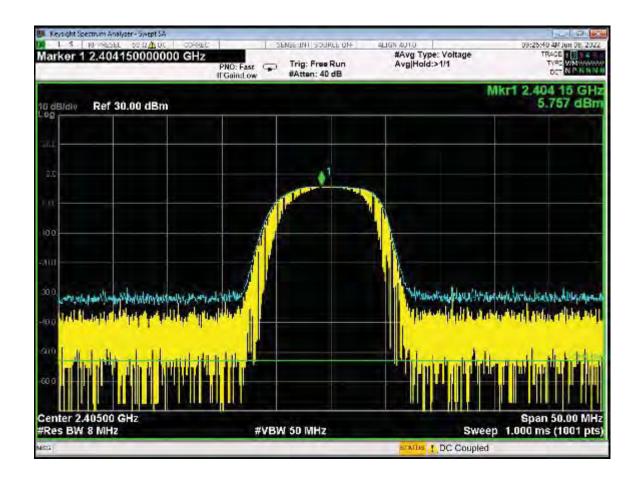

Peak Power Output - 2405 MHz

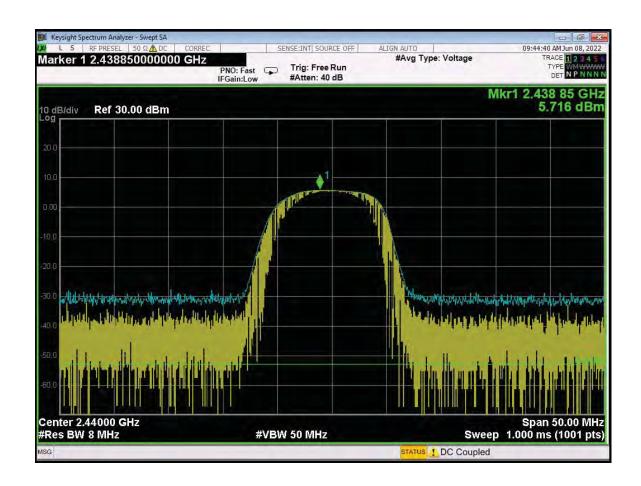

Peak Power Output - 2440 MHz




Peak Power Output – 2480 MHz







# SPECTRAL DENSITY OUTPUT **DATA SHEETS**

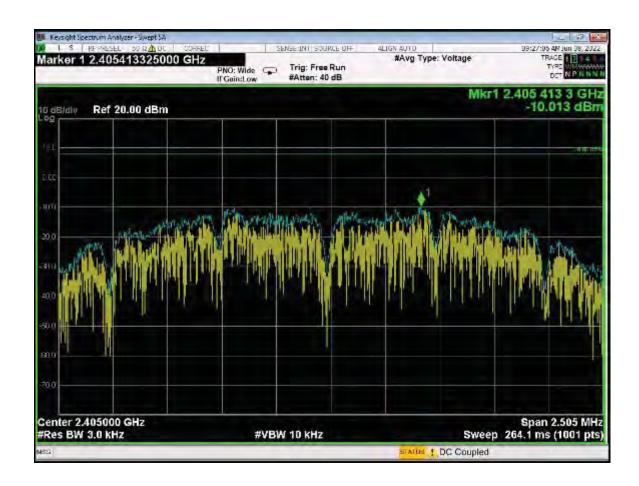

Special Density Output - 2405 MHz

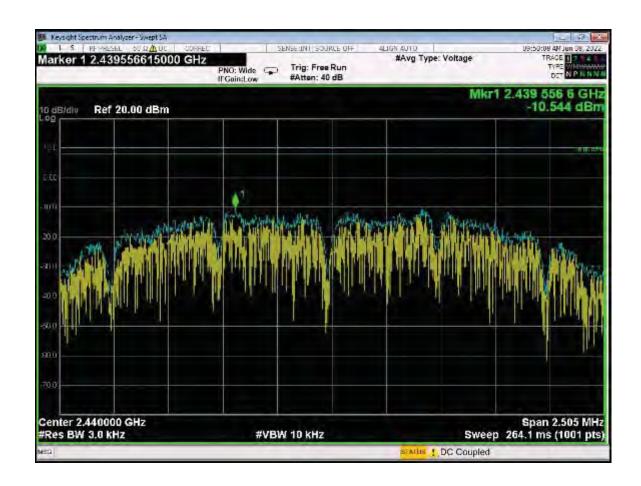

Special Density Output - 2440 MHz

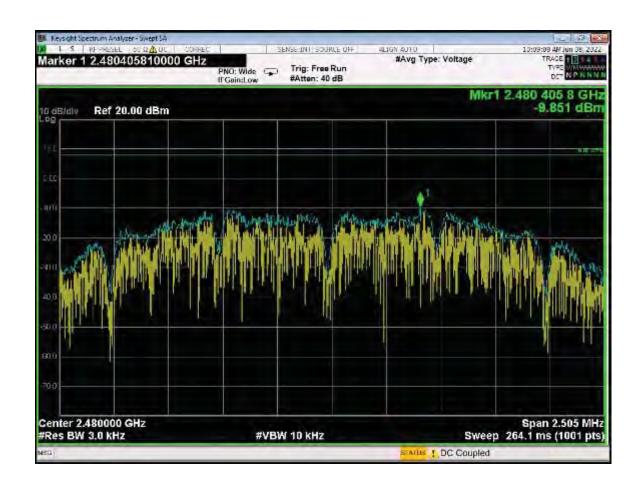


Special Density Output - 2480 MHz





# 99% BANDWIDTH **DATA SHEETS**

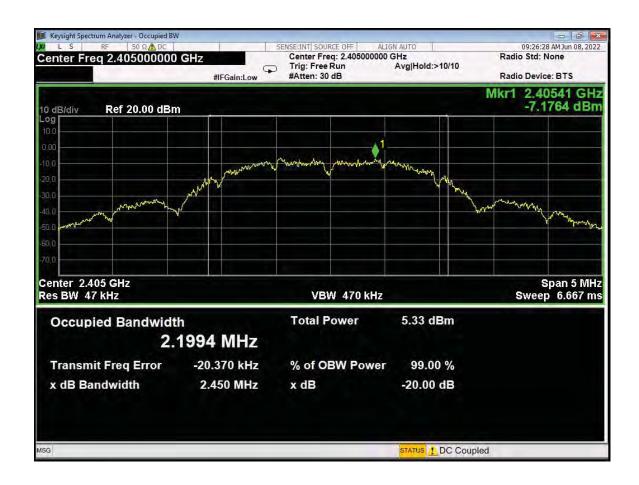

99% Bandwidth - 2405 MHz



99% Bandwidth - 2440 MHz




99% Bandwidth - 2480 MHz


# RF ANTENNA CONDUCTED **DATA SHEETS**




RF Antenna Conducted Test – Low Channel – Reference Level

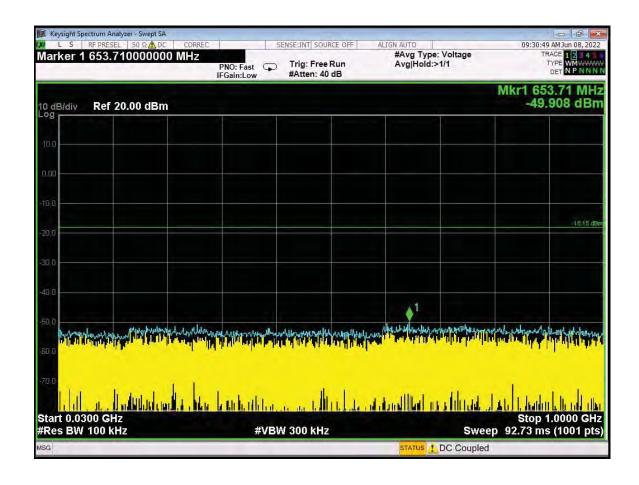

RF Antenna Conducted Test – Low Channel – 30 MHz to 1 GHz

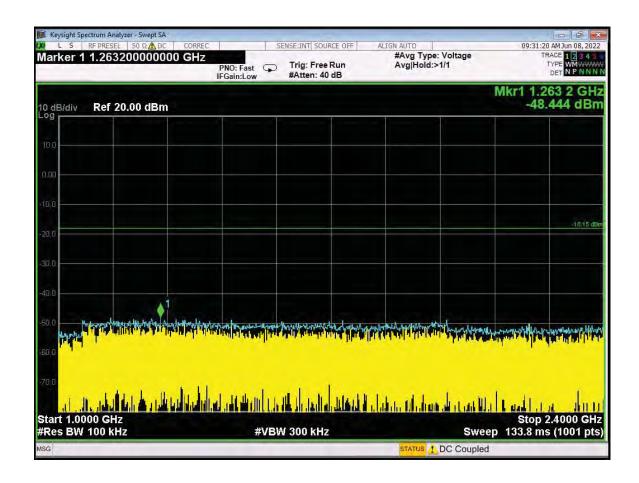

RF Antenna Conducted Test – Low Channel – 1 GHz to 2.4 GHz

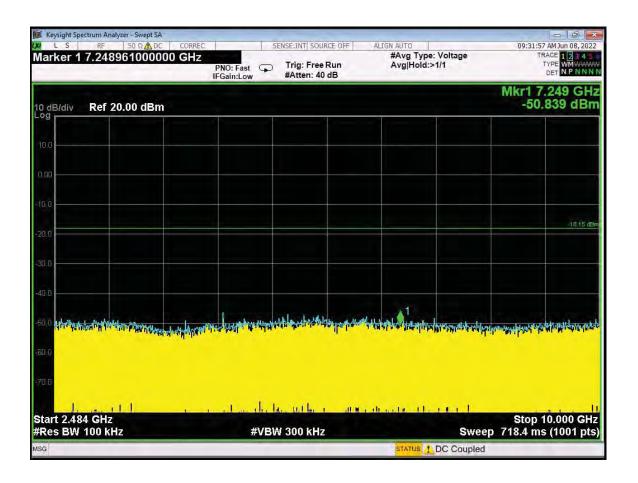


RF Antenna Conducted Test - Low Channel - 2484 MHz to 10 GHz




RF Antenna Conducted Test – Low Channel – 10 GHz to 25 GHz




RF Antenna Conducted Test – Middle Channel – Reference Level

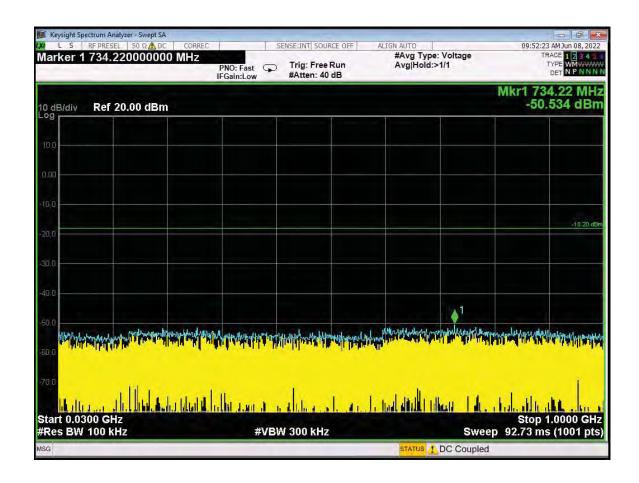


RF Antenna Conducted Test – Middle Channel – 30 MHz to 1 GHz

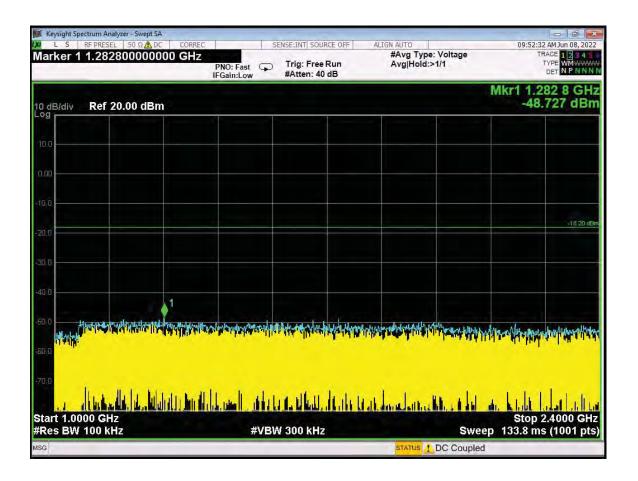

RF Antenna Conducted Test – Middle Channel – 1 GHz to 2.4 GHz

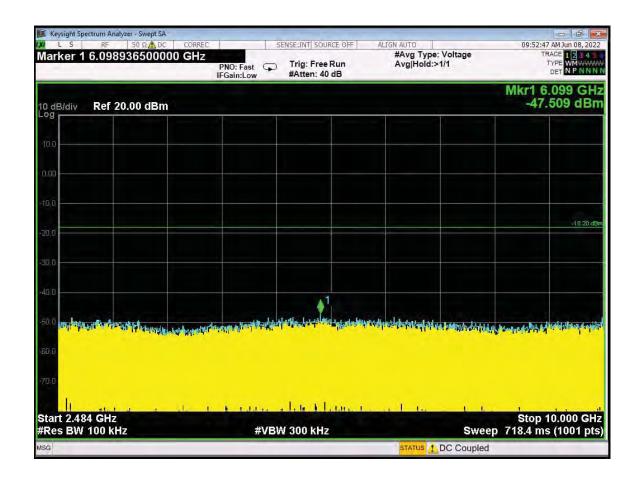


RF Antenna Conducted Test - Middle Channel - 2484 MHz to 10 GHz

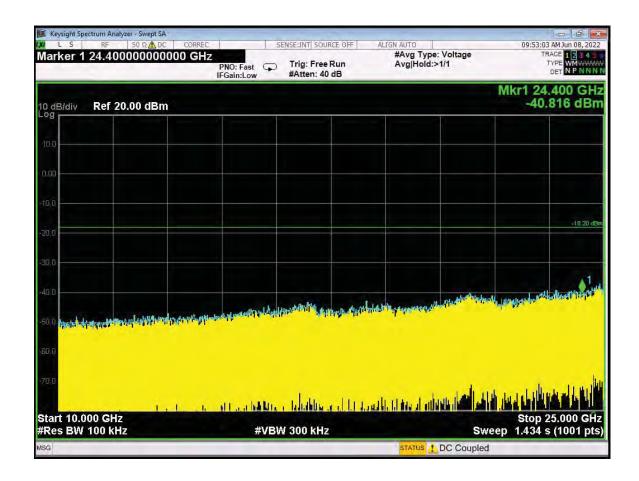


RF Antenna Conducted Test - Middle Channel - 10 GHz to 25 GHz




RF Antenna Conducted Test – High Channel – Reference Level

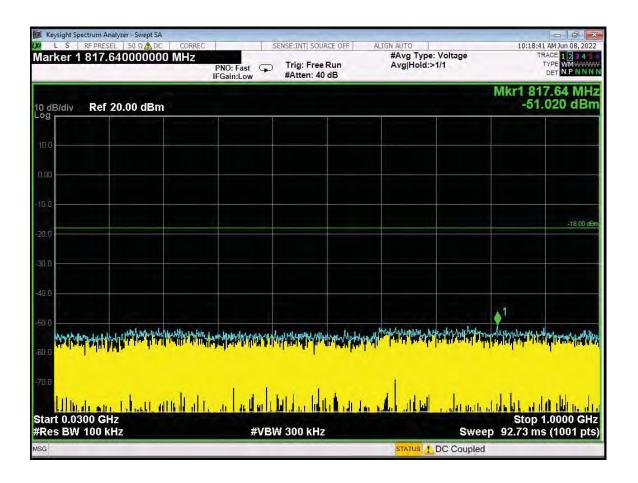


RF Antenna Conducted Test – High Channel – 30 MHz to 1 GHz

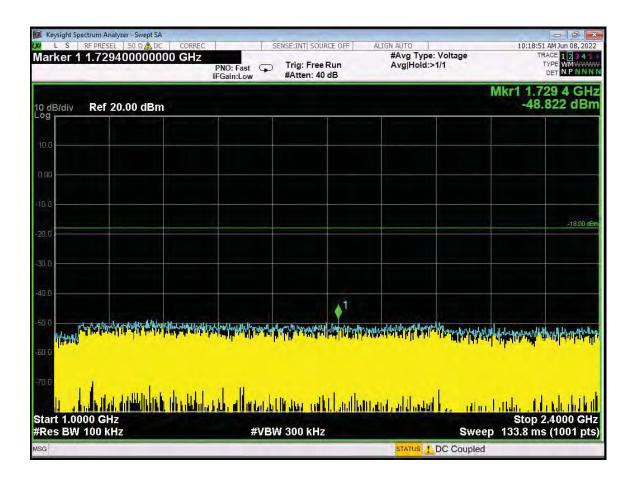

RF Antenna Conducted Test – High Channel – 1 GHz to 2.4 GHz

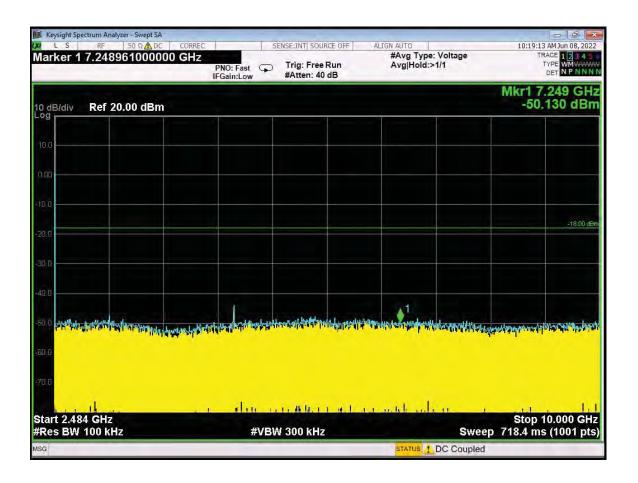

RF Antenna Conducted Test - High Channel - 2484 MHz to 10 GHz

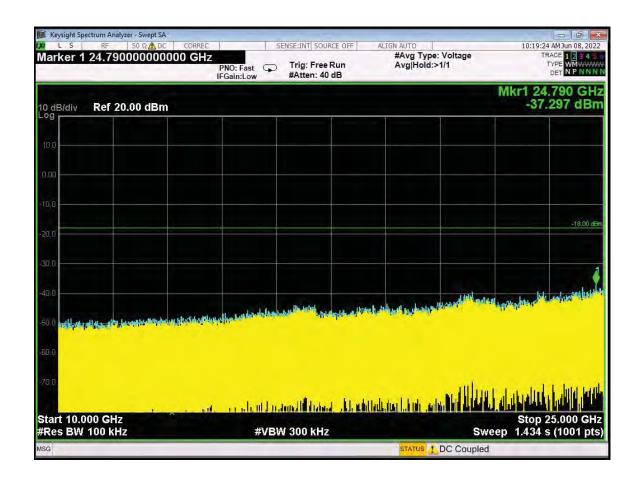

RF Antenna Conducted Test – High Channel – 10 GHz to 25 GHz

## VIVINT, INC.

### 2-GANG SWITCH PLATE

MODEL: LS02

#### **EMISSIONS IN NON-RESTRICTED BANDS**

FREQUENCY	LEVEL	Limit*	Margin
(MHz)	(dBm)	(dBm)	(dB)
24790.00	-37.297	-18.00	-19.297
24040.00	-39.747	-18.15	-21.597
24400.00	-40.816	-18.20	-22.616

Note: The three highest non-restricted emissions are reported.

<sup>\*</sup>The Limit is based on 20 dB below the highest reference level obtained on the previous pages.





## **DUTY CYCLE**

**DATA SHEETS** 



Only One Pulse per 100 ms



Time Between Pulses 3 Seconds



Time of One Pulse 700 µs