

Report No.: RF190122E02

FCC ID: PKRNVWSKR5MD8800

Test Model: SKR5MD8800

Received Date: Jan. 15, 2019

Test Date: Jan. 19 to 23, 2019

Issued Date: Mar. 06, 2019

Applicant: Inseego Corp.

Address: 9605 Scranton Road Suite 300, San Diego, CA 92121 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement.....	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures.....	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup.....	38
4.2.6 EUT Operating Conditions.....	38
4.2.7 Test Results	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement.....	41
4.3.2 Test Setup.....	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions.....	41
4.3.7 Test Result.....	42
4.4 Conducted Output Power Measurement.....	44
4.4.1 Limits of Conducted Output Power Measurement	44
4.4.2 Test Setup.....	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures.....	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions.....	44
4.4.7 Test Results	45
4.5 Power Spectral Density Measurement.....	47
4.5.1 Limits of Power Spectral Density Measurement	47
4.5.2 Test Setup.....	47
4.5.3 Test Instruments	47
4.5.4 Test Procedure	47
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Condition	48

4.5.7 Test Results	49
4.6 Conducted Out of Band Emission Measurement	52
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	52
4.6.2 Test Setup.....	52
4.6.3 Test Instruments	52
4.6.4 Test Procedure	52
4.6.5 Deviation from Test Standard	52
4.6.6 EUT Operating Condition	52
4.6.7 Test Results	52
5 Pictures of Test Arrangements.....	61
Appendix – Information of the Testing Laboratories	62

Release Control Record

Issue No.	Description	Date Issued
RF190122E02	Original release.	Mar. 06, 2019

1 Certificate of Conformity

Product: 4G LTE Wireless Router

Brand: Inseego

Test Model: SKR5MD8800

Sample Status: ENGINEERING SAMPLE

Applicant: Inseego Corp.

Test Date: Jan. 19 to 23, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang, **Date:** Mar. 06, 2019
Phoenix Huang / Specialist

Approved by : May Chen, **Date:** Mar. 06, 2019
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.69dB at 0.42734MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz and 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.12 dB
	6GHz ~ 18GHz	4.86 dB
	18GHz ~ 40GHz	5.24 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	4G LTE Wireless Router
Brand	Inseego
Test Model	SKR5MD8800
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc ~ 24Vdc
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.412 ~ 2.462GHz CDD Mode: 855.093mW Beamforming Mode: 770.217mW 5.18 ~ 5.24GHz CDD Mode: 570.326mW Beamforming Mode: 482.677mW 5.745 ~ 5.825GHz CDD Mode: 804.638mW Beamforming Mode: 473.195mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
WLAN (2.4GHz + 5GHz)	Bluetooth + GPS	WWAN

2. Simultaneously transmission condition.

Condition	Technology			
1	WLAN (2.4GHz)	WLAN (5GHz)	Bluetooth	WWAN

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT inside has one WWAN module which FCC ID: PKRNVWMD8800.

4. The antennas and antenna RF cables (option) provided to the EUT, please refer to the following table:

Antenna No.	Brand Name	Model Name	Antenna Gain (dBi)	Frequency Range	Antenna Type	Antenna Connector Type
WLAN_1	RF link	RF21S00506AX1	4.11	2.4~2.4835 GHz	Dipole	R-SMA
			6.12	5.15~5.85 GHz		
WLAN_2	M.gear	C037-511343-A	4.11	2.4~2.4835 GHz	Dipole	R-SMA
			6.12	5.15~5.85 GHz		
BT_ANT	RF link	RF21S00506AX1	4.11	2,402~2,480 GHz	Dipole	R-SMA
WWAN_1_1	-	SWX-614XRSXX-999	2.1	1850 MHz to 1910 MHz	Dipole	SMA
			1.8	1710 MHz to 1755 MHz		
			1.8	824 MHz to 849 MHz		
			2.7	2500 MHz to 2570 MHz		
			0.4	777 MHz to 787 MHz		
			0.4	788 MHz to 798 MHz		
			1.8	1710 MHz to 1780 MHz		
WWAN_1_2	-	SWX-614XRSXX-999	2.1	1850 MHz to 1910 MHz	Dipole	SMA
			1.8	1710 MHz to 1755 MHz		
			1.8	824 MHz to 849 MHz		
			2.7	2500 MHz to 2570 MHz		
			0.4	777 MHz to 787 MHz		
			0.4	788 MHz to 798 MHz		
			1.8	1710 MHz to 1780 MHz		
WWAN_2_1	-	SWX-6141SAXX-508	3.56	3550 MHz to 3700 MHz	Dipole	SMA
WWAN_2_2	-	SWX-6141SAXX-508	3.56	3550 MHz to 3700 MHz	Dipole	SMA
WWAN_3_1 (Rx only)	-	RF21S00773A	3.5	5.15~5.85 GHz	Dipole	SMA
WWAN_3_2 (Rx only)	-	RF21S00773A	3.5	5.15~5.85 GHz	Dipole	SMA
GPS_ANT	-	-	2.4	1575.4	Dipole	SMA

Antenna RF Cable (Option)			
For WLAN & BT	Cable Loss (dB)	Frequency Range	Cable Connector Type
	3.5	1850 MHz to 1910 MHz	R-SMA
	3.5	1710 MHz to 1755 MHz	
	2.5	824 MHz to 849 MHz	
	4.5	2.4~2.4835 GHz	
	4.5	2500 MHz to 2570 MHz	
	2.5	777 MHz to 787 MHz	
	2.5	788 MHz to 798 MHz	
	3.5	1710 MHz to 1780 MHz	
	4.5	3550 MHz to 3700 MHz	
	6.93	5.15~5.85GHz	
For WWAN & GPS	Cable Loss (dB)	Frequency Range	Cable Connector Type
	3.5	1850 MHz to 1910 MHz	SMA
	3.5	1710 MHz to 1755 MHz	
	2.5	824 MHz to 849 MHz	
	4.5	2.4~2.4835 GHz	
	4.5	2500 MHz to 2570 MHz	
	2.5	777 MHz to 787 MHz	
	2.5	788 MHz to 798 MHz	
	3.5	1710 MHz to 1780 MHz	
	4.5	3550 MHz to 3700 MHz	
	6.93	5.15~5.85GHz	

5. The EUT was pre-tested under the following modes:

For Radiated Emission test	
Pre-test Mode	Description
Mode A	EUT (Y plane) without antenna cable: 12Vdc power from adapter
Mode B	EUT (X plane) without antenna cable: 12Vdc power from adapter
Mode C	EUT (X plane) without antenna cable: 12Vdc power from power supply
Mode D	EUT (X plane) without antenna cable: 24Vdc power from power supply
Mode E	EUT (Y plane) with antenna cable: 12Vdc power from adapter
From the above modes, the worst case was found in Mode A . Therefore only the test data of the mode was recorded in this report.	
For AC Power Conducted Emission test	
Pre-test Mode	Description
Mode F	12Vdc power from adapter
Mode G	12Vdc power from power supply
Mode H	24Vdc power from power supply
From the above modes, the worst case was found in Mode F . Therefore only the test data of the mode was recorded in this report.	

6. The EUT incorporates a MIMO function.

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE _≥ 1G	22deg. C, 67%RH	120Vac, 60Hz (System)	Rey Chen
RE _{<} 1G	22deg. C, 69%RH	120Vac, 60Hz (System)	Steven Chiang
PLC	23deg. C, 74%RH	120Vac, 60Hz (System)	Andy Ho
APCM	25deg. C, 60%RH	12Vdc	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = 12.256 ms/12.381 ms = 0.99

802.11g: Duty cycle = 2.026 ms/2.12 ms = 0.956, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.2$

VHT20: Duty cycle = 4.953 ms/5.048 ms = 0.981

VHT40: Duty cycle = 2.403 ms/2.493 ms = 0.964, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.16$

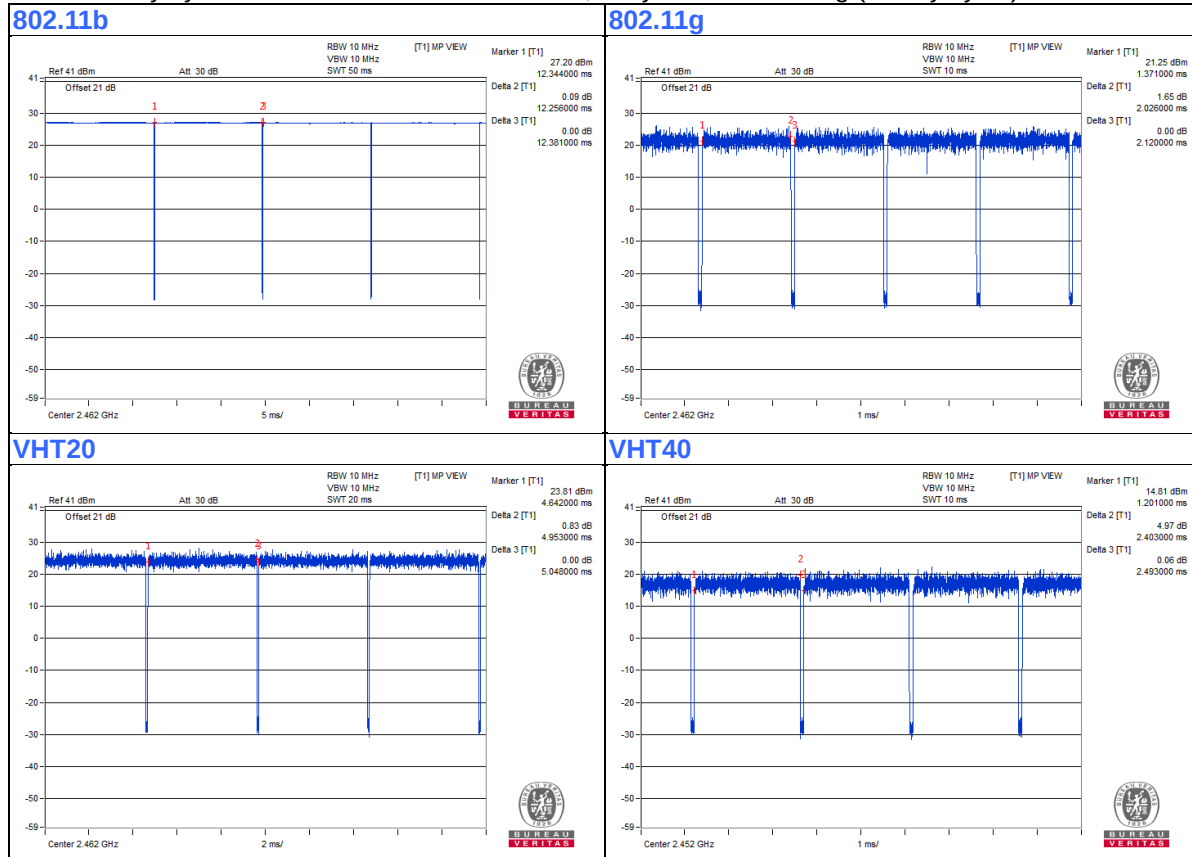

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	CWT	2ABF060F	NA	NA	Supplied by client
B.	PoE Load	Luxul	XAP-1440	NA	NA	Supplied by client
C.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
D.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab
E.	SIM Card	R&S	CRT-Z3	NA	NA	Provided by Lab

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.2	No	1	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	USB Cable	1	0.1	Yes	0	Provided by Lab
6.	AC Cable	1	0.8	No	0	Supplied by client


Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

For Power Line Conducted Emission test:

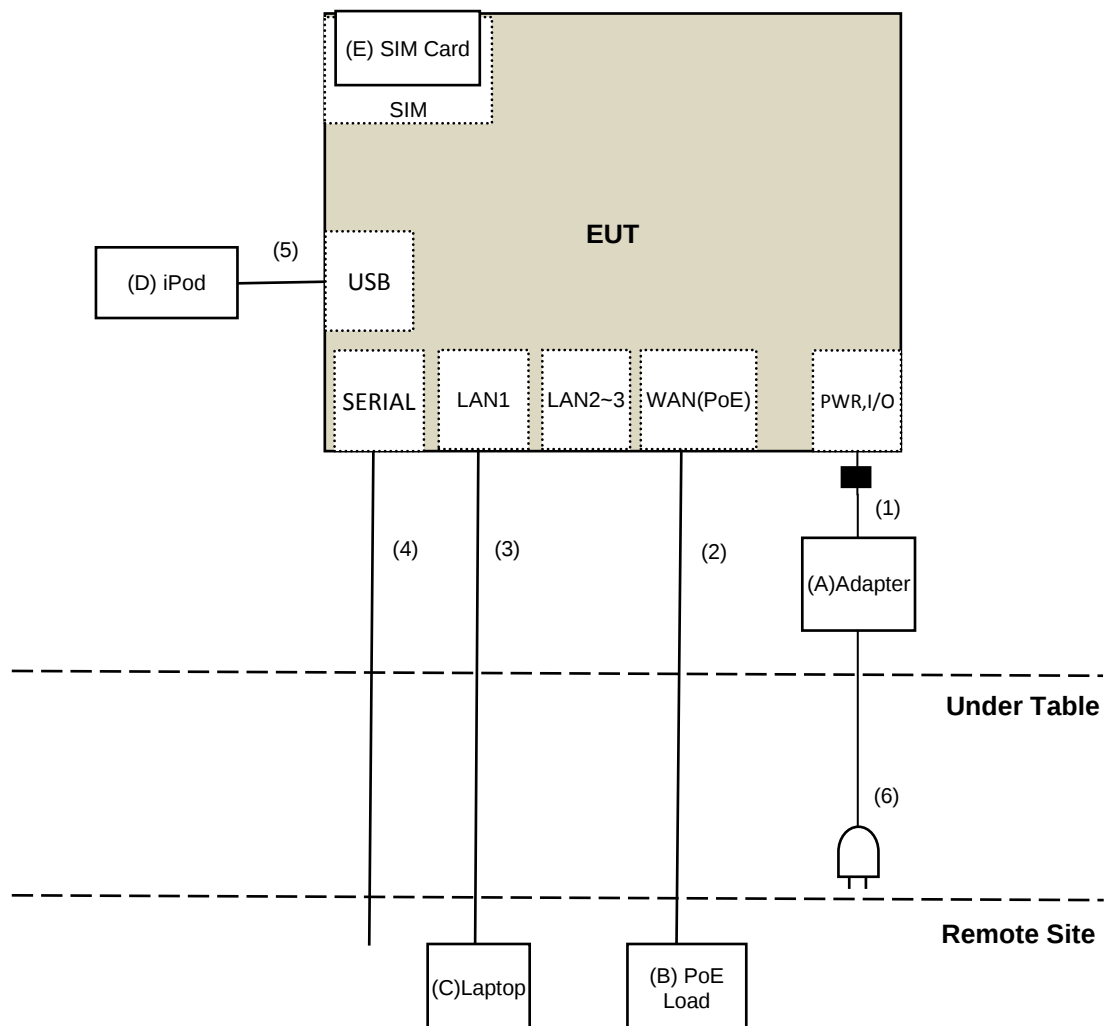

For other test:

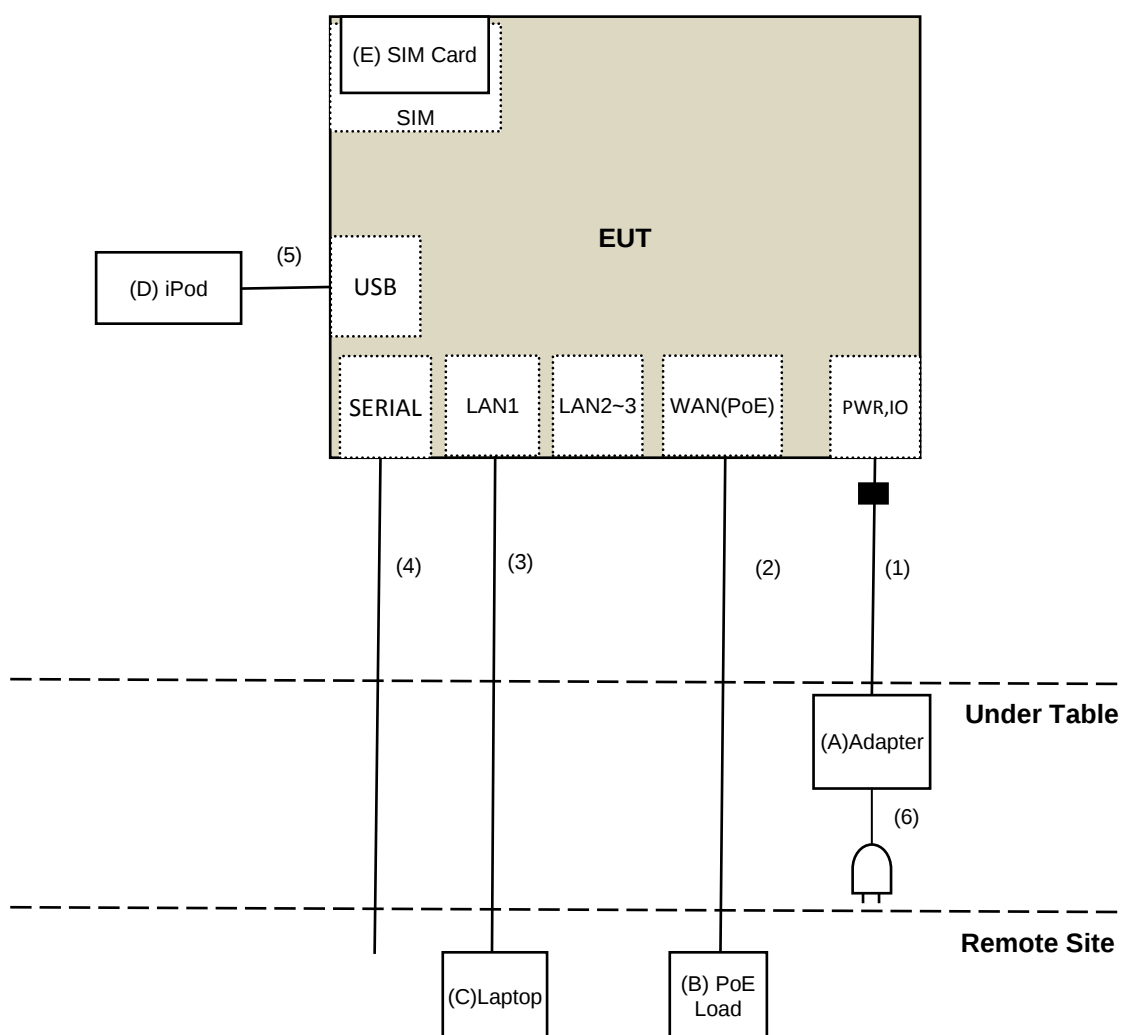

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCi	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-2	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-3	Mar. 21, 2018	Mar. 20, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier Mini-Circuits	ZVA-183-S+	AMP-ZVA-03	May 10, 2018	May 09, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-2000	150318	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-5000	150321	Jan. 29, 2018	Jan. 28, 2019
Pre-Amplifier EMCi	EMC184045SE	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. Tested Date: Jan. 19 to 23, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

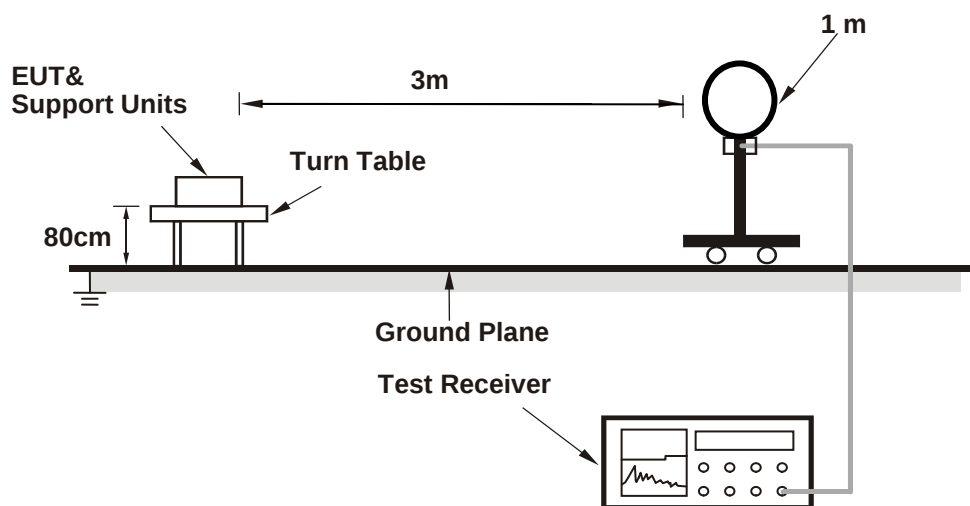

For Radiated emission 30MHz to 1GHz

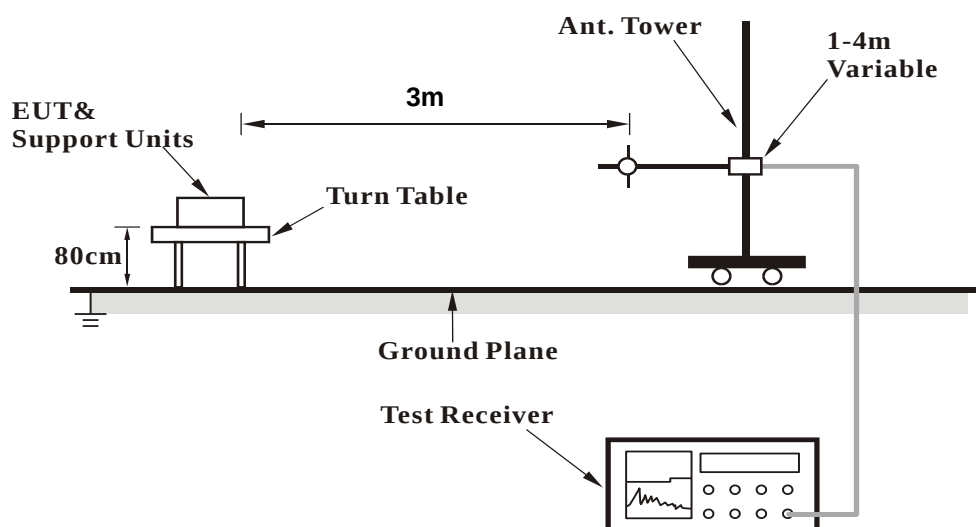

For Radiated emission above 1GHz

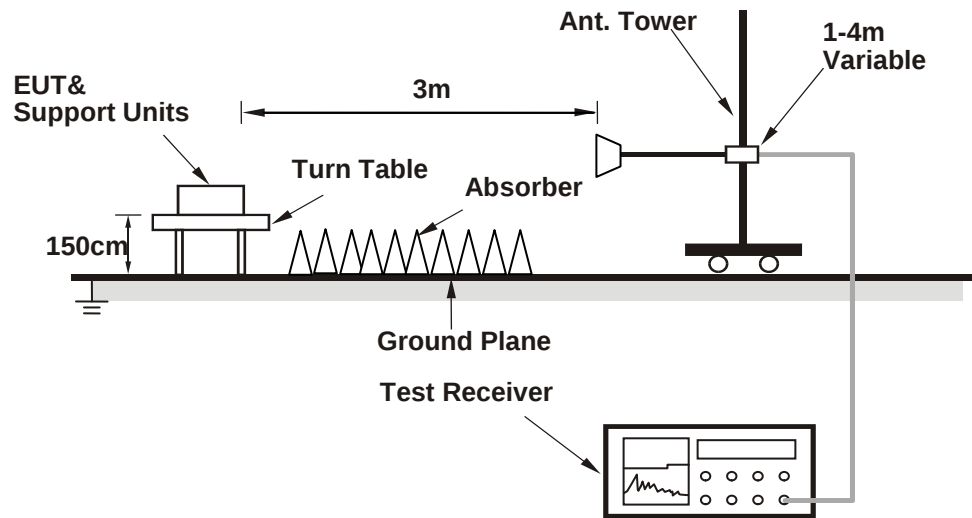

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QDART-Connectivity (1.0.38)) has been activated to set the EUT on specific status.

4.1.7 Test Results

CDD Mode

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	2.07 H	231	57.3	-2.0
2	2390.00	45.3 AV	54.0	-8.7	2.07 H	231	47.3	-2.0
3	*2412.00	108.8 PK			2.07 H	231	110.9	-2.1
4	*2412.00	106.6 AV			2.07 H	231	108.7	-2.1
5	4824.00	40.5 PK	74.0	-33.5	1.67 H	342	38.5	2.0
6	4824.00	34.3 AV	54.0	-19.7	1.67 H	342	32.3	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	2.08 V	153	61.6	-2.0
2	2390.00	53.8 AV	54.0	-0.2	2.08 V	153	55.8	-2.0
3	*2412.00	117.2 PK			2.08 V	153	119.3	-2.1
4	*2412.00	114.9 AV			2.08 V	153	117.0	-2.1
5	4824.00	43.8 PK	74.0	-30.2	1.09 V	360	41.8	2.0
6	4824.00	40.0 AV	54.0	-14.0	1.09 V	360	38.0	2.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.00	51.8 PK	74.0	-22.2	2.12 H	238	53.8	-2.0
2	2388.00	36.6 AV	54.0	-17.4	2.12 H	238	38.6	-2.0
3	*2437.00	111.2 PK			2.12 H	238	113.4	-2.2
4	*2437.00	109.0 AV			2.12 H	238	111.2	-2.2
5	2483.50	51.5 PK	74.0	-22.5	2.12 H	238	53.7	-2.2
6	2483.50	35.7 AV	54.0	-18.3	2.12 H	238	37.9	-2.2
7	4874.00	40.5 PK	74.0	-33.5	1.63 H	337	38.5	2.0
8	4874.00	34.5 AV	54.0	-19.5	1.63 H	337	32.5	2.0
9	7311.00	43.2 PK	74.0	-30.8	1.30 H	300	34.7	8.5
10	7311.00	35.2 AV	54.0	-18.8	1.30 H	300	26.7	8.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.00	56.1 PK	74.0	-17.9	2.06 V	153	58.1	-2.0
2	2388.00	45.1 AV	54.0	-8.9	2.06 V	153	47.1	-2.0
3	*2437.00	119.6 PK			2.06 V	153	121.8	-2.2
4	*2437.00	117.3 AV			2.06 V	153	119.5	-2.2
5	2483.50	55.8 PK	74.0	-18.2	2.06 V	153	58.0	-2.2
6	2483.50	44.2 AV	54.0	-9.8	2.06 V	153	46.4	-2.2
7	4874.00	44.1 PK	74.0	-29.9	1.12 V	360	42.1	2.0
8	4874.00	40.5 AV	54.0	-13.5	1.12 V	360	38.5	2.0
9	7311.00	45.1 PK	74.0	-28.9	2.34 V	340	36.6	8.5
10	7311.00	37.0 AV	54.0	-17.0	2.34 V	340	28.5	8.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.2 PK			2.05 H	224	112.4	-2.2
2	*2462.00	107.5 AV			2.05 H	224	109.7	-2.2
3	2486.20	55.7 PK	74.0	-18.3	2.05 H	224	57.9	-2.2
4	2486.20	45.3 AV	54.0	-8.7	2.05 H	224	47.5	-2.2
5	4924.00	39.4 PK	74.0	-34.6	1.69 H	342	37.4	2.0
6	4924.00	33.4 AV	54.0	-20.6	1.69 H	342	31.4	2.0
7	7386.00	42.3 PK	74.0	-31.7	1.35 H	291	33.7	8.6
8	7386.00	34.2 AV	54.0	-19.8	1.35 H	291	25.6	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.6 PK			2.16 V	183	120.8	-2.2
2	*2462.00	115.8 AV			2.16 V	183	118.0	-2.2
3	2486.20	60.0 PK	74.0	-14.0	2.16 V	183	62.2	-2.2
4	2486.20	53.8 AV	54.0	-0.2	2.16 V	183	56.0	-2.2
5	4924.00	43.2 PK	74.0	-30.8	1.12 V	353	41.2	2.0
6	4924.00	39.8 AV	54.0	-14.2	1.12 V	353	37.8	2.0
7	7386.00	44.0 PK	74.0	-30.0	2.38 V	340	35.4	8.6
8	7386.00	35.8 AV	54.0	-18.2	2.38 V	340	27.2	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	2.02 H	241	64.4	-2.0
2	2390.00	45.1 AV	54.0	-8.9	2.02 H	241	47.1	-2.0
3	*2412.00	106.6 PK			2.02 H	241	108.7	-2.1
4	*2412.00	96.2 AV			2.02 H	241	98.3	-2.1
5	4824.00	39.3 PK	74.0	-34.7	1.69 H	329	37.3	2.0
6	4824.00	33.2 AV	54.0	-20.8	1.69 H	329	31.2	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	2.06 V	152	68.7	-2.0
2	2390.00	53.6 AV	54.0	-0.4	2.06 V	152	55.6	-2.0
3	*2412.00	115.0 PK			2.06 V	152	117.1	-2.1
4	*2412.00	104.5 AV			2.06 V	152	106.6	-2.1
5	4824.00	43.1 PK	74.0	-30.9	1.08 V	338	41.1	2.0
6	4824.00	39.8 AV	54.0	-14.2	1.08 V	338	37.8	2.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	2.12 H	226	63.1	-2.0
2	2390.00	42.2 AV	54.0	-11.8	2.12 H	226	44.2	-2.0
3	*2437.00	112.5 PK			2.12 H	226	114.7	-2.2
4	*2437.00	102.3 AV			2.12 H	226	104.5	-2.2
5	2483.50	62.0 PK	74.0	-12.0	2.12 H	226	64.2	-2.2
6	2483.50	40.7 AV	54.0	-13.3	2.12 H	226	42.9	-2.2
7	4874.00	40.5 PK	74.0	-33.5	1.65 H	336	38.5	2.0
8	4874.00	34.3 AV	54.0	-19.7	1.65 H	336	32.3	2.0
9	7311.00	43.1 PK	74.0	-30.9	1.29 H	298	34.6	8.5
10	7311.00	35.0 AV	54.0	-19.0	1.29 H	298	26.5	8.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	2.03 V	152	67.4	-2.0
2	2390.00	50.7 AV	54.0	-3.3	2.03 V	152	52.7	-2.0
3	*2437.00	120.9 PK			2.03 V	152	123.1	-2.2
4	*2437.00	110.6 AV			2.03 V	152	112.8	-2.2
5	2483.50	66.3 PK	74.0	-7.7	2.03 V	152	68.5	-2.2
6	2483.50	49.2 AV	54.0	-4.8	2.03 V	152	51.4	-2.2
7	4874.00	44.8 PK	74.0	-29.2	1.11 V	346	42.8	2.0
8	4874.00	41.0 AV	54.0	-13.0	1.11 V	346	39.0	2.0
9	7311.00	44.6 PK	74.0	-29.4	2.36 V	352	36.1	8.5
10	7311.00	36.7 AV	54.0	-17.3	2.36 V	352	28.2	8.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.9 PK			2.08 H	226	110.1	-2.2
2	*2462.00	97.1 AV			2.08 H	226	99.3	-2.2
3	2483.50	65.8 PK	74.0	-8.2	2.08 H	226	68.0	-2.2
4	2483.50	45.4 AV	54.0	-8.6	2.08 H	226	47.6	-2.2
5	4924.00	38.9 PK	74.0	-35.1	1.74 H	342	36.9	2.0
6	4924.00	33.0 AV	54.0	-21.0	1.74 H	342	31.0	2.0
7	7386.00	42.0 PK	74.0	-32.0	1.36 H	290	33.4	8.6
8	7386.00	34.2 AV	54.0	-19.8	1.36 H	290	25.6	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.3 PK			2.06 V	214	118.5	-2.2
2	*2462.00	105.4 AV			2.06 V	214	107.6	-2.2
3	2483.50	70.1 PK	74.0	-3.9	2.06 V	214	72.3	-2.2
4	2483.50	53.9 AV	54.0	-0.1	2.06 V	214	56.1	-2.2
5	4924.00	43.6 PK	74.0	-30.4	1.14 V	340	41.6	2.0
6	4924.00	40.0 AV	54.0	-14.0	1.14 V	340	38.0	2.0
7	7386.00	43.9 PK	74.0	-30.1	2.36 V	325	35.3	8.6
8	7386.00	35.5 AV	54.0	-18.5	2.36 V	325	26.9	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

VHT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.09 H	241	63.5	-2.0
2	2390.00	45.4 AV	54.0	-8.6	2.09 H	241	47.4	-2.0
3	*2412.00	106.6 PK			2.09 H	241	108.7	-2.1
4	*2412.00	96.8 AV			2.09 H	241	98.9	-2.1
5	4824.00	39.3 PK	74.0	-34.7	1.71 H	350	37.3	2.0
6	4824.00	33.5 AV	54.0	-20.5	1.71 H	350	31.5	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	2.28 V	135	67.8	-2.0
2	2390.00	53.9 AV	54.0	-0.1	2.28 V	135	55.9	-2.0
3	*2412.00	115.0 PK			2.28 V	135	117.1	-2.1
4	*2412.00	105.1 AV			2.28 V	135	107.2	-2.1
5	4824.00	43.0 PK	74.0	-31.0	1.10 V	353	41.0	2.0
6	4824.00	39.6 AV	54.0	-14.4	1.10 V	353	37.6	2.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.70	61.4 PK	74.0	-12.6	2.05 H	224	63.4	-2.0
2	2388.70	40.4 AV	54.0	-13.6	2.05 H	224	42.4	-2.0
3	*2437.00	112.5 PK			2.05 H	224	114.7	-2.2
4	*2437.00	102.3 AV			2.05 H	224	104.5	-2.2
5	2483.50	62.2 PK	74.0	-11.8	2.05 H	224	64.4	-2.2
6	2483.50	42.0 AV	54.0	-12.0	2.05 H	224	44.2	-2.2
7	4874.00	40.8 PK	74.0	-33.2	1.66 H	346	38.8	2.0
8	4874.00	34.9 AV	54.0	-19.1	1.66 H	346	32.9	2.0
9	7311.00	43.5 PK	74.0	-30.5	1.31 H	293	35.0	8.5
10	7311.00	35.7 AV	54.0	-18.3	1.31 H	293	27.2	8.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.70	65.7 PK	74.0	-8.3	2.19 V	141	67.7	-2.0
2	2388.70	48.9 AV	54.0	-5.1	2.19 V	141	50.9	-2.0
3	*2437.00	120.9 PK			2.19 V	141	123.1	-2.2
4	*2437.00	110.6 AV			2.19 V	141	112.8	-2.2
5	2483.50	66.5 PK	74.0	-7.5	2.19 V	141	68.7	-2.2
6	2483.50	50.5 AV	54.0	-3.5	2.19 V	141	52.7	-2.2
7	4874.00	43.4 PK	74.0	-30.6	1.17 V	360	41.4	2.0
8	4874.00	40.0 AV	54.0	-14.0	1.17 V	360	38.0	2.0
9	7311.00	45.5 PK	74.0	-28.5	2.39 V	334	37.0	8.5
10	7311.00	37.3 AV	54.0	-16.7	2.39 V	334	28.8	8.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.5 PK			2.07 H	225	110.7	-2.2
2	*2462.00	97.5 AV			2.07 H	225	99.7	-2.2
3	2483.50	67.7 PK	74.0	-6.3	2.07 H	225	69.9	-2.2
4	2483.50	45.3 AV	54.0	-8.7	2.07 H	225	47.5	-2.2
5	4924.00	39.1 PK	74.0	-34.9	1.71 H	331	37.1	2.0
6	4924.00	33.1 AV	54.0	-20.9	1.71 H	331	31.1	2.0
7	7386.00	42.1 PK	74.0	-31.9	1.29 H	279	33.5	8.6
8	7386.00	34.0 AV	54.0	-20.0	1.29 H	279	25.4	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.9 PK			2.23 V	155	119.1	-2.2
2	*2462.00	105.8 AV			2.23 V	155	108.0	-2.2
3	2483.50	72.0 PK	74.0	-2.0	2.23 V	155	74.2	-2.2
4	2483.50	53.8 AV	54.0	-0.2	2.23 V	155	56.0	-2.2
5	4924.00	43.1 PK	74.0	-30.9	1.11 V	338	41.1	2.0
6	4924.00	39.6 AV	54.0	-14.4	1.11 V	338	37.6	2.0
7	7386.00	43.5 PK	74.0	-30.5	2.42 V	328	34.9	8.6
8	7386.00	35.3 AV	54.0	-18.7	2.42 V	328	26.7	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

VHT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	2.06 H	230	64.4	-2.0
2	2390.00	45.3 AV	54.0	-8.7	2.06 H	230	47.3	-2.0
3	*2422.00	100.5 PK			2.06 H	230	102.6	-2.1
4	*2422.00	90.9 AV			2.06 H	230	93.0	-2.1
5	4844.00	39.3 PK	74.0	-34.7	1.72 H	326	37.4	1.9
6	4844.00	33.2 AV	54.0	-20.8	1.72 H	326	31.3	1.9
7	7266.00	41.6 PK	74.0	-32.4	1.34 H	299	33.1	8.5
8	7266.00	33.7 AV	54.0	-20.3	1.34 H	299	25.2	8.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.92 V	205	68.7	-2.0
2	2390.00	53.8 AV	54.0	-0.2	1.92 V	205	55.8	-2.0
3	*2422.00	108.9 PK			1.92 V	205	111.0	-2.1
4	*2422.00	99.2 AV			1.92 V	205	101.3	-2.1
5	4844.00	42.9 PK	74.0	-31.1	1.09 V	350	41.0	1.9
6	4844.00	39.3 AV	54.0	-14.7	1.09 V	350	37.4	1.9
7	7266.00	43.5 PK	74.0	-30.5	2.38 V	329	35.0	8.5
8	7266.00	35.6 AV	54.0	-18.4	2.38 V	329	27.1	8.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	2.08 H	217	62.9	-2.0
2	2390.00	42.9 AV	54.0	-11.1	2.08 H	217	44.9	-2.0
3	*2437.00	104.2 PK			2.08 H	217	106.4	-2.2
4	*2437.00	93.9 AV			2.08 H	217	96.1	-2.2
5	2483.50	64.7 PK	74.0	-9.3	2.08 H	217	66.9	-2.2
6	2483.50	45.3 AV	54.0	-8.7	2.08 H	217	47.5	-2.2
7	4874.00	40.3 PK	74.0	-33.7	1.62 H	350	38.3	2.0
8	4874.00	34.5 AV	54.0	-19.5	1.62 H	350	32.5	2.0
9	7311.00	42.7 PK	74.0	-31.3	1.31 H	312	34.2	8.5
10	7311.00	34.7 AV	54.0	-19.3	1.31 H	312	26.2	8.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	2.00 V	216	67.2	-2.0
2	2390.00	51.4 AV	54.0	-2.6	2.00 V	216	53.4	-2.0
3	*2437.00	112.6 PK			2.00 V	216	114.8	-2.2
4	*2437.00	102.2 AV			2.00 V	216	104.4	-2.2
5	2483.50	69.0 PK	74.0	-5.0	2.00 V	216	71.2	-2.2
6	2483.50	53.8 AV	54.0	-0.2	2.00 V	216	56.0	-2.2
7	4874.00	44.3 PK	74.0	-29.7	1.09 V	352	42.3	2.0
8	4874.00	40.7 AV	54.0	-13.3	1.09 V	352	38.7	2.0
9	7311.00	45.0 PK	74.0	-29.0	2.39 V	349	36.5	8.5
10	7311.00	37.2 AV	54.0	-16.8	2.39 V	349	28.7	8.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.7 PK			2.01 H	223	105.9	-2.2
2	*2452.00	93.5 AV			2.01 H	223	95.7	-2.2
3	2483.50	62.5 PK	74.0	-11.5	2.01 H	223	64.7	-2.2
4	2483.50	45.4 AV	54.0	-8.6	2.01 H	223	47.6	-2.2
5	4904.00	39.7 PK	74.0	-34.3	1.67 H	333	37.7	2.0
6	4904.00	33.6 AV	54.0	-20.4	1.67 H	333	31.6	2.0
7	7356.00	42.0 PK	74.0	-32.0	1.30 H	306	33.5	8.5
8	7356.00	34.1 AV	54.0	-19.9	1.30 H	306	25.6	8.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	112.1 PK			1.95 V	219	114.3	-2.2
2	*2452.00	101.8 AV			1.95 V	219	104.0	-2.2
3	2483.50	66.8 PK	74.0	-7.2	1.95 V	219	69.0	-2.2
4	2483.50	53.9 AV	54.0	-0.1	1.95 V	219	56.1	-2.2
5	4904.00	42.8 PK	74.0	-31.2	1.14 V	353	40.8	2.0
6	4904.00	39.4 AV	54.0	-14.6	1.14 V	353	37.4	2.0
7	7356.00	43.8 PK	74.0	-30.2	2.41 V	344	35.3	8.5
8	7356.00	35.6 AV	54.0	-18.4	2.41 V	344	27.1	8.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11b

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.02	30.3 QP	40.0	-9.7	1.00 H	58	40.0	-9.7
2	90.16	31.6 QP	43.5	-11.9	2.00 H	64	44.9	-13.3
3	125.01	28.8 QP	43.5	-14.7	1.50 H	40	38.2	-9.4
4	148.78	26.7 QP	43.5	-16.8	2.00 H	269	34.6	-7.9
5	215.97	25.2 QP	43.5	-18.3	1.00 H	265	35.6	-10.4
6	250.02	22.5 QP	46.0	-23.5	1.00 H	62	31.2	-8.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

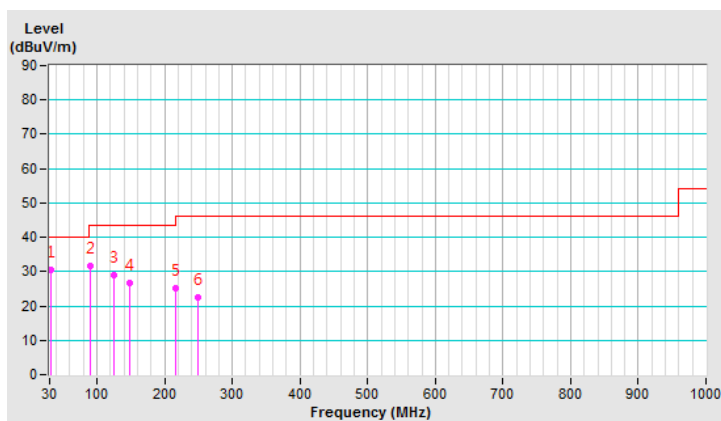


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.36	34.0 QP	40.0	-6.0	1.00 V	131	43.5	-9.5
2	92.32	30.5 QP	43.5	-13.0	1.50 V	77	43.5	-13.0
3	125.01	29.9 QP	43.5	-13.6	1.00 V	8	39.3	-9.4
4	149.79	25.2 QP	43.5	-18.3	1.00 V	158	33.1	-7.9
5	209.04	27.6 QP	43.5	-15.9	1.00 V	1	38.0	-10.4
6	250.00	24.8 QP	46.0	-21.2	1.50 V	336	33.5	-8.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

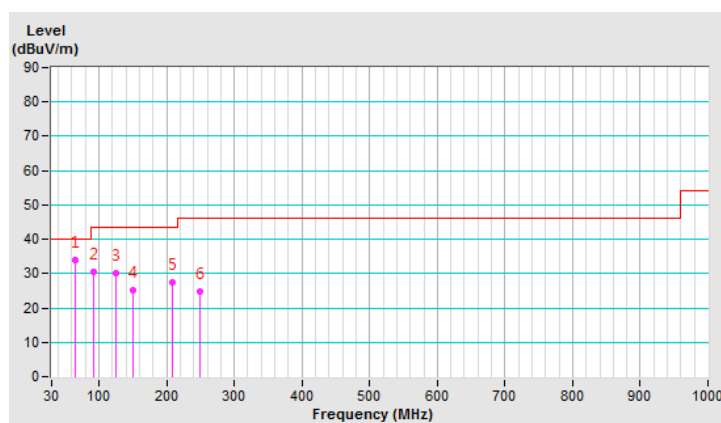

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Conc_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Jan. 23, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

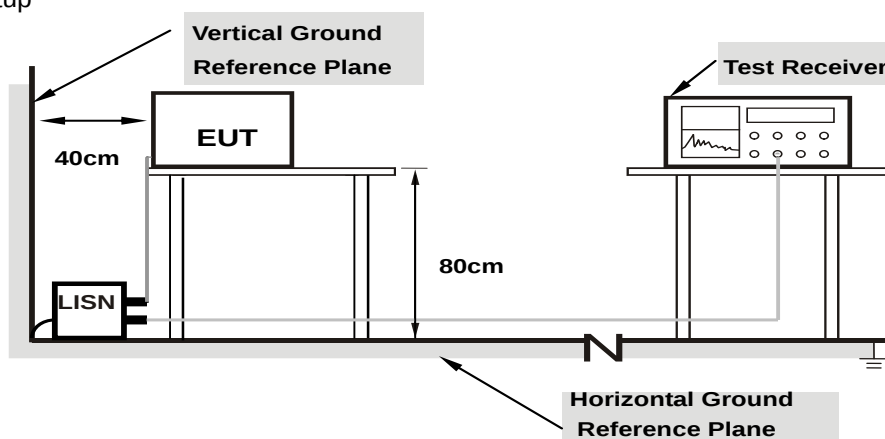

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.02	39.04	24.58	49.06	34.60	66.00	56.00	-16.94	-21.40
2	0.18125	10.03	32.54	26.73	42.57	36.76	64.43	54.43	-21.86	-17.67
3	0.25547	10.05	21.90	10.39	31.95	20.44	61.58	51.58	-29.63	-31.14
4	0.42734	10.07	31.67	24.54	41.74	34.61	57.30	47.30	-15.56	-12.69
5	0.98984	10.11	17.78	9.30	27.89	19.41	56.00	46.00	-28.11	-26.59
6	2.47656	10.18	17.59	10.50	27.77	20.68	56.00	46.00	-28.23	-25.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

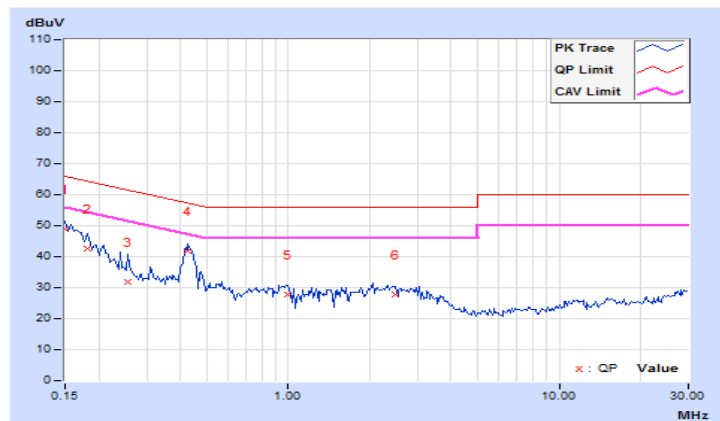


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.93	38.86	24.40	48.79	34.33	66.00	56.00	-17.21	-21.67
2	0.18516	9.94	32.44	19.29	42.38	29.23	64.25	54.25	-21.87	-25.02
3	0.42344	9.96	31.49	24.54	41.45	34.50	57.38	47.38	-15.93	-12.88
4	0.97422	9.99	19.12	11.62	29.11	21.61	56.00	46.00	-26.89	-24.39
5	2.15234	10.05	18.82	11.52	28.87	21.57	56.00	46.00	-27.13	-24.43
6	12.22656	10.49	9.04	1.98	19.53	12.47	60.00	50.00	-40.47	-37.53

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

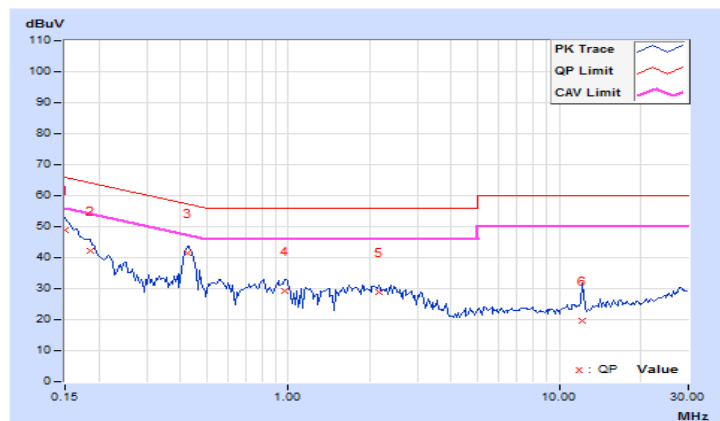


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	9.08	8.61	0.5	Pass
6	2437	9.54	8.58	0.5	Pass
11	2462	8.11	8.55	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.40	16.43	0.5	Pass
6	2437	15.99	16.38	0.5	Pass
11	2462	16.36	16.41	0.5	Pass

VHT20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.96	17.65	0.5	Pass
6	2437	16.59	17.63	0.5	Pass
11	2462	17.65	17.66	0.5	Pass

VHT40


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	34.05	35.30	0.5	Pass
6	2437	35.17	35.24	0.5	Pass
9	2452	35.22	35.47	0.5	Pass

Spectrum Plot of Worst Value


802.11b_Chain 0 / CH11

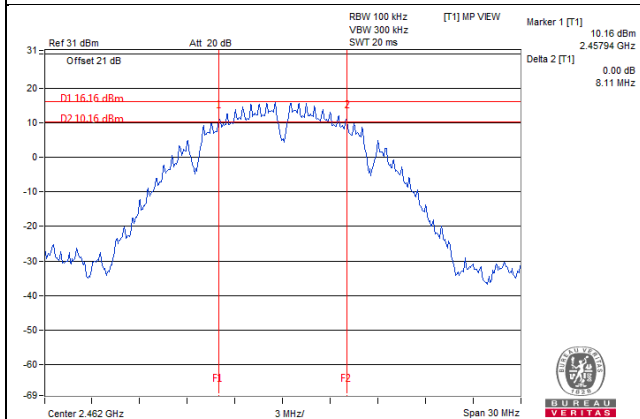


802.11g_Chain 0 / CH1

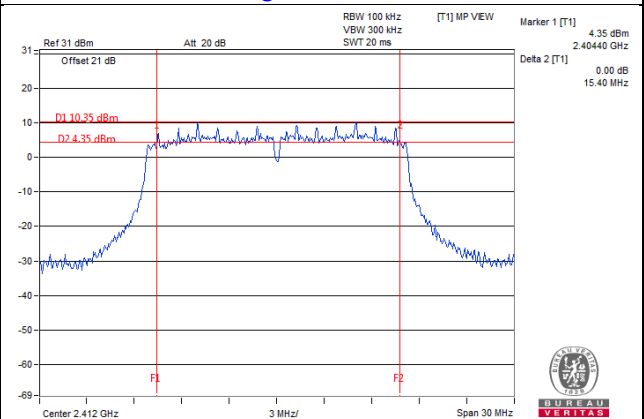

VHT20_Chain 0 / CH6

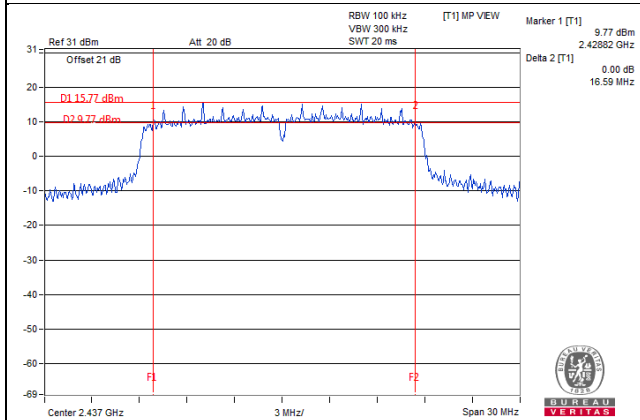

VHT40_Chain 0 / CH3

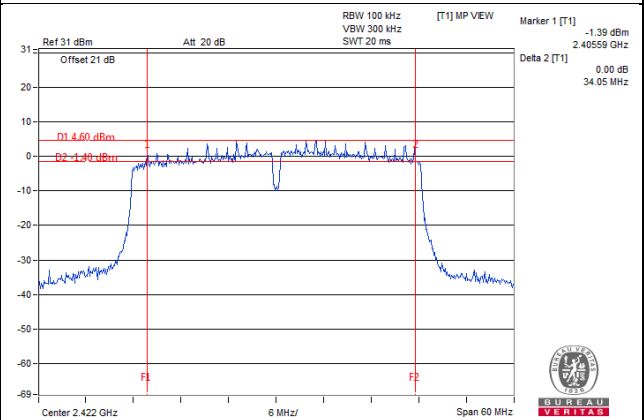

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	24.45	24.68	572.377	27.58	30	Pass
6	2437	26.10	26.51	855.093	29.32	30	Pass
11	2462	26.62	25.92	850.039	29.29	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.71	20.25	223.686	23.50	30	Pass
6	2437	25.91	25.90	778.987	28.92	30	Pass
11	2462	19.71	19.25	177.681	22.50	30	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.74	20.09	220.671	23.44	30	Pass
6	2437	25.94	25.77	770.217	28.87	30	Pass
11	2462	21.99	21.45	297.762	24.74	30	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.53	18.80	147.143	21.68	30	Pass
6	2437	20.88	20.41	232.363	23.66	30	Pass
9	2452	18.52	18.19	137.038	21.37	30	Pass

Beamforming Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.74	20.09	220.671	23.44	28.88	Pass
6	2437	25.94	25.77	770.217	28.87	28.88	Pass
11	2462	21.99	21.45	297.762	24.74	28.88	Pass

Note: The directional gain = $4.11\text{dBi} + 10\log(2) = 7.12\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.12 - 6) = 28.88\text{dBm}$.

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.53	18.80	147.143	21.68	28.88	Pass
6	2437	20.88	20.41	232.363	23.66	28.88	Pass
9	2452	18.52	18.19	137.038	21.37	28.88	Pass


Note: The directional gain = $4.11\text{dBi} + 10\log(2) = 7.12\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.12 - 6) = 28.88\text{dBm}$.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b, VHT20

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For 802.11g, VHT40

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log(1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

CDD Mode

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-5.64	3.01	-2.63	6.88	Pass
	6	2437	-4.86	3.01	-1.85	6.88	Pass
	11	2462	-6.27	3.01	-3.26	6.88	Pass
1	1	2412	-6.62	3.01	-3.61	6.88	Pass
	6	2437	-4.81	3.01	-1.80	6.88	Pass
	11	2462	-8.21	3.01	-5.20	6.88	Pass

Note: 1. The directional gain = $4.11\text{dBi} + 10\log(2) = 7.12\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.12-6) = 6.88\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.02	3.01	0.20	-8.81	6.88	Pass
	6	2437	-6.79	3.01	0.20	-3.58	6.88	Pass
	11	2462	-12.25	3.01	0.20	-9.04	6.88	Pass
1	1	2412	-13.14	3.01	0.20	-9.93	6.88	Pass
	6	2437	-8.12	3.01	0.20	-4.91	6.88	Pass
	11	2462	-11.98	3.01	0.20	-8.77	6.88	Pass

Note: 1. The directional gain = $4.11\text{dBi} + 10\log(2) = 7.12\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.12-6) = 6.88\text{dBm}$.
2. Refer to section 3.3 for duty cycle spectrum plot.

VHT20

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.73	3.01	-8.72	6.88	Pass
	6	2437	-6.93	3.01	-3.92	6.88	Pass
	11	2462	-11.04	3.01	-8.03	6.88	Pass
1	1	2412	-12.71	3.01	-9.70	6.88	Pass
	6	2437	-8.27	3.01	-5.26	6.88	Pass
	11	2462	-11.82	3.01	-8.81	6.88	Pass

Note: 1. The directional gain = $4.11\text{dBi} + 10\log(2) = 7.12\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.12-6) = 6.88\text{dBm}$.

VHT40


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-16.58	3.01	0.16	-13.41	6.88	Pass
	6	2437	-14.86	3.01	0.16	-11.69	6.88	Pass
	9	2452	-16.86	3.01	0.16	-13.69	6.88	Pass
1	3	2422	-17.28	3.01	0.16	-14.11	6.88	Pass
	6	2437	-15.32	3.01	0.16	-12.15	6.88	Pass
	9	2452	-18.21	3.01	0.16	-15.04	6.88	Pass

Note: 1. The directional gain = $4.11\text{dBi} + 10\log(2) = 7.12\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.12 - 6) = 6.88\text{dBm}$.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b_Chain 1 / CH6

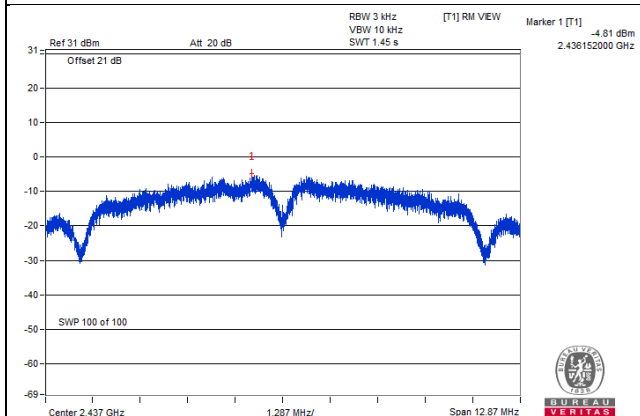


802.11g_Chain 0 / CH6

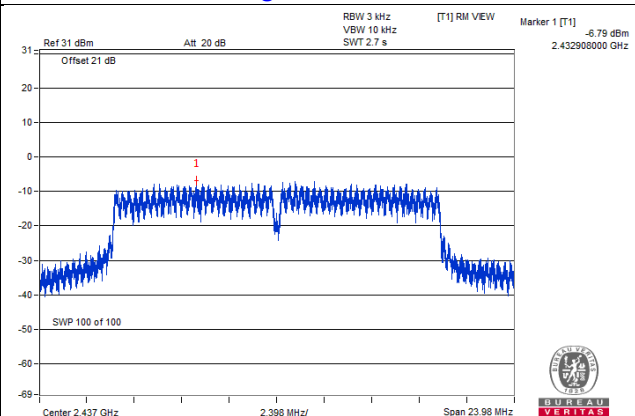

VHT20_Chain 0 / CH6

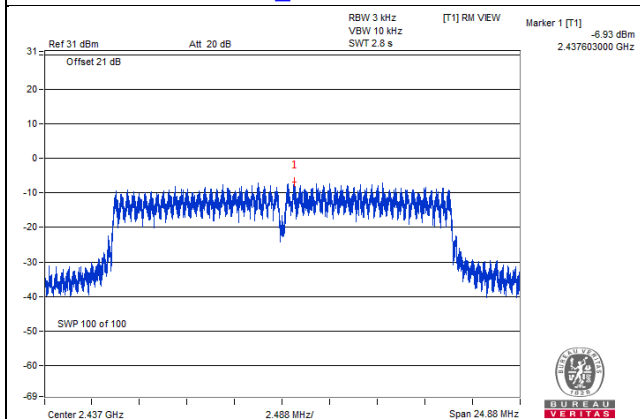

VHT40_Chain 0 / CH6

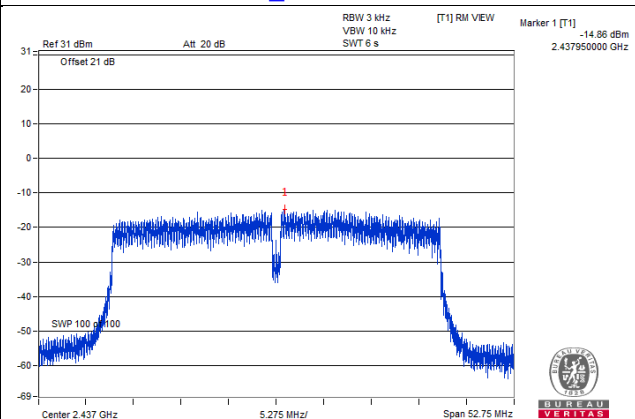


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

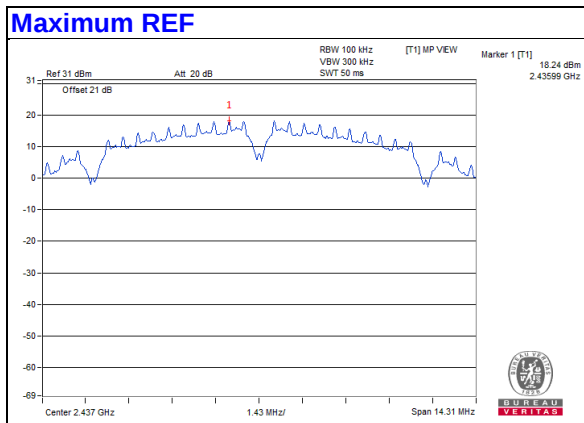


Chain 0


CH 1

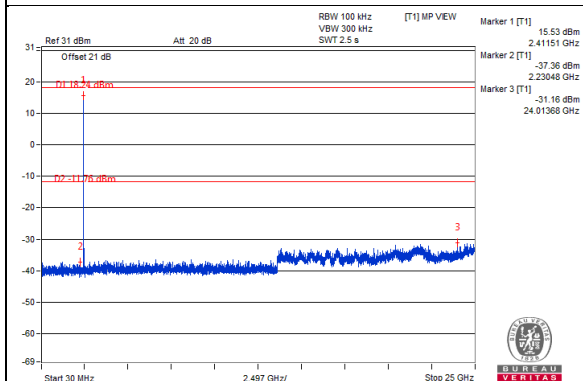


CH 6

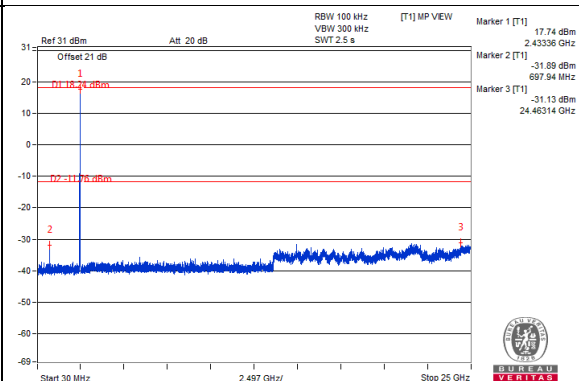


CH 11

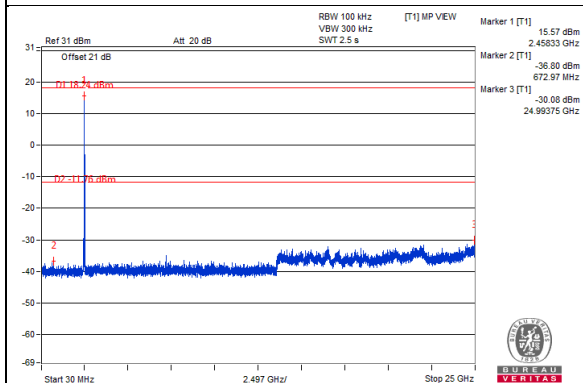

CH 1 Band edge

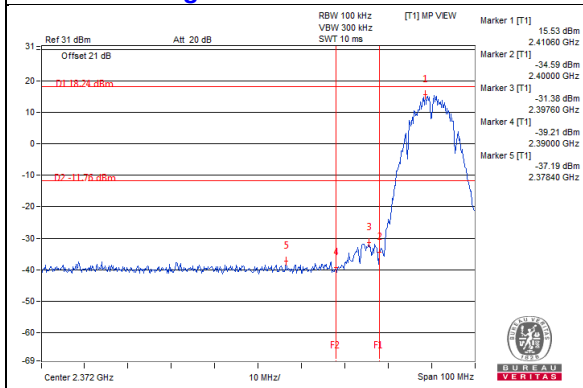


CH 11 Band edge

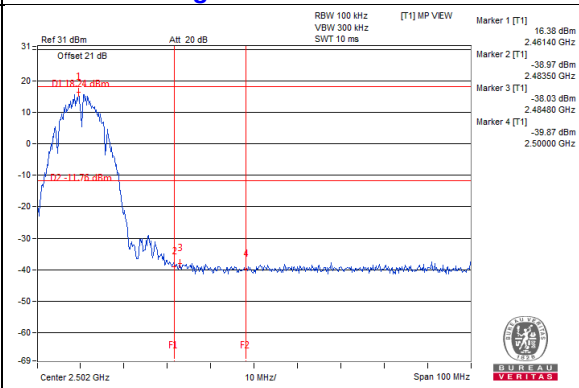


Chain 1


CH 1

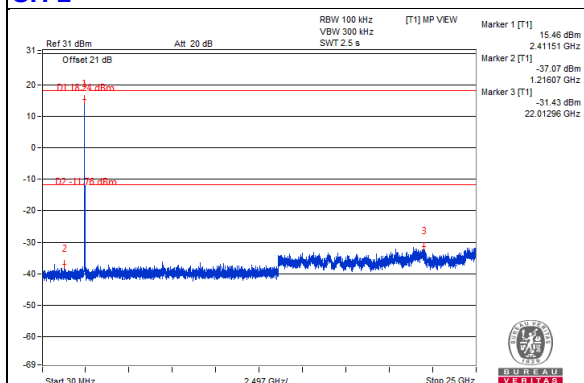


CH 6

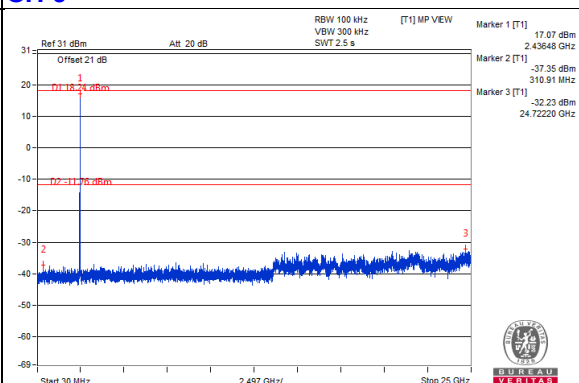


CH 11

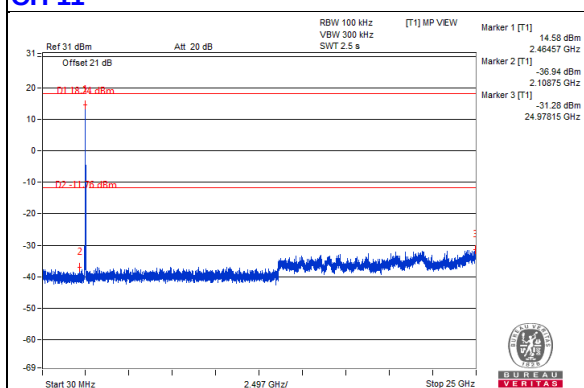

CH 1 Band edge

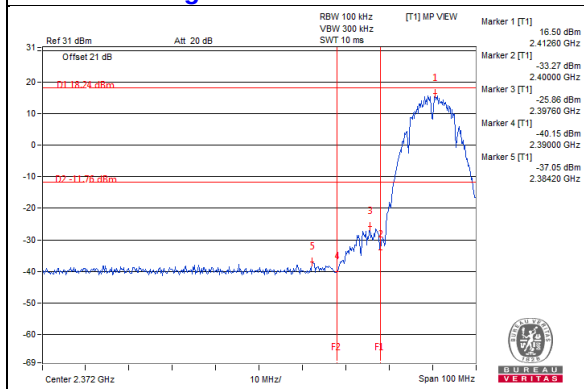


CH 11 Band edge

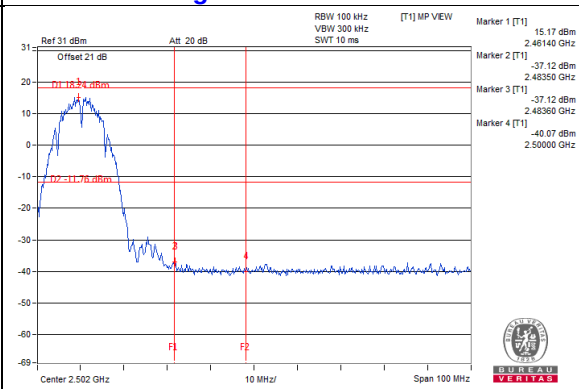


802.11g

Maximum REF

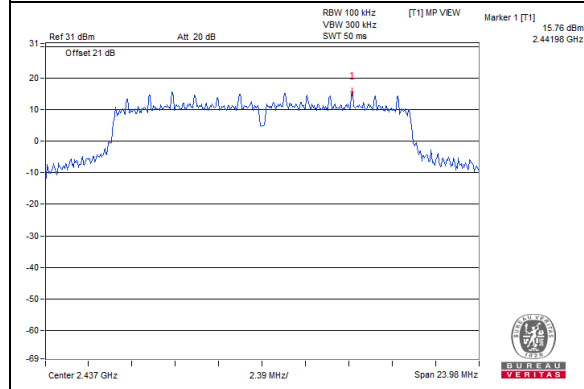


Chain 0


CH 1

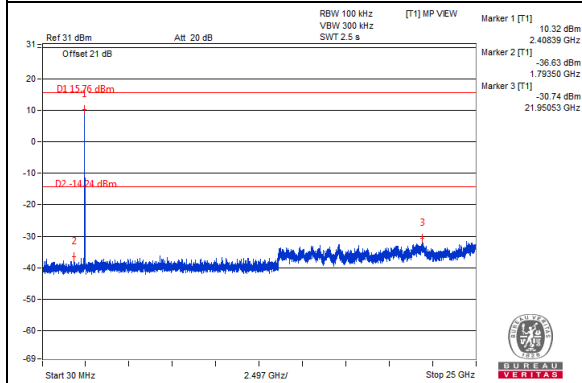


CH 6

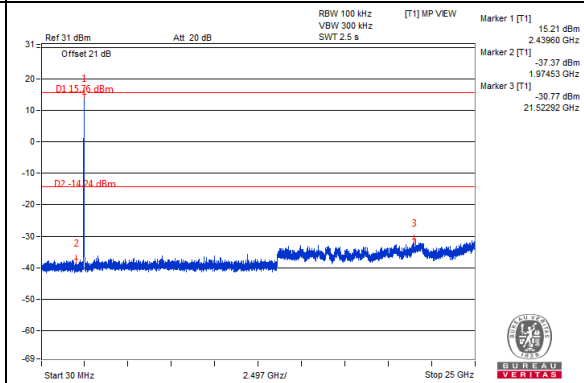


CH 11

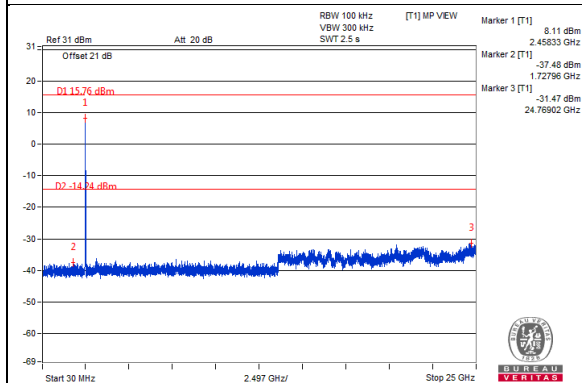

CH 1 Band edge

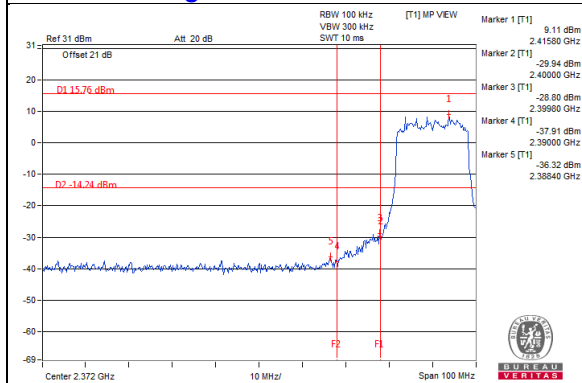


CH 11 Band edge

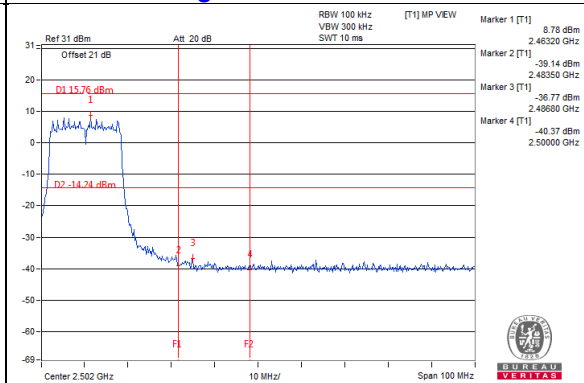


Chain 1


CH 1

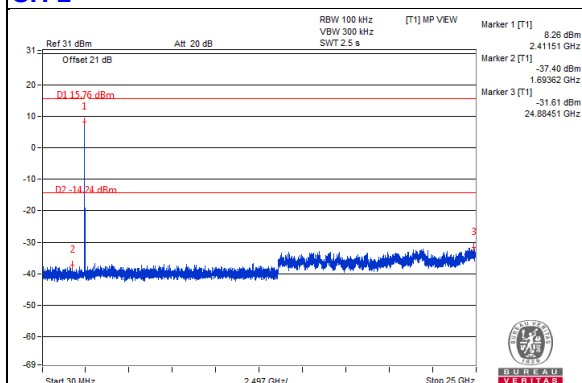


CH 6

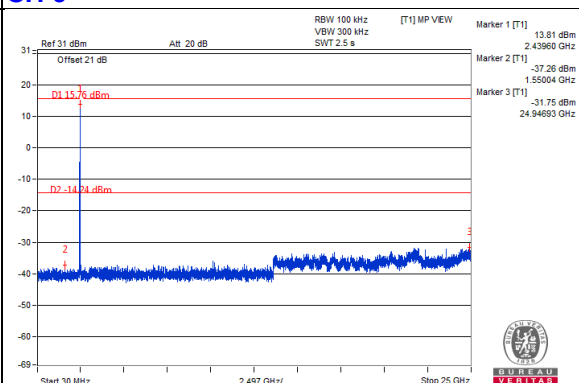


CH 11

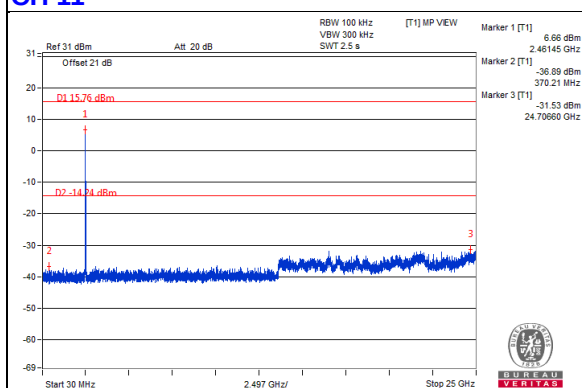

CH 1 Band edge

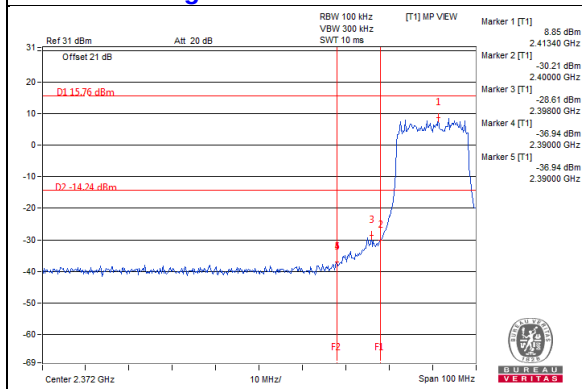


CH 11 Band edge

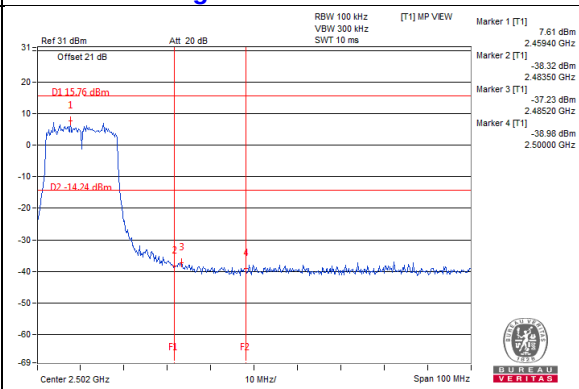


VHT20

Maximum REF

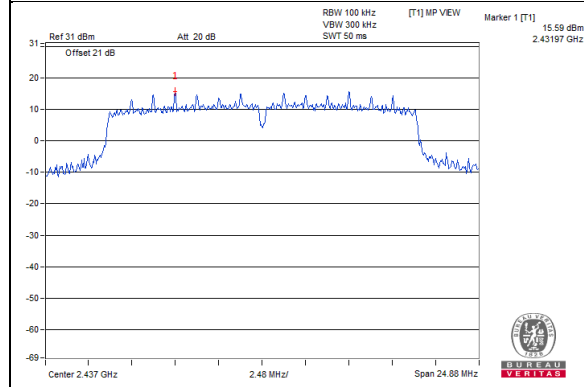


Chain 0


CH 1

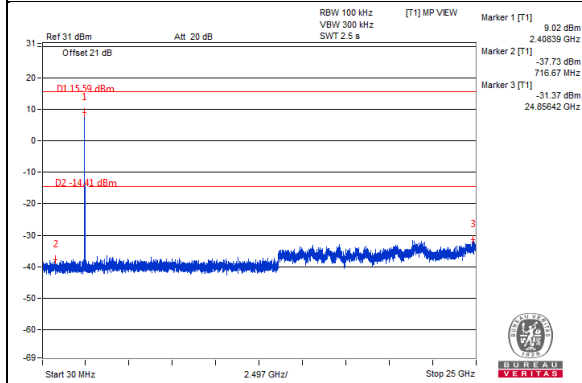


CH 6

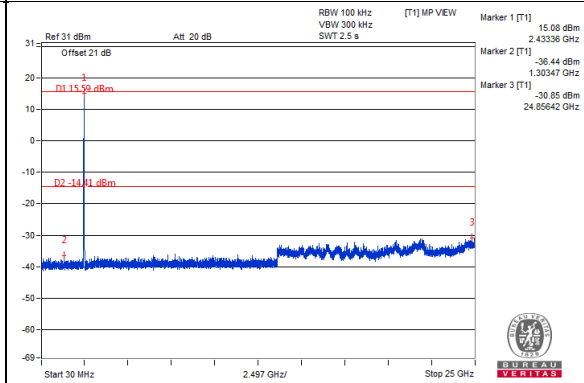


CH 11

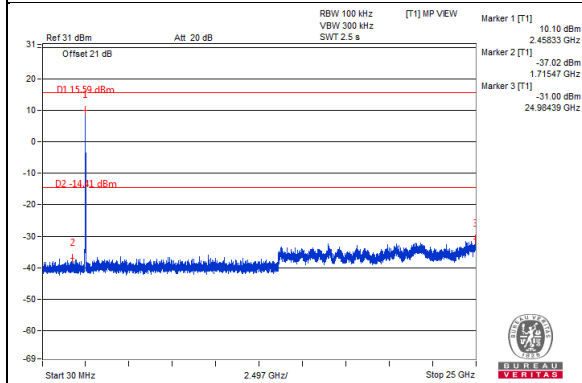

CH 1 Band edge

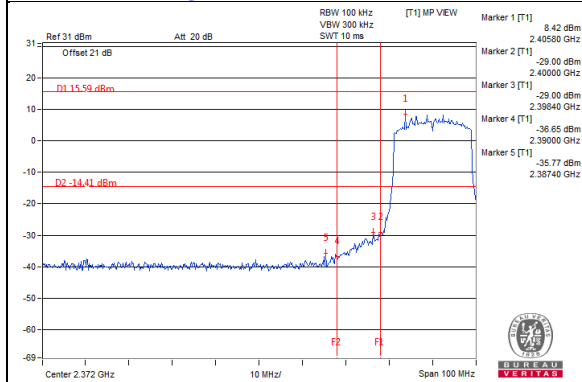


CH 11 Band edge

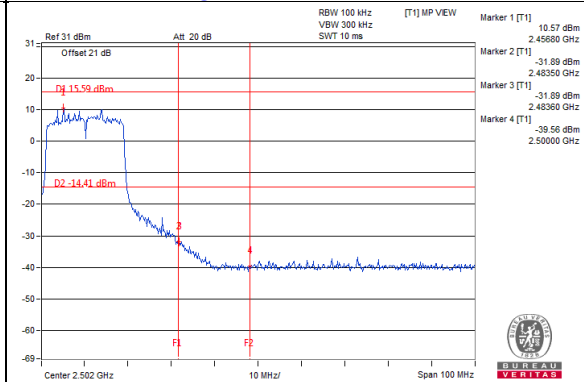


Chain 1


CH 1

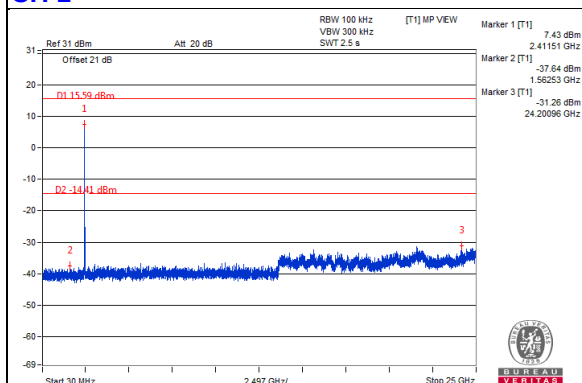


CH 6

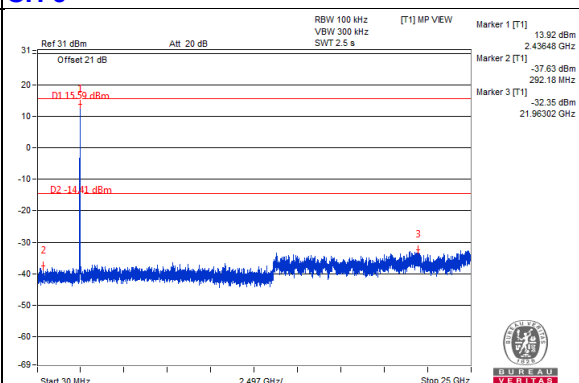


CH 11

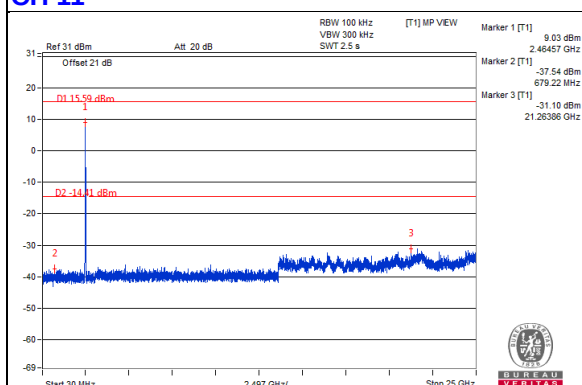

CH 1 Band edge

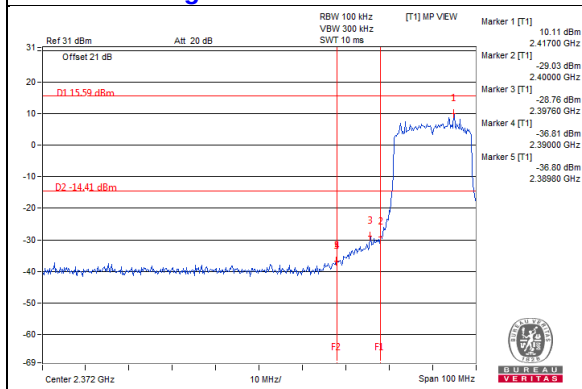


CH 11 Band edge

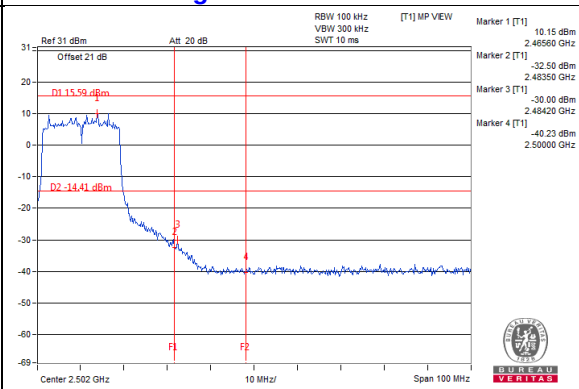


VHT40

Maximum REF

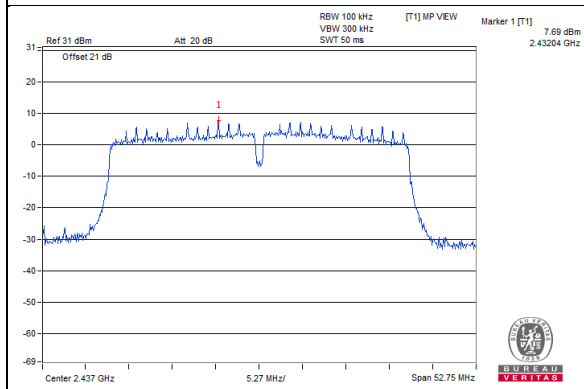


Chain 0



CH 3

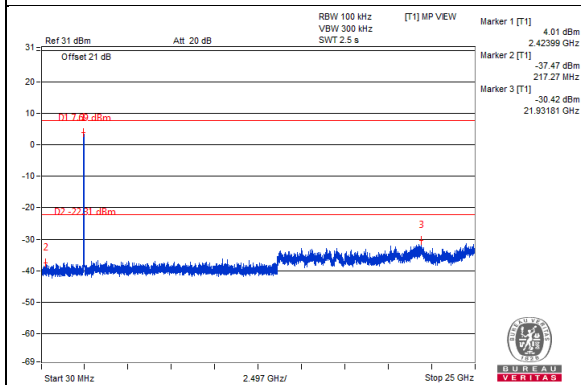


CH 6

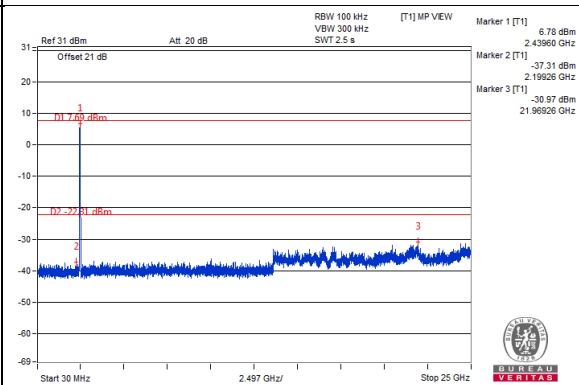


CH 9

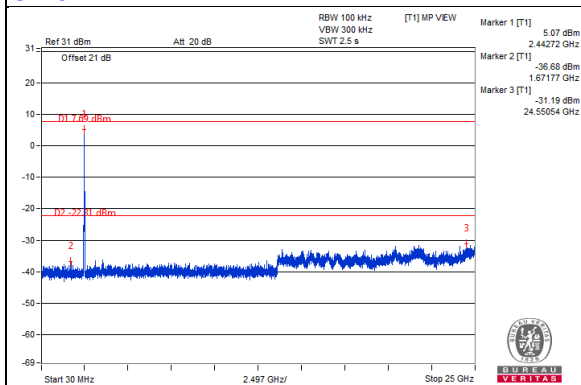

CH 3 Band edge

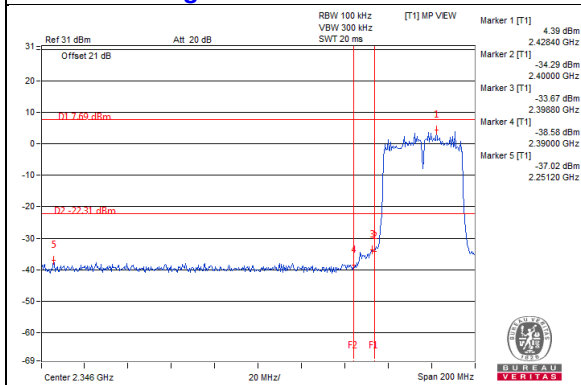


CH 9 Band edge

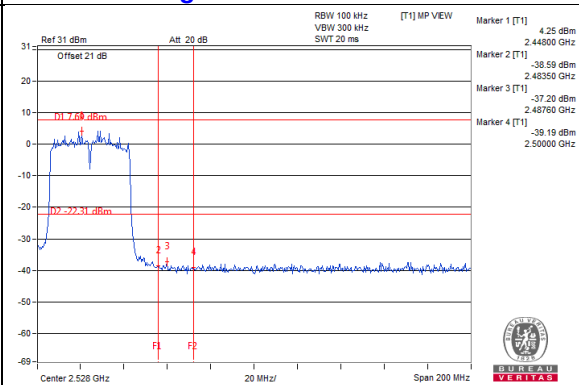


Chain 1


CH 3

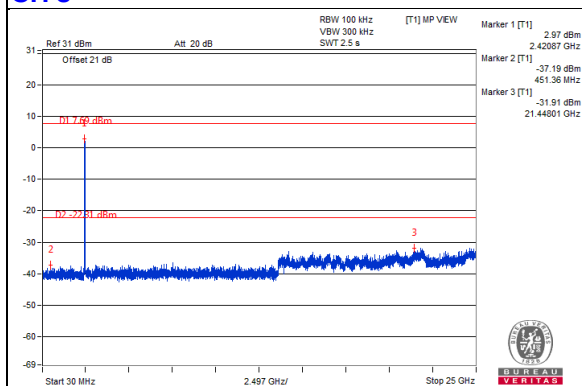


CH 6

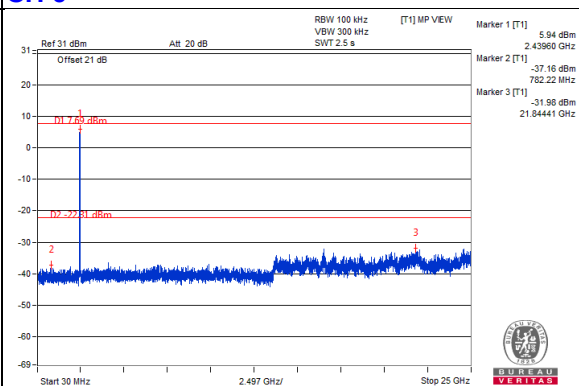


CH 9

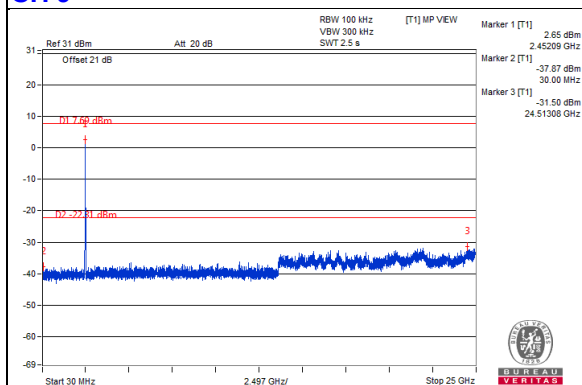

CH 3 Band edge

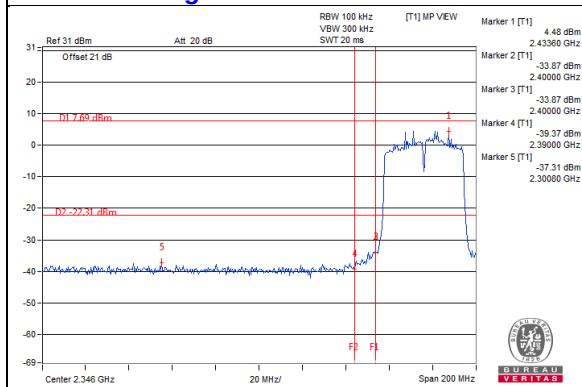

CH 9 Band edge

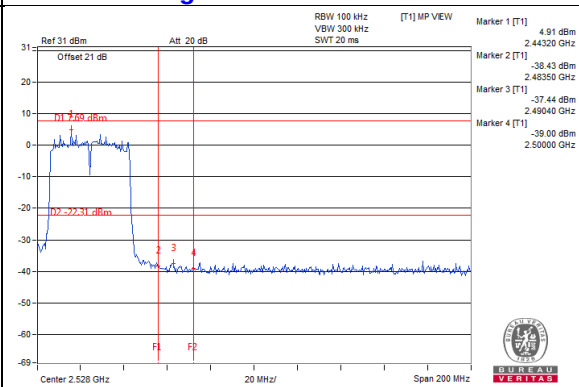

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---