


产品承认书

承认书项目表

NO.	内容 (Contents)	页数 (Number of Page)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	2	5
6	增益测试 (Gain Test)	1	7
7	3D 天线增益图 (3D antenna pattern)	2	8
8			
9			
10			
11			
12			


工程成品图

Drawing

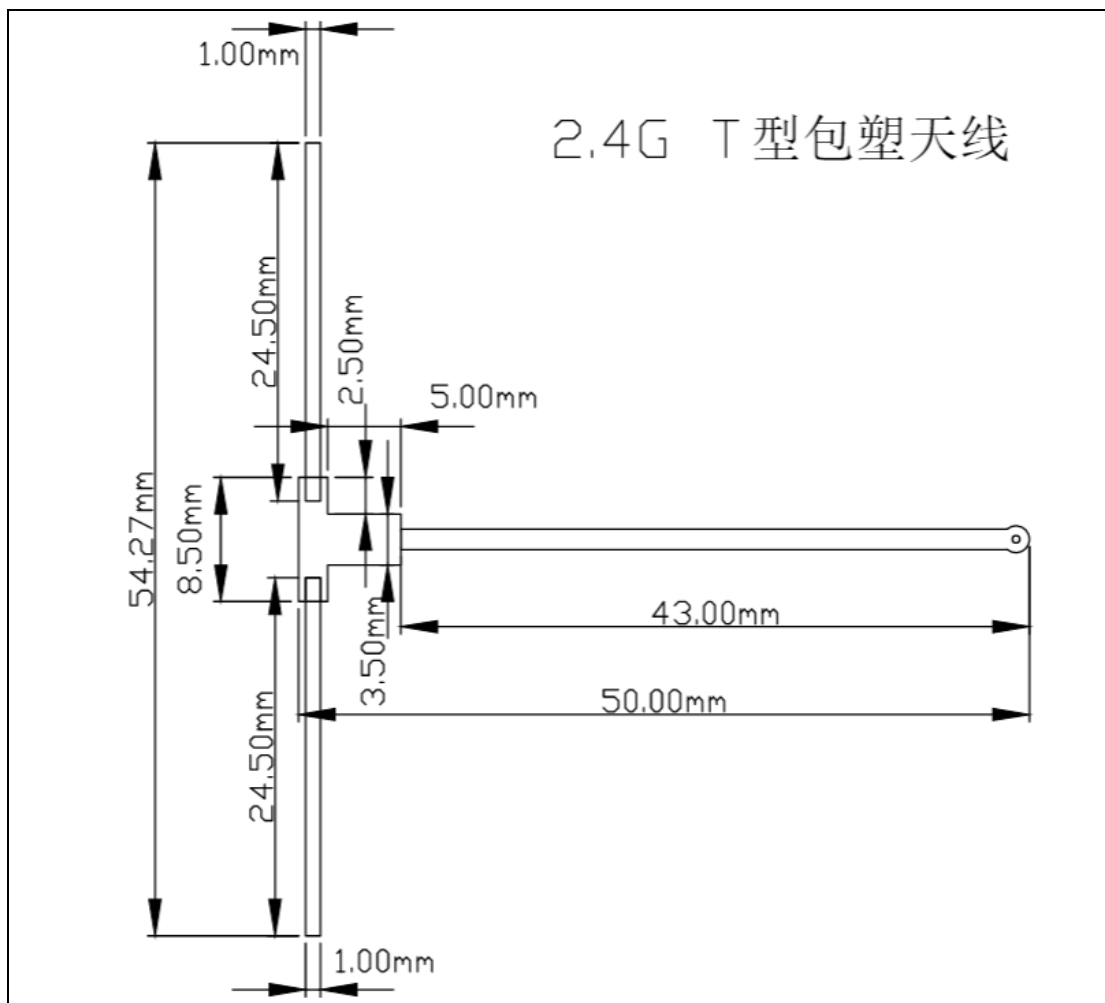

电性测试报告

Test Report

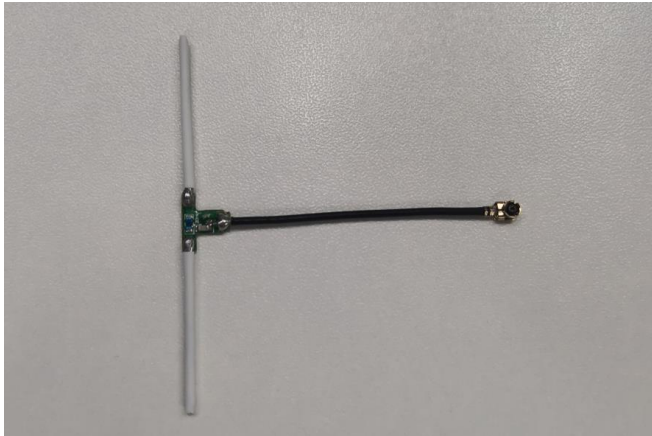
Sample Photo	
	
Basic Parameter	
Antenna Type	Dipole T Type Antenna
Manufacture	Shenzhen Baida Moxing Co.,Ltd.
Manufacture Address	B1702A, Block ABCD, Building 3, Phase 1, Tian'an Cloud Park, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China
Electrical Characteristics	
Frequency	2400 ~ 2500 MHz
S.W.R	≤ 2.0 @ 2400 ~ 2500 MHz
Impedance	50 Ohm Nominal
Return Loss	-10 dB Max
Radiation	Omni-directional
Cable Loss	2 dB / m Max
Polarization	Linear, Vertical
Pack Gian	2.09dBi
Connector	IPEX
Physical Properties	
Antenna Material	FR4+steel+
Cable Type	O.D. 1.13mm // 25 mm
Operating Temp.	-25~+85°C
Storage Temp.	-25~+85°C

S 参数测试

S parameter Test

Siglent SSA1000X



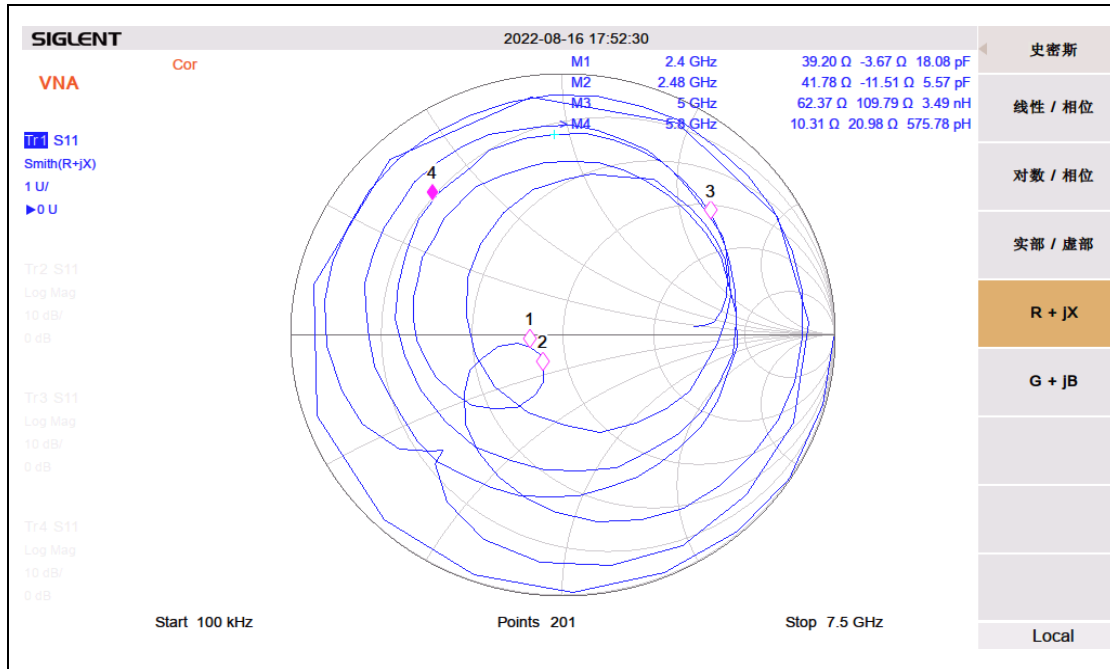

增益测试

Gain Test

Freq.(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain(dBi)	2.05	2.05	2.06	2.06	2.07	2.07	2.08	2.08	2.08	2.09	2.09
Peak Degree	82	82	82	82	82	82	82	82	82	81	81
AV Gain(dBi)	-0.20	-0.20	-0.20	-0.20	-0.20	-0.20	-0.20	-0.21	-0.21	-0.21	-0.21

3D 天线增益图

3D antenna pattern

