

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 51 von 127**  
*Page 51 of 127*


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1633  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2402MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth

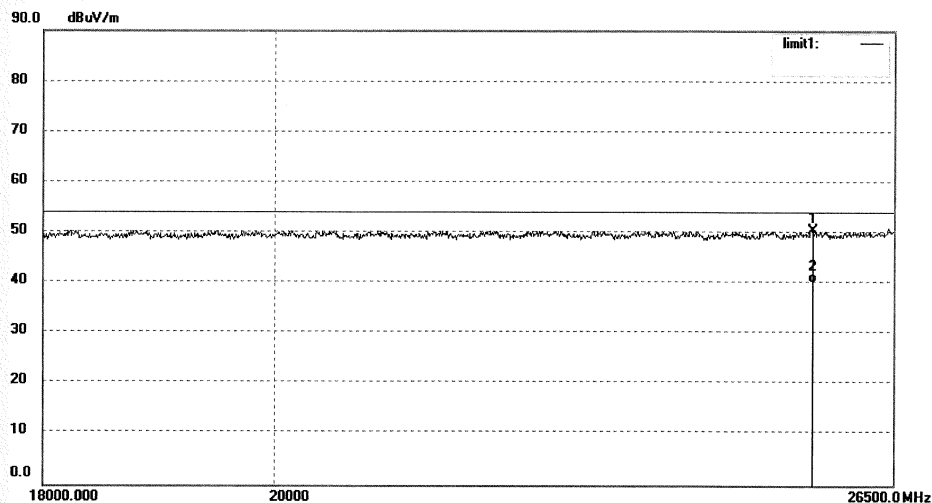

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 25543.970      | 10.55               | 40.02          | 50.57              | 74.00             | -23.43         | peak     |                |                  |        |
| 2   | 25543.970      | 0.22                | 40.02          | 40.24              | 54.00             | -13.76         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 52 von 127**  
*Page 52 of 127*


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1632  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2402MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth

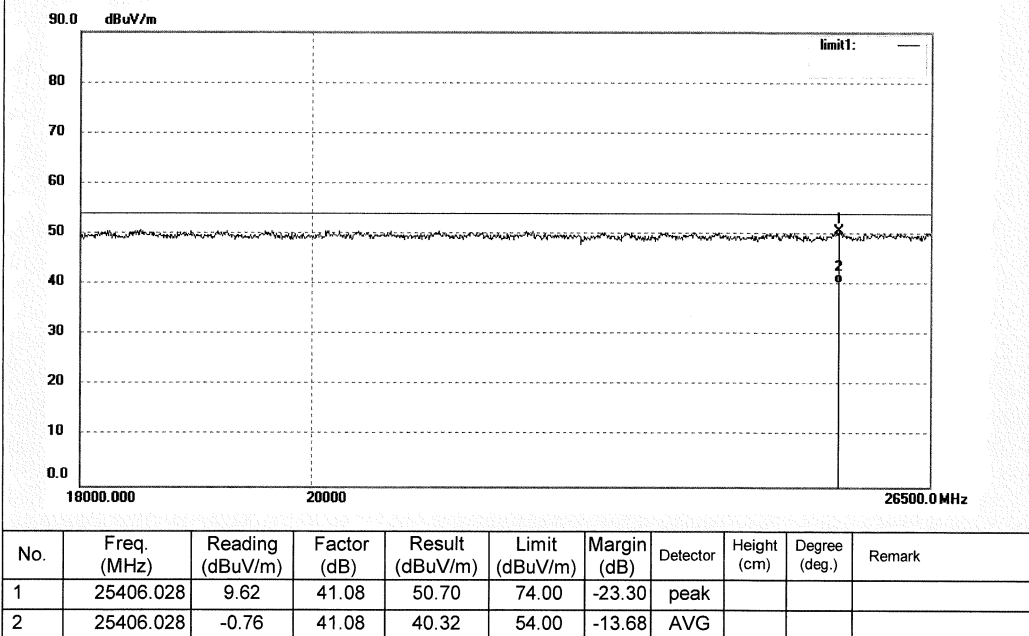


**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 53 von 127**  
*Page 53 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1634            | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2441MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |

Note: Bluetooth

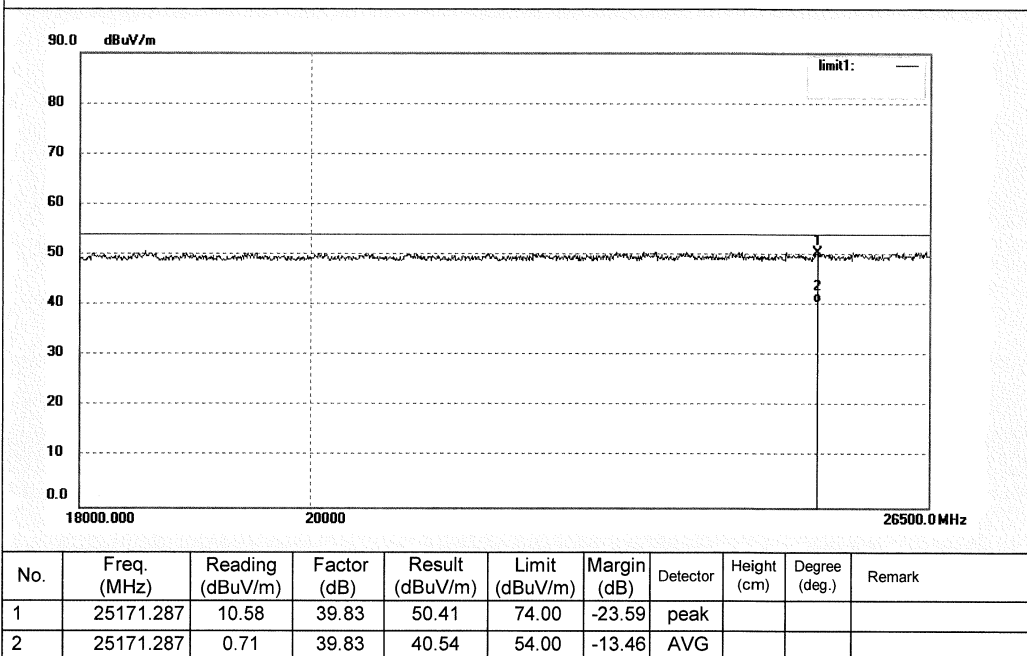


**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 54 von 127**  
*Page 54 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1635            | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2441MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |

Note: Bluetooth

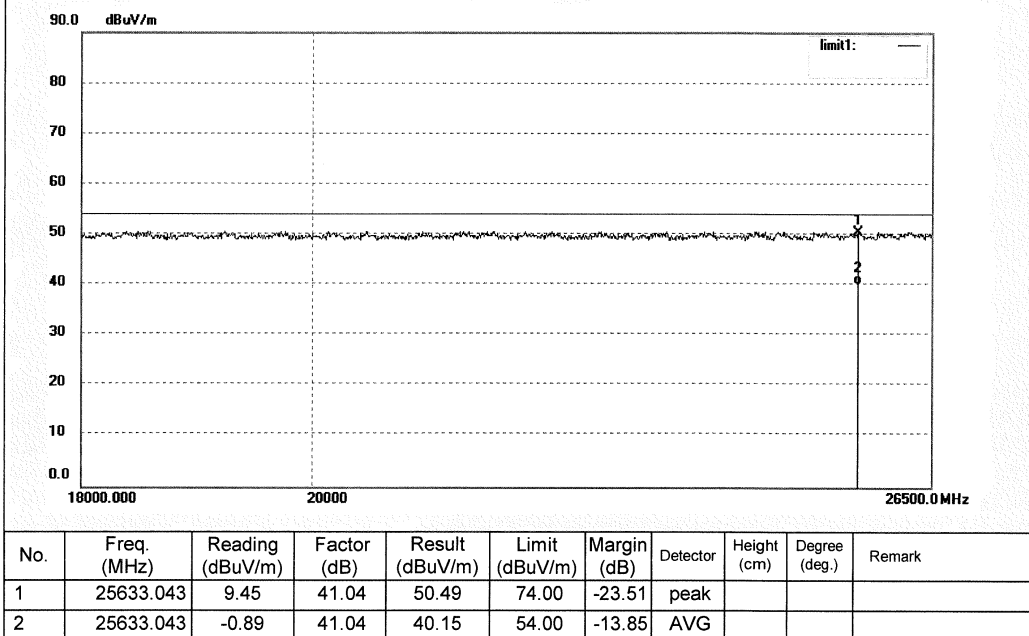

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 55 von 127**  
*Page 55 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1637

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Multimedia Speaker

Mode: TX 2480MHz

Model: A200

Manufacturer: Edifier

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 17/03/04/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Bluetooth

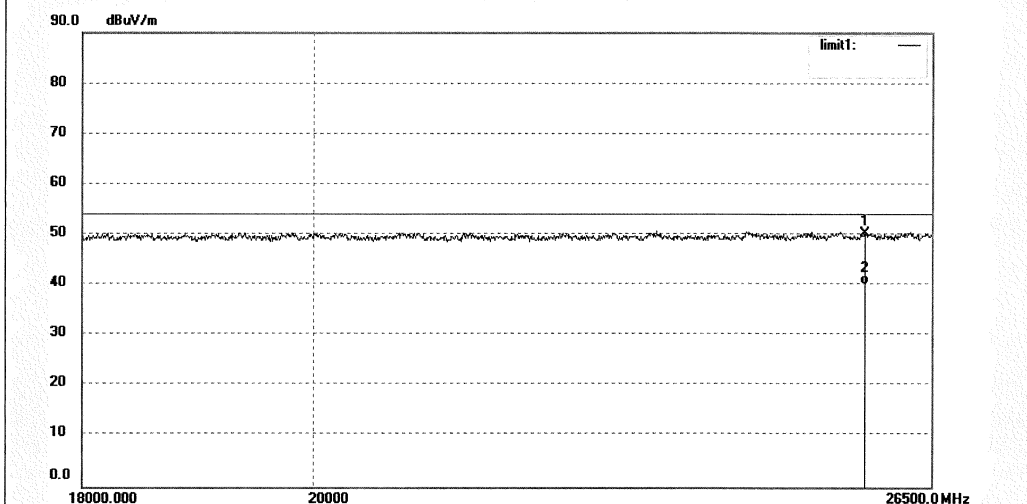

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 25712.479      | 10.25               | 40.10          | 50.35              | 74.00             | -23.65         | peak     |                |                  |        |
| 2   | 25712.479      | 0.14                | 40.10          | 40.24              | 54.00             | -13.76         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 56 von 127**  
*Page 56 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1636

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Multimedia Speaker

Mode: TX 2480MHz

Model: A200

Manufacturer: Edifier

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/03/04/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Bluetooth

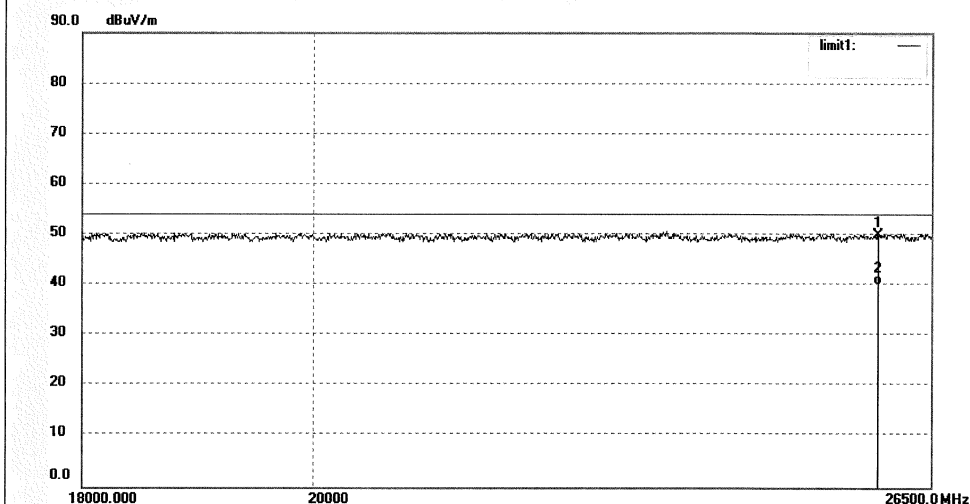

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 25872.091      | 9.13                | 41.00          | 50.13              | 74.00             | -23.87         | peak     |                |                  |        |
| 2   | 25872.091      | -0.76               | 41.00          | 40.24              | 54.00             | -13.76         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 57 von 127**  
*Page 57 of 127*

## Test Plot of Band Edge of Bluetooth


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1625  
Standard: FCC (Band Edge)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Multimedia Speaker  
Mode: TX 2402MHz  
Model: A200  
Manufacturer: Edifier

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 17/03/04/  
Time:  
Engineer Signature: WADE  
Distance: 3m

Note: Bluetooth

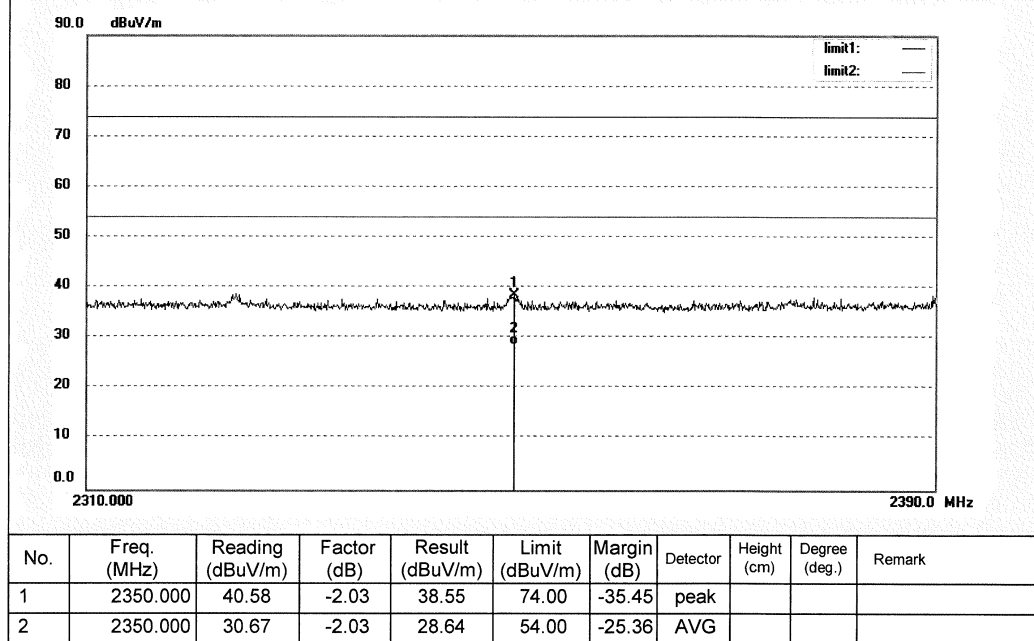



**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 58 von 127**  
*Page 58 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1624

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Multimedia Speaker

Mode: TX 2402MHz

Model: A200

Manufacturer: Edifier

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/03/04/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Bluetooth

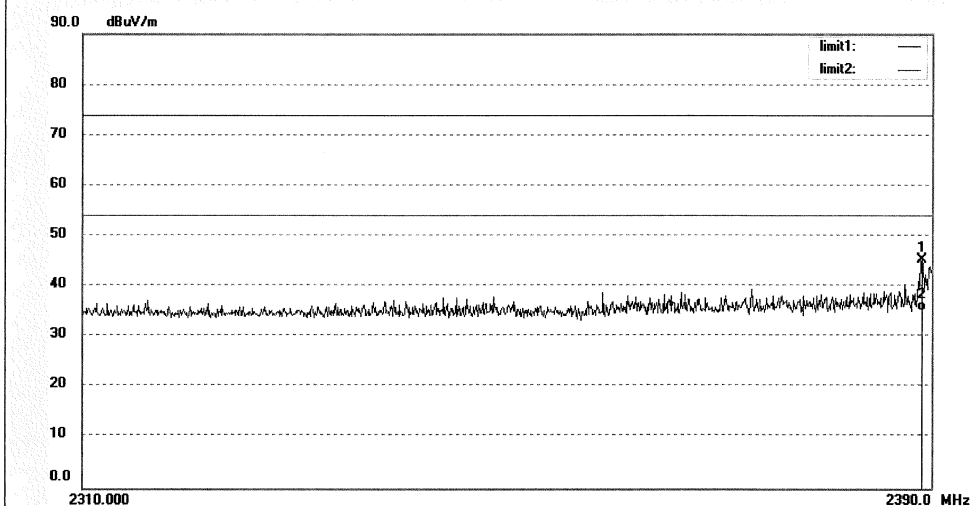

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2389.120       | 47.12               | -1.71          | 45.41              | 74.00             | -28.59         | peak     |                |                  |        |
| 2   | 2389.120       | 36.95               | -1.71          | 35.24              | 54.00             | -18.76         | AVG      |                |                  |        |




**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 59 von 127**  
*Page 59 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                               |                            |
|-------------------------------|----------------------------|
| Job No.: LGW2017 #1630        | Polarization: Horizontal   |
| Standard: FCC (Band Edge)     | Power Source: AC 120V/60Hz |
| Test item: Radiation Test     | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 % | Time:                      |
| EUT: Multimedia Speaker       | Engineer Signature: WADE   |
| Mode: TX 2480MHz              | Distance: 3m               |
| Model: A200                   |                            |
| Manufacturer: Edifier         |                            |
| Note: Bluetooth               |                            |

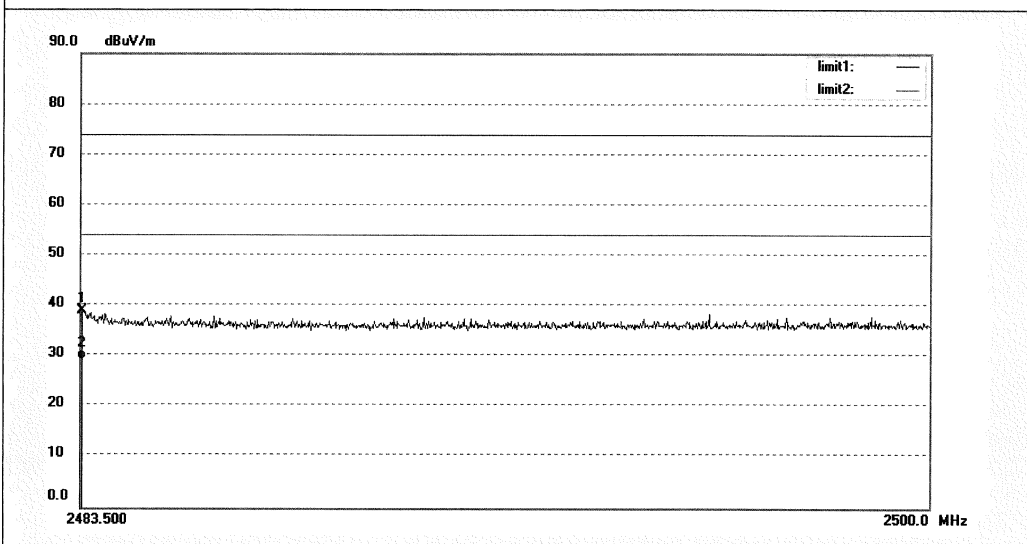


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2483.533       | 40.50               | -1.40          | 39.10              | 74.00             | -34.90         | peak     |                |                  |        |
| 2   | 2483.533       | 30.75               | -1.40          | 29.35              | 54.00             | -24.65         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 60 von 127**  
*Page 60 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                               |                            |
|-------------------------------|----------------------------|
| Job No.: LGW2017 #1631        | Polarization: Vertical     |
| Standard: FCC (Band Edge)     | Power Source: AC 120V/60Hz |
| Test item: Radiation Test     | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 % | Time:                      |
| EUT: Multimedia Speaker       | Engineer Signature: WADE   |
| Mode: TX 2480MHz              | Distance: 3m               |
| Model: A200                   |                            |
| Manufacturer: Edifier         |                            |
| Note: Bluetooth               |                            |

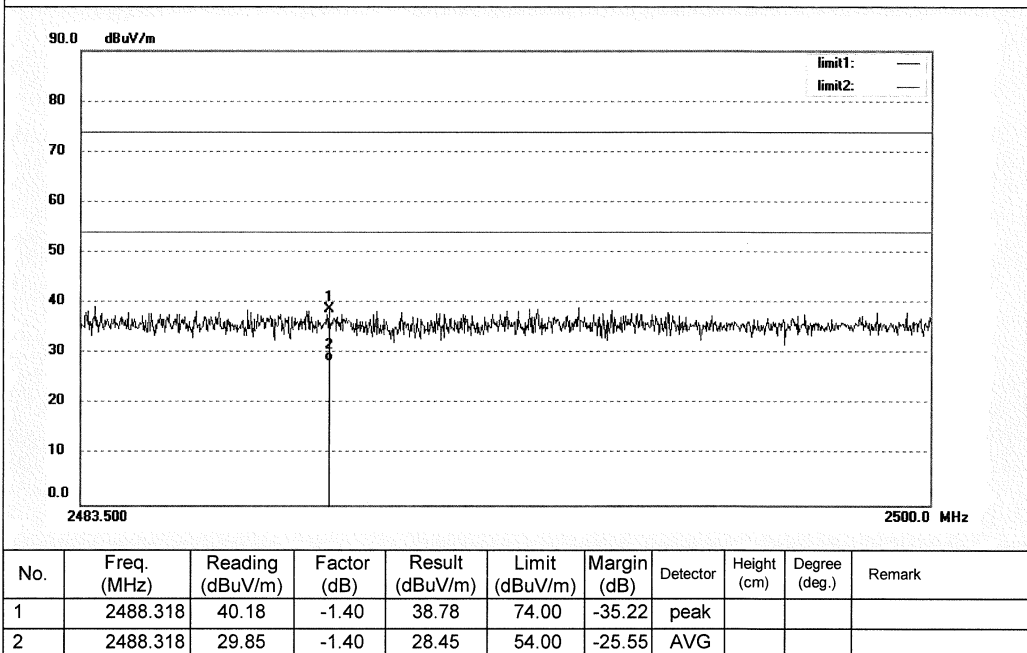

## Test Plot of Spurious Emission of Bluetooth Low Energy mode


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2402MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: |           |          | _SUB STD VTERM2 1.70 |            |           |            |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516M      |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516M      |

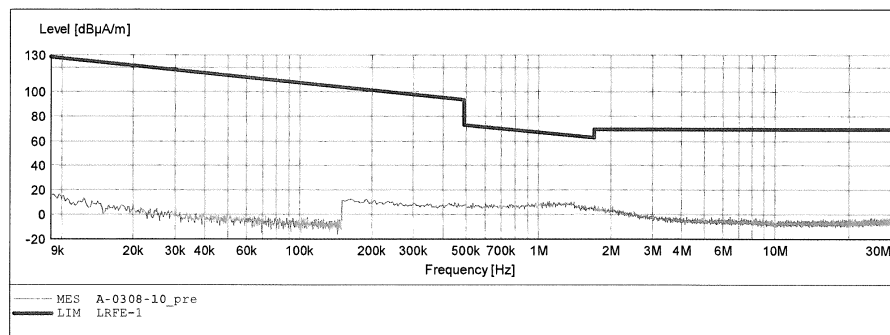


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2402MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: _SUB_STD_VTERM2 1.70 |                |            |           | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------------------------------|----------------|------------|-----------|----------|------------|-----------|------------|
| Start Frequency                         | Stop Frequency | Step Width |           |          |            |           |            |
| 9.0 kHz                                 | 150.0 kHz      | 100.0 Hz   | QuasiPeak | 1.0 s    | 200 Hz     | 1516M     |            |
| 150.0 kHz                               | 30.0 MHz       | 5.0 kHz    | QuasiPeak | 1.0 s    | 9 kHz      | 1516M     |            |

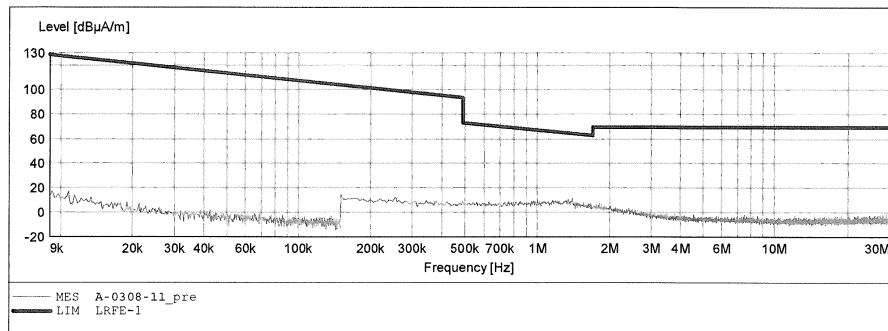


**ACCURATE TECHNOLOGY CO., LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2402MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: _SUB_STD_VTERM2 1.70 |                |            |           | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------------------------------|----------------|------------|-----------|----------|------------|-----------|------------|
| Start Frequency                         | Stop Frequency | Step Width |           |          |            |           |            |
| 9.0 kHz                                 | 150.0 kHz      | 100.0 Hz   | QuasiPeak | 1.0 s    | 200 Hz     | 1516M     |            |
| 150.0 kHz                               | 30.0 MHz       | 5.0 kHz    | QuasiPeak | 1.0 s    | 9 kHz      | 1516M     |            |

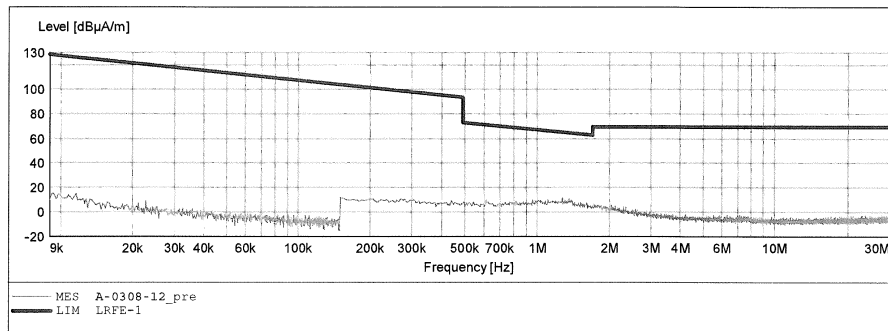


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2440MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: |           |          | _SUB_STD_VTERM2 1.70 |            |           |            |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516M      |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516M      |

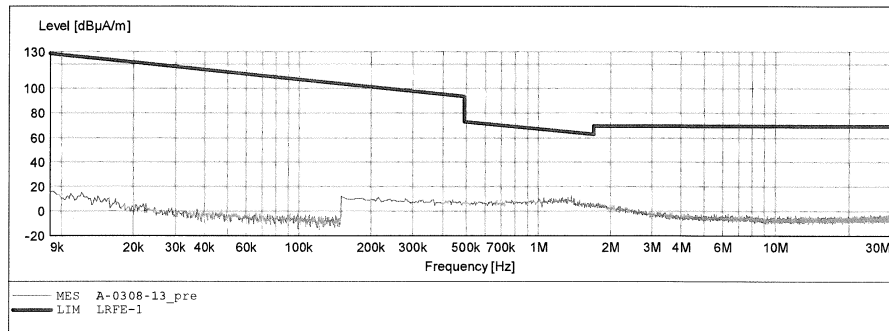


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2440MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: |           |          | _SUB_STD_VTERM2 1.70 |            |           |            |  |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|--|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |  |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516M      |  |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516M      |  |

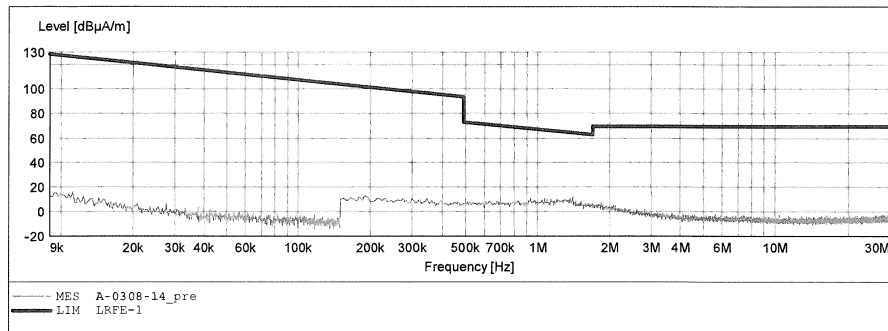




**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2440MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: _SUB_STD_VTERM2 1.70 |                |            |           | Detector | Meas. Time | IF Bandw. | Transducer |
|-----------------------------------------|----------------|------------|-----------|----------|------------|-----------|------------|
| Start Frequency                         | Stop Frequency | Step Width |           |          |            |           |            |
| 9.0 kHz                                 | 150.0 kHz      | 100.0 Hz   | QuasiPeak | 1.0 s    | 200 Hz     | 1516M     |            |
| 150.0 kHz                               | 30.0 MHz       | 5.0 kHz    | QuasiPeak | 1.0 s    | 9 kHz      | 1516M     |            |

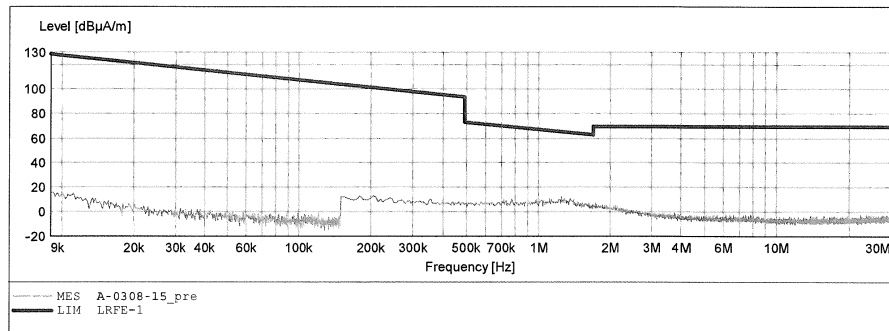


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2480MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: |           |          | SUB_STD_VTERM2 1.70 |            |           |            |
|--------------------|-----------|----------|---------------------|------------|-----------|------------|
| Start              | Stop      | Step     | Detector            | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak           | 1.0 s      | 200 Hz    | 1516M      |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak           | 1.0 s      | 9 kHz     | 1516M      |

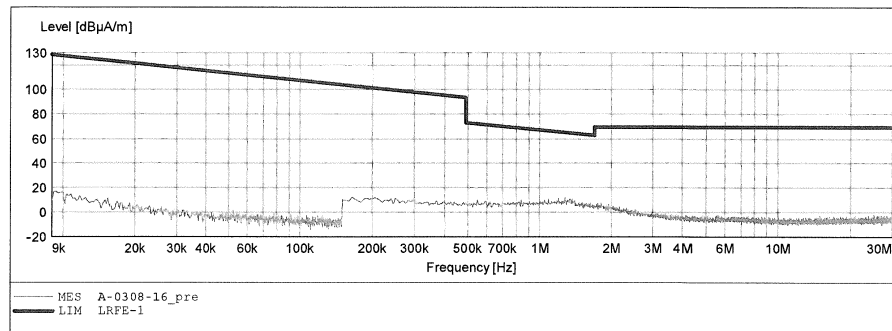


**ACCURATE TECHNOLOGY CO., LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2480MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: |           |          | _SUB_STD_VTERM2 1.70 |            |           |            |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516M      |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516M      |

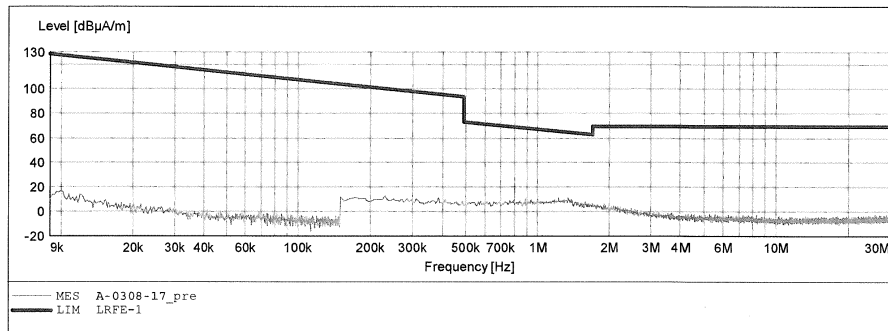


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Multimedia Speaker M/N:A200  
 Manufacturer: Edifier  
 Operating Condition: TX 2480MHz  
 Test Site: 2# Chamber  
 Operator: LGWADE  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2017-3-8 /

**SCAN TABLE: "LFRE Fin"**

| Short Description: |           |          | _SUB_STD_VTERM2 1.70 |            |           |            |
|--------------------|-----------|----------|----------------------|------------|-----------|------------|
| Start              | Stop      | Step     | Detector             | Meas. Time | IF Bandw. | Transducer |
| 9.0 kHz            | 150.0 kHz | 100.0 Hz | QuasiPeak            | 1.0 s      | 200 Hz    | 1516M      |
| 150.0 kHz          | 30.0 MHz  | 5.0 kHz  | QuasiPeak            | 1.0 s      | 9 kHz     | 1516M      |

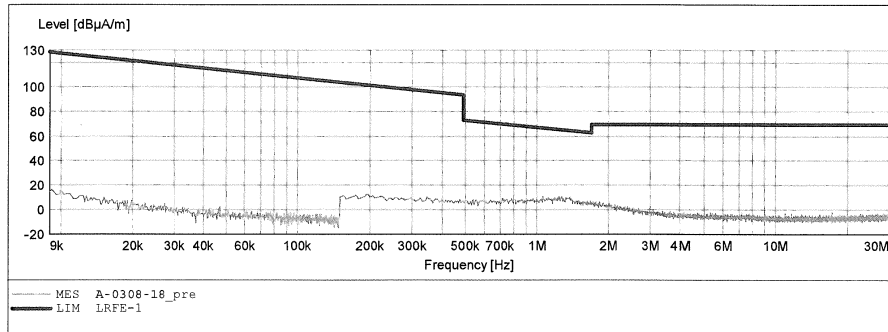

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 70 von 127**  
*Page 70 of 127*


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1654  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2402MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

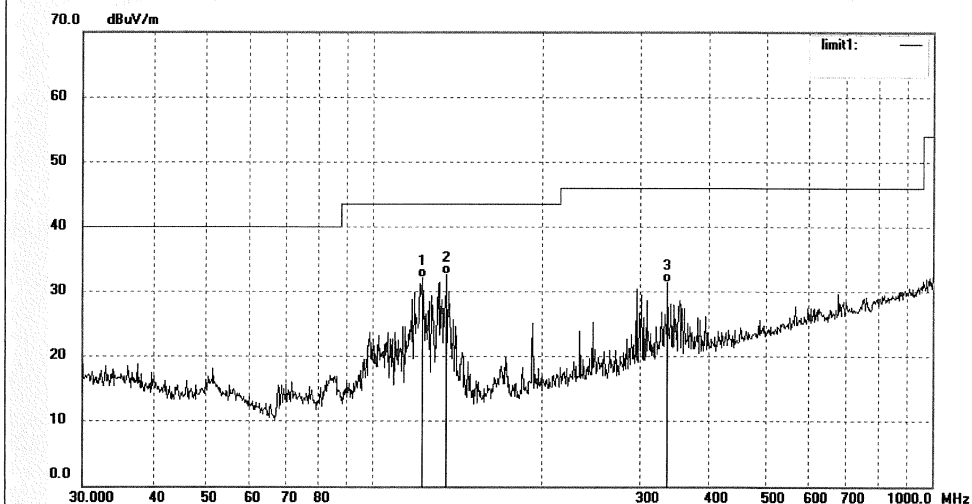

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 121.9754       | 45.38               | -13.29         | 32.09              | 43.50             | -11.41         | QP       |                |                  |        |
| 2   | 135.0319       | 46.68               | -13.97         | 32.71              | 43.50             | -10.79         | QP       |                |                  |        |
| 3   | 336.0351       | 39.25               | -7.91          | 31.34              | 46.00             | -14.66         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1655

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Multimedia Speaker

Mode: TX 2402MHz

Model: A200

Manufacturer: Edifier

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 17/03/04/

Time:

Engineer Signature: WADE

Distance: 3m

Note: Bluetooth 4.0

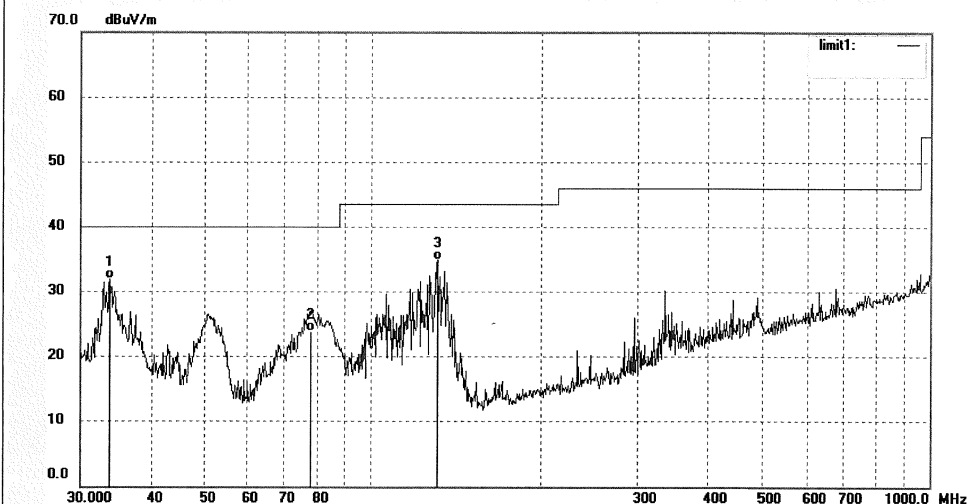

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 33.7986        | 41.94               | -10.06         | 31.88              | 40.00             | -8.12          | QP       |                |                  |        |
| 2   | 77.8653        | 40.52               | -16.57         | 23.95              | 40.00             | -16.05         | QP       |                |                  |        |
| 3   | 131.2965       | 48.72               | -13.82         | 34.90              | 43.50             | -8.60          | QP       |                |                  |        |



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1657  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2440MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

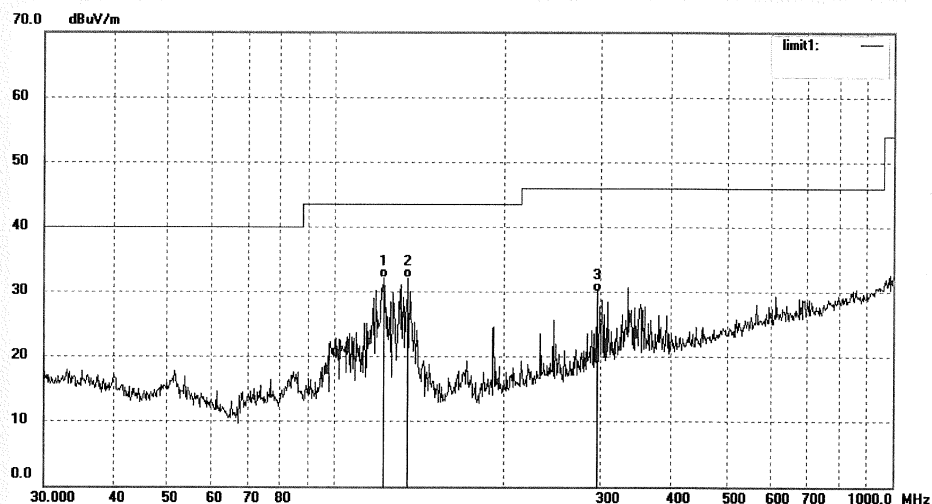

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 121.9754       | 45.44               | -13.29         | 32.15              | 43.50             | -11.35         | QP       |                |                  |        |
| 2   | 135.0319       | 46.11               | -13.97         | 32.14              | 43.50             | -11.36         | QP       |                |                  |        |
| 3   | 295.1469       | 39.20               | -9.10          | 30.10              | 46.00             | -15.90         | QP       |                |                  |        |



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1656  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2440MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

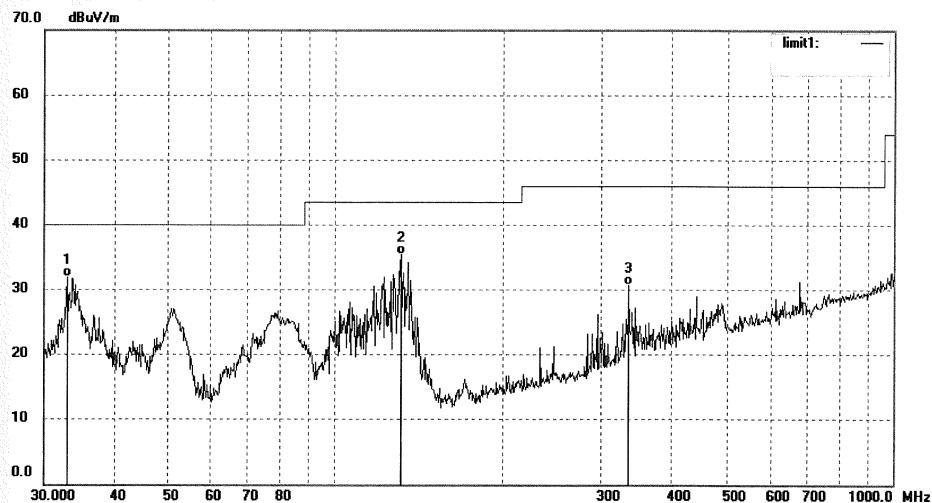

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 32.9791        | 41.80               | -9.82          | 31.98              | 40.00             | -8.02          | QP       |                |                  |        |
| 2   | 131.2965       | 49.22               | -13.82         | 35.40              | 43.50             | -8.10          | QP       |                |                  |        |
| 3   | 336.0351       | 38.58               | -7.91          | 30.67              | 46.00             | -15.33         | QP       |                |                  |        |





**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1658  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2480MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

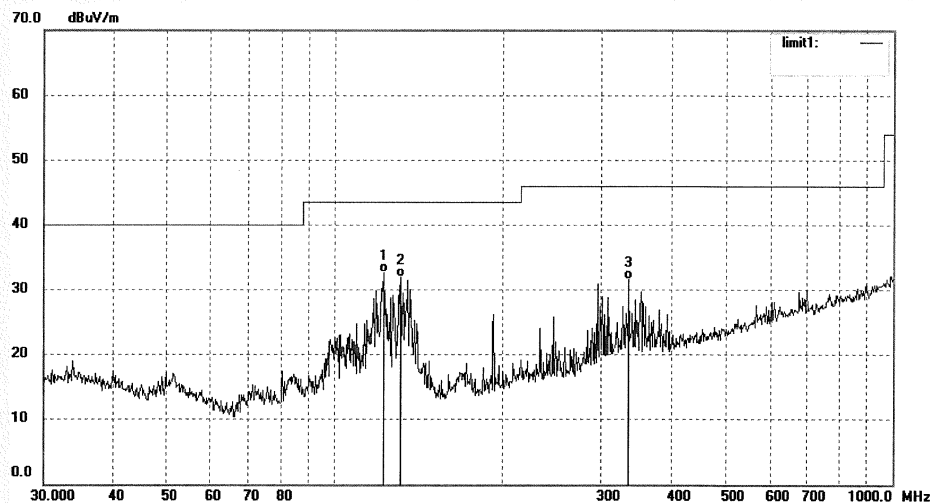

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 121.9754       | 45.99               | -13.29         | 32.70              | 43.50             | -10.80         | QP       |                |                  |        |
| 2   | 131.2965       | 45.69               | -13.82         | 31.87              | 43.50             | -11.63         | QP       |                |                  |        |
| 3   | 336.0351       | 39.57               | -7.91          | 31.66              | 46.00             | -14.34         | QP       |                |                  |        |



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1659  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2480MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

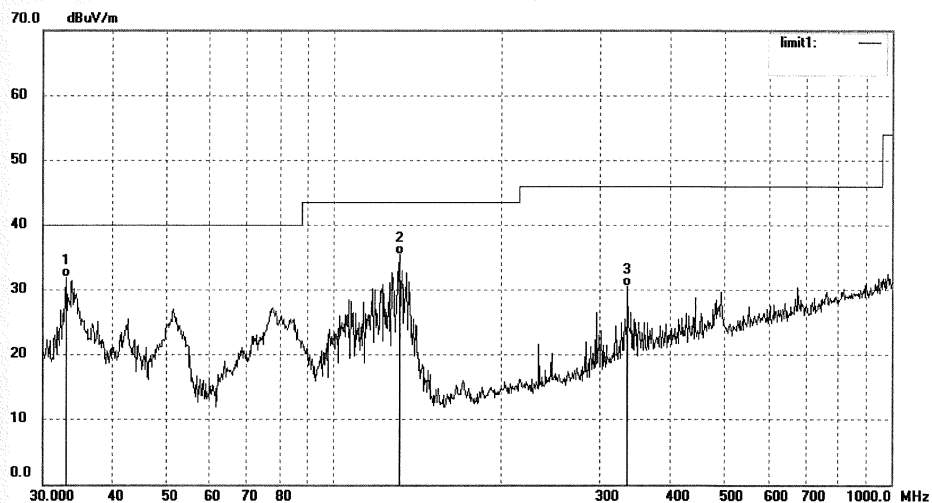

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 32.9791        | 41.77               | -9.82          | 31.95              | 40.00             | -8.05          | QP       |                |                  |        |
| 2   | 131.2965       | 49.34               | -13.82         | 35.52              | 43.50             | -7.98          | QP       |                |                  |        |
| 3   | 336.0351       | 38.46               | -7.91          | 30.55              | 46.00             | -15.45         | QP       |                |                  |        |



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1606  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2402MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

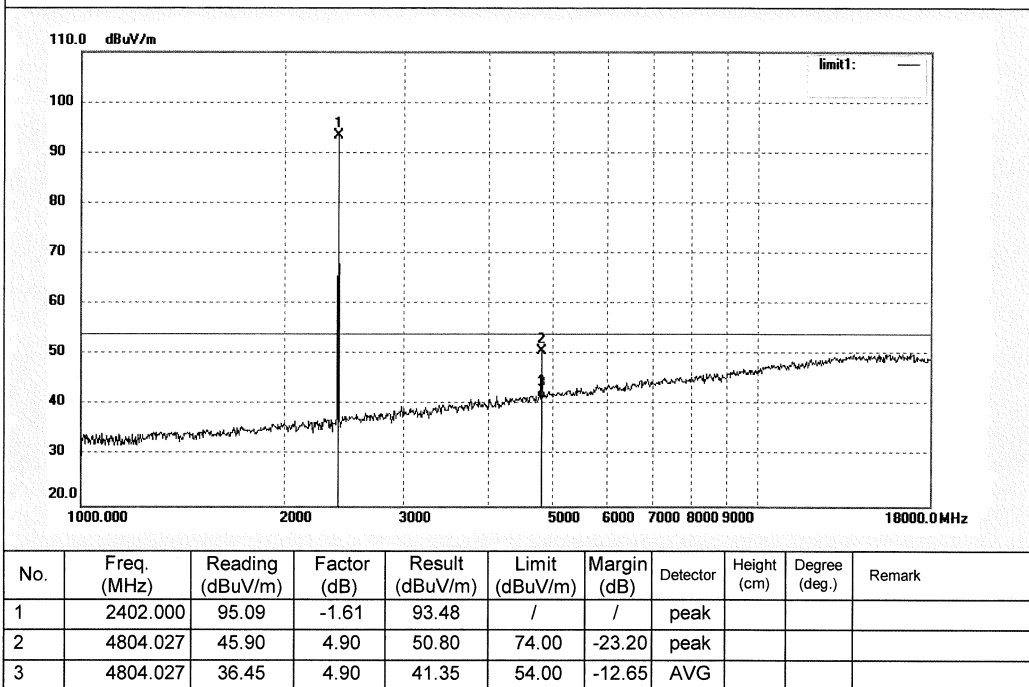



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1607  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2402MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m


Note: Bluetooth 4.0

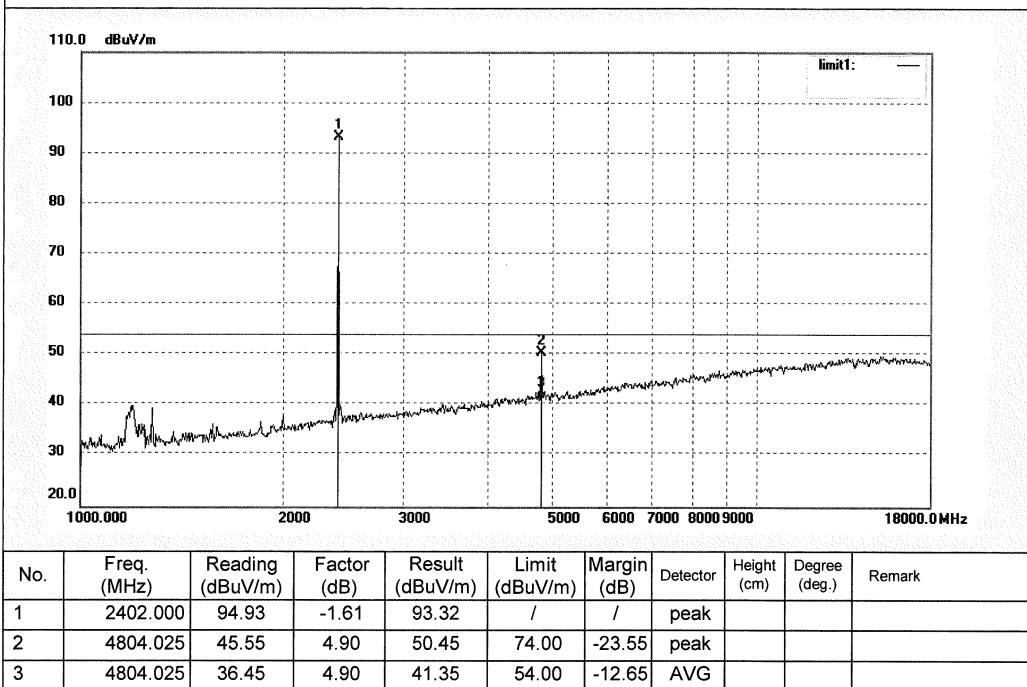


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1610            | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2440MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |
| Note: Bluetooth 4.0               |                            |

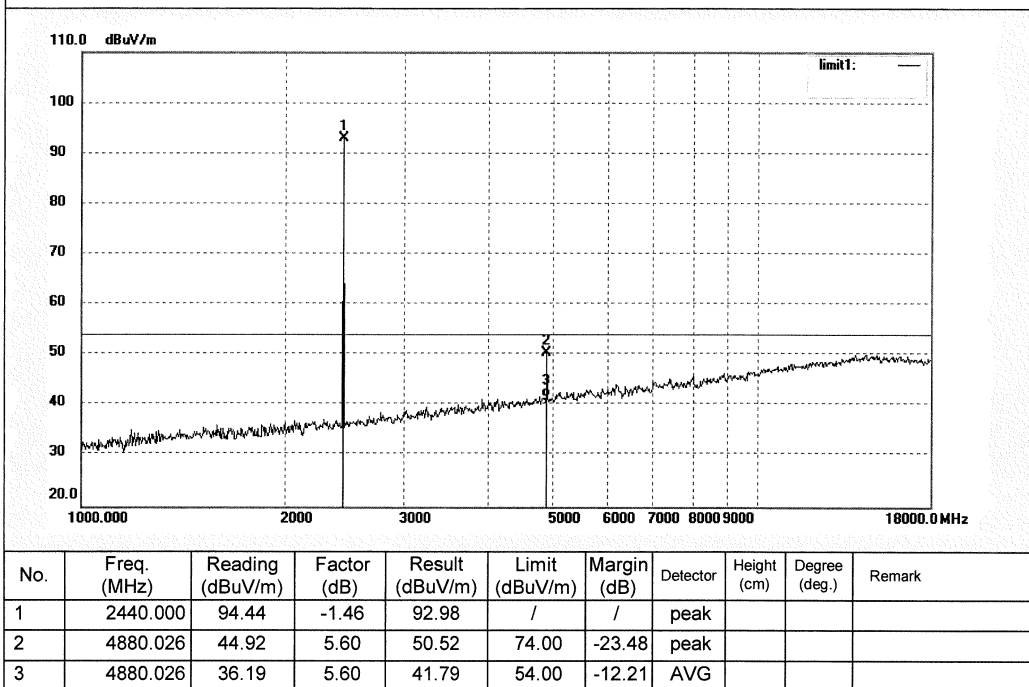


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LGW2017 #1611

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 17/03/04/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Multimedia Speaker

Engineer Signature: WADE


Mode: TX 2440MHz

Distance: 3m

Model: A200

Manufacturer: Edifier

Note: Bluetooth 4.0

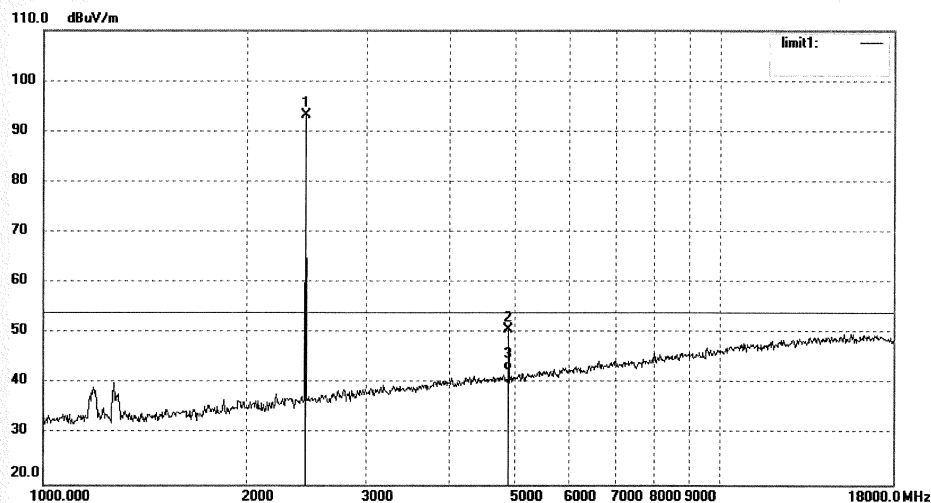

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2440.000       | 94.59               | -1.46          | 93.13              | /                 | /              | peak     |                |                  |        |
| 2   | 4880.025       | 45.10               | 5.60           | 50.70              | 74.00             | -23.30         | peak     |                |                  |        |
| 3   | 4880.025       | 36.97               | 5.60           | 42.57              | 54.00             | -11.43         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LGW2017 #1613

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 17/03/04/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Multimedia Speaker

Engineer Signature: WADE


Mode: TX 2480MHz

Distance: 3m

Model: A200

Manufacturer: Edifier

Note: Bluetooth 4.0

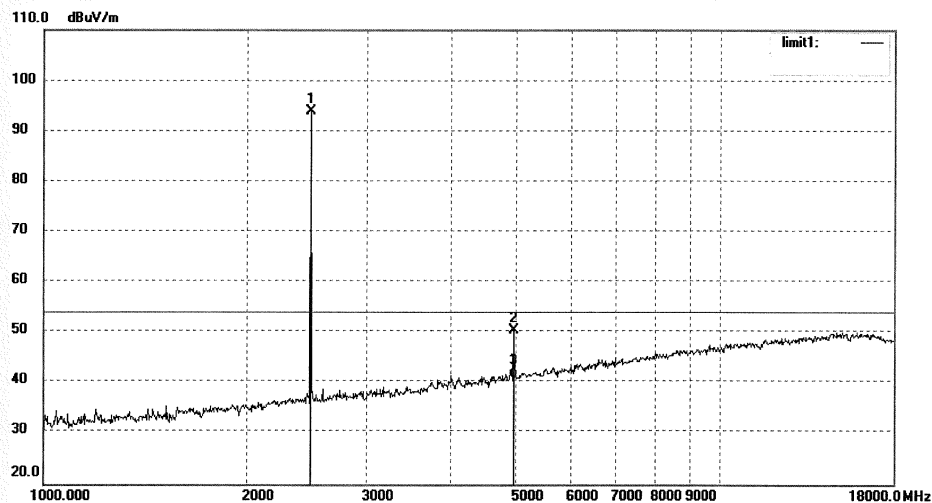

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2480.000       | 95.41               | -1.40          | 94.01              | /                 | /              | peak     |                |                  |        |
| 2   | 4960.027       | 44.49               | 6.10           | 50.59              | 74.00             | -23.41         | peak     |                |                  |        |
| 3   | 4960.027       | 35.14               | 6.10           | 41.24              | 54.00             | -12.76         | AVG      |                |                  |        |




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LGW2017 #1612

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 17/03/04/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Multimedia Speaker

Engineer Signature: WADE


Mode: TX 2480MHz

Distance: 3m

Model: A200

Manufacturer: Edifier

Note: Bluetooth 4.0

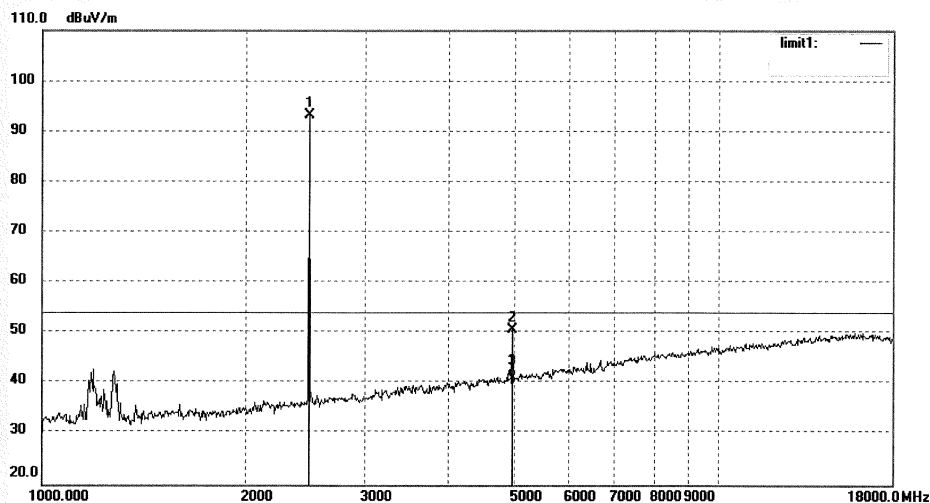


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2480.000       | 94.70               | -1.40          | 93.30              | /                 | /              | peak     |                |                  |        |
| 2   | 4960.028       | 44.62               | 6.10           | 50.72              | 74.00             | -23.28         | peak     |                |                  |        |
| 3   | 4960.028       | 35.23               | 6.10           | 41.33              | 54.00             | -12.67         | AVG      |                |                  |        |




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1617            | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2402MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |
| Note: Bluetooth 4.0               |                            |

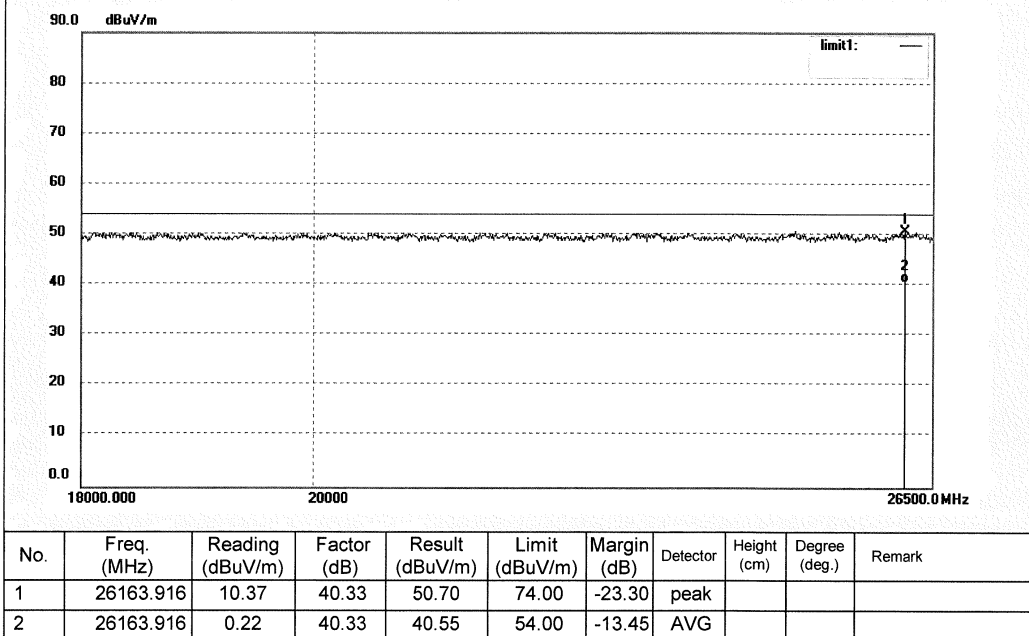


**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 83 von 127**  
*Page 83 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1616            | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2402MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |
| Note: Bluetooth 4.0               |                            |

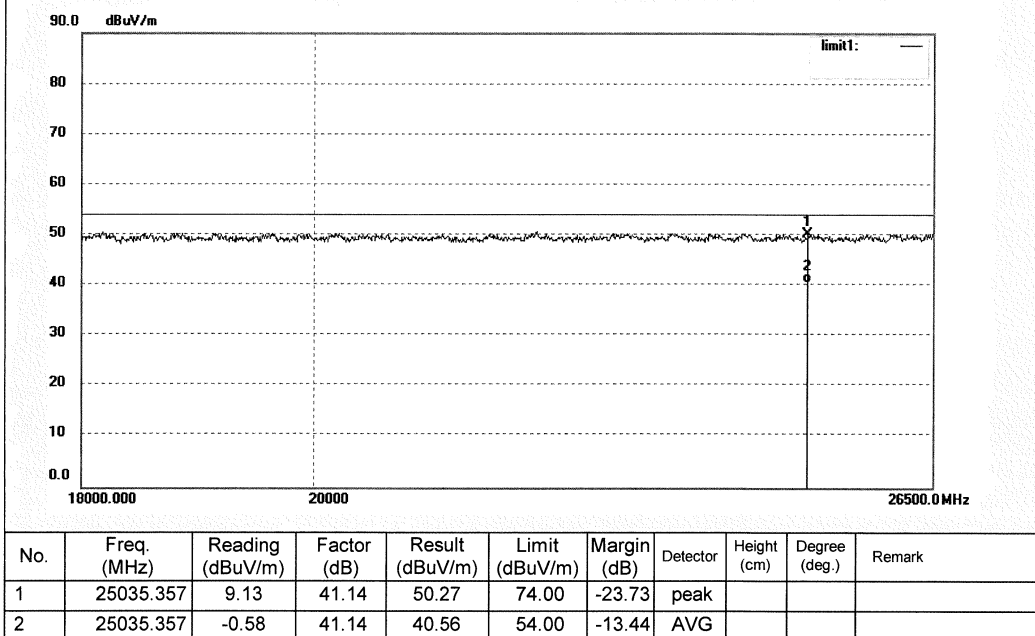


**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 84 von 127**  
*Page 84 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396


|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1618            | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2440MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |
| Note: Bluetooth 4.0               |                            |

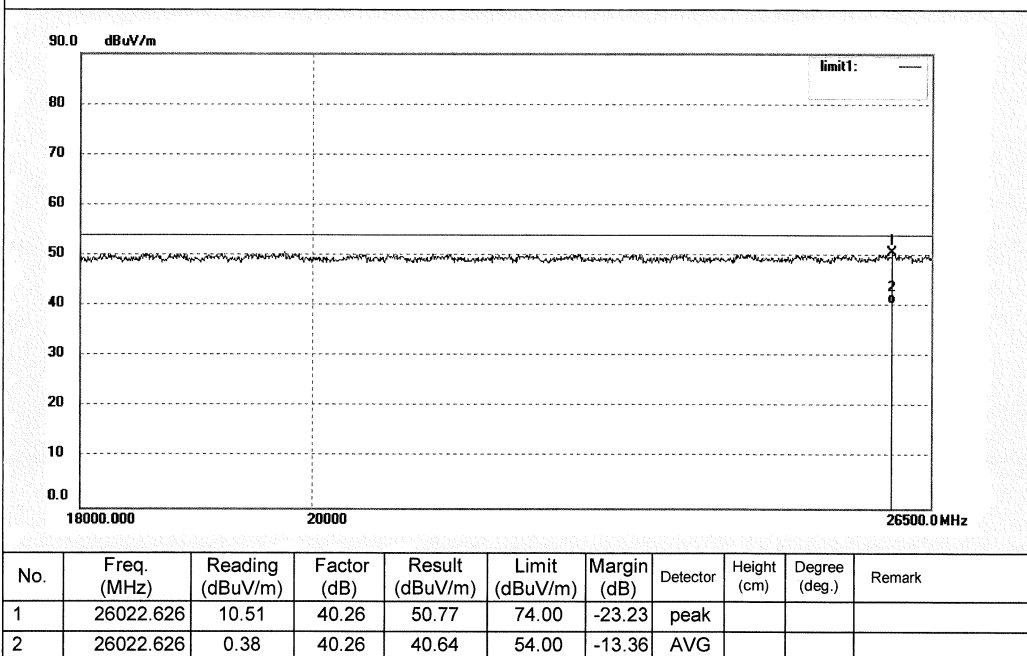


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1619            | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2440MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |
| Note: Bluetooth 4.0               |                            |

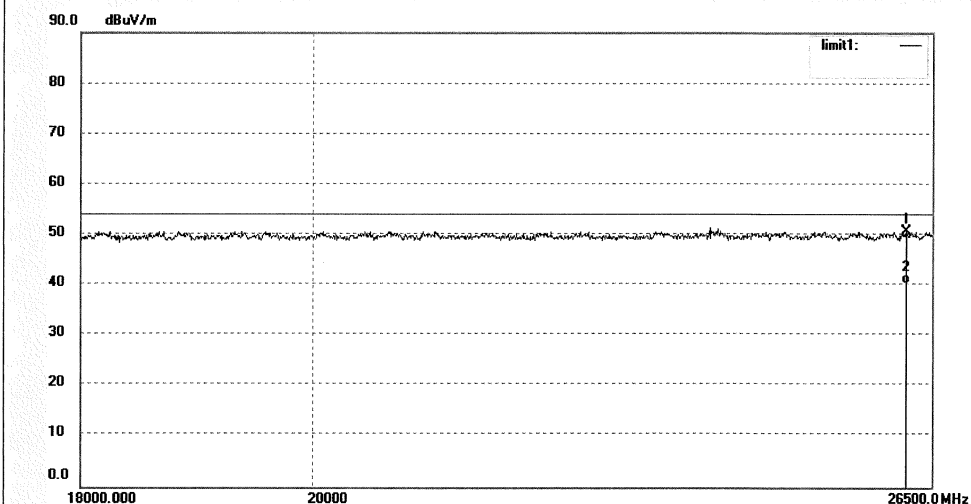


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26174.038      | 9.74                | 40.95          | 50.69              | 74.00             | -23.31         | peak     |                |                  |        |
| 2   | 26174.038      | -0.61               | 40.95          | 40.34              | 54.00             | -13.66         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1621            | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2480MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |

Note: Bluetooth 4.0

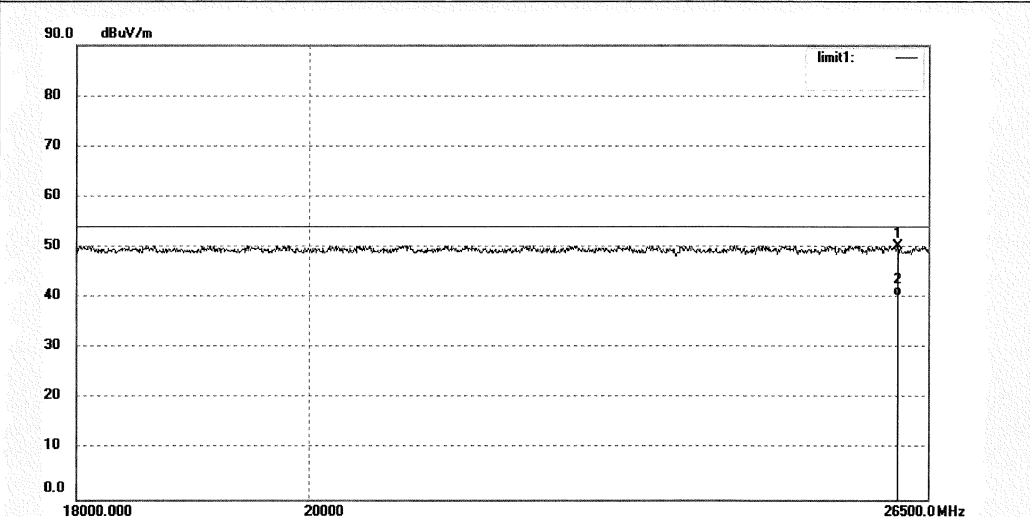


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1   | 26123.470   | 9.96             | 40.31       | 50.27           | 74.00          | -23.73      | peak     |             |               |        |
| 2   | 26123.470   | 0.04             | 40.31       | 40.35           | 54.00          | -13.65      | AVG      |             |               |        |

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 87 von 127**  
*Page 87 of 127*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LGW2017 #1620            | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 17/03/04/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Multimedia Speaker           | Engineer Signature: WADE   |
| Mode: TX 2480MHz                  | Distance: 3m               |
| Model: A200                       |                            |
| Manufacturer: Edifier             |                            |
| Note: Bluetooth 4.0               |                            |

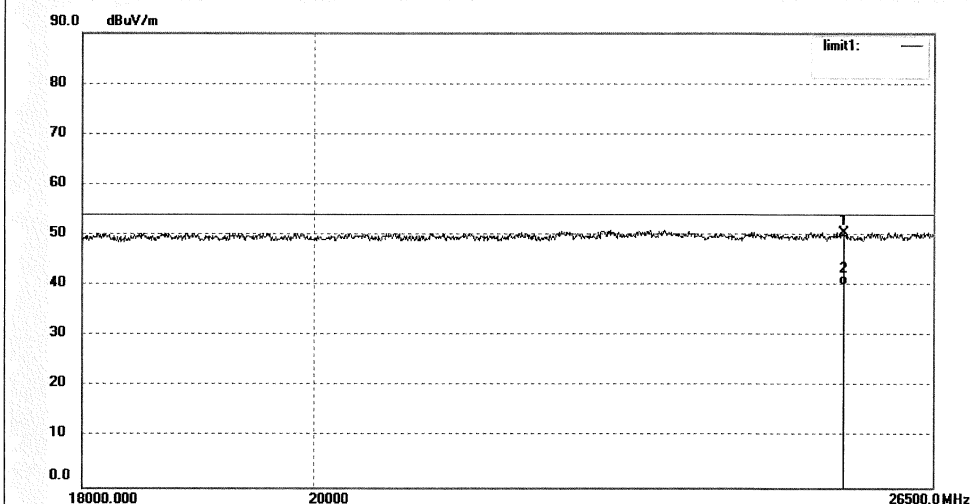

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 25415.857      | 9.42                | 41.07          | 50.49              | 74.00             | -23.51         | peak     |                |                  |        |
| 2   | 25415.857      | -0.83               | 41.07          | 40.24              | 54.00             | -13.76         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 88 von 127**  
*Page 88 of 127*

## Test Plot of Band Edge of Bluetooth Low Energy mode


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1609  
Standard: FCC (Band Edge)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Multimedia Speaker  
Mode: TX 2402MHz  
Model: A200  
Manufacturer: Edifier

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 17/03/04/  
Time:  
Engineer Signature: WADE  
Distance: 3m

Note: Bluetooth 4.0

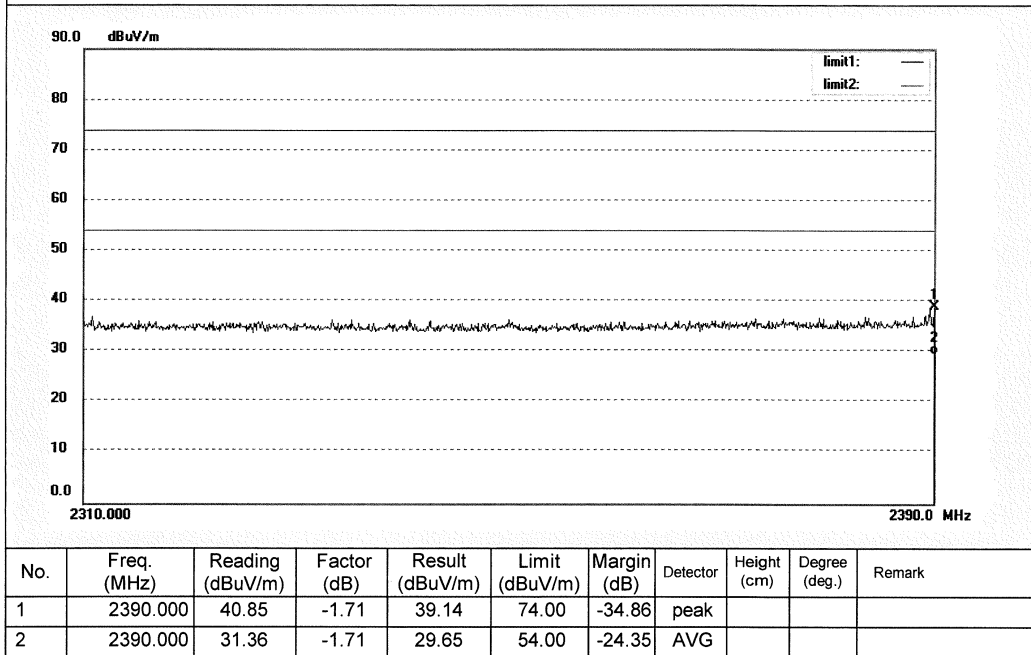



**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 89 von 127**  
*Page 89 of 127*


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1608  
 Standard: FCC (Band Edge)  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2402MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

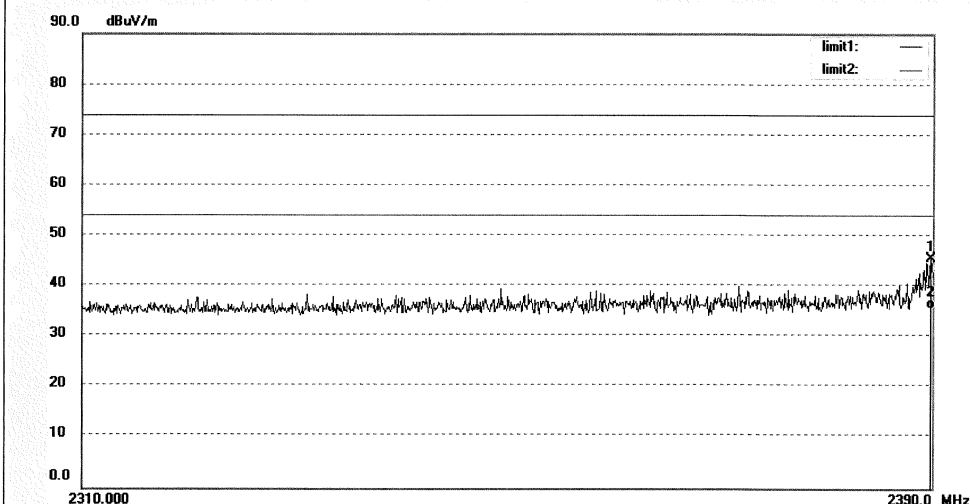

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2389.840       | 47.22               | -1.71          | 45.51              | 74.00             | -28.49         | peak     |                |                  |        |
| 2   | 2389.840       | 37.36               | -1.71          | 35.65              | 54.00             | -18.35         | AVG      |                |                  |        |



**Prüfbericht - Nr.: 50075858 001**  
*Test Report No.*
**Seite 90 von 127**  
*Page 90 of 127*


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 2# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LGW2017 #1614  
 Standard: FCC (Band Edge)  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Multimedia Speaker  
 Mode: TX 2480MHz  
 Model: A200  
 Manufacturer: Edifier

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 17/03/04/  
 Time:  
 Engineer Signature: WADE  
 Distance: 3m

Note: Bluetooth 4.0

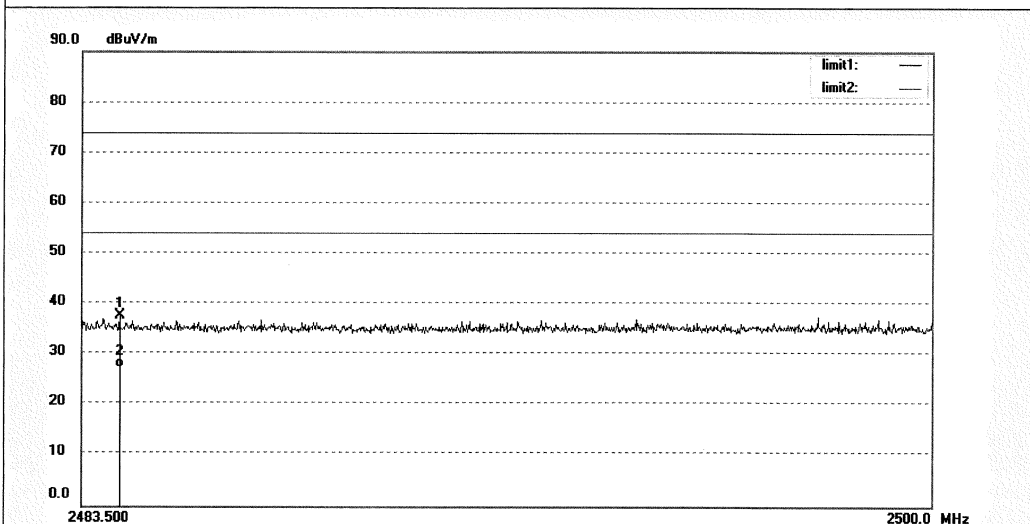

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2484.226       | 39.04               | -1.41          | 37.63              | 74.00             | -36.37         | peak     |                |                  |        |
| 2   | 2484.226       | 28.78               | -1.41          | 27.37              | 54.00             | -26.63         | AVG      |                |                  |        |