

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC2308-0077

2. Customer

• Name : Kyocera Corporation

• Address : Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Phone / EB1157

FCC ID : JOYEB1157

5. FCC Regulation(s) : CFR 47 Part 2 subpart 2.1093

Test Method Used : IEEE 1528-2013, IEC/IEEE 62209-1528

FCC SAR KDB Publications (Details in test report)

6. Date of Test : 2023.08.07 ~ 2023.08.23


7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

8. Testing Environment : Refer to appended test report.

9. Test Result : Refer to attached test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by	Reviewed by	
	Name : DuHee Lee 	Name : HakMin Kim 	

2023 . 08 . 28 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Tested by	Reviewed by
DRRFCC2308-0077	Aug. 28, 2023	Initial issue	DuHee Lee	HakMin Kim

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information	5
1.2 Power Reduction for SAR	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations	7
1.5 Simultaneous Transmission Capabilities	7
1.6 Miscellaneous SAR Test Considerations	8
1.7 Guidance Applied	8
1.8 Device Serial Numbers	8
1.9 FCC & ISED MRA test lab designation no. : KR0034	8
2. LTE INFORMATION	9
3. INTROCUCTION	10
4. DOSIMETRIC ASSESSMENT	11
4.1 Measurement Procedure	11
5. DEFINITION OF REFERENCE POINTS	13
5.1 Ear Reference Point	13
5.2 Handset Reference Points	13
6. TEST CONFIGURATION POSITIONS FOR HANDSETS	14
6.1 Device Holder	14
6.2 Positioning for Cheek/Touch	14
6.3 Positioning for Ear / 15 ° Tilt	14
6.4 Body-Worn Accessory Configurations	15
6.5 Extremity Exposure Configurations	15
6.6 Wireless Router Configurations	16
6.7 Phablet Configurations	16
7. RF EXPOSURE LIMITS	17
8. FCC MEASUREMENT PROCEDURES	18
8.1 Measured and Reported SAR	18
8.2 Procedures Used to Establish RF Signal for SAR	18
8.3 SAR Measurement Conditions for WCDMA (UMTS)	18
8.3.1 Output Power Verification	18
8.3.2 Head SAR Measurements for Handsets	18
8.3.3 Body SAR Measurements	19
8.3.4 Release 5 HSDPA Data Devices	19
8.3.5 Release 6 HSUPA Data Devices	19
8.4 SAR Measurement Conditions for LTE	20
8.4.1 Spectrum Plots for RB Configurations	20
8.4.2 MPR	20
8.4.3 A-MPR	20
8.4.4 Required RB Size and RB Offsets for SAR Testing	20
8.4.5 64QAM uplink	21
8.4.6 LTE TDD Consideration setup for SAR measurement	21
8.5 SAR Testing with 802.11 Transmitters	22
8.5.1 General Device Setup	22
8.5.2 U-NII and U-NII-2A	22
8.5.3 U-NII-2C and U-NII-3	22
8.5.4 Initial Test Position Procedure	23
8.5.5 2.4 GHz SAR Test Requirements	23
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection	23
8.5.7 Initial Test Configuration Procedure	23
8.5.8 Subsequent Test Configuration Procedures	24
8.5.9 MIMO SAR Considerations	24
9. RF CONDUCTED POWERS	25
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers	25
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	26
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers	27
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	29
9.5 Bluetooth Conducted Powers	31
9.6 Ant+ Conducted Powers	35
10. SYSTEM VERIFICATION	36
10.1 Tissue Verification	36
10.2 Test System Verification	37
11. SAR TEST RESULTS	38
11.1 Standalone Head SAR Results	38
11.2 Standalone Body-Worn SAR Worn SAR Results	41
11.3 Standalone Hotspot SAR Results	43
11.4 Standalone Extremity SAR Results	44
11.5 SAR Test Notes	45

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	48
12.1 Introduction.....	48
12.2 Simultaneous Transmission Procedures.....	48
12.3 Simultaneous Transmission Capabilities	48
12.4 Head SAR Simultaneous Transmission Analysis	50
12.5 Body-Worn Simultaneous Transmission Analysis.....	58
12.6 Hotspot SAR Simultaneous Transmission Analysis	63
12.7 Simultaneous Transmission Conclusion	64
13. EQUIPMENT LIST.....	65
14. MEASUREMENT UNCERTAINTIES	66
15. CONCLUSION.....	69
16. REFERENCES	70
APPENDIX A. – Probe Calibration Data	72
APPENDIX B. – Dipole Calibration Data	138
APPENDIX C. – SAR Tissue Specifications	191
APPENDIX D. – SAR SYSTEM VALIDATION.....	195
APPENDIX E. – Description of Test Equipment.....	197

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Phone				
FCC ID	JOYEB1157				
Equipment model name	EB1157				
Equipment add model name	N/A				
Equipment serial no.	Identical prototype				
FCC & ISED MRA Designation No.	KR0034				
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, LTE Band 12, 2.4 G W-LAN (802.11b/g/n/ax-HT20), 5 G W-LAN (802.11a/n/ax-HT20/n/ax-HT40/ac/ax-VHT20/ac/ax-VHT40/ac/ax-VHT80), Bluetooth, NFC				
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 MHz ~ 848.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1 850.2 MHz ~ 1 909.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	826.4 MHz ~ 846.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 MHz ~ 715.3 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20	2 412 MHz ~ 2 462 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 MHz ~ 5 240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 190 MHz ~ 5 230 MHz
		802.11ac	Voice/Data	VHT80	5 210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 MHz ~ 5 320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 270 MHz ~ 5 310 MHz
		802.11ac	Voice/Data	VHT80	5 290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 MHz ~ 5 720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 510 MHz ~ 5 710 MHz
		802.11ac	Voice/Data	VHT80	5 530 MHz ~ 5 690 MHz
	Bluetooth	-	Data	-	2 402 MHz ~ 2 480 MHz
	NFC	-	Type A/B/F	-	13.56 MHz
RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 MHz ~ 893.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1 930.2 MHz ~ 1 989.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	871.4 MHz ~ 891.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	729.7 MHz ~ 745.3 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20	2 412 MHz ~ 2 462 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 180 MHz ~ 5 240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 190 MHz ~ 5 230 MHz
		802.11ac	Voice/Data	VHT80	5 210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 260 MHz ~ 5 320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 270 MHz ~ 5 310 MHz
		802.11ac	Voice/Data	VHT80	5 290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5 500 MHz ~ 5 720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5 510 MHz ~ 5 710 MHz
		802.11ac	Voice/Data	VHT80	5 530 MHz ~ 5 690 MHz
	Bluetooth	-	Data	-	2 402 MHz ~ 2 480 MHz
	NFC	-	Type A/B/F	-	13.56 MHz

SAR Summary Table

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Extremity
PCE	GSM 850	0.52	0.41	-	-
PCE	GPRS 850	0.53	0.41	0.41	-
PCE	GSM 1900	0.13	0.25	-	-
PCE	GPRS 1900	0.16	0.27	0.27	-
PCE	WCDMA 850	0.51	0.42	0.42	-
PCE	LTE Band 12	0.28	0.32	0.32	-
DTS(SISO)	2.4 GHz W-LAN	0.36	0.52	0.52	-
DTS(MIMO)	2.4 GHz W-LAN	0.44	0.56	0.56	-
U-NII-1(SISO)	5.2 GHz W-LAN	-	-	-	-
U-NII-1(MIMO)	5.2 GHz W-LAN	-	-	-	-
U-NII-2A(SISO)	5.3 GHz W-LAN	0.29	0.24	-	-
U-NII-2A(MIMO)	5.3 GHz W-LAN	0.25	0.25	-	-
U-NII-2C(SISO)	5.6 GHz W-LAN	0.34	0.38	-	-
U-NII-2C(MIMO)	5.6 GHz W-LAN	0.40	0.46	-	-
DSS	Bluetooth	0.27	0.31	0.31	-
DXX	NFC	-	-	-	0.11
Simultaneous SAR per KDB 690783 D01v01r03		1.20	1.17	0.97	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII) Low Power Communications Device Transmitter (DXX)				
Date(s) of Tests	2023.08.07 ~ 2023.08.23				
Antenna Type	Internal Antenna				
Note	Estimated SAR				
Functions	- GSM/GPRS (GPRS Class: 12) supported. * DTM not supported. - Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. - VoIP is supported. - W-LAN 2.4 GHz is supported Hotspot. - W-LAN 5 GHz is not supported Hotspot.				

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in JOYEB1157_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a “phablet”

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS 850	X	O	O	O	X	O
GSM/GPRS 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	X	O
LTE Band 12	X	O	O	O	X	O
2.4G W-LAN Ant.1	O	X	O	O	O	X
2.4G W-LAN Ant.2	X	X	O	O	X	O
2.4G W-LAN MIMO	O	X	O	O	O	O
5G W-LAN Ant.1	X	X	O	O	X	X
5G W-LAN Ant.2	X	X	O	O	X	X
5G W-LAN MIMO	X	X	O	O	X	X
Bluetooth Ant.1	O	X	O	O	O	X
Bluetooth Ant.2	X	X	O	O	X	O
NFC	O	O	O	O	O	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: O - Test / X - Not test.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

(B) Licensed Transmitter(s)

GSM/GPRS DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

1.7 Guidance Applied

- IEEE 1528-2013
- IEC/IEEE 62209-1528
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01(Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

1.9 FCC & ISED MRA test lab designation no. : KR0034

2. LTE INFORMATION

LTE Information					
FCC ID	JOYEB1157				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
UE Category	UE Cat 4				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Additional Information	This device does not support both UL and DL carrier aggregation.				

Note(s)

1. LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4.1
Sample SAR Area Scan

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

5. DEFINITION OF REFERENCE POINTS

5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 5.1
Close-up side view
of ERP

5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

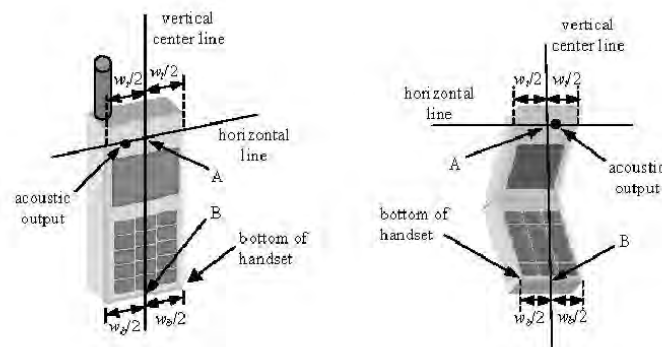


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

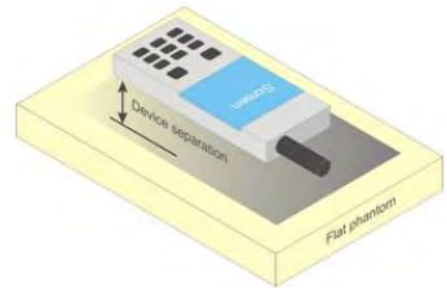


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.7 Phablet Configurations

For smart phones with a display diagonal $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR $> 1.2 \text{ W/kg}$.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC, (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

Figure 9.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR)

requirements.

Sub-test	β_c	β_d	β_d (SF)	$\beta_c \beta_d$	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{bs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$.
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCCH, HS-DPCCH, E-DPCCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
Note 5: Testing UE using E-DPCCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - The required channel and offset combination with the highest maximum output power is required for SAR.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.

5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.4.5 64QAM uplink

(1) Per KDB 941225 D05 V02r05, we'll measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we will apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

8.4.6 LTE TDD Consideration setup for SAR measurement

According to KDB 941225 D05 SAR for LTE Devices v02r05 for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special subframe configuration 6.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configuration and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-	-	-
8	$24144 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink * (Ts) * # of S + # of U

$T_s = 1/(15000 * 2048)$ seconds

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 * [1/(15000 * 2048)] * 2 + 6 \text{ ms} = 63.33 \%$

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

8.5.9 MIMO SAR Considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS 850	Maximum	33.9	33.9	30.9	29.1	27.9
	Nominal	30.9	30.9	27.9	26.1	24.9
GSM/GPRS 1900	Maximum	30.9	30.9	27.9	26.1	24.9
	Nominal	27.9	27.9	24.9	23.1	21.9

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)				
		Voice	GPRS Data (GMSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM 850	128	32.71	32.71	29.80	28.01	27.31
	190	32.45	32.45	29.62	27.90	26.75
	251	33.09	33.09	30.07	27.72	27.20
PCS 1900	512	30.04	30.04	26.89	24.94	24.30
	661	29.68	29.68	26.66	24.82	23.90
	810	29.78	29.78	26.70	25.01	24.20
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)				
		Voice	GPRS Data (GMSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot
GSM 850	128	23.68	23.68	23.78	23.75	24.3
	190	23.42	23.42	23.6	23.64	23.74
	251	24.06	24.06	24.05	23.46	24.19
PCS 1900	512	21.01	21.01	20.87	20.68	21.09
	661	20.65	20.65	20.64	20.56	20.89
	810	20.75	20.75	20.68	20.75	21.19
GSM 850		24.87	24.87	24.88	24.84	24.89
PCS 1900		21.87	21.87	21.88	21.84	21.89

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.

GPRS Multislot class: 12 (max 4 TX Uplink slots)
DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode			Cellular Band (dBm)	3GPP MPR (dB)
99	WCDMA	Voice	Maximum	24.3	-
			Nominal	22.8	
5	HSDPA	Subtest 1	Maximum	23.3	0
			Nominal	21.8	
5		Subtest 2	Maximum	23.3	0
			Nominal	21.8	
5		Subtest 3	Maximum	22.8	0.5
			Nominal	21.3	
5		Subtest 4	Maximum	22.8	0.5
			Nominal	21.3	
6	HSUPA	Subtest 1	Maximum	23.3	0
			Nominal	21.8	
6		Subtest 2	Maximum	21.3	2
			Nominal	19.8	
6		Subtest 3	Maximum	22.3	1
			Nominal	20.8	
6		Subtest 4	Maximum	21.3	2
			Nominal	19.8	
6		Subtest 5	Maximum	23.3	0
			Nominal	21.8	

Table 9.1.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	23.27	23.26	23.22	-
99		12.2 kbps AMR	23.26	23.25	23.22	-
5	HSDPA	Subtest 1	22.28	22.24	22.22	0
5		Subtest 2	22.29	22.23	22.23	0
5		Subtest 3	21.77	21.74	21.71	0.5
5		Subtest 4	21.77	21.75	21.72	0.5
6	HSUPA	Subtest 1	22.28	22.26	22.22	0
6		Subtest 2	20.28	20.25	20.24	2
6		Subtest 3	21.27	21.27	21.24	1
6		Subtest 4	20.31	20.27	20.24	2
6		Subtest 5	22.29	22.26	22.25	0

Table 9.1.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA and HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.




Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Modulated Average[dBm]
LTE Band 12	Maximum	24.3
	Nominal	22.8

Table 9.3.1.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power-- 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (707.5 MHz)		
			Conducted Power (dBm)		
QPSK	1	0	22.75	≤ 1	0
	1	25	22.85		
	1	49	22.72		
	25	0	21.38		1
	25	12	21.50		
	25	25	21.40		
16QAM	50	0	21.47	≤ 1	1
	1	0	21.86		
	1	25	21.98		
	1	49	21.80		2
	25	0	20.32		
	25	12	20.49		
64QAM	25	25	20.42	≤ 2	2
	50	0	20.51		
	1	0	20.61		3
	1	25	20.90		
	1	49	20.82		
	25	0	19.46	≤ 3	3
64QAM	25	12	19.60		
	25	25	19.43		
	50	0	19.55		

Table 9.3.1.2 LTE Conducted Power

Note : LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power-- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.71	22.68	22.98	≤ 1	0
	1	12	22.91	22.89	23.20		
	1	24	22.72	22.69	22.94		
	12	0	21.50	21.41	21.48		1
	12	6	21.57	21.51	21.59		
	12	13	21.53	21.49	21.57		
	25	0	21.46	21.45	21.50	1	
16QAM	1	0	21.72	21.73	22.15	≤ 1	1
	1	12	22.11	22.06	22.16		
	1	24	21.84	21.76	21.90		
	12	0	20.60	20.47	20.56	≤ 2	2
	12	6	20.64	20.66	20.72		
	12	13	20.62	20.55	20.71		
	25	0	20.56	20.52	20.63		2
64QAM	1	0	20.90	20.70	20.94	≤ 2	2
	1	12	21.09	20.92	21.32		
	1	24	20.91	20.88	20.96		
	12	0	19.66	19.56	19.60	≤ 3	3
	12	6	19.70	19.64	19.75		
	12	13	19.65	19.58	19.73		
	15	0	19.57	19.58	19.60		3

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power-- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.77	22.68	22.83	≤ 1	0
	1	7	22.89	22.70	22.92		
	1	14	22.83	22.61	22.83		
	8	0	21.55	21.38	21.53		1
	8	4	21.56	21.50	21.64		
	8	7	21.54	21.45	21.59		
	15	0	21.55	21.45	21.56		1
16QAM	1	0	21.83	21.54	21.92	≤ 1	1
	1	7	22.04	21.79	21.97		
	1	14	21.70	21.71	21.94		
	8	0	20.72	20.54	20.67	≤ 2	2
	8	4	20.75	20.67	20.78		
	8	7	20.70	20.65	20.71		
	15	0	20.56	20.49	20.58		
64QAM	1	0	20.70	20.59	20.86	≤ 2	2
	1	7	20.95	20.86	20.91		
	1	14	20.90	20.76	20.87		
	8	0	19.63	19.48	19.63	≤ 3	3
	8	4	19.75	19.63	19.80		
	8	7	19.65	19.60	19.70		
	15	0	19.69	19.57	19.64		

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	22.84	22.76	22.80	≤ 1	0
	1	2	23.03	22.92	23.11		
	1	5	22.87	22.78	23.01		
	3	0	22.87	22.73	22.87		0
	3	2	22.89	22.75	22.90		
	3	3	22.88	22.74	22.88		
	6	0	21.50	21.49	21.57	1	
16QAM	1	0	21.93	21.82	21.92	≤ 1	1
	1	2	22.05	22.04	22.09		
	1	5	21.94	21.85	21.90		
	3	0	21.84	21.79	21.92		1
	3	2	21.96	21.82	22.03		
	3	3	21.89	21.75	21.83		
	6	0	20.50	20.62	20.60	≤ 2	2
64QAM	1	0	20.70	20.71	20.95	≤ 2	2
	1	2	20.90	20.98	21.13		
	1	5	20.71	20.69	20.94		
	3	0	20.52	20.42	20.81		2
	3	2	20.62	20.54	21.04		
	3	3	20.60	20.52	20.95		
	6	0	19.55	19.60	19.67	≤ 3	3

Table 9.3.1.5 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
2.4	802.11b	1-11	15.0	12.0	15.0	12.0	15.0	12.0
	802.11g	1-11	15.0	12.0	15.0	12.0	15.0	12.0
	802.11n	1-11	15.0	12.0	15.0	12.0	15.0	12.0
	802.11ax	1-11	15.0	12.0	15.0	12.0	15.0	12.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11 (2.4 GHz) Conducted Power[dBm]					
			Ant.1		Ant.2		MIMO	
802.11b	2 412	1	11.70		11.95		14.85	
	2 437	6	11.71		11.83		14.83	
	2 462	11	12.03		12.04		14.96	
802.11g	2 412	1	11.61		11.84		14.74	
	2 437	6	11.46		11.66		14.55	
	2 462	11	11.79		11.83		14.84	
802.11n (HT-20)	2 412	1	11.27		11.62		14.47	
	2 437	6	11.07		11.45		14.27	
	2 462	11	11.53		11.58		14.56	
802.11ax (HE20)	2 412	1	11.77		12.24		14.81	
	2 437	6	11.80		12.05		14.76	
	2 462	11	12.05		12.10		14.94	

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]					
			Ant.1		Ant.2		MIMO(CDD/SDM)	
			Maximum	Nominal	Maximum	Nominal	Maximum	Nominal
5 (UNII)	802.11a	36-144	12.0	9.0	12.0	9.0	12.0	9.0
	802.11n/ac/ax (20MHz)	36-144	12.0	9.0	12.0	9.0	12.0	9.0
	802.11n/ac/ax (40MHz)	38-142	12.0	9.0	12.0	9.0	12.0	9.0
	802.11ac/ax (80MHz)	42-138	12.0	9.0	12.0	9.0	12.0	9.0

Table 9.4.5 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power[dBm]					
			Ant.1		Ant.2		MIMO	
802.11a	5 180	36	6.94		9.09		11.21	
	5 200	40	6.83		8.90		10.95	
	5 220	44	6.75		8.86		11.00	
	5 240	48	6.72		8.97		11.03	
	5 260	52	7.13		9.08		11.30	
	5 280	56	7.33		8.97		11.22	
	5 300	60	7.14		8.98		11.23	
	5 320	64	7.43		9.18		11.44	
	5 500	100	7.30		8.43		10.95	
	5 580	116	7.20		8.19		10.78	
	5 660	132	7.08		8.19		10.82	
	5 700	140	6.31		7.83		10.35	
	5 720	144	6.04		7.62		10.17	

Table 9.4.6 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power[dBm]					
			Ant.1		Ant.2		MIMO	
802.11n (HT-20)	5 180	36	6.69		8.85		10.96	
	5 200	40	6.56		8.60		10.68	
	5 220	44	6.43		8.67		10.81	
	5 240	48	6.53		8.60		10.81	
	5 260	52	6.97		8.60		10.91	
	5 280	56	6.98		8.73		10.98	
	5 300	60	7.03		8.68		11.05	
	5 320	64	7.18		8.88		11.18	
	5 500	100	6.97		8.30		10.71	
	5 580	116	6.85		8.00		10.51	
	5 660	132	6.81		8.02		10.55	
	5 700	140	6.31		7.52		10.04	
	5 720	144	6.04		7.29		9.93	

Table 9.4.7 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power[dBm]					
			Ant.1		Ant.2		MIMO	
802.11ac (VHT-20)	5 180	36	6.67		8.77		10.91	
	5 200	40	6.37		8.60		10.76	
	5 220	44	6.54		8.56		10.73	
	5 240	48	6.37		8.48		10.74	
	5 260	52	7.01		8.52		11.04	
	5 280	56	6.99		8.64		10.86	
	5 300	60	6.95		8.66		10.87	
	5 320	64	7.17		8.79		11.14	
	5 500	100	6.90		8.27		10.69	
	5 580	116	6.74		8.04		10.52	
	5 660	132	6.71		8.14		10.43	
	5 700	140	6.26		7.51		9.99	
	5 720	144	6.00		7.34		9.83	

Table 9.4.8 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]					
			Ant.1		Ant.2		MIMO	
802.11n (HT-40)	5 190	38	7.11		9.10		11.30	
	5 230	46	6.92		8.89		11.13	
	5 270	54	7.00		8.68		11.03	
	5 310	62	7.25		8.97		11.27	
	5 510	102	7.23		8.33		10.90	
	5 550	110	7.10		8.19		10.74	
	5 670	134	6.74		7.89		10.44	
	5 710	142	6.62		7.75		10.27	

Table 9.4.9 IEEE 802.11n HT40 Average RF Power

Mode	Freq.	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power[dBm]		
	(MHz)		Ant.1	Ant.2	MIMO
802.11ac (VHT-40)	5 190	38	7.09	9.01	11.22
	5 230	46	6.99	8.85	11.02
	5 270	54	7.09	8.76	10.97
	5 310	62	7.29	8.88	11.23
	5 510	102	7.29	8.22	10.85
	5 550	110	7.14	7.98	10.60
	5 670	134	6.85	7.90	10.48
	5 710	142	6.69	7.69	10.28

Table 9.4.10 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]		
	(MHz)		Ant.1	Ant.2	MIMO
802.11ac (VHT-80)	5 210	42	7.58	9.15	11.50
	5 290	58	7.65	9.34	11.82
	5 530	106	7.66	8.59	11.28
	5 610	122	7.73	8.25	11.04
	5 690	138	7.46	8.05	10.84

Table 9.4.11 IEEE 802.11ac VHT80 Average RF Power

Mode	Freq.	Channel	IEEE 802.11ax HE20 (5 GHz) Conducted Power[dBm]		
	(MHz)		Ant.1	Ant.2	MIMO
802.11ax (HE20)	5 180	36	8.05	10.24	12.29
	5 200	40	7.95	10.03	12.11
	5 220	44	7.8	9.98	12.08
	5 240	48	7.91	10	12.02
	5 260	52	8.9	9.87	12.35
	5 280	56	8.86	9.67	12.41
	5 300	60	9.01	9.67	12.33
	5 320	64	9.12	9.97	12.58
	5 500	100	8.46	9.75	12.16
	5 580	116	8.27	9.51	11.92
	5 660	132	8.36	9.52	11.93
	5 700	140	7.47	8.86	11.23
	5 720	144	7.26	8.57	11.01

Table 9.4.7 IEEE 802.11ax HE20 Average RF Power

Mode	Freq.	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power[dBm]		
	(MHz)		Ant.1	Ant.2	MIMO
802.11ax (HE40)	5 190	38	7.81	9.99	12.05
	5 230	46	7.69	9.73	11.78
	5 270	54	8.94	9.33	12.35
	5 310	62	9.07	9.44	12.54
	5 510	102	8.59	9.66	12.17
	5 550	110	8.4	9.48	12.04
	5 670	134	7.37	8.74	11.12
	5 710	142	7.26	8.57	10.94

Table 9.4.9 IEEE 802.11ax HE40 Average RF Power

Mode	Freq.	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power[dBm]		
	(MHz)		Ant.1	Ant.2	MIMO
802.11ax (HE80)	5 210	42	8.03	9.79	12.03
	5 290	58	8.82	9.91	12.44
	5 530	106	8.22	9.12	11.73
	5 610	122	7.63	9.00	11.48
	5 690	138	7.69	8.92	11.42

Table 9.4.11 IEEE 802.11ax HE80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

1) Ant.1

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	16.36
	Nominal	15.36
Bluetooth 2 Mbps	Maximum	15.26
	Nominal	14.26
Bluetooth 3 Mbps	Maximum	15.26
	Nominal	14.26
Bluetooth LE	Maximum	8.56
	Nominal	7.56

Table 9.5.1.1 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency (MHz)	Frame AVG Output Power (1Mbps) (dBm)	Frame AVG Output Power (2Mbps) (dBm)	Frame AVG Output Power (3Mbps) (dBm)
Low	2 402	15.13	14.10	14.06
Mid	2 441	15.48	14.28	14.36
High	2 480	14.90	14.04	13.93

Table 9.5.1.2 Bluetooth Frame Average RF Power

Channel	Frequency (MHz)	Frame AVG Output Power(LE / 1Mbps) (dBm)	Frame AVG Output Power(LE / 2Mbps) (dBm)
Low	2 402	2.84	0.04
Mid	2 440	2.11	-0.68
High	2 480	4.22	1.43

Table 9.5.1.3 Bluetooth LE Frame Average RF Power

● Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 9.5.1.1.

3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

1) Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 9.5.1.1.

3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.

4) Power levels were measured by a Power Meter.



Figure 9.5.1.1 Average Power Measurement Setup

2) Ant.2

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	15.16
	Nominal	14.16
Bluetooth 2 Mbps	Maximum	14.16
	Nominal	13.16
Bluetooth 3 Mbps	Maximum	14.16
	Nominal	13.16
Bluetooth LE	Maximum	8.56
	Nominal	7.56

Table 9.5.2.1 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Frame AVG Output Power (1Mbps)	Frame AVG Output Power (2Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)
Low	2 402	14.31	14.30	13.61
Mid	2 441	14.64	13.58	13.77
High	2 480	14.20	14.18	13.54

Table 9.5.2.2 Bluetooth Frame Average RF Power

Channel	Frequency	Frame AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)
Low	2 402	2.95	0.19
Mid	2 440	3.16	0.41
High	2 480	3.77	1.02

Table 9.5.2.3 Bluetooth LE Frame Average RF Power

- Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

- 2) Instruments and EUT were connected like Figure 9.5.2.1.

- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.

- 4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- 1) Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

- 2) Instruments and EUT were connected like Figure 9.5.2.1.

- 3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.

- 4) Power levels were measured by a Power Meter.




Figure 9.5.2.1 Average Power Measurement Setup

- Bluetooth Transmission Plot

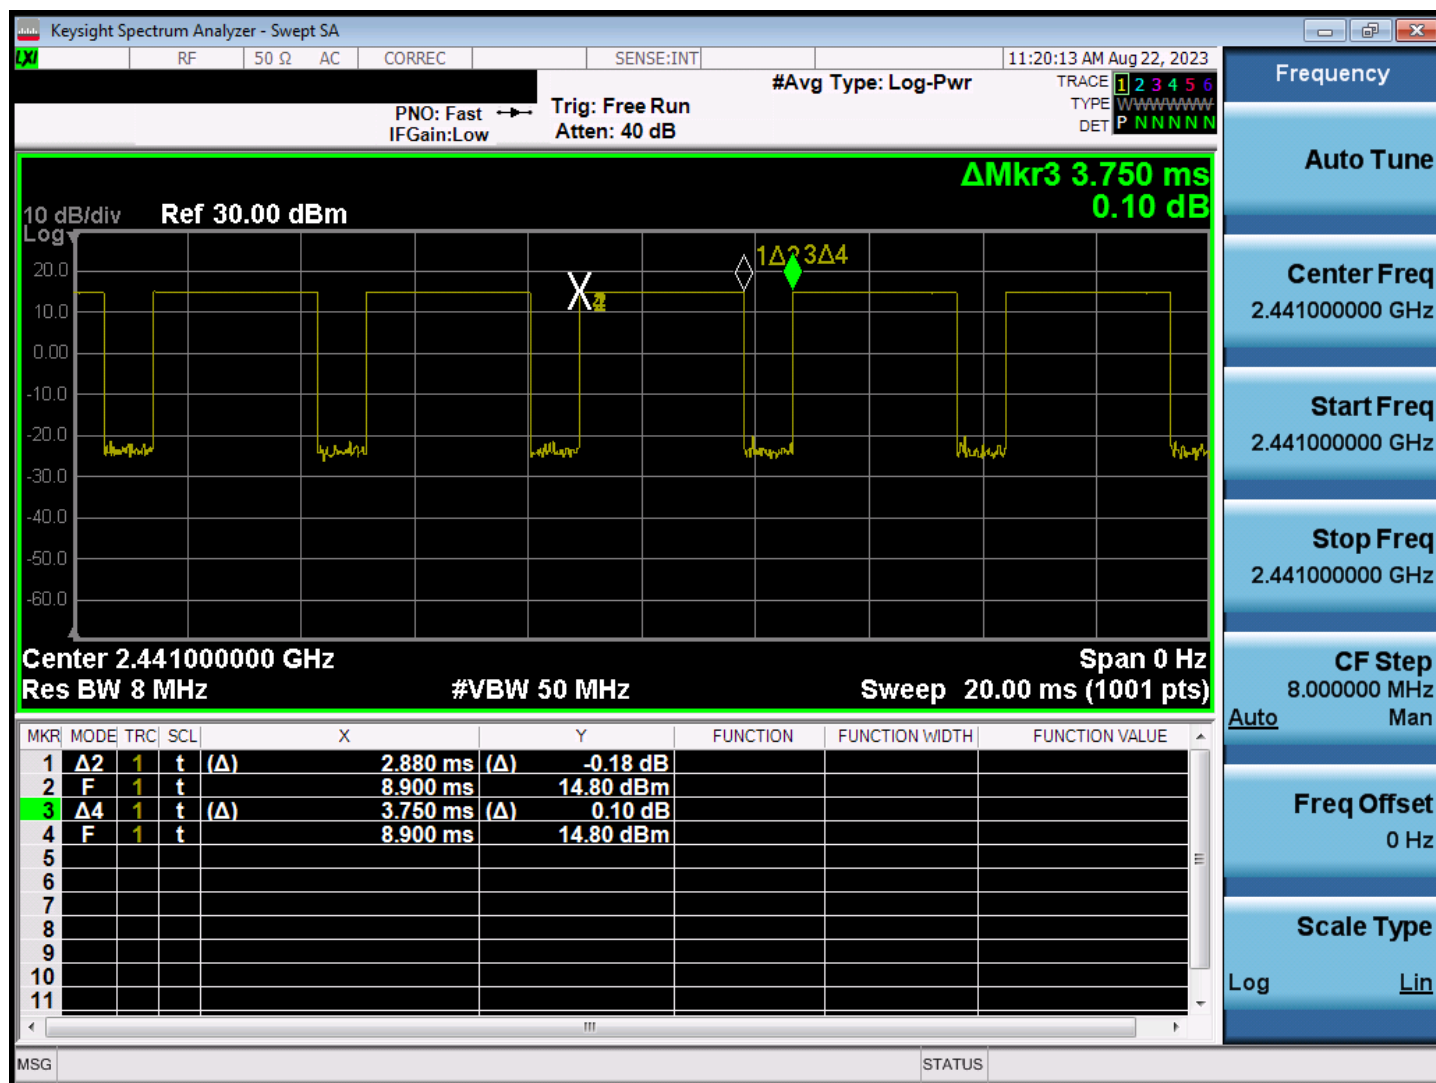


Figure 9.5.2.2 Bluetooth Transmission Plot

- Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

9.6 Ant+ Conducted Powers

Frame Modulated Average[dBm]		
Ant+	Maximum	8.56
	Nominal	7.56

Table 9.6.1 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Frame AVG Output Power(Ant+)
	(MHz)	(dBm)
Low	2 402	-6.00
Mid	2 440	-6.74
High	2 480	-4.64

Table 9.6.2 Ant+(Ant.1) Frame Average RF Power

Channel	Frequency	Frame AVG Output Power(Ant+)
	(MHz)	(dBm)
Low	2 402	-6.42
Mid	2 440	-5.98
High	2 480	-5.52

Table 9.6.3 Ant+(Ant.2) Frame Average RF Power

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Aug. 21. 2023	13 Head	21.6	21.8	12.0	55.000	0.750	54.290	0.740	-1.29	-1.33
				13.0	55.000	0.750	54.340	0.740	-1.20	-1.33
				13.6	55.000	0.750	54.482	0.740	-0.94	-1.33
				14.0	55.000	0.750	54.482	0.740	-0.94	-1.33
Aug. 09. 2023	750 Head	21.7	21.3	707.5	42.129	0.887	42.746	0.865	1.46	-2.48
				750.0	41.900	0.890	42.199	0.903	0.71	1.46
				782.0	41.749	0.894	41.758	0.923	0.02	3.24
				824.2	41.552	0.899	42.507	0.893	2.30	-0.67
Aug. 07. 2023	835 Head	21.1	21.4	826.4	41.542	0.899	42.480	0.895	2.26	-0.44
				829.0	41.528	0.899	42.441	0.897	2.20	-0.22
				835.0	41.500	0.900	42.361	0.903	2.07	0.33
				836.5	41.500	0.901	42.340	0.904	2.02	0.33
				836.6	41.500	0.901	42.340	0.904	2.02	0.33
				844.0	41.500	0.910	42.243	0.910	1.79	0.00
				846.6	41.500	0.912	42.206	0.913	1.70	0.11
				848.8	41.500	0.914	42.176	0.915	1.63	0.11
Aug. 08. 2023	1 900 Head	21.4	21.7	1 850.2	40.000	1.400	40.331	1.371	0.83	-2.07
				1 852.4	40.000	1.400	40.316	1.373	0.79	-1.93
				1 860.0	40.000	1.400	40.264	1.382	0.66	-1.29
				1 880.0	40.000	1.400	40.173	1.404	0.43	0.29
				1 900.0	40.000	1.400	40.070	1.424	0.18	1.71
				1 907.6	40.000	1.400	40.032	1.431	0.08	2.21
				1 909.8	40.000	1.400	40.023	1.433	0.06	2.36
Aug. 16. 2023	2 450 Head	21.4	21.6	2 412.0	39.265	1.766	39.071	1.812	-0.49	2.60
				2 437.0	39.222	1.788	38.989	1.843	-0.59	3.08
				2 450.0	39.200	1.800	38.648	1.858	-1.41	3.22
				2 462.0	39.184	1.813	38.906	1.870	-0.71	3.14
				2 472.0	39.171	1.823	38.873	1.880	-0.76	3.13
				5 260.0	35.940	4.720	35.279	4.670	-1.84	-1.06%
Aug. 21. 2023	5 300 Head	20.7	20.2	5 270.0	35.930	4.730	35.274	4.682	-1.83	-1.01%
				5 280.0	35.920	4.740	35.272	4.690	-1.80	-1.05%
				5 290.0	35.910	4.750	35.260	4.698	-1.81	-1.09%
				5 300.0	35.900	4.760	35.241	4.708	-1.84	-1.09%
				5 310.0	35.890	4.770	35.223	4.721	-1.86	-1.03%
				5 320.0	35.880	4.780	35.210	4.733	-1.87	-0.98%
				5 500.0	35.650	4.965	36.462	5.078	2.28	2.28
				5 510.0	35.635	4.976	36.440	5.090	2.26	2.30
Aug. 23. 2023	5 600 Head	20.5	20.9	5 530.0	35.605	4.997	36.393	5.117	2.21	2.41
				5 550.0	35.575	5.018	36.354	5.141	2.19	2.46
				5 580.0	35.530	5.049	36.288	5.182	2.13	2.63
				5 600.0	35.500	5.070	36.253	5.207	2.12	2.70
				5 610.0	35.490	5.080	36.233	5.219	2.09	2.74
				5 660.0	35.440	5.130	36.128	5.284	1.94	3.00
				5 670.0	35.430	5.140	36.106	5.297	1.91	3.05
				5 690.0	35.410	5.160	36.065	5.325	1.85	3.20
				5 710.0	35.390	5.180	36.033	5.350	1.82	3.28
				5 720.0	35.380	5.190	36.013	5.361	1.79	3.29
				5 800.0	35.300	5.270	35.835	5.467	1.52	3.74

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
B	750	D750V3, SN:1049	Aug. 09. 2023	Head	21.7	21.3	7337	250	8.48	2.21	8.84	4.25
B	835	D835V2, SN:464	Aug. 07. 2023	Head	21.1	21.4	7337	250	9.81	2.41	9.64	-1.73
B	1 900	D1900V2, SN:5d029	Aug. 08. 2023	Head	21.4	21.7	7337	100	39.7	3.87	38.70	-2.52
B	2 450	D2450V2, SN: 726	Aug. 16. 2023	Head	21.4	21.6	7337	100	52.7	5.43	54.30	3.04
F	5 300	D5GHzV2, SN:1103	Aug. 21. 2023	Head	20.7	20.2	3866	100	83.8	7.98	79.80	-4.77
F	5 500	D5GHzV2, SN:1103	Aug. 23. 2023	Head	20.5	20.9	3866	100	86.8	8.38	83.80	-3.46

Table 10.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
B	13	CLA13, SN:1030	Aug. 21. 2023	Head	21.6	21.8	3916	250	0.337	0.081	0.322	-4.45

Note(s)

1. System Verification was measured with input 250 mW, 100 mW and normalized to 1W.
2. Full system validation status and results can be found in Appendix D.




Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Standalone Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.90	32.45	0.130	Left Touch	FCC #1	1	1:8.3	0.375	1.396	0.524	A1
836.6	190	GSM850	GSM	33.90	32.45	-0.030	Right Touch	FCC #1	1	1:8.3	0.309	1.396	0.431	
836.6	190	GSM850	GSM	33.90	32.45	0.160	Left Tilt	FCC #1	1	1:8.3	0.173	1.396	0.242	
836.6	190	GSM850	GSM	33.90	32.45	0.010	Right Tilt	FCC #1	1	1:8.3	0.192	1.396	0.268	
836.6	190	GSM850	GPRS	27.90	26.75	0.010	Left Touch	FCC #1	4	1:2.075	0.403	1.303	0.525	A2
836.6	190	GSM850	GPRS	27.90	26.75	-0.020	Right Touch	FCC #1	4	1:2.075	0.347	1.303	0.452	
836.6	190	GSM850	GPRS	27.90	26.75	0.020	Left Tilt	FCC #1	4	1:2.075	0.194	1.303	0.253	
836.6	190	GSM850	GPRS	27.90	26.75	0.030	Right Tilt	FCC #1	4	1:2.075	0.226	1.303	0.294	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.90	29.68	-0.050	Left Touch	FCC #1	1	1:8.3	0.099	1.324	0.131	A3
1880.0	661	PCS1900	PCS	30.90	29.68	0.070	Right Touch	FCC #1	1	1:8.3	0.081	1.324	0.107	
1880.0	661	PCS1900	PCS	30.90	29.68	0.020	Left Tilt	FCC #1	1	1:8.3	0.022	1.324	0.029	
1880.0	661	PCS1900	PCS	30.90	29.68	0.070	Right Tilt	FCC #1	1	1:8.3	0.036	1.324	0.048	
1880.0	661	PCS1900	GPRS	24.90	23.90	0.030	Left Touch	FCC #1	4	1:2.075	0.124	1.259	0.156	A4
1880.0	661	PCS1900	GPRS	24.90	23.90	0.050	Right Touch	FCC #1	4	1:2.075	0.085	1.259	0.107	
1880.0	661	PCS1900	GPRS	24.90	23.90	0.170	Left Tilt	FCC #1	4	1:2.075	0.025	1.259	0.031	
1880.0	661	PCS1900	GPRS	24.90	23.90	0.030	Right Tilt	FCC #1	4	1:2.075	0.042	1.259	0.053	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.080	Left Touch	FCC #1	1:1	0.397	1.271	0.505	A5
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.060	Right Touch	FCC #1	1:1	0.339	1.271	0.431	
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.070	Left Tilt	FCC #1	1:1	0.204	1.271	0.259	
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.100	Right Tilt	FCC #1	1:1	0.182	1.271	0.231	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.1.4 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.30	22.85	0.080	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.198	1.396	0.276	A6
707.5	23095	LTE B12	10	23.30	21.50	0.030	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.175	1.514	0.265	
707.5	23095	LTE B12	10	24.30	22.85	0.010	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.161	1.396	0.225	
707.5	23095	LTE B12	10	23.30	21.50	0.020	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.140	1.514	0.212	
707.5	23095	LTE B12	10	24.30	22.85	-0.010	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.117	1.396	0.163	
707.5	23095	LTE B12	10	23.30	21.50	0.020	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.105	1.514	0.159	
707.5	23095	LTE B12	10	24.30	22.85	0.070	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.106	1.396	0.148	
707.5	23095	LTE B12	10	23.30	21.50	0.060	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.094	1.514	0.142	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11.1.5 DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.000	Left Touch	FCC #2	0.166	1	99.4	0.181	1.982	1.006	0.361	A7
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.000	Right Touch	FCC #2	0.082	1	99.4	0.078	1.982	1.006	0.156	
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.000	Left Tilt	FCC #2	0.048	1	99.4	0.050	1.982	1.006	0.100	
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.000	Right Tilt	FCC #2	0.021	1	99.4	0.021	1.982	1.006	0.042	A8
2 462.0	11	802.11b (Ant.2)	15.00	12.04	0.000	Left Touch	FCC #2	0.036	1	99.6	0.039	1.977	1.004	0.077	
2 462.0	11	802.11b (Ant.2)	15.00	12.04	0.030	Right Touch	FCC #2	0.083	1	99.6	0.075	1.977	1.004	0.149	
2 462.0	11	802.11b (Ant.2)	15.00	12.04	0.060	Left Tilt	FCC #2	0.022	1	99.6	0.013	1.977	1.004	0.026	A9
2 462.0	11	802.11b (Ant.2)	15.00	12.04	0.040	Right Tilt	FCC #2	0.034	1	99.6	0.030	1.977	1.004	0.060	
2 462.0	11	802.11b (MIMO)	15.00	14.96	0.060	Left Touch	FCC #2	0.220	1	99.4	0.222	1.982	1.006	0.443	
2 462.0	11	802.11b (MIMO)	15.00	14.96	-0.040	Right Touch	FCC #2	0.081	1	99.4	0.082	1.982	1.006	0.164	
2 462.0	11	802.11b (MIMO)	15.00	14.96	0.000	Left Tilt	FCC #2	0.071	1	99.4	0.043	1.982	1.006	0.086	
2 462.0	11	802.11b (MIMO)	15.00	14.96	0.090	Right Tilt	FCC #2	0.038	1	99.4	0.031	1.982	1.006	0.062	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Head 1.6 W/kg (mW/g) averaged over 1 gram			

Adjusted SAR results for OFDM SAR													
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR	
MHz	Ch												
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.361	2 462.0	802.11g	OFDM	15.00	1.000	0.361		X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.361	2 462.0	802.11n	OFDM	15.00	1.000	0.361		X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.361	2 462.0	802.11ac	OFDM	15.00	1.000	0.361		X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.361	2 462.0	802.11ax	OFDM	15.00	1.000	0.361		X
2 462.0	11	802.11b (Ant.2)	DSSS	15.00	0.149	2 462.0	802.11g	OFDM	15.00	1.000	0.149		X
2 462.0	11	802.11b (Ant.2)	DSSS	15.00	0.149	2 462.0	802.11n	OFDM	15.00	1.000	0.149		X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.149	2 462.0	802.11ac	OFDM	15.00	1.000	0.149		X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.149	2 462.0	802.11ax	OFDM	15.00	1.000	0.149		X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.443	2 462.0	802.11g	OFDM	15.00	1.000	0.443		X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.443	2 462.0	802.11n	OFDM	15.00	1.000	0.443		X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.443	2 462.0	802.11ac	OFDM	15.00	1.000	0.443		X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.443	2 462.0	802.11ax	OFDM	15.00	1.000	0.443		X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.1.6 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 290.0	58	802.11ac (Ant.1)	12.00	7.65	-0.090	Left Touch	FCC #2	0.139	MCS0	98.8	0.105	2.723	1.012	0.289	A10
5 290.0	58	802.11ac (Ant.1)	12.00	7.65	0.090	Right Touch	FCC #2	0.044	MCS0	98.8	0.051	2.723	1.012	0.141	
5 290.0	58	802.11ac (Ant.1)	12.00	7.65	0.000	Left Tilt	FCC #2	0.012	MCS0	98.8	0.011	2.723	1.012	0.030	
5 290.0	58	802.11ac (Ant.1)	12.00	7.65	0.000	Right Tilt	FCC #2	0.015	MCS0	98.8	0.014	2.723	1.012	0.039	A11
5 290.0	58	802.11ac (Ant.2)	12.00	9.34	0.020	Left Touch	FCC #2	0.022	MCS0	98.2	0.010	1.845	1.018	0.019	
5 290.0	58	802.11ac (Ant.2)	12.00	9.34	0.040	Right Touch	FCC #2	0.096	MCS0	98.2	0.077	1.845	1.018	0.145	
5 290.0	58	802.11ac (Ant.2)	12.00	9.34	0.000	Left Tilt	FCC #2	0.077	MCS0	98.2	0.024	1.845	1.018	0.045	A12
5 290.0	58	802.11ac (Ant.2)	12.00	9.34	0.000	Right Tilt	FCC #2	0.035	MCS0	98.2	0.026	1.845	1.018	0.049	
5 290.0	58	802.11ac (MIMO)	12.00	11.62	0.000	Left Touch	FCC #2	0.120	MCS0	98.8	0.089	2.723	1.012	0.245	
5 290.0	58	802.11ac (MIMO)	12.00	11.62	0.030	Right Touch	FCC #2	0.089	MCS0	98.8	0.070	2.723	1.012	0.193	
5 290.0	58	802.11ac (MIMO)	12.00	11.62	0.000	Left Tilt	FCC #2	0.024	MCS0	98.8	0.017	2.723	1.012	0.047	
5 290.0	58	802.11ac (MIMO)	12.00	11.62	0.000	Right Tilt	FCC #2	0.037	MCS0	98.8	0.033	2.723	1.012	0.091	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram						

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR [W/kg]	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR [W/kg]	SAR for the band with lower maximum output power
MHz	Ch											
5 290.0	58	802.11ac (Ant.1)	OFDM	12.00	0.289	5 210.0	802.11ac	OFDM	12.00	1.000	0.289	X
5 290.0	58	802.11ac (Ant.2)	OFDM	12.00	0.145	5 210.0	802.11ac	OFDM	12.00	1.000	0.145	X
5 290.0	58	802.11ac (MIMO)	OFDM	12.00	0.245	5 210.0	802.11ac	OFDM	12.00	1.000	0.245	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.7 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 530.0	106	802.11ac (Ant.1)	12.00	7.86	-0.090	Left Touch	FCC #2	0.139	MCS0	98.8	0.105	2.594	1.012	0.276	A13
5 530.0	106	802.11ac (Ant.1)	12.00	7.86	0.130	Right Touch	FCC #2	0.075	MCS0	98.8	0.064	2.594	1.012	0.168	
5 530.0	106	802.11ac (Ant.1)	12.00	7.86	0.000	Left Tilt	FCC #2	0.065	MCS0	98.8	0.074	2.594	1.012	0.194	
5 530.0	106	802.11ac (Ant.1)	12.00	7.86	0.000	Right Tilt	FCC #2	0.038	MCS0	98.8	0.043	2.594	1.012	0.113	
5 530.0	106	802.11ac (Ant.2)	12.00	8.59	0.080	Left Touch	FCC #2	0.067	MCS0	98.2	0.062	2.193	1.018	0.138	
5 530.0	106	802.11ac (Ant.2)	12.00	8.59	0.000	Right Touch	FCC #2	0.153	MCS0	98.2	0.153	2.193	1.018	0.342	A14
5 530.0	106	802.11ac (Ant.2)	12.00	8.59	0.000	Left Tilt	FCC #2	0.047	MCS0	98.2	0.024	2.193	1.018	0.054	
5 530.0	106	802.11ac (Ant.2)	12.00	8.59	0.000	Right Tilt	FCC #2	0.063	MCS0	98.2	0.046	2.193	1.018	0.103	
5 530.0	106	802.11ac (MIMO)	12.00	11.28	0.000	Left Touch	FCC #2	0.165	MCS0	98.8	0.153	2.594	1.012	0.402	A15
5 530.0	106	802.11ac (MIMO)	12.00	11.28	-0.050	Right Touch	FCC #2	0.096	MCS0	98.8	0.096	2.594	1.012	0.252	
5 530.0	106	802.11ac (MIMO)	12.00	11.28	0.000	Left Tilt	FCC #2	0.037	MCS0	98.8	0.077	2.594	1.012	0.202	
5 530.0	106	802.11ac (MIMO)	12.00	11.28	0.000	Right Tilt	FCC #2	0.036	MCS0	98.8	0.029	2.594	1.012	0.076	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11.1.8 Bluetooth Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	0.070	Left Touch	FCC #2	1	76.8	0.172	1.224	1.302	0.274	A16
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.040	Right Touch	FCC #2	1	76.8	0.048	1.224	1.302	0.077	
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	0.030	Left Tilt	FCC #2	1	76.8	0.041	1.224	1.302	0.065	
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	0.000	Right Tilt	FCC #2	1	76.8	0.015	1.224	1.302	0.024	
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	0.090	Left Touch	FCC #2	1	76.8	0.029	1.126	1.302	0.043	A17
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	0.010	Right Touch	FCC #2	1	76.8	0.076	1.126	1.302	0.111	
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	0.060	Left Tilt	FCC #2	1	76.8	0.017	1.126	1.302	0.025	
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	0.070	Right Tilt	FCC #2	1	76.8	0.035	1.126	1.302	0.051	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.90	32.45	-0.010	10 mm [Front]	FCC #1	1	1:8.3	0.179	1.396	0.250	
836.6	190	GSM850	GSM	33.90	32.45	-0.040	10 mm [Rear]	FCC #1	1	1:8.3	0.292	1.396	0.408	A18
836.6	190	GSM850	GPRS	27.90	26.75	0.120	10 mm [Front]	FCC #1	4	1:2.075	0.316	1.303	0.412	A19
836.6	190	GSM850	GPRS	27.90	26.75	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.307	1.303	0.400	
1 880.0	661	PCS1900	PCS	30.90	29.68	0.000	10 mm [Front]	FCC #1	1	1:8.3	0.158	1.324	0.209	
1 880.0	661	PCS1900	PCS	30.90	29.68	0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.185	1.324	0.245	A20
1 880.0	661	PCS1900	GPRS	24.90	23.90	-0.010	10 mm [Front]	FCC #1	4	1:2.075	0.187	1.259	0.235	
1 880.0	661	PCS1900	GPRS	24.90	23.90	-0.040	10 mm [Rear]	FCC #1	4	1:2.075	0.214	1.259	0.269	A21
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.000	10 mm [Front]	FCC #1	N/A	1:1	0.329	1.271	0.418	A22
836.6	4183	WCDMA 850	RMC	24.30	23.26	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.318	1.271	0.404	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 11.2.2 LTE B12 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.30	22.85	0.020	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.192	1.396	0.268	
707.5	23095	LTE B12	10	23.30	21.50	-0.050	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.167	1.514	0.253	
707.5	23095	LTE B12	10	24.30	22.85	0.070	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.227	1.396	0.317	A23
707.5	23095	LTE B12	10	23.30	21.50	0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.202	1.514	0.306	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11.2.3 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.000	10 mm [Front]	FCC #2	0.014	1	99.4	0.050	1.982	1.006	0.100	A24
2 462.0	11	802.11b (Ant.1)	15.00	12.03	-0.110	10 mm [Rear]	FCC #2	0.053	1	99.4	0.261	1.982	1.006	0.520	
2 462.0	11	802.11b (Ant.2)	15.00	12.04	-0.140	10 mm [Front]	FCC #2	0.019	1	99.6	0.017	1.977	1.004	0.034	
2 462.0	11	802.11b (Ant.2)	15.00	12.04	0.080	10 mm [Rear]	FCC #2	0.094	1	99.6	0.076	1.977	1.004	0.151	A25
2 462.0	11	802.11b (MIMO)	15.00	14.96	-0.050	10 mm [Front]	FCC #2	0.019	1	99.4	0.058	1.982	1.006	0.116	
2 462.0	11	802.11b (MIMO)	15.00	14.96	0.030	10 mm [Rear]	FCC #2	0.098	1	99.4	0.283	1.982	1.006	0.564	A26
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Adjusted SAR results for OFDM SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.520	2 462.0	802.11g	OFDM	15.00	1.000	0.520	X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.520	2 462.0	802.11n	OFDM	15.00	1.000	0.520	X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.520	2 462.0	802.11ac	OFDM	15.00	1.000	0.520	X
2 462.0	11	802.11b (Ant.1)	DSSS	15.00	0.520	2 462.0	802.11ax	OFDM	15.00	1.000	0.520	X
2 462.0	11	802.11b (Ant.2)	DSSS	15.00	0.151	2 462.0	802.11g	OFDM	15.00	1.000	0.151	X
2 462.0	11	802.11b (Ant.2)	DSSS	15.00	0.151	2 462.0	802.11n	OFDM	15.00	1.000	0.151	X
2 462.0	11	802.11b (Ant.2)	DSSS	15.00	0.151	2 462.0	802.11ac	OFDM	15.00	1.000	0.151	X
2 462.0	11	802.11b (Ant.2)	DSSS	15.00	0.151	2 462.0	802.11ax	OFDM	15.00	1.000	0.151	X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.564	2 462.0	802.11g	OFDM	15.00	1.000	0.564	X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.564	2 462.0	802.11n	OFDM	15.00	1.000	0.564	X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.564	2 462.0	802.11ac	OFDM	15.00	1.000	0.564	X
2 462.0	11	802.11b (MIMO)	DSSS	15.00	0.564	2 462.0	802.11ax	OFDM	15.00	1.000	0.564	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.2.4 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 290.0	58	802.11ac (Ant.1)	12.00	7.65	-0.080	10 mm [Front]	FCC #2	0.026	6	98.8	0.028	2.723	1.012	0.077	A27
5 290.0	58	802.11ac (Ant.1)	12.00	7.65	-0.130	10 mm [Rear]	FCC #2	0.084	6	98.8	0.088	2.723	1.012	0.243	
5 290.0	58	802.11ac (Ant.2)	12.00	9.34	0.090	10 mm [Front]	FCC #2	0.033	6	98.2	0.032	1.845	1.018	0.060	A28
5 290.0	58	802.11ac (Ant.2)	12.00	9.34	0.060	10 mm [Rear]	FCC #2	0.097	6	98.2	0.064	1.845	1.018	0.120	
5 290.0	58	802.11ac (MIMO)	12.00	11.62	-0.080	10 mm [Front]	FCC #2	0.023	6	98.8	0.032	2.723	1.012	0.088	A29
5 290.0	58	802.11ac (MIMO)	12.00	11.62	-0.120	10 mm [Rear]	FCC #2	0.088	6	98.8	0.092	2.723	1.012	0.254	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR [W/kg]	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR [W/kg]	SAR for the band with lower maximum output power
MHz	Ch											
5 290.0	58	802.11ac (Ant.1)	OFDM	12.00	0.243	5 210.0	802.11ac	OFDM	12.00	1.000	0.243	X
5 290.0	58	802.11ac (Ant.2)	OFDM	12.00	0.120	5 210.0	802.11ac	OFDM	12.00	1.000	0.120	X
5 290.0	58	802.11ac (MIMO)	OFDM	12.00	0.254	5 210.0	802.11ac	OFDM	12.00	1.000	0.254	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5 530.0	106	802.11ac (Ant.1)	12.00	7.86	-0.020	10 mm [Front]	FCC #2	0.051	MCS0	98.8	0.060	2.594	1.012	0.158	A30
5 530.0	106	802.11ac (Ant.1)	12.00	7.86	-0.160	10 mm [Rear]	FCC #2	0.098	MCS0	98.8	0.085	2.594	1.012	0.223	
5 530.0	106	802.11ac (Ant.2)	12.00	8.59	-0.080	10 mm [Front]	FCC #2	0.032	MCS0	98.2	0.042	2.193	1.018	0.094	A31
5 530.0	106	802.11ac (Ant.2)	12.00	8.59	0.100	10 mm [Rear]	FCC #2	0.155	MCS0	98.2	0.169	2.193	1.018	0.377	
5 530.0	106	802.11ac (MIMO)	12.00	11.28	0.100	10 mm [Front]	FCC #2	0.052	MCS0	98.8	0.055	2.594	1.012	0.144	A32
5 530.0	106	802.11ac (MIMO)	12.00	11.28	-0.060	10 mm [Rear]	FCC #2	0.160	MCS0	98.8	0.175	2.594	1.012	0.459	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.2.6 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.090	10 mm [Front]	FCC #2	1	76.8	0.032	1.224	1.302	0.051	A33
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.110	10 mm [Rear]	FCC #2	1	76.8	0.192	1.224	1.302	0.306	
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	-0.070	10 mm [Front]	FCC #2	1	76.8	0.023	1.126	1.302	0.034	A34
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	-0.020	10 mm [Rear]	FCC #2	1	76.8	0.089	1.126	1.302	0.130	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	27.90	26.75	-0.110	10 mm [Bottom]	FCC #1	4	1:2.075	0.181	1.303	0.236	A19
836.6	190	GSM850	GPRS	27.90	26.75	0.120	10 mm [Front]	FCC #1	4	1:2.075	0.316	1.303	0.412	
836.6	190	GSM850	GPRS	27.90	26.75	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.307	1.303	0.400	
836.6	190	GSM850	GPRS	27.90	26.75	-0.140	10 mm [Right]	FCC #1	4	1:2.075	0.136	1.303	0.177	
836.6	190	GSM850	GPRS	27.90	26.75	-0.050	10 mm [Left]	FCC #1	4	1:2.075	0.251	1.303	0.327	
1880.0	661	PCS1900	GPRS	24.90	23.90	-0.010	10 mm [Bottom]	FCC #1	4	1:2.075	0.161	1.259	0.203	A21
1880.0	661	PCS1900	GPRS	24.90	23.90	-0.010	10 mm [Front]	FCC #1	4	1:2.075	0.187	1.259	0.235	
1880.0	661	PCS1900	GPRS	24.90	23.90	-0.040	10 mm [Rear]	FCC #1	4	1:2.075	0.214	1.259	0.269	
1880.0	661	PCS1900	GPRS	24.90	23.90	-0.190	10 mm [Right]	FCC #1	4	1:2.075	0.043	1.259	0.054	
1880.0	661	PCS1900	GPRS	24.90	23.90	-0.020	10 mm [Left]	FCC #1	4	1:2.075	0.119	1.259	0.150	
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.020	10 mm [Bottom]	FCC #1	N/A	1:1	0.270	1.271	0.343	A22
836.6	4183	WCDMA 850	RMC	24.30	23.26	0.000	10 mm [Front]	FCC #1	N/A	1:1	0.329	1.271	0.418	
836.6	4183	WCDMA 850	RMC	24.30	23.26	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.318	1.271	0.404	
836.6	4183	WCDMA 850	RMC	24.30	23.26	-0.040	10 mm [Right]	FCC #1	N/A	1:1	0.156	1.271	0.198	
836.6	4183	WCDMA 850	RMC	24.30	23.26	-0.010	10 mm [Left]	FCC #1	N/A	1:1	0.304	1.271	0.386	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11.3.2 LTE B12 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.30	22.85	-0.050	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.056	1.396	0.078	A23
707.5	23095	LTE B12	10	23.30	21.50	0.030	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.051	1.514	0.077	
707.5	23095	LTE B12	10	24.30	22.85	0.020	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.192	1.396	0.268	
707.5	23095	LTE B12	10	23.30	21.50	-0.050	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.167	1.514	0.253	
707.5	23095	LTE B12	10	24.30	22.85	0.070	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.227	1.396	0.317	
707.5	23095	LTE B12	10	23.30	21.50	0.040	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.202	1.514	0.306	
707.5	23095	LTE B12	10	24.30	22.85	-0.010	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.078	1.396	0.109	
707.5	23095	LTE B12	10	23.30	21.50	-0.040	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.071	1.514	0.107	
707.5	23095	LTE B12	10	24.30	22.85	0.010	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.187	1.396	0.261	
707.5	23095	LTE B12	10	23.30	21.50	0.020	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.171	1.514	0.259	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11.3.3 DTS Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.170	10 mm [Top]	FCC #2	0.006	1	99.4	0.009	1.982	1.006	0.018	A24
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.000	10 mm [Front]	FCC #2	0.050	1	99.4	0.050	1.982	1.006	0.100	
2 462.0	11	802.11b (Ant.1)	15.00	12.03	-0.110	10 mm [Rear]	FCC #2	0.250	1	99.4	0.261	1.982	1.006	0.520	
2 462.0	11	802.11b (Ant.1)	15.00	12.03	0.030	10 mm [Right]	FCC #2	0.233	1	99.4	0.243	1.982	1.006	0.485	
2 462.0	11	802.11b (Ant.2)	15.00	12.04	-0.140	10 mm [Front]	FCC #2	0.017	1	99.6	0.017	1.977	1.004	0.034	
2 462.0	11	802.11b (Ant.2)	15.00	12.04	0.080	10 mm [Rear]	FCC #2	0.077	1	99.6	0.076	1.977	1.004	0.151	A25
2 462.0	11	802.11b (Ant.2)	15.00	12.04	-0.060	10 mm [Left]	FCC #2	0.044	1	99.6	0.046	1.977	1.004	0.091	
2 462.0	11	802.11b (MIMO)	15.00	14.96	-0.100	10 mm [Top]	FCC #2	0.012	1	99.4	0.012	1.982	1.006	0.024	A26
2 462.0	11	802.11b (MIMO)	15.00	14.96	-0.050	10 mm [Front]	FCC #2	0.054	1	99.4	0.058	1.982	1.006	0.116	
2 462.0	11	802.11b (MIMO)	15.00	14.96	0.030	10 mm [Rear]	FCC #2	0.277	1	99.4	0.283	1.982	1.006	0.564	
2 462.0	11	802.11b (MIMO)	15.00	14.96	-0.150	10 mm [Right]	FCC #2	0.254	1	99.4	0.261	1.982	1.006	0.520	
2 462.0	11	802.11b (MIMO)	15.00	14.96	0.020	10 mm [Left]	FCC #2	0.053	1	99.4	0.055	1.982	1.006	0.110	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.3.4 Bluetooth Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.070	10 mm [Top]	FCC #2	1	76.8	0.008	1.224	1.302	0.013	A33
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.090	10 mm [Front]	FCC #2	1	76.8	0.032	1.224	1.302	0.051	
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.110	10 mm [Rear]	FCC #2	1	76.8	0.192	1.224	1.302	0.306	
2 441.0	39	Bluetooth (Ant.1)	16.36	15.48	-0.140	10 mm [Right]	FCC #2	1	76.8	0.182	1.224	1.302	0.290	
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	-0.070	10 mm [Front]	FCC #2	1	76.8	0.023	1.126	1.302	0.034	
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	-0.020	10 mm [Rear]	FCC #2	1	76.8	0.089	1.126	1.302	0.130	A34
2 441.0	39	Bluetooth (Ant.2)	15.16	14.64	-0.130	10 mm [Left]	FCC #2	1	76.8	0.055	1.126	1.302	0.081	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram					

This test report is prohibited to copy or reissue in whole or in part without the approval of Dt&C Co., Ltd.

11.4 Standalone Extremity SAR Results

Table 11.4.1 NFC Extremity SAR

MEASUREMENT RESULTS								
FREQUENCY		Mode	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle [%]	10 g SAR (W/kg)	Plots #
MHz	Ch							
13.6	13600	NFC	0.000	0 mm [Top]	FCC #2	100	0.015	
13.6	13600	NFC	0.000	0 mm [Bottom]	FCC #2	100	0.006	
13.6	13600	NFC	0.050	0 mm [Front]	FCC #2	100	0.023	
13.6	13600	NFC	-0.060	0 mm [Rear]	FCC #2	100	0.106	A35
13.6	13600	NFC	0.000	0 mm [Right]	FCC #2	100	0.009	
13.6	13600	NFC	-0.090	0 mm [Left]	FCC #2	100	0.065	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Phablet 4.0 W/kg (mW/g) averaged over 10 gram		

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013 and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not $> \frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.
6. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by making a SAR measurement with both antennas transmitting simultaneously.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz Ant.1	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 2.4 GHz Ant.2	Yes	Yes	N/A	Yes	
3	GSM Voice + Wi-Fi 2.4 GHz MIMO	Yes	Yes	N/A	Yes	
4	GSM Voice + Bluetooth 2.4 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
5	GSM Voice + Bluetooth 2.4 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
6	GSM Voice + Wi-Fi 5 GHz Ant.1	Yes	Yes	N/A	Yes	
7	GSM Voice + Wi-Fi 5 GHz Ant.2	Yes	Yes	N/A	Yes	
8	GSM Voice + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	Yes	
9	GSM Voice + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
10	GSM Voice + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
11	GSM Voice + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
12	GSM Voice + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
13	GSM Voice + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
14	GSM Voice + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
15	WCDMA + Wi-Fi 2.4 GHz Ant.1	Yes	Yes	Yes	Yes	
16	WCDMA + Wi-Fi 2.4 GHz Ant.2	Yes	Yes	Yes	Yes	
17	WCDMA + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
18	WCDMA + Bluetooth 2.4 GHz Ant.1	Yes ^a	Yes	Yes	Yes	^a Bluetooth Tethering is considered.
19	WCDMA + Bluetooth 2.4 GHz Ant.2	Yes ^a	Yes	Yes	Yes	^a Bluetooth Tethering is considered.
20	WCDMA + Wi-Fi 5 GHz Ant.1	Yes	Yes	N/A	Yes	
21	WCDMA + Wi-Fi 5 GHz Ant.2	Yes	Yes	N/A	Yes	
22	WCDMA + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	Yes	
23	WCDMA + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
24	WCDMA + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
25	WCDMA + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
26	WCDMA + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
27	WCDMA + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
28	WCDMA + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
29	LTE + Wi-Fi 2.4 GHz Ant.1	Yes	Yes	Yes	Yes	
30	LTE + Wi-Fi 2.4 GHz Ant.2	Yes	Yes	Yes	Yes	
31	LTE + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	
32	LTE + Bluetooth 2.4 GHz Ant.1	Yes ^a	Yes	Yes	Yes	^a Bluetooth Tethering is considered.
33	LTE + Bluetooth 2.4 GHz Ant.2	Yes ^a	Yes	Yes	Yes	^a Bluetooth Tethering is considered.
34	LTE + Wi-Fi 5 GHz Ant.1	Yes	Yes	N/A	Yes	
35	LTE + Wi-Fi 5 GHz Ant.2	Yes	Yes	N/A	Yes	*Pre-installed VOIP applications are considered.
36	LTE + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	Yes	
37	LTE + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
38	LTE + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
39	LTE + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
40	LTE + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
41	LTE + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
42	LTE + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
43	GPRS + Wi-Fi 2.4 GHz Ant.1	Yes	Yes	Yes	Yes	*Pre-installed VOIP applications are considered.
44	GPRS + Wi-Fi 2.4 GHz Ant.2	Yes	Yes	Yes	Yes	*Pre-installed VOIP applications are considered.
45	GPRS + Wi-Fi 2.4 GHz MIMO	Yes	Yes	Yes	Yes	*Pre-installed VOIP applications are considered.
46	GPRS + Bluetooth 2.4 GHz Ant.1	Yes ^a	Yes	Yes	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
47	GPRS + Bluetooth 2.4 GHz Ant.2	Yes ^a	Yes	Yes	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
48	GPRS + Wi-Fi 5 GHz Ant.1	Yes	Yes	N/A	Yes	*Pre-installed VOIP applications are considered.
49	GPRS + Wi-Fi 5 GHz Ant.2	Yes	Yes	N/A	Yes	*Pre-installed VOIP applications are considered.
50	GPRS + Wi-Fi 5 GHz MIMO	Yes	Yes	N/A	Yes	*Pre-installed VOIP applications are considered.
51	GPRS + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
52	GPRS + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
53	GPRS + Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
54	GPRS + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
55	GPRS + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
56	GPRS + Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	*Pre-installed VOIP applications are considered. ^a Bluetooth Tethering is considered.
57	Wi-Fi 2.4 GHz Ant.1 + Wi-Fi 2.4 GHz Ant.2	Yes ^a	Yes	Yes	Yes	
58	Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
59	Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
60	Bluetooth 2.4 GHz Ant.1 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
61	Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.1	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
62	Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz Ant.2	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.
63	Bluetooth 2.4 GHz Ant.2 + Wi-Fi 5 GHz MIMO	Yes ^a	Yes	N/A	Yes	^a Bluetooth Tethering is considered.

Notes:

1. Wi-Fi 2.4GHz is supported Hotspot.
2. Wi-Fi 5 GHz is not supported Hotspot.
3. LTE, WCDMA, GPRS is supported Hotspot.
4. VoIP is supported in LTE, WCDMA, GSM.
5. GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.

12.4 Head SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.274	0.289	0.798	0.813	1.087
		Right Touch	0.431	0.077	0.141	0.508	0.572	0.649
		Left Tilt	0.242	0.065	0.030	0.307	0.272	0.337
		Right Tilt	0.268	0.024	0.039	0.292	0.307	0.331
	GPRS 850	Left Touch	0.525	0.274	0.289	0.799	0.814	1.089
		Right Touch	0.452	0.077	0.141	0.529	0.593	0.670
		Left Tilt	0.253	0.065	0.030	0.318	0.283	0.348
		Right Tilt	0.294	0.024	0.039	0.318	0.333	0.357
	GSM 1900	Left Touch	0.131	0.274	0.289	0.405	0.420	0.695
		Right Touch	0.107	0.077	0.141	0.184	0.248	0.325
		Left Tilt	0.029	0.065	0.030	0.094	0.059	0.124
		Right Tilt	0.048	0.024	0.039	0.072	0.087	0.111
	GPRS 1900	Left Touch	0.156	0.274	0.289	0.430	0.446	0.720
		Right Touch	0.107	0.077	0.141	0.184	0.248	0.325
		Left Tilt	0.031	0.065	0.030	0.097	0.061	0.127
		Right Tilt	0.053	0.024	0.039	0.077	0.092	0.116
	WCDMA 850	Left Touch	0.505	0.274	0.289	0.779	0.794	1.068
		Right Touch	0.431	0.077	0.141	0.507	0.572	0.648
		Left Tilt	0.259	0.065	0.030	0.325	0.289	0.355
		Right Tilt	0.231	0.024	0.039	0.256	0.270	0.294
	LTE Band 12	Left Touch	0.276	0.274	0.289	0.551	0.566	0.540
		Right Touch	0.225	0.077	0.141	0.301	0.366	0.442
		Left Tilt	0.163	0.065	0.030	0.229	0.193	0.259
		Right Tilt	0.148	0.024	0.039	0.172	0.187	0.211

Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.274	0.019	0.798	0.543	0.817
		Right Touch	0.431	0.077	0.146	0.508	0.577	0.654
		Left Tilt	0.242	0.065	0.045	0.307	0.287	0.352
		Right Tilt	0.268	0.024	0.049	0.292	0.317	0.341
	GPRS 850	Left Touch	0.525	0.274	0.019	0.799	0.544	0.818
		Right Touch	0.452	0.077	0.146	0.529	0.598	0.675
		Left Tilt	0.253	0.065	0.045	0.318	0.298	0.363
		Right Tilt	0.294	0.024	0.049	0.318	0.343	0.367
	GSM 1900	Left Touch	0.131	0.274	0.019	0.405	0.150	0.424
		Right Touch	0.107	0.077	0.146	0.184	0.253	0.330
		Left Tilt	0.029	0.065	0.045	0.094	0.074	0.139
		Right Tilt	0.048	0.024	0.049	0.072	0.097	0.121
	GPRS 1900	Left Touch	0.156	0.274	0.019	0.430	0.175	0.449
		Right Touch	0.107	0.077	0.146	0.184	0.253	0.330
		Left Tilt	0.031	0.065	0.045	0.097	0.076	0.142
		Right Tilt	0.053	0.024	0.049	0.077	0.102	0.126
	WCDMA 850	Left Touch	0.505	0.274	0.019	0.779	0.524	0.798
		Right Touch	0.431	0.077	0.146	0.507	0.577	0.653
		Left Tilt	0.259	0.065	0.045	0.325	0.304	0.370
		Right Tilt	0.231	0.024	0.049	0.255	0.280	0.304
	LTE Band 12	Left Touch	0.276	0.274	0.019	0.551	0.295	0.570
		Right Touch	0.225	0.077	0.146	0.301	0.371	0.447
		Left Tilt	0.163	0.065	0.045	0.229	0.208	0.274
		Right Tilt	0.148	0.024	0.049	0.172	0.197	0.221

Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.289	0.813	0.524	0.289	0.813
		Right Touch	0.431	0.141	0.572	0.431	0.141	0.572
		Left Tilt	0.242	0.030	0.272	0.242	0.030	0.272
		Right Tilt	0.268	0.039	0.307	0.268	0.039	0.307
	GPRS 850	Left Touch	0.525	0.289	0.814	0.525	0.289	0.814
		Right Touch	0.452	0.141	0.593	0.452	0.141	0.593
		Left Tilt	0.253	0.030	0.283	0.253	0.030	0.283
		Right Tilt	0.294	0.039	0.333	0.294	0.039	0.333
	GSM 1900	Left Touch	0.131	0.289	0.420	0.131	0.289	0.420
		Right Touch	0.107	0.141	0.248	0.107	0.141	0.248
		Left Tilt	0.029	0.030	0.059	0.029	0.030	0.059
		Right Tilt	0.048	0.039	0.087	0.048	0.039	0.087
	GPRS 1900	Left Touch	0.156	0.289	0.446	0.156	0.289	0.446
		Right Touch	0.107	0.141	0.248	0.107	0.141	0.248
		Left Tilt	0.031	0.030	0.061	0.031	0.030	0.061
		Right Tilt	0.053	0.039	0.092	0.053	0.039	0.092
	WCDMA 850	Left Touch	0.505	0.289	0.794	0.505	0.289	0.794
		Right Touch	0.431	0.141	0.572	0.431	0.141	0.572
		Left Tilt	0.259	0.030	0.289	0.259	0.030	0.289
		Right Tilt	0.231	0.039	0.231	0.231	0.039	0.270
	LTE Band 12	Left Touch	0.276	0.289	0.566	0.276	0.289	0.566
		Right Touch	0.225	0.141	0.366	0.225	0.141	0.366
		Left Tilt	0.163	0.030	0.193	0.163	0.030	0.193
		Right Tilt	0.148	0.039	0.187	0.148	0.039	0.187

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.274	0.276	0.798	0.799	1.073
		Right Touch	0.431	0.077	0.168	0.508	0.509	0.676
		Left Tilt	0.242	0.065	0.194	0.307	0.436	0.501
		Right Tilt	0.268	0.024	0.113	0.292	0.381	0.405
	GPRS 850	Left Touch	0.525	0.274	0.276	0.799	0.801	1.075
		Right Touch	0.452	0.077	0.168	0.529	0.620	0.697
		Left Tilt	0.253	0.065	0.194	0.318	0.447	0.512
		Right Tilt	0.294	0.024	0.113	0.318	0.407	0.431
	GSM 1900	Left Touch	0.131	0.274	0.276	0.405	0.407	0.681
		Right Touch	0.107	0.077	0.168	0.184	0.275	0.352
		Left Tilt	0.029	0.065	0.194	0.094	0.223	0.289
		Right Tilt	0.048	0.024	0.113	0.072	0.161	0.184
	GPRS 1900	Left Touch	0.156	0.274	0.276	0.430	0.432	0.706
		Right Touch	0.107	0.077	0.168	0.184	0.275	0.352
		Left Tilt	0.031	0.065	0.194	0.097	0.226	0.291
		Right Tilt	0.053	0.024	0.113	0.077	0.166	0.190
	WCDMA 850	Left Touch	0.505	0.274	0.276	0.779	0.780	1.054
		Right Touch	0.431	0.077	0.168	0.507	0.599	0.675
		Left Tilt	0.259	0.065	0.194	0.325	0.454	0.519
		Right Tilt	0.231	0.024	0.113	0.255	0.344	0.368
	LTE Band 12	Left Touch	0.276	0.274	0.276	0.551	0.552	0.826
		Right Touch	0.225	0.077	0.168	0.301	0.393	0.469
		Left Tilt	0.163	0.065	0.194	0.229	0.358	0.423
		Right Tilt	0.148	0.024	0.113	0.172	0.261	0.285

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.274	0.138	0.798	0.662	0.936
		Right Touch	0.431	0.077	0.342	0.508	0.773	0.850
		Left Tilt	0.242	0.065	0.054	0.307	0.295	0.360
		Right Tilt	0.268	0.024	0.103	0.292	0.371	0.395
	GPRS 850	Left Touch	0.525	0.274	0.138	0.799	0.664	0.938
		Right Touch	0.452	0.077	0.342	0.529	0.794	0.870
		Left Tilt	0.253	0.065	0.054	0.318	0.306	0.372
		Right Tilt	0.294	0.024	0.103	0.318	0.397	0.421
	GSM 1900	Left Touch	0.131	0.274	0.138	0.405	0.270	0.544
		Right Touch	0.107	0.077	0.342	0.184	0.489	0.525
		Left Tilt	0.029	0.065	0.054	0.094	0.083	0.148
		Right Tilt	0.048	0.024	0.103	0.072	0.150	0.174
	GPRS 1900	Left Touch	0.156	0.274	0.138	0.430	0.295	0.569
		Right Touch	0.107	0.077	0.342	0.184	0.449	0.525
		Left Tilt	0.031	0.065	0.054	0.097	0.085	0.150
		Right Tilt	0.053	0.024	0.103	0.077	0.156	0.180
	WCDMA 850	Left Touch	0.505	0.274	0.138	0.779	0.643	0.917
		Right Touch	0.431	0.077	0.342	0.507	0.773	0.849
		Left Tilt	0.259	0.065	0.054	0.325	0.333	0.378
		Right Tilt	0.231	0.024	0.103	0.255	0.334	0.358
	LTE Band 12	Left Touch	0.276	0.274	0.138	0.551	0.415	0.689
		Right Touch	0.225	0.077	0.342	0.301	0.566	0.643
		Left Tilt	0.163	0.065	0.054	0.229	0.217	0.282
		Right Tilt	0.148	0.024	0.103	0.172	0.251	0.275

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.274	0.402	0.798	0.925	1.199
		Right Touch	0.431	0.077	0.252	0.508	0.683	0.760
		Left Tilt	0.242	0.065	0.202	0.307	0.444	0.509
		Right Tilt	0.268	0.024	0.076	0.292	0.344	0.368
	GPRS 850	Left Touch	0.525	0.274	0.402	0.799	0.927	1.201
		Right Touch	0.452	0.077	0.252	0.529	0.704	0.781
		Left Tilt	0.253	0.065	0.202	0.318	0.455	0.520
		Right Tilt	0.294	0.024	0.076	0.318	0.371	0.395
	GSM 1900	Left Touch	0.131	0.274	0.402	0.405	0.533	0.807
		Right Touch	0.107	0.077	0.252	0.184	0.359	0.436
		Left Tilt	0.029	0.065	0.202	0.094	0.231	0.297
		Right Tilt	0.048	0.024	0.076	0.072	0.124	0.148
	GPRS 1900	Left Touch	0.156	0.274	0.402	0.430	0.558	0.832
		Right Touch	0.107	0.077	0.252	0.184	0.359	0.436
		Left Tilt	0.031	0.065	0.202	0.097	0.234	0.299
		Right Tilt	0.053	0.024	0.076	0.077	0.129	0.153
	WCDMA 850	Left Touch	0.505	0.274	0.402	0.779	0.906	1.180
		Right Touch	0.431	0.077	0.252	0.507	0.683	0.759
		Left Tilt	0.259	0.065	0.202	0.325	0.307	0.527
		Right Tilt	0.231	0.024	0.076	0.255	0.307	0.331
	LTE Band 12	Left Touch	0.276	0.274	0.402	0.551	0.678	0.852
		Right Touch	0.225	0.077	0.252	0.301	0.477	0.553
		Left Tilt	0.163	0.065	0.202	0.229	0.365	0.431
		Right Tilt	0.148	0.024	0.076	0.172	0.224	0.248

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.043	0.289	0.566	0.813	0.855
		Right Touch	0.431	0.111	0.141	0.543	0.572	0.684
		Left Tilt	0.242	0.025	0.030	0.266	0.272	0.296
		Right Tilt	0.268	0.051	0.039	0.319	0.307	0.358
	GPRS 850	Left Touch	0.525	0.043	0.289	0.568	0.814	0.857
		Right Touch	0.452	0.111	0.141	0.564	0.593	0.705
		Left Tilt	0.253	0.025	0.030	0.278	0.283	0.308
		Right Tilt	0.294	0.051	0.039	0.346	0.333	0.385
	GSM 1900	Left Touch	0.131	0.043	0.289	0.174	0.420	0.463
		Right Touch	0.107	0.111	0.141	0.219	0.248	0.360
		Left Tilt	0.029	0.025	0.030	0.054	0.059	0.084
		Right Tilt	0.048	0.051	0.039	0.099	0.087	0.138
	GPRS 1900	Left Touch	0.156	0.043	0.289	0.199	0.446	0.488
		Right Touch	0.107	0.111	0.141	0.218	0.248	0.359
		Left Tilt	0.031	0.025	0.030	0.056	0.061	0.086
		Right Tilt	0.053	0.051	0.039	0.104	0.092	0.143
	WCDMA 850	Left Touch	0.505	0.043	0.289	0.547	0.794	0.836
		Right Touch	0.431	0.111	0.141	0.542	0.572	0.683
		Left Tilt	0.259	0.025	0.030	0.284	0.289	0.314
		Right Tilt	0.231	0.051	0.039	0.283	0.270	0.322
	LTE Band 12	Left Touch	0.276	0.043	0.289	0.319	0.566	0.608
		Right Touch	0.225	0.111	0.141	0.336	0.366	0.477
		Left Tilt	0.163	0.025	0.030	0.188	0.193	0.218
		Right Tilt	0.148	0.051	0.039	0.199	0.187	0.238

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.043	0.019	0.566	0.543	0.585
		Right Touch	0.431	0.111	0.146	0.543	0.577	0.689
		Left Tilt	0.242	0.025	0.045	0.266	0.287	0.311
		Right Tilt	0.268	0.051	0.049	0.319	0.317	0.368
	GPRS 850	Left Touch	0.525	0.043	0.019	0.568	0.544	0.587
		Right Touch	0.452	0.111	0.146	0.564	0.598	0.710
		Left Tilt	0.253	0.025	0.045	0.278	0.298	0.323
		Right Tilt	0.294	0.051	0.049	0.346	0.343	0.395
	GSM 1900	Left Touch	0.131	0.043	0.019	0.174	0.150	0.193
		Right Touch	0.107	0.111	0.146	0.219	0.253	0.365
		Left Tilt	0.029	0.025	0.045	0.054	0.074	0.099
		Right Tilt	0.048	0.051	0.049	0.099	0.097	0.148
	GPRS 1900	Left Touch	0.156	0.043	0.019	0.199	0.175	0.218
		Right Touch	0.107	0.111	0.146	0.218	0.253	0.364
		Left Tilt	0.031	0.025	0.045	0.056	0.076	0.101
		Right Tilt	0.053	0.051	0.049	0.104	0.102	0.153
	WCDMA 850	Left Touch	0.505	0.043	0.019	0.547	0.524	0.566
		Right Touch	0.431	0.111	0.146	0.542	0.577	0.688
		Left Tilt	0.259	0.025	0.045	0.284	0.304	0.329
		Right Tilt	0.231	0.051	0.049	0.283	0.280	0.332
	LTE Band 12	Left Touch	0.276	0.043	0.019	0.319	0.295	0.338
		Right Touch	0.225	0.111	0.146	0.336	0.371	0.482
		Left Tilt	0.163	0.025	0.045	0.188	0.208	0.233
		Right Tilt	0.148	0.051	0.049	0.199	0.197	0.248

Table 12.4.9 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	1+2	ΣSAR (W/kg)	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.043	0.245	0.566	0.789	0.811
		Right Touch	0.431	0.111	0.193	0.543	0.624	0.736
		Left Tilt	0.242	0.025	0.047	0.266	0.289	0.313
	GPRS 850	Right Tilt	0.268	0.051	0.091	0.319	0.359	0.410
		Left Touch	0.525	0.043	0.245	0.568	0.770	0.813
		Right Touch	0.452	0.111	0.193	0.564	0.645	0.757
	GSM 1900	Left Tilt	0.253	0.025	0.047	0.278	0.300	0.325
		Right Tilt	0.294	0.051	0.091	0.346	0.385	0.437
	GPRS 1900	Left Touch	0.131	0.043	0.245	0.174	0.376	0.419
		Right Touch	0.107	0.111	0.193	0.219	0.300	0.412
	WCDMA 850	Left Tilt	0.029	0.025	0.047	0.054	0.076	0.101
		Right Tilt	0.048	0.051	0.091	0.099	0.139	0.190
	LTE Band 12	Left Touch	0.156	0.043	0.245	0.199	0.401	0.444
		Right Touch	0.107	0.111	0.193	0.218	0.300	0.411
		Left Tilt	0.031	0.025	0.047	0.056	0.078	0.103
		Right Tilt	0.053	0.051	0.091	0.104	0.144	0.195
		Left Touch	0.505	0.043	0.245	0.547	0.750	0.792
		Right Touch	0.431	0.111	0.193	0.542	0.624	0.735
		Left Tilt	0.259	0.025	0.047	0.284	0.306	0.331
		Right Tilt	0.231	0.051	0.091	0.283	0.322	0.374
		Left Touch	0.276	0.043	0.245	0.319	0.521	0.564
		Right Touch	0.225	0.111	0.193	0.336	0.418	0.529
		Left Tilt	0.163	0.025	0.047	0.188	0.210	0.235
		Right Tilt	0.148	0.051	0.091	0.199	0.239	0.290

Table 12.4.10 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	1+2	ΣSAR (W/kg)	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.043	0.276	0.566	0.799	0.842
		Right Touch	0.431	0.111	0.168	0.543	0.599	0.711
		Left Tilt	0.242	0.025	0.194	0.266	0.436	0.461
	GPRS 850	Right Tilt	0.268	0.051	0.113	0.319	0.381	0.432
		Left Touch	0.525	0.043	0.276	0.568	0.801	0.843
		Right Touch	0.452	0.111	0.168	0.564	0.620	0.732
	GSM 1900	Left Tilt	0.253	0.025	0.194	0.278	0.447	0.472
		Right Tilt	0.294	0.051	0.113	0.346	0.407	0.459
	GPRS 1900	Left Touch	0.131	0.043	0.276	0.174	0.407	0.449
		Right Touch	0.107	0.111	0.168	0.219	0.275	0.387
	WCDMA 850	Left Tilt	0.029	0.025	0.194	0.054	0.223	0.248
		Right Tilt	0.048	0.051	0.113	0.099	0.161	0.212
	LTE Band 12	Left Touch	0.156	0.043	0.276	0.199	0.432	0.474
		Right Touch	0.107	0.111	0.168	0.218	0.275	0.386
		Left Tilt	0.031	0.025	0.194	0.056	0.226	0.251
		Right Tilt	0.053	0.051	0.113	0.104	0.166	0.217
		Left Touch	0.505	0.043	0.276	0.547	0.780	0.823
		Right Touch	0.431	0.111	0.168	0.542	0.599	0.710
		Left Tilt	0.259	0.025	0.194	0.284	0.344	0.473
		Right Tilt	0.231	0.051	0.113	0.283	0.344	0.396
		Left Touch	0.276	0.043	0.276	0.319	0.552	0.595
		Right Touch	0.225	0.111	0.168	0.336	0.393	0.504
		Left Tilt	0.163	0.025	0.194	0.188	0.358	0.383
		Right Tilt	0.148	0.051	0.113	0.199	0.261	0.312

Table 12.4.11 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	1+2	ΣSAR (W/kg)	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.043	0.138	0.566	0.662	0.704
		Right Touch	0.431	0.111	0.342	0.543	0.773	0.884
		Left Tilt	0.242	0.025	0.054	0.266	0.295	0.320
	GPRS 850	Right Tilt	0.268	0.051	0.103	0.319	0.371	0.422
		Left Touch	0.525	0.043	0.138	0.568	0.664	0.706
		Right Touch	0.452	0.111	0.342	0.564	0.794	0.905
	GSM 1900	Left Tilt	0.253	0.025	0.054	0.278	0.306	0.331
		Right Tilt	0.294	0.051	0.103	0.346	0.397	0.449
	GPRS 1900	Left Touch	0.131	0.043	0.138	0.174	0.270	0.312
		Right Touch	0.107	0.111	0.342	0.219	0.459	0.560
	WCDMA 850	Left Tilt	0.029	0.025	0.054	0.054	0.083	0.108
		Right Tilt	0.048	0.051	0.103	0.099	0.150	0.202
	LTE Band 12	Left Touch	0.156	0.043	0.138	0.199	0.295	0.337
		Right Touch	0.107	0.111	0.342	0.218	0.449	0.560
		Left Tilt	0.031	0.025	0.054	0.056	0.085	0.110
		Right Tilt	0.053	0.051	0.103	0.104	0.156	0.207
		Left Touch	0.505	0.043	0.138	0.547	0.643	0.686
		Right Touch	0.431	0.111	0.342	0.542	0.773	0.884
		Left Tilt	0.259	0.025	0.054	0.284	0.333	0.338
		Right Tilt	0.231	0.051	0.103	0.283	0.334	0.385
		Left Touch	0.276	0.043	0.138	0.319	0.415	0.457
		Right Touch	0.225	0.111	0.342	0.336	0.566	0.678
		Left Tilt	0.163	0.025	0.054	0.188	0.217	0.242
		Right Tilt	0.148	0.051	0.103	0.199	0.251	0.302

Table 12.4.12 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	1+2	ΣSAR (W/kg)	1+2+3
Head SAR	GSM 850	Left Touch	0.524	0.043	0.402	0.566	0.925	0.968
		Right Touch	0.431	0.111	0.252	0.543	0.683	0.766
		Left Tilt	0.242	0.025	0.202	0.266	0.444	0.469
	GPRS 850	Right Tilt	0.268	0.051	0.076	0.319	0.344	0.395
		Left Touch	0.525	0.043	0.402	0.568	0.927	0.969
		Right Touch	0.452	0.111	0.252	0.564	0.704	0.816
	GSM 1900	Left Tilt	0.253	0.025	0.202	0.278	0.455	0.480
		Right Tilt	0.294	0.051	0.076	0.346	0.371	0.422
	GPRS 1900	Left Touch	0.131	0.043	0.402	0.174	0.533	0.575
		Right Touch	0.107	0.111	0.252	0.219	0.359	0.471
	WCDMA 850	Left Tilt	0.029	0.025	0.202	0.054	0.231	0.266
		Right Tilt	0.048	0.051	0.076	0.099	0.124	0.175
	LTE Band 12	Left Touch	0.156	0.043	0.402	0.199	0.558	0.600
		Right Touch	0.107	0.111	0.252	0.218	0.359	0.470
		Left Tilt	0.031	0.025	0.202	0.056	0.234	0.259
		Right Tilt	0.053	0.051	0.076	0.104	0.129	0.180
		Left Touch	0.505	0.043	0.402	0.547	0.906	0.949
		Right Touch	0.431	0.111	0.252	0.542	0.683	0.794
		Left Tilt	0.259	0.025	0.202	0.284	0.363	0.486
		Right Tilt	0.231	0.051	0.076	0.283	0.307	0.359
		Left Touch	0.276	0.043	0.402	0.319	0.678	0.721
		Right Touch	0.225	0.111	0.252	0.336	0.477	0.588
		Left Tilt	0.163	0.025	0.202	0.188	0.365	0.390
		Right Tilt	0.148	0.051	0.076	0.199	0.224	0.275

Table 12.4.13 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
Head SAR	GSM 850	Left Touch	0.524	0.361	0.884
		Right Touch	0.431	0.156	0.587
		Left Tilt	0.242	0.100	0.341
		Right Tilt	0.268	0.042	0.310
	GPRS 850	Left Touch	0.525	0.361	0.886
		Right Touch	0.452	0.156	0.608
		Left Tilt	0.253	0.100	0.352
		Right Tilt	0.294	0.042	0.336
	GSM 1900	Left Touch	0.131	0.361	0.492
		Right Touch	0.107	0.156	0.263
		Left Tilt	0.029	0.100	0.129
		Right Tilt	0.048	0.042	0.090
	GPRS 1900	Left Touch	0.156	0.361	0.517
		Right Touch	0.107	0.156	0.263
		Left Tilt	0.031	0.100	0.131
		Right Tilt	0.053	0.042	0.095
	WCDMA 850	Left Touch	0.505	0.361	0.865
		Right Touch	0.431	0.156	0.586
		Left Tilt	0.259	0.100	0.359
		Right Tilt	0.231	0.042	0.273
	LTE Band 12	Left Touch	0.276	0.361	0.637
		Right Touch	0.225	0.156	0.380
		Left Tilt	0.163	0.100	0.263
		Right Tilt	0.148	0.042	0.190

Table 12.4.14 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
Head SAR	GSM 850	Left Touch	0.524	0.077	0.601
		Right Touch	0.431	0.149	0.580
		Left Tilt	0.242	0.026	0.267
		Right Tilt	0.268	0.060	0.328
	GPRS 850	Left Touch	0.525	0.077	0.603
		Right Touch	0.452	0.149	0.601
		Left Tilt	0.253	0.026	0.279
		Right Tilt	0.294	0.060	0.354
	GSM 1900	Left Touch	0.131	0.077	0.208
		Right Touch	0.107	0.149	0.256
		Left Tilt	0.029	0.026	0.055
		Right Tilt	0.048	0.060	0.107
	GPRS 1900	Left Touch	0.156	0.077	0.234
		Right Touch	0.107	0.149	0.256
		Left Tilt	0.031	0.026	0.057
		Right Tilt	0.053	0.060	0.112
	WCDMA 850	Left Touch	0.505	0.077	0.582
		Right Touch	0.431	0.149	0.580
		Left Tilt	0.259	0.026	0.285
		Right Tilt	0.231	0.060	0.291
	LTE Band 12	Left Touch	0.276	0.077	0.354
		Right Touch	0.225	0.149	0.374
		Left Tilt	0.163	0.026	0.189
		Right Tilt	0.148	0.060	0.208

Table 12.4.15 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
Head SAR	GSM 850	Left Touch	0.524	0.443	0.966
		Right Touch	0.431	0.164	0.595
		Left Tilt	0.242	0.086	0.327
		Right Tilt	0.268	0.062	0.330
	GPRS 850	Left Touch	0.525	0.443	0.968
		Right Touch	0.452	0.164	0.616
		Left Tilt	0.253	0.086	0.339
		Right Tilt	0.294	0.062	0.356
	GSM 1900	Left Touch	0.131	0.443	0.574
		Right Touch	0.107	0.164	0.271
		Left Tilt	0.029	0.086	0.115
		Right Tilt	0.048	0.062	0.109
	GPRS 1900	Left Touch	0.156	0.443	0.599
		Right Touch	0.107	0.164	0.271
		Left Tilt	0.031	0.086	0.117
		Right Tilt	0.053	0.062	0.115
	WCDMA 850	Left Touch	0.505	0.443	0.947
		Right Touch	0.431	0.164	0.594
		Left Tilt	0.259	0.086	0.345
		Right Tilt	0.231	0.062	0.293
	LTE Band 12	Left Touch	0.276	0.443	0.719
		Right Touch	0.225	0.164	0.388
		Left Tilt	0.163	0.086	0.249
		Right Tilt	0.148	0.062	0.210

Table 12.4.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
Head SAR	GSM 850	Left Touch	0.524	0.289	0.813
		Right Touch	0.431	0.141	0.572
		Left Tilt	0.242	0.030	0.272
		Right Tilt	0.268	0.039	0.307
	GPRS 850	Left Touch	0.525	0.289	0.814
		Right Touch	0.452	0.141	0.593
		Left Tilt	0.253	0.030	0.283
		Right Tilt	0.294	0.039	0.333
	GSM 1900	Left Touch	0.131	0.289	0.420
		Right Touch	0.107	0.141	0.248
		Left Tilt	0.029	0.039	0.069
		Right Tilt	0.048	0.039	0.087
	GPRS 1900	Left Touch	0.156	0.289	0.446
		Right Touch	0.107	0.141	0.248
		Left Tilt	0.031	0.030	0.061
		Right Tilt	0.053	0.039	0.092
	WCDMA 850	Left Touch	0.505	0.289	0.794
		Right Touch	0.431	0.141	0.572
		Left Tilt	0.259	0.030	0.289
		Right Tilt	0.231	0.039	0.270
	LTE Band 12	Left Touch	0.276	0.289	0.566
		Right Touch	0.225	0.141	0.366
		Left Tilt	0.163	0.030	0.193
		Right Tilt	0.148	0.039	0.187

Table 12.4.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.524	0.019	0.543
		Right Touch	0.431	0.146	0.577
		Left Tilt	0.242	0.045	0.287
		Right Tilt	0.268	0.049	0.317
	GPRS 850	Left Touch	0.525	0.019	0.544
		Right Touch	0.452	0.146	0.598
		Left Tilt	0.253	0.045	0.298
		Right Tilt	0.294	0.049	0.343
	GSM 1900	Left Touch	0.131	0.019	0.150
		Right Touch	0.107	0.146	0.253
		Left Tilt	0.029	0.045	0.074
		Right Tilt	0.048	0.049	0.097
	GPRS 1900	Left Touch	0.156	0.019	0.175
		Right Touch	0.107	0.146	0.253
		Left Tilt	0.031	0.045	0.076
		Right Tilt	0.053	0.049	0.102
	WCDMA 850	Left Touch	0.505	0.019	0.524
		Right Touch	0.431	0.146	0.577
		Left Tilt	0.259	0.045	0.304
		Right Tilt	0.231	0.049	0.280
	LTE Band 12	Left Touch	0.276	0.019	0.295
		Right Touch	0.225	0.146	0.371
		Left Tilt	0.163	0.045	0.208
		Right Tilt	0.148	0.049	0.197

Table 12.4.18 Simultaneous Transmission Scenario: 2G/3G/4G + 5.3 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.524	0.245	0.769
		Right Touch	0.431	0.193	0.624
		Left Tilt	0.242	0.047	0.289
		Right Tilt	0.268	0.091	0.359
	GPRS 850	Left Touch	0.525	0.245	0.770
		Right Touch	0.452	0.193	0.645
		Left Tilt	0.253	0.047	0.300
		Right Tilt	0.294	0.091	0.385
	GSM 1900	Left Touch	0.131	0.245	0.376
		Right Touch	0.107	0.193	0.300
		Left Tilt	0.029	0.047	0.076
		Right Tilt	0.048	0.091	0.139
	GPRS 1900	Left Touch	0.156	0.245	0.401
		Right Touch	0.107	0.193	0.300
		Left Tilt	0.031	0.047	0.078
		Right Tilt	0.053	0.091	0.144
	WCDMA 850	Left Touch	0.505	0.245	0.750
		Right Touch	0.431	0.193	0.624
		Left Tilt	0.259	0.047	0.306
		Right Tilt	0.231	0.091	0.322
	LTE Band 12	Left Touch	0.276	0.245	0.521
		Right Touch	0.225	0.193	0.418
		Left Tilt	0.163	0.047	0.210
		Right Tilt	0.148	0.091	0.239

Table 12.4.19 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.524	0.276	0.799
		Right Touch	0.431	0.168	0.599
		Left Tilt	0.242	0.194	0.436
		Right Tilt	0.268	0.113	0.381
	GPRS 850	Left Touch	0.525	0.276	0.801
		Right Touch	0.452	0.168	0.620
		Left Tilt	0.253	0.194	0.447
		Right Tilt	0.294	0.113	0.407
	GSM 1900	Left Touch	0.131	0.276	0.407
		Right Touch	0.107	0.168	0.275
		Left Tilt	0.029	0.194	0.223
		Right Tilt	0.048	0.113	0.161
	GPRS 1900	Left Touch	0.156	0.276	0.432
		Right Touch	0.107	0.168	0.275
		Left Tilt	0.031	0.194	0.226
		Right Tilt	0.053	0.113	0.166
	WCDMA 850	Left Touch	0.505	0.276	0.780
		Right Touch	0.431	0.168	0.599
		Left Tilt	0.259	0.194	0.454
		Right Tilt	0.231	0.113	0.344
	LTE Band 12	Left Touch	0.276	0.276	0.552
		Right Touch	0.225	0.168	0.393
		Left Tilt	0.163	0.194	0.358
		Right Tilt	0.148	0.113	0.261

Table 12.4.20 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.524	0.138	0.662
		Right Touch	0.431	0.342	0.773
		Left Tilt	0.242	0.054	0.296
		Right Tilt	0.268	0.103	0.371
	GPRS 850	Left Touch	0.525	0.138	0.664
		Right Touch	0.452	0.342	0.794
		Left Tilt	0.253	0.054	0.306
		Right Tilt	0.294	0.103	0.397
	GSM 1900	Left Touch	0.131	0.138	0.270
		Right Touch	0.107	0.342	0.449
		Left Tilt	0.029	0.054	0.083
		Right Tilt	0.048	0.103	0.150
	GPRS 1900	Left Touch	0.156	0.138	0.295
		Right Touch	0.107	0.342	0.449
		Left Tilt	0.031	0.054	0.085
		Right Tilt	0.053	0.103	0.156
	WCDMA 850	Left Touch	0.505	0.138	0.643
		Right Touch	0.431	0.342	0.773
		Left Tilt	0.259	0.054	0.313
		Right Tilt	0.231	0.103	0.334
	LTE Band 12	Left Touch	0.276	0.138	0.415
		Right Touch	0.225	0.342	0.566
		Left Tilt	0.163	0.054	0.217
		Right Tilt	0.148	0.103	0.251

Table 12.4.21 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.524	0.402	0.925
		Right Touch	0.431	0.252	0.683
		Left Tilt	0.242	0.202	0.444
		Right Tilt	0.268	0.076	0.344
	GPRS 850	Left Touch	0.525	0.402	0.927
		Right Touch	0.452	0.252	0.704
		Left Tilt	0.253	0.202	0.455
		Right Tilt	0.294	0.076	0.371
	GSM 1900	Left Touch	0.131	0.402	0.533
		Right Touch	0.107	0.252	0.359
		Left Tilt	0.029	0.202	0.231
		Right Tilt	0.048	0.076	0.124
	GPRS 1900	Left Touch	0.156	0.402	0.558
		Right Touch	0.107	0.252	0.359
		Left Tilt	0.031	0.202	0.234
		Right Tilt	0.053	0.076	0.129
	WCDMA 850	Left Touch	0.505	0.402	0.906
		Right Touch	0.431	0.252	0.683
		Left Tilt	0.259	0.202	0.461
		Right Tilt	0.231	0.076	0.307
	LTE Band 12	Left Touch	0.276	0.402	0.678
		Right Touch	0.225	0.252	0.477
		Left Tilt	0.163	0.202	0.365
		Right Tilt	0.148	0.076	0.224

Table 12.4.22 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.524	0.274	0.798
		Right Touch	0.431	0.077	0.508
		Left Tilt	0.242	0.065	0.307
		Right Tilt	0.268	0.024	0.292
	GPRS 850	Left Touch	0.525	0.274	0.799
		Right Touch	0.452	0.077	0.529
		Left Tilt	0.253	0.065	0.318
		Right Tilt	0.294	0.024	0.318
	GSM 1900	Left Touch	0.131	0.274	0.405
		Right Touch	0.107	0.077	0.184
		Left Tilt	0.029	0.065	0.094
		Right Tilt	0.048	0.024	0.072
	GPRS 1900	Left Touch	0.156	0.274	0.430
		Right Touch	0.107	0.077	0.184
		Left Tilt	0.031	0.065	0.097
		Right Tilt	0.053	0.024	0.077
	WCDMA 850	Left Touch	0.505	0.274	0.779
		Right Touch	0.431	0.077	0.507
		Left Tilt	0.259	0.065	0.325
		Right Tilt	0.231	0.024	0.255
	LTE Band 12	Left Touch	0.276	0.274	0.551
		Right Touch	0.225	0.077	0.301
		Left Tilt	0.163	0.065	0.229
		Right Tilt	0.148	0.024	0.172

Table 12.4.23 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN Ant.1	Left Touch	0.274	0.289	0.564
		Right Touch	0.077	0.141	0.218
		Left Tilt	0.065	0.030	0.095
		Right Tilt	0.024	0.039	0.063
	5.6G W-LAN Ant.1	Left Touch	0.274	0.276	0.550
		Right Touch	0.077	0.168	0.245
		Left Tilt	0.065	0.194	0.260
		Right Tilt	0.024	0.113	0.137

Table 12.4.24 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN Ant.2	Left Touch	0.274	0.019	0.293
		Right Touch	0.077	0.145	0.221
		Left Tilt	0.065	0.045	0.110
		Right Tilt	0.024	0.049	0.073
	5.6G W-LAN Ant.2	Left Touch	0.274	0.138	0.413
		Right Touch	0.077	0.342	0.418
		Left Tilt	0.065	0.054	0.119
		Right Tilt	0.024	0.103	0.127

Table 12.4.25 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN MIMO	Left Touch	0.274	0.245	0.519
		Right Touch	0.077	0.193	0.270
		Left Tilt	0.065	0.047	0.112
		Right Tilt	0.024	0.091	0.115
	5.6G W-LAN MIMO	Left Touch	0.274	0.402	0.676
		Right Touch	0.077	0.252	0.329
		Left Tilt	0.065	0.202	0.268
		Right Tilt	0.024	0.076	0.100

Table 12.4.26 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
Head SAR	GSM 850	1	1	2	1+2
		Left Touch	0.524	0.043	0.566
		Right Touch	0.431	0.111	0.543
		Left Tilt	0.242	0.025	0.266
	GPRS 850	Right Tilt	0.268	0.051	0.319
		Left Touch	0.525	0.043	0.568
		Right Touch	0.452	0.111	0.564
		Left Tilt	0.253	0.025	0.278
	GSM 1900	Right Tilt	0.294	0.051	0.346
		Left Touch	0.131	0.043	0.174
		Right Touch	0.107	0.111	0.219
		Left Tilt	0.029	0.025	0.054
	GPRS 1900	Right Tilt	0.048	0.051	0.099
		Left Touch	0.156	0.043	0.199
		Right Touch	0.107	0.111	0.218
		Left Tilt	0.031	0.025	0.056
	WCDMA 850	Right Tilt	0.053	0.051	0.104
		Left Touch	0.505	0.043	0.547
		Right Touch	0.431	0.111	0.542
		Left Tilt	0.259	0.025	0.284
	LTE Band 12	Right Tilt	0.231	0.051	0.283
		Left Touch	0.276	0.043	0.319
		Right Touch	0.225	0.111	0.336
		Left Tilt	0.163	0.025	0.188
		Right Tilt	0.148	0.051	0.199

Table 12.4.27 Simultaneous Transmission Scenario : Bluetooth Ant.2 + 5 GHz W-LAN Ant.1 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.2 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
Head SAR	5.3G W-LAN Ant.1	1	1	2	1+2
		Left Touch	0.043	0.289	0.332
		Right Touch	0.111	0.141	0.252
		Left Tilt	0.025	0.030	0.055
	5.6G W-LAN Ant.1	Right Tilt	0.051	0.039	0.090
		Left Touch	0.043	0.276	0.318
		Right Touch	0.111	0.168	0.279
		Left Tilt	0.025	0.194	0.219
		Right Tilt	0.051	0.113	0.164

Table 12.4.28 Simultaneous Transmission Scenario : Bluetooth Ant.2 + 5 GHz W-LAN Ant.2 (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.2 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
Head SAR	5.3G W-LAN Ant.2	1	1	2	1+2
		Left Touch	0.043	0.019	0.061
		Right Touch	0.111	0.145	0.256
		Left Tilt	0.025	0.045	0.070
		Right Tilt	0.051	0.049	0.100
	5.6G W-LAN Ant.2	Left Touch	0.043	0.138	0.181
		Right Touch	0.111	0.342	0.453
		Left Tilt	0.025	0.054	0.079
		Right Tilt	0.051	0.103	0.154

Table 12.4.29 Simultaneous Transmission Scenario : Bluetooth Ant.2 + 5 GHz W-LAN MIMO (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth Ant.2 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
Head SAR	5.3G W-LAN MIMO	1	1	2	1+2
		Left Touch	0.043	0.245	0.288
		Right Touch	0.111	0.193	0.304
		Left Tilt	0.025	0.047	0.072
	5.6G W-LAN MIMO	Right Tilt	0.051	0.091	0.142
		Left Touch	0.043	0.402	0.444
		Right Touch	0.111	0.252	0.363
		Left Tilt	0.025	0.202	0.227
		Right Tilt	0.051	0.076	0.127

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.077	0.301	0.327	0.378
		Rear	0.408	0.306	0.243	0.714	0.650	0.956
	GPRS 850	Front	0.412	0.051	0.077	0.463	0.489	0.540
		Rear	0.400	0.306	0.243	0.706	0.643	0.949
	GSM 1900	Front	0.209	0.051	0.077	0.260	0.286	0.337
		Rear	0.245	0.306	0.243	0.551	0.487	0.783
	GPRS 1900	Front	0.235	0.051	0.077	0.286	0.313	0.364
		Rear	0.269	0.306	0.243	0.575	0.512	0.818
	WCDMA 850	Front	0.418	0.051	0.077	0.469	0.495	0.546
		Rear	0.404	0.306	0.243	0.710	0.647	0.953
	LTE Band 12	Front	0.268	0.051	0.077	0.319	0.345	0.396
		Rear	0.317	0.306	0.243	0.623	0.559	0.865

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.060	0.301	0.310	0.361
		Rear	0.408	0.306	0.120	0.714	0.528	0.834
	GPRS 850	Front	0.412	0.051	0.060	0.463	0.472	0.523
		Rear	0.400	0.306	0.120	0.706	0.520	0.826
	GSM 1900	Front	0.209	0.051	0.060	0.260	0.269	0.320
		Rear	0.245	0.306	0.120	0.551	0.385	0.671
	GPRS 1900	Front	0.235	0.051	0.060	0.286	0.296	0.347
		Rear	0.269	0.306	0.120	0.575	0.390	0.696
	WCDMA 850	Front	0.418	0.051	0.060	0.469	0.478	0.529
		Rear	0.404	0.306	0.120	0.710	0.524	0.830
	LTE Band 12	Front	0.268	0.051	0.060	0.319	0.328	0.379
		Rear	0.317	0.306	0.120	0.623	0.437	0.743

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.088	0.301	0.338	0.389
		Rear	0.408	0.306	0.254	0.714	0.661	0.967
	GPRS 850	Front	0.412	0.051	0.088	0.463	0.500	0.551
		Rear	0.400	0.306	0.254	0.706	0.654	0.960
	GSM 1900	Front	0.209	0.051	0.088	0.260	0.297	0.348
		Rear	0.245	0.306	0.254	0.551	0.498	0.804
	GPRS 1900	Front	0.235	0.051	0.088	0.286	0.324	0.375
		Rear	0.269	0.306	0.254	0.575	0.523	0.829
	WCDMA 850	Front	0.418	0.051	0.088	0.469	0.506	0.557
		Rear	0.404	0.306	0.254	0.710	0.658	0.964
	LTE Band 12	Front	0.268	0.051	0.088	0.319	0.356	0.407
		Rear	0.317	0.306	0.254	0.623	0.570	0.876

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.158	0.301	0.407	0.458
		Rear	0.408	0.306	0.223	0.714	0.631	0.937
	GPRS 850	Front	0.412	0.051	0.158	0.463	0.569	0.620
		Rear	0.400	0.306	0.223	0.706	0.623	0.929
	GSM 1900	Front	0.209	0.051	0.158	0.260	0.367	0.418
		Rear	0.245	0.306	0.223	0.551	0.468	0.774
	GPRS 1900	Front	0.235	0.051	0.158	0.286	0.393	0.444
		Rear	0.269	0.306	0.223	0.575	0.493	0.799
	WCDMA 850	Front	0.418	0.051	0.158	0.469	0.576	0.627
		Rear	0.404	0.306	0.223	0.710	0.627	0.933
	LTE Band 12	Front	0.268	0.051	0.158	0.319	0.426	0.477
		Rear	0.317	0.306	0.223	0.623	0.540	0.846

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.094	0.301	0.344	0.395
		Rear	0.408	0.306	0.377	0.714	0.785	1.091
	GPRS 850	Front	0.412	0.051	0.094	0.463	0.506	0.557
		Rear	0.400	0.306	0.377	0.706	0.777	1.083
	GSM 1900	Front	0.209	0.051	0.094	0.260	0.303	0.354
		Rear	0.245	0.306	0.377	0.551	0.622	0.928
	GPRS 1900	Front	0.235	0.051	0.094	0.286	0.329	0.380
		Rear	0.269	0.306	0.377	0.575	0.647	0.953
	LTE Band 12	Front	0.418	0.051	0.094	0.469	0.512	0.563
		Rear	0.404	0.306	0.377	0.710	0.782	1.088

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.144	0.301	0.394	0.445
		Rear	0.408	0.306	0.459	0.714	0.867	1.173
	GPRS 850	Front	0.412	0.051	0.144	0.463	0.556	0.607
		Rear	0.400	0.306	0.459	0.706	0.859	1.165
	GSM 1900	Front	0.209	0.051	0.144	0.260	0.354	0.405
		Rear	0.245	0.306	0.459	0.551	0.704	1.010
	GPRS 1900	Front	0.235	0.051	0.144	0.286	0.380	0.431
		Rear	0.269	0.306	0.459	0.575	0.729	1.035
	WCDMA 850	Front	0.418	0.051	0.144	0.469	0.563	0.614
		Rear	0.404	0.306	0.459	0.710	0.864	1.170
	LTE Band 12	Front	0.268	0.051	0.144	0.319	0.412	0.463
		Rear	0.317	0.306	0.459	0.623	0.776	1.082

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.077	0.284	0.327	0.361
		Rear	0.408	0.130	0.243	0.538	0.650	0.781
	GPRS 850	Front	0.412	0.034	0.077	0.445	0.489	0.523
		Rear	0.400	0.130	0.243	0.531	0.643	0.773
	GSM 1900	Front	0.209	0.034	0.077	0.243	0.286	0.320
		Rear	0.245	0.130	0.243	0.375	0.487	0.618
	GPRS 1900	Front	0.235	0.034	0.077	0.269	0.313	0.346
		Rear	0.269	0.130	0.243	0.400	0.512	0.642
	WCDMA 850	Front	0.418	0.034	0.077	0.452	0.495	0.529
		Rear	0.404	0.130	0.243	0.535	0.647	0.777
	LTE Band 12	Front	0.268	0.034	0.077	0.302	0.345	0.379
		Rear	0.317	0.130	0.243	0.447	0.559	0.690

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.060	0.284	0.310	0.344
		Rear	0.408	0.130	0.120	0.538	0.528	0.658
	GPRS 850	Front	0.412	0.034	0.060	0.445	0.472	0.506
		Rear	0.400	0.130	0.120	0.531	0.520	0.651
	GSM 1900	Front	0.209	0.034	0.060	0.243	0.269	0.303
		Rear	0.245	0.130	0.120	0.375	0.365	0.496
	GPRS 1900	Front	0.235	0.034	0.060	0.269	0.296	0.329
		Rear	0.269	0.130	0.120	0.400	0.390	0.520
	WCDMA 850	Front	0.418	0.034	0.060	0.452	0.478	0.512
		Rear	0.404	0.130	0.120	0.535	0.524	0.655
	LTE Band 12	Front	0.268	0.034	0.060	0.302	0.328	0.362
		Rear	0.317	0.130	0.120	0.447	0.437	0.568

Table 12.5.9 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.088	0.284	0.338	0.372
		Rear	0.408	0.130	0.254	0.538	0.661	0.792
	GPRS 850	Front	0.412	0.034	0.088	0.445	0.500	0.534
		Rear	0.400	0.130	0.254	0.531	0.654	0.784
	GSM 1900	Front	0.209	0.034	0.088	0.243	0.297	0.331
		Rear	0.245	0.130	0.254	0.375	0.498	0.629
	GPRS 1900	Front	0.235	0.034	0.088	0.269	0.324	0.357
		Rear	0.269	0.130	0.254	0.400	0.523	0.653
	WCDMA 850	Front	0.418	0.034	0.088	0.452	0.506	0.540
		Rear	0.404	0.130	0.254	0.535	0.658	0.788
	LTE Band 12	Front	0.268	0.034	0.088	0.302	0.356	0.390
		Rear	0.317	0.130	0.254	0.447	0.570	0.701

Table 12.5.10 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.158	0.284	0.407	0.441
		Rear	0.408	0.130	0.223	0.538	0.631	0.761
	GPRS 850	Front	0.412	0.034	0.158	0.445	0.569	0.603
		Rear	0.400	0.130	0.223	0.531	0.623	0.754
	GSM 1900	Front	0.209	0.034	0.158	0.243	0.367	0.400
		Rear	0.245	0.130	0.223	0.375	0.468	0.599
	GPRS 1900	Front	0.235	0.034	0.158	0.269	0.393	0.427
		Rear	0.269	0.130	0.223	0.400	0.493	0.623
	WCDMA 850	Front	0.418	0.034	0.158	0.452	0.576	0.609
		Rear	0.404	0.130	0.223	0.535	0.627	0.758
	LTE Band 12	Front	0.268	0.034	0.158	0.302	0.426	0.459
		Rear	0.317	0.130	0.223	0.447	0.540	0.671

Table 12.5.11 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.094	0.284	0.344	0.377
		Rear	0.408	0.130	0.377	0.538	0.785	0.916
	GPRS 850	Front	0.412	0.034	0.094	0.445	0.506	0.539
		Rear	0.400	0.130	0.377	0.531	0.777	0.908
	GSM 1900	Front	0.209	0.034	0.094	0.243	0.303	0.337
		Rear	0.245	0.130	0.377	0.375	0.622	0.753
	GPRS 1900	Front	0.235	0.034	0.094	0.269	0.329	0.363
		Rear	0.269	0.130	0.377	0.400	0.647	0.777
	WCDMA 850	Front	0.418	0.034	0.094	0.452	0.512	0.546
		Rear	0.404	0.130	0.377	0.535	0.752	0.912

Table 12.5.12 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.144	0.284	0.394	0.428
		Rear	0.408	0.130	0.459	0.538	0.867	0.998
	GPRS 850	Front	0.412	0.034	0.144	0.445	0.556	0.590
		Rear	0.400	0.130	0.459	0.531	0.859	0.990
	GSM 1900	Front	0.209	0.034	0.144	0.243	0.354	0.387
		Rear	0.245	0.130	0.459	0.375	0.704	0.835
	GPRS 1900	Front	0.235	0.034	0.144	0.269	0.380	0.414
		Rear	0.269	0.130	0.459	0.400	0.729	0.859
	WCDMA 850	Front	0.418	0.034	0.144	0.452	0.563	0.596
		Rear	0.404	0.130	0.459	0.535	0.864	0.994
	LTE Band 12	Front	0.268	0.034	0.144	0.302	0.412	0.446
		Rear	0.317	0.130	0.459	0.447	0.776	0.907

Table 12.5.13 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.100	0.350
		Rear	0.408	0.520	0.928
	GPRS 850	Front	0.412	0.100	0.511
		Rear	0.400	0.520	0.920
	GSM 1900	Front	0.209	0.100	0.309
		Rear	0.245	0.520	0.765
	GPRS 1900	Front	0.235	0.100	0.335
		Rear	0.269	0.520	0.790
	WCDMA 850	Front	0.418	0.100	0.518
		Rear	0.404	0.520	0.925
	LTE Band 12	Front	0.268	0.100	0.368
		Rear	0.317	0.520	0.837

Table 12.5.14 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.034	0.284
		Rear	0.408	0.151	0.559
	GPRS 850	Front	0.412	0.034	0.446
		Rear	0.400	0.151	0.551
	GSM 1900	Front	0.209	0.034	0.243
		Rear	0.245	0.151	0.396
	GPRS 1900	Front	0.235	0.034	0.269
		Rear	0.269	0.151	0.420
	WCDMA 850	Front	0.418	0.034	0.452
		Rear	0.404	0.151	0.555
	LTE Band 12	Front	0.268	0.034	0.302
		Rear	0.317	0.151	0.468

Table 12.5.15 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.116	0.366
		Rear	0.408	0.564	0.972
	GPRS 850	Front	0.412	0.116	0.527
		Rear	0.400	0.564	0.964
	GSM 1900	Front	0.209	0.116	0.325
		Rear	0.245	0.564	0.809
	GPRS 1900	Front	0.235	0.116	0.351
		Rear	0.269	0.564	0.834
	WCDMA 850	Front	0.418	0.116	0.534
		Rear	0.404	0.564	0.968
	LTE Band 12	Front	0.268	0.116	0.384
		Rear	0.317	0.564	0.881

Table 12.5.16 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.077	0.327
		Rear	0.408	0.243	0.650
	GPRS 850	Front	0.412	0.077	0.489
		Rear	0.400	0.243	0.643
	GSM 1900	Front	0.209	0.077	0.286
		Rear	0.245	0.243	0.487
	GPRS 1900	Front	0.235	0.077	0.313
		Rear	0.269	0.243	0.512
	WCDMA 850	Front	0.418	0.077	0.495
		Rear	0.404	0.243	0.647
	LTE Band 12	Front	0.268	0.077	0.345
		Rear	0.317	0.243	0.559

Table 12.5.17 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.060	0.310
		Rear	0.408	0.120	0.528
	GPRS 850	Front	0.412	0.060	0.472
		Rear	0.400	0.120	0.520
	GSM 1900	Front	0.209	0.060	0.269
		Rear	0.245	0.120	0.365
	GPRS 1900	Front	0.235	0.060	0.296
		Rear	0.269	0.120	0.390
	WCDMA 850	Front	0.418	0.060	0.478
		Rear	0.404	0.120	0.524
	LTE Band 12	Front	0.268	0.060	0.328
		Rear	0.317	0.120	0.437

Table 12.5.18 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.088	0.338
		Rear	0.408	0.254	0.661
	GPRS 850	Front	0.412	0.088	0.500
		Rear	0.400	0.254	0.654
	GSM 1900	Front	0.209	0.088	0.297
		Rear	0.245	0.254	0.498
	GPRS 1900	Front	0.235	0.088	0.324
		Rear	0.269	0.254	0.523
	WCDMA 850	Front	0.418	0.088	0.506
		Rear	0.404	0.254	0.658
	LTE Band 12	Front	0.268	0.088	0.356
		Rear	0.317	0.254	0.570

Table 12.5.19 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.158	0.407
		Rear	0.408	0.223	0.631
	GPRS 850	Front	0.412	0.158	0.569
		Rear	0.400	0.223	0.623
	GSM 1900	Front	0.209	0.158	0.367
		Rear	0.245	0.223	0.468
	GPRS 1900	Front	0.235	0.158	0.393
		Rear	0.269	0.223	0.493
	WCDMA 850	Front	0.418	0.158	0.576
		Rear	0.404	0.223	0.627
	LTE Band 12	Front	0.268	0.158	0.426
		Rear	0.317	0.223	0.540

Table 12.5.20 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.094	0.344
		Rear	0.408	0.377	0.785
	GPRS 850	Front	0.412	0.094	0.506
		Rear	0.400	0.377	0.777
	GSM 1900	Front	0.209	0.094	0.303
		Rear	0.245	0.377	0.622
	GPRS 1900	Front	0.235	0.094	0.329
		Rear	0.269	0.377	0.647
	WCDMA 850	Front	0.418	0.094	0.512
		Rear	0.404	0.377	0.782
	LTE Band 12	Front	0.268	0.094	0.362
		Rear	0.317	0.377	0.694

Table 12.5.21 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.144	0.394
		Rear	0.408	0.459	0.867
	GPRS 850	Front	0.412	0.144	0.556
		Rear	0.400	0.459	0.859
	GSM 1900	Front	0.209	0.144	0.354
		Rear	0.245	0.459	0.704
	GPRS 1900	Front	0.235	0.144	0.380
		Rear	0.269	0.459	0.729
	WCDMA 850	Front	0.418	0.144	0.563
		Rear	0.404	0.459	0.864
	LTE Band 12	Front	0.268	0.144	0.412
		Rear	0.317	0.459	0.776

Table 12.5.22 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.250	0.051	0.301
		Rear	0.408	0.306	0.714
	GPRS 850	Front	0.412	0.051	0.463
		Rear	0.400	0.306	0.706
	GSM 1900	Front	0.209	0.051	0.260
		Rear	0.245	0.306	0.551
	GPRS 1900	Front	0.235	0.051	0.286
		Rear	0.269	0.306	0.575
	WCDMA 850	Front	0.418	0.051	0.469
		Rear	0.404	0.306	0.710
	LTE Band 12	Front	0.268	0.051	0.319
		Rear	0.317	0.306	0.623

Table 12.5.23 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN Ant.1	Front	0.051	0.077	0.128
		Rear	0.306	0.243	0.549
	5.6G W-LAN Ant.1	Front	0.051	0.158	0.209
		Rear	0.306	0.223	0.529

Table 12.5.24 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN Ant.2	Front	0.051	0.060	0.111
		Rear	0.306	0.120	0.426
	5.6G W-LAN Ant.2	Front	0.051	0.094	0.145
		Rear	0.306	0.377	0.683

Table 12.5.25 Simultaneous Transmission Scenario : Bluetooth Ant.1 + 5 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.1 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN MIMO	Front	0.051	0.088	0.139
		Rear	0.306	0.254	0.560
	5.6G W-LAN MIMO	Front	0.051	0.144	0.195
		Rear	0.306	0.459	0.765

Table 12.5.26 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	GSM 850	Front	1	2	1+2
		Rear	0.250	0.034	0.284
	GPRS 850	Front	0.408	0.130	0.538
		Rear	0.412	0.034	0.445
	GSM 1900	Front	0.400	0.130	0.531
		Rear	0.209	0.034	0.243
	GPRS 1900	Front	0.245	0.130	0.375
		Rear	0.235	0.034	0.269
	WCDMA 850	Front	0.269	0.130	0.400
		Rear	0.418	0.034	0.452
	LTE Band 12	Front	0.404	0.130	0.535
		Rear	0.268	0.034	0.302
			0.317	0.130	0.447

Table 12.5.27 Simultaneous Transmission Scenario : Bluetooth Ant.2 + 5 GHz W-LAN Ant.1 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.2 SAR (W/kg)	5G W-LAN Ant.1 SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	5.3G W-LAN Ant.1	Front	1	2	1+2
		Rear	0.034	0.077	0.111
	5.6G W-LAN Ant.1	Front	0.130	0.243	0.373
		Rear	0.034	0.158	0.191
			0.130	0.223	0.354

Table 12.5.28 Simultaneous Transmission Scenario : Bluetooth Ant.2 + 5 GHz W-LAN Ant.2 (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.2 SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	5.3G W-LAN Ant.2	Front	1	2	1+2
		Rear	0.034	0.060	0.094
	5.6G W-LAN Ant.2	Front	0.130	0.120	0.251
		Rear	0.034	0.094	0.128
			0.130	0.377	0.508

Table 12.5.29 Simultaneous Transmission Scenario : Bluetooth Ant.2 + 5 GHz W-LAN MIMO (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth Ant.2 SAR (W/kg)	5G W-LAN MIMO SAR (W/kg)	ΣSAR (W/kg)
Body-Worn SAR	5.3G W-LAN MIMO	Front	1	2	1+2
		Rear	0.034	0.088	0.122
	5.6G W-LAN MIMO	Front	0.130	0.254	0.384
		Rear	0.034	0.144	0.178
			0.130	0.459	0.590

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.1 SAR (W/kg)	2SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.018	0.018
		Bottom	-	-	-
		Front	0.412	0.100	0.511
		Rear	0.400	0.520	0.920
		Right	0.177	0.485	0.662
		Left	0.327	-	0.327
	GPRS 1900	Top	-	0.018	0.018
		Bottom	-	-	-
		Front	0.235	0.100	0.335
		Rear	0.269	0.520	0.790
		Right	0.054	0.485	0.539
		Left	0.150	-	0.150
	WCDMA 850	Top	-	0.018	0.018
		Bottom	-	-	-
		Front	0.418	0.100	0.518
		Rear	0.404	0.520	0.925
		Right	0.198	0.485	0.683
		Left	0.386	-	0.386
	LTE Band 12	Top	-	0.018	0.018
		Bottom	-	-	-
		Front	0.268	0.100	0.368
		Rear	0.317	0.520	0.837
		Right	0.109	0.485	0.593
		Left	0.261	-	0.261

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN Ant.2 SAR (W/kg)	2SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	-	-
		Bottom	-	-	-
		Front	0.412	0.034	0.445
		Rear	0.400	0.151	0.551
		Right	0.177	-	0.177
		Left	0.327	0.091	0.418
	GPRS 1900	Top	-	-	-
		Bottom	-	-	-
		Front	0.235	0.034	0.269
		Rear	0.269	0.151	0.420
		Right	0.054	-	0.054
		Left	0.150	0.091	0.241
	WCDMA 850	Top	-	-	-
		Bottom	-	-	-
		Front	0.418	0.034	0.452
		Rear	0.404	0.151	0.555
		Right	0.198	-	0.198
		Left	0.386	0.091	0.478
	LTE Band 12	Top	-	-	-
		Bottom	-	-	-
		Front	0.268	0.034	0.302
		Rear	0.317	0.151	0.468
		Right	0.109	-	0.109
		Left	0.261	0.091	0.352

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN MIMO (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN MIMO SAR (W/kg)	2SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.024	0.024
		Bottom	-	-	-
		Front	0.412	0.116	0.527
		Rear	0.400	0.564	0.964
		Right	0.177	0.520	0.698
		Left	0.327	0.110	0.437
	GPRS 1900	Top	-	0.024	0.024
		Bottom	-	-	-
		Front	0.235	0.116	0.351
		Rear	0.269	0.564	0.834
		Right	0.054	0.520	0.575
		Left	0.150	0.110	0.259
	WCDMA 850	Top	-	0.024	0.024
		Bottom	-	-	-
		Front	0.418	0.116	0.534
		Rear	0.404	0.564	0.968
		Right	0.198	0.520	0.719
		Left	0.386	0.110	0.496
	LTE Band 12	Top	-	0.024	0.024
		Bottom	-	-	-
		Front	0.268	0.116	0.384
		Rear	0.317	0.564	0.881
		Right	0.109	0.520	0.629
		Left	0.261	0.110	0.371

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.1 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.1 SAR (W/kg)	2SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.013	0.013
		Bottom	-	-	-
		Front	0.412	0.051	0.463
		Rear	0.400	0.306	0.706
		Right	0.177	0.290	0.467
		Left	0.327	-	0.327
	GPRS 1900	Top	-	0.013	0.013
		Bottom	-	-	-
		Front	0.235	0.051	0.286
		Rear	0.269	0.306	0.575
		Right	0.054	0.290	0.344
		Left	0.150	-	0.150
	WCDMA 850	Top	-	0.013	0.013
		Bottom	-	-	-
		Front	0.418	0.051	0.469
		Rear	0.404	0.306	0.710
		Right	0.198	0.290	0.488
		Left	0.386	-	0.386
	LTE Band 12	Top	-	0.013	0.013
		Bottom	-	-	-
		Front	0.268	0.051	0.319
		Rear	0.317	0.306	0.623
		Right	0.109	0.290	0.399
		Left	0.261	-	0.261

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth Ant.2 (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth Ant.2 SAR (W/kg)	ΣSAR (W/kg)
Hotspot SAR	GPRS 850	Top	-	-	-
		Bottom	-	-	-
		Front	0.412	0.034	0.445
		Rear	0.400	0.130	0.531
		Right	0.177	0.081	0.258
		Left	0.327	-	0.327
	GPRS 1900	Top	-	-	-
		Bottom	-	-	-
		Front	0.235	0.034	0.269
		Rear	0.269	0.130	0.400
		Right	0.054	0.081	0.135
		Left	0.150	-	0.150
	WCDMA 850	Top	-	-	-
		Bottom	-	-	-
		Front	0.418	0.034	0.452
		Rear	0.404	0.130	0.535
		Right	0.198	0.081	0.279
		Left	0.386	-	0.386
	LTE Band 12	Top	-	-	-
		Bottom	-	-	-
		Front	0.268	0.034	0.302
		Rear	0.317	0.130	0.447
		Right	0.109	0.081	0.190
		Left	0.261	-	0.261

12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. EQUIPMENT LIST

Table 14.1.1 Test Equipment Calibration

Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
☒ SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒ SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
☒ Robot	SPEAG	TX60L	N/A	N/A	F14/5VR2A1/A/01
☒ Robot	SPEAG	TX60L	N/A	N/A	F14/50NHA1/A/01
☒ Robot Controller	SPEAG	CS8C	N/A	N/A	F14/5VR2A1/C/01
☒ Robot Controller	SPEAG	CS8C	N/A	N/A	F14/50NHA1/C/01
☒ Joystick	SPEAG	N/A	N/A	N/A	D21142605A
☒ Joystick	SPEAG	N/A	N/A	N/A	005695
☒ Intel Xeon W-2255 3.70 GHz Windows 11 Pro	N/A	N/A	N/A	N/A	N/A
☒ Intel Xeon W-2255 3.70 GHz Windows 11 Pro	N/A	N/A	N/A	N/A	N/A
☒ Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒ Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
☒ Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
☒ Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
☒ Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1220
☒ 2mm Oval Phantom ELI5	SPEAG	QD0VA002AA	N/A	N/A	1166
☒ Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1837
☒ Data Acquisition Electronics	SPEAG	DAE4V1	2023-07-17	2024-07-17	1335
☒ Data Acquisition Electronics	SPEAG	DAE4V1	2022-09-21	2023-09-21	1453
☒ Data Acquisition Electronics	SPEAG	DAE4V1	2022-08-19	2023-08-19	1396
☒ Dosimetric E-Field Probe	SPEAG	EX3DV4	2023-03-22	2024-03-22	3916
☒ Dosimetric E-Field Probe	SPEAG	EX3DV4	2023-05-04	2024-05-04	3866
☒ Dosimetric E-Field Probe	SPEAG	EX3DV4	2023-04-24	2024-04-24	7337
☒ Confined Loop Antenna (13 MHz)	SPEAG	CLA13	2022-11-07	2023-11-07	1030
☒ 750 MHz SAR Dipole	SPEAG	D750V3	2023-01-21	2025-01-21	1049
☒ 835 MHz SAR Dipole	SPEAG	D835V2	2023-04-26	2025-04-26	464
☒ 1 900 MHz SAR Dipole	SPEAG	D1900V2	2023-04-18	2025-04-18	50029
☒ 2 450 MHz SAR Dipole	SPEAG	D2450V2	2023-07-19	2025-07-19	726
☒ 5 GHz SAR Dipole	SPEAG	D5GHzV2	2023-01-25	2025-01-25	1103
☒ Signal Generator	Agilent	E4438C	2023-06-24	2024-06-24	US41461520
☒ Amplifier	RFBAY,Inc	MPA-40-40	2022-12-16	2023-12-16	21151801
☒ Amplifier	EMPOWER	BBS3Q7ELU	2023-06-24	2024-06-24	1020
☒ High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2023-06-24	2024-06-24	1005
☒ Power Meter	HP	EPM-442A	2022-12-16	2023-12-16	GB37170267
☒ Power Meter	Anritsu	ML2488B	2022-12-16	2023-12-16	0846003
☒ Power Sensor	Anritsu	MA2472D	2022-12-16	2023-12-16	0845419
☒ Power Sensor	HP	8481A	2022-12-16	2023-12-16	2702A65976
☒ Power Sensor	HP	8481A	2022-12-16	2023-12-16	2702A61707
☒ Dual Directional Coupler	Agilent	778D-012	2022-12-16	2023-12-16	50399
☒ Directional Coupler	HP	772D	2022-12-16	2023-12-16	2839A00902
☒ Low Pass Filter 1 GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2023-06-24	2024-06-24	165
☒ Low Pass Filter 1.5 GHz	Micro LAB	LA-15N	2023-06-24	2024-06-24	2
☒ Low Pass Filter 3.0 GHz	MICROLAB	LA-30N	2023-06-24	2024-06-24	2
☒ Low Pass Filter 6.0 GHz	MICROLAB	LA-60N	2022-12-16	2023-12-16	03942
☒ Attenuators(10 dB)	WEINSCHEL	23-10-34	2022-12-16	2023-12-16	BP4387
☒ Attenuators	Saluki	3.5TS2-3dB-26.5G	2023-06-23	2024-06-23	21090703
☒ Dielectric Probe kit	SPEAG	DAKS-12	2022-11-08	2023-11-08	1040
☒ Dielectric Probe kit	SPEAG	R60	2022-11-28	2023-11-28	22323001
☒ Dielectric Probe kit	SPEAG	DAK-3.5	2023-07-17	2024-07-17	1046
☒ Dielectric Probe kit	SPEAG	R140	2023-07-31	2024-07-31	0101213
☒ 8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2023-06-24	2024-06-24	GB41321164
☒ Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2022-12-16	2023-12-16	101414
☒ Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2022-12-16	2023-12-16	166448
☒ Bluetooth Tester	TESCOM	TC-3000C	2023-06-23	2024-06-23	3000C000563

NOTE(S):

1. The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.

2. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

14. MEASUREMENT UNCERTAINTIES

750 ~ 2 450 MHz Head (SN: 7337)

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U_i 1 g	Ci x U_i 10 g	vi 2 or Veff
Measurement System										
Probe calibration	6.0	Normal	1	1	1	6.0	6.0	6.0	6.0	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	10.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	7.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
Test Sample Related										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
Physical Parameters										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.9	Normal	1	0.78	0.71	3.0	2.8	2.4	2.0	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.7	Normal	1	0.23	0.26	0.85	1.0	0.21	0.27	10
Temp. unc. - Conductivity	1.8	Rectangular	√3	0.78	0.71	0.81	0.74	0.63	0.52	∞
Temp. unc. - Permittivity	1.9	Rectangular	√3	0.23	0.26	0.25	0.29	0.06	0.07	∞
Combined Standard Uncertainty						13	13			330
Expanded Uncertainty (k=2)						26	26			

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95 \% } k = 2)$$

5 GHz Head (SN: 3866)

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U _i 1 g	Ci x U _i 10 g	vi 2 or Veff
Measurement System										
Probe calibration	6.6	Normal	1	1	1	6.6	6.6	6.6	6.6	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.25	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	3.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	3.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
Test Sample Related										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
Physical Parameters										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	4.0	Normal	1	0.78	0.71	3.1	2.8	2.4	2.0	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.9	Normal	1	0.23	0.26	0.90	1.0	0.21	0.26	10
Temp. unc. - Conductivity	2.0	Rectangular	√3	0.78	0.71	0.90	0.82	0.70	0.58	∞
Temp. unc. - Permittivity	2.0	Rectangular	√3	0.23	0.26	0.27	0.30	0.06	0.08	∞
Combined Standard Uncertainty						14	13			330
Expanded Uncertainty (k=2)						28	26			

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 14\%$$

$$= 28\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95 \% } k = 2)$$

13 MHz Head (SN: 3916)

Error Description	Uncertainty value %	Probability Distribution	Divisor	(Ci) 1 g	(Ci) 10 g	Standard 1 g (%)	Standard 10 g (%)	Ci x U _i 1 g	Ci x U _i 10 g	vi 2 or Veff
Measurement System										
Probe calibration	6.7	Normal	1	1	1	6.7	6.7	6.7	6.7	∞
Axial isotropy	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Hemispherical isotropy	9.6	Rectangular	√3	1	1	5.5	5.5	5.5	5.5	∞
Boundary Effects	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Probe Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	2.7	2.7	∞
Probe modulation response	2.4	Rectangular	√3	1	1	1.4	1.4	1.4	1.4	∞
Detection limits	0.3	Rectangular	√3	1	1	0.14	0.14	0.14	0.14	∞
Readout Electronics	1.0	Normal	1	1	1	1.0	1.0	1.0	1.0	∞
Response time	0.8	Rectangular	√3	1	1	0.46	0.46	0.46	0.46	∞
Integration time	2.6	Rectangular	√3	1	1	1.5	1.5	1.5	1.5	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.8	1.8	1.8	1.8	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	0.23	0.23	∞
Probe Positioning	2.9	Rectangular	√3	1	1	1.7	1.7	1.7	1.7	∞
Spatial x-y-Resolution	10.0	Rectangular	√3	1	1	5.8	5.8	5.8	5.8	∞
Fast SAR z-Approximation	7.0	Rectangular	√3	1	1	4.0	4.0	4.0	4.0	∞
Test Sample Related										
Device Positioning	2.9	Normal	1	1	1	2.9	2.9	2.9	2.9	145
Device Holder	3.6	Normal	1	1	1	3.6	3.6	3.6	3.6	5
Power Drift	5.0	Rectangular	√3	1	1	2.9	2.9	2.9	2.9	∞
SAR Scaling	2.0	Rectangular	√3	1	1	1.2	1.2	1.2	1.2	∞
Physical Parameters										
Phantom Shell	7.6	Rectangular	√3	1	1	4.4	4.4	4.4	4.4	∞
Liquid conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	1.8	1.2	1.2	0.5	∞
Liquid conductivity (Meas.)	3.5	Normal	1	0.78	0.71	2.7	2.5	2.1	1.8	10
Liquid permittivity (Target)	5.0	Rectangular	√3	0.60	0.49	1.7	1.4	1.0	0.7	∞
Liquid permittivity (Meas.)	3.8	Normal	1	0.23	0.26	0.87	1.0	0.20	0.26	10
Temp. unc. - Conductivity	1.9	Rectangular	√3	0.78	0.71	0.86	0.78	0.67	0.55	∞
Temp. unc. - Permittivity	2.0	Rectangular	√3	0.23	0.26	0.27	0.30	0.06	0.08	∞
Combined Standard Uncertainty						14	13			330
Expanded Uncertainty (k=2)						28	26			

$$U(1\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 14\%$$

$$= 28\% \text{ (The confidence level is about 95 \% } k = 2)$$

$$U(10\text{ g}) = k \cdot u_c$$

$$= 2 \cdot 13\%$$

$$= 26\% \text{ (The confidence level is about 95 \% } k = 2)$$

15. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

16. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010